


Site: AC 1	Time: 2015/07/07 - 22:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11n-HT20 Ant 2	

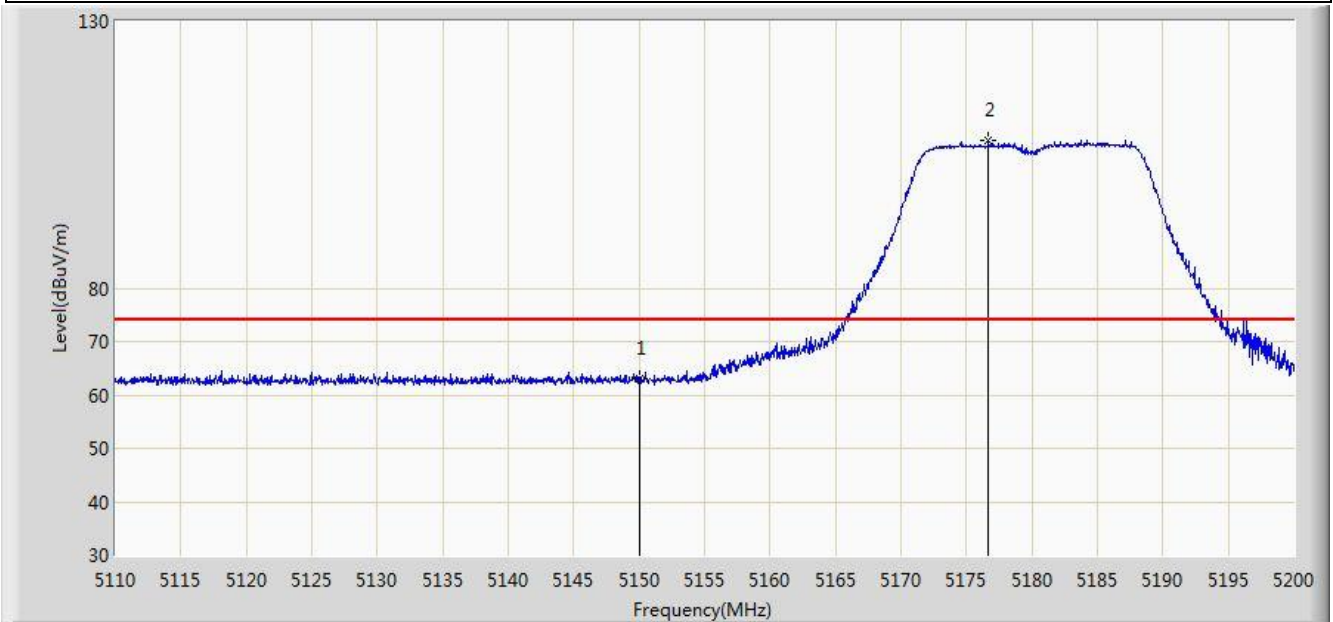


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	62.943	25.491	-11.057	74.000	37.452	PK
2		*	5176.690	107.735	70.354	N/A	N/A	37.381	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 22:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11n-HT20 Ant 2	

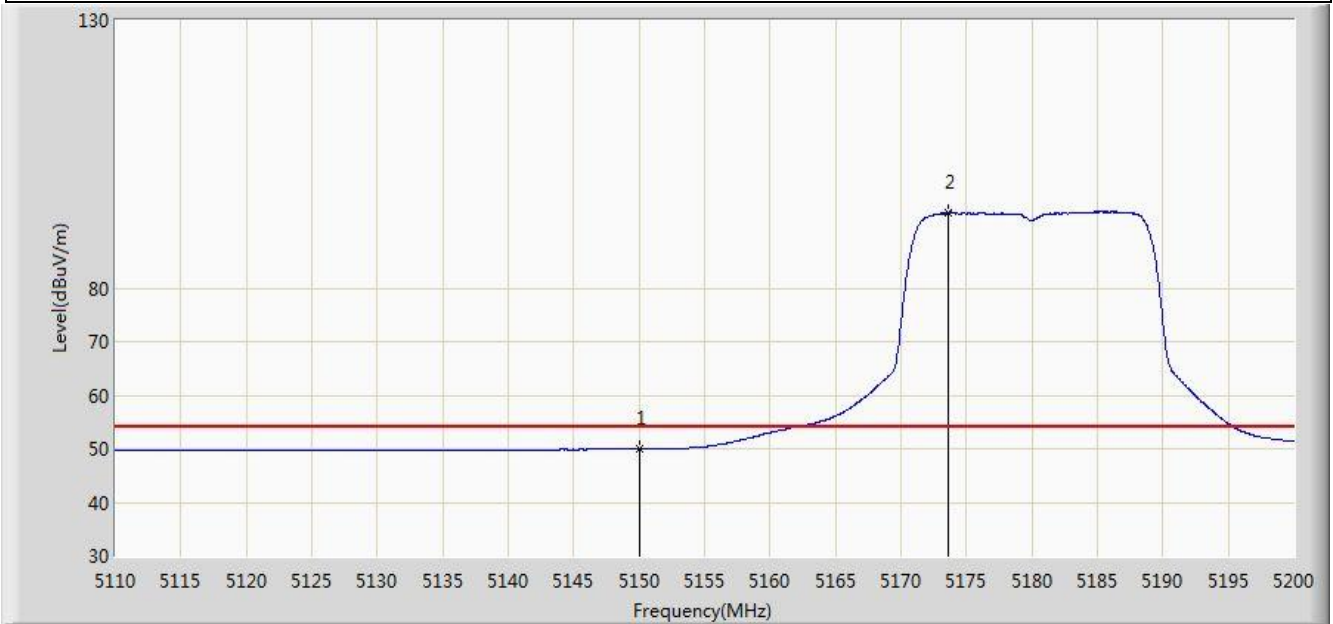


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.946	12.494	-4.054	54.000	37.452	AV
2		*	5173.630	94.154	56.766	N/A	N/A	37.388	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 22:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11n-HT20 Ant 2	

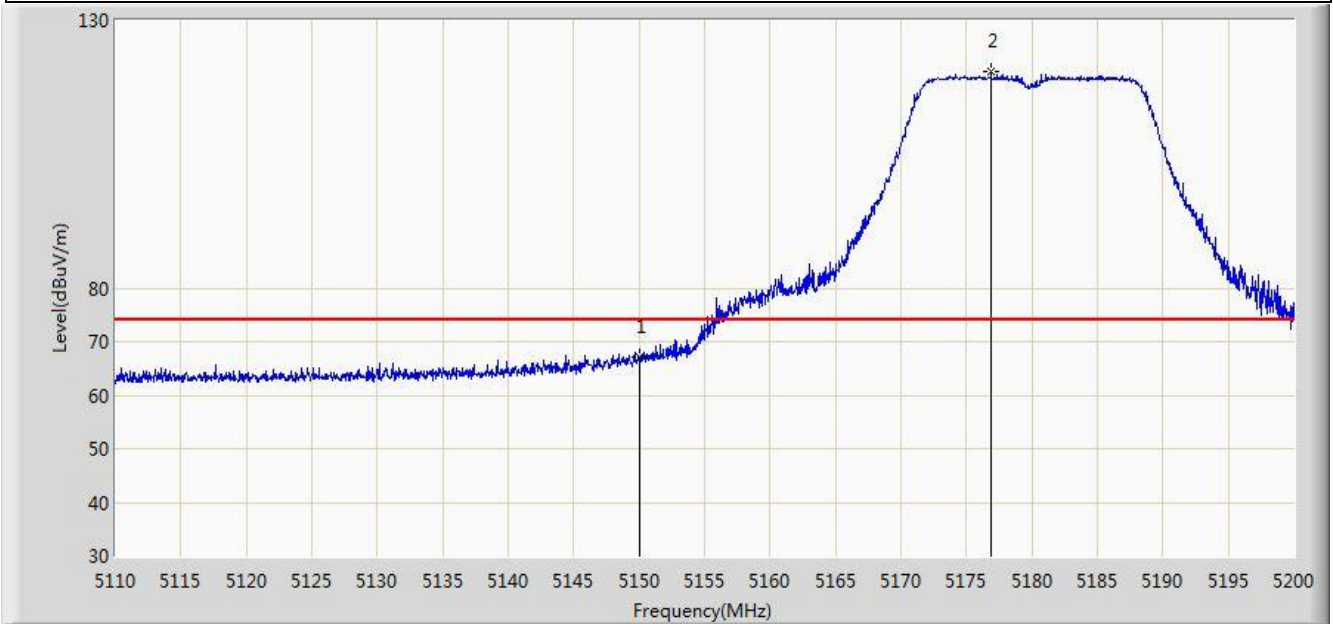


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	67.119	29.667	-6.881	74.000	37.452	PK
2		*	5176.870	120.403	83.022	N/A	N/A	37.381	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 22:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11n-HT20 Ant 2	

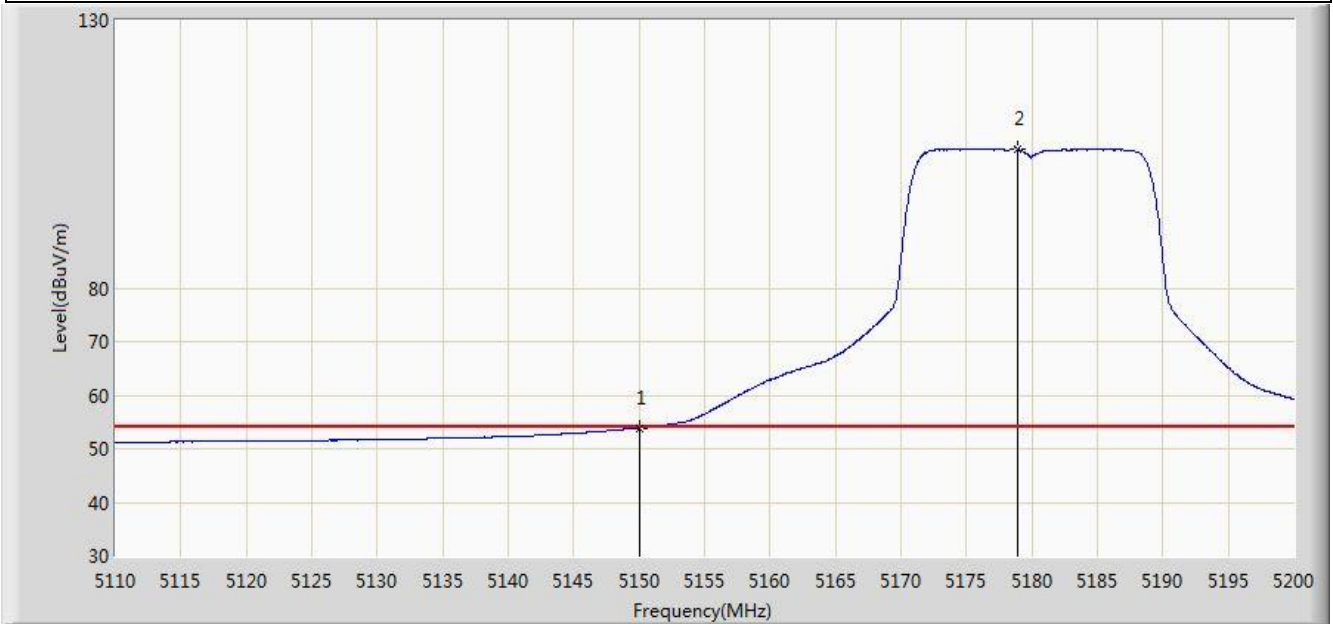


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.369	15.917	-0.531	54.000	37.452	AV
2		*	5178.940	105.947	68.571	N/A	N/A	37.376	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 22:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11n-HT20 Ant 2	

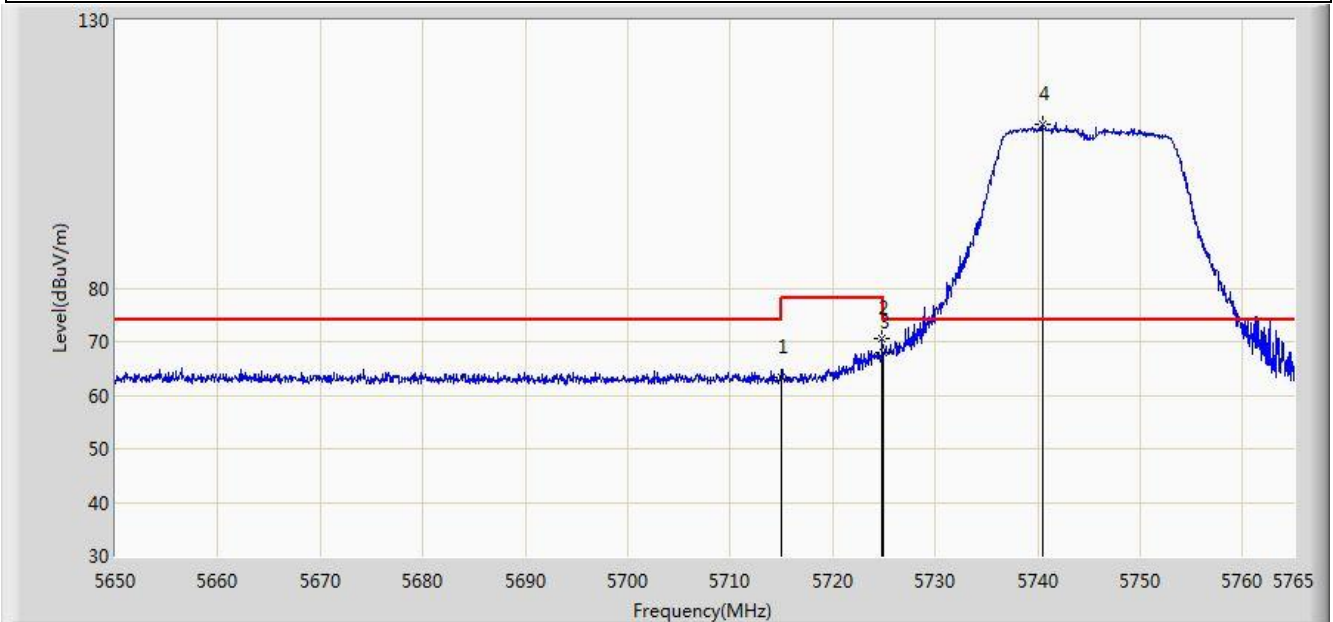


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	63.334	25.385	-10.666	74.000	37.949	PK
2			5724.808	70.483	32.494	-7.717	78.200	37.989	PK
3			5725.000	67.887	29.897	-10.313	78.200	37.990	PK
4		*	5740.447	110.672	72.619	N/A	N/A	38.052	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 22:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11n-HT20 Ant 2	

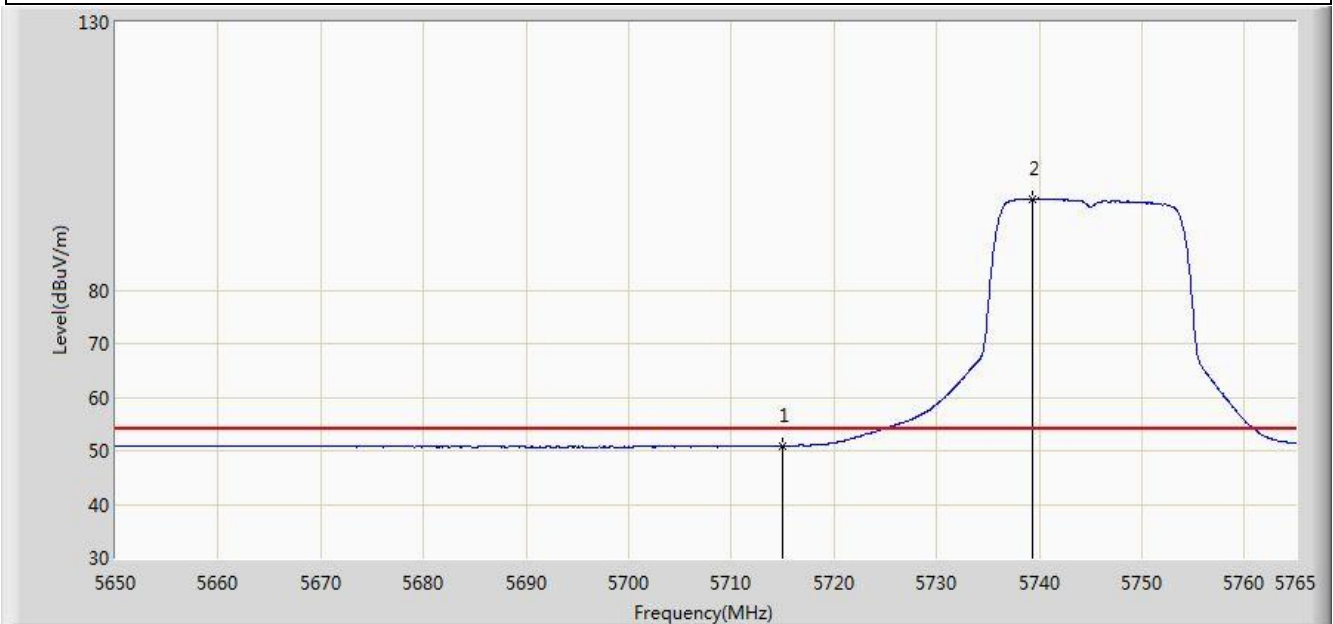


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.884	12.935	-3.116	54.000	37.949	AV
2		*	5739.355	96.988	58.939	N/A	N/A	38.049	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 22:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11n-HT20 Ant 2	

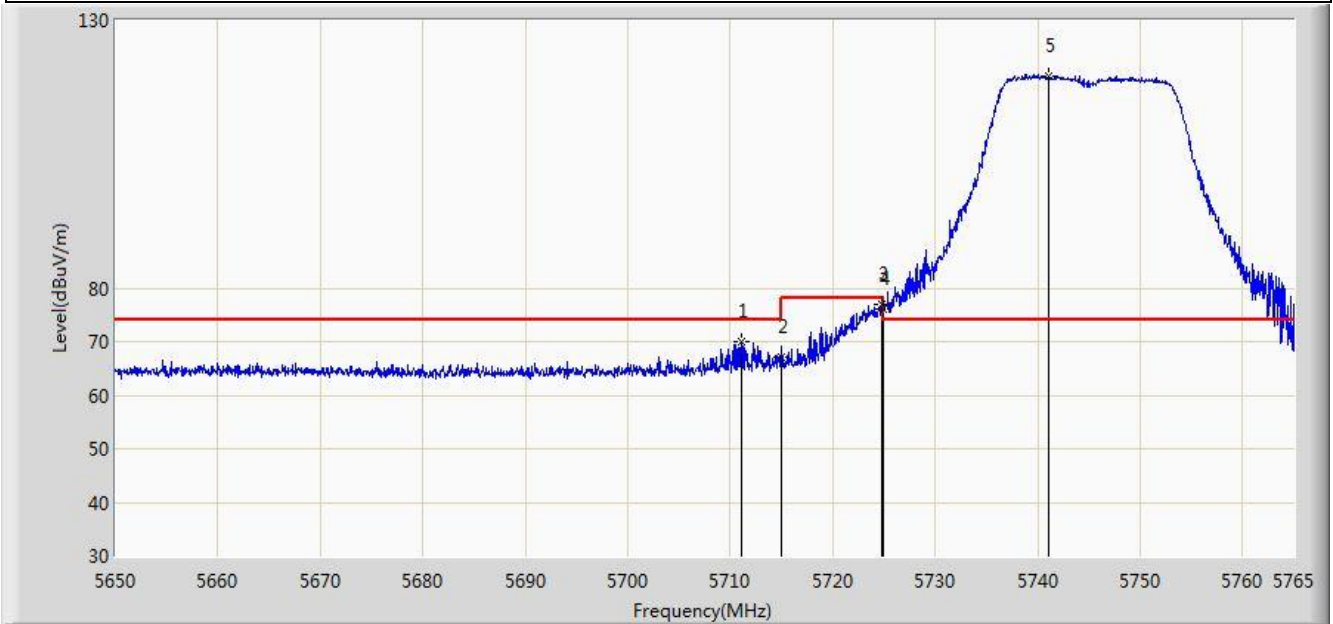


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5711.065	70.086	32.153	-3.914	74.000	37.933	PK
2			5715.000	67.073	29.124	-6.927	74.000	37.949	PK
3			5724.808	76.999	39.010	-1.201	78.200	37.989	PK
4			5725.000	76.227	38.237	-1.973	78.200	37.990	PK
5		*	5741.138	119.706	81.651	N/A	N/A	38.055	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 22:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11n-HT20 Ant 2	

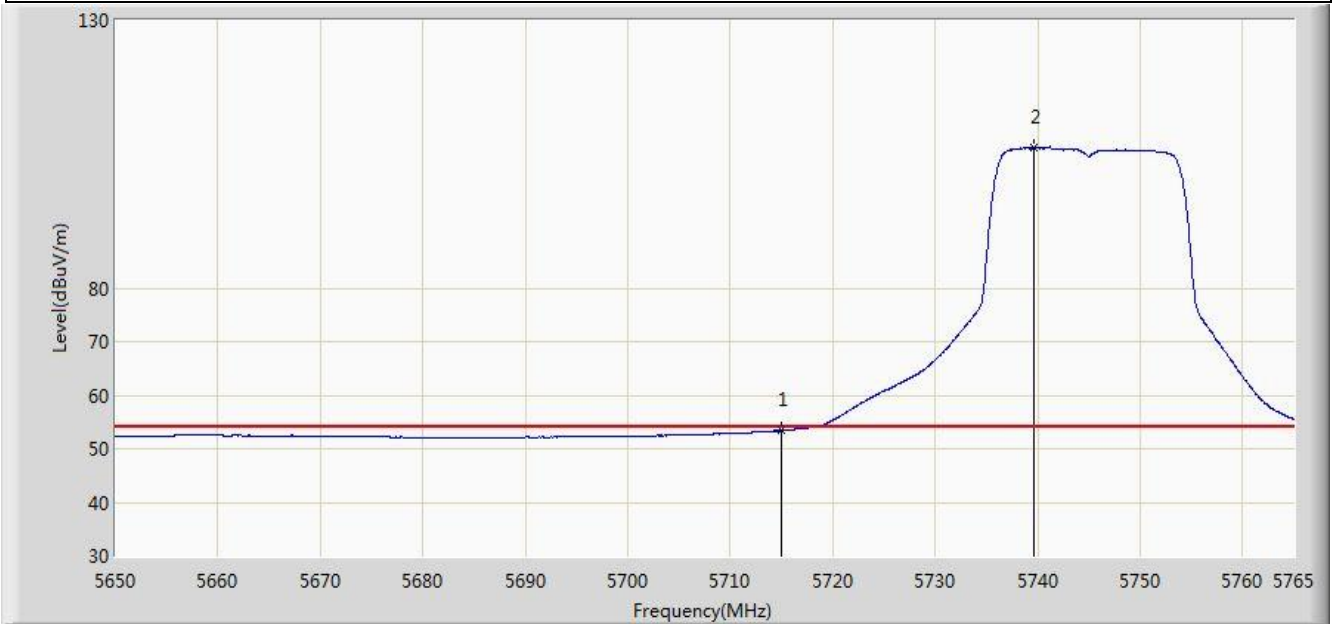


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.374	15.425	-0.626	54.000	37.949	AV
2		*	5739.643	106.264	68.214	N/A	N/A	38.050	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/07 - 23:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11n-HT20 Ant 2	

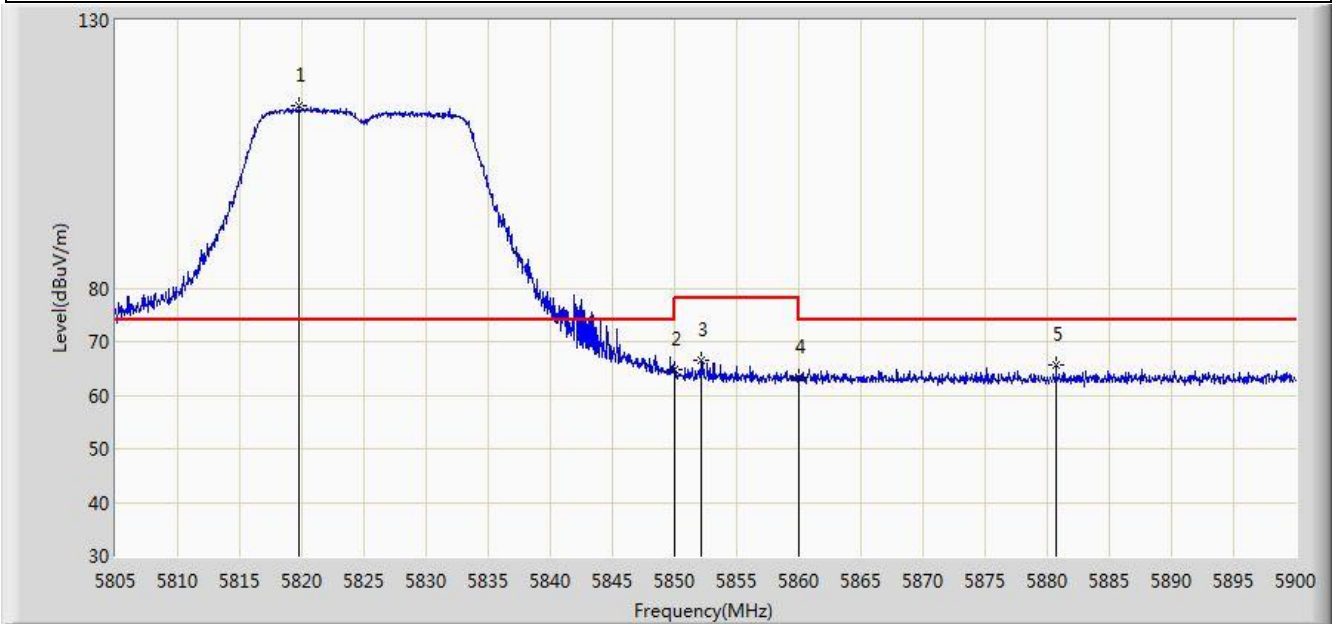


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.772	114.163	75.829	N/A	N/A	38.334	PK
2			5850.000	64.711	26.258	-13.489	78.200	38.454	PK
3			5852.120	66.523	28.065	-11.677	78.200	38.458	PK
4			5860.000	63.357	24.879	-10.643	74.000	38.478	PK
5			5880.715	65.687	27.185	-8.313	74.000	38.502	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11n-HT20 Ant 2	

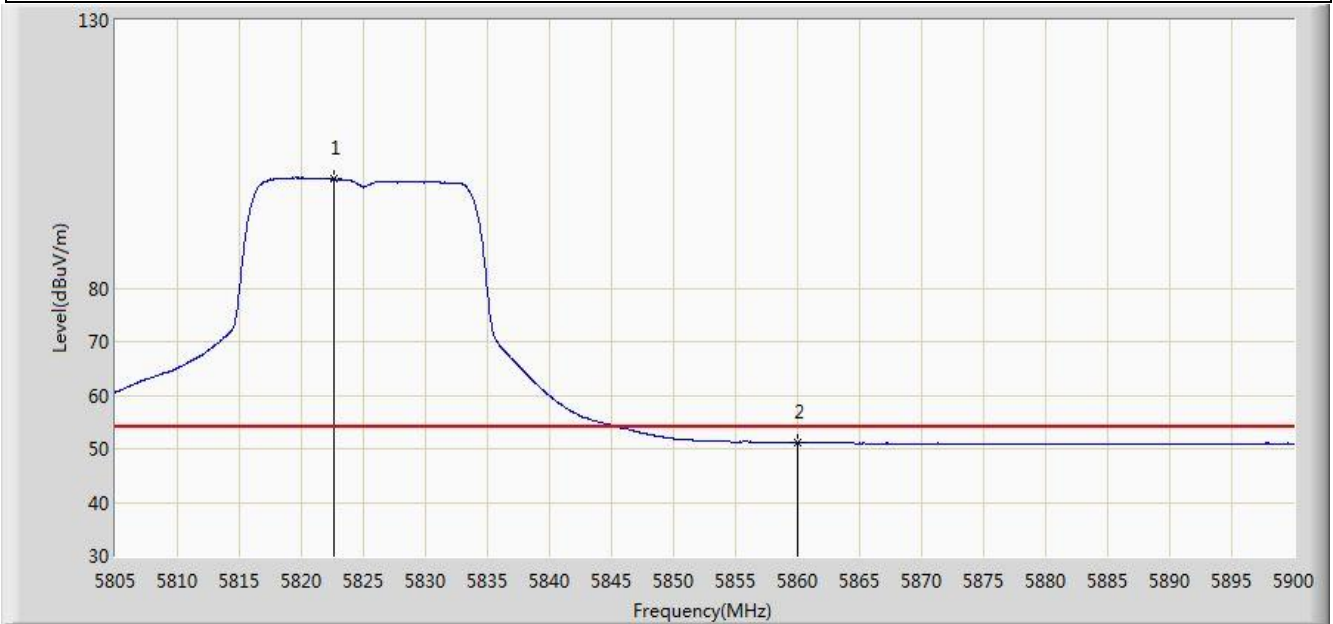


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.575	100.371	62.025	N/A	N/A	38.346	AV
2			5860.000	51.077	12.599	-2.923	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11n-HT20 Ant 2	

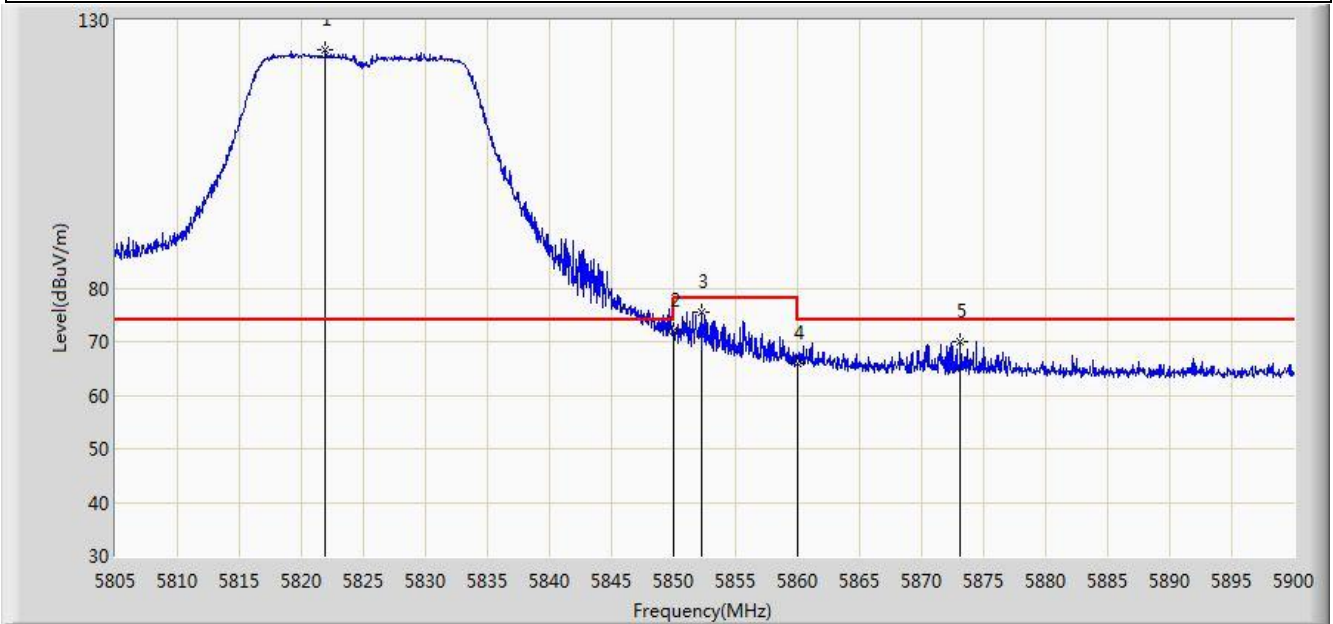


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.958	124.514	86.171	N/A	N/A	38.343	PK
2			5850.000	72.036	33.583	-6.164	78.200	38.454	PK
3			5852.215	75.612	37.153	-2.588	78.200	38.459	PK
4			5860.000	65.939	27.461	-8.061	74.000	38.478	PK
5			5873.115	69.957	31.462	-4.043	74.000	38.495	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11n-HT20 Ant 2	

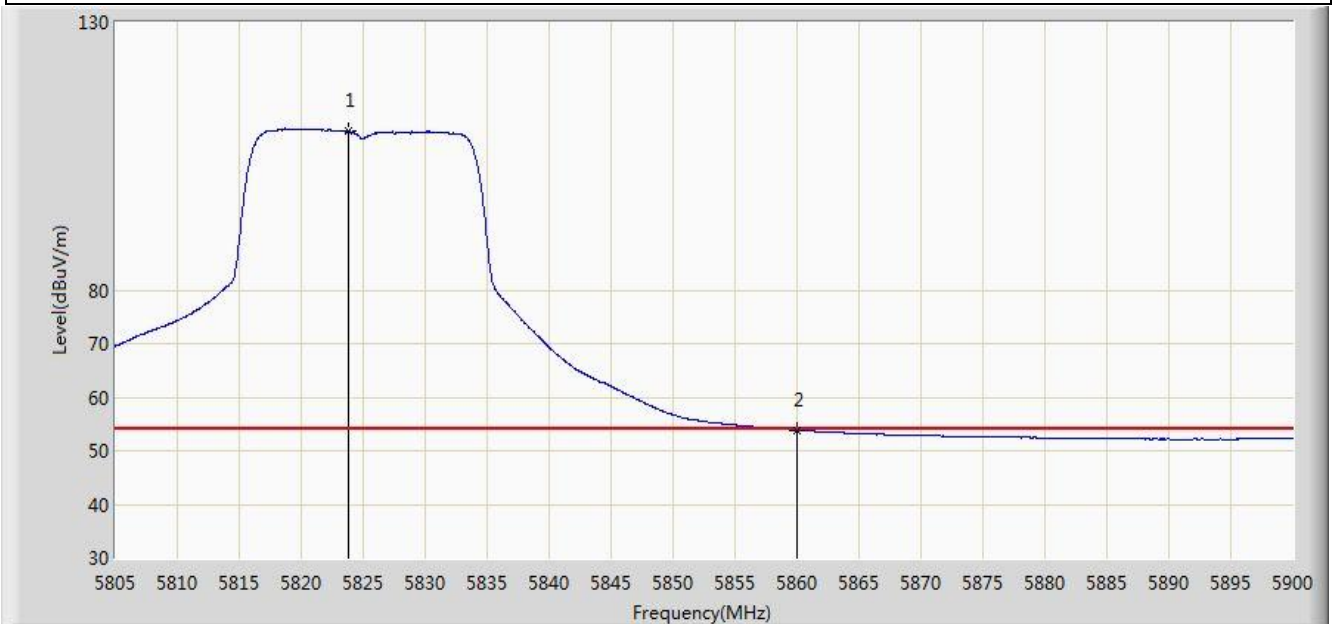


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5823.857	109.690	71.339	N/A	N/A	38.351	AV
2			5860.000	53.808	15.330	-0.192	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11n-HT40 Ant 2	

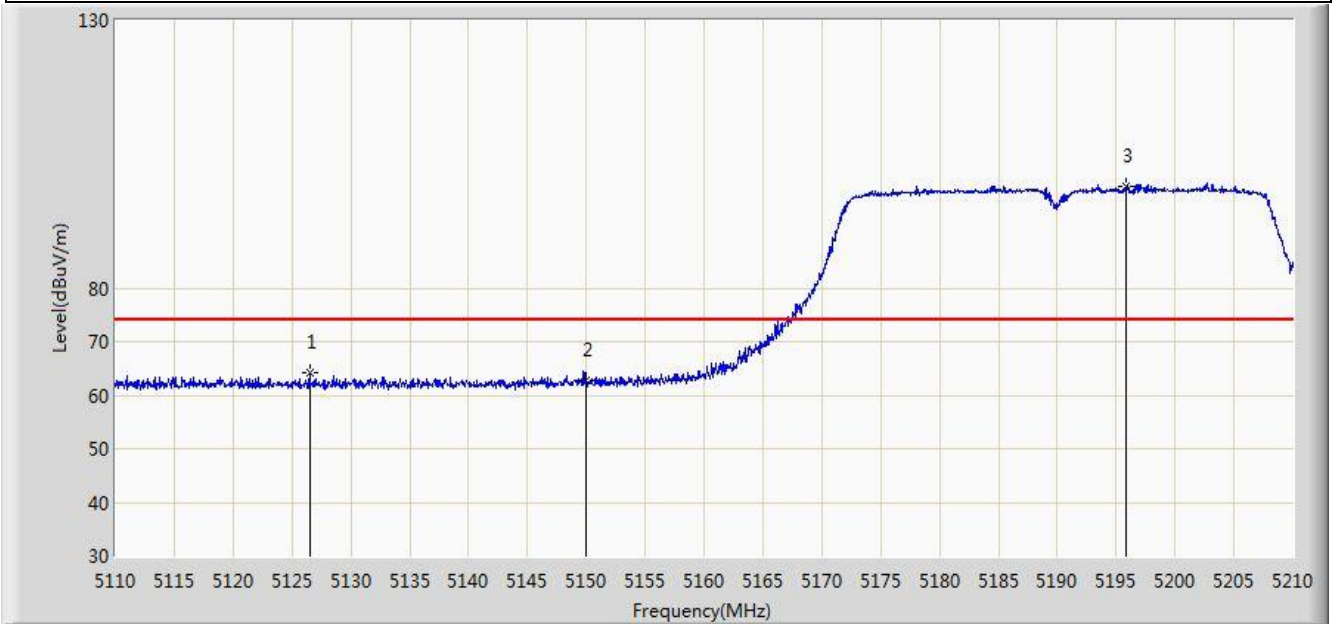


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5126.500	64.319	26.841	-9.681	74.000	37.478	PK
2			5150.000	62.756	25.304	-11.244	74.000	37.452	PK
3		*	5195.850	99.110	61.775	N/A	N/A	37.335	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11n-HT40 Ant 2	

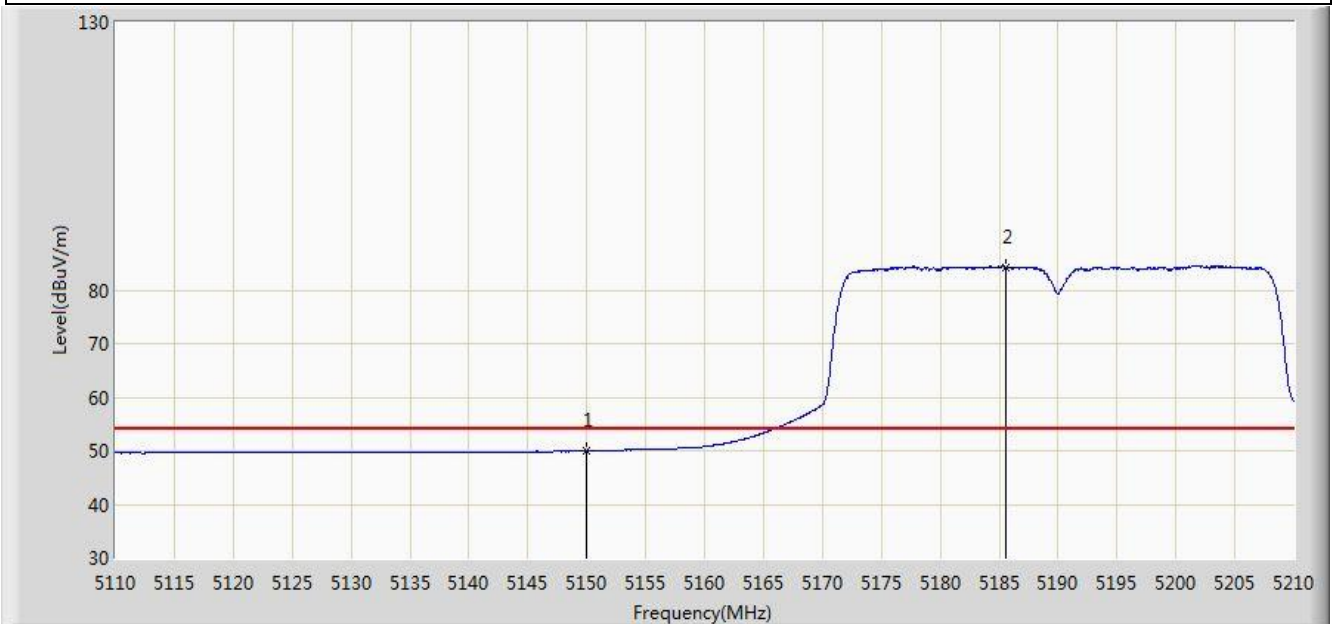


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.968	12.516	-4.032	54.000	37.452	AV
2		*	5185.550	84.312	46.952	N/A	N/A	37.360	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11n-HT40 Ant 2	

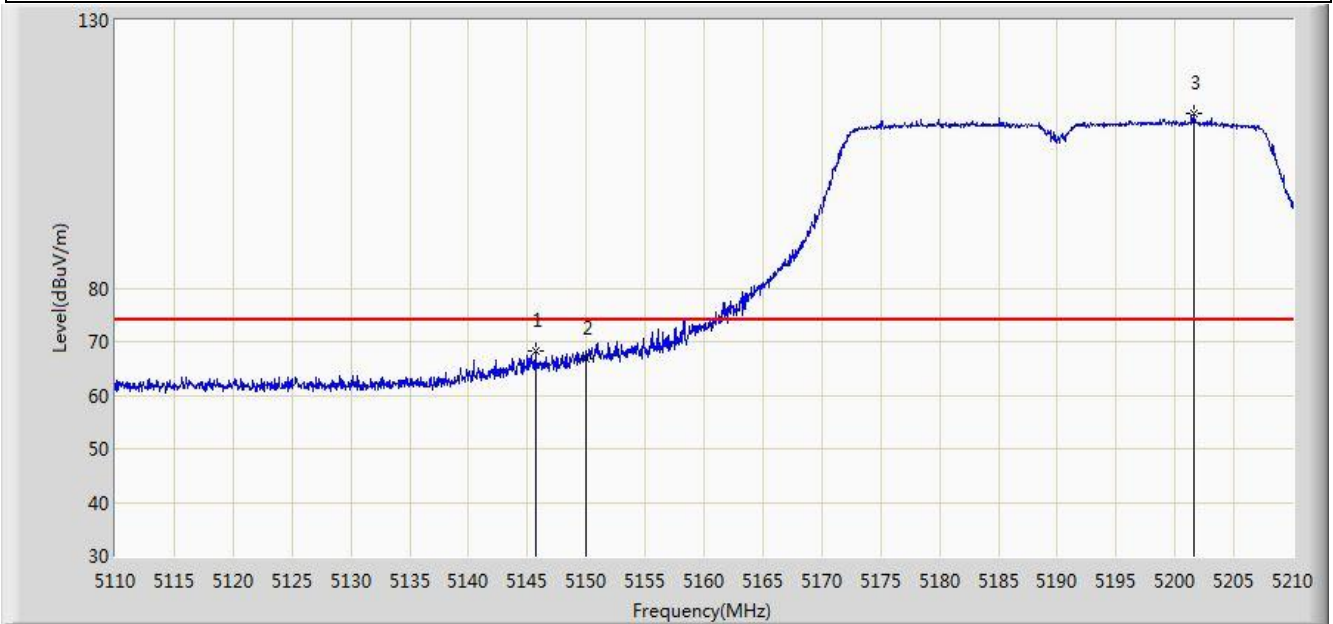


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.700	68.168	30.710	-5.832	74.000	37.458	PK
2			5150.000	66.893	29.441	-7.107	74.000	37.452	PK
3		*	5201.550	112.467	75.148	N/A	N/A	37.319	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11n-HT40 Ant 2	

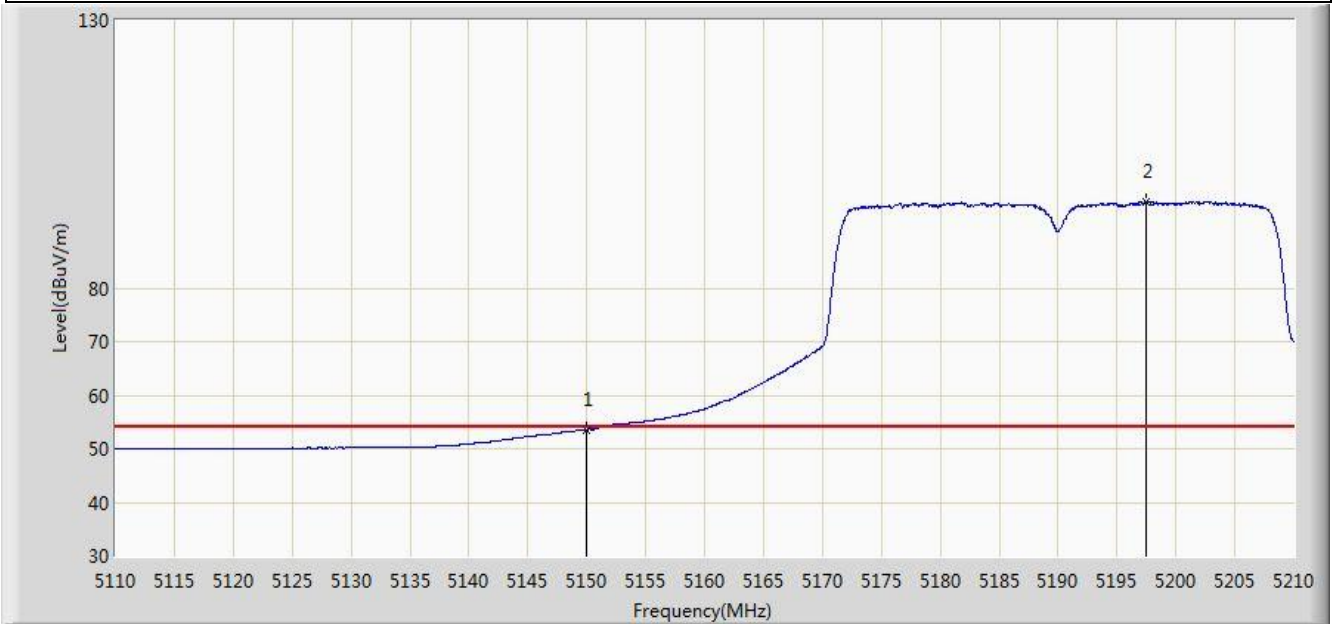


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.566	16.114	-0.434	54.000	37.452	AV
2		*	5197.450	96.065	58.734	N/A	N/A	37.332	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/03 - 08:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11n-HT40 Ant 2	

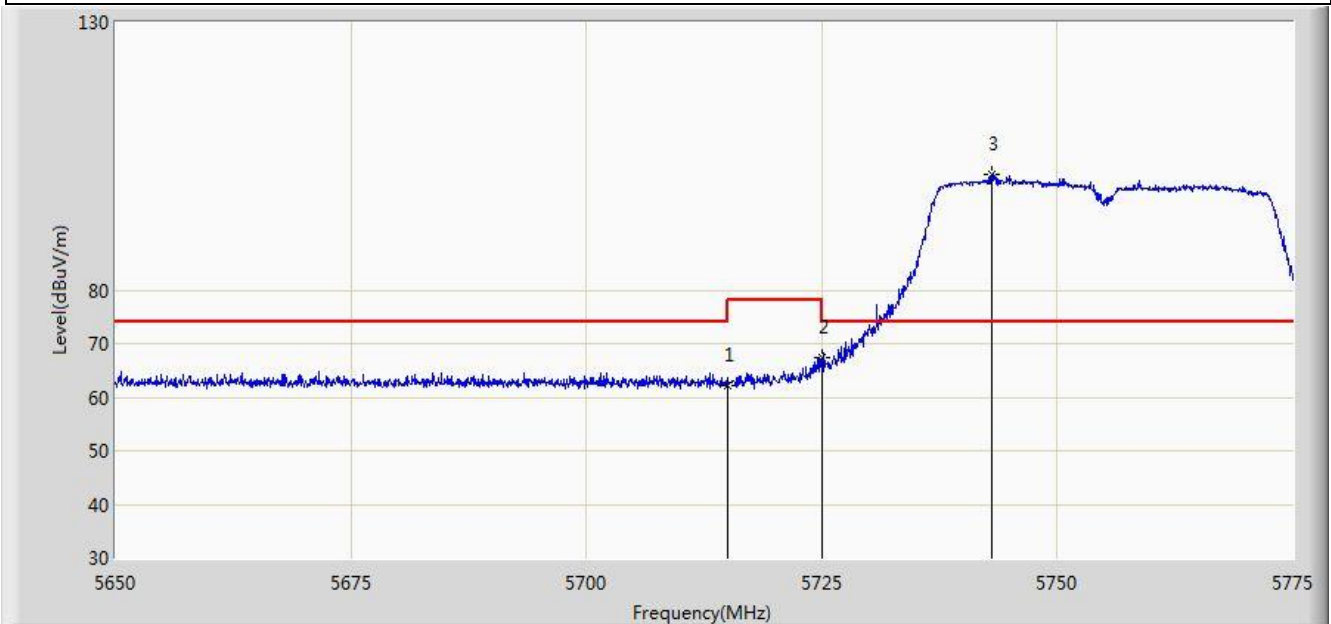


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	62.222	24.273	-11.778	74.000	37.949	PK
2			5725.000	67.304	29.314	-10.896	78.200	37.990	PK
3		*	5743.062	101.724	63.662	N/A	N/A	38.062	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/03 - 08:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11n-HT40 Ant 2	

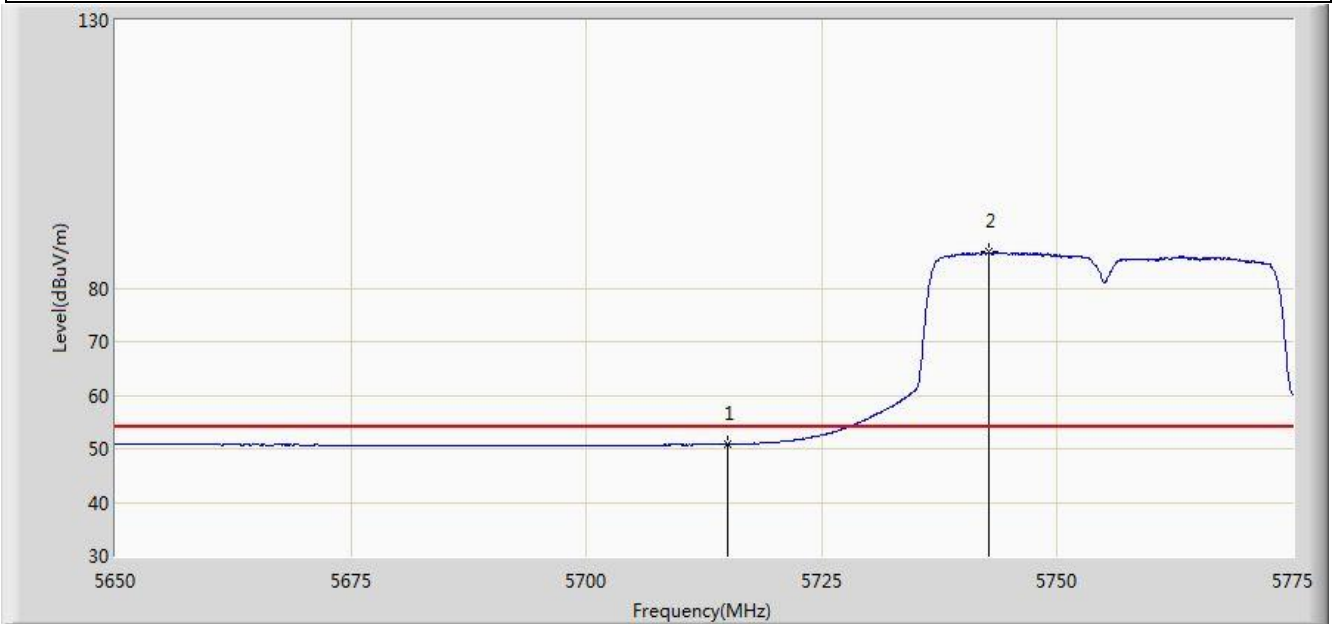


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.821	12.872	-3.179	54.000	37.949	AV
2		*	5742.687	86.698	48.637	N/A	N/A	38.061	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/03 - 08:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11n-HT40 Ant 2	

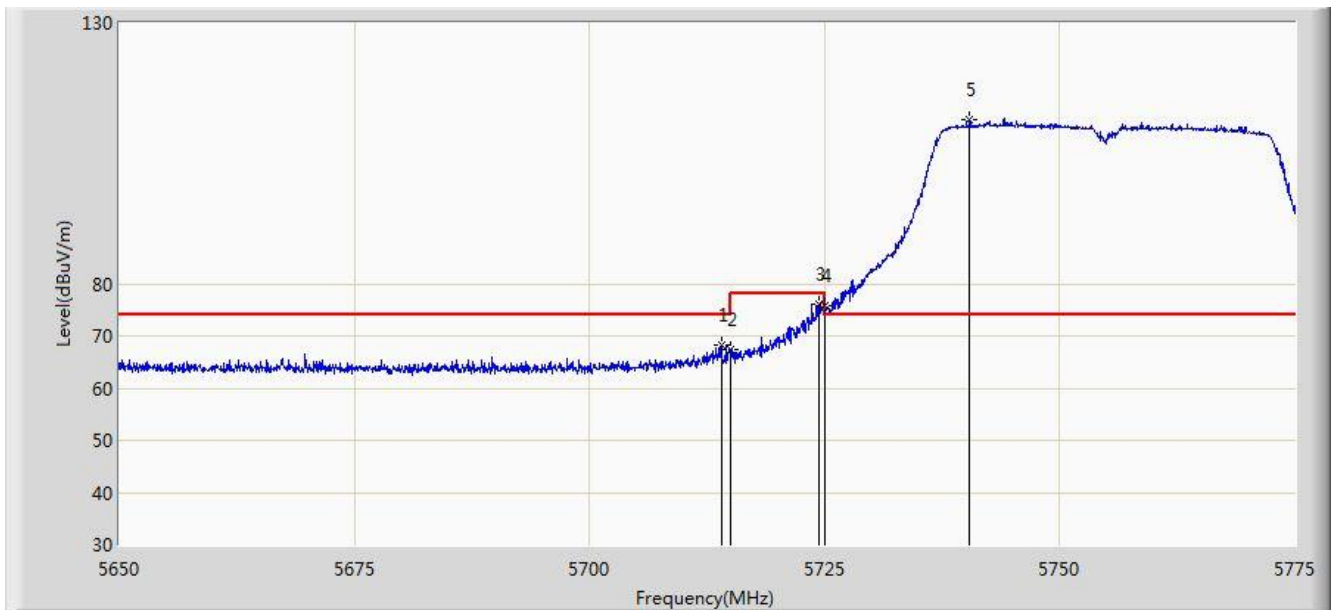


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.000	68.403	30.458	-5.597	74.000	37.945	PK
2			5715.000	67.408	29.459	-6.592	74.000	37.949	PK
3			5724.375	76.203	38.216	-1.997	78.200	37.988	PK
4			5725.000	75.815	37.825	-2.385	78.200	37.990	PK
5		*	5740.375	111.373	73.321	N/A	N/A	38.052	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/03 - 08:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11n-HT40 Ant 2	

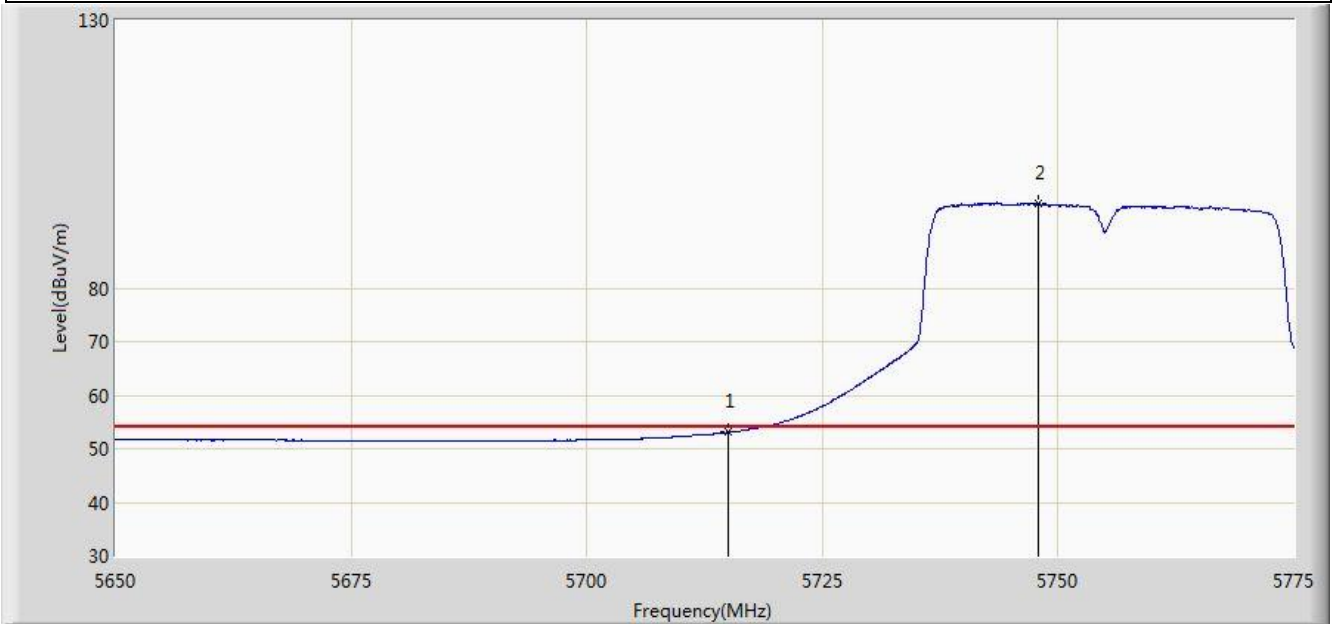


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.071	15.122	-0.929	54.000	37.949	AV
2		*	5747.937	95.732	57.646	N/A	N/A	38.086	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11n-HT40 Ant 2	

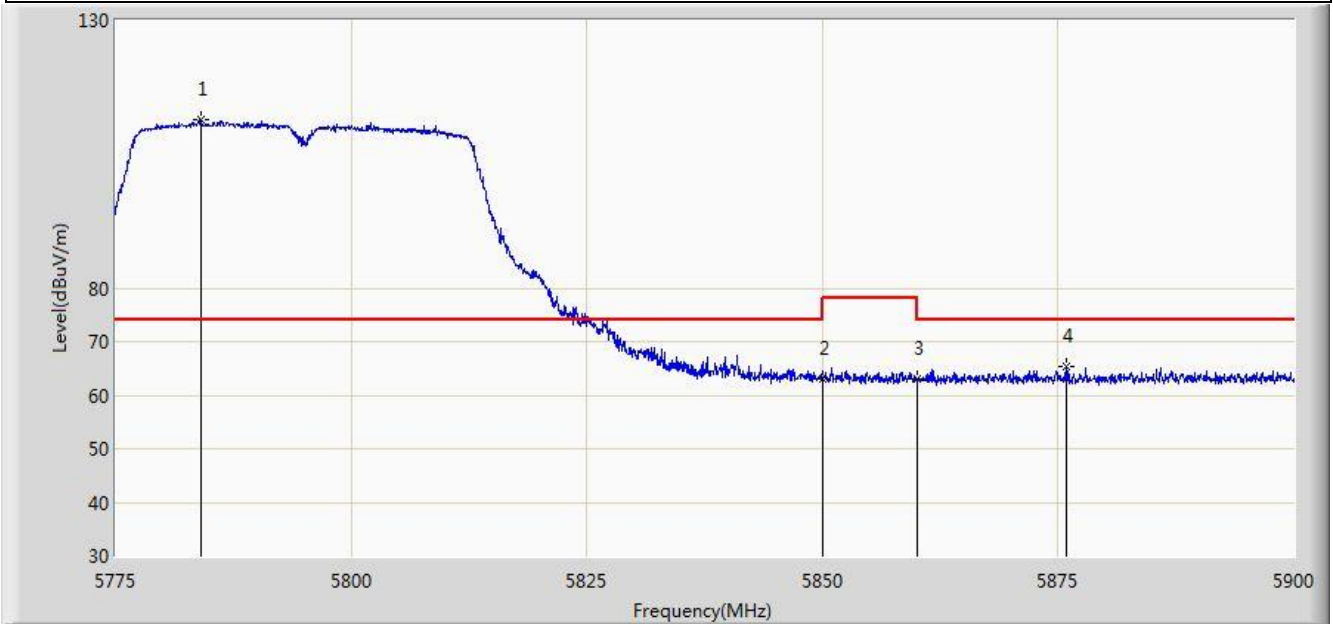


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5784.125	111.570	73.361	N/A	N/A	38.209	PK
2			5850.000	63.001	24.548	-15.199	78.200	38.454	PK
3			5860.000	63.176	24.698	-10.824	74.000	38.478	PK
4			5875.937	65.255	26.757	-8.745	74.000	38.498	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11n-HT40 Ant 2	

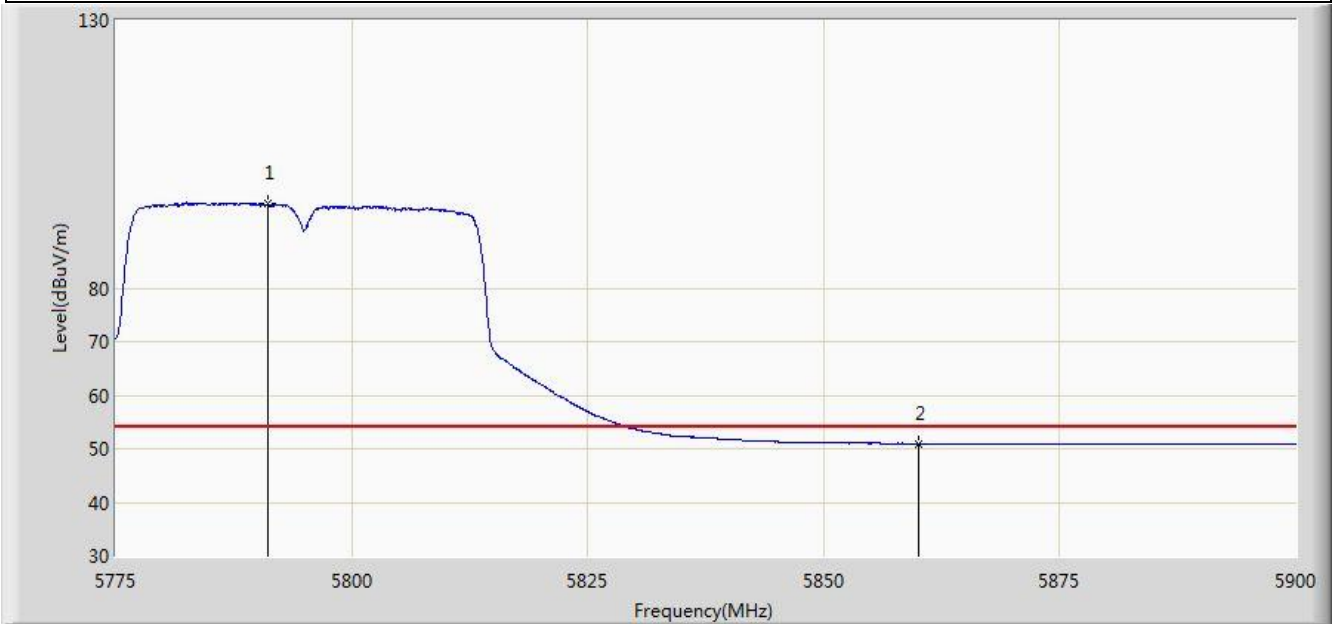


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5791.125	95.699	57.464	N/A	N/A	38.235	AV
2			5860.000	50.966	12.488	-3.034	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11n-HT40 Ant 2	

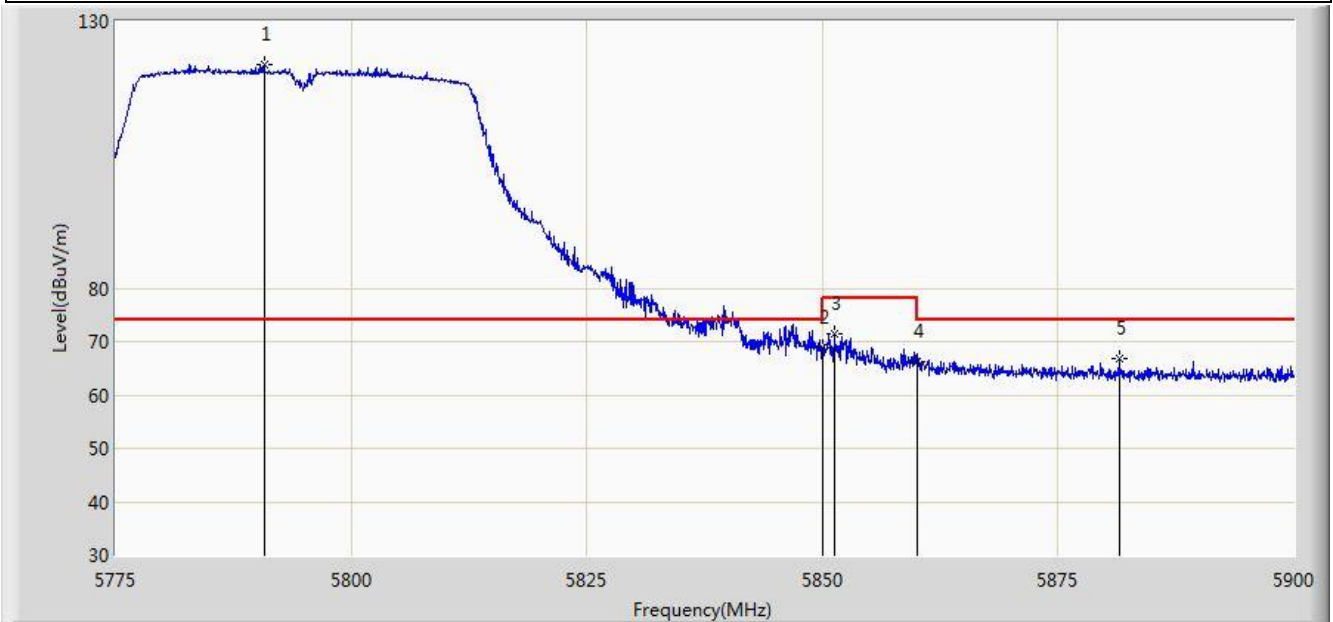


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5790.750	121.781	83.548	N/A	N/A	38.233	PK
2			5850.000	68.960	30.507	-9.240	78.200	38.454	PK
3			5851.250	71.438	32.982	-6.762	78.200	38.456	PK
4			5860.000	66.197	27.719	-7.803	74.000	38.478	PK
5			5881.500	66.780	28.277	-7.220	74.000	38.503	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11n-HT40 Ant 2	

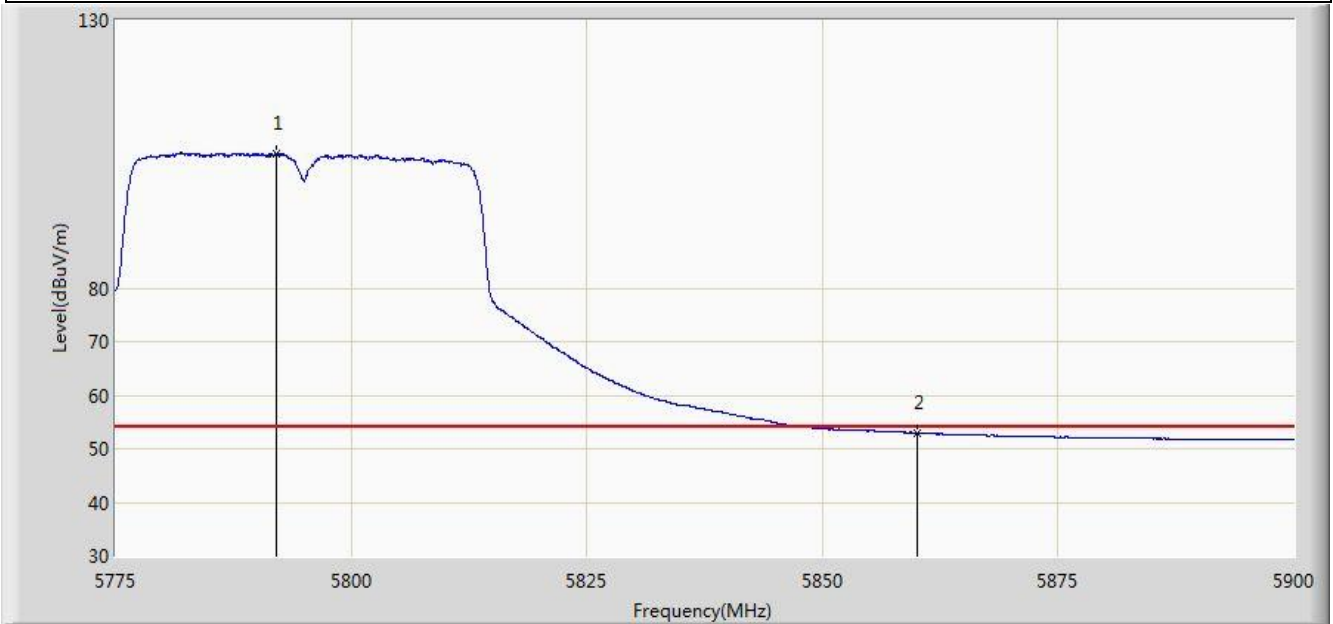


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5792.000	105.001	66.763	N/A	N/A	38.238	AV
2			5860.000	53.009	14.531	-0.991	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/05 - 11:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11ac-VHT20 Ant 2	

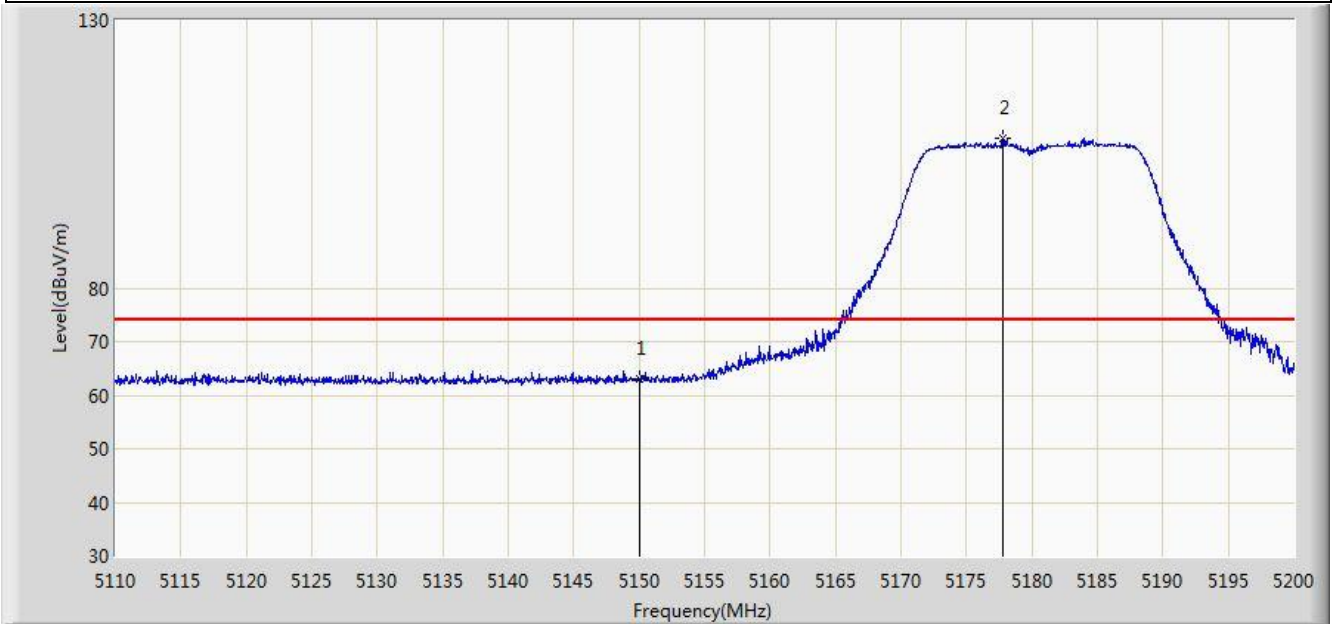


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	62.946	25.494	-11.054	74.000	37.452	PK
2		*	5177.815	107.870	70.491	N/A	N/A	37.379	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 11:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11ac-VHT20 Ant 2	

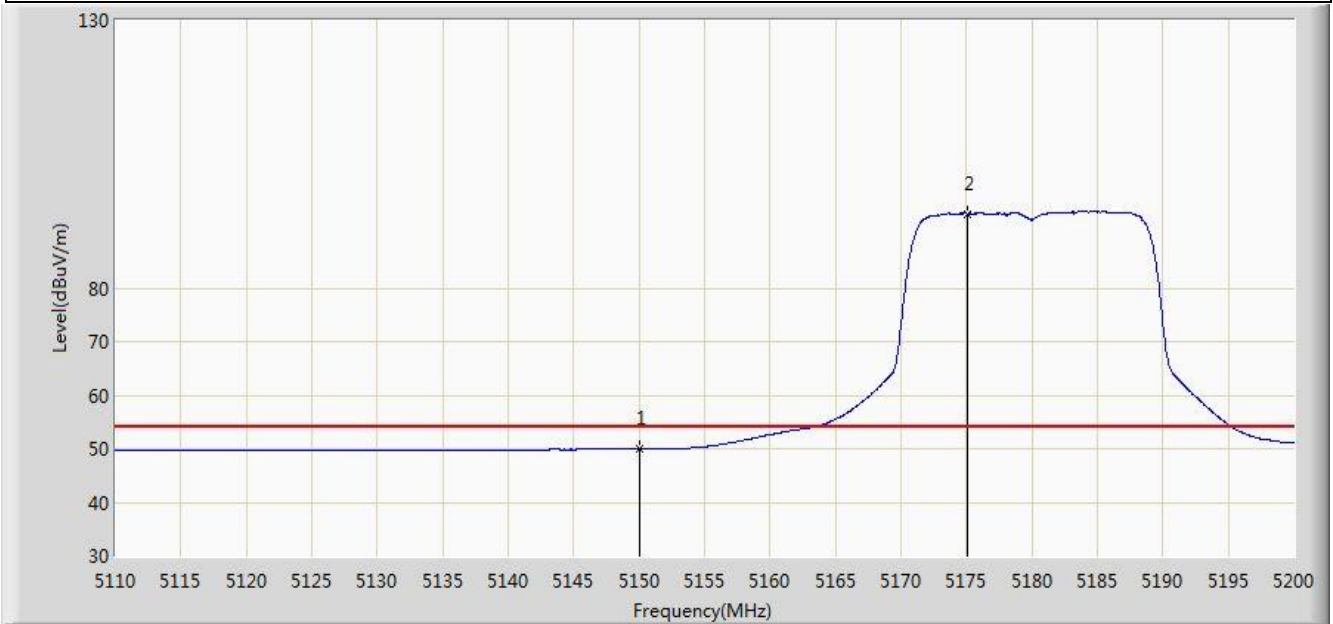


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.959	12.507	-4.041	54.000	37.452	AV
2		*	5175.025	93.849	56.464	N/A	N/A	37.385	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 11:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11ac-VHT20 Ant 2	

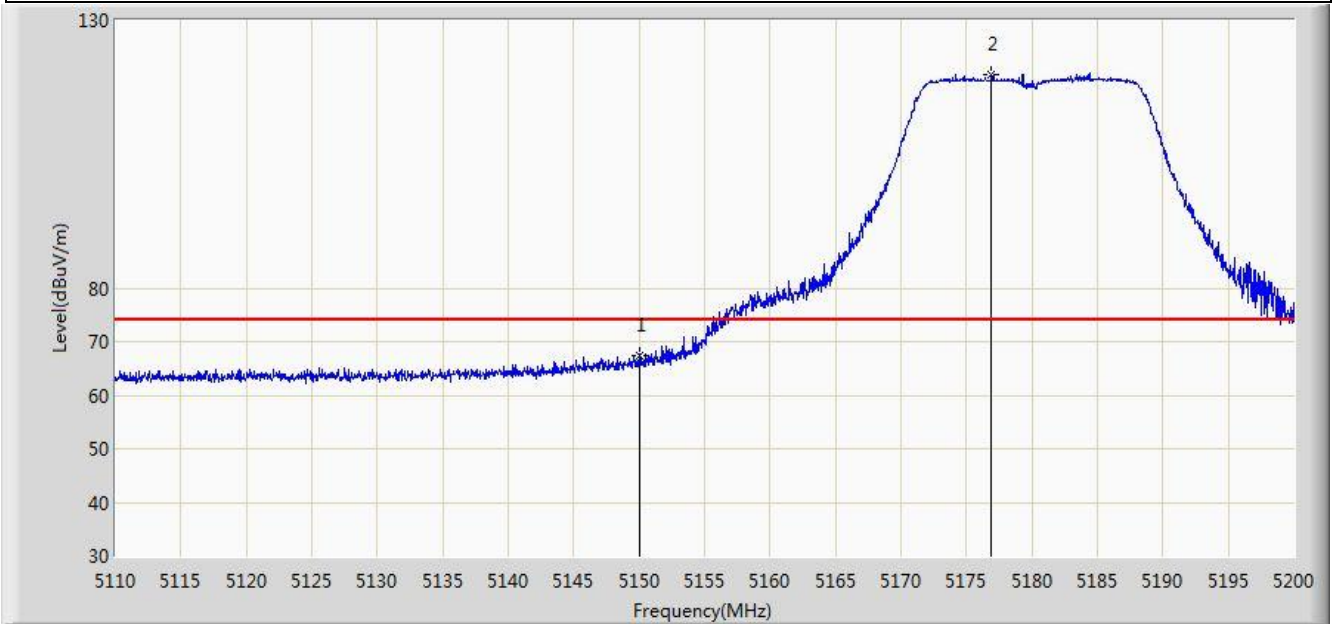


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	67.498	30.046	-6.502	74.000	37.452	PK
2		*	5176.915	119.791	82.410	N/A	N/A	37.381	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 11:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11ac-VHT20 Ant 2	

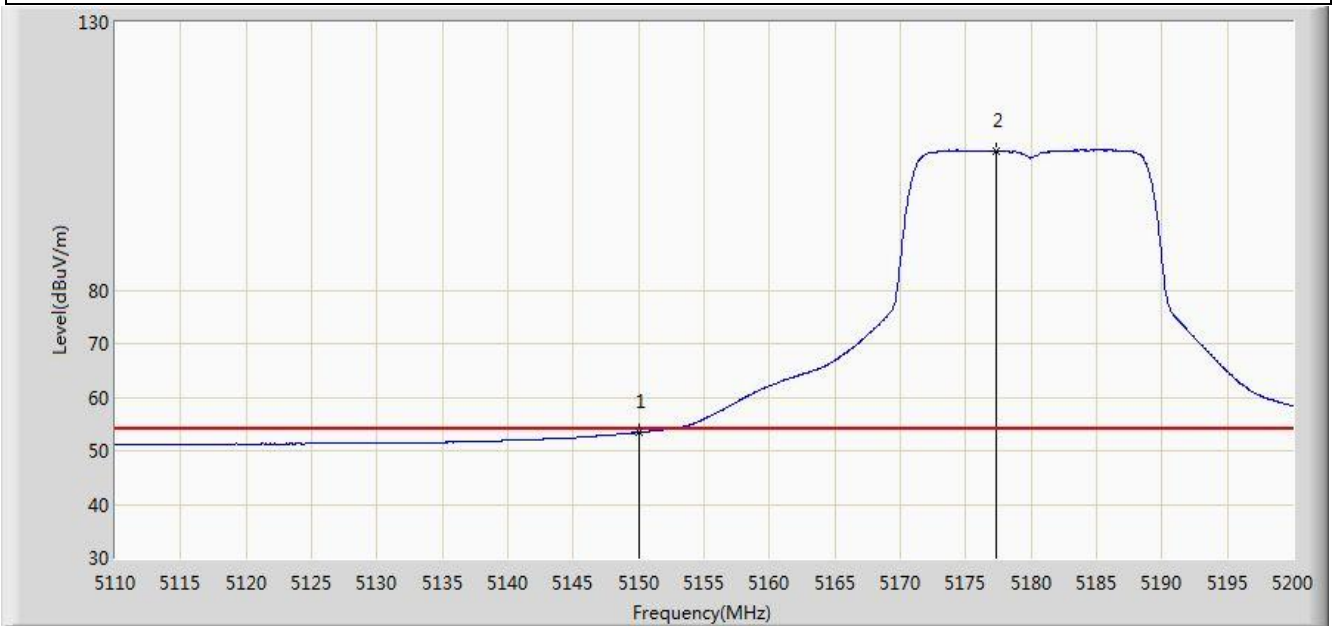


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.381	15.929	-0.619	54.000	37.452	AV
2		*	5177.275	105.851	68.471	N/A	N/A	37.379	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11ac-VHT20 Ant 2	

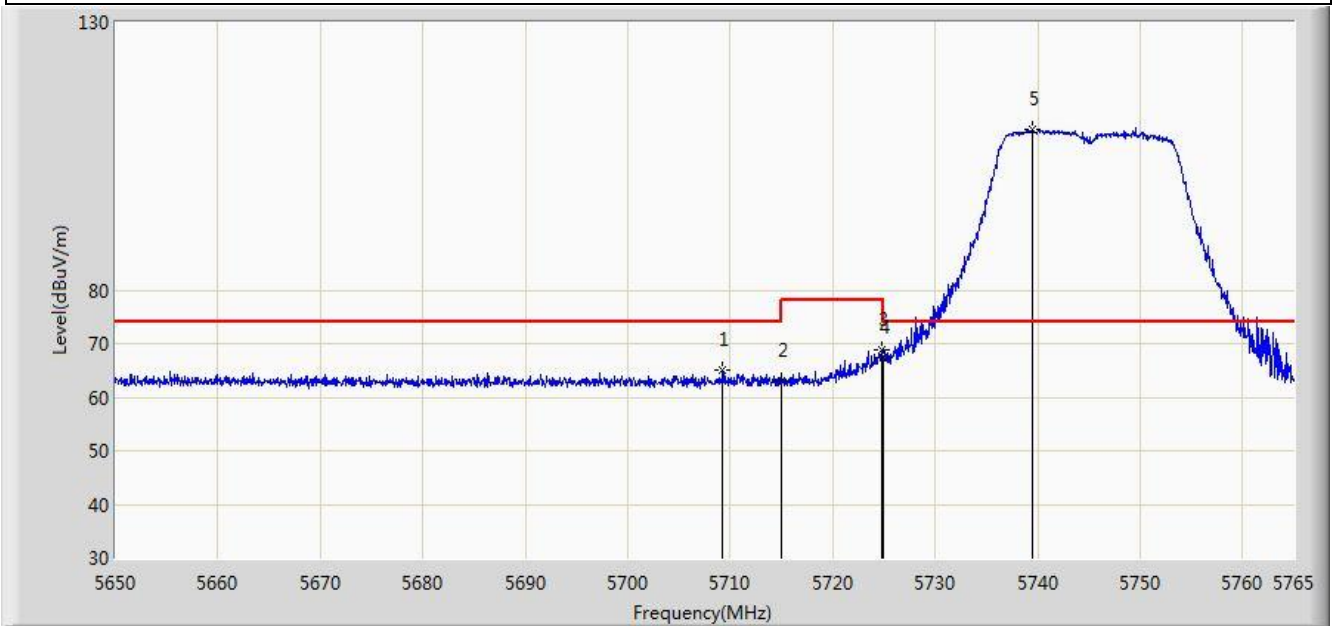


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5709.283	65.041	27.115	-8.959	74.000	37.926	PK
2			5715.000	62.956	25.007	-11.044	74.000	37.949	PK
3			5724.750	68.747	30.758	-9.453	78.200	37.989	PK
4			5725.000	67.494	29.504	-10.706	78.200	37.990	PK
5		*	5739.527	110.015	71.966	N/A	N/A	38.049	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11ac-VHT20 Ant 2	

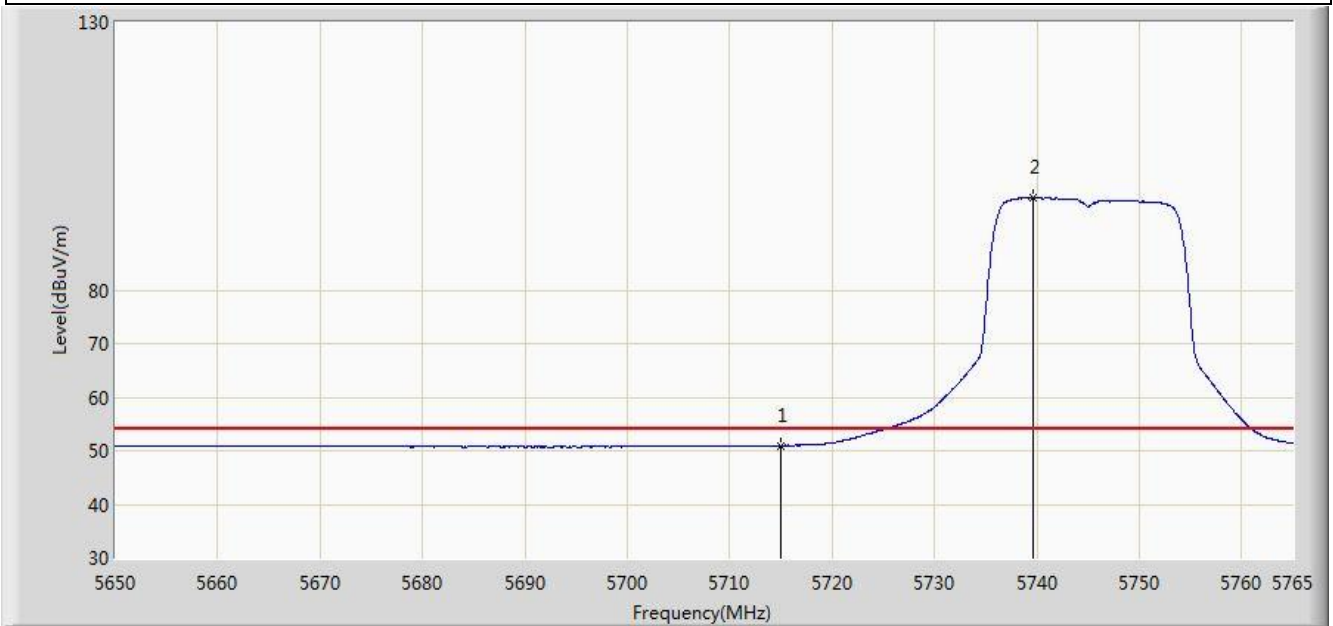


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.954	13.005	-3.046	54.000	37.949	AV
2		*	5739.643	97.242	59.192	N/A	N/A	38.050	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11ac-VHT20 Ant 2	

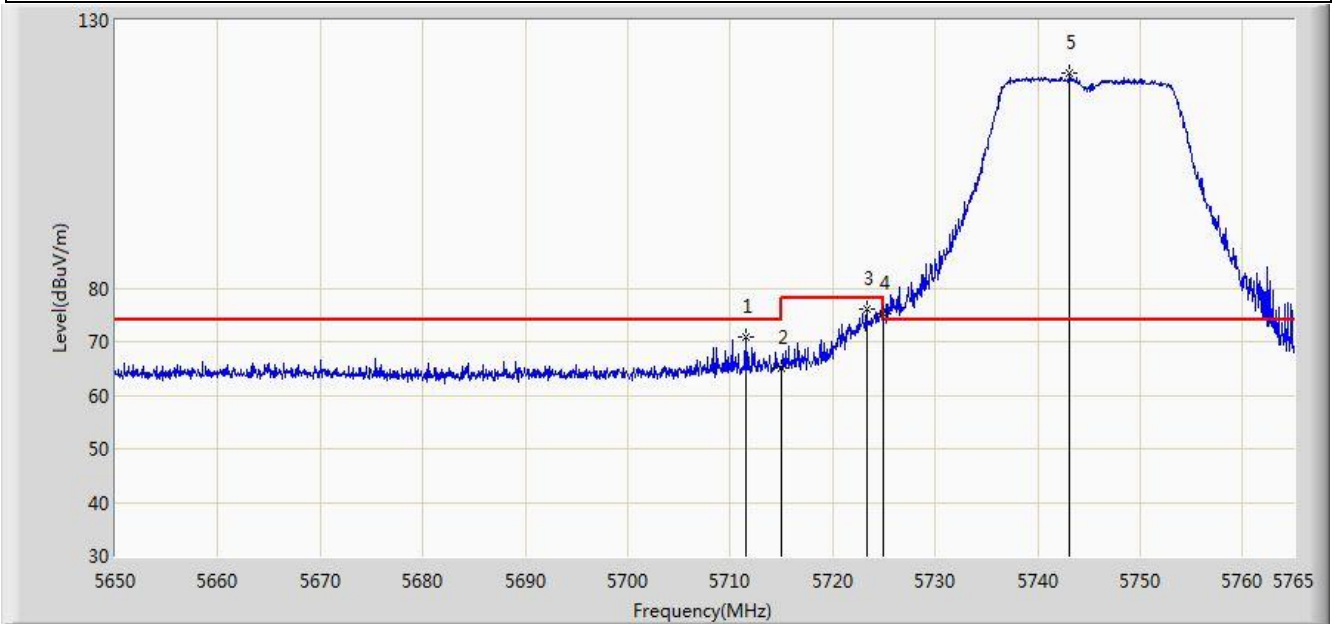


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5711.467	70.943	33.008	-3.057	74.000	37.935	PK
2			5715.000	64.971	27.022	-9.029	74.000	37.949	PK
3			5723.312	76.067	38.084	-2.133	78.200	37.982	PK
4			5725.000	75.236	37.246	-2.964	78.200	37.990	PK
5		*	5743.150	120.072	82.009	N/A	N/A	38.063	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11ac-VHT20 Ant 2	

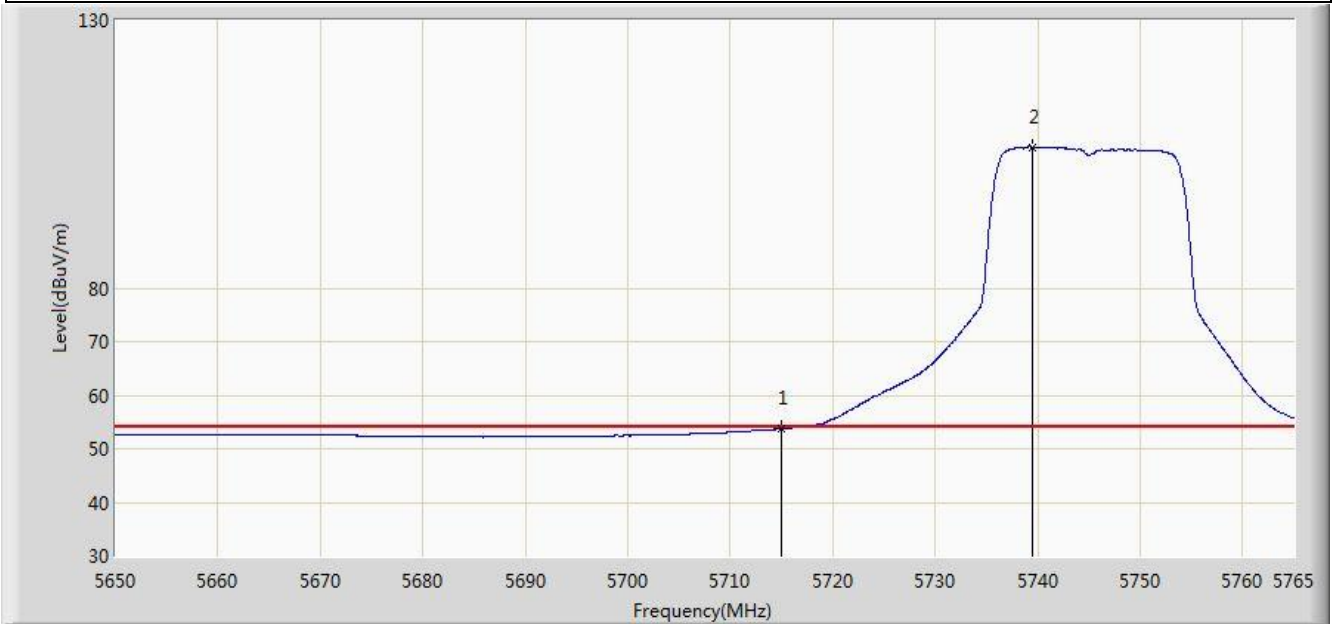


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.755	15.806	-0.245	54.000	37.949	AV
2		*	5739.527	106.364	68.315	N/A	N/A	38.049	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/07 - 23:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11ac-VHT20 Ant 2	

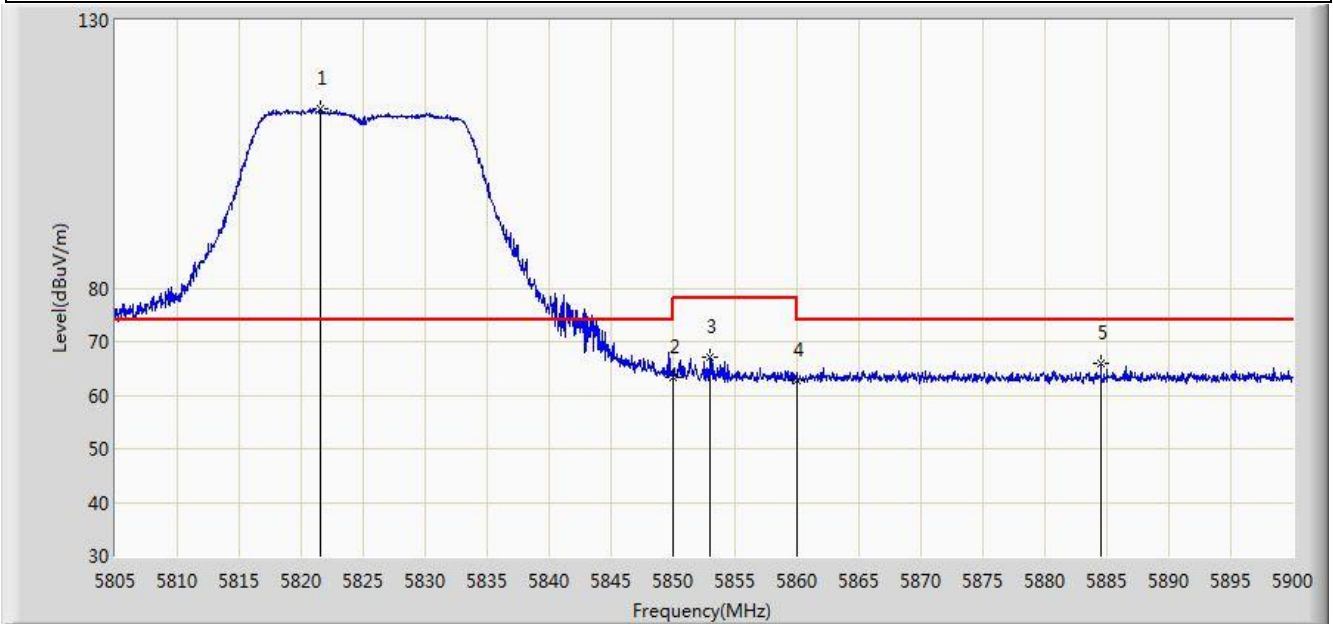


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.578	113.567	75.226	N/A	N/A	38.341	PK
2			5850.000	63.383	24.930	-14.817	78.200	38.454	PK
3			5852.928	67.031	28.571	-11.169	78.200	38.461	PK
4			5860.000	62.651	24.173	-11.349	74.000	38.478	PK
5			5884.515	66.067	27.562	-7.933	74.000	38.505	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11ac-VHT20 Ant 2	

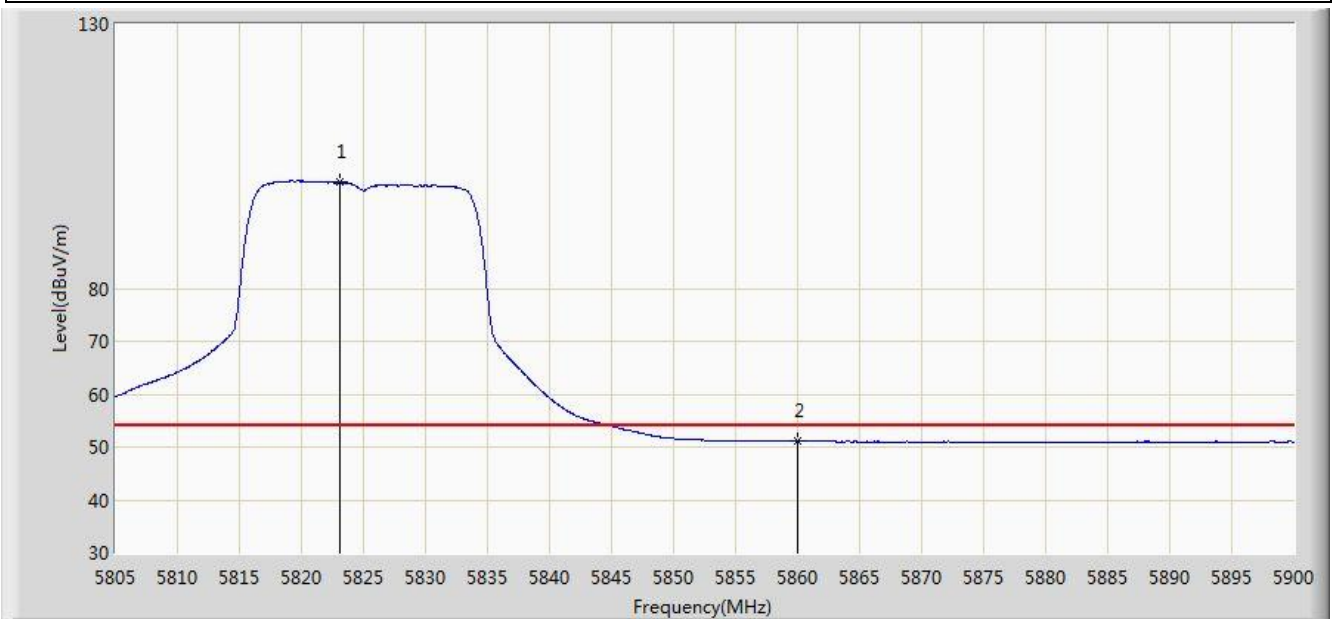


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5823.145	100.058	61.710	N/A	N/A	38.348	AV
2			5860.000	51.091	12.613	-2.909	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11ac-VHT20 Ant 2	

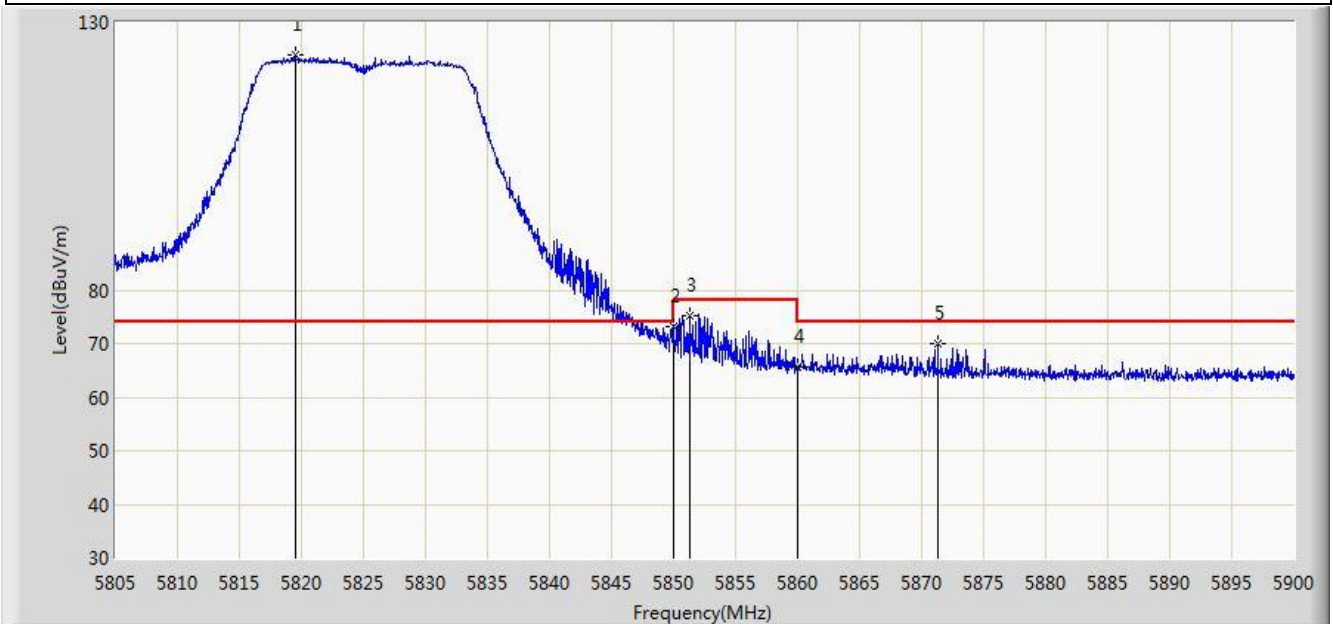


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.487	124.056	85.723	N/A	N/A	38.332	PK
2			5850.000	73.150	34.697	-5.050	78.200	38.454	PK
3			5851.265	75.218	36.762	-2.982	78.200	38.456	PK
4			5860.000	65.583	27.105	-8.417	74.000	38.478	PK
5			5871.310	69.924	31.431	-4.076	74.000	38.493	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11ac-VHT20 Ant 2	

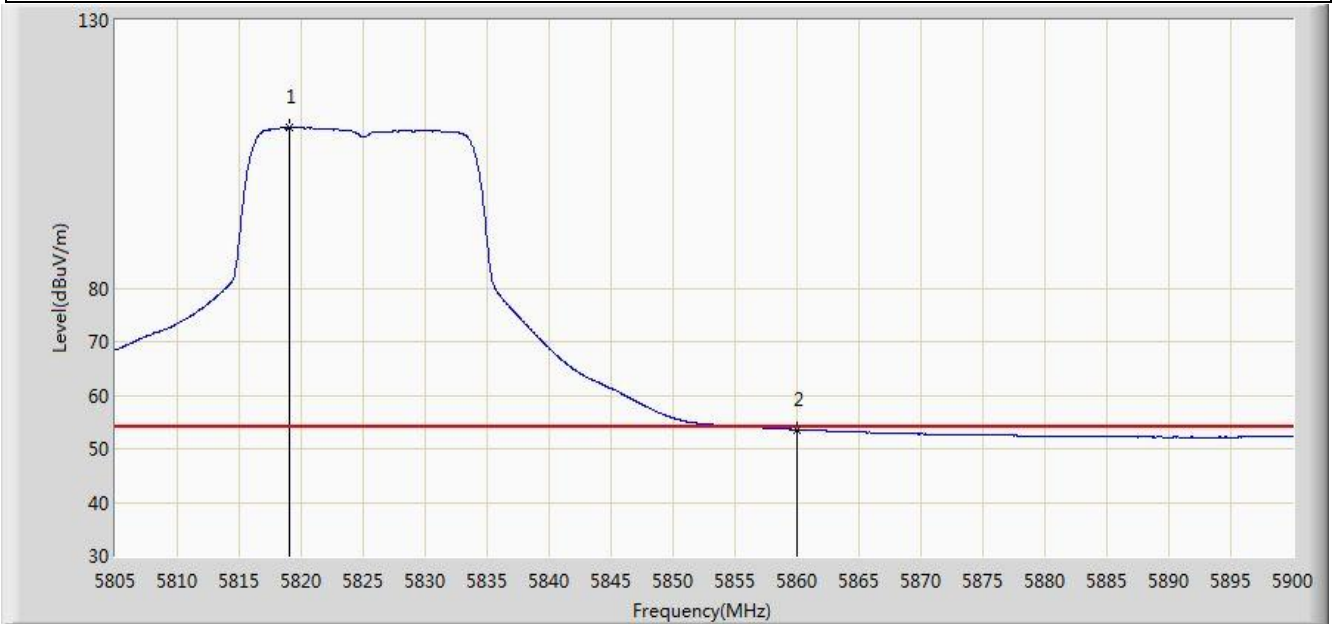


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.107	110.007	71.676	N/A	N/A	38.331	AV
2			5860.000	53.590	15.112	-0.410	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 13:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11ac-VHT40 Ant 2	

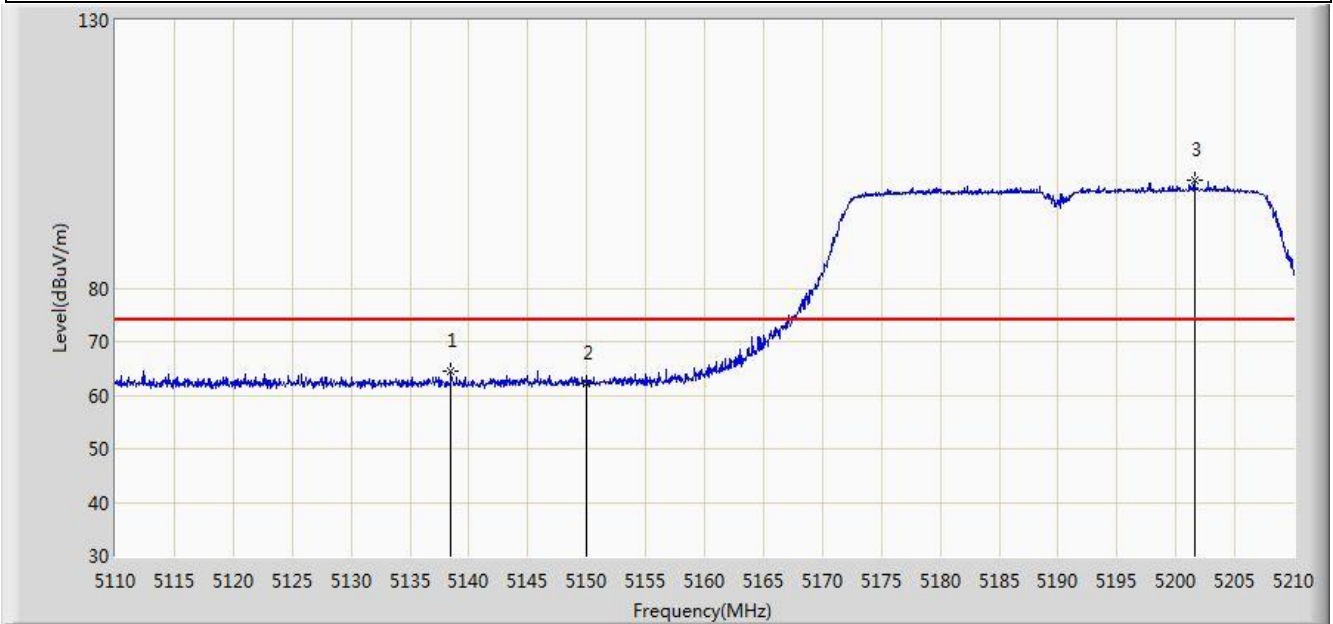


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.500	64.349	26.879	-9.651	74.000	37.470	PK
2			5150.000	62.280	24.828	-11.720	74.000	37.452	PK
3		*	5201.550	100.075	62.756	N/A	N/A	37.319	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 13:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11ac-VHT40 Ant 2	

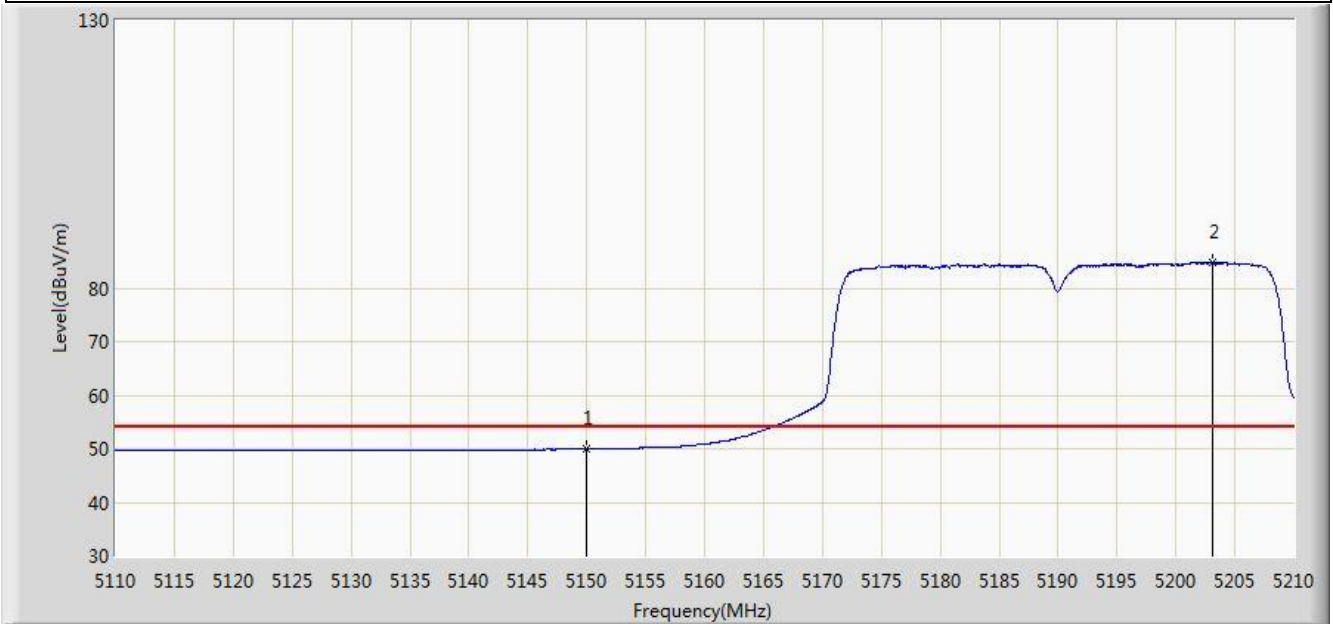


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.977	12.525	-4.023	54.000	37.452	AV
2		*	5203.100	84.829	47.515	N/A	N/A	37.314	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 13:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11ac-VHT40 Ant 2	

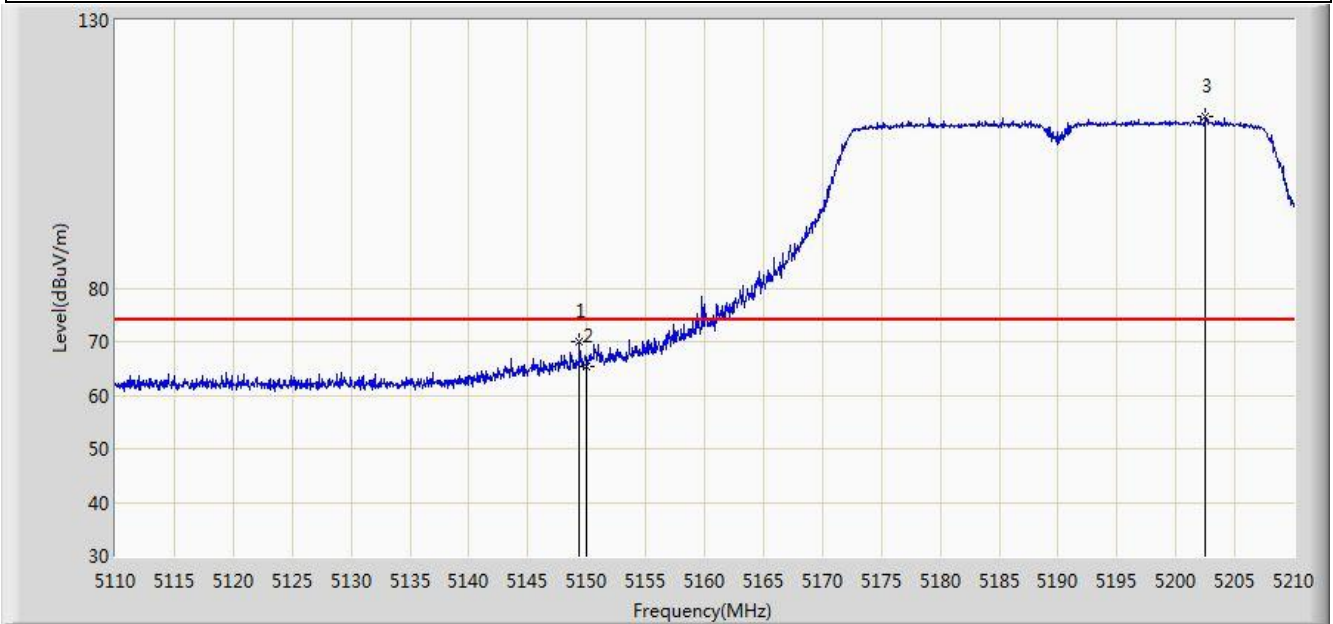


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.400	70.138	32.685	-3.862	74.000	37.453	PK
2			5150.000	65.437	27.985	-8.563	74.000	37.452	PK
3		*	5202.500	112.131	74.815	N/A	N/A	37.315	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 13:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11ac-VHT40 Ant 2	

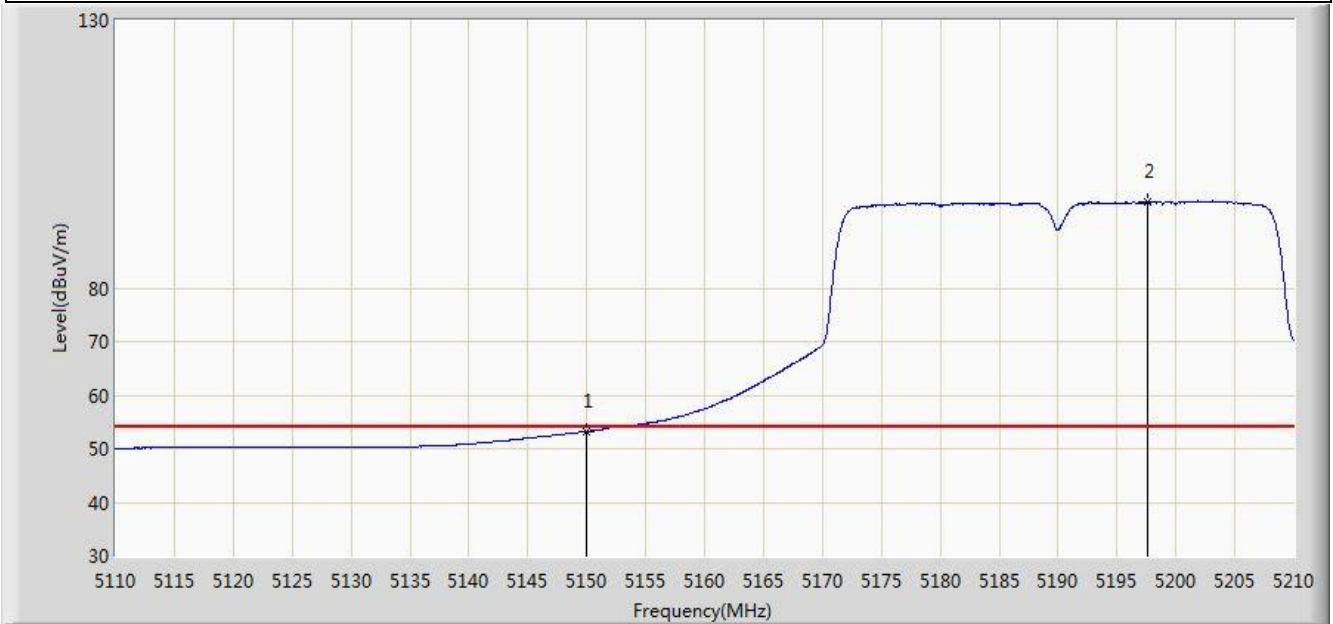


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.219	15.767	-0.781	54.000	37.452	AV
2		*	5197.650	96.049	58.718	N/A	N/A	37.331	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/05 - 13:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11ac-VHT40 Ant 2	

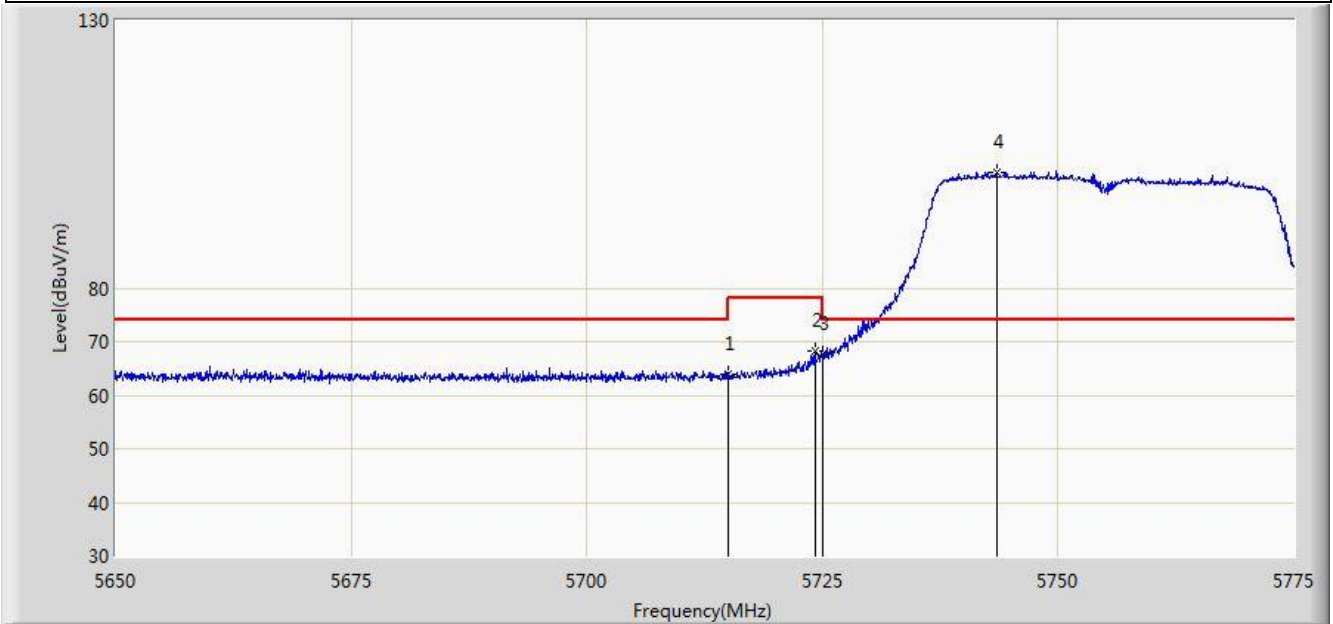


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	63.792	25.843	-10.208	74.000	37.949	PK
2			5724.187	68.352	30.366	-9.848	78.200	37.987	PK
3			5725.000	67.687	29.697	-10.513	78.200	37.990	PK
4		*	5743.500	101.610	63.545	N/A	N/A	38.065	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 13:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11ac-VHT40 Ant 2	

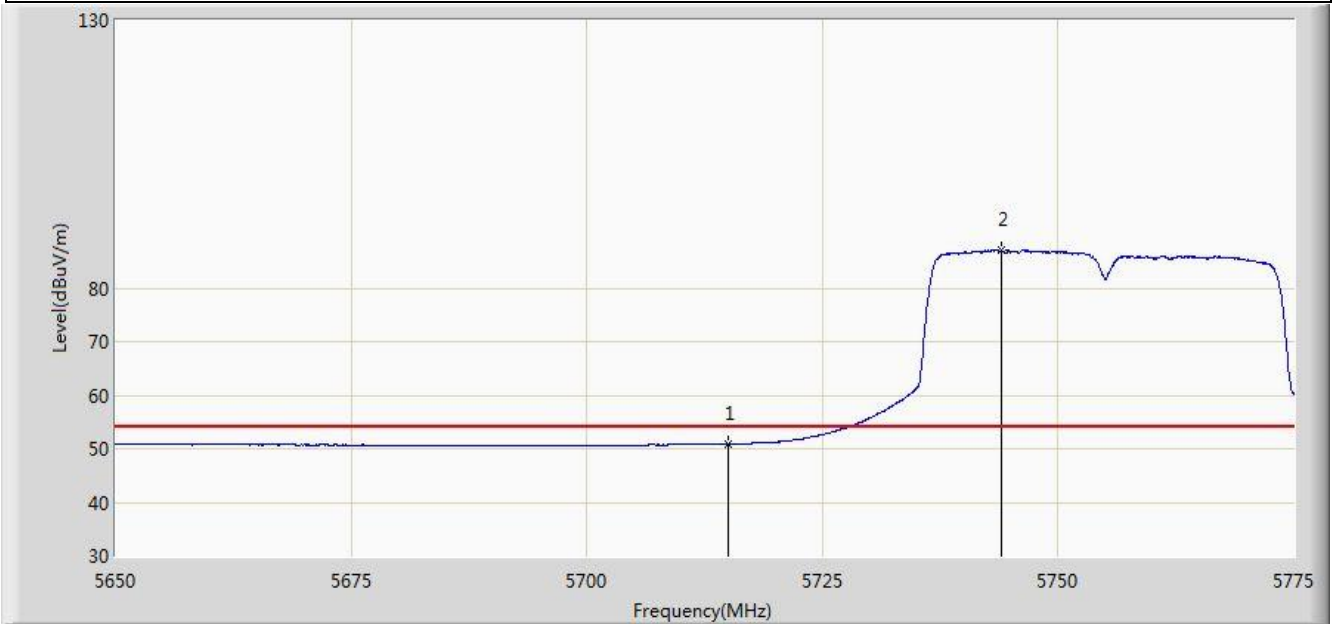


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.819	12.870	-3.181	54.000	37.949	AV
2		*	5744.000	87.017	48.950	N/A	N/A	38.067	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 13:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Note: Test Mode: Transmit at Channel 5755MHz by 802.11ac-VHT40 Ant 2	

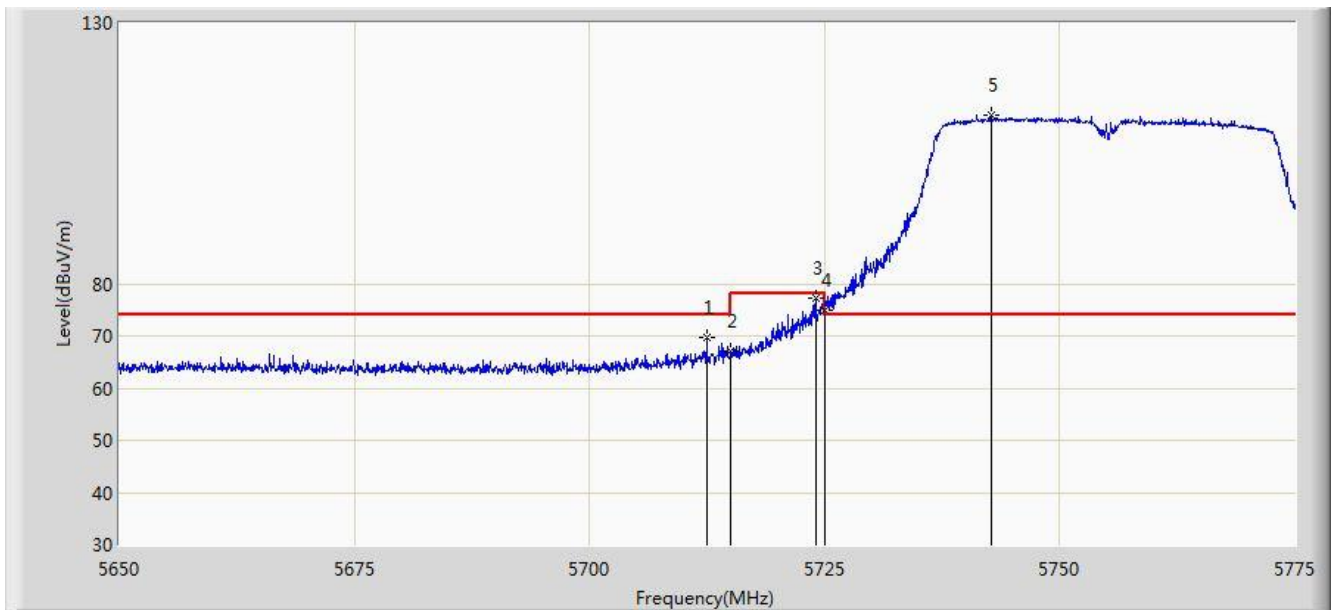


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.500	69.615	31.676	-4.385	74.000	37.939	PK
2			5715.000	67.179	29.230	-6.821	74.000	37.949	PK
3			5724.062	77.143	39.157	-1.057	78.200	37.986	PK
4			5725.000	74.962	36.972	-3.238	78.200	37.990	PK
5		*	5742.687	112.234	74.173	N/A	N/A	38.061	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 13:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11ac-VHT40 Ant 2	

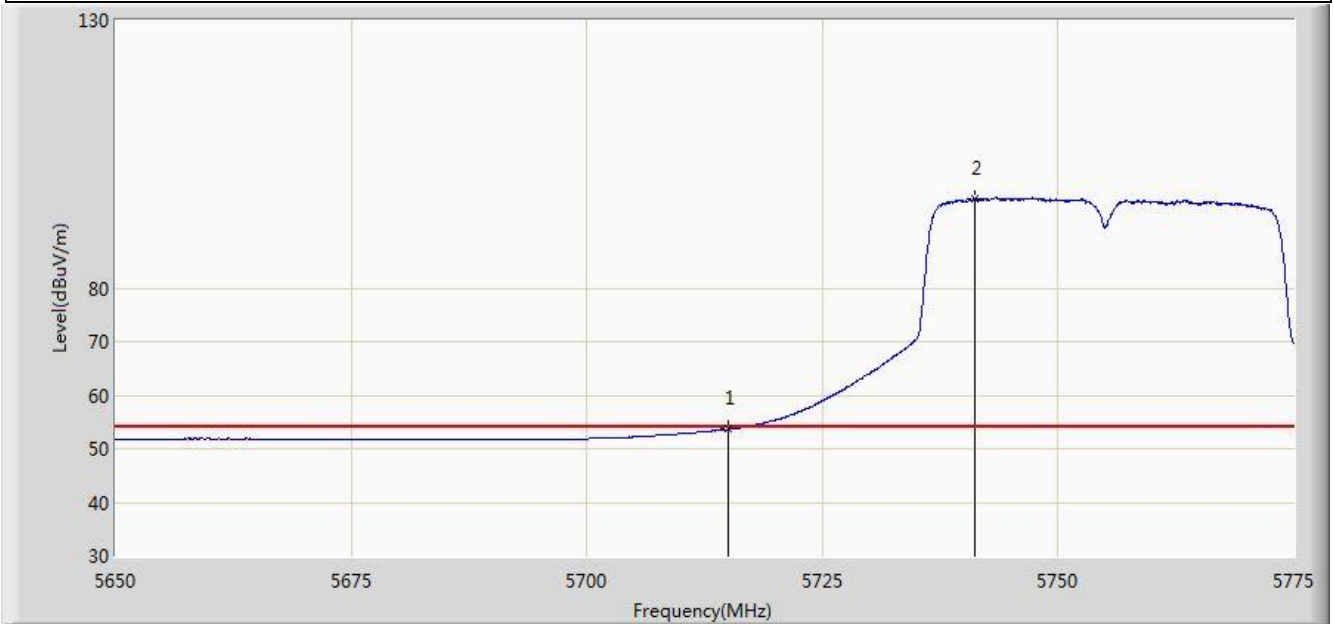


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.629	15.680	-0.371	54.000	37.949	AV
2		*	5741.125	96.647	58.592	N/A	N/A	38.055	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11ac-VHT40 Ant 2	

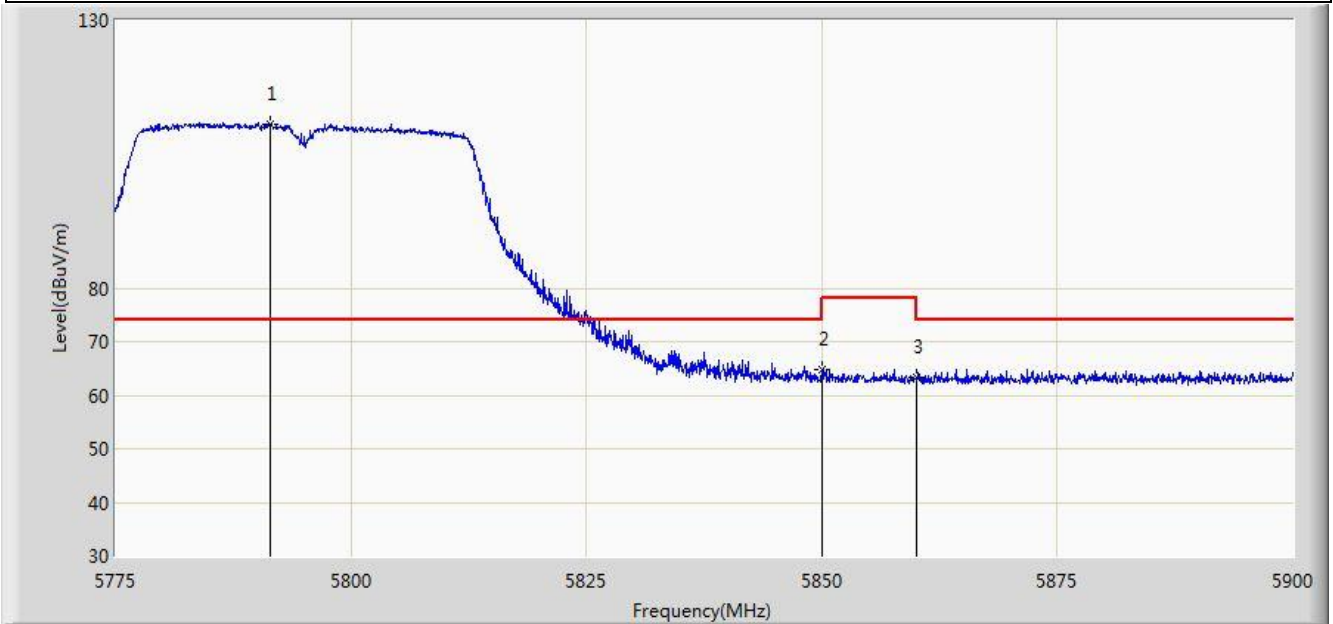


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5791.437	110.682	72.446	N/A	N/A	38.236	PK
2			5850.000	64.737	26.284	-13.463	78.200	38.454	PK
3			5860.000	63.374	24.896	-10.626	74.000	38.478	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11ac-VHT40 Ant 2	

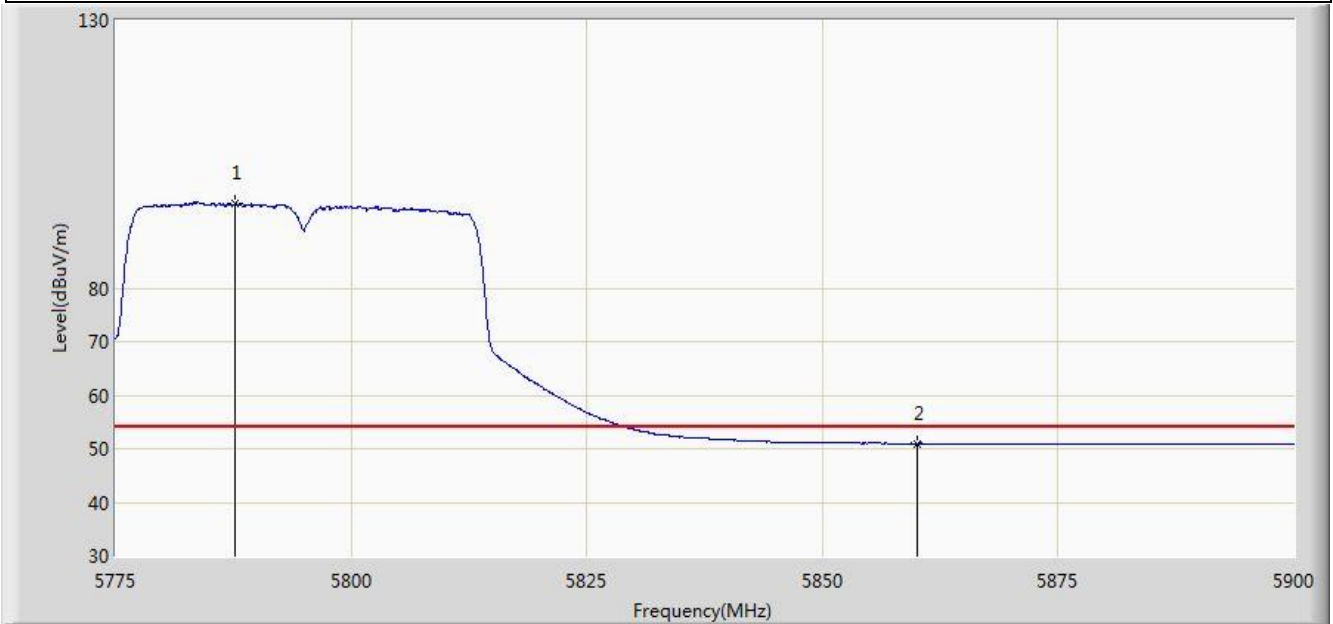


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5787.687	95.746	57.524	N/A	N/A	38.223	AV
2			5860.000	50.978	12.500	-3.022	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11ac-VHT40 Ant 2	

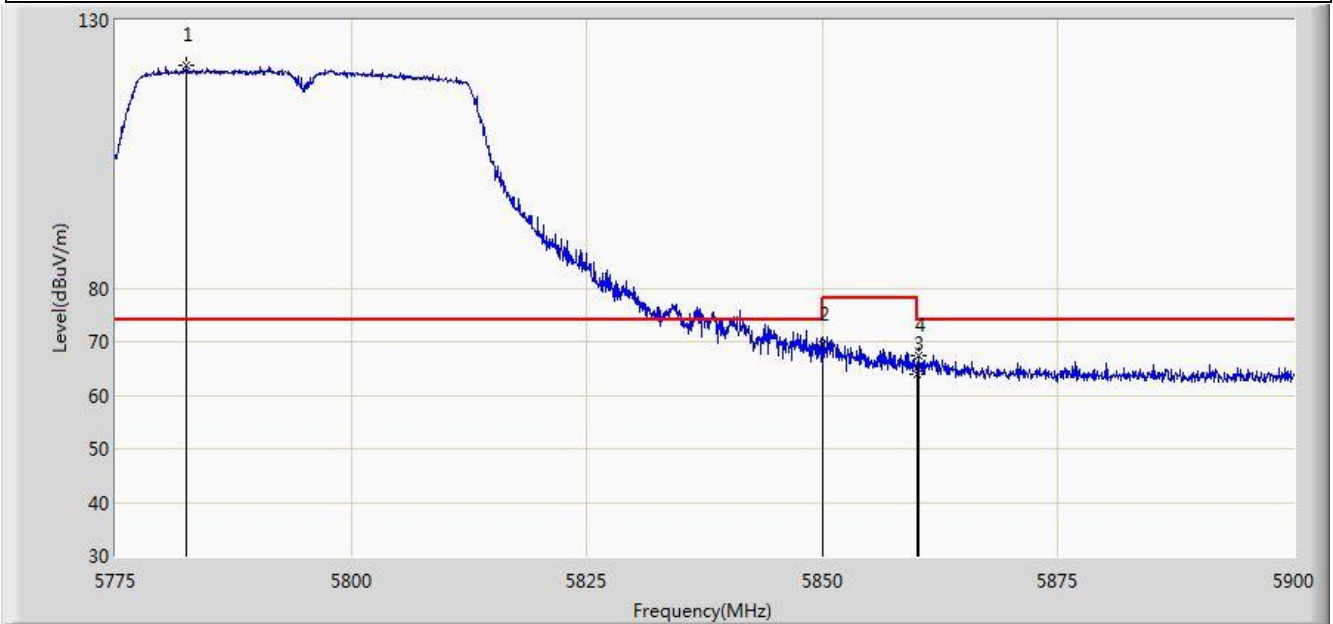


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5782.562	121.557	83.353	N/A	N/A	38.204	PK
2			5850.000	69.524	31.071	-8.676	78.200	38.454	PK
3			5860.000	63.995	25.517	-10.005	74.000	38.478	PK
4			5860.250	67.499	29.021	-6.501	74.000	38.479	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/07 - 23:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11ac-VHT40 Ant 2	

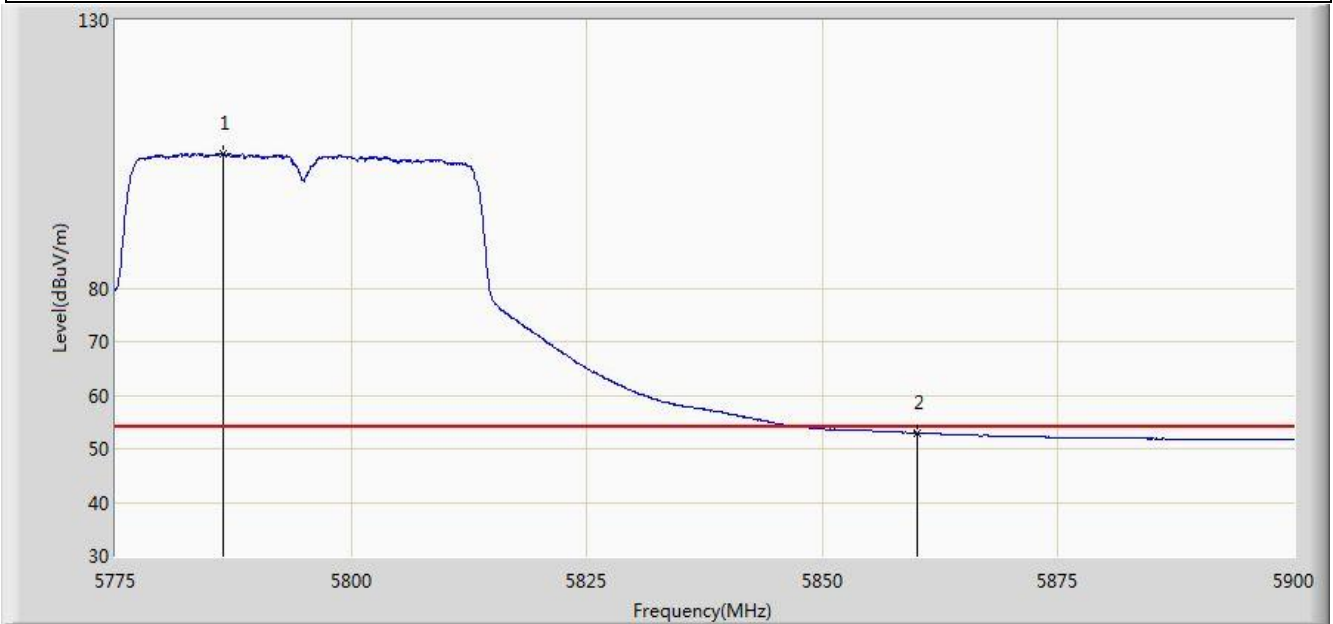


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5786.375	105.020	66.802	N/A	N/A	38.218	AV
2			5860.000	53.006	14.528	-0.994	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/05 - 14:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5210MHz by 802.11ac-VHT80 Ant 2	

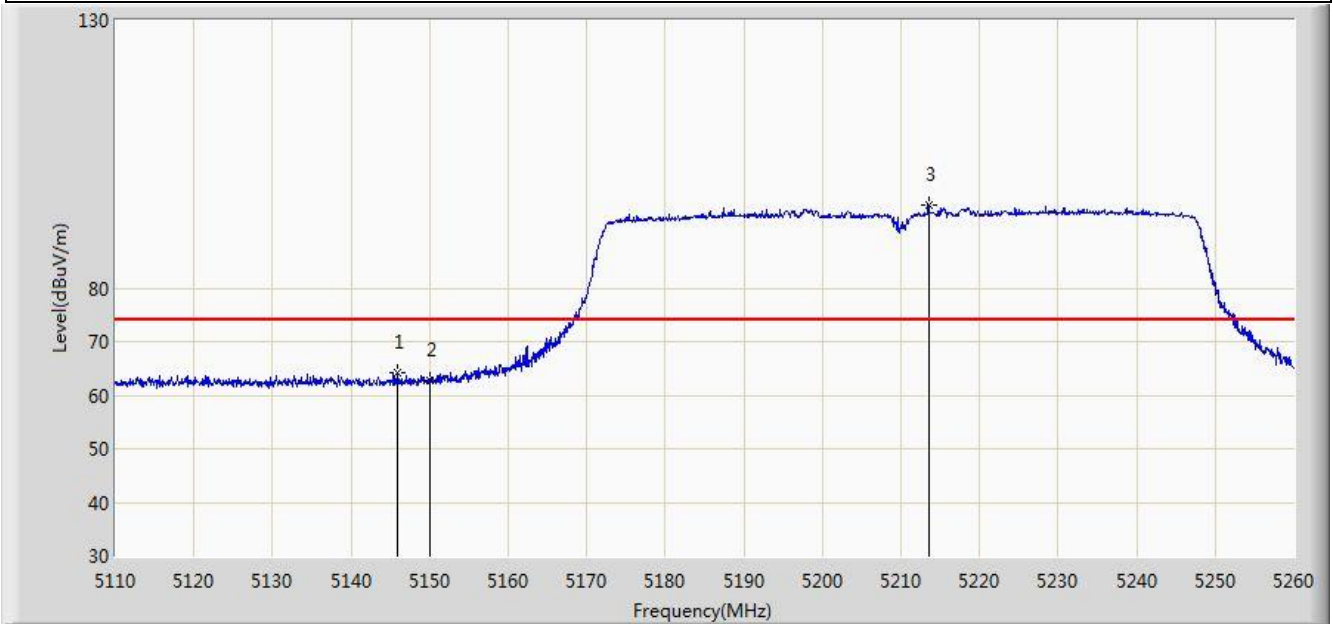


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.925	64.252	26.794	-9.748	74.000	37.458	PK
2			5150.000	62.839	25.387	-11.161	74.000	37.452	PK
3		*	5213.500	95.630	58.351	N/A	N/A	37.279	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 14:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5210MHz by 802.11ac-VHT80 Ant 2	

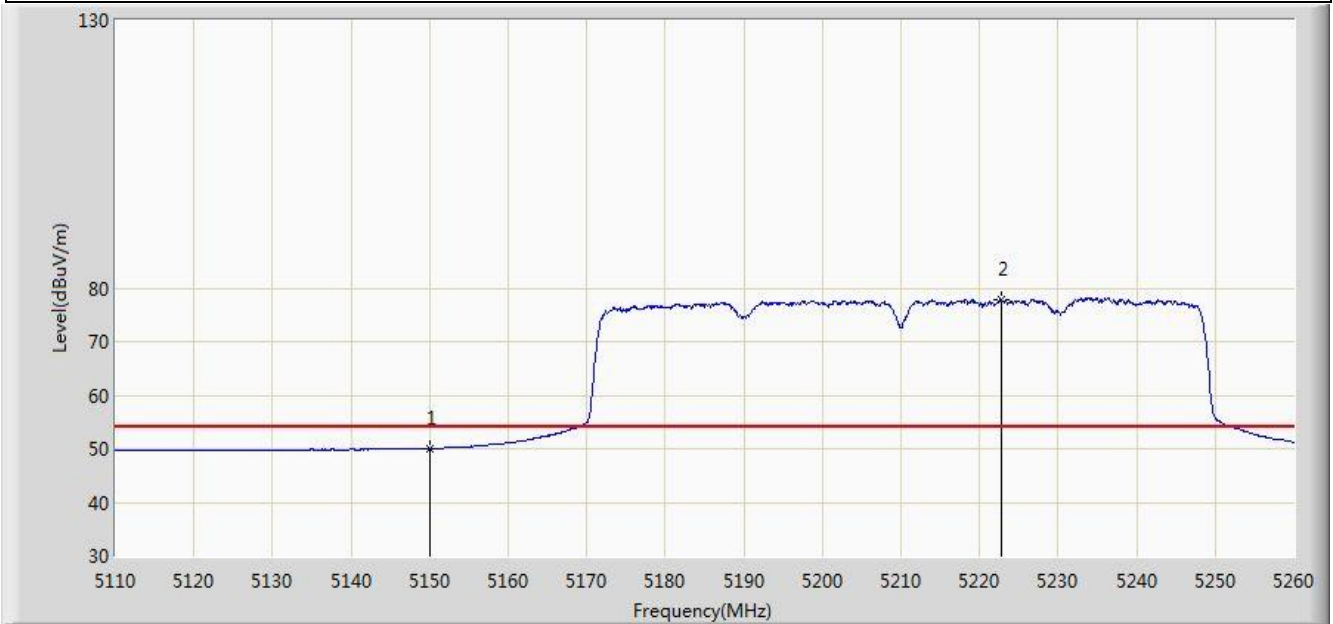


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.082	12.630	-3.918	54.000	37.452	AV
2		*	5222.800	77.772	40.516	N/A	N/A	37.257	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 14:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5210MHz by 802.11ac-VHT80 Ant 2	

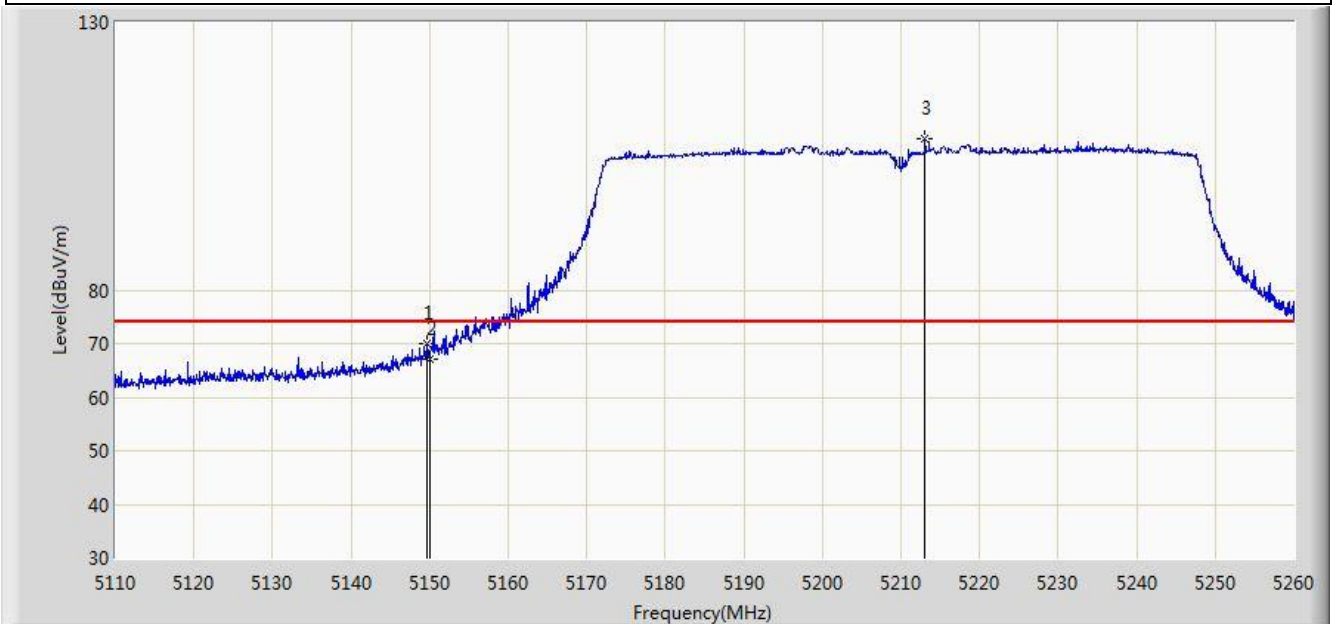


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.750	70.108	32.656	-3.892	74.000	37.452	PK
2			5150.000	67.135	29.683	-6.865	74.000	37.452	PK
3		*	5213.050	108.327	71.047	N/A	N/A	37.281	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 14:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5210MHz by 802.11ac-VHT80 Ant 2	

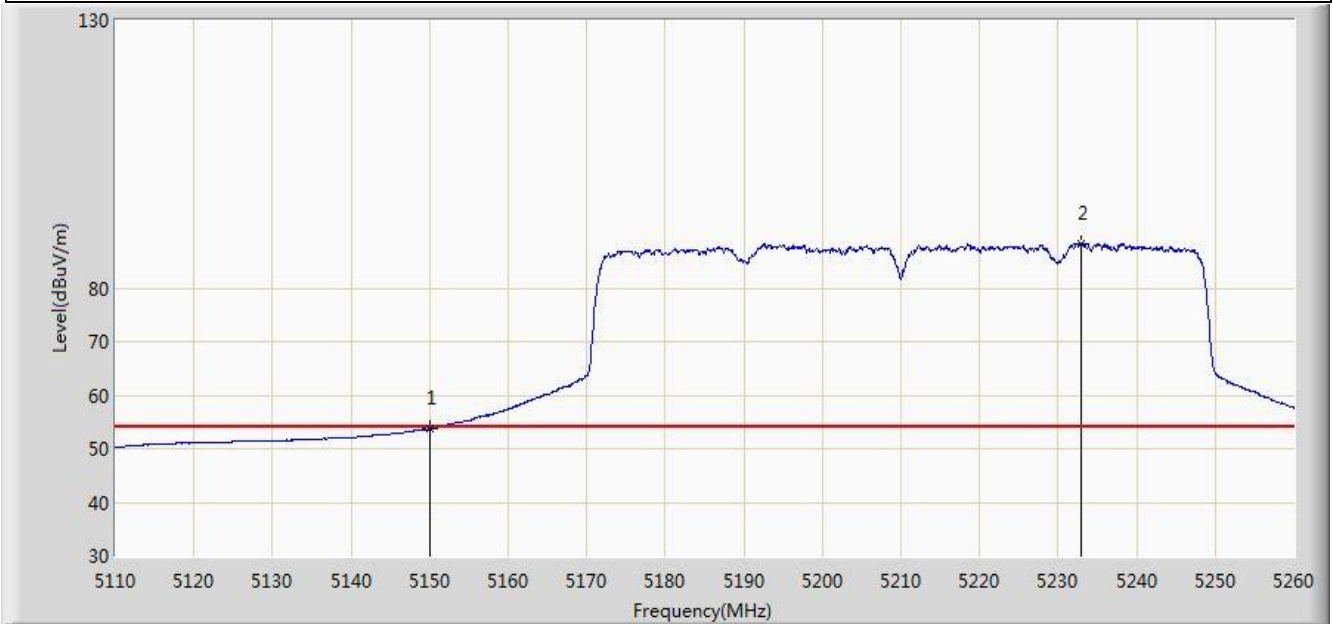


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.691	16.239	-0.309	54.000	37.452	AV
2		*	5232.850	88.363	51.129	N/A	N/A	37.234	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 00:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5775MHz by 802.11ac-VHT80 Ant 2	

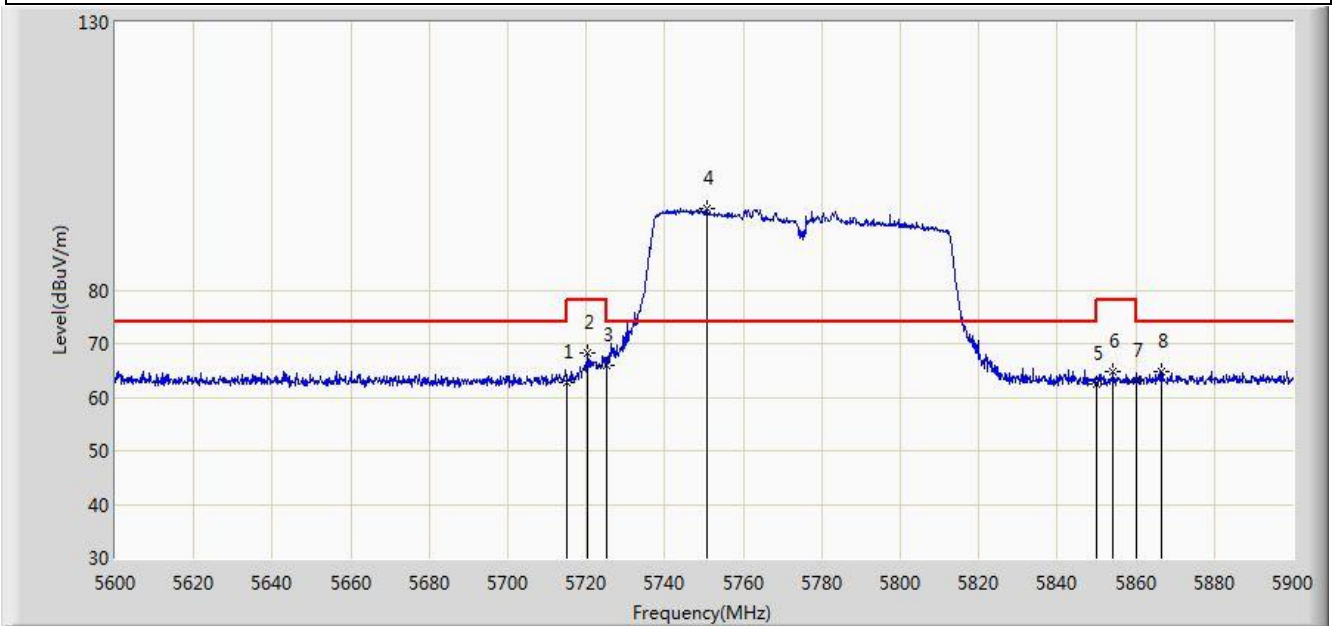


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	62.786	24.837	-11.214	74.000	37.949	PK
2			5720.150	68.210	30.240	-9.990	78.200	37.970	PK
3			5725.000	65.941	27.951	-12.259	78.200	37.990	PK
4		*	5750.600	95.292	57.193	N/A	N/A	38.098	PK
5			5850.000	62.533	24.080	-15.667	78.200	38.454	PK
6			5854.250	64.769	26.305	-13.431	78.200	38.464	PK
7			5860.000	63.092	24.614	-10.908	74.000	38.478	PK
8			5866.700	64.819	26.331	-9.181	74.000	38.488	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 00:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5775MHz by 802.11ac-VHT80 Ant 2	

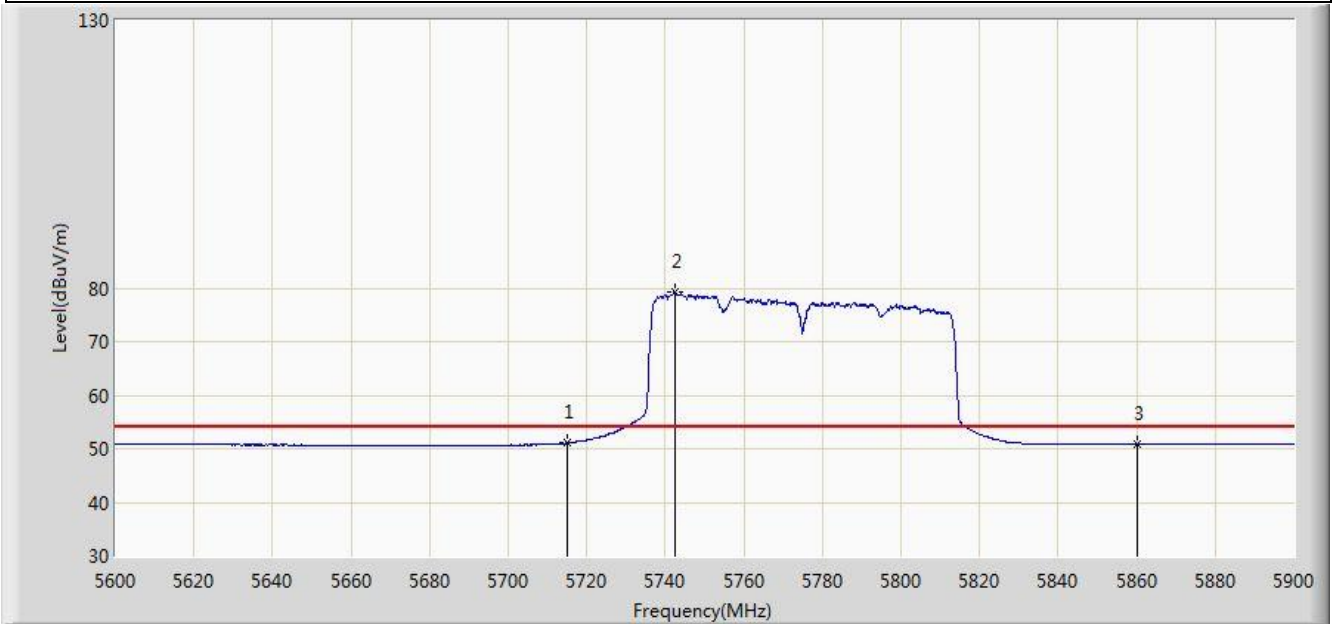


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.066	13.117	-2.934	54.000	37.949	AV
2		*	5742.350	79.297	41.237	N/A	N/A	38.060	AV
3			5860.000	50.819	12.341	-3.181	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 00:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5775MHz by 802.11ac-VHT80 Ant 2	

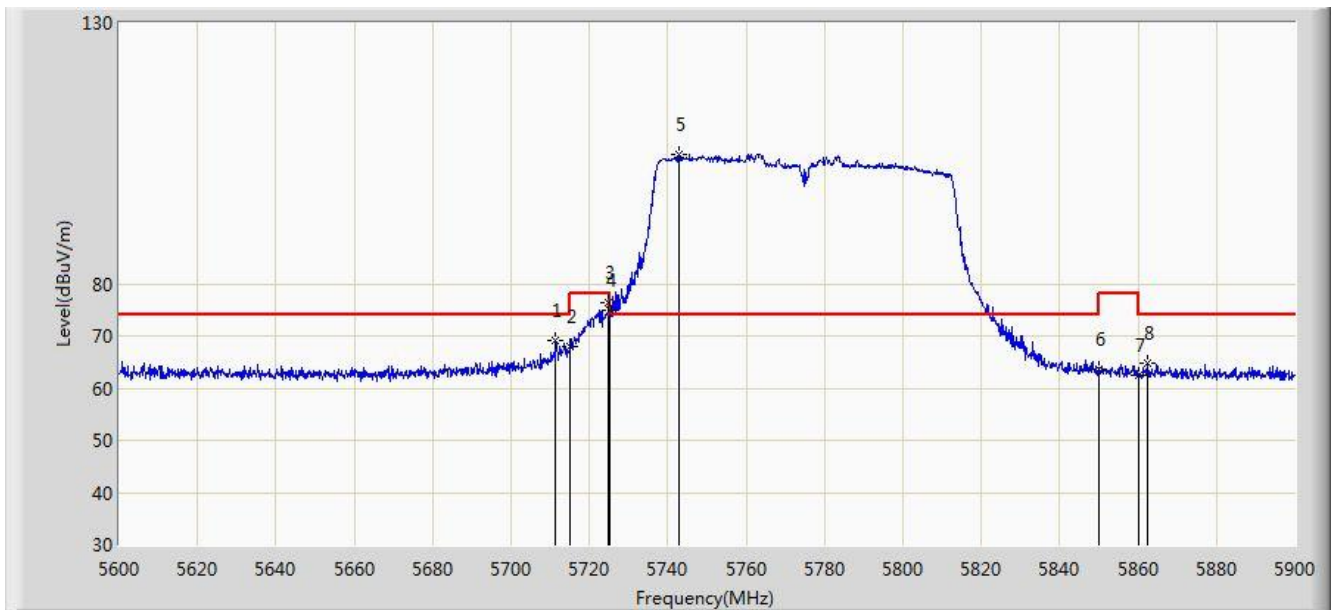


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5711.300	69.239	31.305	-4.761	74.000	37.935	PK
2			5715.000	67.939	29.990	-6.061	74.000	37.949	PK
3			5724.800	76.330	38.341	-1.870	78.200	37.989	PK
4			5725.000	74.852	36.862	-3.348	78.200	37.990	PK
5		*	5742.950	104.878	66.816	N/A	N/A	38.062	PK
6			5850.000	63.568	25.115	-14.632	78.200	38.454	PK
7			5860.000	62.507	24.029	-11.493	74.000	38.478	PK
8			5862.500	64.686	26.203	-9.314	74.000	38.483	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 00:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5775MHz by 802.11ac-VHT80 Ant 2	

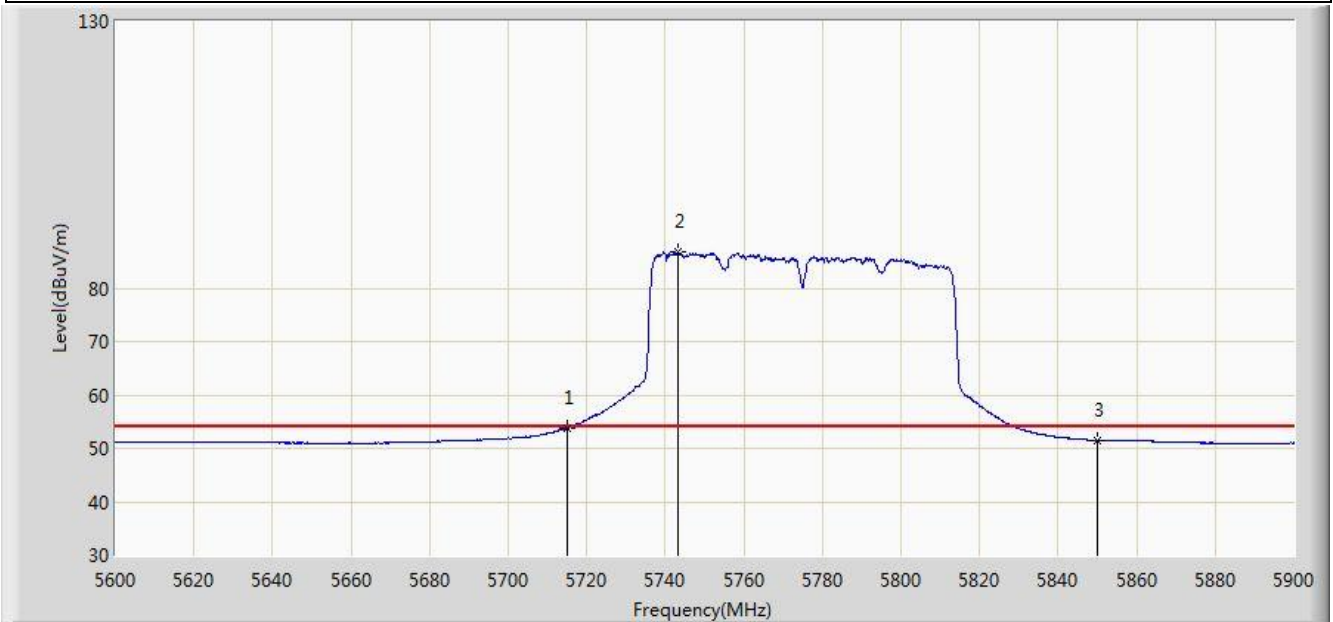


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.799	15.850	-0.201	54.000	37.949	AV
2		*	5743.100	86.715	48.652	N/A	N/A	38.063	AV
3			5850.000	51.557	13.104	-2.443	54.000	38.454	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/05 - 14:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11a Ant 1+2	

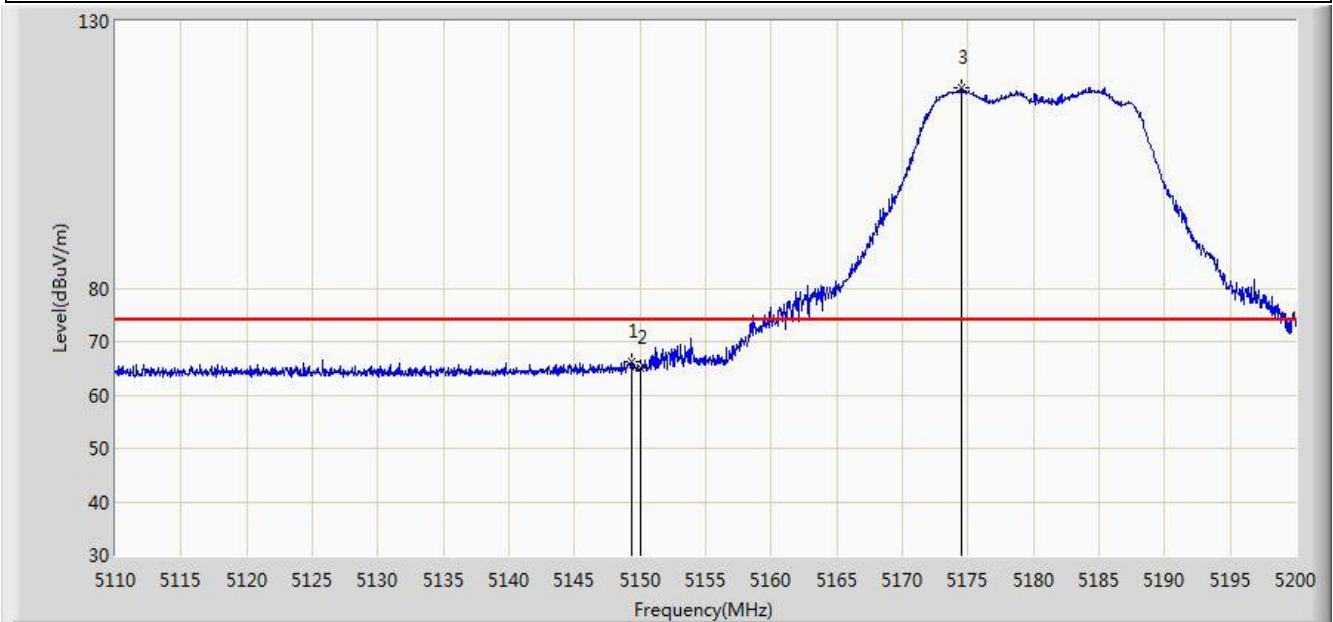


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.330	66.333	28.880	-7.667	74.000	37.453	PK
2			5150.000	65.056	27.604	-8.944	74.000	37.452	PK
3		*	5174.530	117.532	80.146	N/A	N/A	37.386	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 14:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11a Ant 1+2	

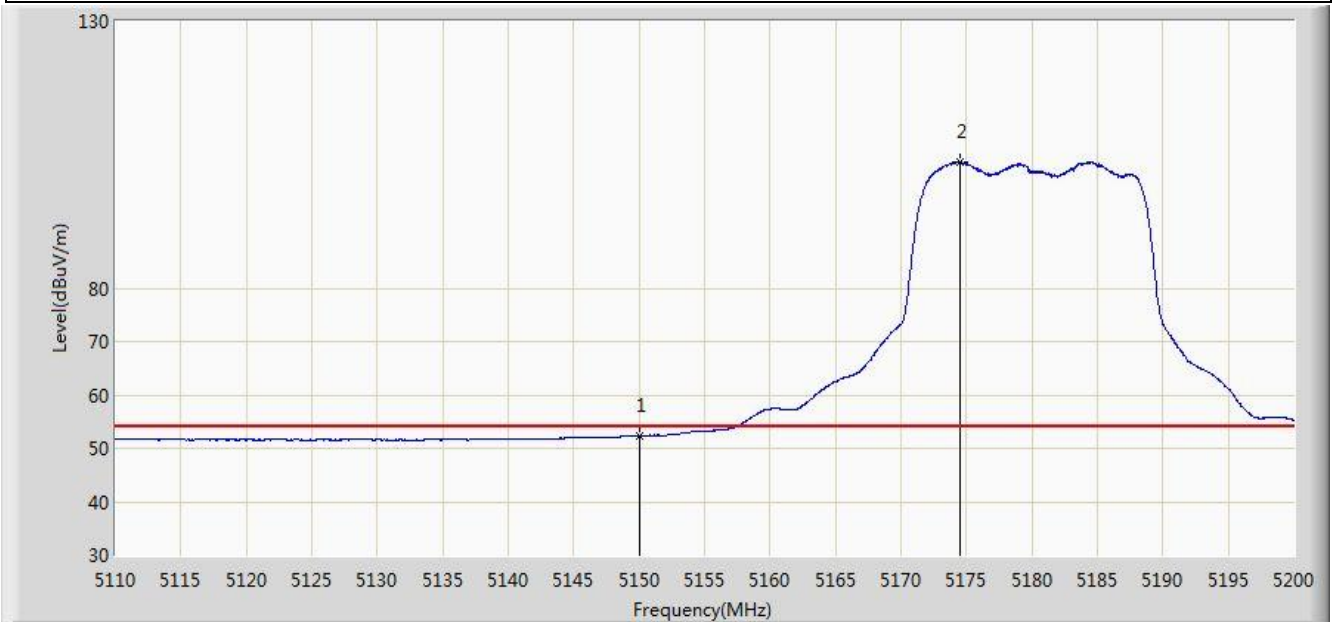


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.376	14.924	-1.624	54.000	37.452	AV
2		*	5174.485	103.483	66.097	N/A	N/A	37.386	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 14:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11a Ant 1+2	

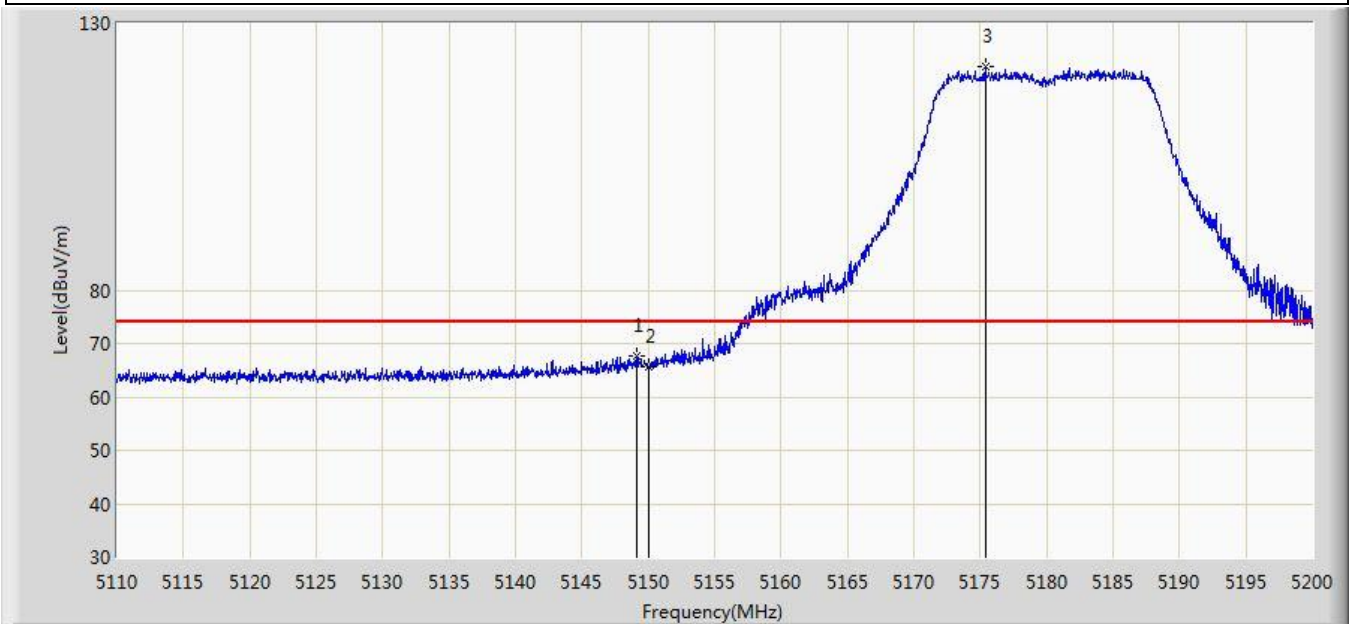


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.105	67.763	30.310	-6.237	74.000	37.453	PK
2			5150.000	65.557	28.105	-8.443	74.000	37.452	PK
3		*	5175.385	121.788	84.404	N/A	N/A	37.384	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 14:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11a Ant 1+2	

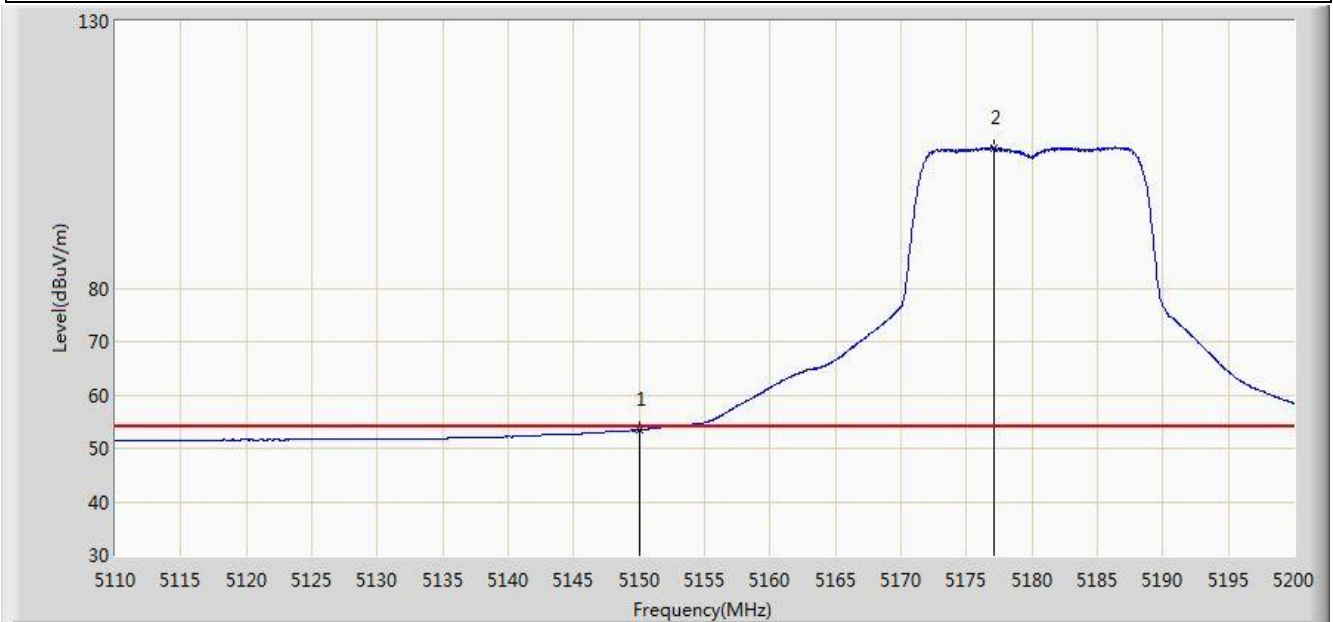


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.458	16.006	-0.542	54.000	37.452	AV
2		*	5177.050	106.336	68.956	N/A	N/A	37.380	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 14:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11a Ant 1+2	

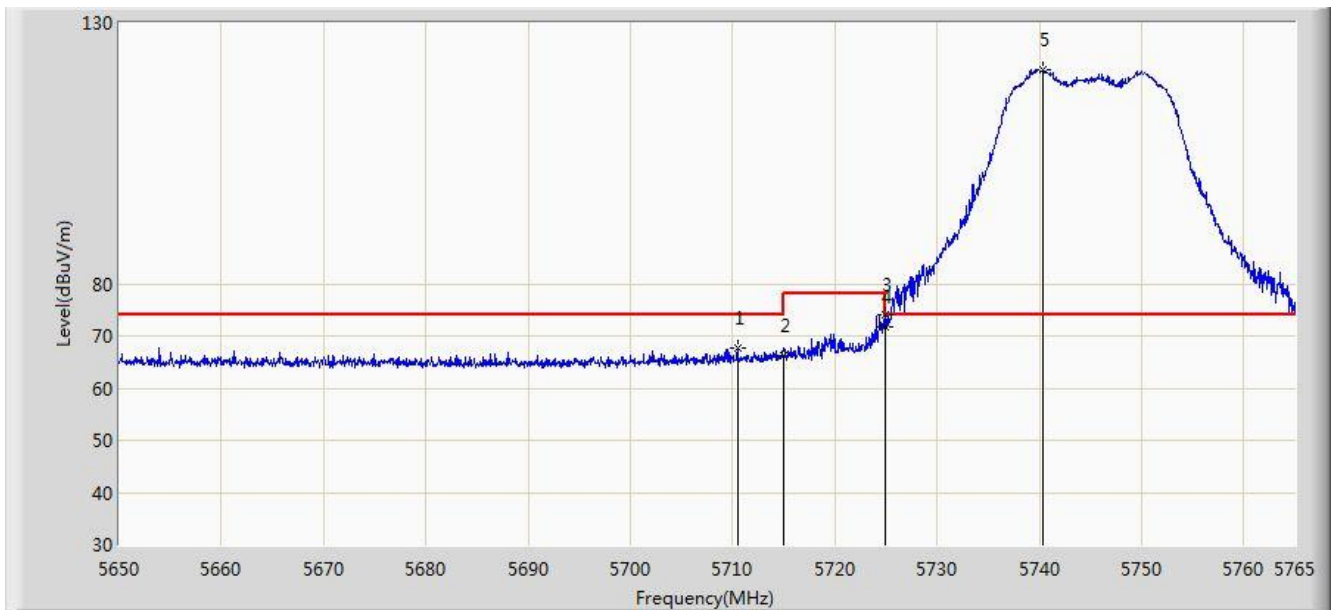


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5710.490	67.809	29.878	-6.191	74.000	37.931	PK
2			5715.000	66.214	28.265	-7.786	74.000	37.949	PK
3			5724.922	74.069	36.080	-4.131	78.200	37.990	PK
4			5725.000	71.761	33.771	-6.439	78.200	37.990	PK
5		*	5740.333	120.949	82.897	N/A	N/A	38.052	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 14:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11a Ant 1+2	

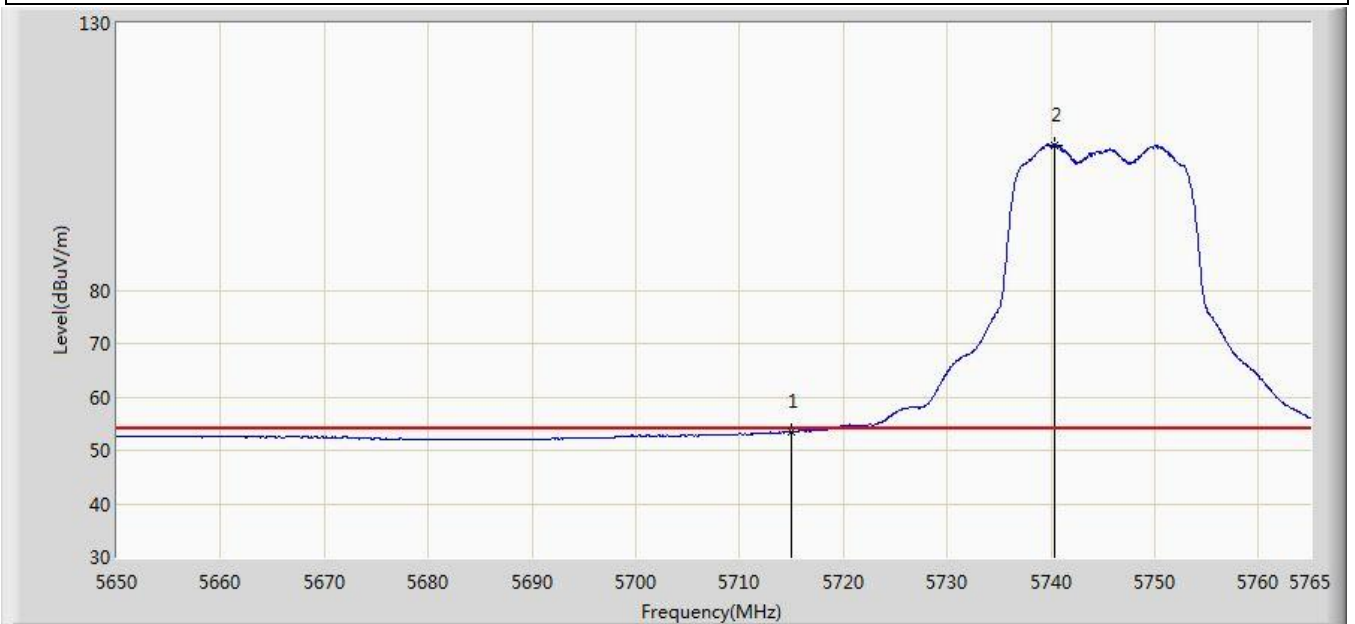


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.577	15.628	-0.423	54.000	37.949	AV
2		*	5740.333	107.202	69.150	N/A	N/A	38.052	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 14:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11a Ant 1+2	

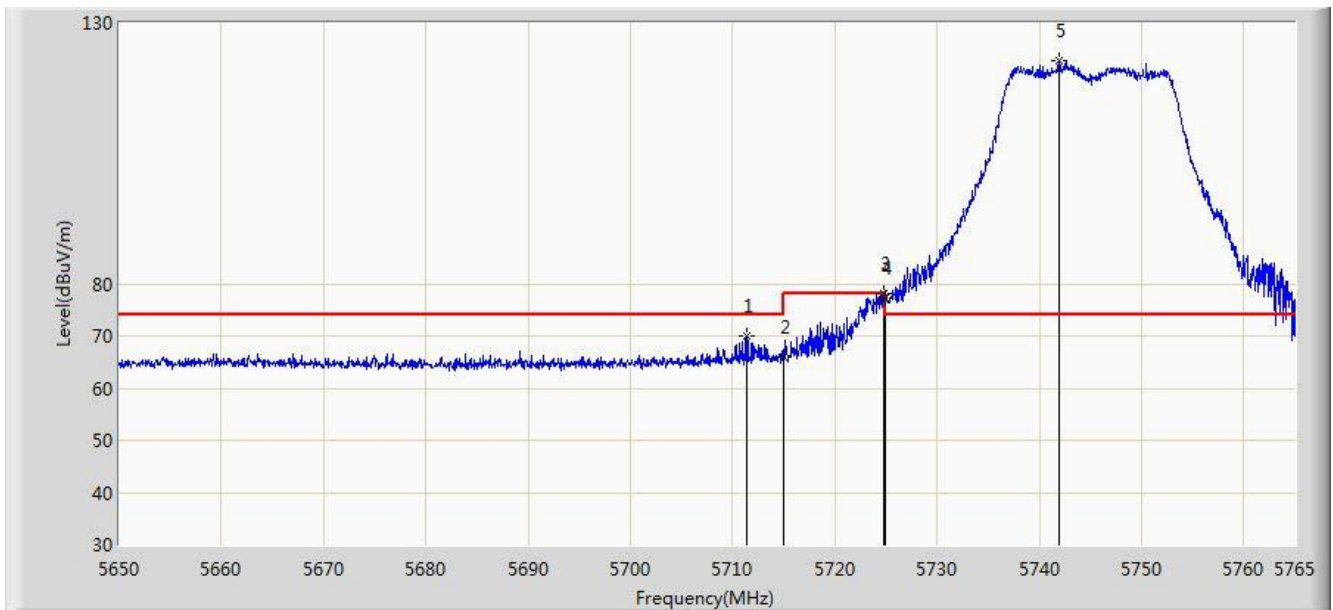


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5711.353	70.098	32.163	-3.902	74.000	37.935	PK
2			5715.000	65.911	27.962	-8.089	74.000	37.949	PK
3			5724.808	77.992	40.003	-0.208	78.200	37.989	PK
4			5725.000	77.258	39.268	-0.942	78.200	37.990	PK
5		*	5741.942	122.637	84.579	N/A	N/A	38.059	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 14:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11a Ant 1+2	

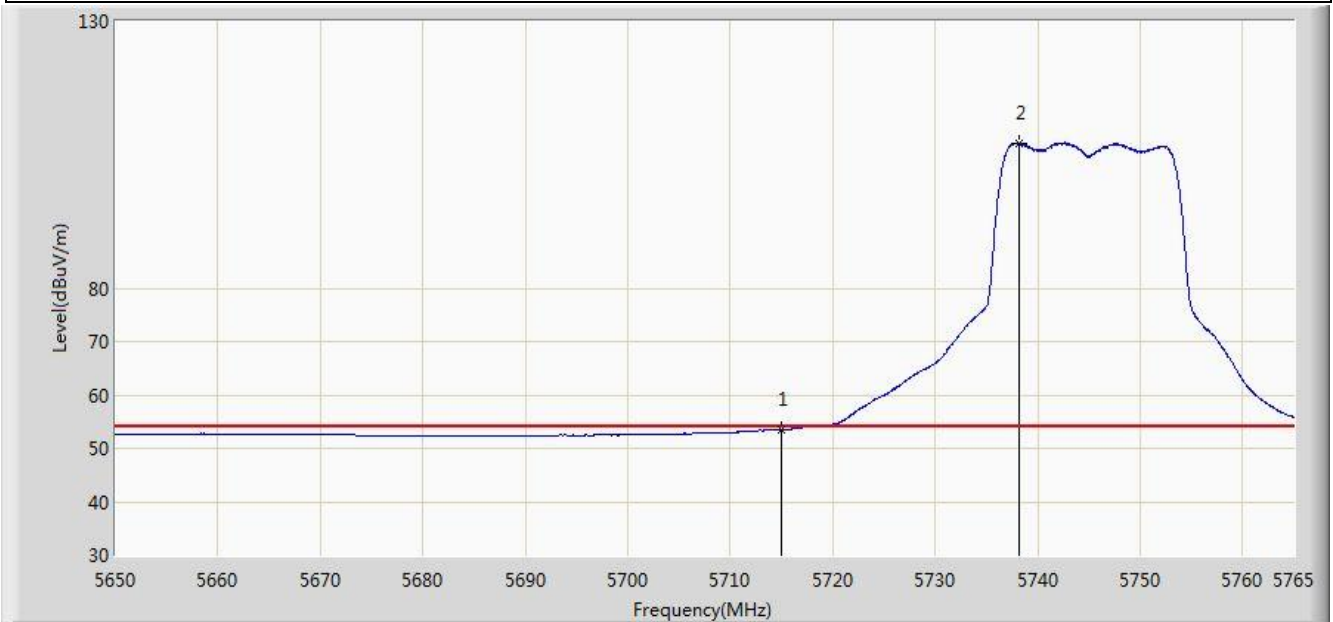


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.439	15.490	-0.561	54.000	37.949	AV
2		*	5738.263	107.183	69.139	N/A	N/A	38.045	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/05 - 18:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11a Ant 1+2	

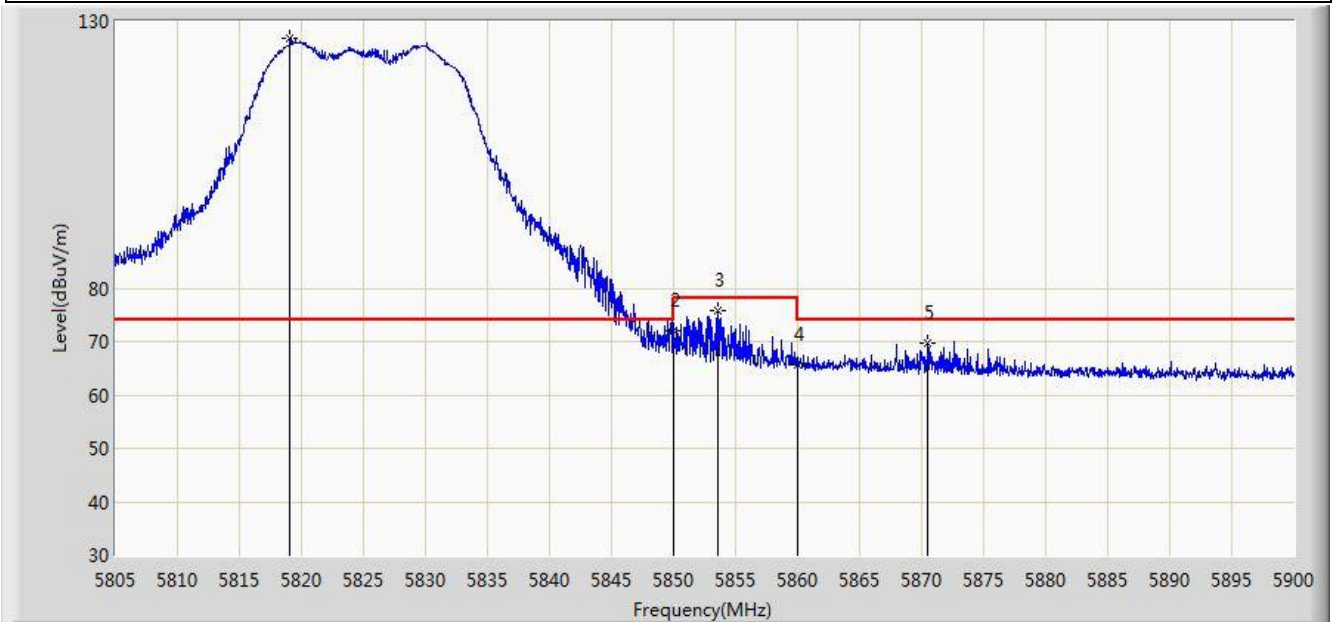


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.107	126.692	88.361	N/A	N/A	38.331	PK
2			5850.000	72.016	33.563	-6.184	78.200	38.454	PK
3			5853.592	75.670	37.208	-2.530	78.200	38.462	PK
4			5860.000	65.669	27.191	-8.331	74.000	38.478	PK
5			5870.502	69.766	31.274	-4.234	74.000	38.492	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11a Ant 1+2	

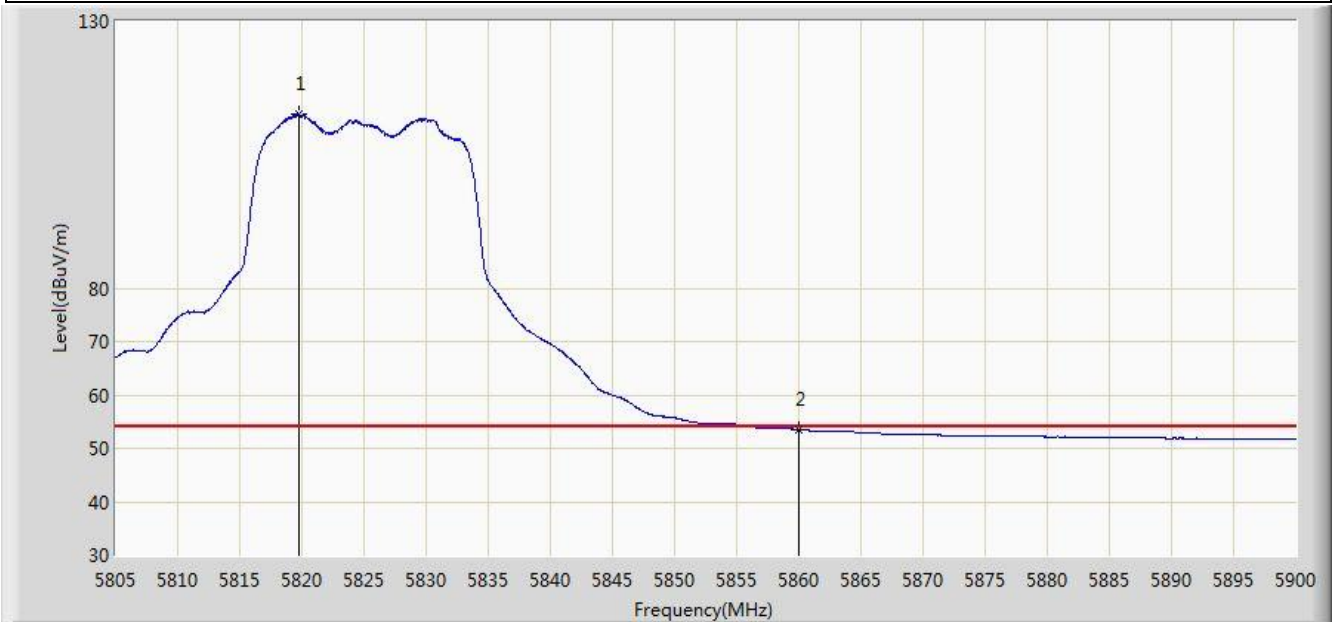


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.725	112.491	74.157	N/A	N/A	38.334	AV
2			5860.000	53.605	15.127	-0.395	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 18:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11a Ant 1+2	

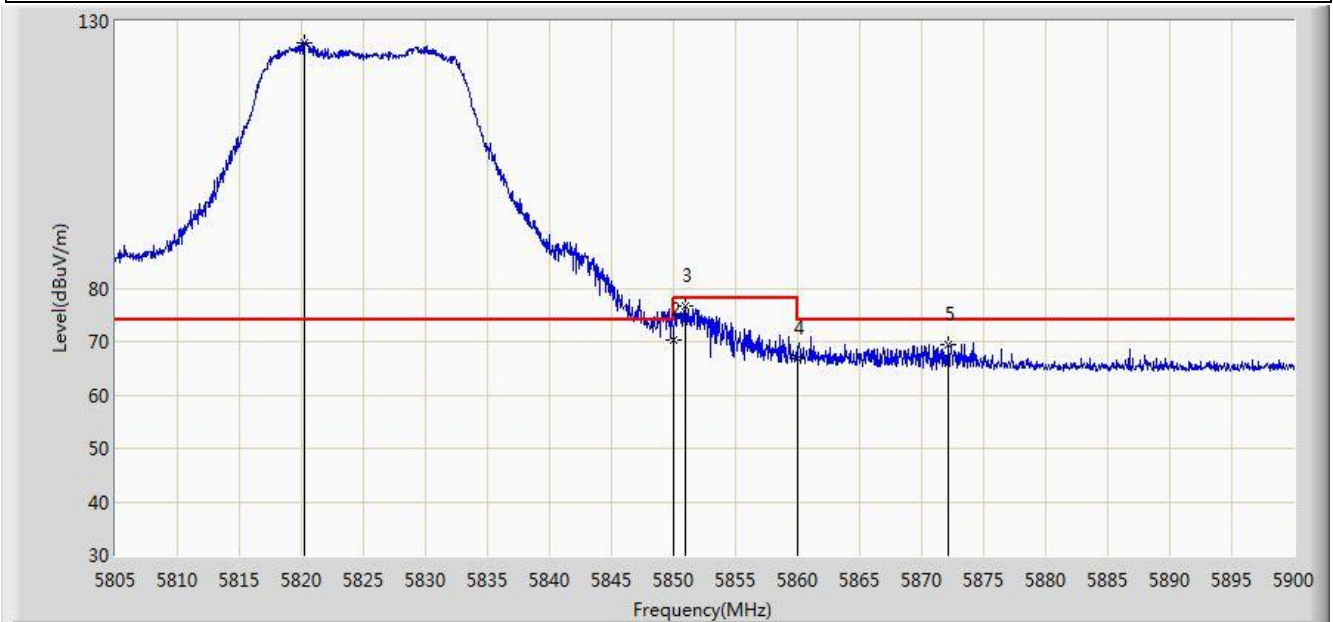


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.295	125.986	87.650	N/A	N/A	38.336	PK
2			5850.000	70.372	31.919	-7.828	78.200	38.454	PK
3			5850.980	76.546	38.090	-1.654	78.200	38.455	PK
4			5860.000	66.737	28.259	-7.263	74.000	38.478	PK
5			5872.165	69.292	30.798	-4.708	74.000	38.494	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 18:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11a Ant 1+2	

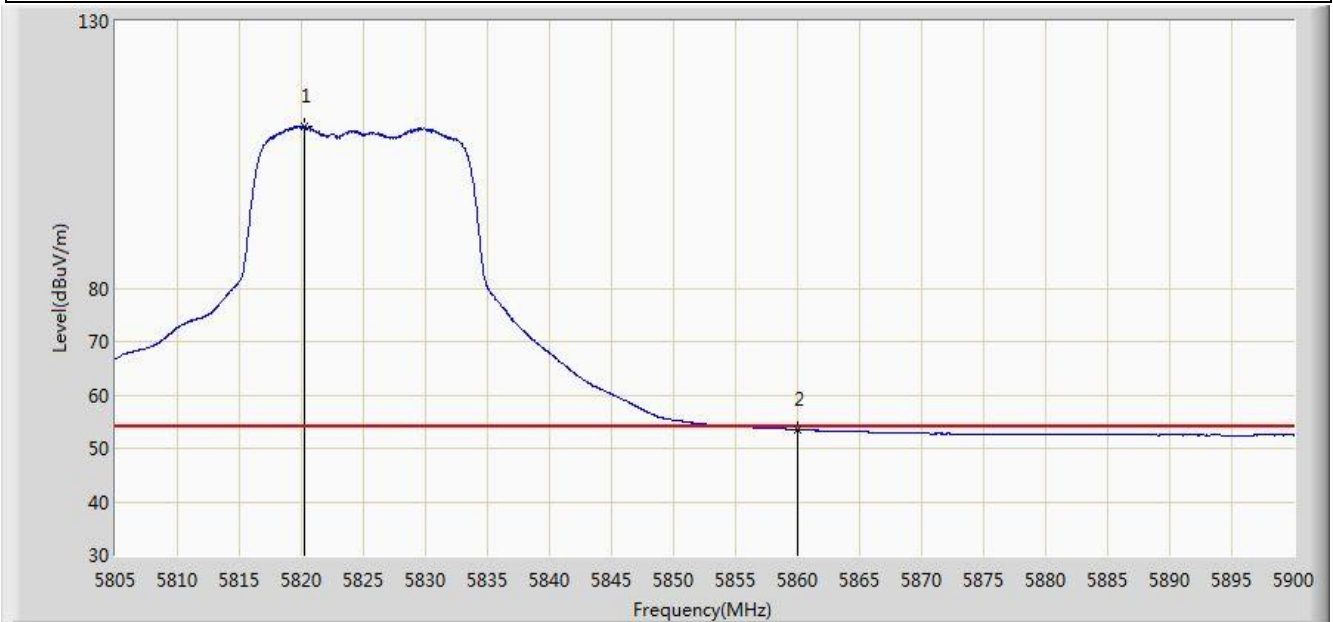


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.200	110.303	71.967	N/A	N/A	38.336	AV
2			5860.000	53.520	15.042	-0.480	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11n-HT20 Ant 1+2	

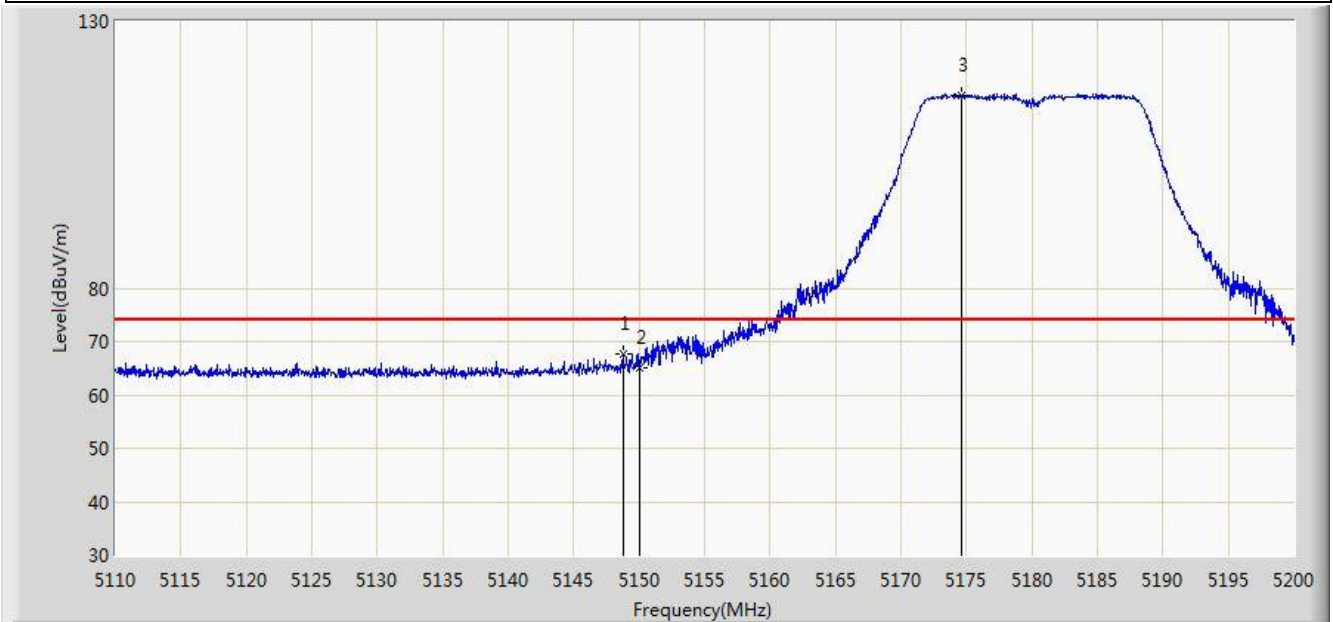


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.745	67.576	30.122	-6.424	74.000	37.454	PK
2			5150.000	65.047	27.595	-8.953	74.000	37.452	PK
3		*	5174.665	116.205	78.819	N/A	N/A	37.385	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11n-HT20 Ant 1+2	

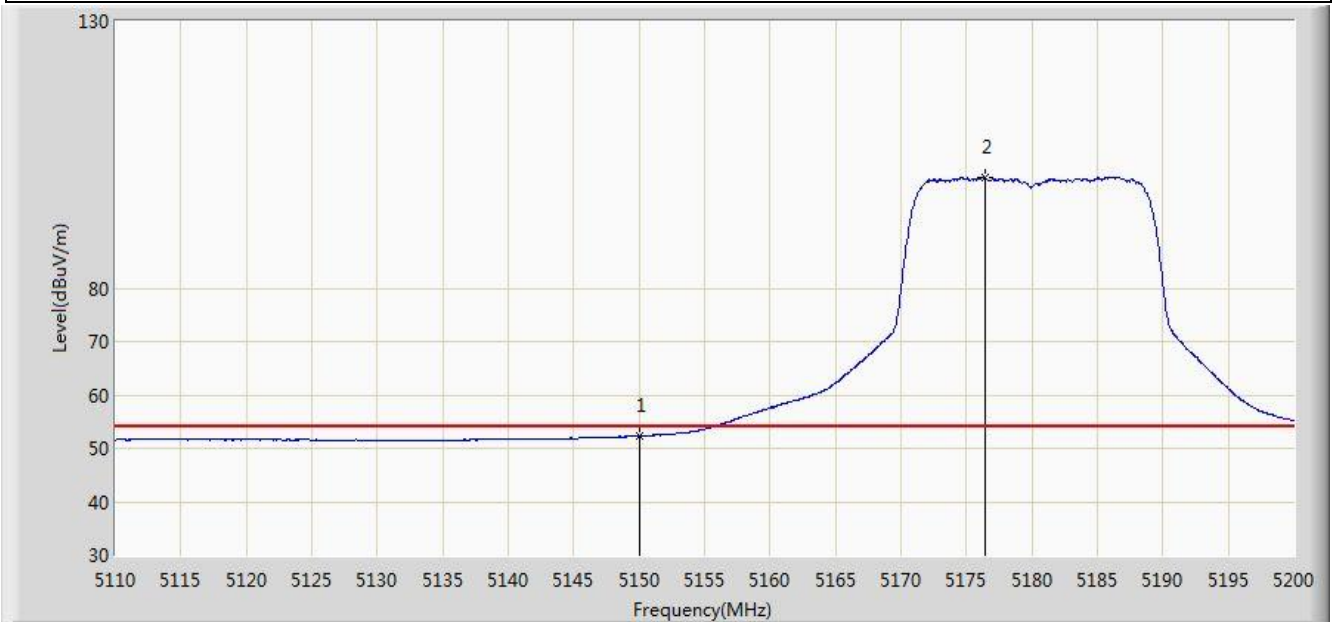


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.327	14.875	-1.673	54.000	37.452	AV
2		*	5176.420	100.773	63.391	N/A	N/A	37.381	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11n-HT20 Ant 1+2	

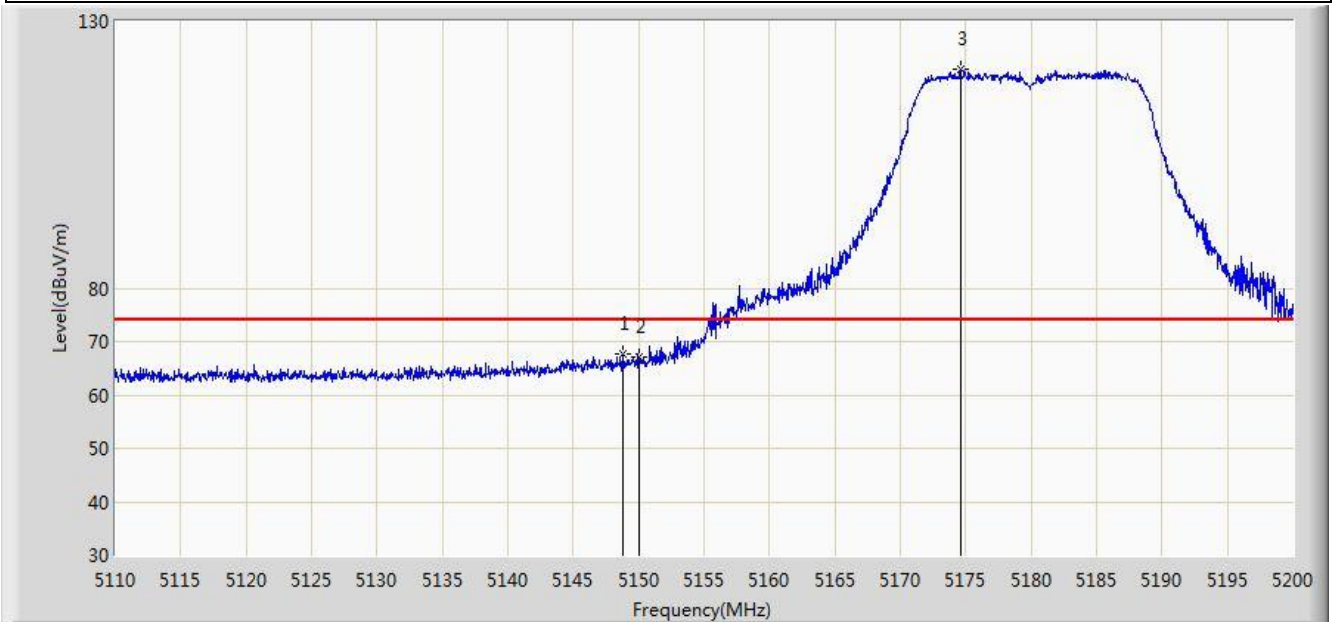


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.835	67.659	30.206	-6.341	74.000	37.454	PK
2			5150.000	66.977	29.525	-7.023	74.000	37.452	PK
3		*	5174.575	121.040	83.654	N/A	N/A	37.386	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11n-HT20 Ant 1+2	

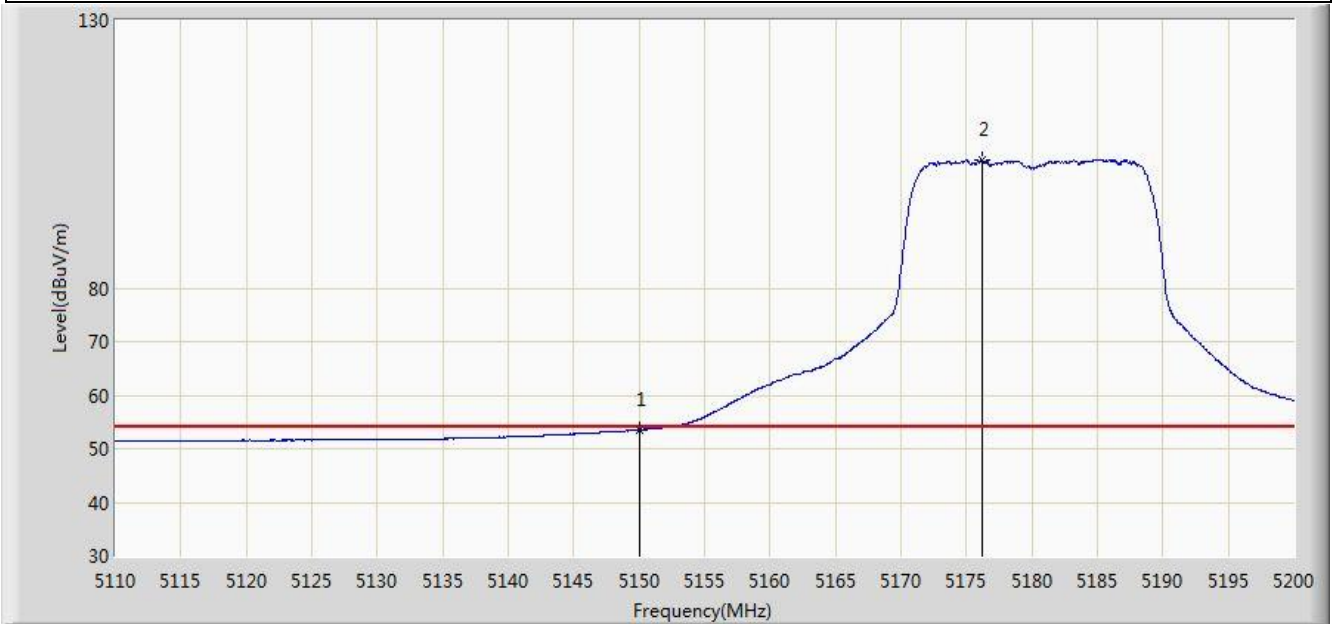


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.620	16.168	-0.380	54.000	37.452	AV
2		*	5176.150	103.797	66.415	N/A	N/A	37.382	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/05 - 15:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11n-HT20 Ant 1+2	

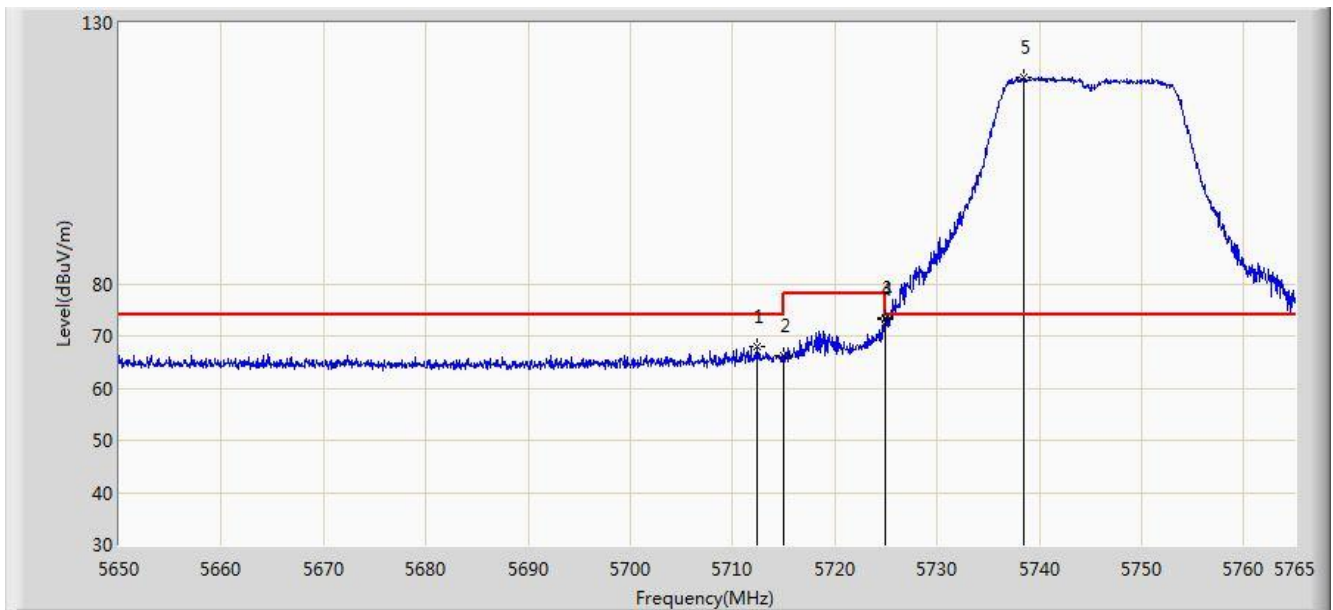


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.330	67.833	29.895	-6.167	74.000	37.939	PK
2			5715.000	66.172	28.223	-7.828	74.000	37.949	PK
3			5724.922	73.571	35.582	-4.629	78.200	37.990	PK
4			5725.000	73.284	35.294	-4.916	78.200	37.990	PK
5		*	5738.550	119.649	81.603	N/A	N/A	38.046	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11n-HT20 Ant 1+2	

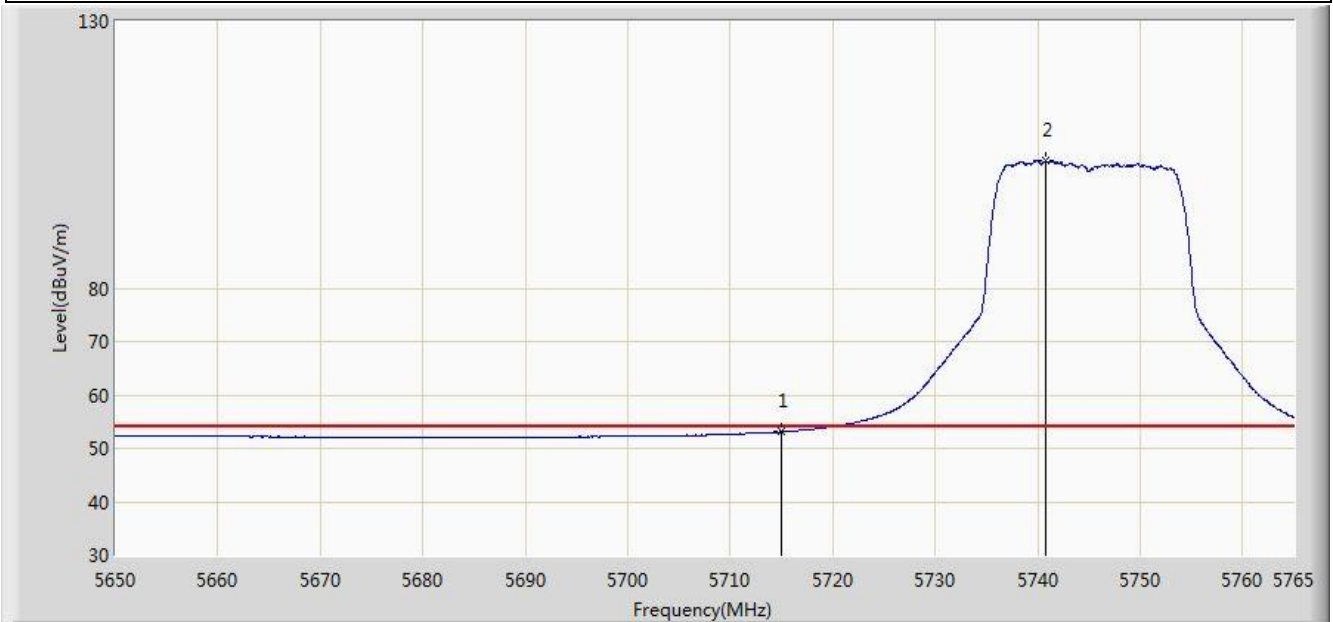


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.112	15.163	-0.888	54.000	37.949	AV
2		*	5740.850	103.776	65.722	N/A	N/A	38.054	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11n-HT20 Ant 1+2	

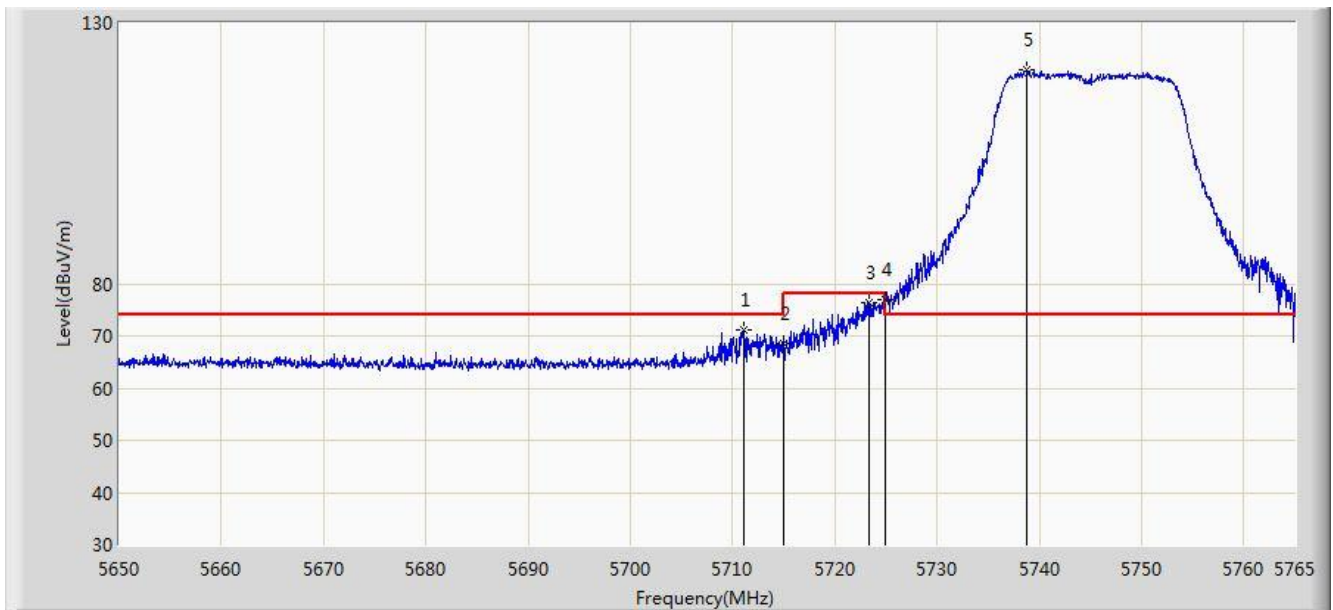


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5711.123	71.144	33.210	-2.856	74.000	37.933	PK
2			5715.000	68.560	30.611	-5.440	74.000	37.949	PK
3			5723.370	76.513	38.530	-1.687	78.200	37.983	PK
4			5725.000	76.863	38.873	-1.337	78.200	37.990	PK
5		*	5738.837	121.111	83.064	N/A	N/A	38.047	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11n-HT20 Ant 1+2	

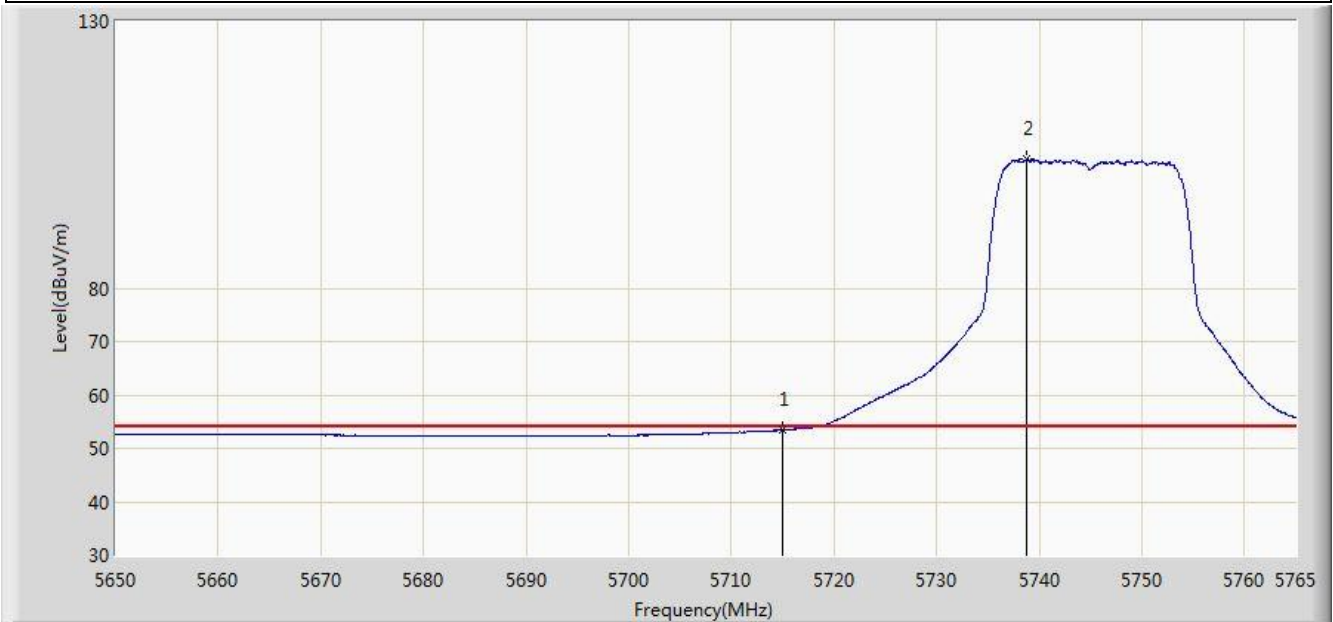


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.398	15.449	-0.602	54.000	37.949	AV
2		*	5738.780	104.120	66.074	N/A	N/A	38.047	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Note: Test Mode: Transmit at Channel 5825MHz by 802.11n-HT20 Ant 1+2	

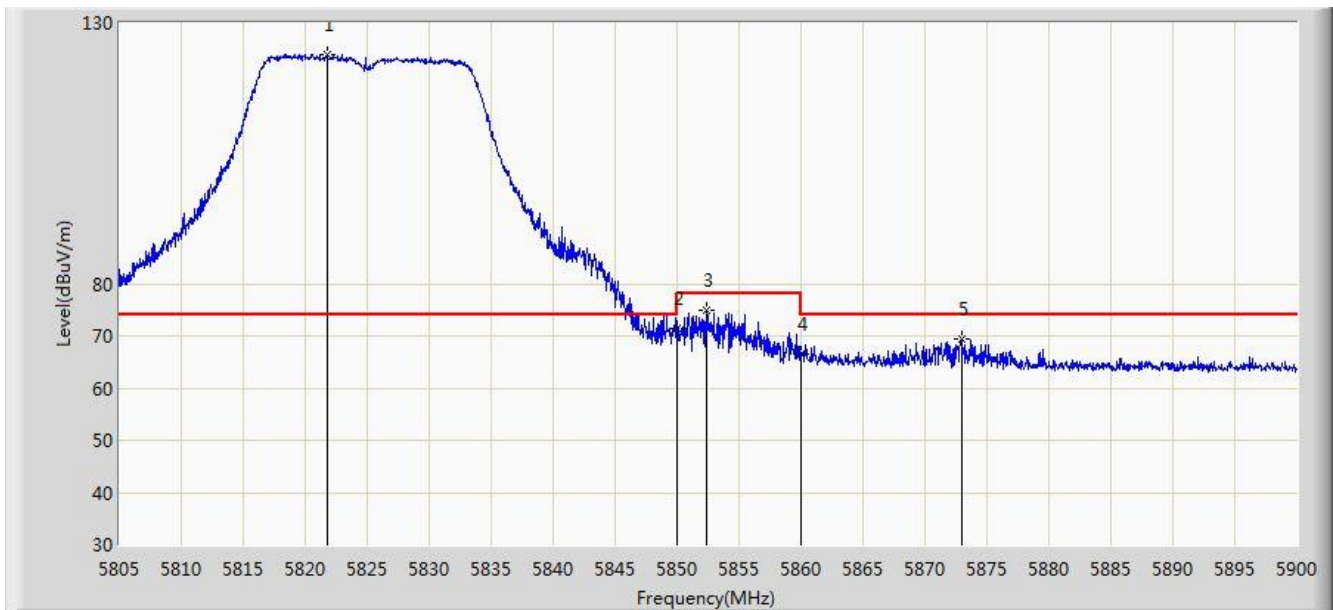


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.768	124.004	85.662	N/A	N/A	38.342	PK
2			5850.000	71.319	32.866	-6.881	78.200	38.454	PK
3			5852.405	74.922	36.463	-3.278	78.200	38.459	PK
4			5860.000	66.462	27.984	-7.538	74.000	38.478	PK
5			5873.020	69.372	30.877	-4.628	74.000	38.495	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11n-HT20 Ant 1+2	

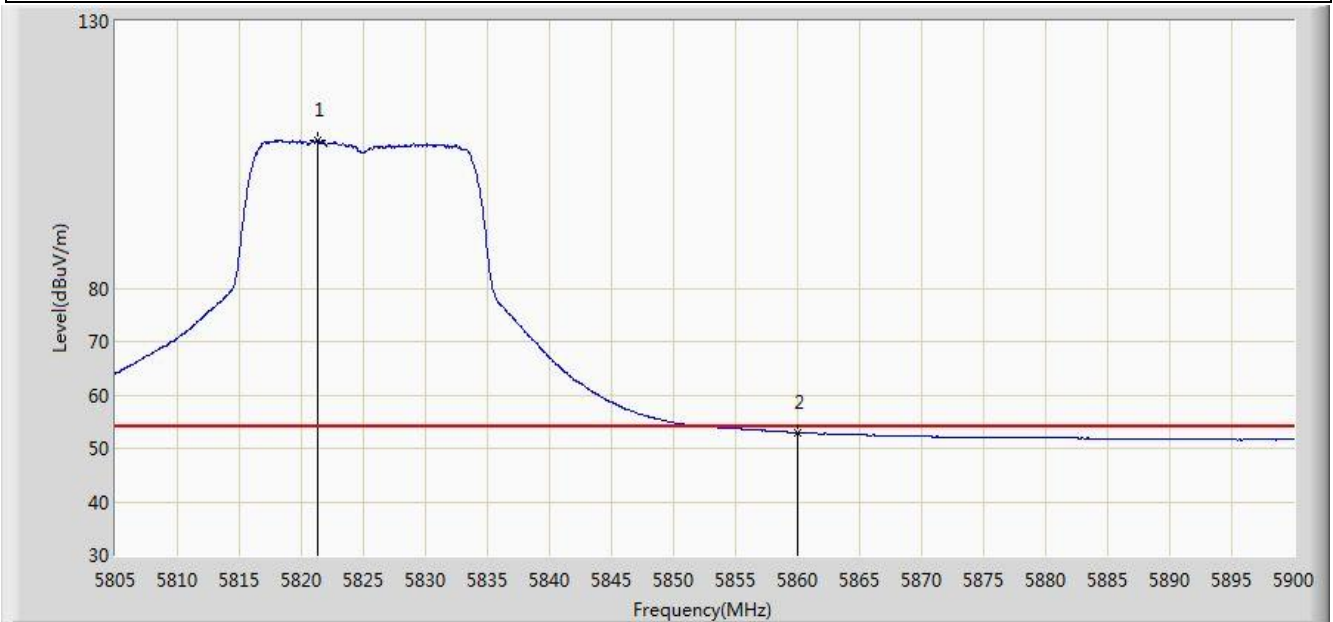


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.340	107.658	69.318	N/A	N/A	38.340	AV
2			5860.000	52.928	14.450	-1.072	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11n-HT20 Ant 1+2	

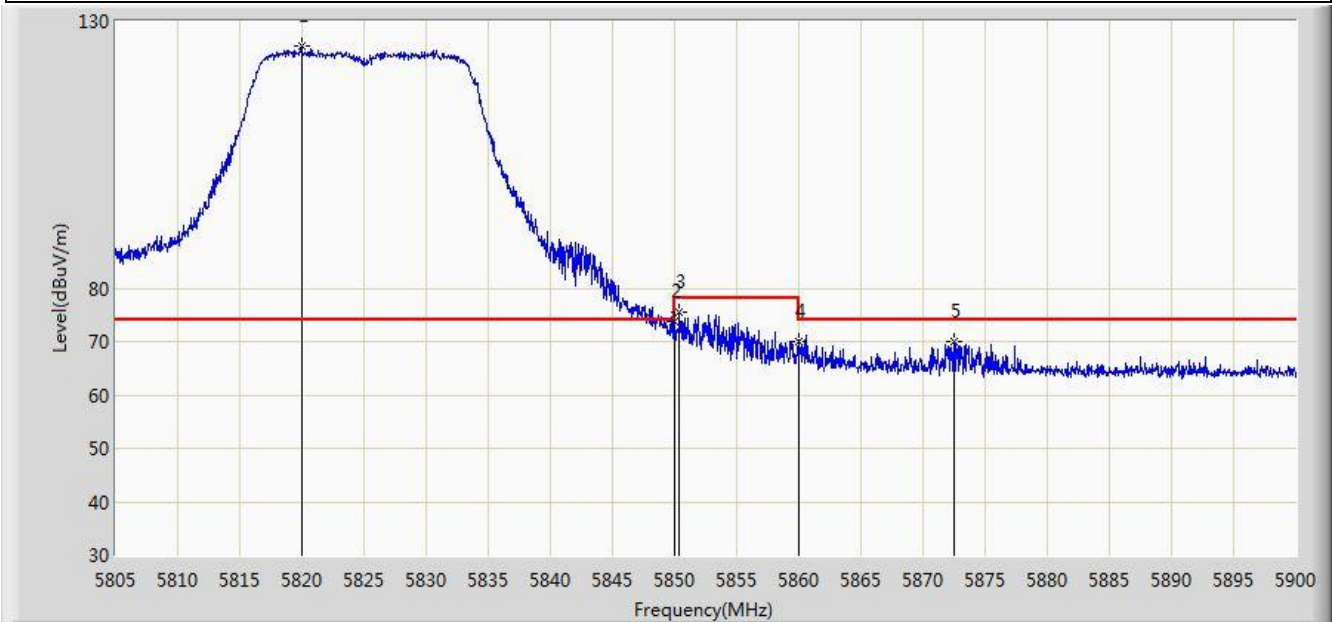


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.962	125.235	86.900	N/A	N/A	38.335	PK
2			5850.000	73.902	35.449	-4.298	78.200	38.454	PK
3			5850.362	75.648	37.194	-2.552	78.200	38.454	PK
4			5860.000	69.939	31.461	-4.061	74.000	38.478	PK
5			5872.498	69.923	31.429	-4.077	74.000	38.494	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11n-HT20 Ant 1+2	

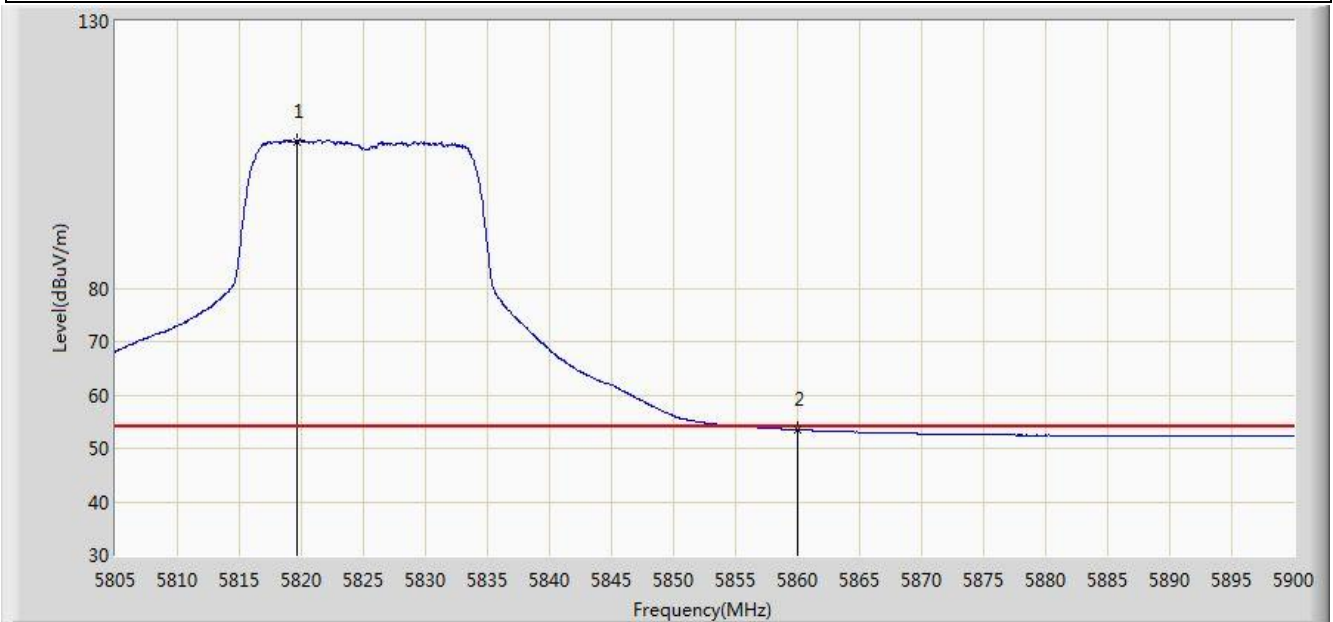


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.630	107.520	69.187	N/A	N/A	38.334	AV
2			5860.000	53.430	14.952	-0.570	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/05 - 15:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11n-HT40 Ant 1+2	

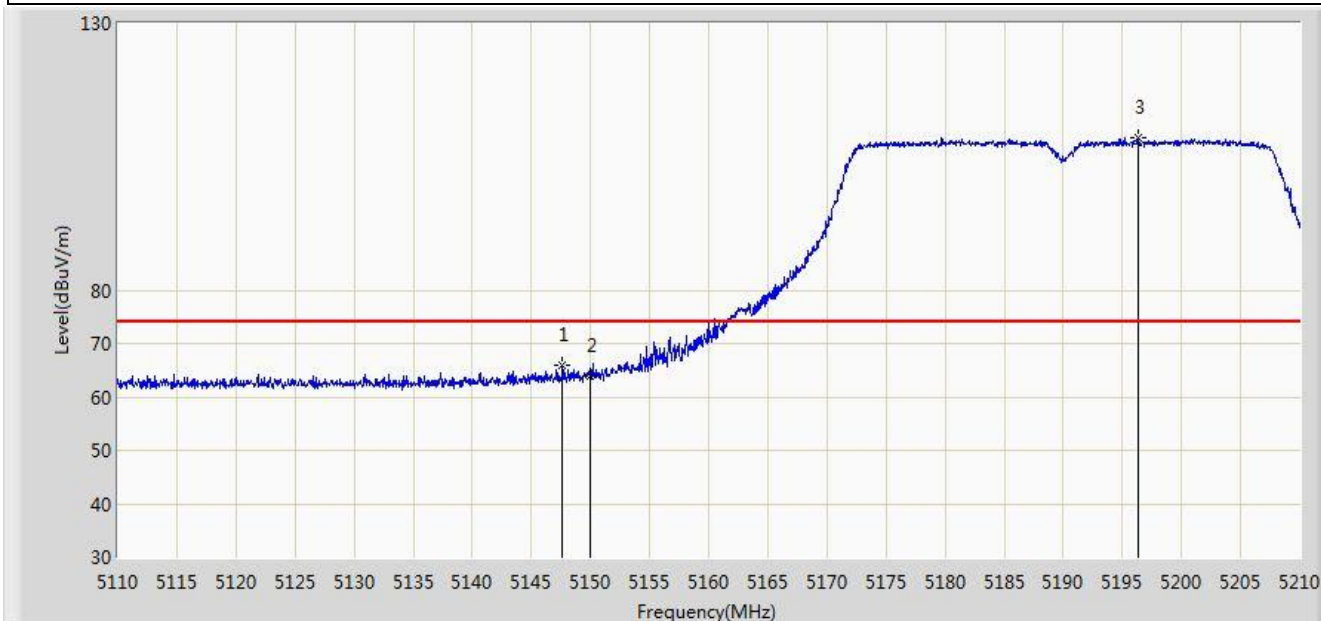


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.650	65.975	28.520	-8.025	74.000	37.455	PK
2			5150.000	63.879	26.427	-10.121	74.000	37.452	PK
3		*	5196.300	108.426	71.092	N/A	N/A	37.334	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11n-HT40 Ant 1+2	

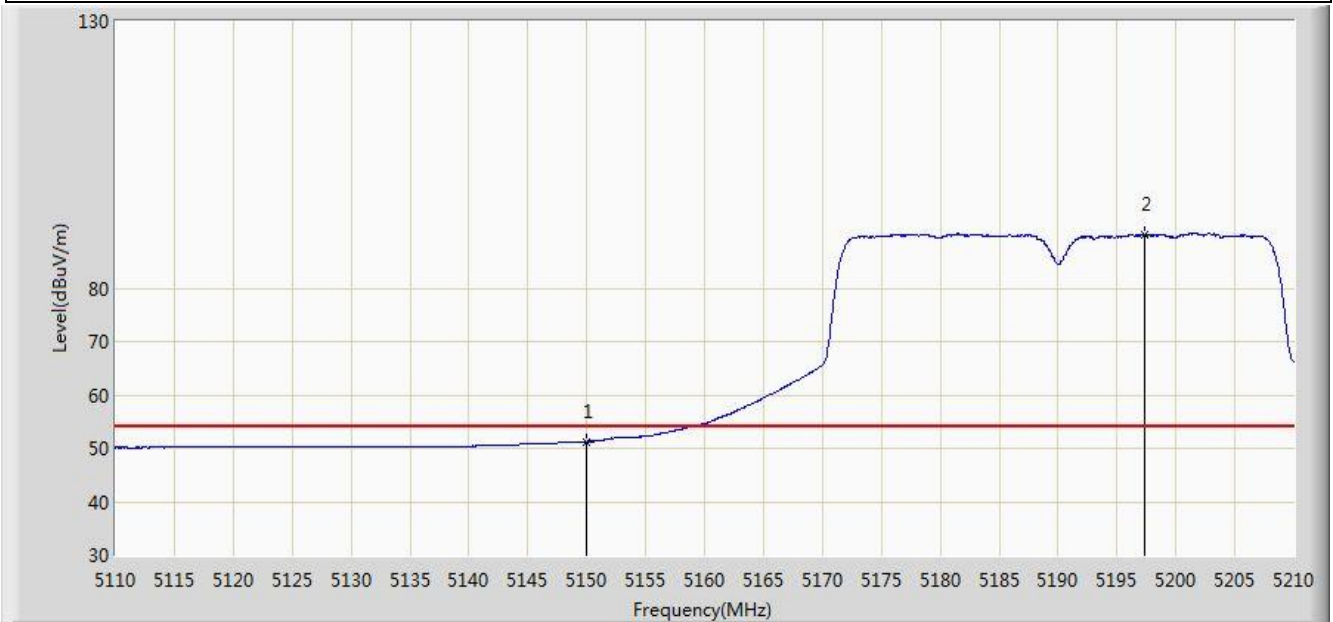


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.269	13.817	-2.731	54.000	37.452	AV
2		*	5197.350	90.113	52.781	N/A	N/A	37.332	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11n-HT40 Ant 1+2	

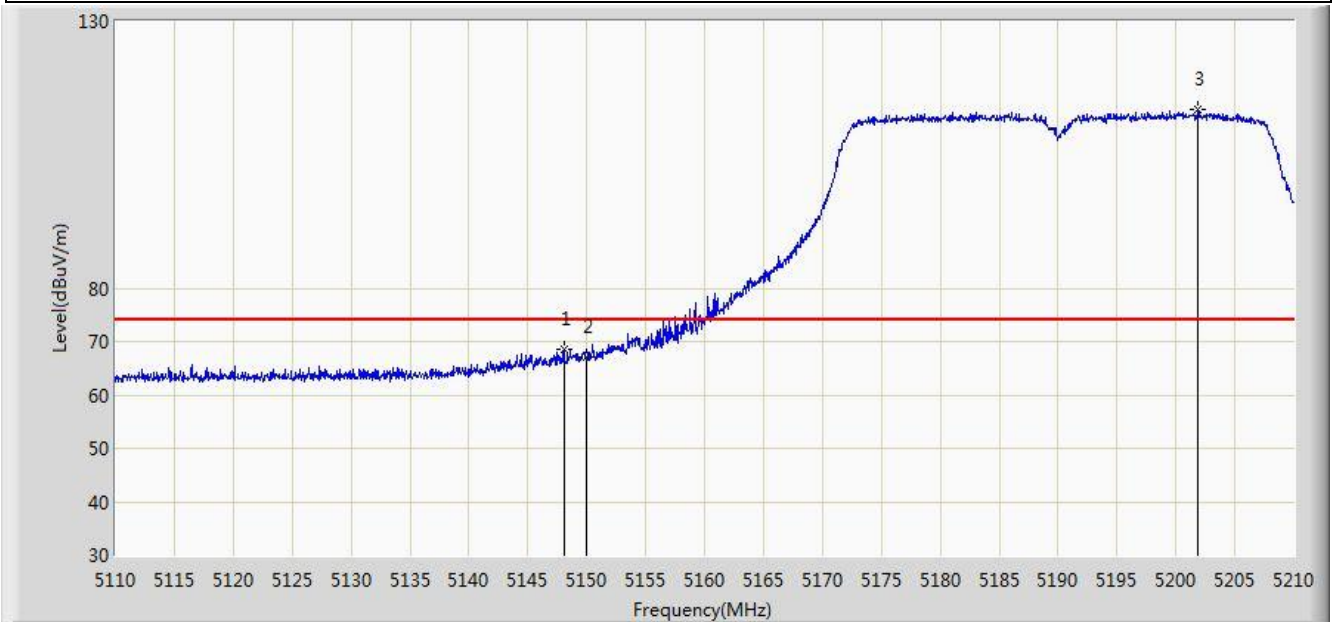


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.100	68.692	31.237	-5.308	74.000	37.455	PK
2			5150.000	67.158	29.706	-6.842	74.000	37.452	PK
3		*	5201.900	113.401	76.083	N/A	N/A	37.317	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 15:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11n-HT40 Ant 1+2	

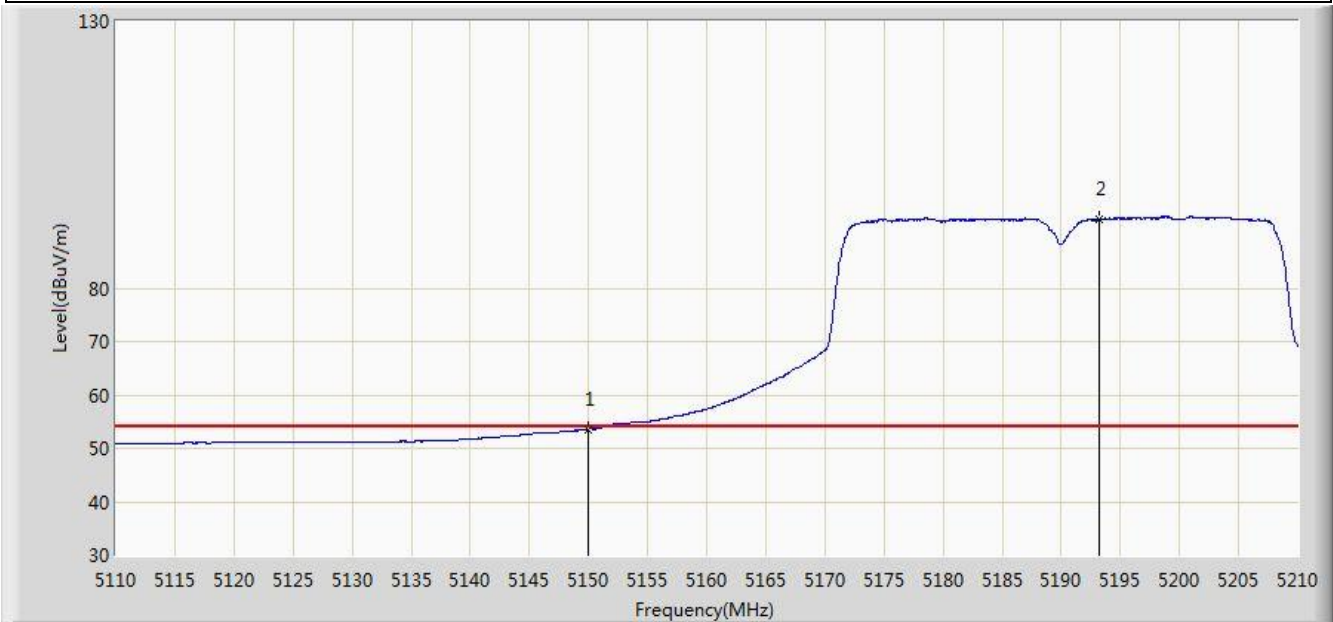


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.611	16.159	-0.389	54.000	37.452	AV
2		*	5193.250	92.903	55.562	N/A	N/A	37.341	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Note: Test Mode: Transmit at Channel 5755MHz by 802.11n-HT40 Ant 1+2	

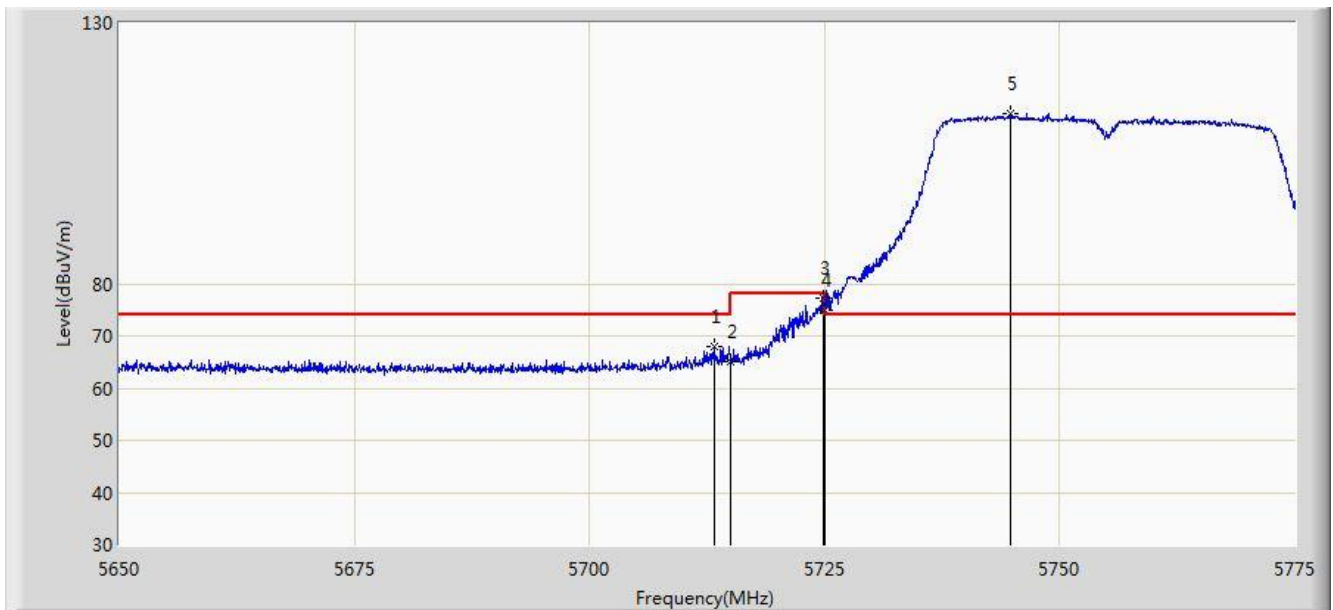


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5713.250	67.839	29.897	-6.161	74.000	37.942	PK
2			5715.000	65.210	27.261	-8.790	74.000	37.949	PK
3			5724.875	77.311	39.322	-0.889	78.200	37.989	PK
4			5725.000	74.828	36.838	-3.372	78.200	37.990	PK
5		*	5744.812	112.616	74.545	N/A	N/A	38.070	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11n-HT40 Ant 1+2	

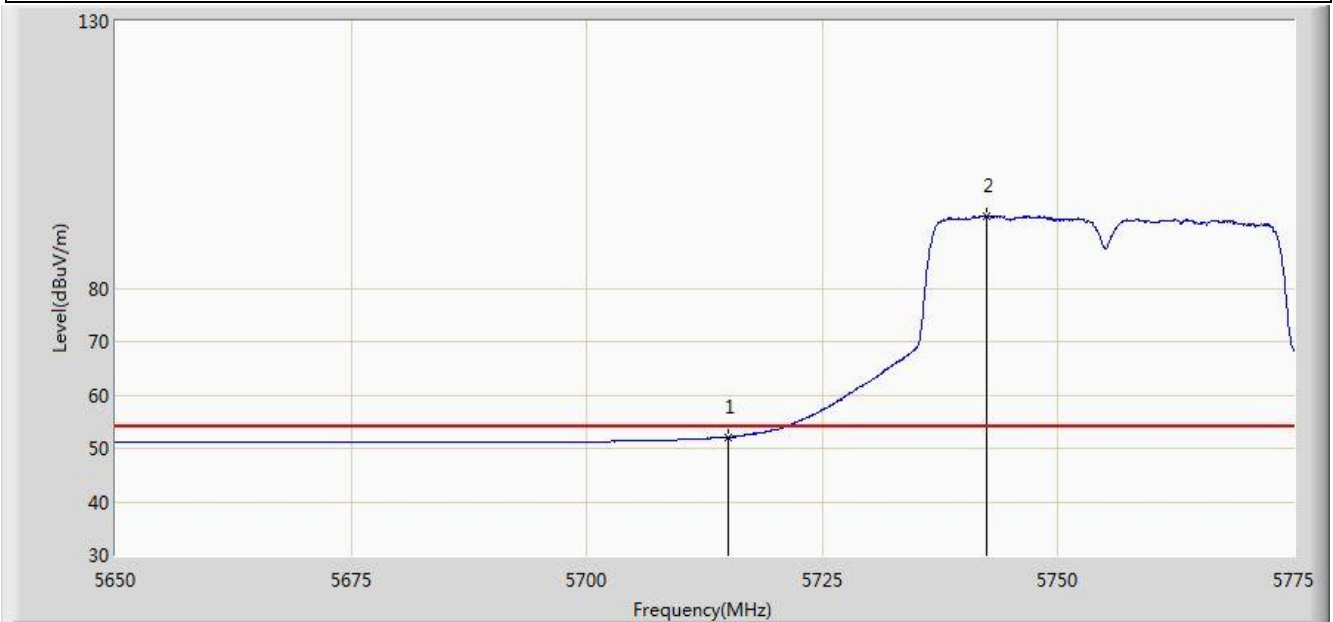


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.096	14.147	-1.904	54.000	37.949	AV
2		*	5742.437	93.533	55.473	N/A	N/A	38.060	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11n-HT40 Ant 1+2	

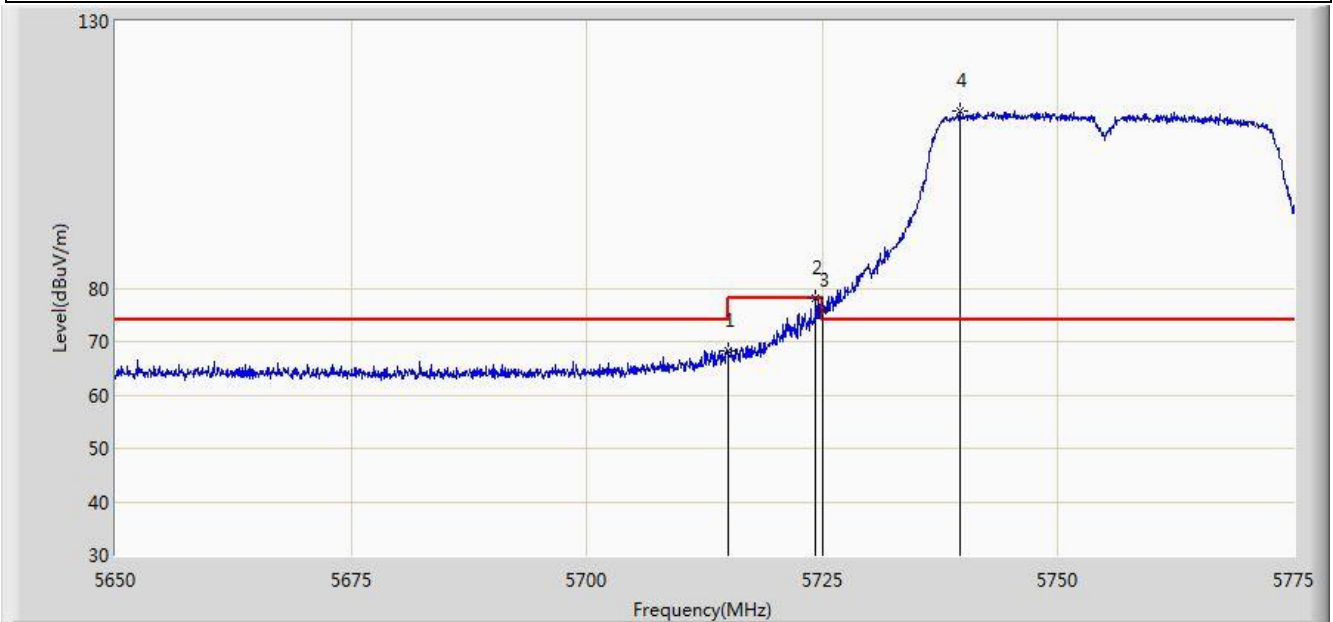


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	68.317	30.368	-5.683	74.000	37.949	PK
2			5724.312	78.006	40.019	-0.194	78.200	37.987	PK
3			5725.000	75.755	37.765	-2.445	78.200	37.990	PK
4		*	5739.562	113.288	75.239	N/A	N/A	38.049	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11n-HT40 Ant 1+2	

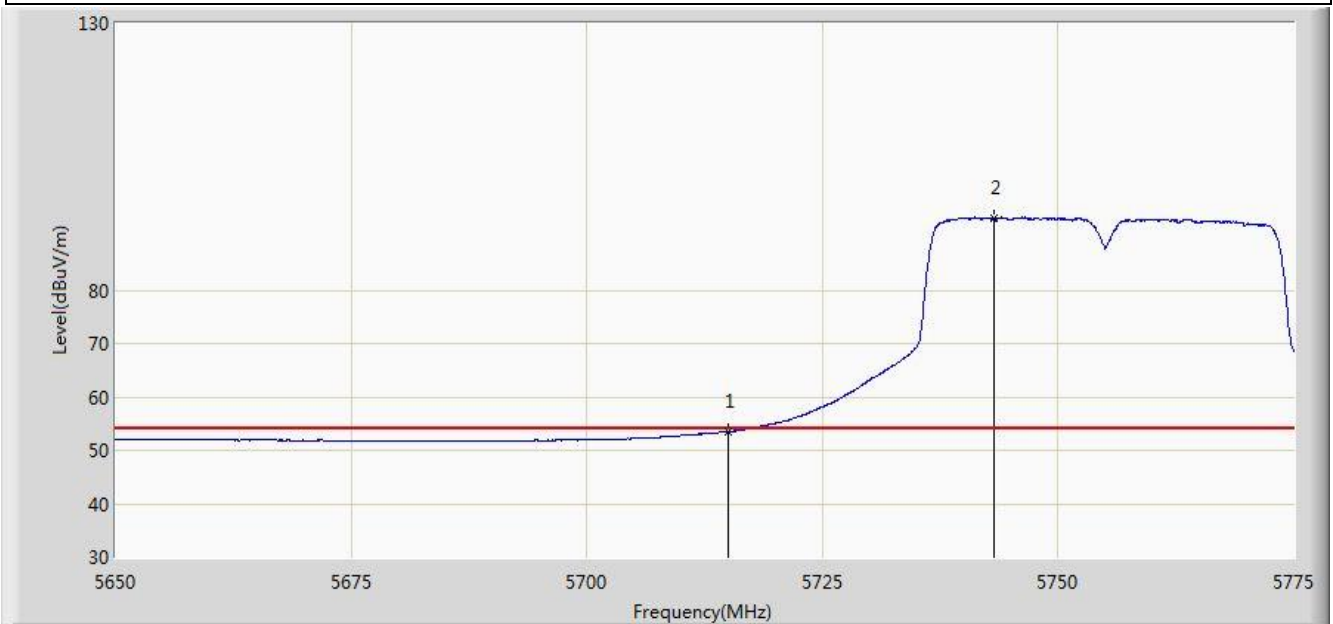


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.533	15.584	-0.467	54.000	37.949	AV
2		*	5743.250	93.590	55.527	N/A	N/A	38.063	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/05 - 16:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11n-HT40 Ant 1+2	

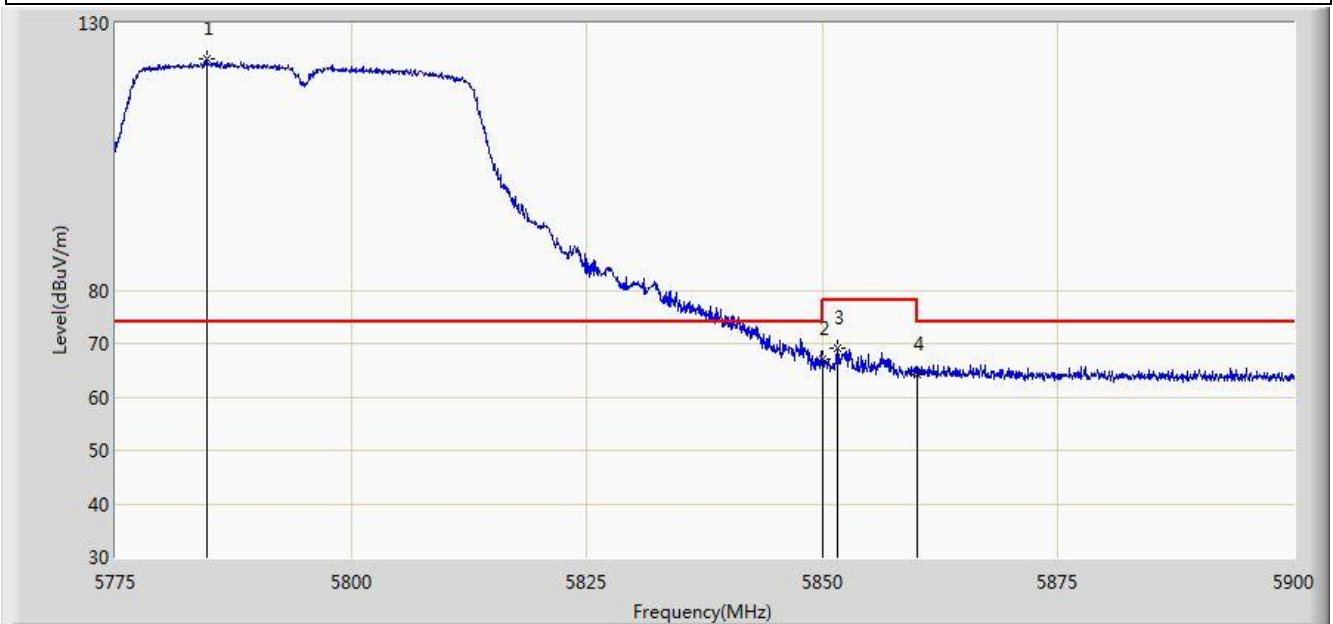


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5784.750	123.314	85.102	N/A	N/A	38.211	PK
2			5850.000	67.095	28.642	-11.105	78.200	38.454	PK
3			5851.625	69.001	30.544	-9.199	78.200	38.457	PK
4			5860.000	64.344	25.866	-9.656	74.000	38.478	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
a	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11n-HT40 Ant 1+2	

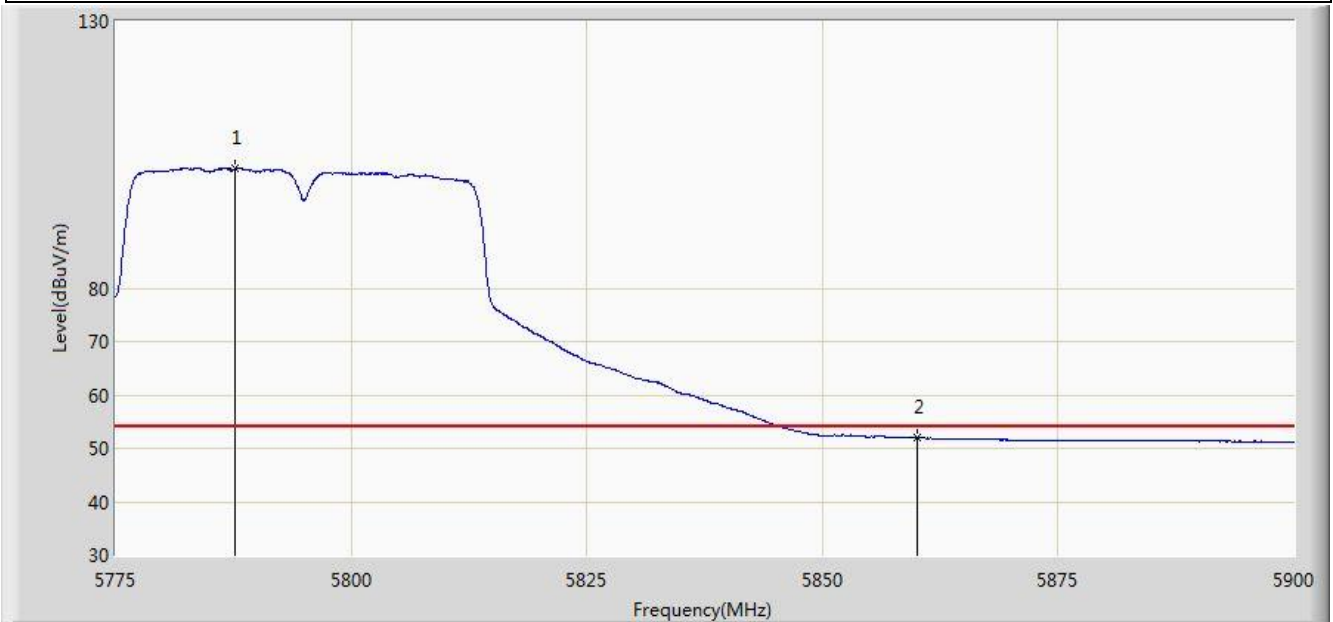


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5787.750	102.375	64.152	N/A	N/A	38.223	AV
2			5860.000	51.940	13.462	-2.060	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11n-HT40 Ant 1+2	

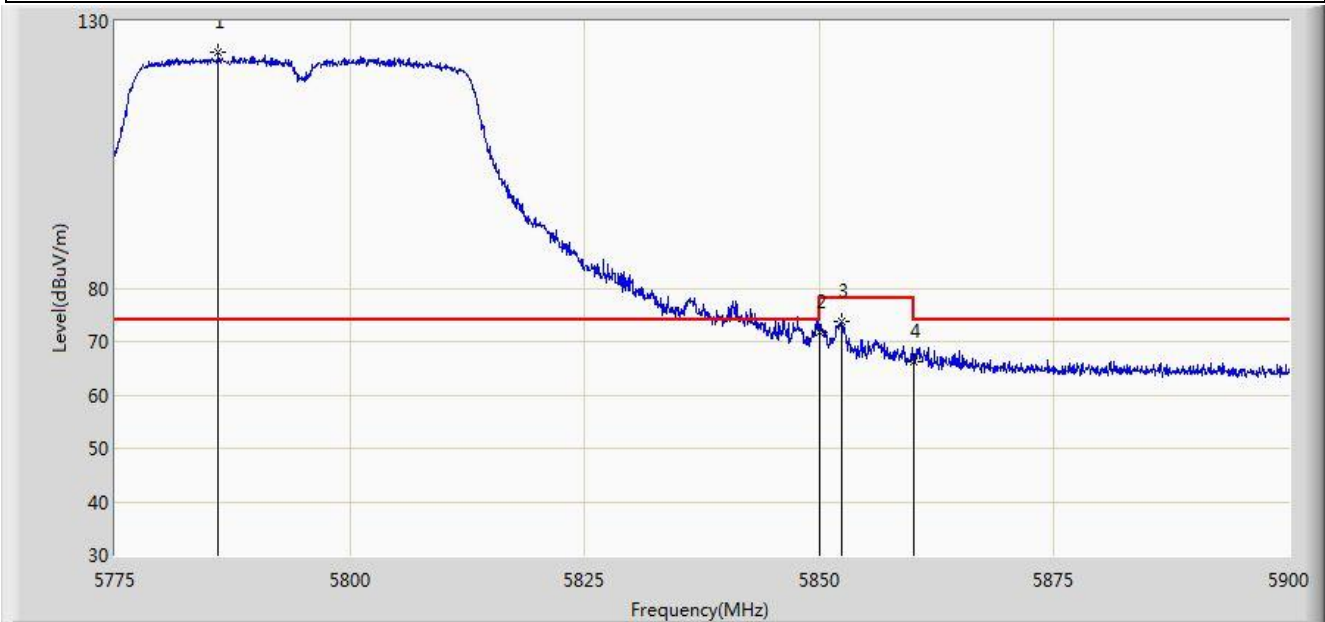


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5786.000	124.059	85.843	N/A	N/A	38.216	PK
2			5850.000	71.730	33.277	-6.470	78.200	38.454	PK
3			5852.437	73.850	35.391	-4.350	78.200	38.459	PK
4			5860.000	66.294	27.816	-7.706	74.000	38.478	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11n-HT40 Ant 1+2	

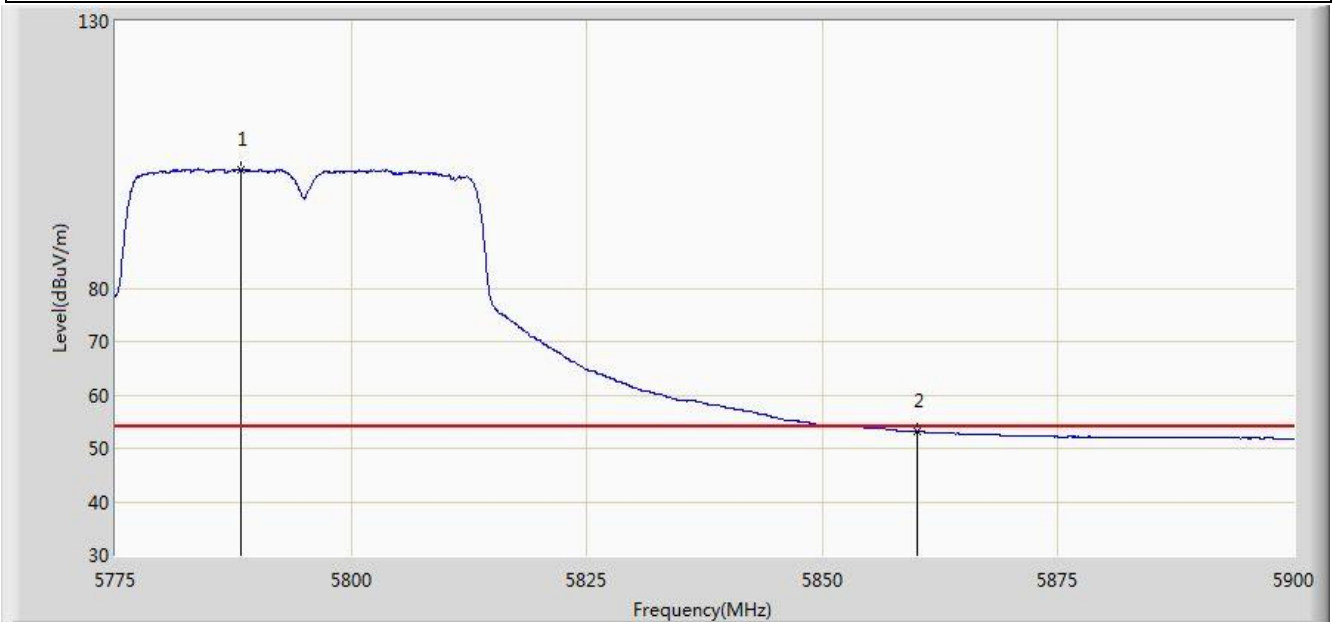


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5788.250	102.239	64.015	N/A	N/A	38.224	AV
2			5860.000	53.206	14.728	-0.794	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11ac-VHT20 Ant 1+2	

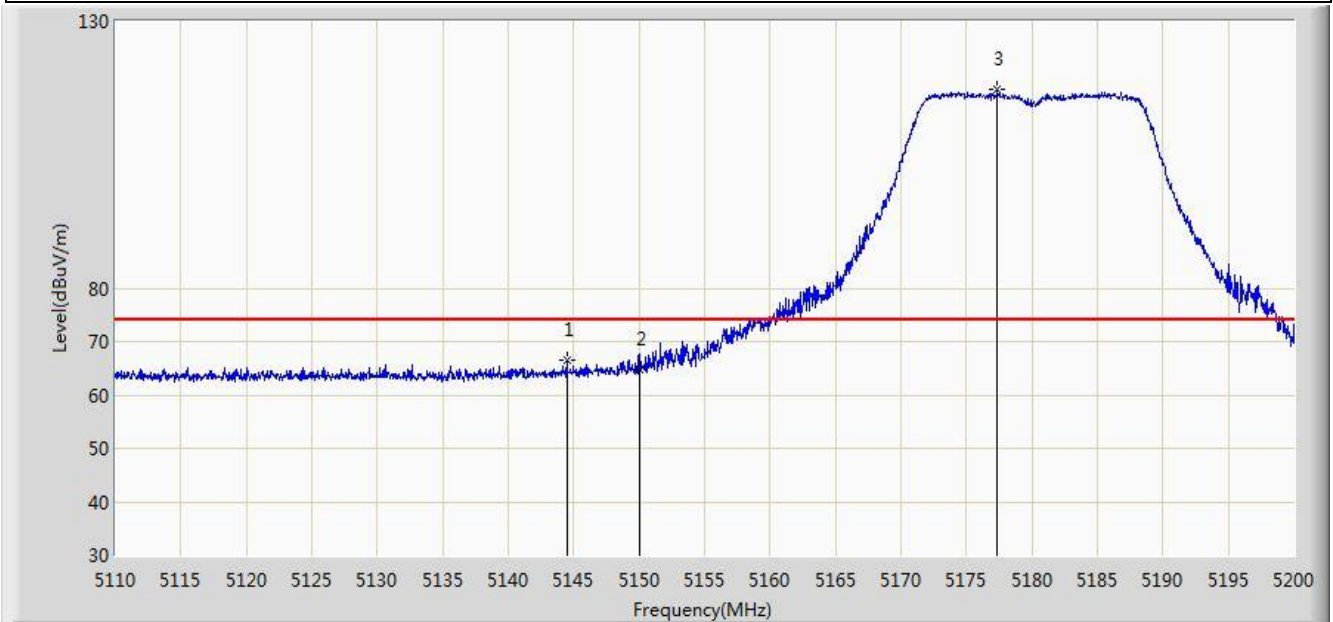


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.470	66.520	29.060	-7.480	74.000	37.461	PK
2			5150.000	64.821	27.369	-9.179	74.000	37.452	PK
3		*	5177.320	117.226	79.846	N/A	N/A	37.379	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11ac-VHT20 Ant 1+2	

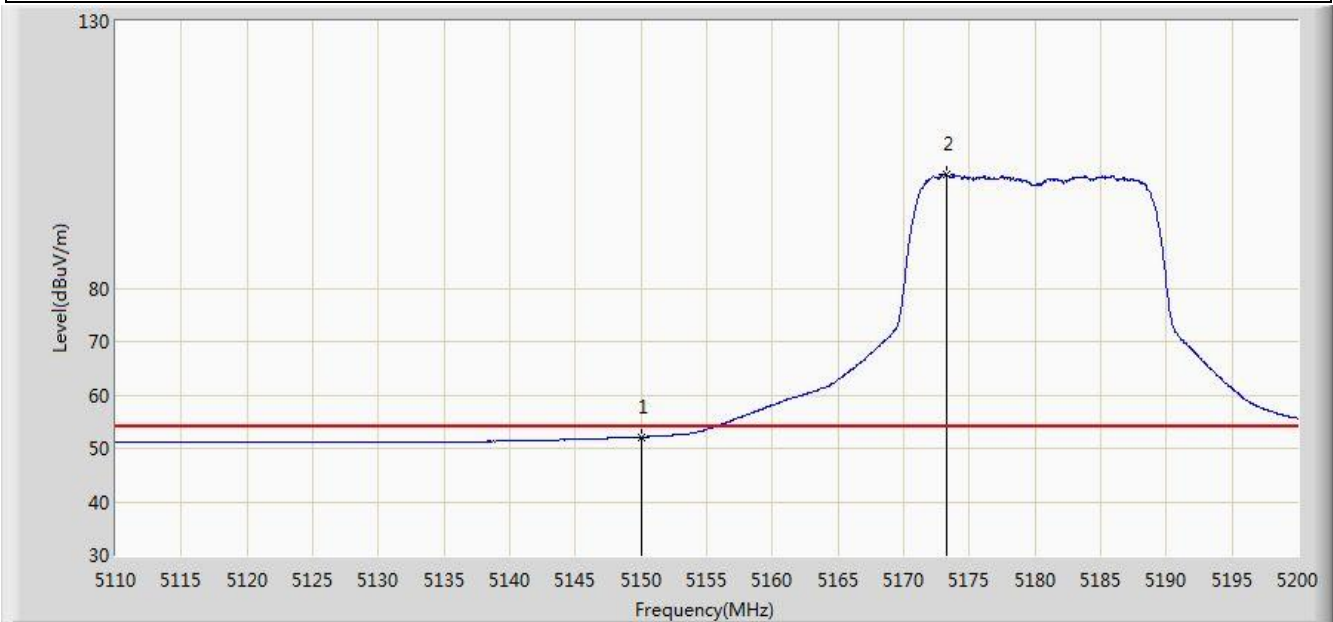


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.061	14.609	-1.939	54.000	37.452	AV
2		*	5173.225	101.382	63.993	N/A	N/A	37.389	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11ac-VHT20 Ant 1+2	

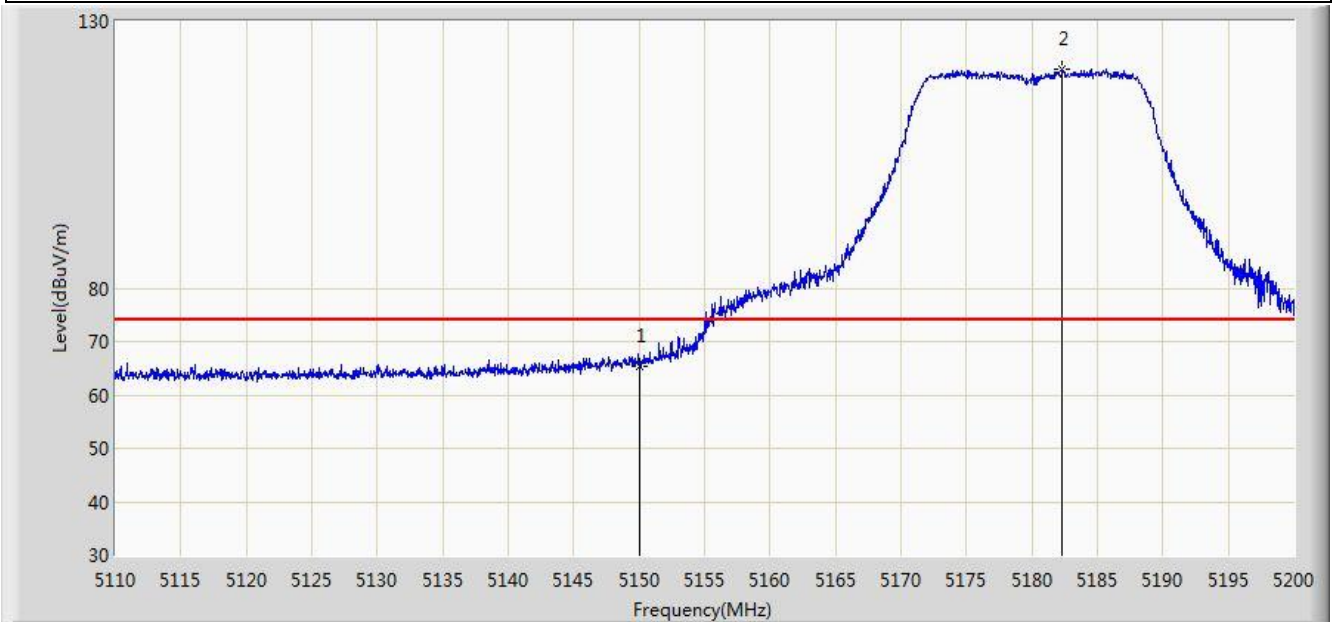

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	65.481	28.029	-8.519	74.000	37.452	PK
2		*	5182.315	120.966	83.598	N/A	N/A	37.368	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5180MHz by 802.11ac-VHT20 Ant 1+2	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.358	15.906	-0.642	54.000	37.452	AV
2		*	5178.625	103.781	66.404	N/A	N/A	37.377	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/05 - 16:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Note: Test Mode: Transmit at Channel 5745MHz by 802.11ac-VHT20 Ant 1+2	

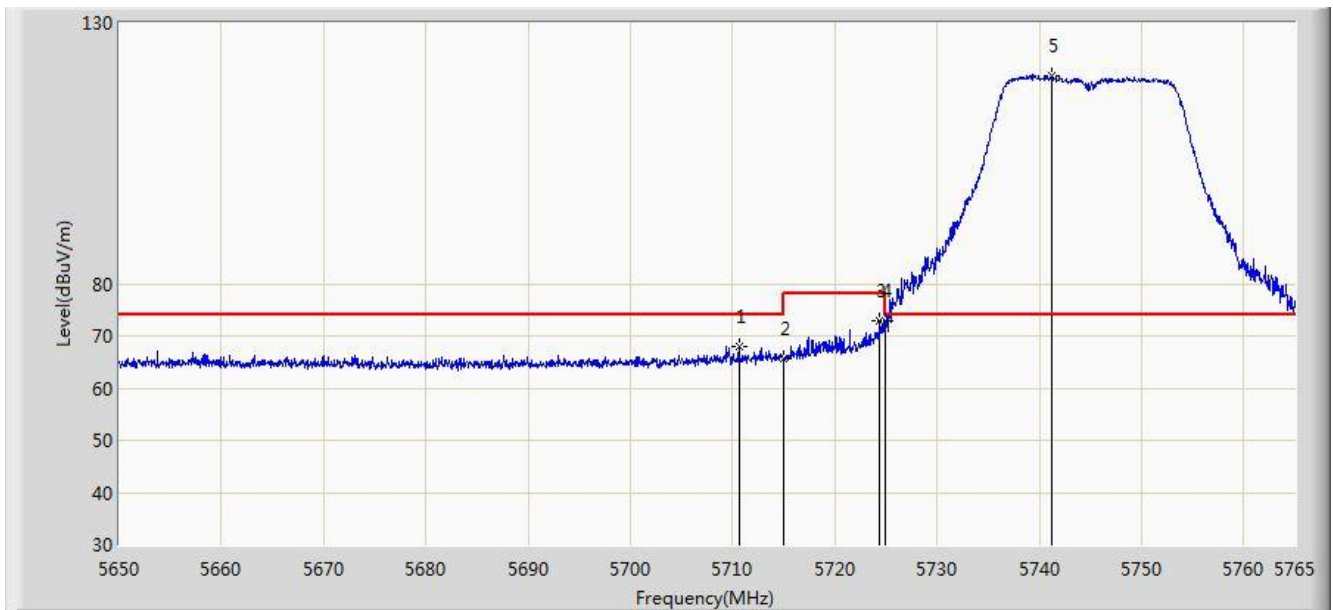


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5710.605	68.111	30.179	-5.889	74.000	37.931	PK
2			5715.000	65.511	27.562	-8.489	74.000	37.949	PK
3			5724.348	73.014	35.027	-5.186	78.200	37.987	PK
4			5725.000	72.854	34.864	-5.346	78.200	37.990	PK
5		*	5741.195	119.949	81.894	N/A	N/A	38.055	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11ac-VHT20 Ant 1+2	

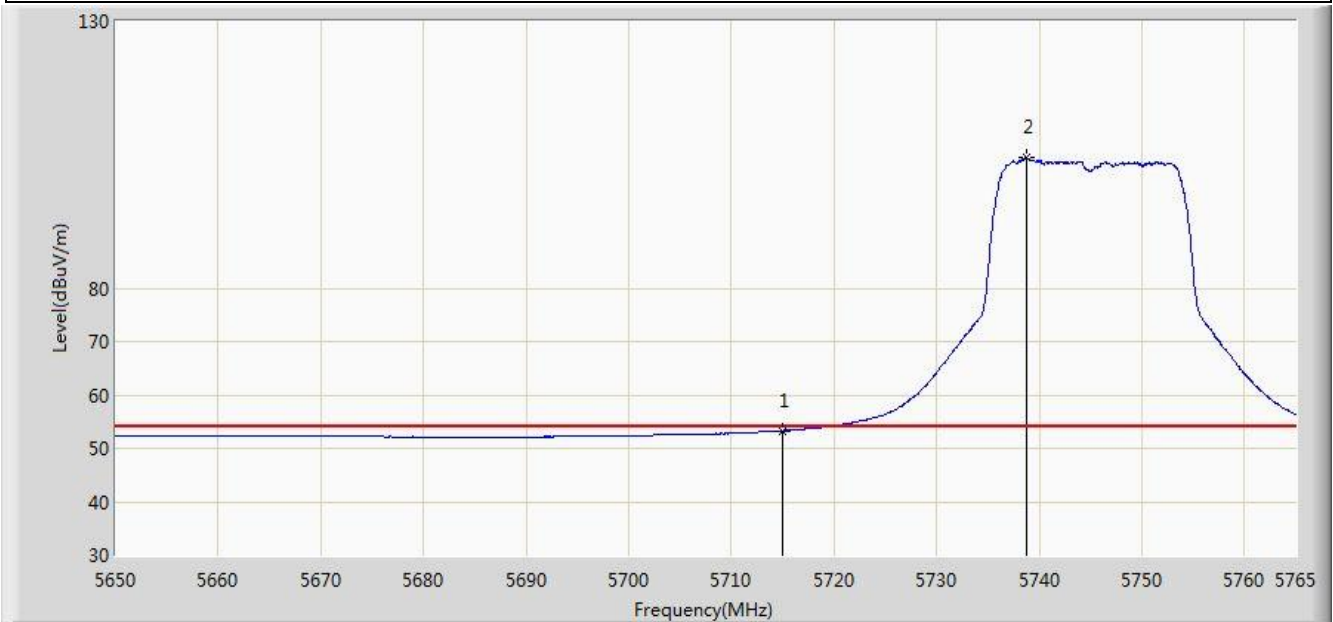


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.289	15.340	-0.711	54.000	37.949	AV
2		*	5738.723	104.383	66.337	N/A	N/A	38.046	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Note: Test Mode: Transmit at Channel 5745MHz by 802.11ac-VHT20 Ant 1+2	

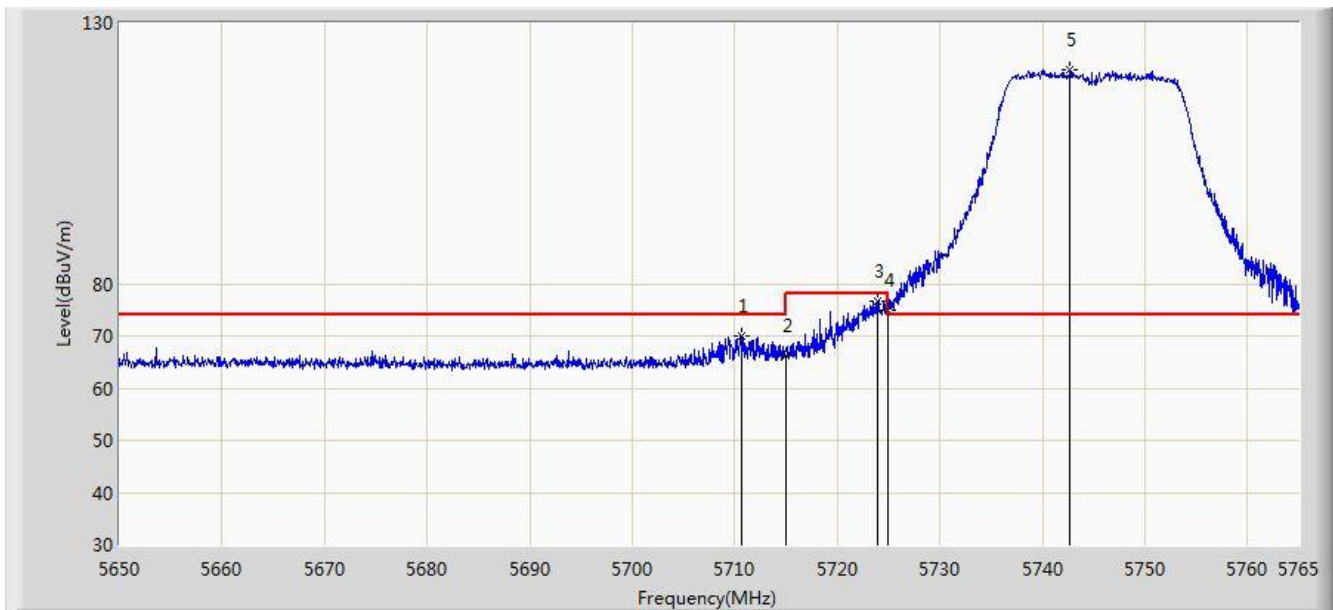


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5710.663	70.001	32.069	-3.999	74.000	37.931	PK
2			5715.000	66.233	28.284	-7.767	74.000	37.949	PK
3			5723.945	76.733	38.748	-1.467	78.200	37.986	PK
4			5725.000	75.000	37.010	-3.200	78.200	37.990	PK
5		*	5742.690	121.028	82.967	N/A	N/A	38.061	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 16:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5745MHz by 802.11ac-VHT20 Ant 1+2	

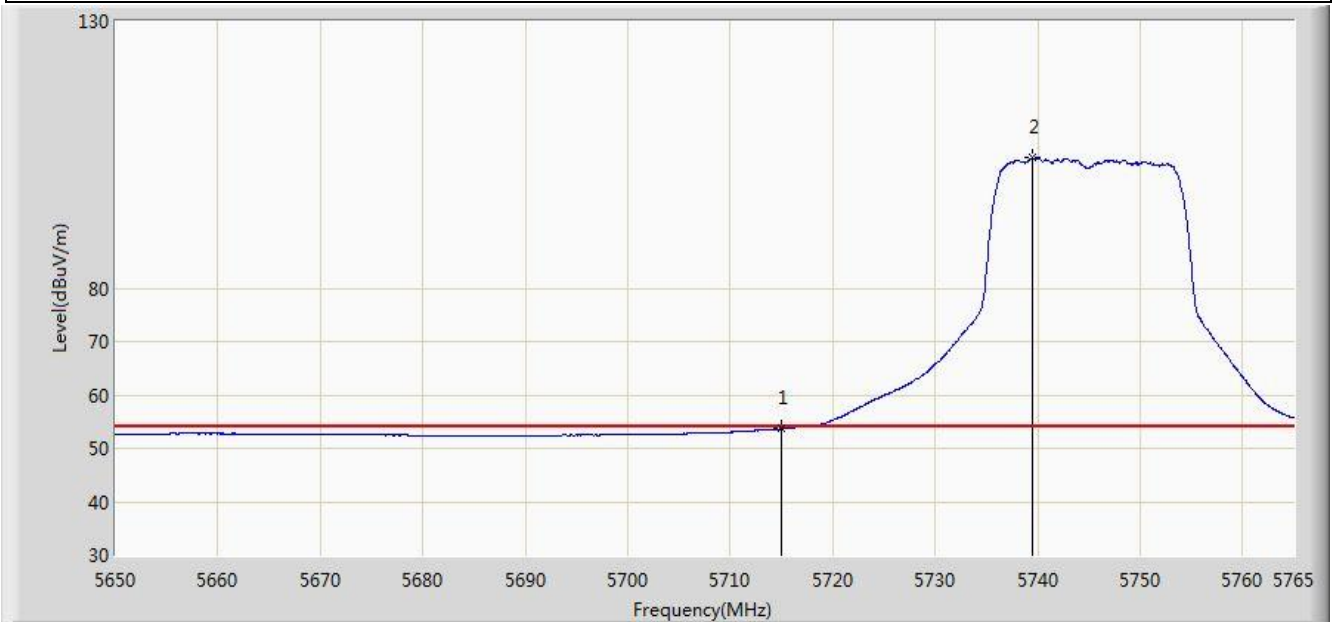


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.639	15.690	-0.361	54.000	37.949	AV
2		*	5739.527	104.425	66.376	N/A	N/A	38.049	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11ac-VHT20 Ant 1+2	

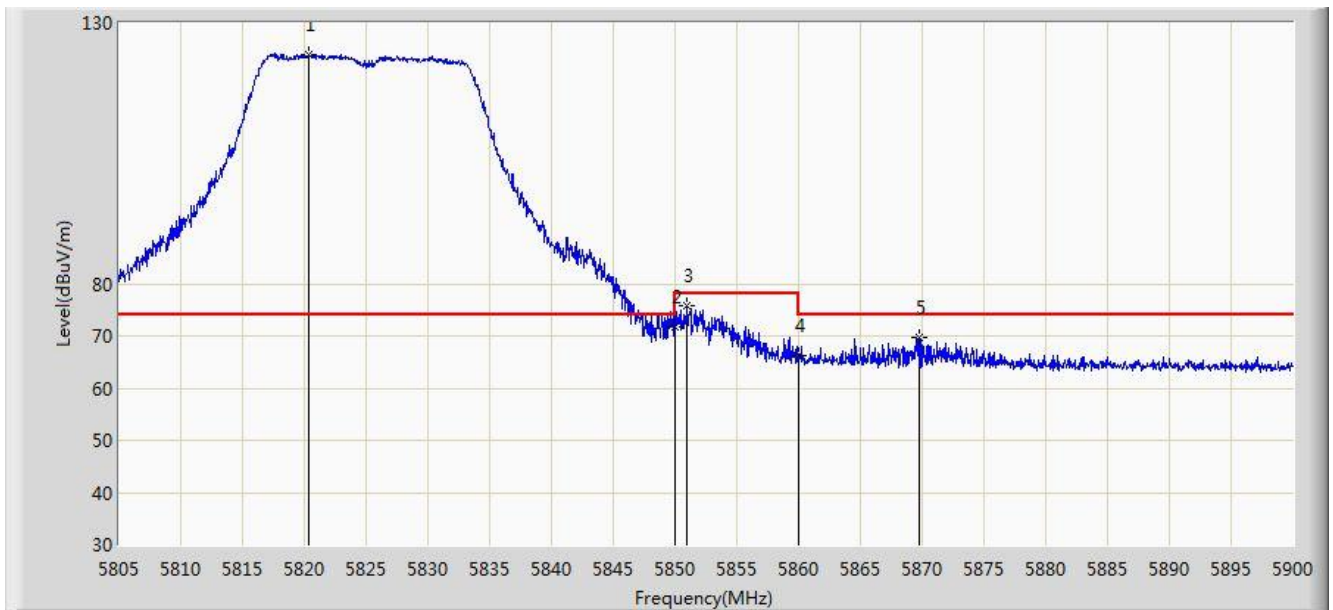


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.390	123.986	85.650	N/A	N/A	38.336	PK
2			5850.000	71.727	33.274	-6.473	78.200	38.454	PK
3			5850.980	75.762	37.306	-2.438	78.200	38.455	PK
4			5860.000	66.240	27.762	-7.760	74.000	38.478	PK
5			5869.790	69.649	31.158	-4.351	74.000	38.491	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11ac-VHT20 Ant 1+2	

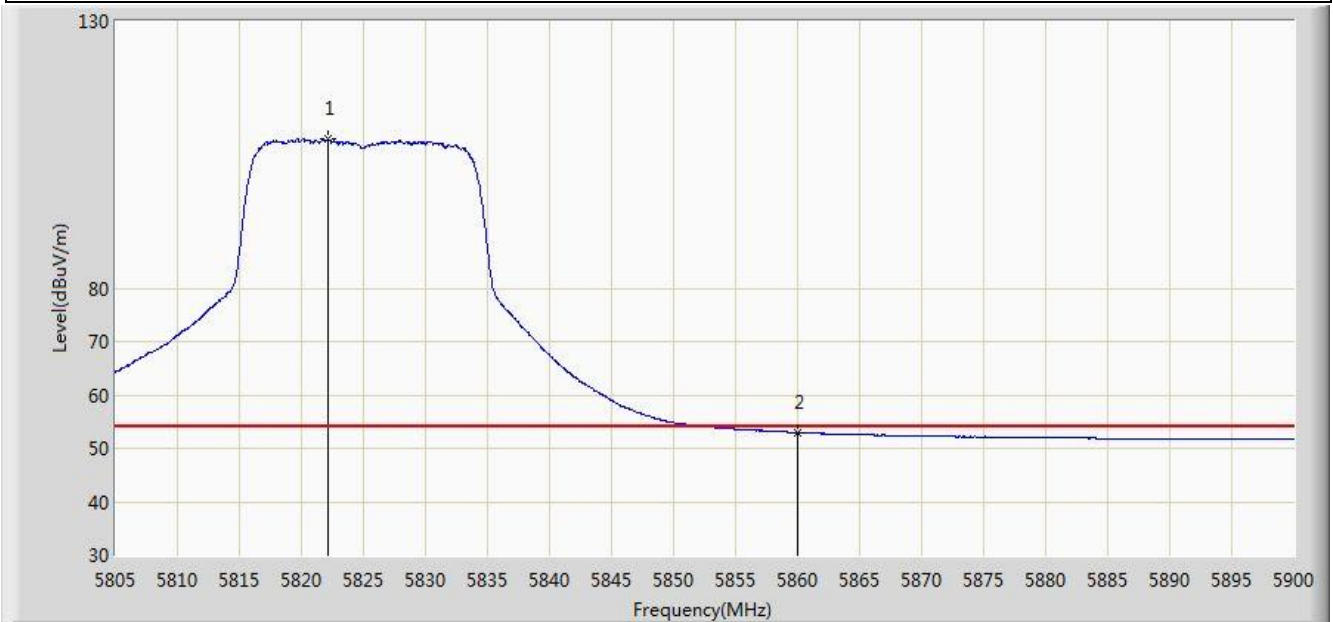


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5822.100	107.864	69.520	N/A	N/A	38.343	AV
2			5860.000	52.935	14.457	-1.065	54.000	38.478	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11ac-VHT20 Ant 1+2	

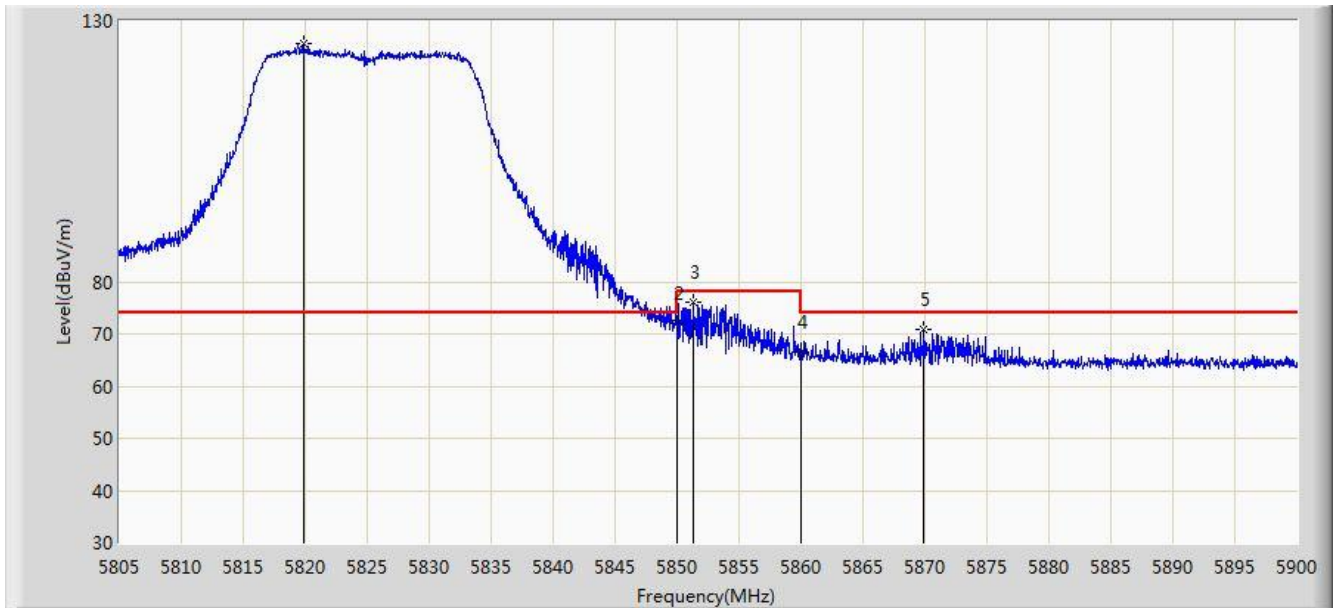


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.868	125.522	87.188	N/A	N/A	38.335	PK
2			5850.000	71.893	33.440	-6.307	78.200	38.454	PK
3			5851.265	75.994	37.538	-2.206	78.200	38.456	PK
4			5860.000	66.590	28.112	-7.410	74.000	38.478	PK
5			5869.933	70.799	32.308	-3.201	74.000	38.491	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5825MHz by 802.11ac-VHT20 Ant 1+2	

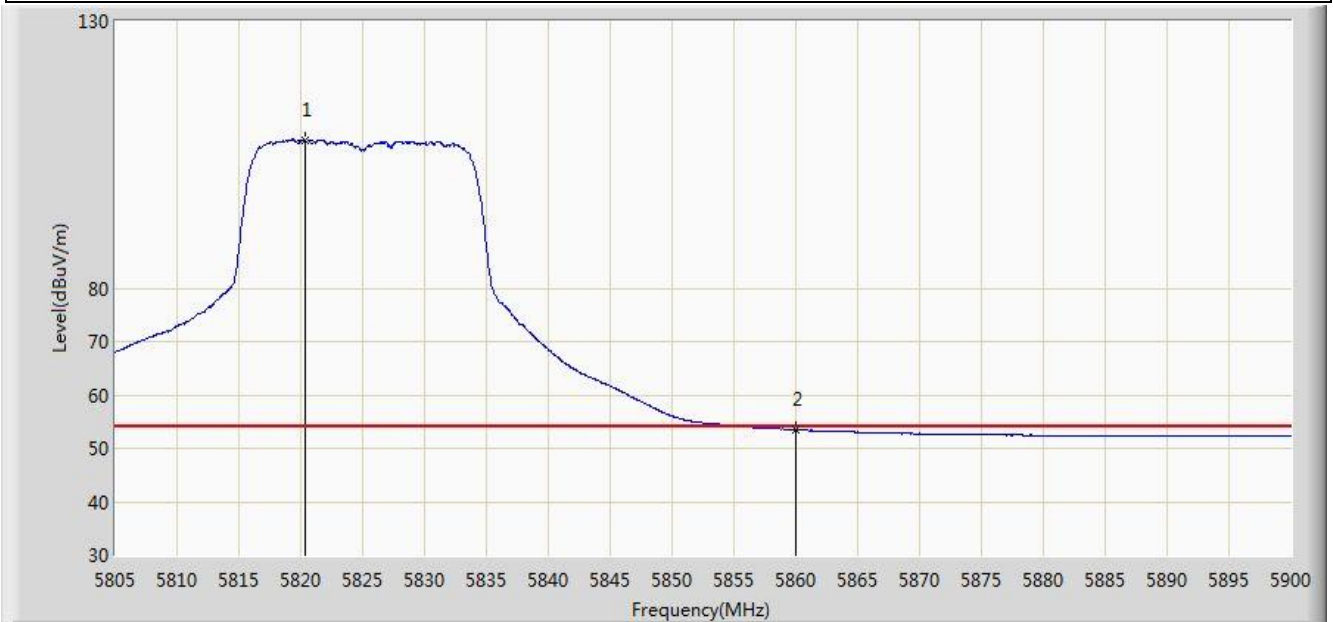


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.342	107.807	69.471	N/A	N/A	38.336	AV
2			5860.000	53.425	14.947	-0.575	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/05 - 17:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11ac-VHT40 Ant 1+2	

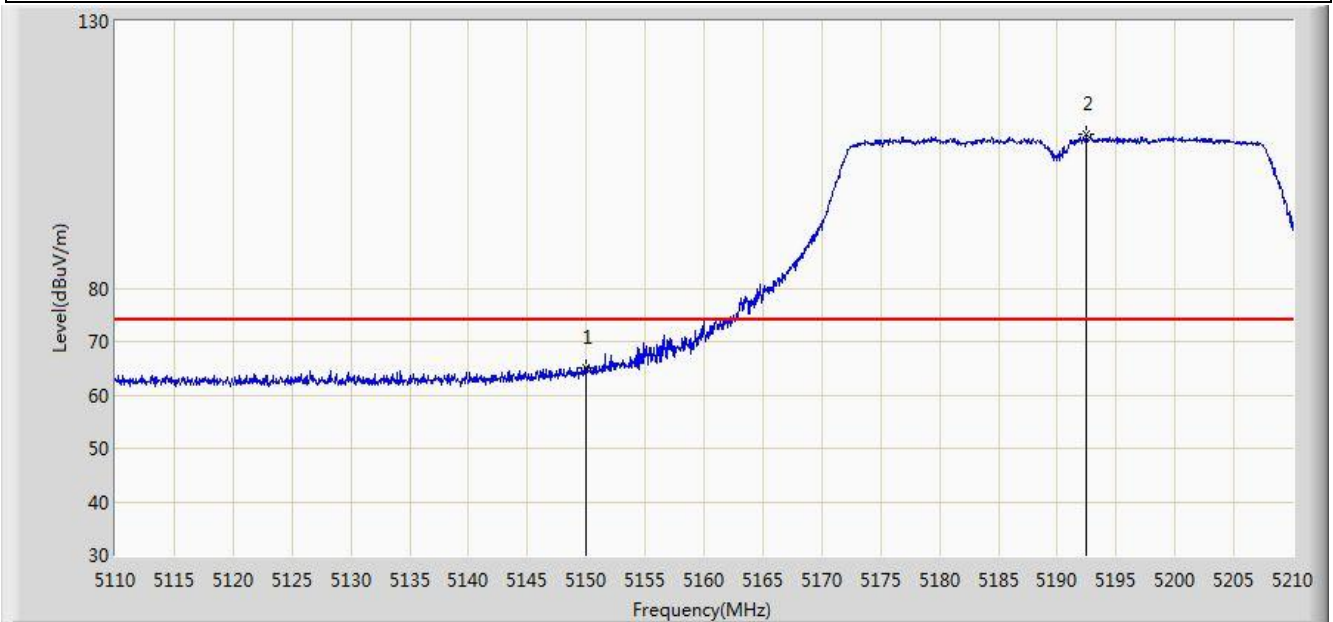


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	65.198	27.746	-8.802	74.000	37.452	PK
2		*	5192.450	108.750	71.407	N/A	N/A	37.343	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11ac-VHT40 Ant 1+2	

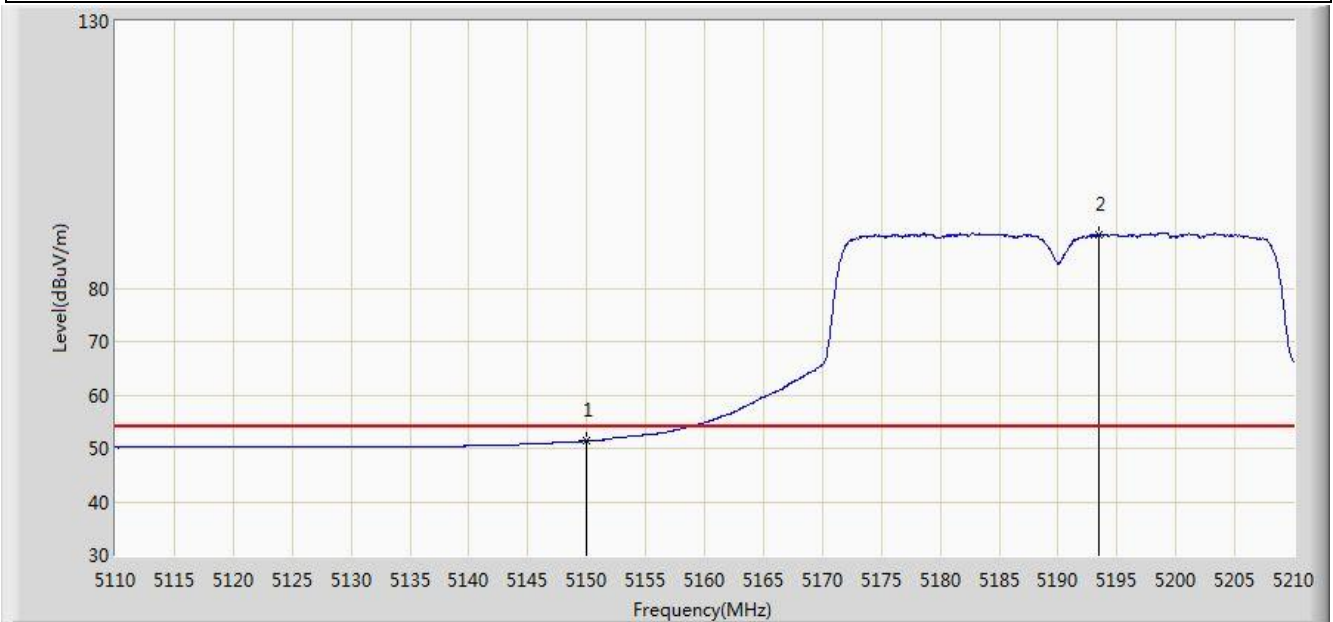


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.356	13.904	-2.644	54.000	37.452	AV
2		*	5193.400	90.109	52.768	N/A	N/A	37.341	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11ac-VHT40 Ant 1+2	

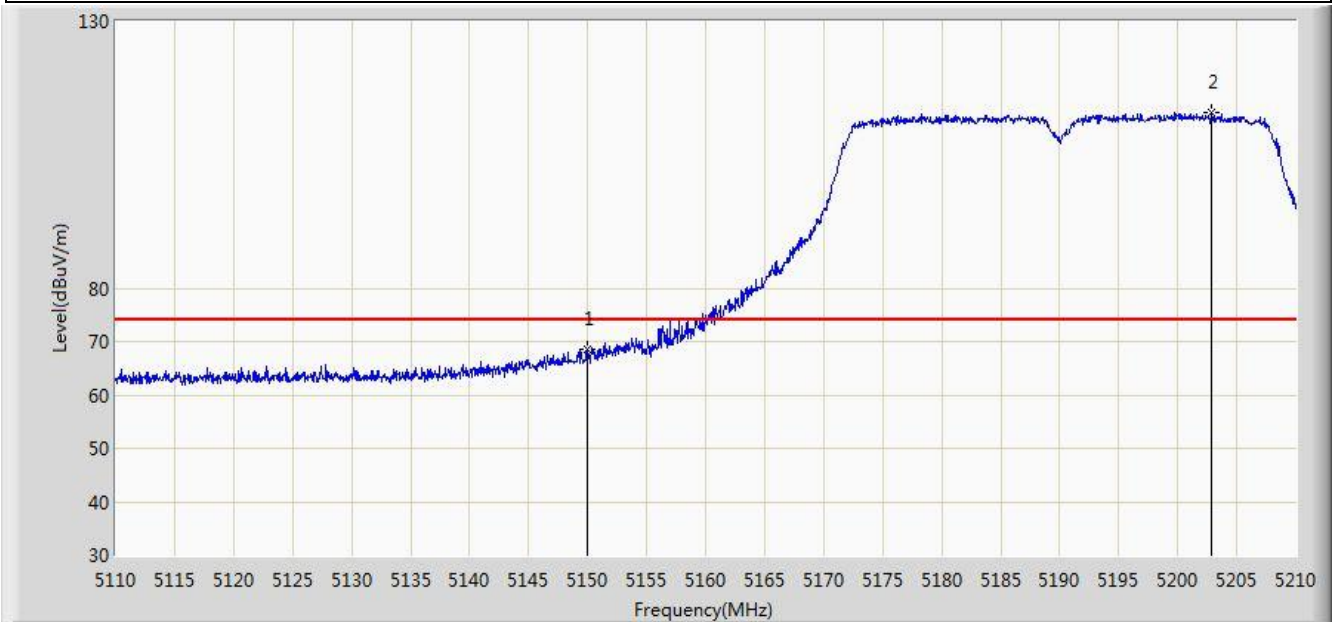


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	68.436	30.984	-5.564	74.000	37.452	PK
2		*	5202.900	112.766	75.452	N/A	N/A	37.314	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5190MHz by 802.11ac-VHT40 Ant 1+2	

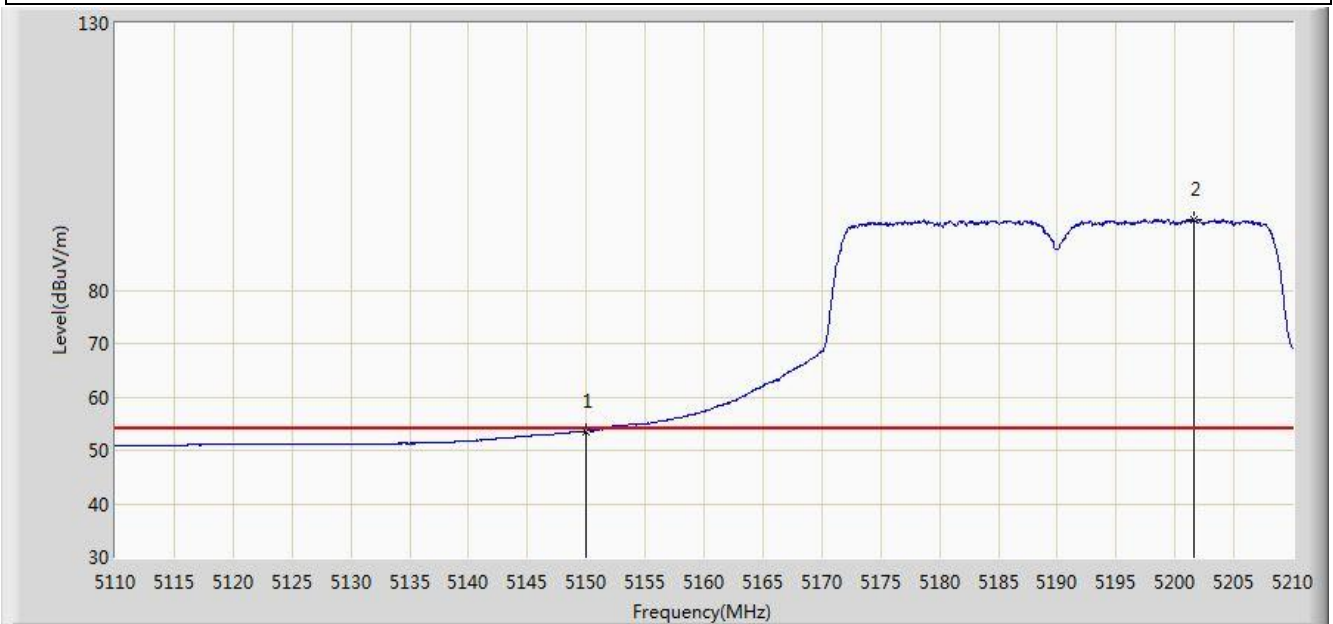


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.579	16.127	-0.421	54.000	37.452	AV
2		*	5201.600	93.214	55.895	N/A	N/A	37.318	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11ac-VHT40 Ant 1+2	

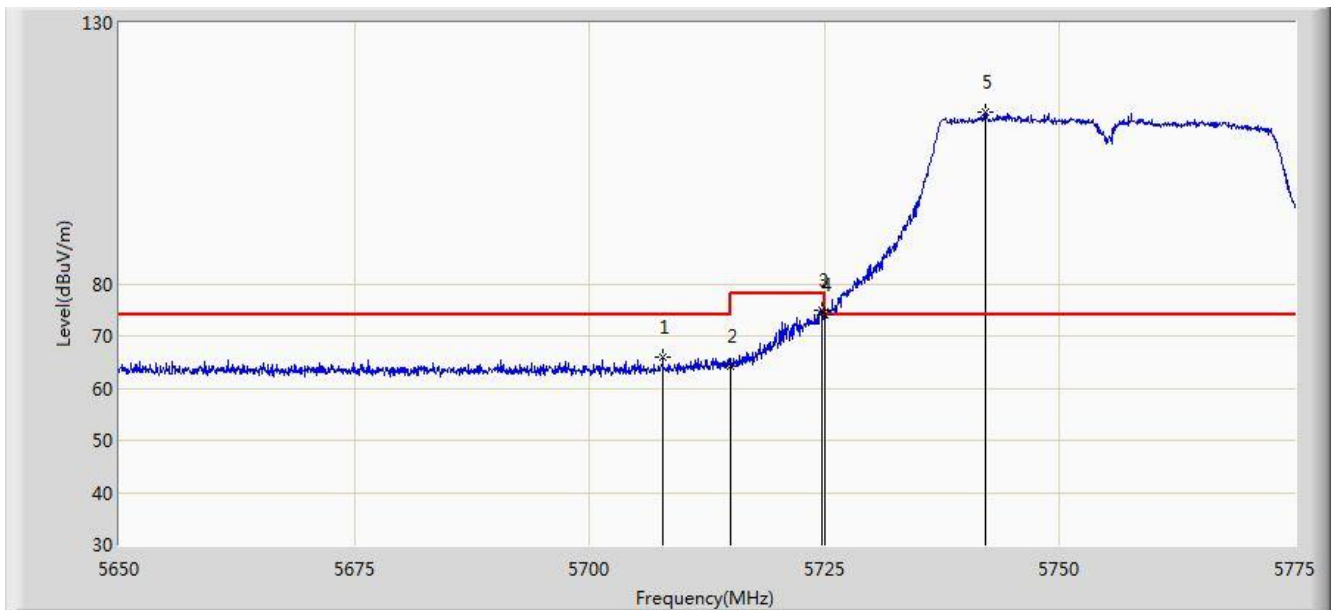


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5707.812	65.971	28.051	-8.029	74.000	37.920	PK
2			5715.000	64.253	26.304	-9.747	74.000	37.949	PK
3			5724.687	75.063	37.075	-3.137	78.200	37.989	PK
4			5725.000	74.170	36.180	-4.030	78.200	37.990	PK
5		*	5742.125	112.862	74.803	N/A	N/A	38.059	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11ac-VHT40 Ant 1+2	

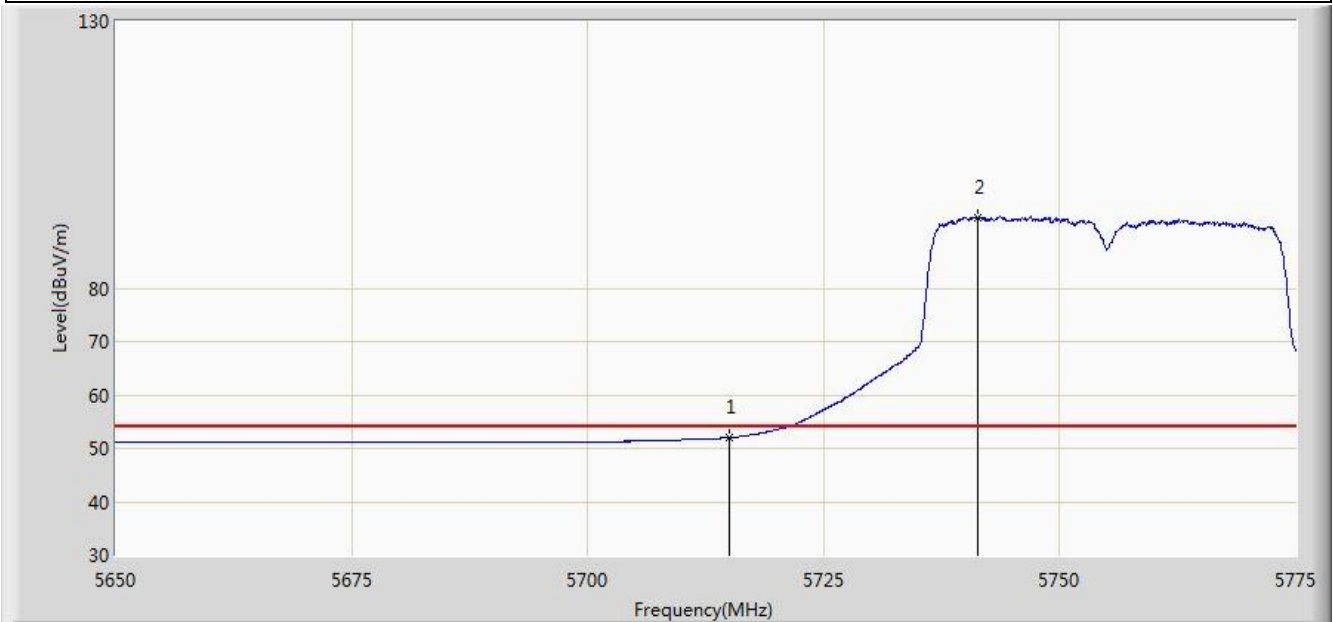


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.073	14.124	-1.927	54.000	37.949	AV
2		*	5741.312	93.260	55.204	N/A	N/A	38.056	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11ac-VHT40 Ant 1+2	

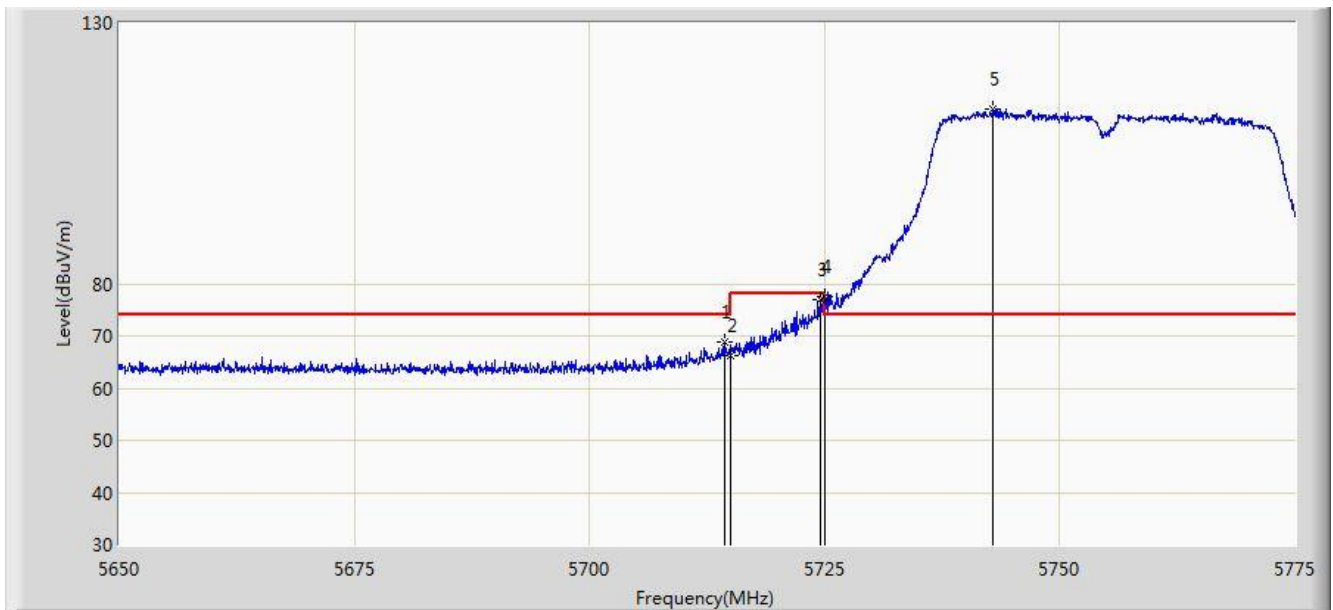


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.437	68.716	30.769	-5.284	74.000	37.947	PK
2			5715.000	66.241	28.292	-7.759	74.000	37.949	PK
3			5724.625	76.960	38.972	-1.240	78.200	37.988	PK
4			5725.000	77.459	39.469	-0.741	78.200	37.990	PK
5		*	5742.937	113.620	75.558	N/A	N/A	38.062	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5755MHz by 802.11ac-VHT40 Ant 1+2	

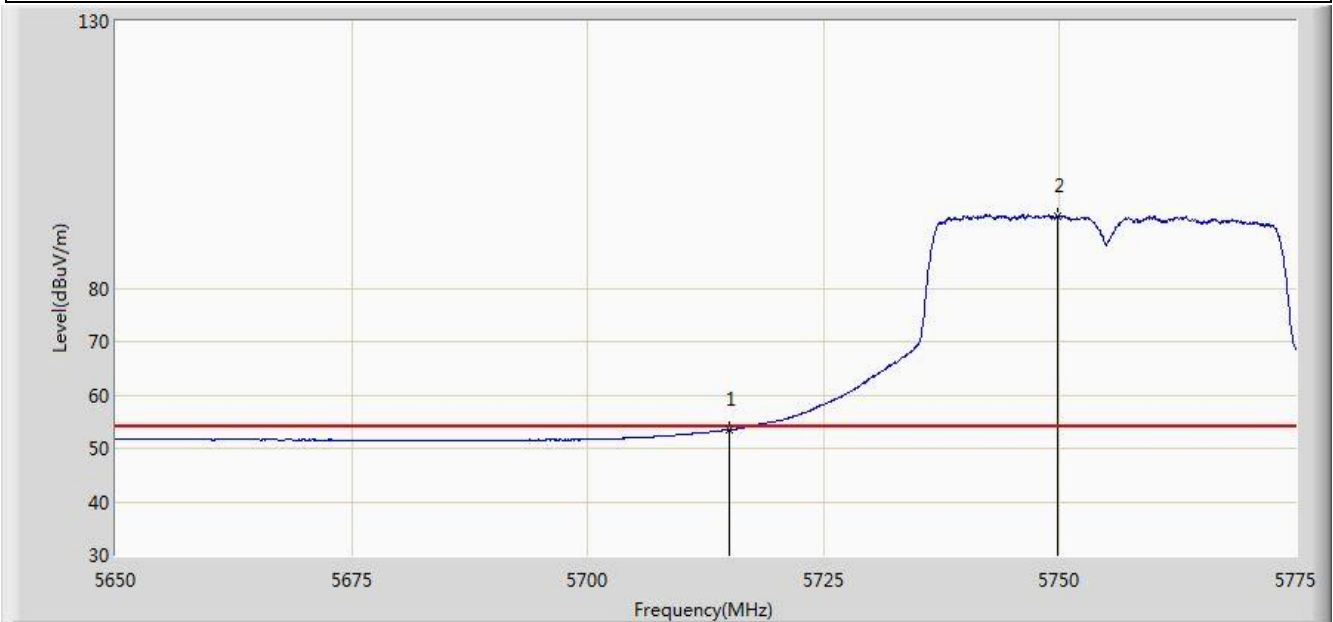


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.475	15.526	-0.525	54.000	37.949	AV
2		*	5749.750	93.540	55.445	N/A	N/A	38.094	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/05 - 17:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11ac-VHT40 Ant 1+2	

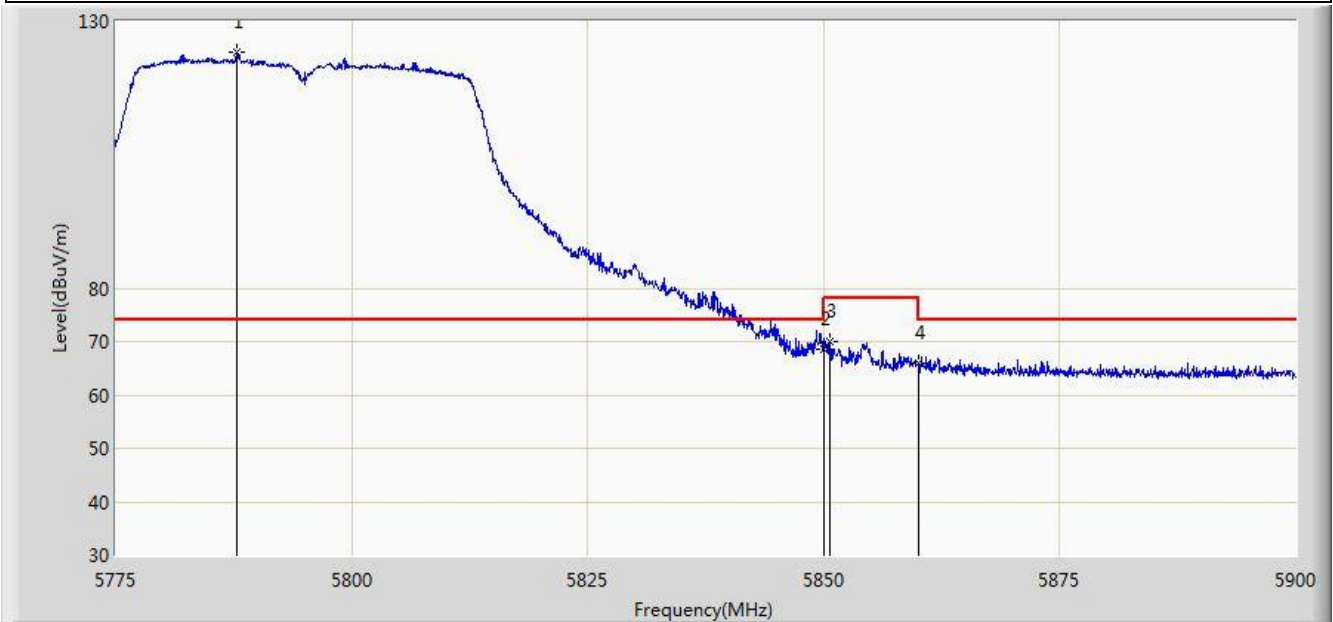


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5787.812	124.111	85.888	N/A	N/A	38.223	PK
2			5850.000	68.650	30.197	-9.550	78.200	38.454	PK
3			5850.625	70.062	31.607	-8.138	78.200	38.455	PK
4			5860.000	66.065	27.587	-7.935	74.000	38.478	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11ac-VHT40 Ant 1+2	

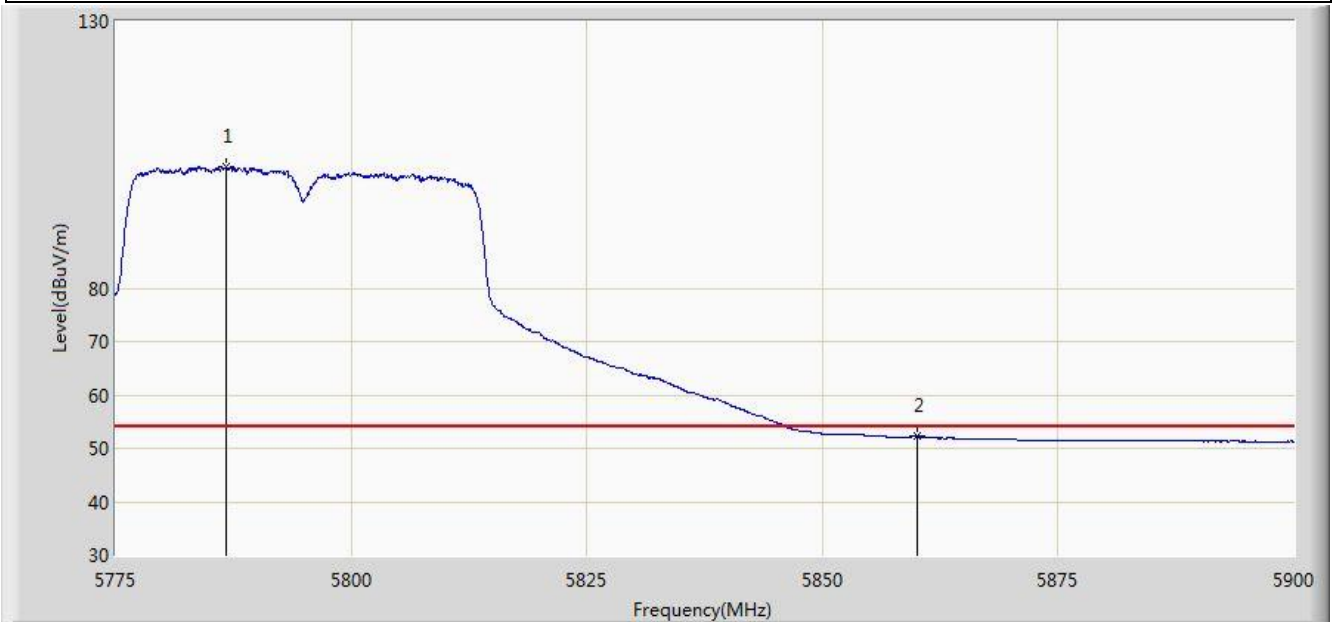


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5786.812	102.741	64.522	N/A	N/A	38.219	AV
2			5860.000	52.250	13.772	-1.750	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11ac-VHT40 Ant 1+2	

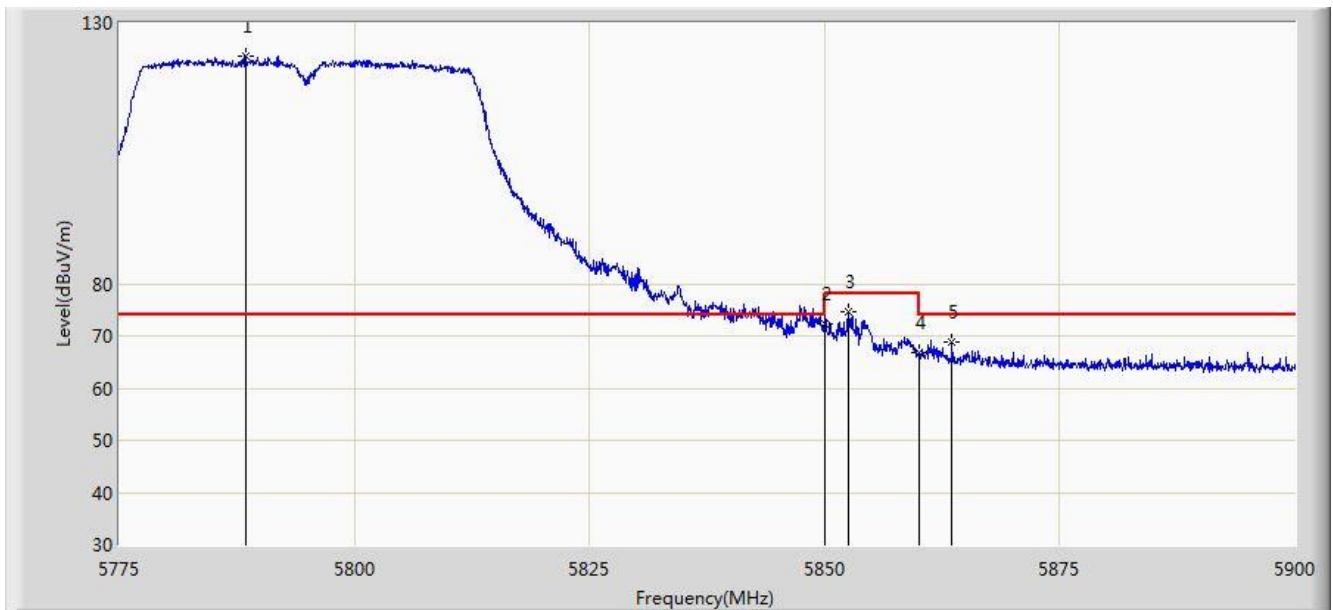


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5788.437	123.651	85.426	N/A	N/A	38.225	PK
2			5850.000	72.339	33.886	-5.861	78.200	38.454	PK
3			5852.500	74.496	36.037	-3.704	78.200	38.459	PK
4			5860.000	66.757	28.279	-7.243	74.000	38.478	PK
5			5863.562	68.715	30.231	-5.285	74.000	38.484	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5795MHz by 802.11ac-VHT40 Ant 1+2	

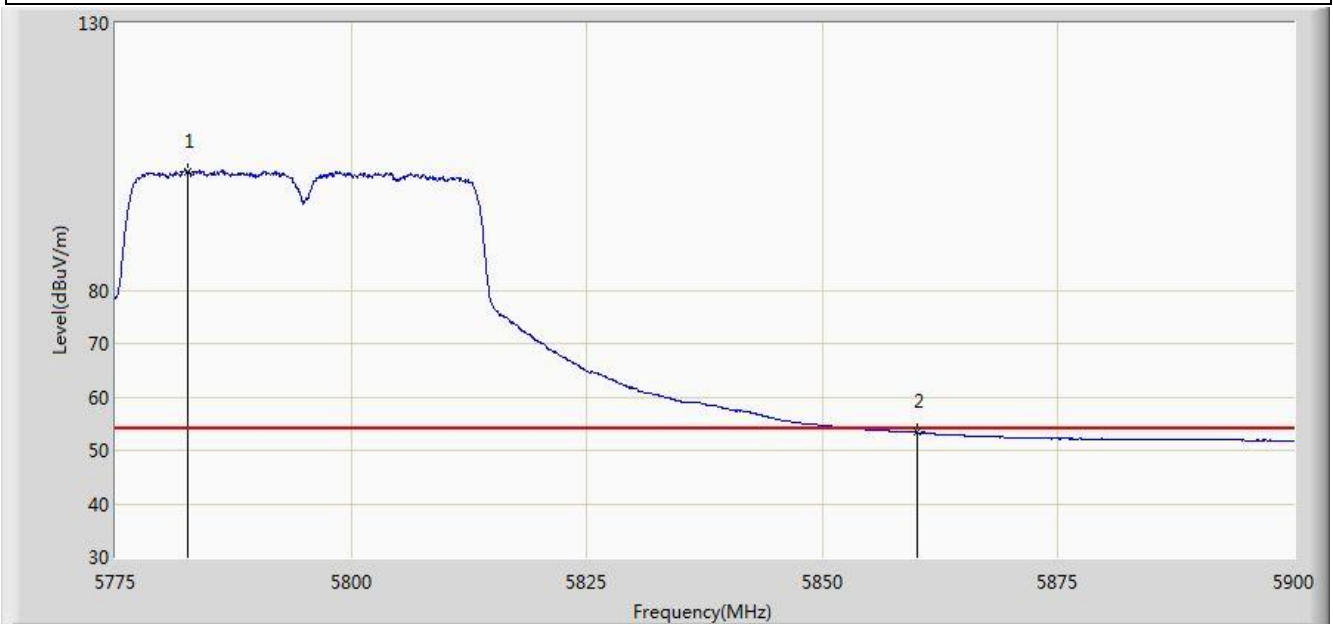


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5782.687	102.267	64.063	N/A	N/A	38.204	AV
2			5860.000	53.361	14.883	-0.639	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5210MHz by 802.11ac-VHT80 Ant 1+2	

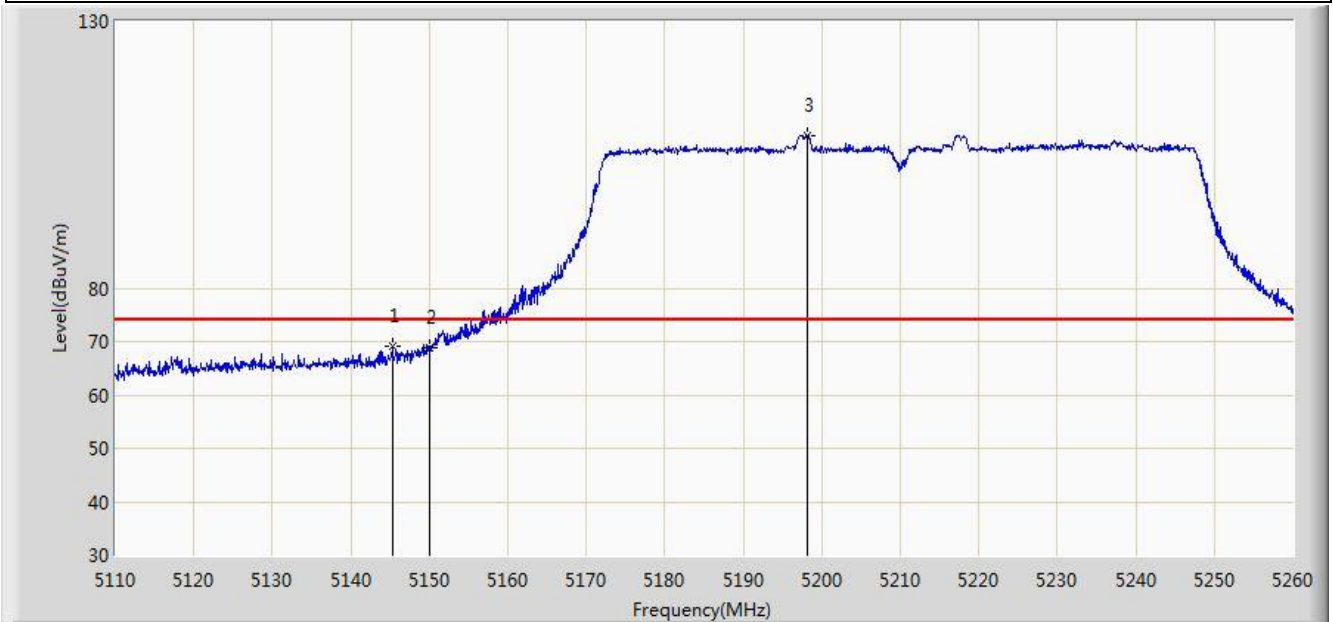


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.250	69.217	31.758	-4.783	74.000	37.459	PK
2			5150.000	68.822	31.370	-5.178	74.000	37.452	PK
3		*	5198.125	108.681	71.351	N/A	N/A	37.330	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5210MHz by 802.11ac-VHT80 Ant 1+2	

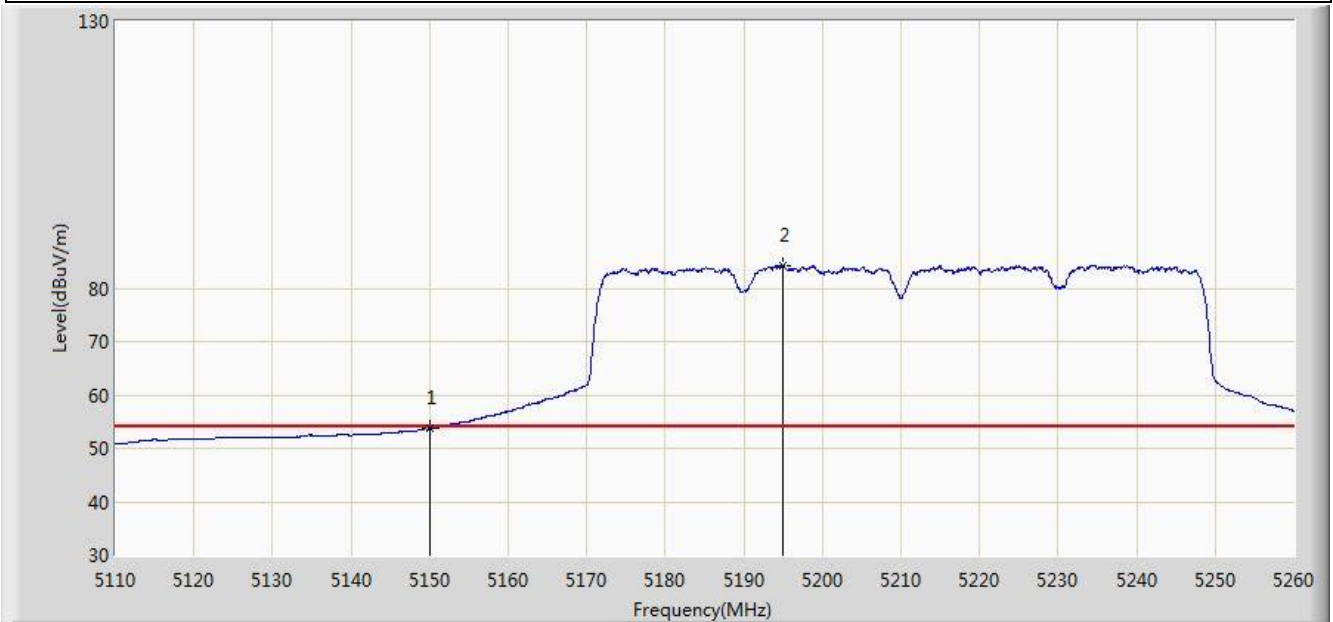


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.647	16.195	-0.353	54.000	37.452	AV
2		*	5194.900	84.234	46.897	N/A	N/A	37.337	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5210MHz by 802.11ac-VHT80 Ant 1+2	

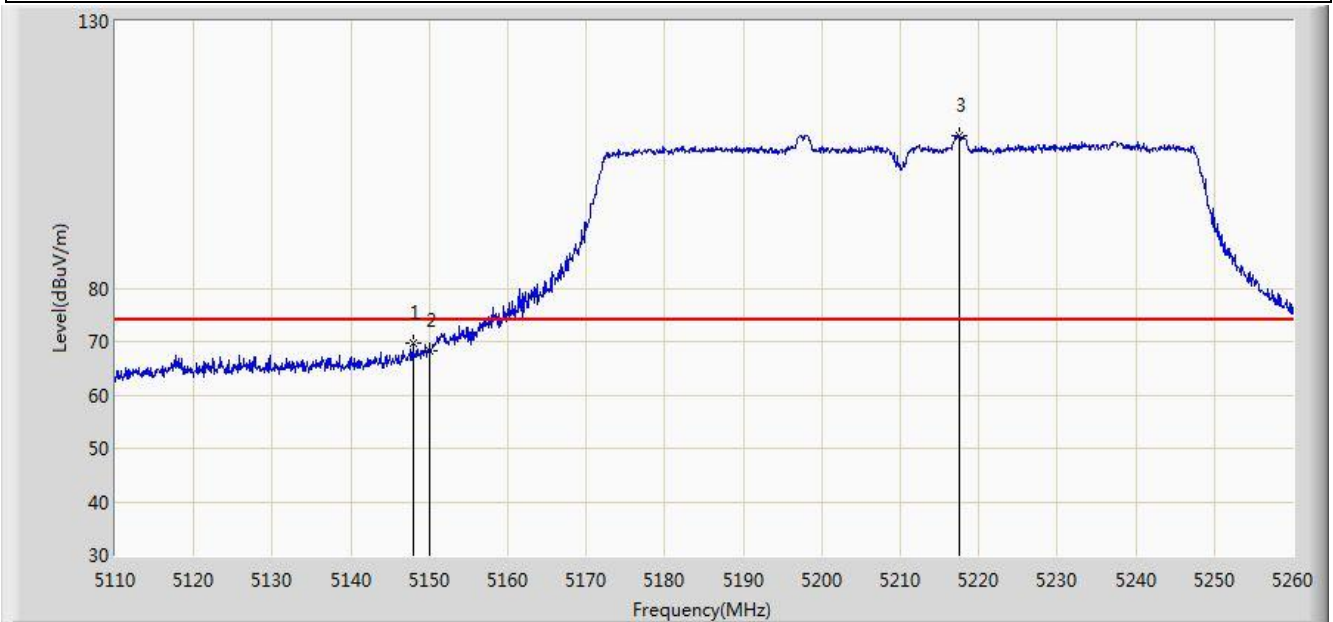


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.950	69.630	32.175	-4.370	74.000	37.455	PK
2			5150.000	68.372	30.920	-5.628	74.000	37.452	PK
3		*	5217.475	108.451	71.183	N/A	N/A	37.268	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5210MHz by 802.11ac-VHT80 Ant 1+2	

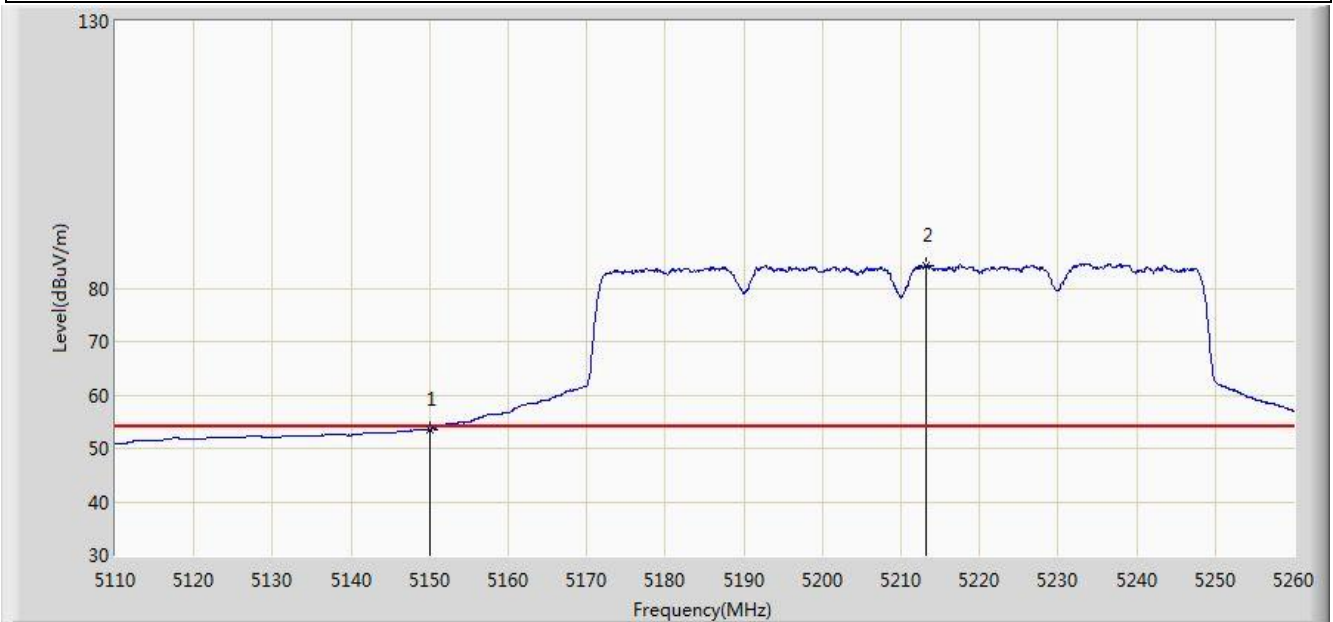


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.610	16.158	-0.390	54.000	37.452	AV
2		*	5213.125	84.259	46.979	N/A	N/A	37.281	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)



Site: AC 1	Time: 2015/07/05 - 17:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5775MHz by 802.11ac-VHT80 Ant 1+2	

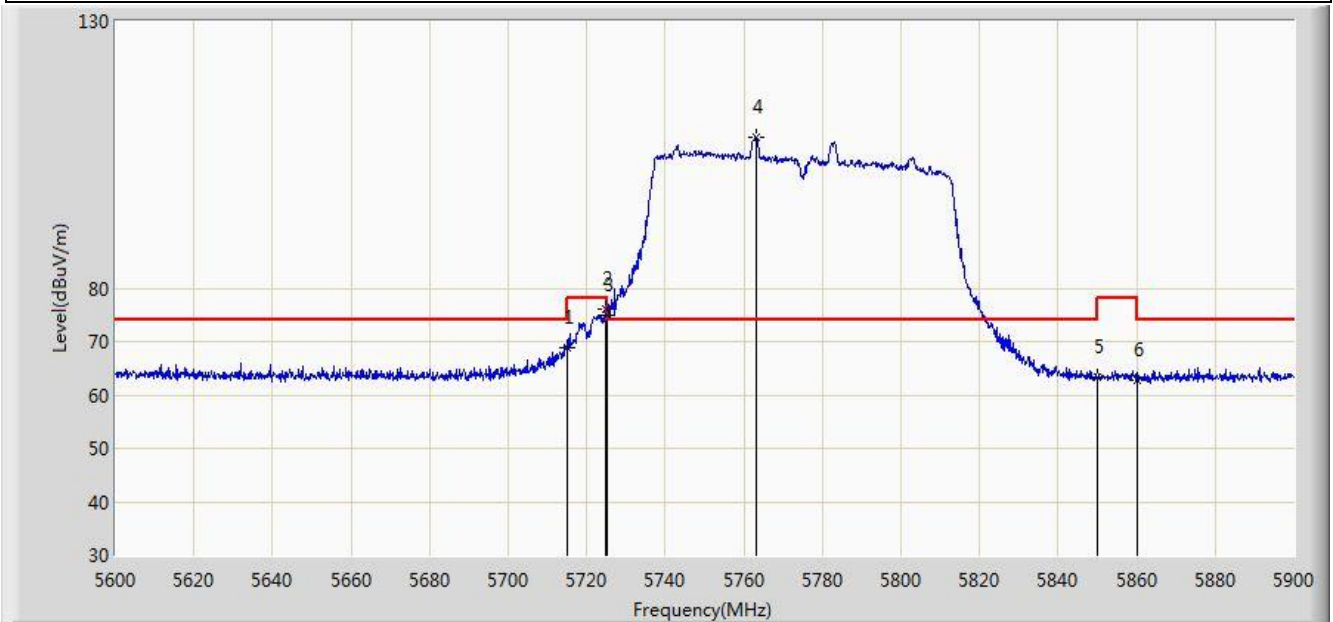


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	68.945	30.996	-5.055	74.000	37.949	PK
2			5724.650	76.189	38.201	-2.011	78.200	37.989	PK
3			5725.000	74.889	36.899	-3.311	78.200	37.990	PK
4		*	5763.200	108.336	70.187	N/A	N/A	38.149	PK
5			5850.000	63.237	24.784	-14.963	78.200	38.454	PK
6			5860.000	62.855	24.377	-11.145	74.000	38.478	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5775MHz by 802.11ac-VHT80 Ant 1+2	

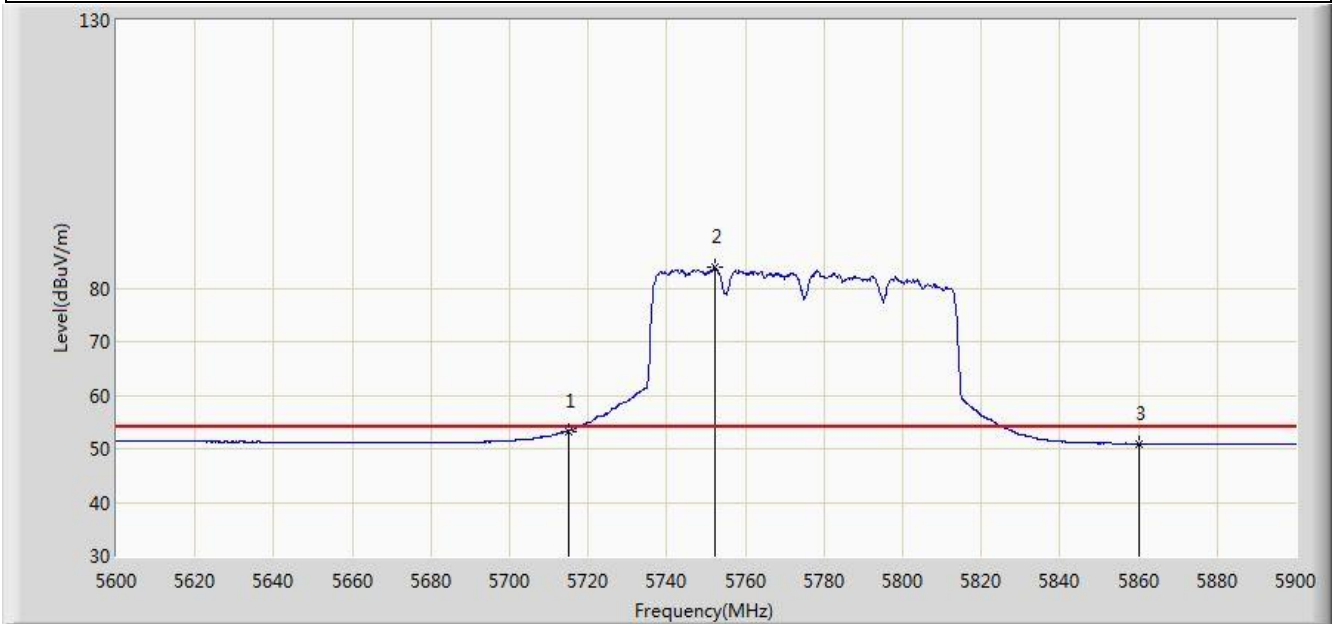


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.286	15.337	-0.714	54.000	37.949	AV
2		*	5752.100	83.909	45.803	N/A	N/A	38.106	AV
3			5860.000	50.971	12.493	-3.029	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Note: Test Mode: Transmit at Channel 5775MHz by 802.11ac-VHT80 Ant 1+2	

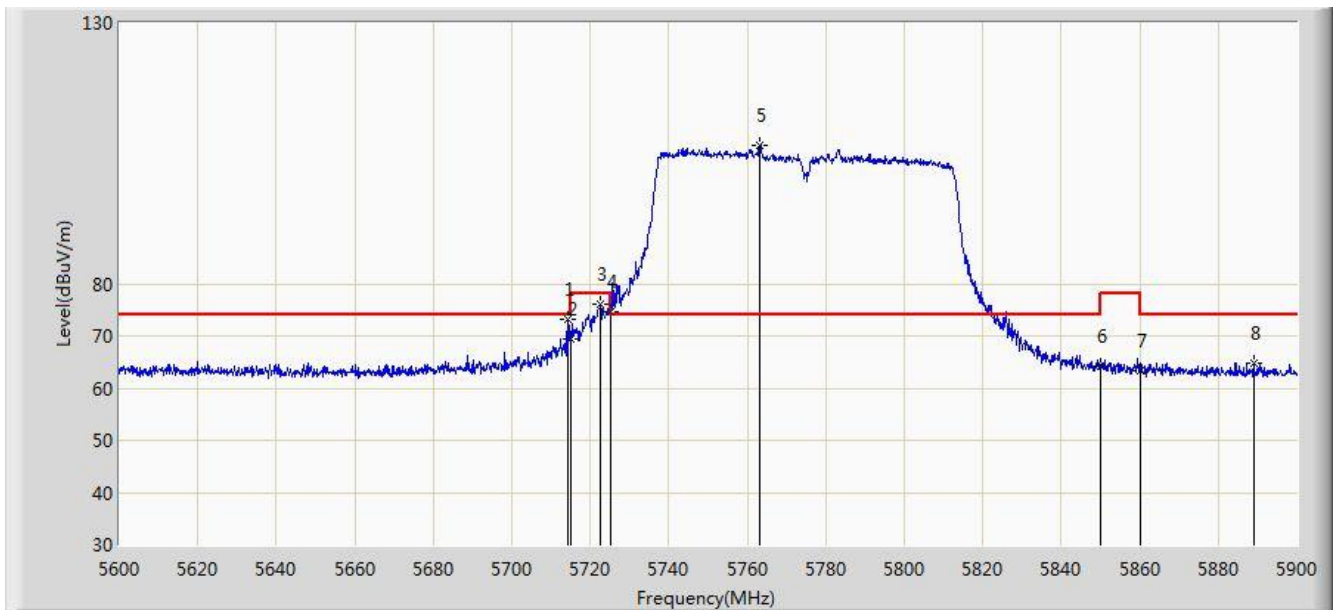

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.450	73.293	35.346	-0.707	74.000	37.947	PK
2			5715.000	69.404	31.455	-4.596	74.000	37.949	PK
3			5722.700	75.968	37.988	-2.232	78.200	37.980	PK
4			5725.000	74.610	36.620	-3.590	78.200	37.990	PK
5		*	5763.050	106.568	68.419	N/A	N/A	38.149	PK
6			5850.000	64.170	25.717	-14.030	78.200	38.454	PK
7			5860.000	63.404	24.926	-10.596	74.000	38.478	PK
8			5889.050	64.719	26.211	-9.281	74.000	38.508	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/05 - 17:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
Test Mode: Transmit at Channel 5775MHz by 802.11ac-VHT80 Ant 1+2	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.518	15.569	-0.482	54.000	37.949	AV
2		*	5741.450	83.328	45.272	N/A	N/A	38.057	AV
3			5860.000	51.429	12.951	-2.571	54.000	38.478	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 7.10. AC Conducted Emissions Measurement

### 7.10.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207		
Frequency (MHz)	QP (dB $\mu$ V)	AV (dB $\mu$ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


### 7.10.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

### 7.10.3. Test Setup

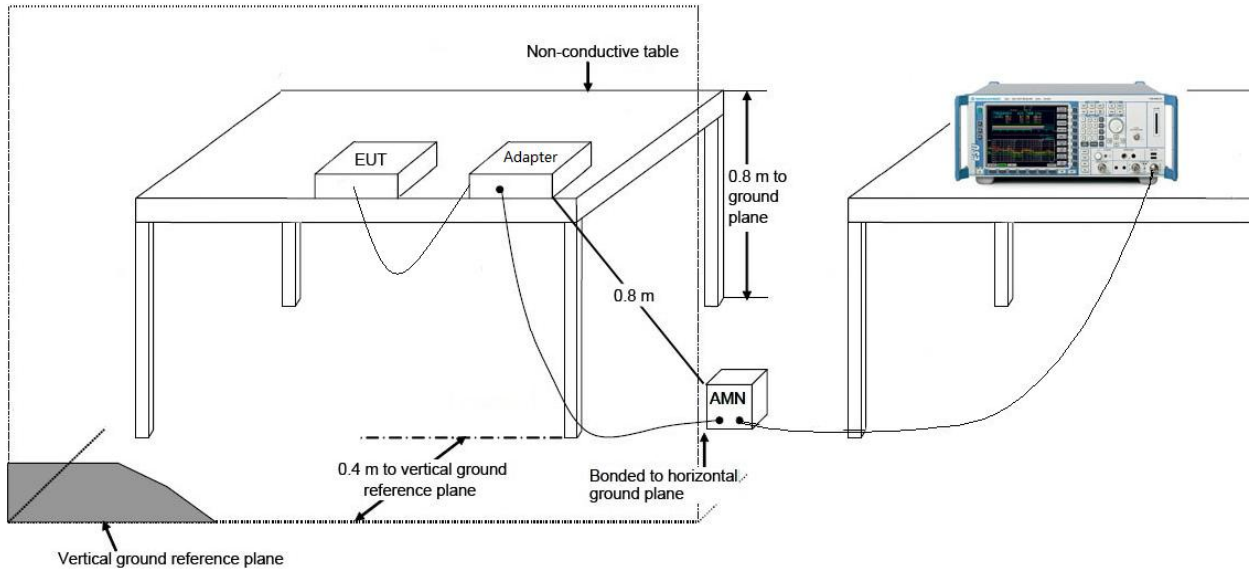

**7.10.4. Test Result**

Site: SR2	Time: 2015/07/27 - 13:47
Limit: FCC_Part15.207_CE_AC Power	Engineer: Milo Li
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
<b>Worse Case Mode: Transmit at Channel 5180MHz by 802.11a Ant 1 + 2</b>	

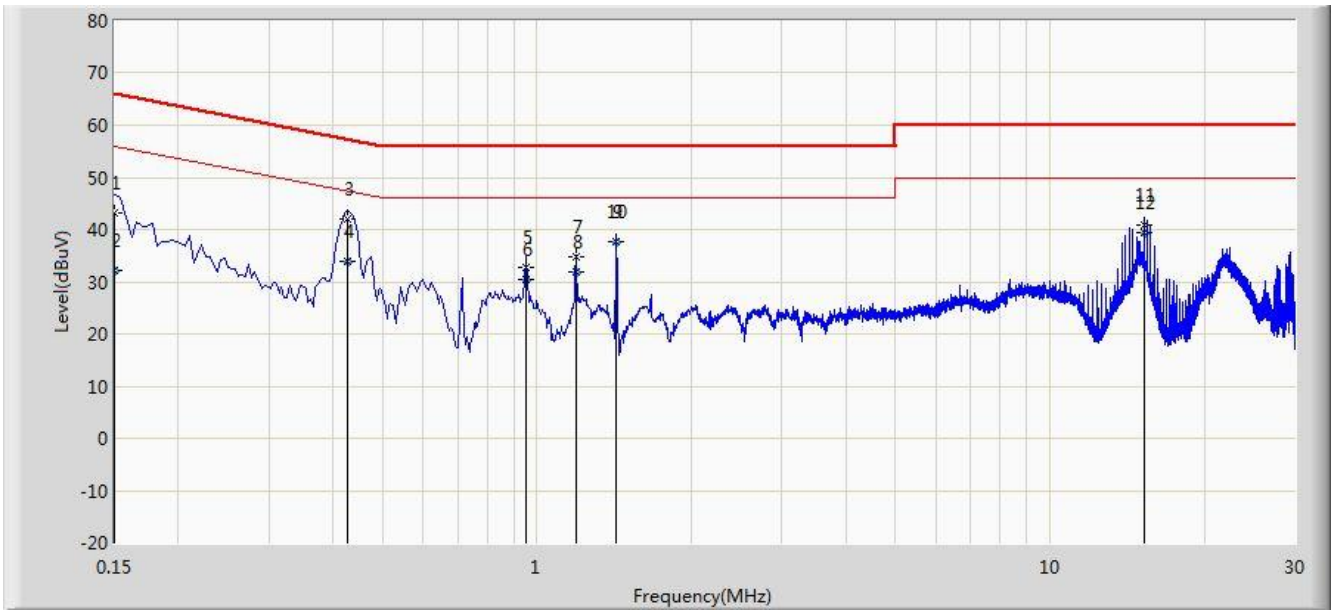


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	43.068	31.900	-22.932	66.000	11.168	QP
2			0.150	32.309	21.141	-23.691	56.000	11.168	AV
3			0.426	42.034	31.927	-15.297	57.330	10.107	QP
4			0.426	33.826	23.720	-13.504	47.330	10.107	AV
5			0.954	32.769	22.837	-23.231	56.000	9.932	QP
6			0.954	30.489	20.557	-15.511	46.000	9.932	AV
7			1.190	34.848	24.946	-21.152	56.000	9.902	QP
8			1.190	31.998	22.097	-14.002	46.000	9.902	AV
9			1.430	37.763	27.872	-18.237	56.000	9.892	QP
10		*	1.430	37.704	27.812	-8.296	46.000	9.892	AV
11			15.234	40.918	30.852	-19.082	60.000	10.066	QP
12			15.234	39.283	29.217	-10.717	50.000	10.066	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2015/07/27 - 13:51
Limit: FCC_Part15.207_CE_AC Power	Engineer: Milo Li
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: WF-96A 802.11AC 2X2 5G CPE	Power: AC 120V/60Hz
<b>Worse Case Mode: Transmit at Channel 5180MHz by 802.11a Ant 1 + 2</b>	

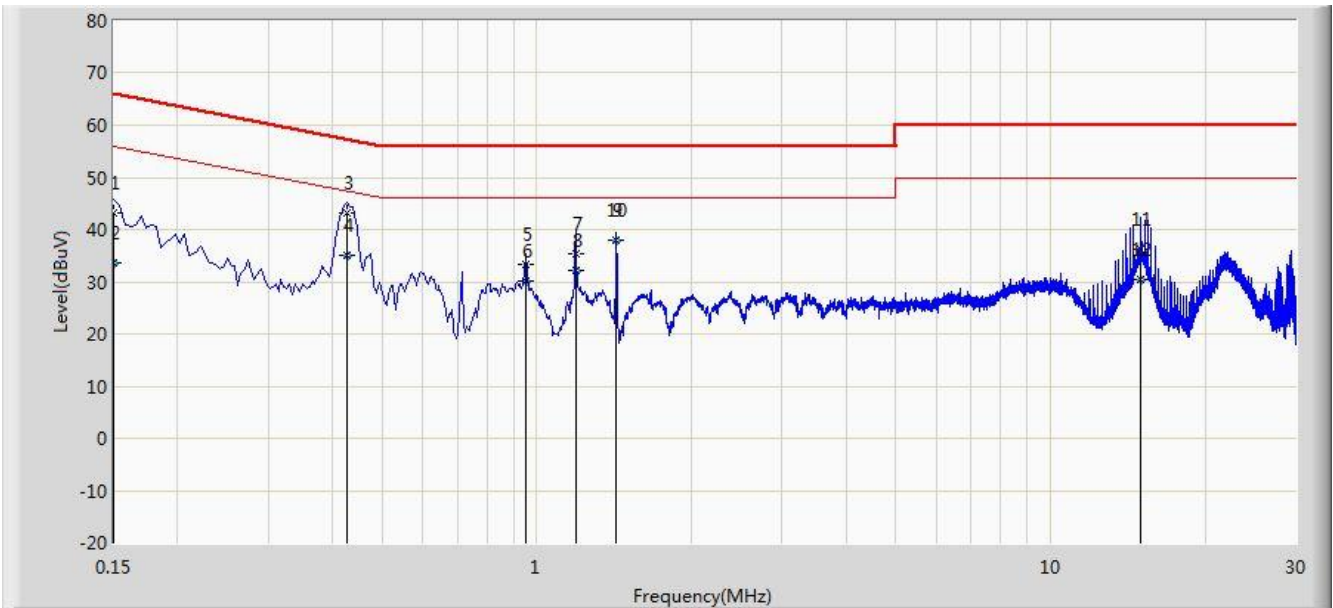

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	43.156	32.014	-22.844	66.000	11.142	QP
2			0.150	33.622	22.480	-22.378	56.000	11.142	AV
3			0.426	43.239	33.107	-14.091	57.330	10.132	QP
4			0.426	34.983	24.851	-12.347	47.330	10.132	AV
5			0.950	33.464	23.528	-22.536	56.000	9.936	QP
6			0.950	30.280	20.344	-15.720	46.000	9.936	AV
7			1.190	35.287	25.385	-20.713	56.000	9.903	QP
8			1.190	32.268	22.365	-13.732	46.000	9.903	AV
9			1.430	38.025	28.132	-17.975	56.000	9.893	QP
10		*	1.430	37.878	27.985	-8.122	46.000	9.893	AV
11			15.002	36.134	26.020	-23.866	60.000	10.114	QP
12			15.002	30.450	20.336	-19.550	50.000	10.114	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)



## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **WF-96A 802.11ac 2x2 5G CPE**  
**FCC ID: SFK-WF96A** is in compliance with Part 15E of the FCC Rules.

---

The End