



**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313  
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372  
3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372  
13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

March 15, 2017

TrackMan A/S  
Stubbeled 2  
Vedbæk, DK-2950

Dear Claus Nilsson,

Enclosed is the EMC Wireless test report for compliance testing of the TrackMan A/S, TMA4A as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15.407, Subpart E (UNII 3).

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Joel Huna  
Documentation Department

Reference: (\TrackMan A/S\EMC88710-FCC407 UNII 3 Rev. 4)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

**Electromagnetic Compatibility Criteria  
Test Report**

for the

**TrackMan A/S  
Model TMA4A**

**Tested under**  
The FCC Certification Rules  
contained in  
Title 47 of the CFR  
15.407 Subpart E

**MET Report: EMC88710-FCC407 UNII 3 Rev. 4**

March 15, 2017

**Prepared For:**

**TrackMan A/S**  
Stubbeled 2  
Vedbæk, DK-2950

**Prepared By:**  
**MET Laboratories, Inc.**  
914 West Patapsco Avenue,  
Baltimore, MD 21230

## Electromagnetic Compatibility Criteria Test Report

for the

**TrackMan A/S  
Model TMA4A**

### Tested under

The FCC Certification Rules  
contained in  
Title 47 of the CFR  
15.407 Subpart E



Djed Mouada, Project Engineer  
Electromagnetic Compatibility Lab



Joel Huna  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules under normal use and maintenance.



Asad Bajwa,  
Director, Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
∅	December 2, 2016	Initial Issue.
1	February 2, 2017	FCC ID
2	February 28, 2017	Customer Corrections
3	March 2, 2017	Engineer corrections.
4	March 15, 2017	Engineer corrections.

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview.....	4
	B. References.....	5
	C. Test Site .....	5
	D. Description of Test Sample.....	5
	E. Equipment Configuration.....	7
	F. Support Equipment .....	7
	G. Ports and Cabling Information.....	7
	H. Mode of Operation.....	8
	I. Method of Monitoring EUT Operation .....	8
	J. Modifications .....	9
	a) Modifications to EUT .....	9
	b) Modifications to Test Standard .....	9
	K. Disposition of EUT .....	9
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>10</b>
	§ 15.203 Antenna Requirement.....	11
	§ 15.403(i) 26 dB Bandwidth .....	12
	§ 15.407(a)(3) Maximum Conducted Output Power .....	25
	§ 15.407(a)(3) Maximum Power Spectral Density .....	32
	§ 15.407(b)(4) & (6 - 7) Undesirable Emissions .....	39
	§ 15.407(b)(6) Conducted Emissions .....	59
	§ 15.407(c) Automatic Discontinue of Transmission .....	63
	§ 15.407(e) 6 dB Bandwidth .....	64
	§ 15.407(g) Frequency Stability .....	66
<b>IV.</b>	<b>Test Equipment .....</b>	<b>67</b>
<b>V.</b>	<b>Certification &amp; User's Manual Information.....</b>	<b>69</b>
	A. Certification Information .....	70
	B. Label and User's Manual Information .....	74

## List of Tables

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing .....	2
Table 2. EUT Summary.....	4
Table 3. References .....	5
Table 4. Equipment Configuration .....	7
Table 5. Support Equipment.....	7
Table 6. Ports and Cabling Information .....	7
Table 7. Maximum Conducted Output Power, Test Results .....	25
Table 8. Power Spectral Density, Test Results.....	32
Table 9. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	59
Table 10. Conducted Emissions - Voltage, AC Power, Phase Line (120VAC) .....	60
Table 11. Conducted Emissions - Voltage, AC Power, Neutral Line (120VAC).....	61
Table 12. Frequency Stability, Test Results.....	66
Table 13. Test Equipment List .....	68

## List of Figures

Figure 1. Block Diagram of Test Configuration, Ethernet .....	6
Figure 2. Block Diagram of Test Configuration, WiFi .....	6

## List of Photographs

Photograph 1. Undesirable Emissions/Radiated Spurious Emissions, Test Setup, Below 1GHz.....	58
Photograph 2. Undesirable Emissions/Radiated Spurious Emissions, Test Setup, Above 1GHz .....	58
Photograph 3. Conducted Emissions, Test Setup .....	62

## List of Plots

Plot 1. 26dB Occupied Bandwidth, BW 20M, Ch. 5745M, a mode, Port 1 .....	13
Plot 2. 26dB Occupied Bandwidth, BW 20M, Ch. 5745M, a mode, Port 2 .....	13
Plot 3. 26dB Occupied Bandwidth, BW 20M, Ch. 5745M, n mode, Port 1 .....	13
Plot 4. 26dB Occupied Bandwidth, BW 20M, Ch. 5745M, n mode, Port 2.....	14
Plot 5. 26dB Occupied Bandwidth, BW 20M, Ch. 5785M, a mode, Port 1 .....	14
Plot 6. 26dB Occupied Bandwidth, BW 20M, 5785M, a mode, Port 2.....	14
Plot 7. 26dB Occupied Bandwidth, BW 20M, Ch. 5785M, n mode, Port 1 .....	15
Plot 8. 26dB Occupied Bandwidth, BW 20M, Ch. 5785M, n mode, Port 2.....	15
Plot 9. 26dB Occupied Bandwidth, BW 20M, Ch. 5825M, a mode, Port 1 .....	15
Plot 10. 26dB Occupied Bandwidth, BW 20M, Ch. 5285M, a mode, Port 2 .....	16
Plot 11. 26dB Occupied Bandwidth, BW 20M, Ch. 5825M, n mode, Port 1 .....	16
Plot 12. 26dB Occupied Bandwidth, BW 20M, Ch. 5825M, n mode, Port 2 .....	16
Plot 13. 26dB Occupied Bandwidth, BW 40M, Ch. 5755M, n mode, Port 1 .....	17
Plot 14. 26dB Occupied Bandwidth, BW 40M, Ch. 5755M, n mode, Port 2.....	17
Plot 15. 26dB Occupied Bandwidth, BW 40M, Ch. 5795M, n mode, Port 1 .....	17
Plot 16. 26dB Occupied Bandwidth, BW 40M, Ch. 5795M, n mode, Port 2.....	18
Plot 17. 99 percent Occupied Bandwidth, BW 20M, Ch. 5745M, a mode, Port 1 .....	19
Plot 18. 99 percent Occupied Bandwidth, BW 20M, Ch. 5745M, a mode, Port 2 .....	19
Plot 19. 99 percent Occupied Bandwidth, BW 20M, Ch. 5745M, n mode, Port 1 .....	19
Plot 20. 99 percent Occupied Bandwidth, BW 20M, Ch. 5745M, n mode, Port 2.....	20
Plot 21. 99 percent Occupied Bandwidth, BW 20M, Ch. 5785M, a mode, Port 1 .....	20
Plot 22. 99 percent Occupied Bandwidth, BW 20M, Ch. 5785M, a mode, Port 2 .....	20
Plot 23. 99 percent Occupied Bandwidth, BW 20M, Ch. 5785M, n mode, Port 1 .....	21
Plot 24. 99 percent Occupied Bandwidth, BW 20M, Ch. 5785M, n mode, Port 2.....	21

Plot 25. 99 percent Occupied Bandwidth, BW 20M, Ch. 5825M, a mode, Port 1 .....	21
Plot 26. 99 percent Occupied Bandwidth, BW 20M, Ch. 5825M, a mode, Port 2 .....	22
Plot 27. 99 percent Occupied Bandwidth, BW 20M, Ch. 5825M, n mode, Port 1 .....	22
Plot 28. 99 percent Occupied Bandwidth, BW 20M, Ch. 5825M, n mode, Port 2 .....	22
Plot 29. 99 percent Occupied Bandwidth, BW 40M, Ch. 5755M, n mode, Port 1 .....	23
Plot 30. 99 percent Occupied Bandwidth, BW 40M, Ch. 5755M, n mode, Port 2 .....	23
Plot 31. 99 percent Occupied Bandwidth, BW 40M, Ch. 5795M, n mode, Port 1 .....	23
Plot 32. 99 percent Occupied Bandwidth, BW 40M, Ch. 5795M, n mode, Port 2 .....	24
Plot 33. Maximum Conducted Output Power, BW 20M, Ch. 5745M, a mode, Port 1 .....	26
Plot 34. Maximum Conducted Output Power, BW 20M, Ch. 5745M, a mode, Port 2 .....	26
Plot 35. Maximum Conducted Output Power, BW 20M, Ch. 5745M, n mode, Port 1 .....	26
Plot 36. Maximum Conducted Output Power, BW 20M, Ch. 5745M, n mode, Port 2 .....	27
Plot 37. Maximum Conducted Output Power, BW 20M, Ch. 5785M, a mode, Port 1 .....	27
Plot 38. Maximum Conducted Output Power, BW 20M, Ch. 5785M, a mode, Port 2 .....	27
Plot 39. Maximum Conducted Output Power, BW 20M, Ch. 5785M, n mode, Port 1 .....	28
Plot 40. Maximum Conducted Output Power, BW 20M, Ch. 5785M, n mode, Port 2 .....	28
Plot 41. Maximum Conducted Output Power, BW 20M, Ch. 5825M, a mode, Port 1 .....	28
Plot 42. Maximum Conducted Output Power, BW 20M, Ch. 5825M, a mode, Port 2 .....	29
Plot 43. Maximum Conducted Output Power, BW 20M, Ch. 5825M, n mode, Port 1 .....	29
Plot 44. Maximum Conducted Output Power, BW 20M, Ch. 5825M, n mode, Port 2 .....	29
Plot 45. Maximum Conducted Output Power, BW 40M, Ch. 5755M, n mode, Port 1 .....	30
Plot 46. Maximum Conducted Output Power, BW 40M, Ch. 5755M, n mode, Port 2 .....	30
Plot 47. Maximum Conducted Output Power, BW 40M, Ch. 5795M, n mode, Port 1 .....	30
Plot 48. Maximum Conducted Output Power, BW 40M, Ch. 5795M, n mode, Port 2 .....	31
Plot 49. Power Spectral Density, BW 20M, Ch. 5745M, a mode, Port 1 .....	33
Plot 50. Power Spectral Density, BW 20M, Ch. 5745M, a mode, Port 2 .....	33
Plot 51. Power Spectral Density, BW 20M, Ch. 5745M, n mode, Port 1 .....	33
Plot 52. Power Spectral Density, BW 20M, Ch. 5745M, n mode, Port 2 .....	34
Plot 53. Power Spectral Density, BW 20M, Ch. 5785M, a mode, Port 1 .....	34
Plot 54. Power Spectral Density, BW 20M, Ch. 5785M, a mode, Port 2 .....	34
Plot 55. Power Spectral Density, BW 20M, Ch. 5785M, n mode, Port 1 .....	35
Plot 56. Power Spectral Density, BW 20M, Ch. 5785M, n mode, Port 2 .....	35
Plot 57. Power Spectral Density, BW 20M, Ch. 5825M, a mode, Port 1 .....	35
Plot 58. Power Spectral Density, BW 20M, Ch. 5825M, a mode, Port 2 .....	36
Plot 59. Power Spectral Density, BW 20M, Ch. 5825M, n mode, Port 1 .....	36
Plot 60. Power Spectral Density, BW 20M, Ch. 5825M, n mode, Port 2 .....	36
Plot 61. Power Spectral Density, BW 40M, Ch. 5755M, n mode, Port 1 .....	37
Plot 62. Power Spectral Density, BW 40M, Ch. 5755M, n mode, Port 2 .....	37
Plot 63. Power Spectral Density, BW 40M, Ch. 5795M, n mode, Port 1 .....	37
Plot 64. Power Spectral Density, BW 40M, Ch. 5795M, n mode, Port 2 .....	38
Plot 65. Undesirable Emissions, Band Edge Emission Mask, BW 20M, Ch. 5745M, a mode .....	40
Plot 66. Undesirable Emissions, Band Edge Emission Mask, BW 20M, Ch. 5785M, a mode .....	40
Plot 67. Undesirable Emissions, Band Edge Emission Mask, BW 20M, Ch. 5825M, a mode .....	40
Plot 68. Undesirable Emissions, Band Edge Emission Mask, BW 20M, Ch. 5745M, n mode .....	41
Plot 69. Undesirable Emissions, Band Edge Emission Mask, BW 20M, Ch. 5785M, n mode .....	41
Plot 70. Undesirable Emissions, Band Edge Emission Mask, BW 20M, Ch. 5825M, n mode .....	41
Plot 71. Undesirable Emissions, Band Edge Emission Mask, BW 40M, Ch. 5755M, n mode .....	42
Plot 72. Undesirable Emissions, Band Edge Emission Mask, BW 40M, Ch. 5795M, n mode .....	42
Plot 73. Average Spurious Emission, 7-18GHz, BW 20M, Ch. 5742M, a mode .....	43
Plot 74. Average Spurious Emission, 7-18GHz, BW 20M, Ch. 5745M, a mode .....	43
Plot 75. Average Spurious Emission, 7-18GHz, BW 20M, Ch. 5785M, a mode .....	43
Plot 76. Average Spurious Emission, 7-18GHz, BW 20M, Ch. 5785M, n mode .....	44
Plot 77. Average Spurious Emission, 7-18GHz, BW 20M, Ch. 5825M, a mode .....	44
Plot 78. Average Spurious Emission, 7-18GHz, BW 20M, Ch. 5825M, n mode .....	44
Plot 79. Peak Spurious Emissions, 7-18GHz, BW 20M, Ch. 5745M, n mode .....	45
Plot 80. Peak Spurious Emissions, 7-18GHz, BW 20M, Ch. 5785M, a mode .....	45

Plot 81. Peak Spurious Emissions, 7-18GHz, BW 20M, Ch. 5785M, n mode.....	45
Plot 82. Peak Spurious Emissions, 7-18GHz, BW 20M, Ch. 5825M, a mode.....	46
Plot 83. Peak Spurious Emissions, 7-18GHz, BW 20M, Ch. 5825M, n mode.....	46
Plot 84. Average Spurious Emissions, 1-7GHz, BW 20M, Ch. 5745M, a mode.....	46
Plot 85. Average Spurious Emissions, 1-7GHz, BW 20M, Ch. 5745M, n mode.....	47
Plot 86. Average Spurious Emissions, 1-7GHz, BW 20M, Ch. 5785M, a mode.....	47
Plot 87. Average Spurious Emissions, 1-7GHz, BW 20M, Ch. 5785M, n mode.....	47
Plot 88. Average Spurious Emissions, 1-7GHz, BW 20M, Ch. 5825M, a mode.....	48
Plot 89. Average Spurious Emissions, 1-7GHz, BW 20M, Ch. 5825M, n mode.....	48
Plot 90. Peak Spurious Emissions, 1-7GHz, BW 20M, Ch. 5745M, a mode.....	48
Plot 91. Peak Spurious Emissions, 1-7GHz, BW 20M, Ch. 5745M, n mode.....	49
Plot 92. Peak Spurious Emissions, 1-7GHz, BW 20M, Ch. 5785M, a mode.....	49
Plot 93. Peak Spurious Emissions, 1-7GHz, BW 20M, Ch. 5785M, n mode.....	49
Plot 94. Peak Spurious Emissions, 1-7GHz, BW 20M, Ch. 5825M, a mode.....	50
Plot 95. Peak Spurious Emissions, 1-7GHz, BW 20M, Ch. 5825M, n mode.....	50
Plot 96. Average Spurious Emission, 7-18GHz, BW 40M, Ch. 5755M, a mode.....	51
Plot 97. Average Spurious Emission, 7-18GHz, BW 40M, Ch. 5795M, a mode.....	51
Plot 98. Peak Spurious Emission, 7-18GHz, BW 40M, Ch. 5755M, n mode.....	51
Plot 99. Peak Spurious Emission, 7-18GHz, BW 40M, Ch. 5795M, n mode.....	52
Plot 100. Average Spurious Emissions, 1-7GHz, BW 40M, Ch. 5755M, n mode.....	52
Plot 101. Average Spurious Emissions, 1-7GHz, BW 40M, Ch. 5795M, n mode.....	52
Plot 102. Peak Spurious Emissions, 1-7GHz, BW 40M, Ch. 5755M, n mode.....	53
Plot 103. Peak Spurious Emissions, 1-7GHz, BW 40M, Ch. 5795M, n mode.....	53
Plot 104. Spurious Emissions, Low Channel, 18-40GHz, Peak (worst case).....	53
Plot 105. Spurious Emissions, Low Channel, 18-40GHz, Avg (worst case).....	54
Plot 106. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5745M, a mode.....	55
Plot 107. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5745M, n mode.....	55
Plot 108. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5755M, n mode.....	55
Plot 109. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5785M, a mode.....	56
Plot 110. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5785M, n mode.....	56
Plot 111. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5795M, n mode.....	56
Plot 112. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5825M, a mode.....	57
Plot 113. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5825M, n mode.....	57
Plot 114. Conducted Emission, Phase Line Plot.....	60
Plot 115. Conducted Emission, Neutral Line Plot.....	61
Plot 116. 6dB Occupied Bandwidth, BW 20M, Ch. 5745M, a mode.....	65
Plot 117. 6dB Occupied Bandwidth, BW 20M, Ch. 5745M, n mode.....	65
Plot 118. 6dB, Occupied Bandwidth, BW 40, Ch. 5755M, n mode.....	65



## List of Terms and Abbreviations

<b>AC</b>	<b>Alternating Current</b>
<b>ACF</b>	<b>Antenna Correction Factor</b>
<b>Cal</b>	<b>Calibration</b>
<i>d</i>	<b>Measurement Distance</b>
<b>dB</b>	<b>Decibels</b>
<b>dB<math>\mu</math>A</b>	<b>Decibels above one microamp</b>
<b>dB<math>\mu</math>V</b>	<b>Decibels above one microvolt</b>
<b>dB<math>\mu</math>A/m</b>	<b>Decibels above one microamp per meter</b>
<b>dB<math>\mu</math>V/m</b>	<b>Decibels above one microvolt per meter</b>
<b>DC</b>	<b>Direct Current</b>
<b>E</b>	<b>Electric Field</b>
<b>DSL</b>	<b>Digital Subscriber Line</b>
<b>ESD</b>	<b>Electrostatic Discharge</b>
<b>EUT</b>	<b>Equipment Under Test</b>
<i>f</i>	<b>Frequency</b>
<b>FCC</b>	<b>Federal Communications Commission</b>
<b>GRP</b>	<b>Ground Reference Plane</b>
<b>H</b>	<b>Magnetic Field</b>
<b>HCP</b>	<b>Horizontal Coupling Plane</b>
<b>Hz</b>	<b>Hertz</b>
<b>IEC</b>	<b>International Electrotechnical Commission</b>
<b>kHz</b>	<b>Kilohertz</b>
<b>kPa</b>	<b>Kilopascal</b>
<b>kV</b>	<b>Kilovolt</b>
<b>LISN</b>	<b>Line Impedance Stabilization Network</b>
<b>MHz</b>	<b>Megahertz</b>
<b><math>\mu</math>H</b>	<b>Microhenry</b>
<b><math>\mu</math></b>	<b>Microfarad</b>
<b><math>\mu</math>s</b>	<b>Microseconds</b>
<b>PRF</b>	<b>Pulse Repetition Frequency</b>
<b>RF</b>	<b>Radio Frequency</b>
<b>RMS</b>	<b>Root-Mean-Square</b>
<b>TWT</b>	<b>Traveling Wave Tube</b>
<b>V/m</b>	<b>Volts per meter</b>
<b>VCP</b>	<b>Vertical Coupling Plane</b>

# I. Executive Summary

**A. Purpose of Test**

An EMC evaluation was performed to determine compliance of the TrackMan A/S TMA4A, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the TMA4A. TrackMan A/S should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the TMA4A, has been **permanently** discontinued.

**B. Executive Summary**

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with TrackMan A/S, purchase order number KO4331. All tests were conducted using measurement procedure ANSI C63.4-2014.

FCC Reference	Description	Results
§15.203	Antenna Requirement	Compliant
§15.403(i)	26 dB Bandwidth	Compliant
§15.407 (a)(3)	Maximum Conducted Output Power	Compliant
§15.407 (a)(3)	Maximum Power Spectral Density	Compliant
§15.407 (b)(4)& (6 - 7)	Undesirable Emissions	Compliant
§15.407(b)(6)	Conducted Emission Limits	Non-applicable
§15.407(c)	Automatic Discontinue of Transmitter	Non-applicable
§15.407(e)	6 dB Bandwidth	Compliant
§15.407(f)	RF Exposure	Compliant
§15.407(g)	Frequency Stability	Compliant

**Table 1. Executive Summary of EMC Part 15.407 Compliance Testing**

## **II. Equipment Configuration**

## A. Overview

MET Laboratories, Inc. was contracted by TrackMan A/S to perform testing on the TMA4A, under TrackMan A/S's purchase order number KO4331.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the TrackMan A/S TMA4A.

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	TMA4A	
<b>Model(s) Covered:</b>	TMA4A	
<b>EUT Specifications:</b>	Primary Power: 19VDC	
	FCC ID: SFX-TMAN4	
	Type of Modulations:	WiFi, 5GHz 802.11 a/n/ac
	Equipment Code:	UNII3
	Max. RF Output Power:	17.153dBm
	EUT Frequency Ranges:	5745-5825MHz
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.	
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
<b>Evaluated by:</b>	Djed Mouada	
<b>Report Date(s):</b>	March 15, 2017	

**Table 2. EUT Summary**

## B. References

<b>CFR 47, Part 15, Subpart E</b>	Unlicensed National Information Infrastructure Devices (UNII)
<b>ANSI C63.4:2014</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2005</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2013</b>	American National Standard for Testing Unlicensed Wireless Devices

**Table 3. References**

## C. Test Site

All testing was performed at MET Laboratories, Inc., 914 West Patapsco Avenue, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.


## D. Description of Test Sample

The TrackMan A/S TMA4A, Equipment Under Test (EUT), is an all-in-one complete dual radar system intended to measure the path and trajectory of golf clubs and balls.

The only peripherals required in order to operate the TrackMan™, is a Smart Phone (iOS) with suitable app installed, a Tablet or a standard computer with wireless connectivity and a standard web-browser.


In order to provide auto alignment the radar is equipped with motorized legs. A 2-axis inclinometer provides angle data which are transmitted to an embedded microcontroller which in turn controls the motor driver circuit.

A software servo loop controls the motorized legs until perfect leveling is obtained. The servo loop is only active during TrackMan™ set-up and installation

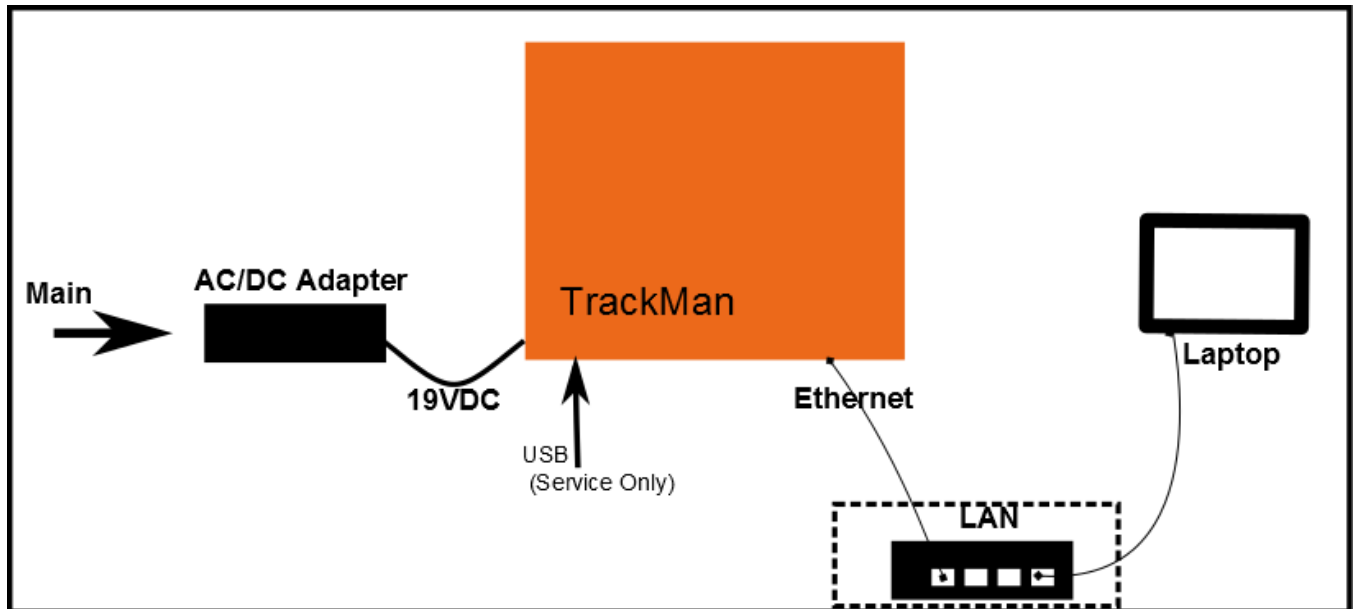

N.B. The LAN and Laptop is not part of the product. (LAN and Laptop is however supplied by TrackMan for the METlabs test.)

**Figure 1. Block Diagram of Test Configuration, Ethernet**

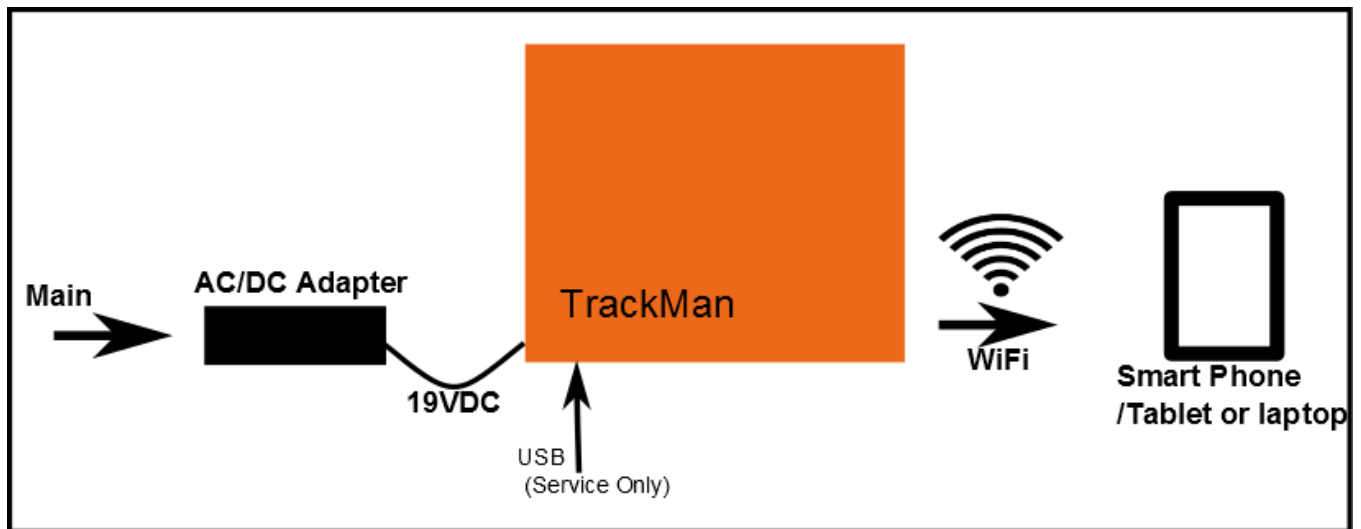

N.B. The Laptop is not part of the product. (Laptop is however supplied by TrackMan for the METlabs test.)

**Figure 2. Block Diagram of Test Configuration, WiFi**

## E. Equipment Configuration

The EUT was set up as outlined in Figure 1 and Figure 2. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Slot #	Name / Description	Model Number	Part Number	Serial Number
1	TRACKMAN 4	TrackMan4	TMA4A		

**Table 4. Equipment Configuration**

## F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
1	AC/DC ADAPTER	FSP GROUP INC.	FSP065-REC2	100-240AC INPUT 19VDC, 3.42A OUTPUT

The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.

**Table 5. Support Equipment**

## G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
1	USB	USB MICRO	1	1	3	YES	PC USB PORT
2	ETHERNET/LAN	CAT 5 LAN CABLE W. RJ45	1	5	100	YES	ROUTER
3	POWER PLUG IN	DC	1	1	N/A	YES	AC/DC ADAPTER

**Table 6. Ports and Cabling Information**



## H. Mode of Operation

The TMA4A comprises both a single frequency X-band radar (10GHz) and a dual frequency K-band radar (24GHz). The X-band Radar comprises 3 Receiver channels and the K-Band Radar comprises 5 receiver channels. The Radar transmitters continuously illuminates the “target, and “target” reflects the signal which is received by the receiving antennas. The received signals are down converted to base band in a mixer utilizing a LO signals which are coherent with the transmitted signals (Zero-IF principle).

Frequency stabilization is provided by means of PLL controlled microwave oscillators. The reference for the PLL (and thus for the microwave oscillators) is a high performance crystal controlled oscillator providing better than  $\pm 25$ ppm overall frequency stability during normal operating conditions.

The base band signals are amplified and synchronously digitized in a 16channel, 24bit analog-to-digital converter. The digitized signals are routed to the embedded PC board (SMARC Module from ADLink) piggybacked on the EU33 4002 where data are processed in real-time.

The analyzed data are then routed to the GUI device (Smart phone, Tablet or PC with WLAN of similar) over the WiFi connection. The GUI shows the relevant data and results for the user.

For normal operation the TrackMan™ is powered by an internal SMART battery Li-ION battery. During normal operation, no external power supply is required, but charging of the battery is provided by means of an external +19VDC supply.

The antennas used for transmitting and receiving are identical. The antenna pattern is shaped to maximize the overall loop gain of the TrackMan™ system for golf ball trajectories, where the golf ball is launched a couple of meters in front of the radar.

An embedded digital camera (Global Digital Star) is used to point out the horizontal reference line from a picture. The camera is only used during setup of the TrackMan™ Radar Unit.

During operation, video is streamed to the user through the WiFi channel.

The built-in GPS receiver and integrated antenna provides location coordinates for data processing and location tracking purpose.

## I. Method of Monitoring EUT Operation

The normal mode of operation of the TrackMan™ system is the following:

- The TrackMan™ embedded application software establishes wireless communication with the configuration memory, camera, inclinometer sensor and RF- sampling circuit.
- The inclinometer servo loop is initialized and the motorized legs are activated until perfect leveling is obtained.
- The camera is activated to take a picture. From the picture a desired horizontal reference line is defined.
- The application software continuously analyses the received signal form a golf club movement. Once a club movement together with a ball movement from the same position takes place, the signal will be tracked until loss of signal. Immediately after the tracking is completed, key results will be calculated and transmitted to GUI device (PC and Smart Phone) and then the application software will start looking for another club movement.
  1. A solid green LED on the front will indicate error-free boot and Radar ready to be operated
  2. Any other LED status besides the solid green LED (i.e. red LED) will indicate an error-situation

## **J. Modifications**

### **a) Modifications to EUT**

No modifications were made to the EUT.

### **b) Modifications to Test Standard**

No modifications were made to the test standard.

## **K. Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to TrackMan A/S upon completion of testing.

### **III. Electromagnetic Compatibility Criteria for Intentional Radiators**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203                      Antenna Requirement

**Test Requirement:**            § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:**                                The EUT as tested is compliant the criteria of §15.203. EUT has integral antennas.

**Test Engineer(s):**                    Djed Mouada

**Test Date(s):**                            October 21, 2016

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15. 403(i) 26 dB Bandwidth


**Test Requirements:** § 15.403(i): For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

**Test Procedure:** The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 26 dB Bandwidth was measured and recorded.


**Test Results** The 26 dB Bandwidth was compliant with the requirements of this section. No anomalies detected.

**Test Engineer(s):** Djed Mouada


**Test Date(s):** October 21, 2016




### Occupied Bandwidth, 20M Bandwidth

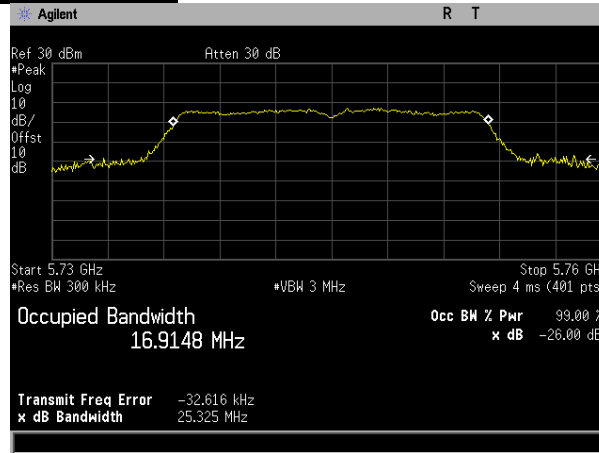


Plot 1. 26dB Occupied Bandwidth, BW 20M, Ch. 5745M, a mode, Port 1

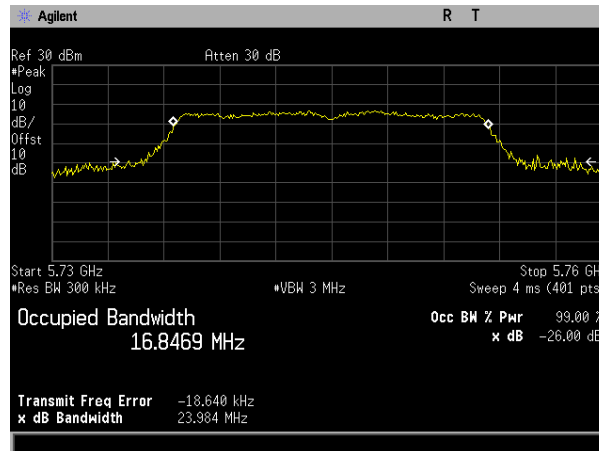


Plot 2. 26dB Occupied Bandwidth, BW 20M, Ch. 5745M, a mode, Port 2

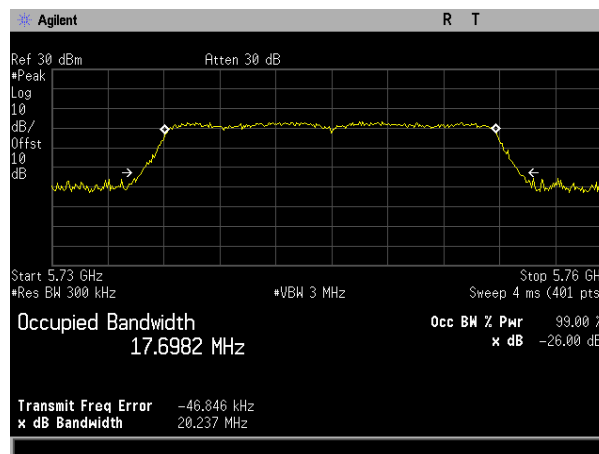


Plot 3. 26dB Occupied Bandwidth, BW 20M, Ch. 5745M, n mode, Port 1

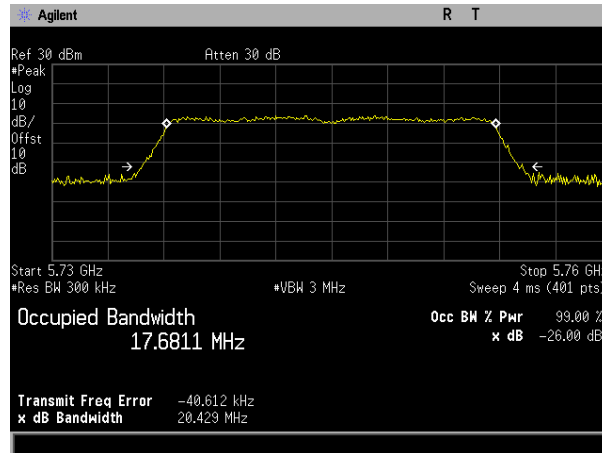


Plot 4. 26dB Occupied Bandwidth, BW 20M. Ch. 5745M, n mode, Port 2

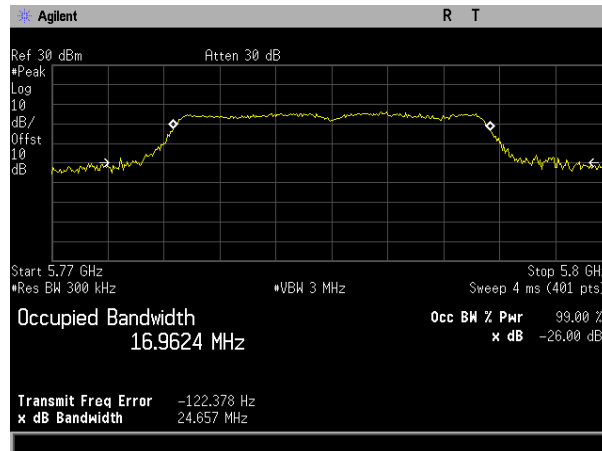


Plot 5. 26dB Occupied Bandwidth, BW 20M, Ch. 5785M, a mode, Port 1

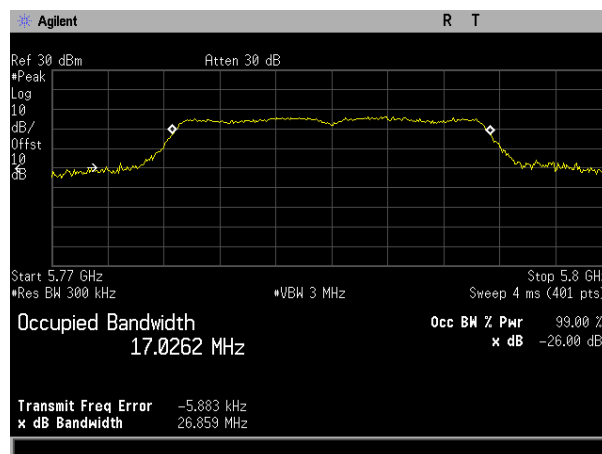


Plot 6. 26dB Occupied Bandwidth, BW 20M, 5785M, a mode, Port 2

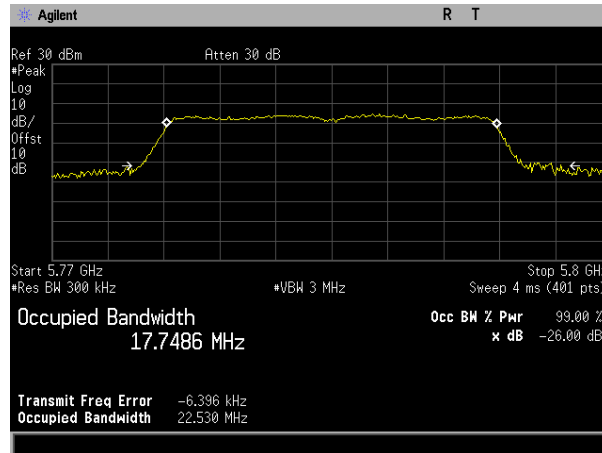

Plot 7. 26dB Occupied Bandwidth, BW 20M, Ch. 5785M, n mode, Port 1

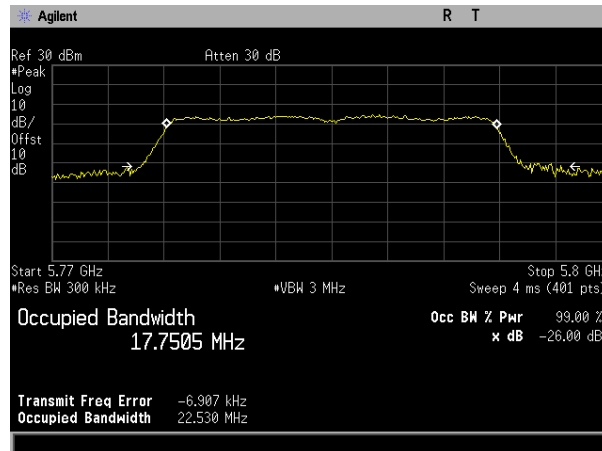


Plot 8. 26dB Occupied Bandwidth, BW 20M, Ch. 5785M, n mode, Port 2

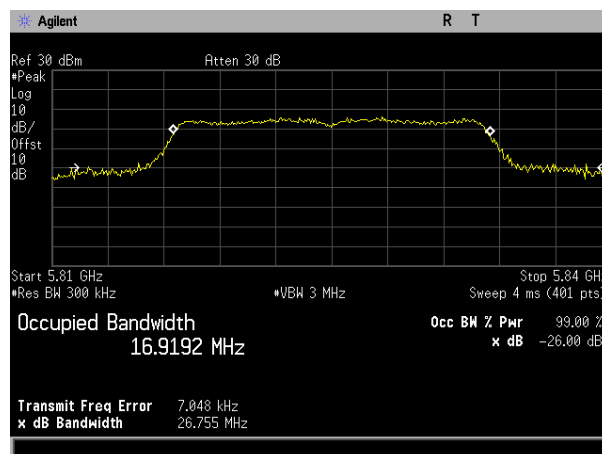


Plot 9. 26dB Occupied Bandwidth, BW 20M, Ch. 5825M, a mode, Port 1




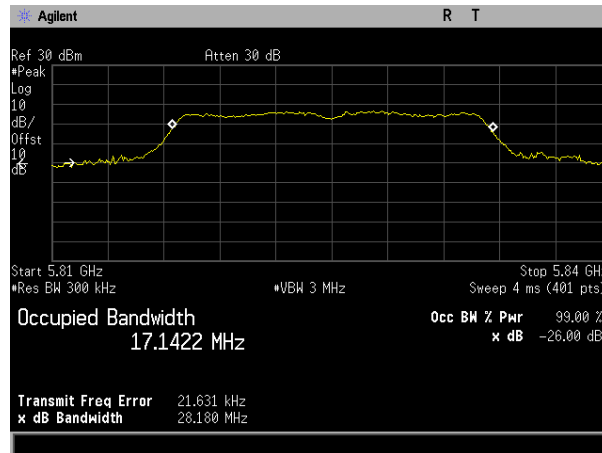

Plot 10. 26dB Occupied Bandwidth, BW 20M, Ch. 5285M, a mode, Port 2

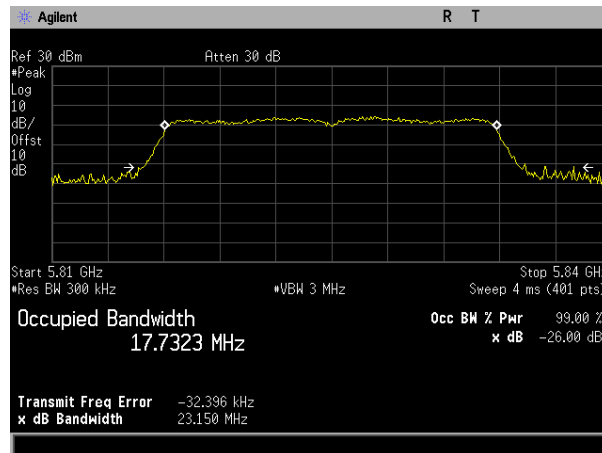


Plot 11. 26dB Occupied Bandwidth, BW 20M, Ch. 5825M, n mode, Port 1

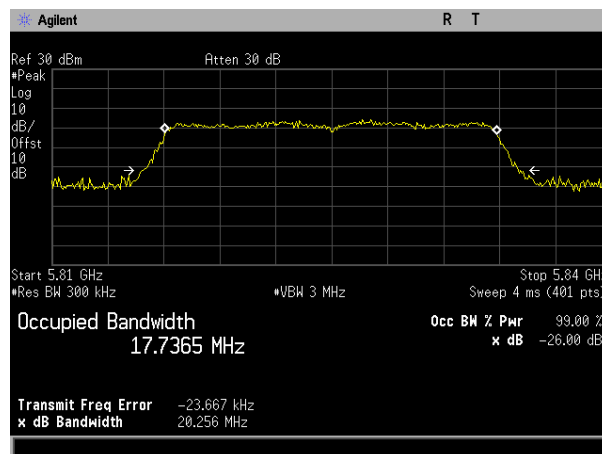


Plot 12. 26dB Occupied Bandwidth, BW 20M, Ch. 5825M, n mode, Port 2


## Occupied Bandwidth, 40M Bandwidth

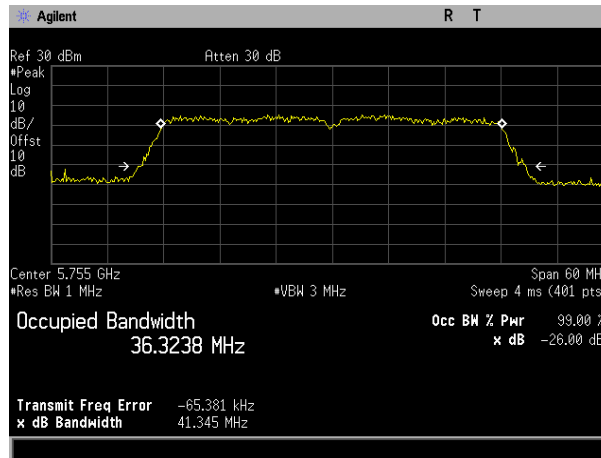


Plot 13. 26dB Occupied Bandwidth, BW 40M, Ch. 5755M, n mode, Port 1

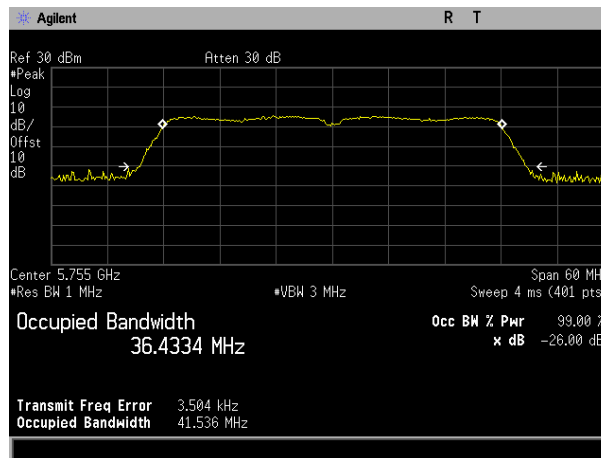

Plot 14. 26dB Occupied Bandwidth, BW 40M, Ch. 5755M, n mode, Port 2

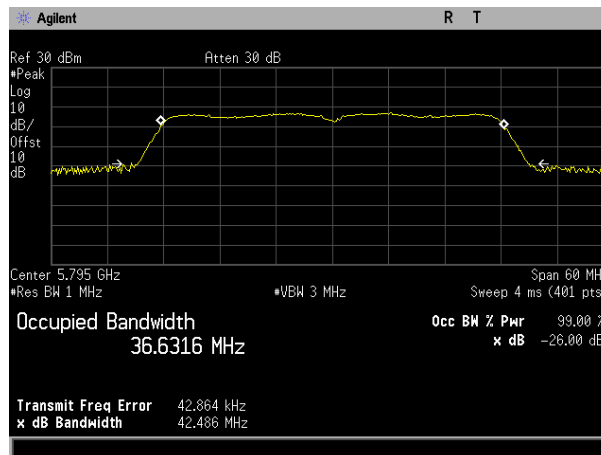


Plot 15. 26dB Occupied Bandwidth, BW 40M, Ch. 5795M, n mode, Port 1

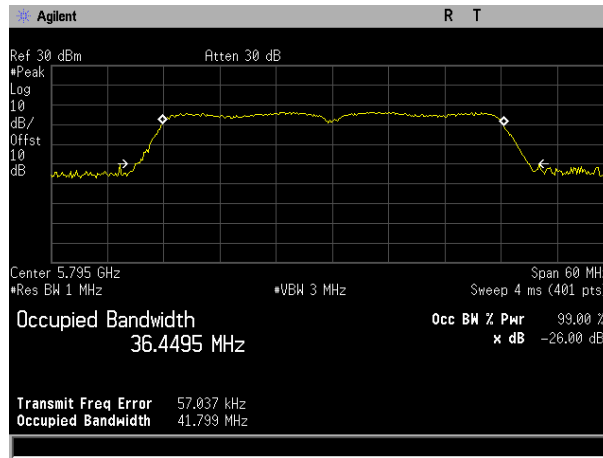


Plot 16. 26dB Occupied Bandwidth, BW 40M, Ch. 5795M, n mode, Port 2


### 99 percent Occupied Bandwidth

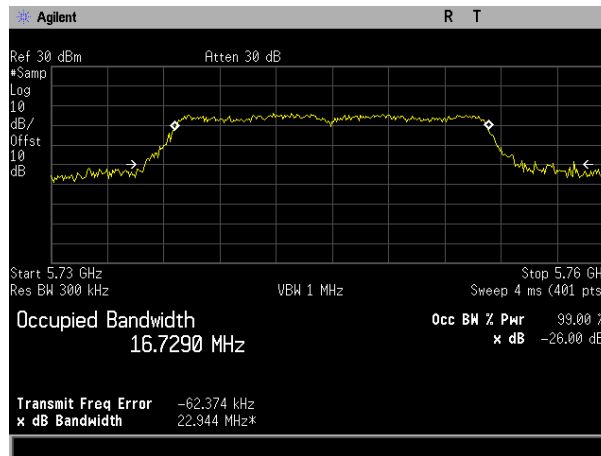


Plot 17. 99 percent Occupied Bandwidth, BW 20M, Ch. 5745M, a mode, Port 1

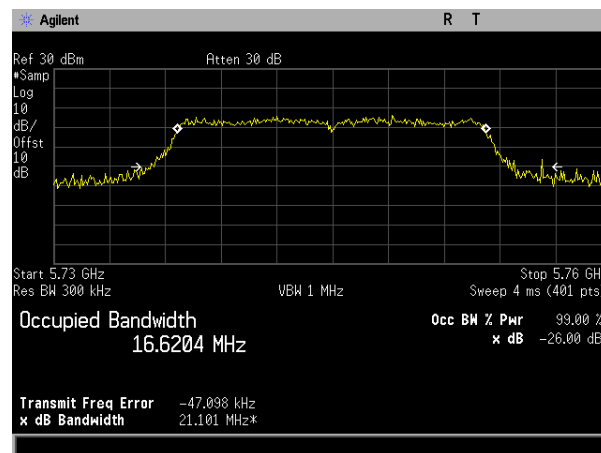


Plot 18. 99 percent Occupied Bandwidth, BW 20M, Ch. 5745M, a mode, Port 2

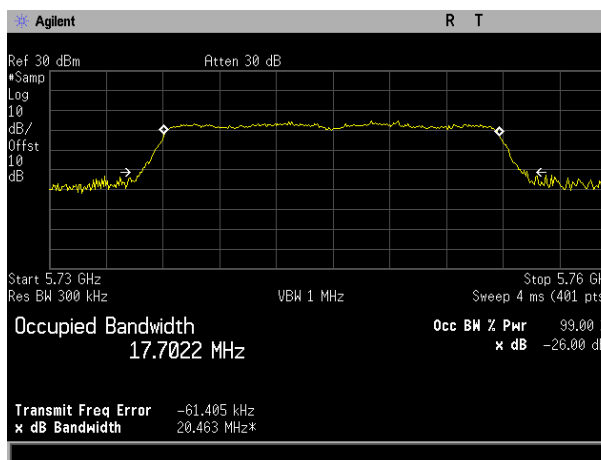


Plot 19. 99 percent Occupied Bandwidth, BW 20M, Ch. 5745M, n mode, Port 1

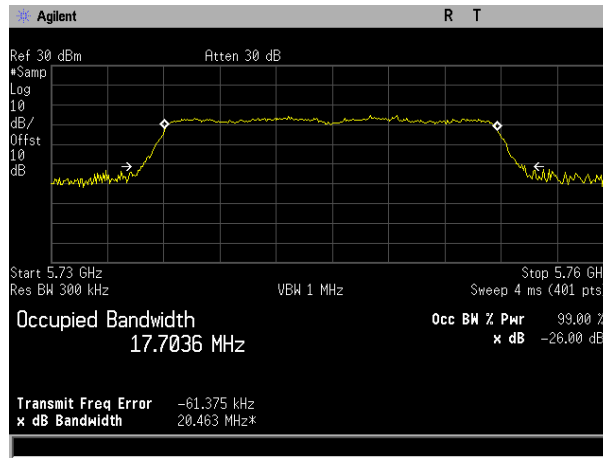


Plot 20. 99 percent Occupied Bandwidth, BW 20M, Ch. 5745M, n mode, Port 2

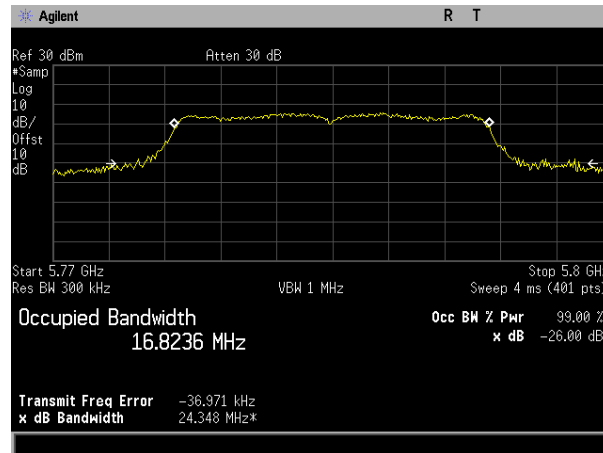


Plot 21. 99 percent Occupied Bandwidth, BW 20M, Ch. 5785M, a mode, Port 1

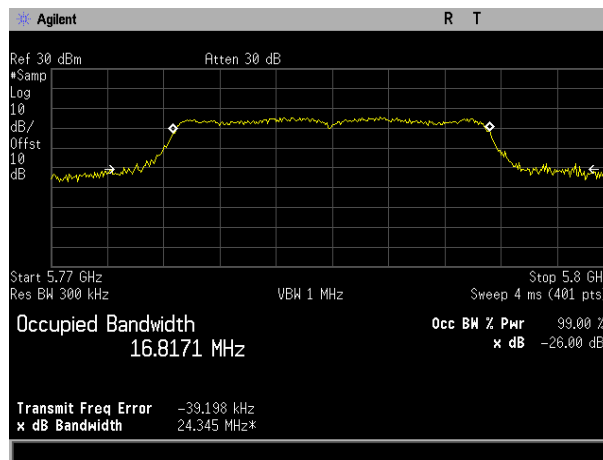


Plot 22. 99 percent Occupied Bandwidth, BW 20M, Ch. 5785M, a mode, Port 2

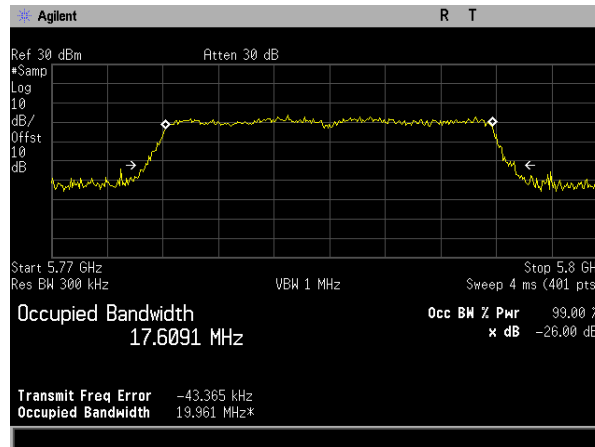


Plot 23. 99 percent Occupied Bandwidth, BW 20M, Ch. 5785M, n mode, Port 1

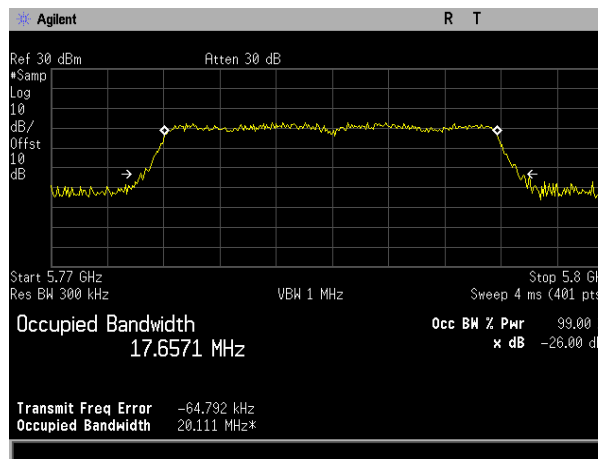


Plot 24. 99 percent Occupied Bandwidth, BW 20M, Ch. 5785M, n mode, Port 2

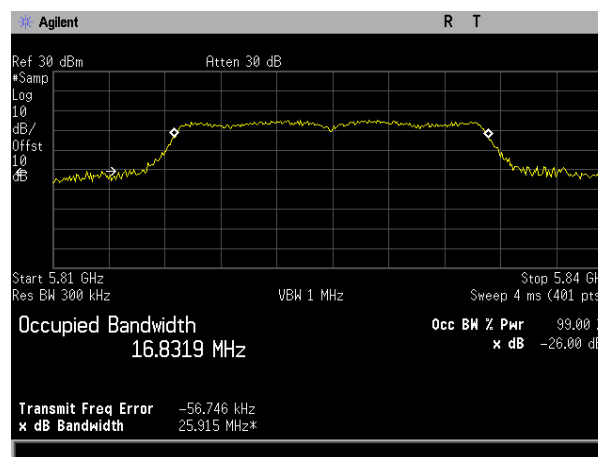


Plot 25. 99 percent Occupied Bandwidth, BW 20M, Ch. 5825M, a mode, Port 1

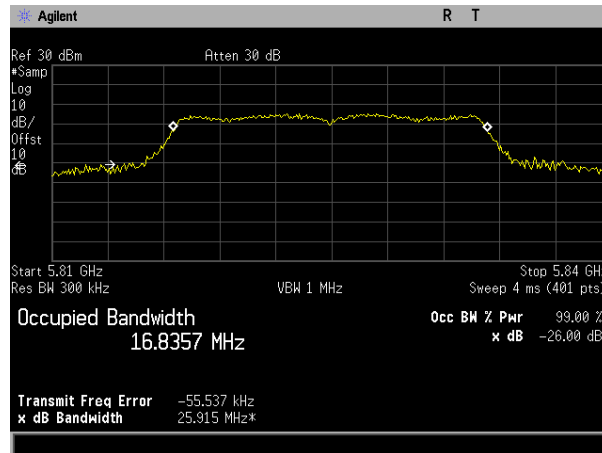


Plot 26. 99 percent Occupied Bandwidth, BW 20M, Ch. 5825M, a mode, Port 2

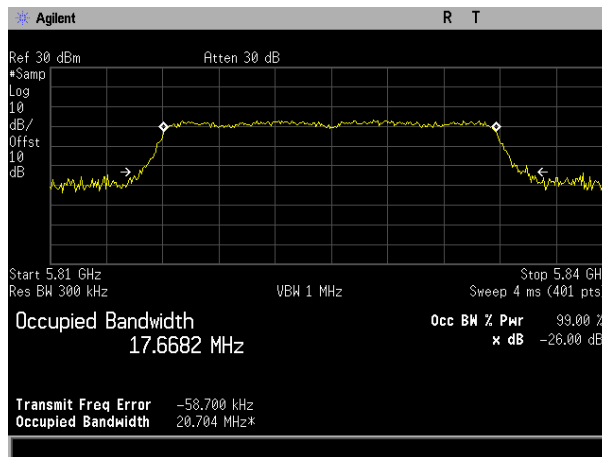


Plot 27. 99 percent Occupied Bandwidth, BW 20M, Ch. 5825M, n mode, Port 1

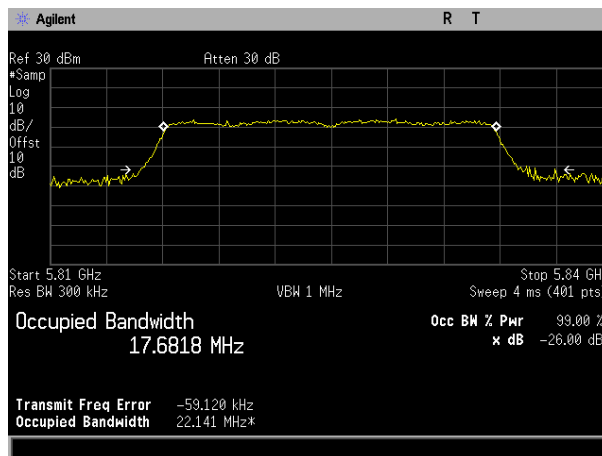


Plot 28. 99 percent Occupied Bandwidth, BW 20M, Ch. 5825M, n mode, Port 2

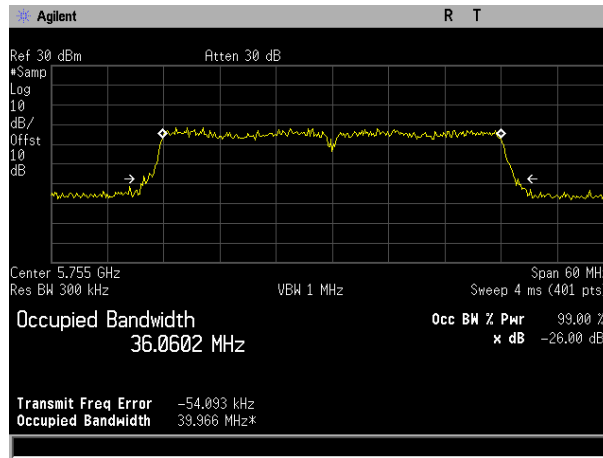

Plot 29. 99 percent Occupied Bandwidth, BW 40M, Ch. 5755M, n mode, Port 1

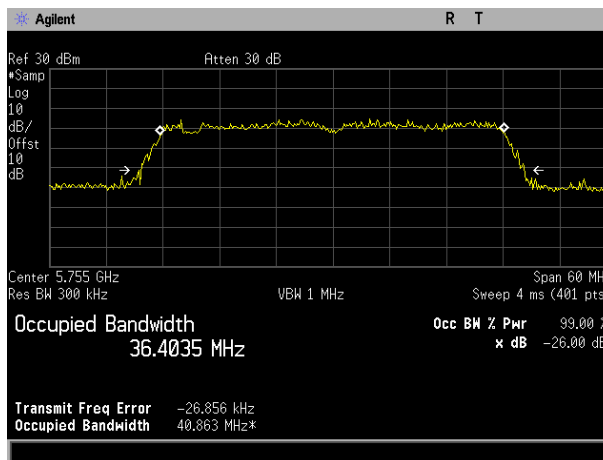


Plot 30. 99 percent Occupied Bandwidth, BW 40M, Ch. 5755M, n mode, Port 2

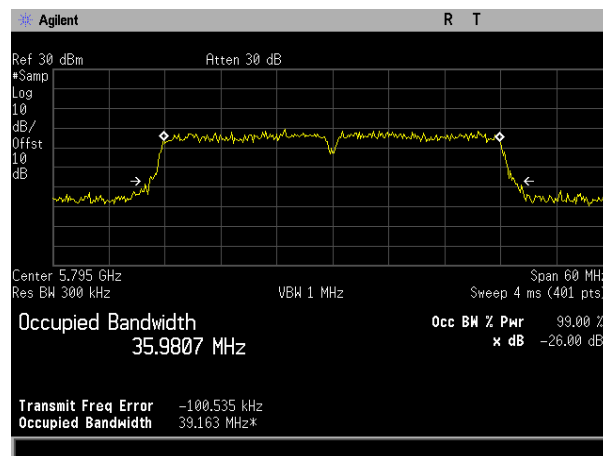

Plot 31. 99 percent Occupied Bandwidth, BW 40M, Ch. 5795M, n mode, Port 1



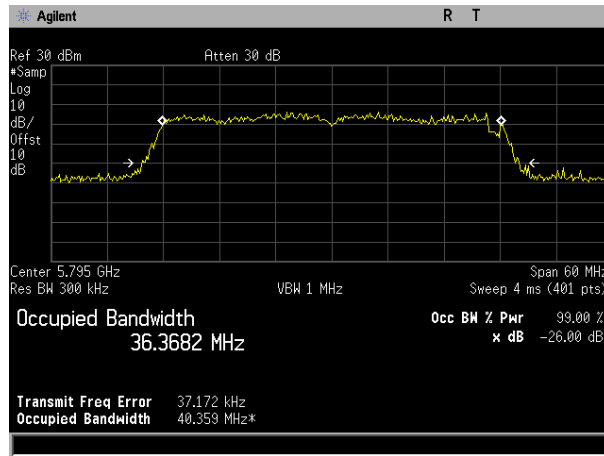

**Plot 32. 99 percent Occupied Bandwidth, BW 40M, Ch. 5795M, n mode, Port 2**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15.407(a)(3) Maximum Conducted Output Power

**Test Requirements:** §15.407(a)(3): For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.


If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

**Test Procedure:** The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according to measurement method SA-1, as described in 789033 D02 General UNII Test Procedures v01.

**Test Results:** The EUT as tested is compliant with the requirements of this section. No anomalies detected. Note that the gain of the Antenna is 0dBi.

**Test Engineer(s):** Djed Mouada


**Test Date(s):** October 21, 2016




Channel	Port 1 (dBm)	Port 2 (dBm)	Sum (dBm)	Limit (dBm)	Margin
Low a_mode	15.23	12.69	17.153	30	12.847
Mid a_mode	13.3	12.59	15.97	30	14.03
High a_mode	13.7	9.74	15.167	30	14.833
Low n_mode (20MHz)	12.68	12.44	15.572	30	14.428
Mid n_mode (20MHz)	13.68	11.64	15.789	30	14.211
High n_mode (20MHz)	13.3	11.97	15.696	30	14.304
Low n_mode (40MHz)	9.61	6.23	11.251	30	18.749
High n_mode (40MHz)	9.27	9.27	12.28	30	17.72

Table 7. Maximum Conducted Output Power, Test Results


**Maximum Conducted Output Power, 20M Bandwidth**

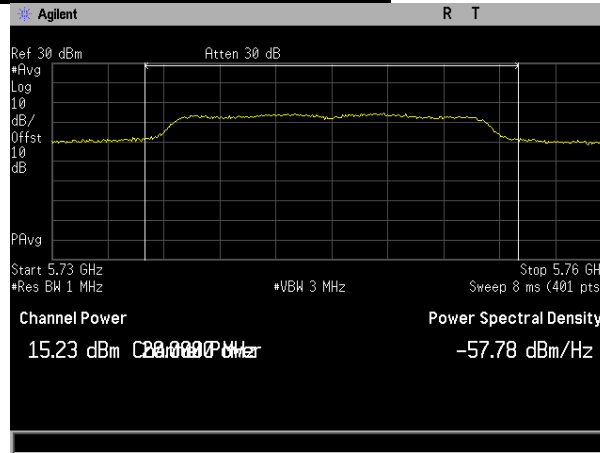


**Plot 33. Maximum Conducted Output Power, BW 20M, Ch. 5745M, a mode, Port 1**

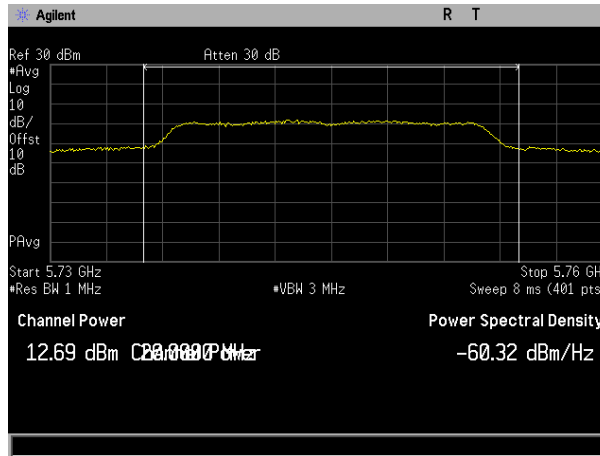


**Plot 34. Maximum Conducted Output Power, BW 20M, Ch. 5745M, a mode, Port 2**

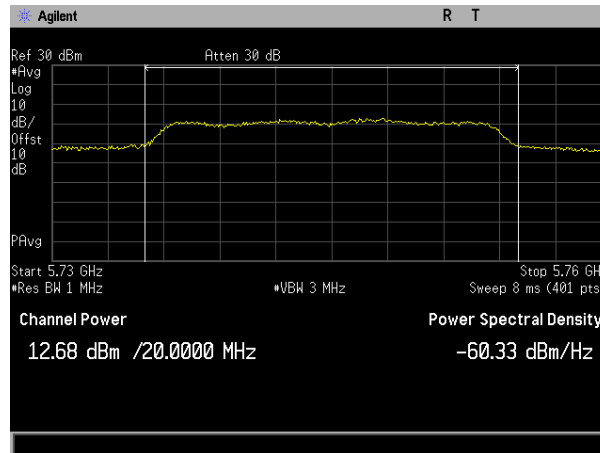


**Plot 35. Maximum Conducted Output Power, BW 20M, Ch. 5745M, n mode, Port 1**

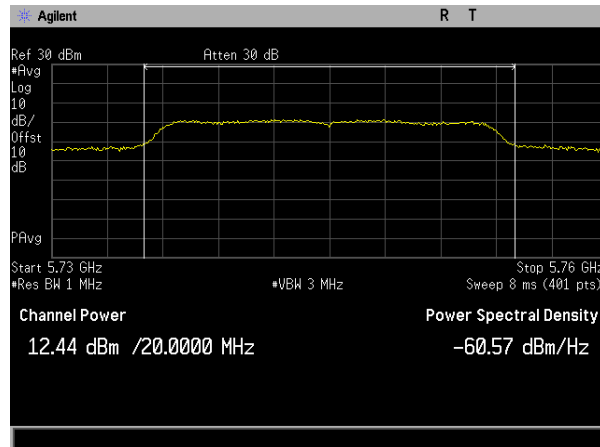


Plot 36. Maximum Conducted Output Power, BW 20M, Ch. 5745M, n mode, Port 2

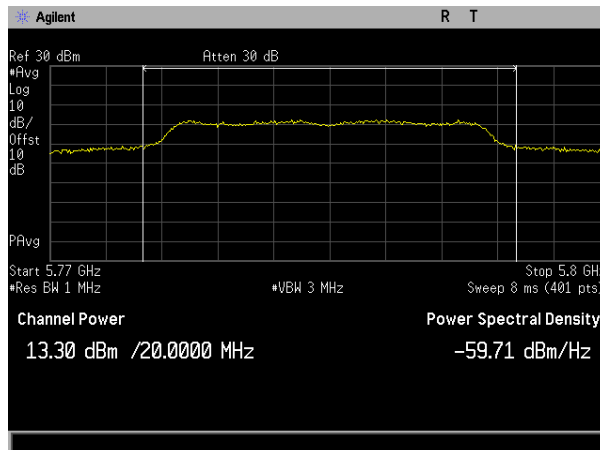


Plot 37. Maximum Conducted Output Power, BW 20M, Ch. 5785M, a mode, Port 1

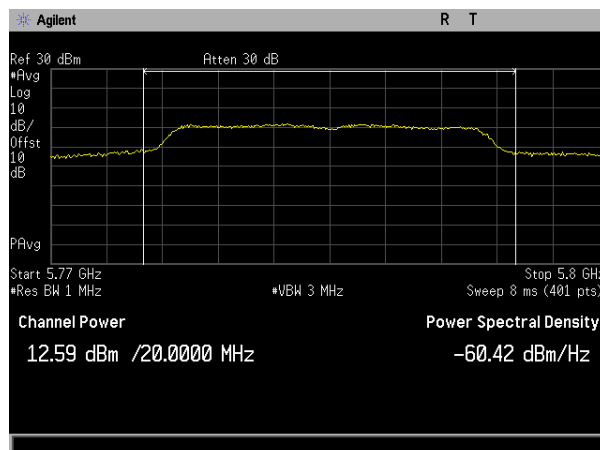


Plot 38. Maximum Conducted Output Power, BW 20M, Ch. 5785M, a mode, Port 2

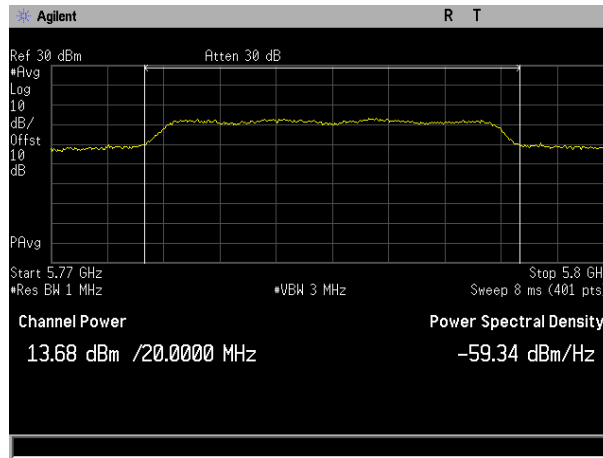


**Plot 39. Maximum Conducted Output Power, BW 20M, Ch. 5785M, n mode, Port 1**

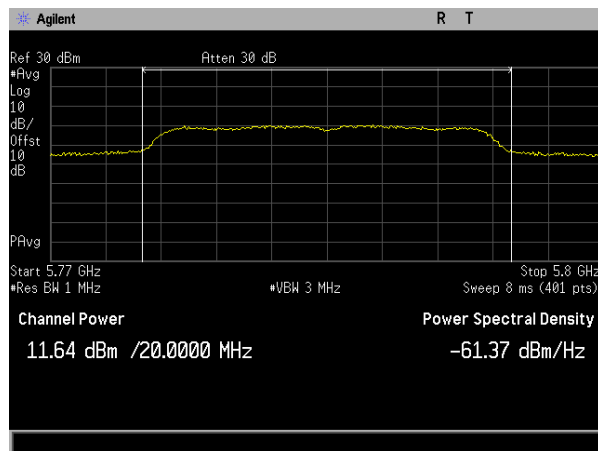


**Plot 40. Maximum Conducted Output Power, BW 20M, Ch. 5785M, n mode, Port 2**

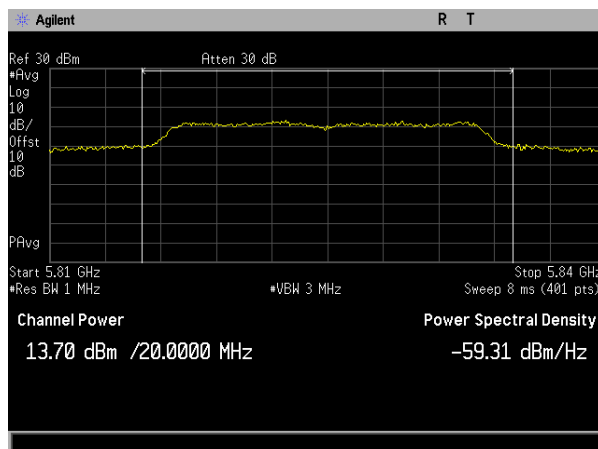


**Plot 41. Maximum Conducted Output Power, BW 20M, Ch. 5825M, a mode, Port 1**

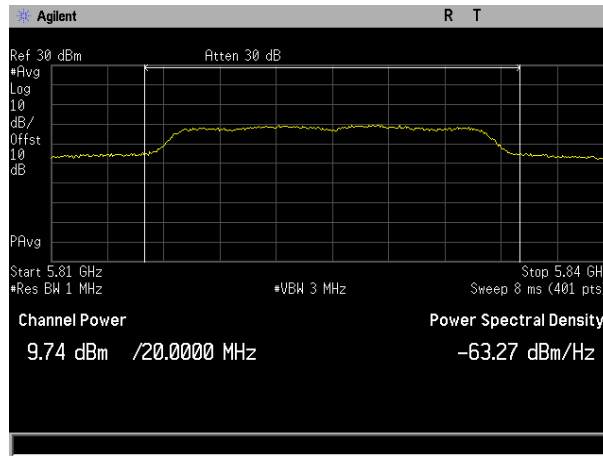

**Plot 42. Maximum Conducted Output Power, BW 20M, Ch. 5825M, a mode, Port 2**

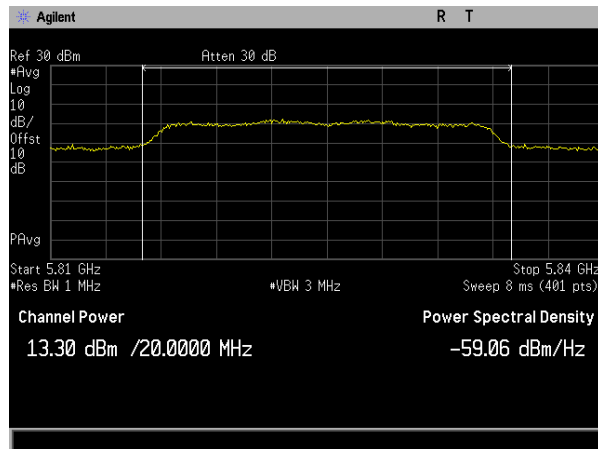


**Plot 43. Maximum Conducted Output Power, BW 20M, Ch. 5825M, n mode, Port 1**

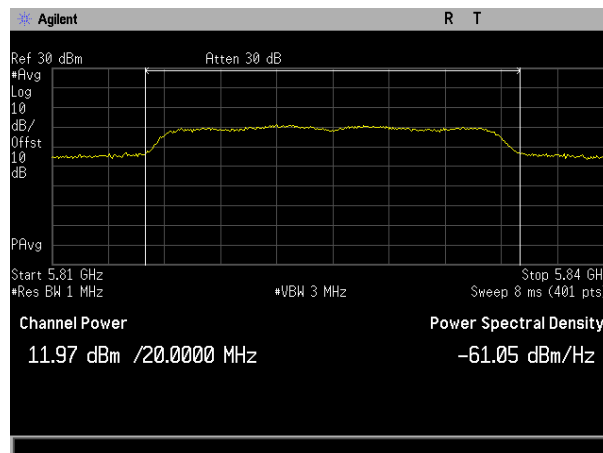


**Plot 44. Maximum Conducted Output Power, BW 20M, Ch. 5825M, n mode, Port 2**


### Maximum Conducted Output Power, 40M Bandwidth

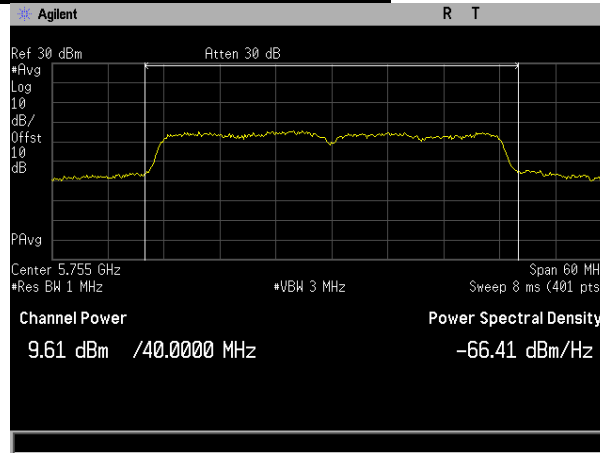


Plot 45. Maximum Conducted Output Power, BW 40M, Ch. 5755M, n mode, Port 1

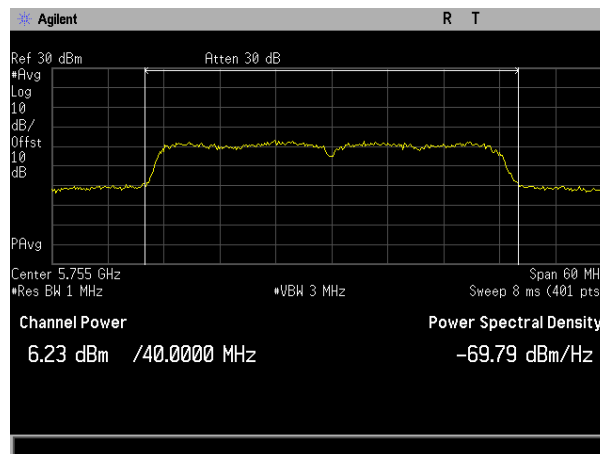

Plot 46. Maximum Conducted Output Power, BW 40M, Ch. 5755M, n mode, Port 2

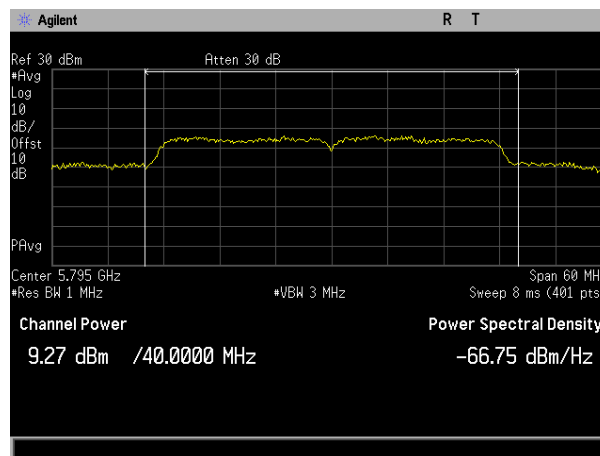

Plot 47. Maximum Conducted Output Power, BW 40M, Ch. 5795M, n mode, Port 1

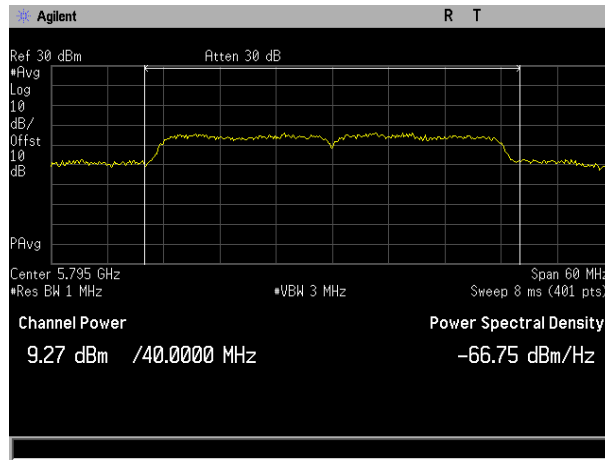

Plot 48. Maximum Conducted Output Power, BW 40M, Ch. 5795M, n mode, Port 2



## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15.407(a)(3) Maximum Power Spectral Density

**Test Requirements:** §15.407(a)(3): In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.


If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

**Test Procedure:** The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according KDB 789033 D02 General UNII Test Procedures v01. A 1 MHz RBW was used during testing, as this provides a worst-case scenario.

**Test Results:** The EUT as tested is compliant with the requirements of this section.

**Test Engineer(s):** Djed Mouada


**Test Date(s):** October 21, 2016




Channel	Port 1 (dBm)	Port 2 (dBm)	Sum (dBm)	Limit (dBm)	Margin
Low a_mode	3.208	1.709	5.533	30	-24
Mid a_mode	0.377	1.157	3.795	30	-26
High a_mode	3.07	-0.012	4.807	30	-25
Low n_mode (20MHz)	1.958	0.063	4.123	30	-26
Mid n_mode (20MHz)	2.701	-1.273	4.164	30	-26
High n_mode (20MHz)	2.916	0.213	4.782	30	-25
Low n_mode (40MHz)	-4.86	-7.984	-3.137	30	-33
High n_mode (40MHz)	-2.591	-7.178	-1.295	30	-31

Table 8. Power Spectral Density, Test Results


**Power Spectral Density, 20M Bandwidth**

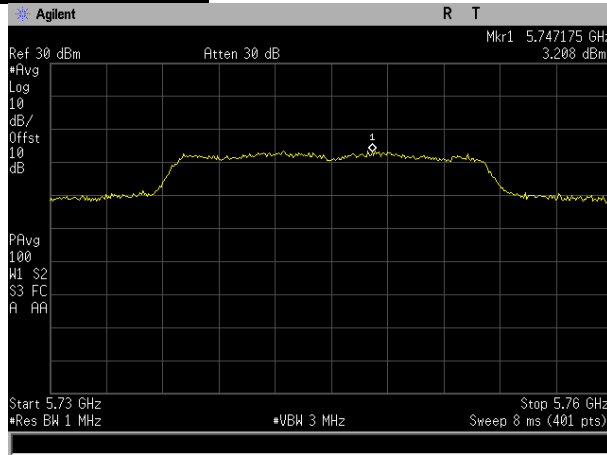


**Plot 49. Power Spectral Density, BW 20M, Ch. 5745M, a mode, Port 1**

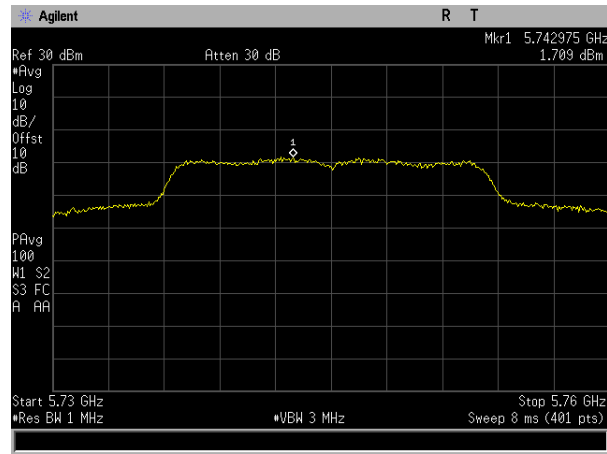


**Plot 50. Power Spectral Density, BW 20M, Ch. 5745M, a mode, Port 2**

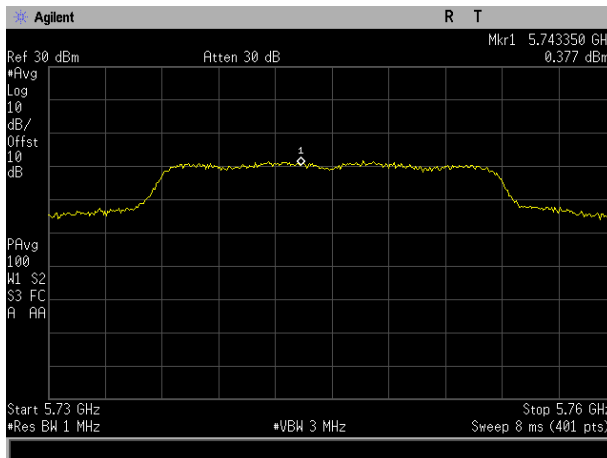


**Plot 51. Power Spectral Density, BW 20M, Ch. 5745M, n mode, Port 1**

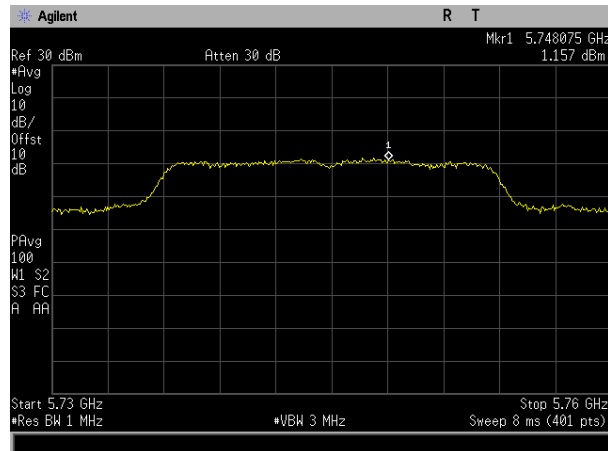


**Plot 52. Power Spectral Density, BW 20M, Ch. 5745M, n mode, Port 2**

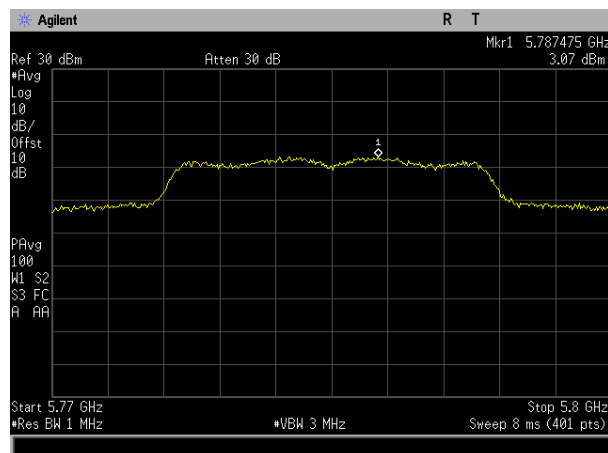


**Plot 53. Power Spectral Density, BW 20M, Ch. 5785M, a mode, Port 1**

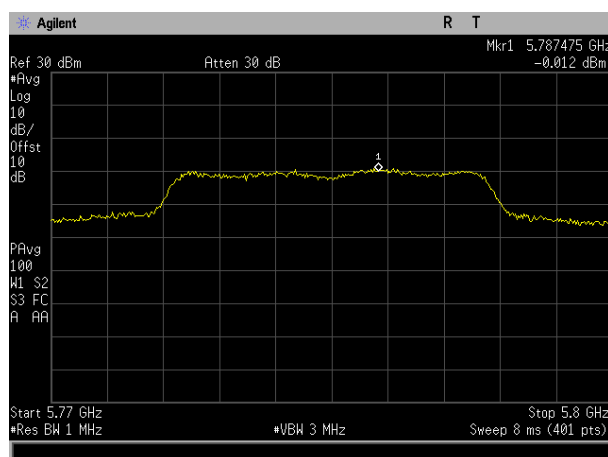


**Plot 54. Power Spectral Density, BW 20M, Ch. 5785M, a mode, Port 2**

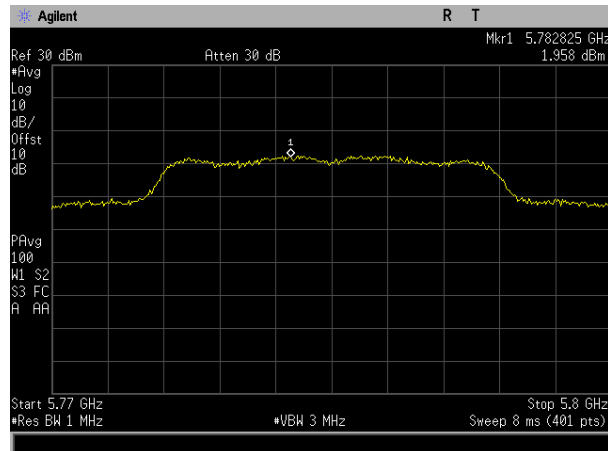


**Plot 55. Power Spectral Density, BW 20M, Ch. 5785M, n mode, Port 1**

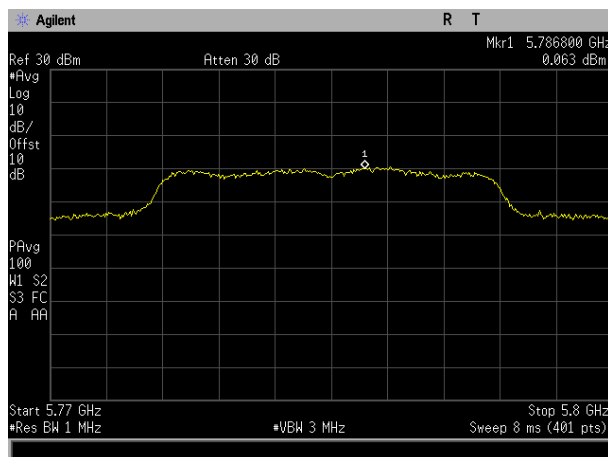


**Plot 56. Power Spectral Density, BW 20M, Ch. 5785M, n mode, Port 2**

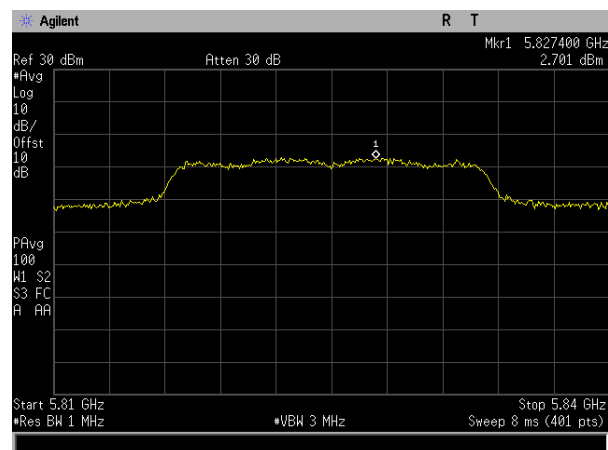


**Plot 57. Power Spectral Density, BW 20M, Ch. 5825M, a mode, Port 1**

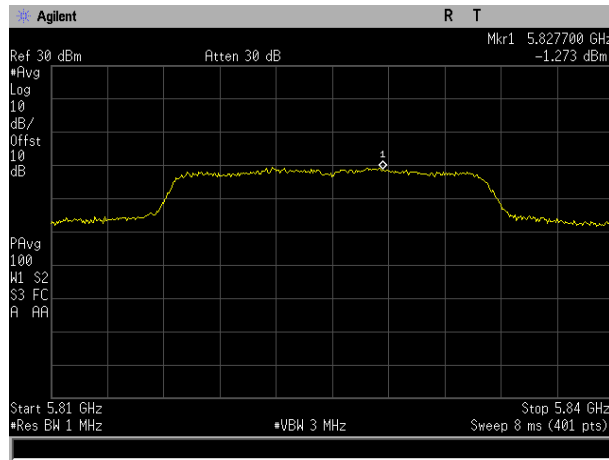

**Plot 58. Power Spectral Density, BW 20M, Ch. 5825M, a mode, Port 2**

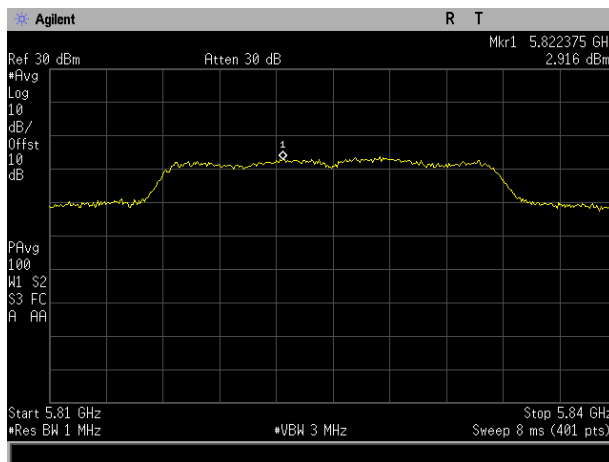


**Plot 59. Power Spectral Density, BW 20M, Ch. 5825M, n mode, Port 1**

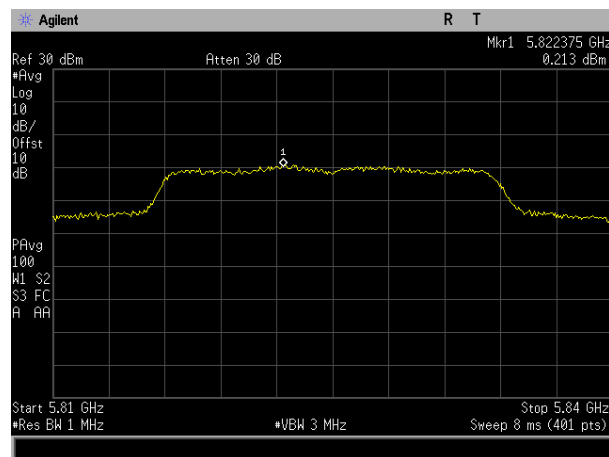


**Plot 60. Power Spectral Density, BW 20M, Ch. 5825M, n mode, Port 2**


**Power Spectral Density, 40M Bandwidth**

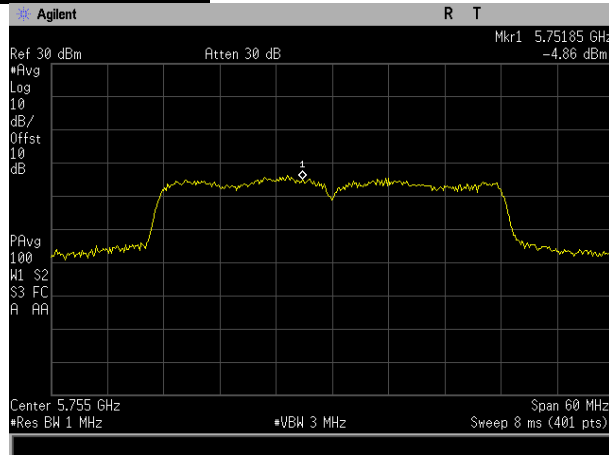


**Plot 61. Power Spectral Density, BW 40M, Ch. 5755M, n mode, Port 1**

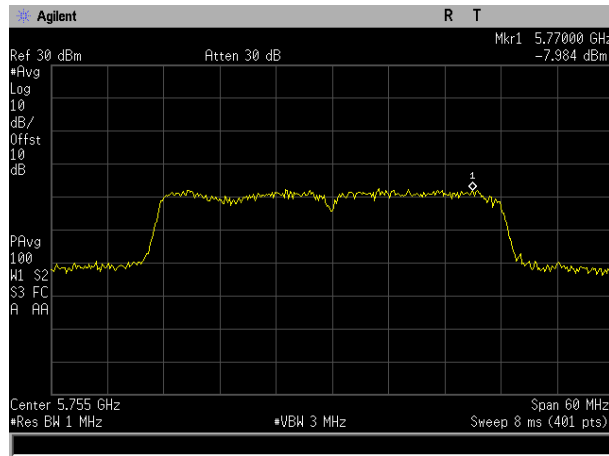

**Plot 62. Power Spectral Density, BW 40M, Ch. 5755M, n mode, Port 2**

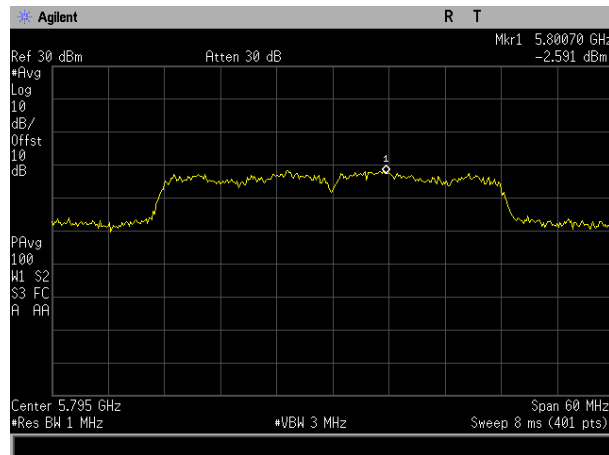

**Plot 63. Power Spectral Density, BW 40M, Ch. 5795M, n mode, Port 1**

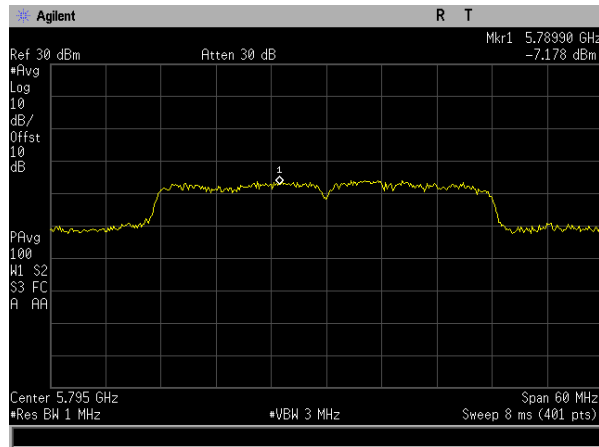

**Plot 64. Power Spectral Density, BW 40M, Ch. 5795M, n mode, Port 2**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15.407(b)(4) & (6 – 7) Undesirable Emissions

**Test Requirements:** § 15.407(b)(4): For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

§ 15.407(b)(6): Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

§ 15.407(b)(7): The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

**Test Procedure:** The EUT was placed on a non-conducting stand on a turntable in a chamber. To find the maximum emission the EUT was set to transmit on low, mid, and high channels. Additionally, the turntable was rotated 360 degrees, the EUT was oriented through its three orthogonal axes, and the receive antenna height was varied in order to maximize emissions.

For frequencies from 30 MHz to 1 GHz, measurements were first made using a peak detector with a 100 kHz resolution bandwidth. Emissions which exceeded the limits were re-measured using a quasi-peak detector with a 120 kHz resolution bandwidth.

Above 1 GHz, measurements were made pursuant the method described in FCC KDB 789033 D02 General UNII Test Procedure New Rules v01. The equation,  $EIRP = E + 20 \log D - 104.8$  was used to convert field strength to EIRP ( $E$  = field strength (dB $\mu$ V/m) and  $D$  = Reference measurement distance).

For emissions above 1 GHz and in restricted bands, measurements of the field strength were made with a peak detector and an average detector and compared with the limits of 15.209.

As an alternative, according to FCC KDB 789033 D02 General UNII Test Procedure New Rules v01, all emissions above 1 GHz that comply with the peak and average limits of 15.209 satisfy the requirements of unwanted emissions in 15.407.

**Test Results:** For below 1 GHz, the EUT was compliant with the requirements of this section. No anomalies detected.


For above 1 GHz, the EUT was compliant with the requirements of this section. No anomalies detected.

**Test Engineer(s):** Djed Mouada


**Test Date(s):** October 21, 2016




**Undesirable Emissions, Band Edge Emission Mask**

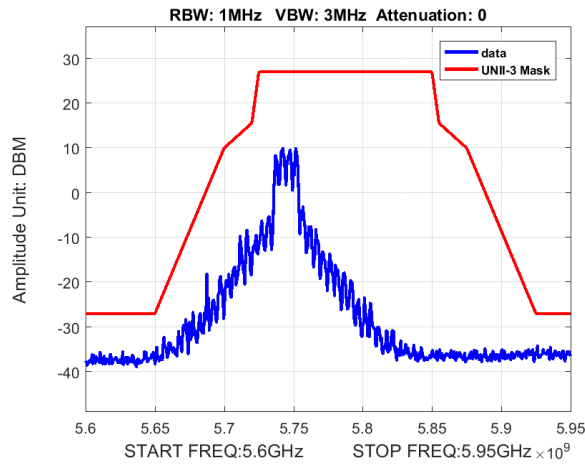


**Plot 65. Undesirable Emissions, Band Edge Emission Mask, BW 20M, Ch. 5745M, a mode**

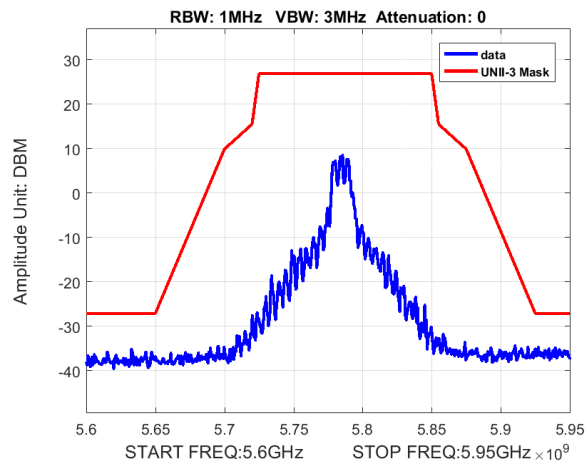


**Plot 66. Undesirable Emissions, Band Edge Emission Mask, BW 20M, Ch. 5785M, a mode**

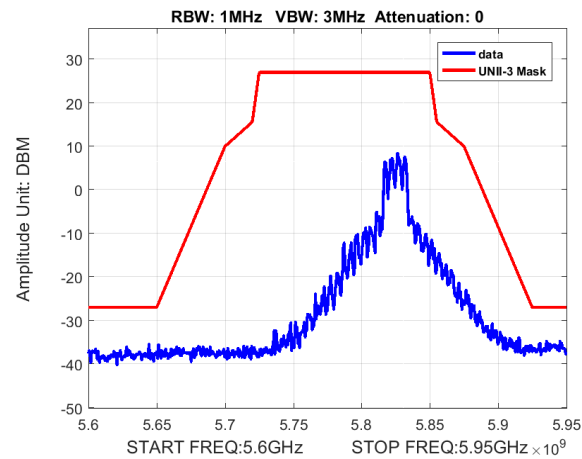


**Plot 67. Undesirable Emissions, Band Edge Emission Mask, BW 20M, Ch. 5825M, a mode**

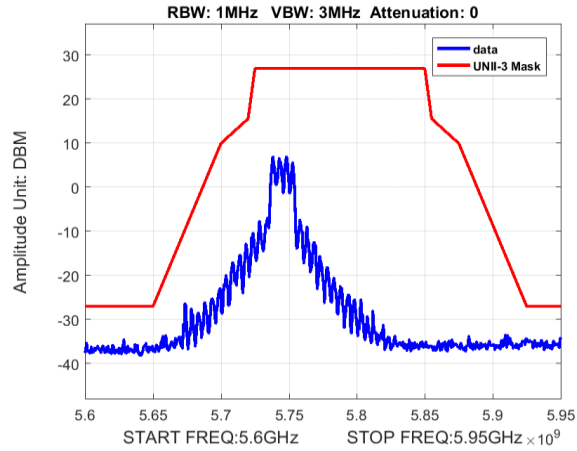


**Plot 68. Undesirable Emissions, Band Edge Emission Mask, BW 20M, Ch. 5745M, n mode**

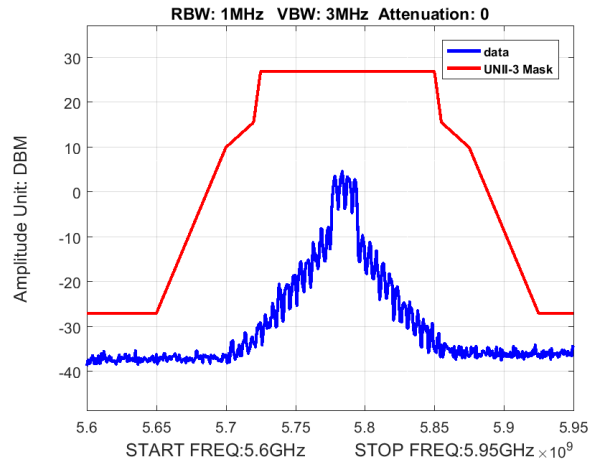


**Plot 69. Undesirable Emissions, Band Edge Emission Mask, BW 20M, Ch. 5785M, n mode**

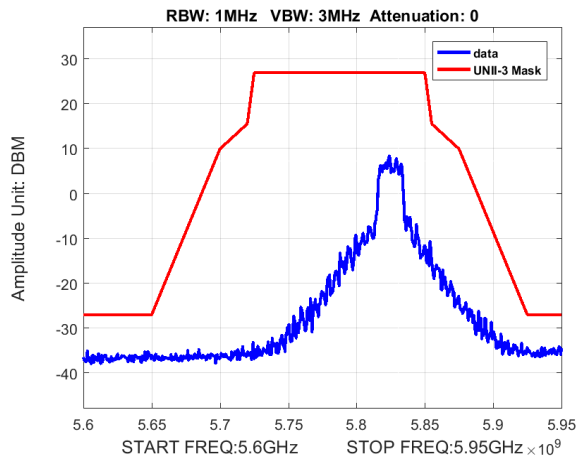

**Plot 70. Undesirable Emissions, Band Edge Emission Mask, BW 20M, Ch. 5825M, n mode**

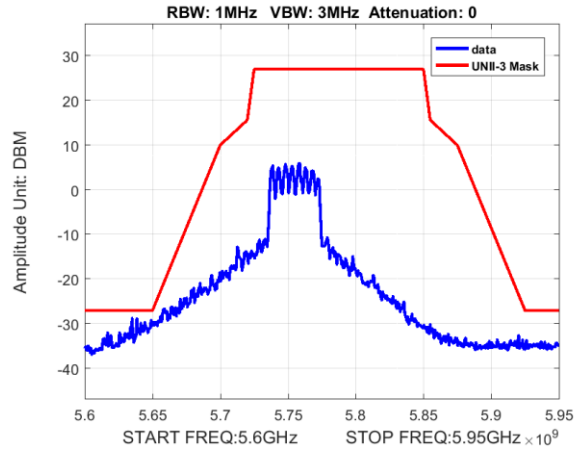


**Plot 71. Undesirable Emissions, Band Edge Emission Mask, BW 40M, Ch. 5755M, n mode**

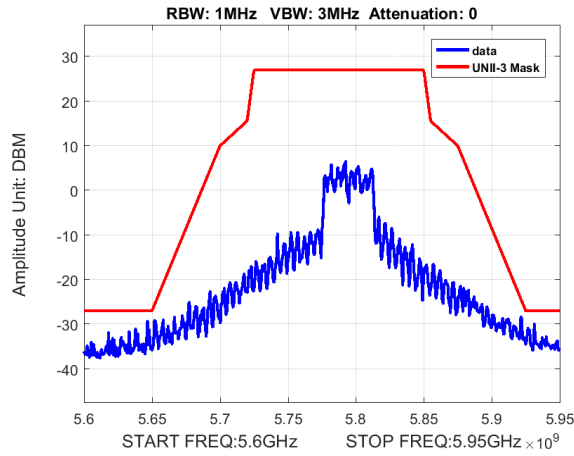


**Plot 72. Undesirable Emissions, Band Edge Emission Mask, BW 40M, Ch. 5795M, n mode**


**Undesirable Emisions, 20M Bandwidth**

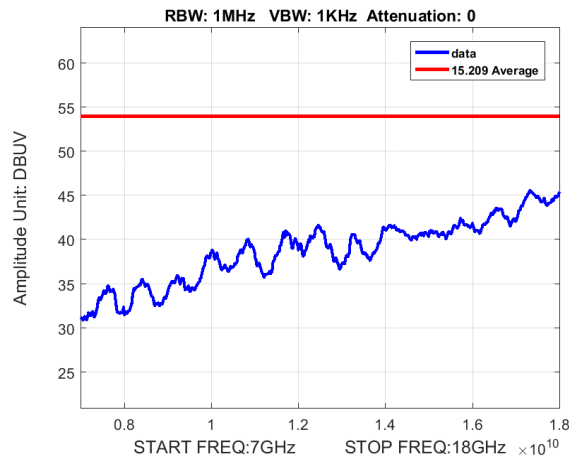


**Plot 73. Average Spurious Emission, 7-18GHz, BW 20M, Ch. 5742M, a mode**

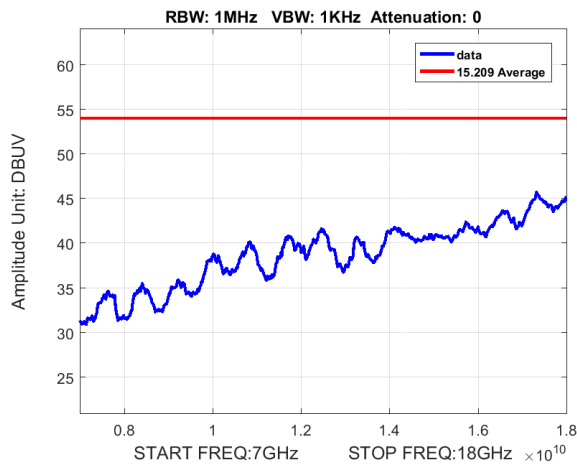


**Plot 74. Average Spurious Emission, 7-18GHz, BW 20M, Ch. 5745M, n mode**

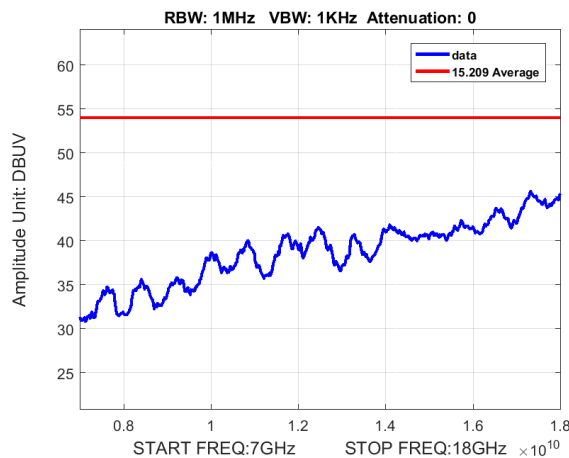


**Plot 75. Average Spurious Emission, 7-18GHz, BW 20M, Ch. 5785M, a mode**

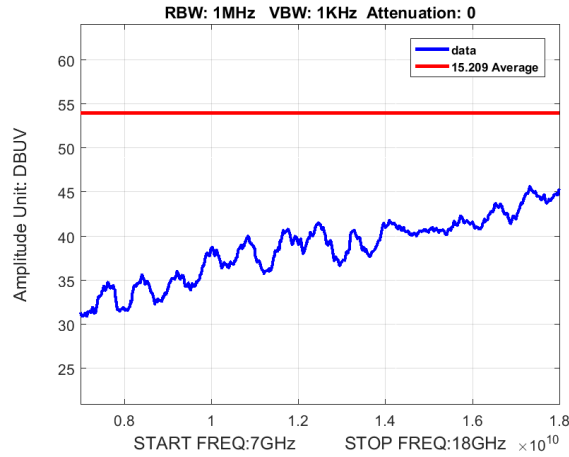


**Plot 76. Average Spurious Emission, 7-18GHz, BW 20M, Ch. 5785M, n mode**

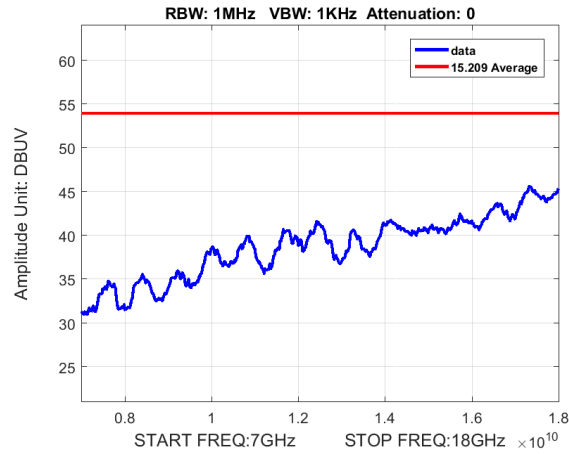


**Plot 77. Average Spurious Emission, 7-18GHz, BW 20M, Ch. 5825M, a mode**

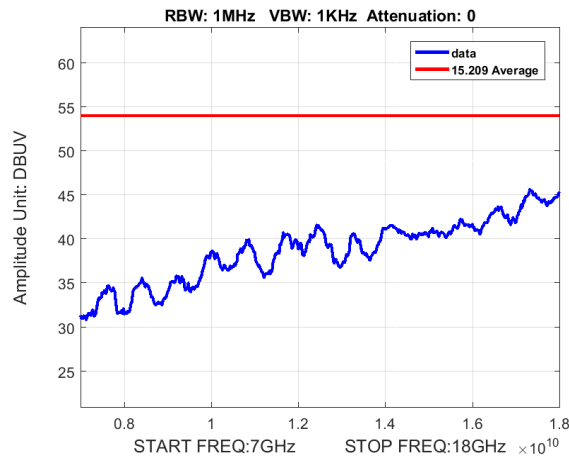


**Plot 78. Average Spurious Emission, 7-18GHz, BW 20M, Ch. 5825M, n mode**

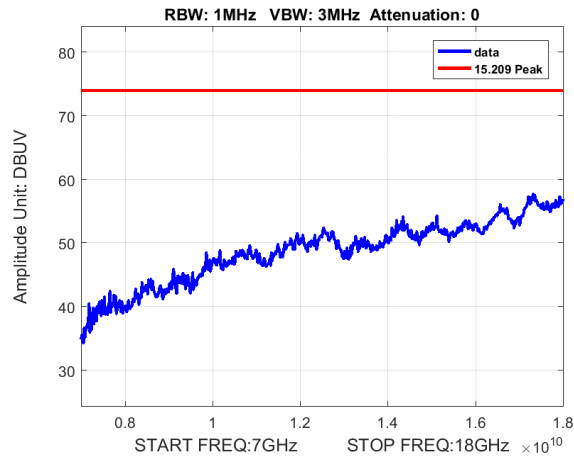


**Plot 79. Peak Spurious Emissions, 7-18GHz, BW 20M, Ch. 5745M, n mode**

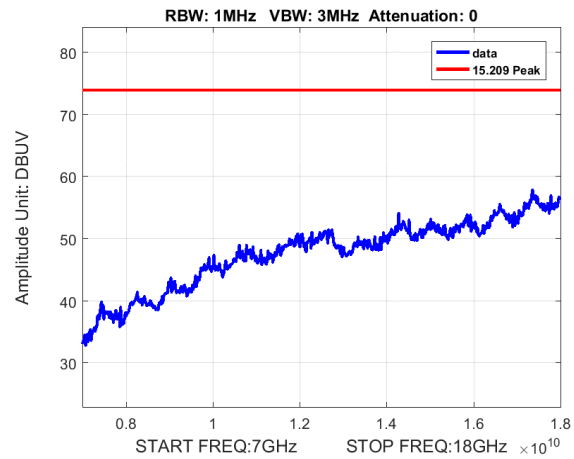


**Plot 80. Peak Spurious Emissions, 7-18GHz, BW 20M, Ch. 5785M, a mode**

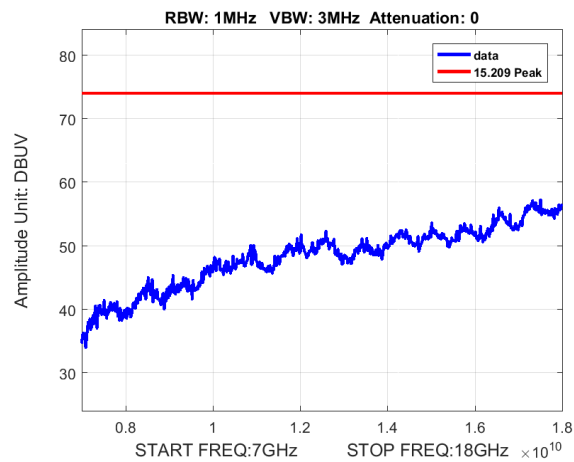


**Plot 81. Peak Spurious Emissions, 7-18GHz, BW 20M, Ch. 5785M, n mode**

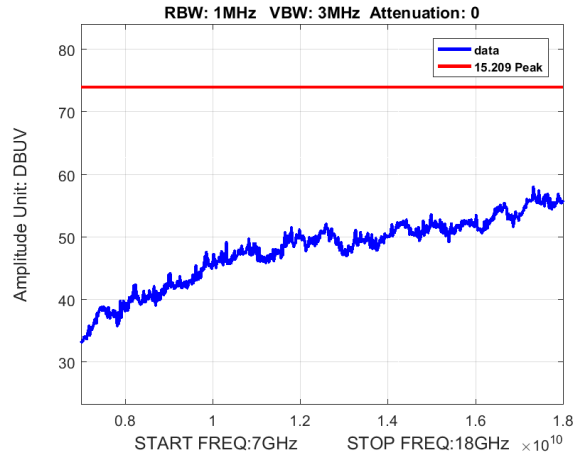


**Plot 82. Peak Spurious Emissions, 7-18GHz, BW 20M, Ch. 5825M, a mode**

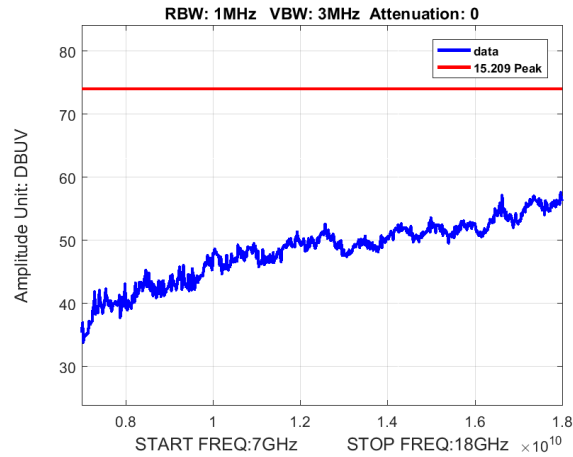


**Plot 83. Peak Spurious Emissions, 7-18GHz, BW 20M, Ch. 5825M, n mode**

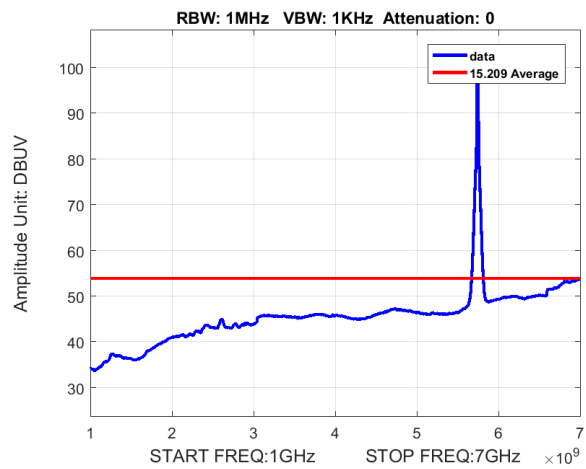


**Plot 84. Average Spurious Emissions, 1-7GHz, BW 20M, Ch. 5745M, a mode**

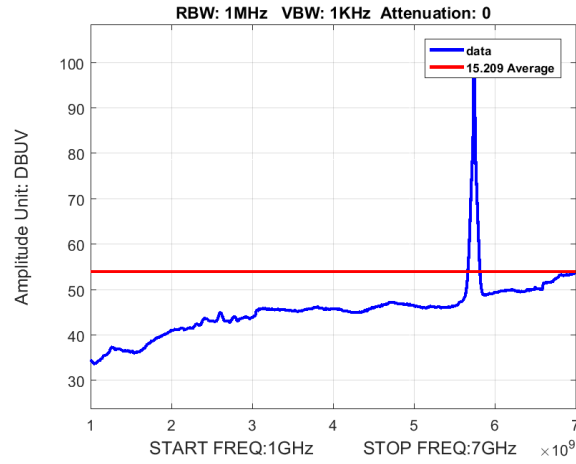

**Plot 85. Average Spurious Emissions, 1-7GHz, BW 20M, Ch. 5745M, n mode**

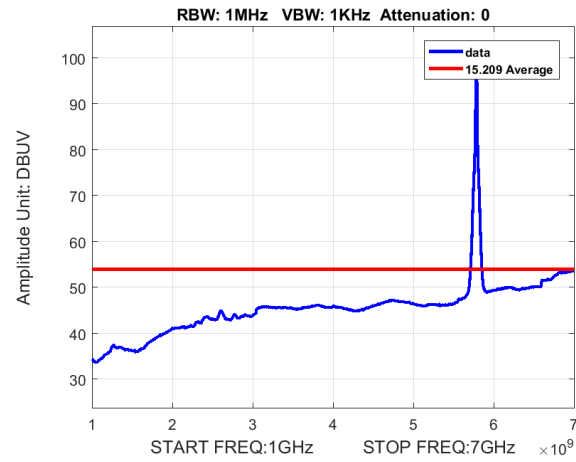


**Plot 86. Average Spurious Emissions, 1-7GHz, BW 20M, Ch. 5785M, a mode**

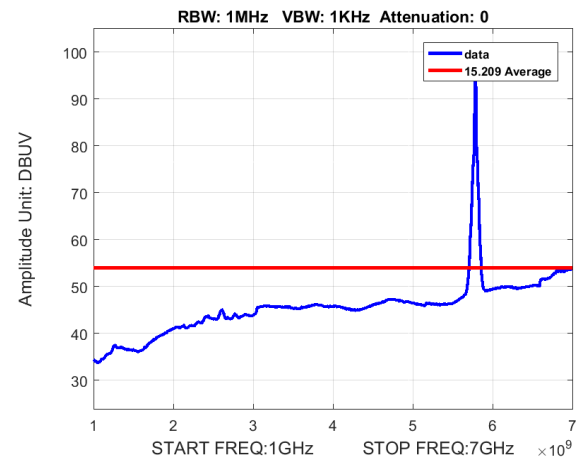


**Plot 87. Average Spurious Emissions, 1-7GHz, BW 20M, Ch. 5785M, n mode**




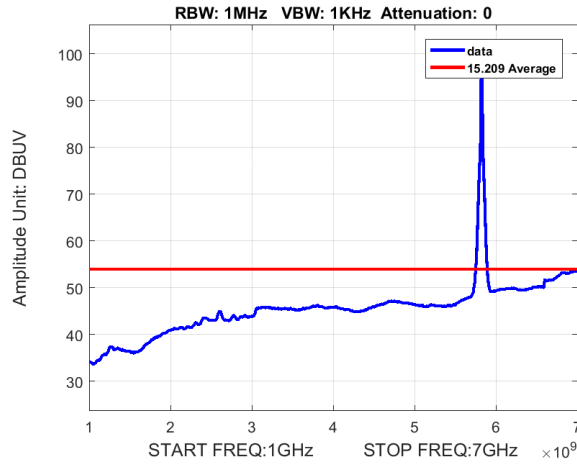


**Plot 88. Average Spurious Emissions, 1-7GHz, BW 20M, Ch. 5825M, a mode**

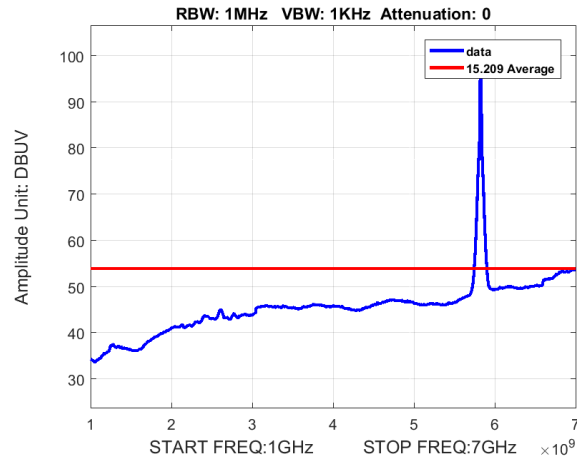


**Plot 89. Average Spurious Emissions, 1-7GHz, BW 20M, Ch. 5825M, n mode**

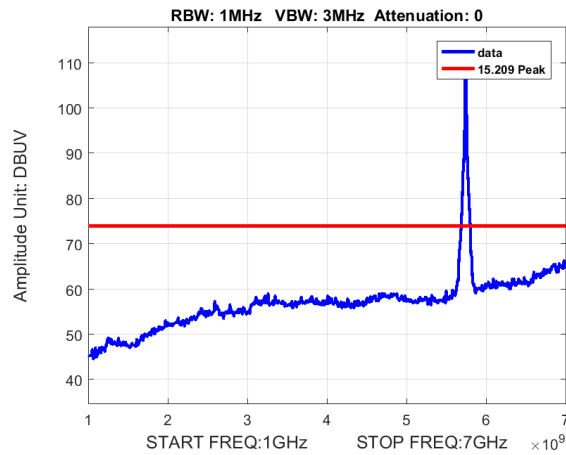


**Plot 90. Peak Spurious Emissions, 1-7GHz, BW 20M, Ch. 5745M, a mode**

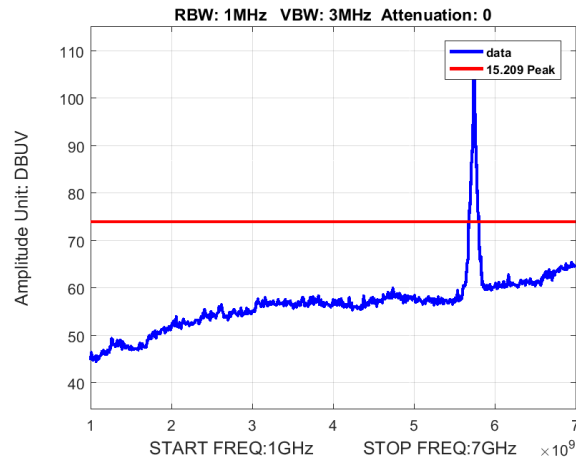


**Plot 91. Peak Spurious Emissions, 1-7GHz, BW 20M, Ch. 5745M, n mode**

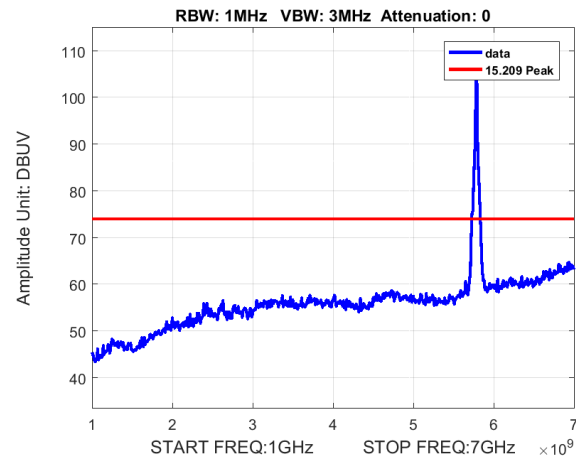


**Plot 92. Peak Spurious Emissions, 1-7GHz, BW 20M, Ch. 5785M, a mode**

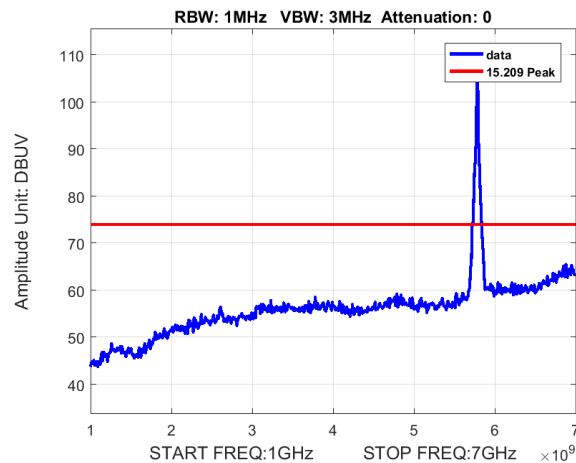

**Plot 93. Peak Spurious Emissions, 1-7GHz, BW 20M, Ch. 5785M, n mode**

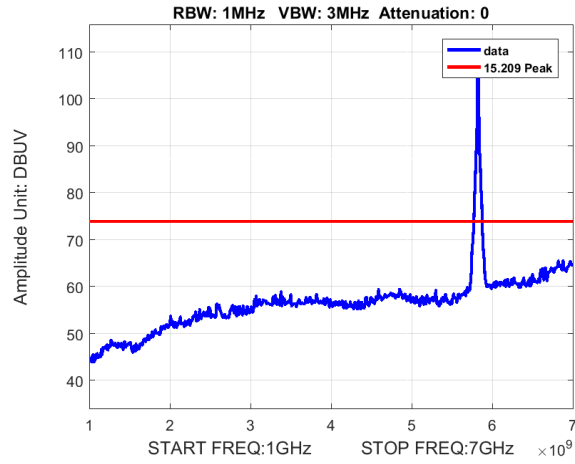


**Plot 94. Peak Spurious Emissions, 1-7GHz, BW 20M, Ch. 5825M, a mode**

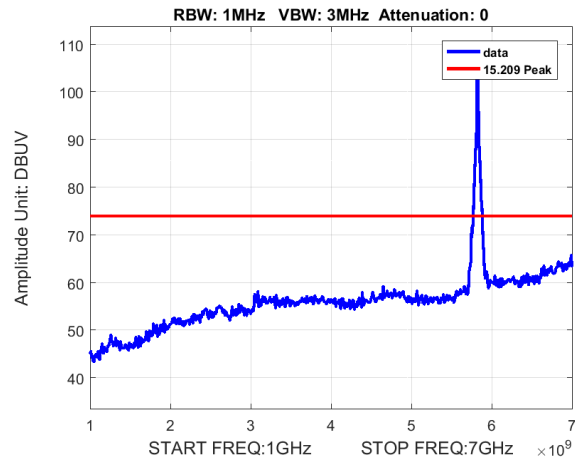


**Plot 95. Peak Spurious Emissions, 1-7GHz, BW 20M, Ch. 5825M, n mode**


**Undesirable Emissions, Bandwidth 40M**

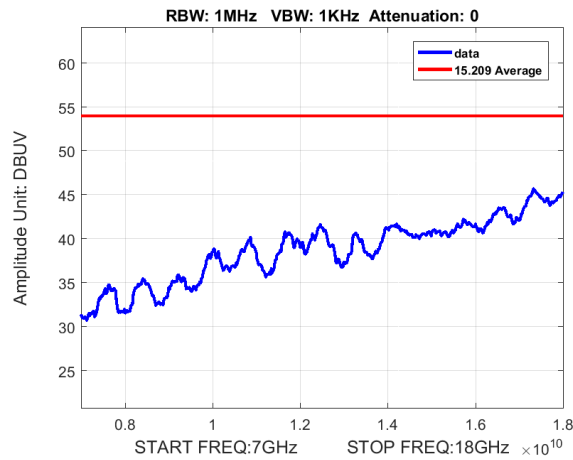


**Plot 96. Average Spurious Emission, 7-18GHz, BW 40M, Ch. 5755M, a mode**

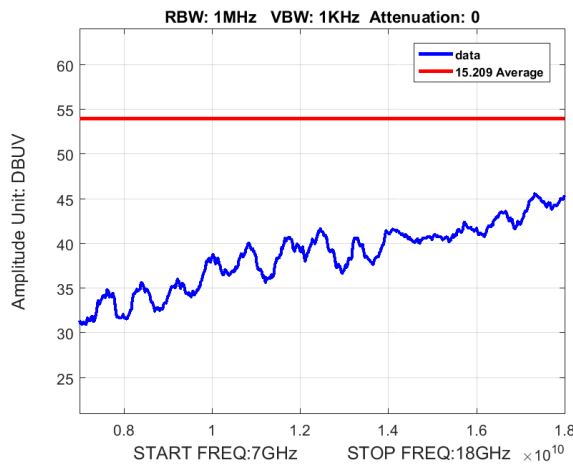


**Plot 97. Average Spurious Emission, 7-18GHz, BW 40M, Ch. 5795M, a mode**

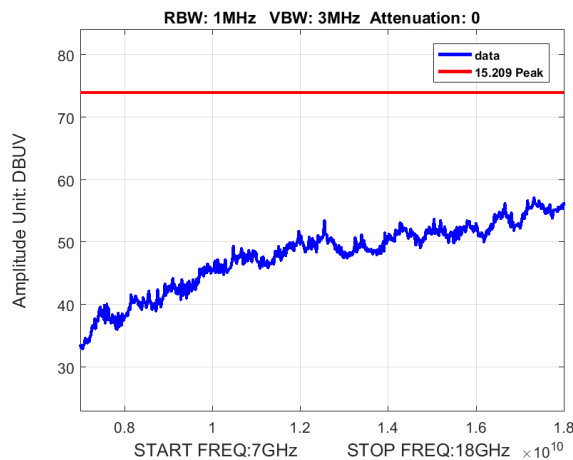


**Plot 98. Peak Spurious Emission, 7-18GHz, BW 40M, Ch. 5755M, n mode**

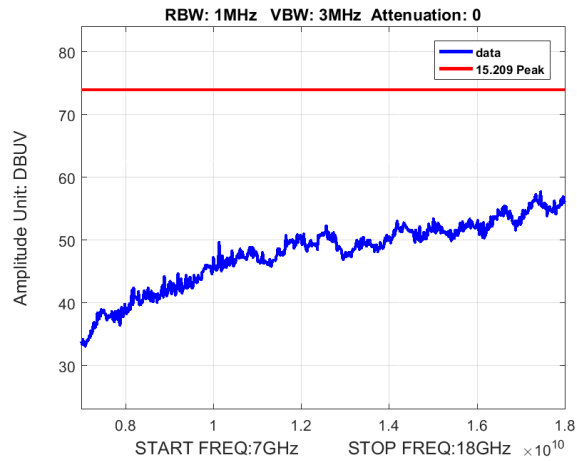


**Plot 99. Peak Spurious Emission, 7-18GHz, BW 40M, Ch. 5795M, n mode**

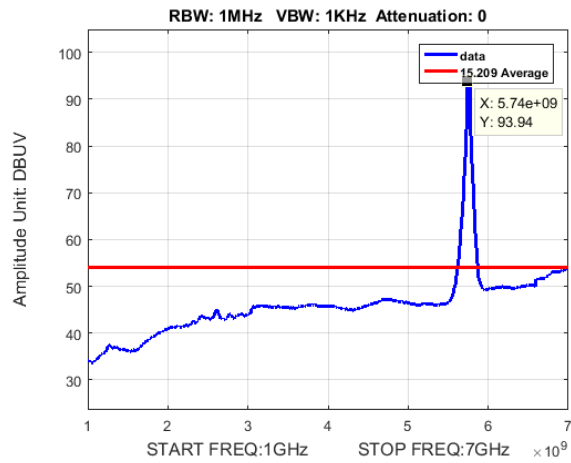


**Plot 100. Average Spurious Emissions, 1-7GHz, BW 40M, Ch. 5755M, n mode**

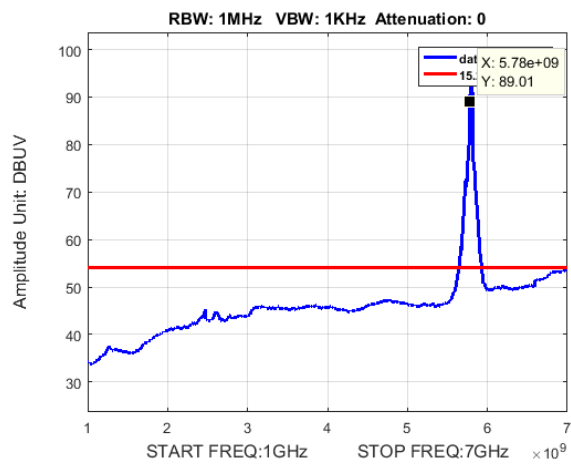


**Plot 101. Average Spurious Emissions, 1-7GHz, BW 40M, Ch. 5795M, n mode**

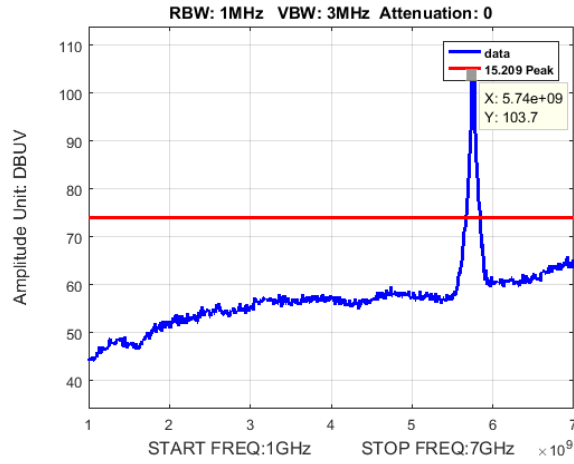


**Plot 102. Peak Spurious Emissions, 1-7GHz, BW 40M, Ch. 5755M, n mode**

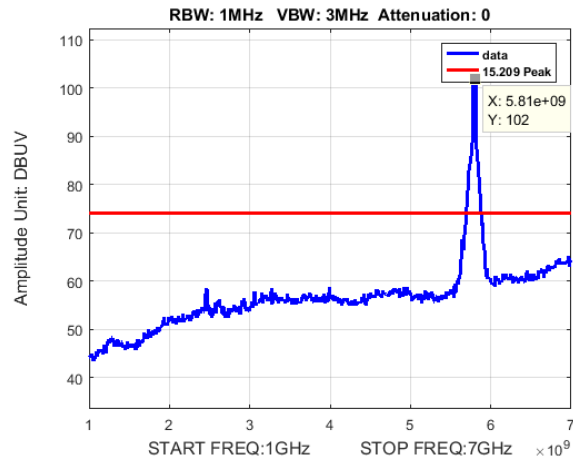

**Plot 103. Peak Spurious Emissions, 1-7GHz, BW 40M, Ch. 5795M, n mode**

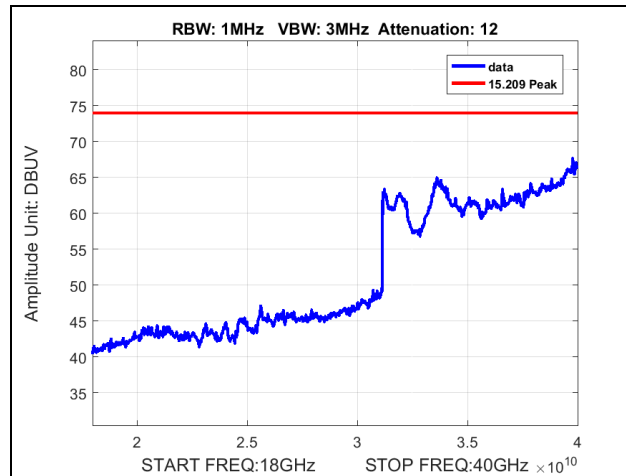


**Plot 104. Spurious Emissions, Low Channel, 18-40GHz, Peak (worst case)**

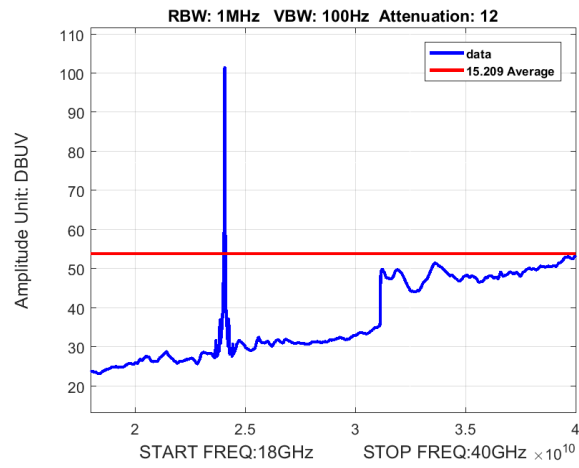


**Plot 105. Spurious Emissions, Low Channel, 18-40GHz, Avg (worst case)**


## Undesirable Emissions below 1GHz

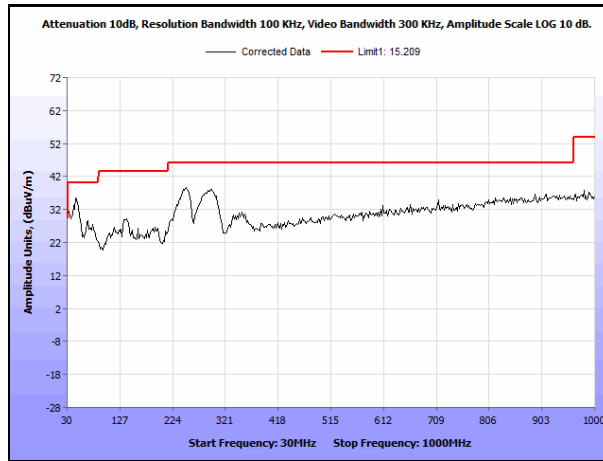

Plot 106. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5745M, a mode

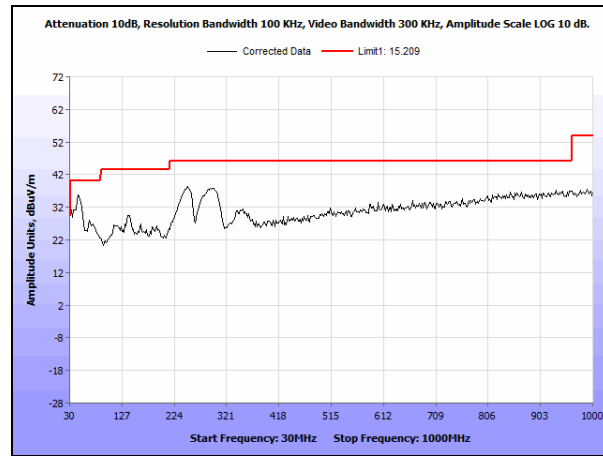


Plot 107. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5745M, n mode

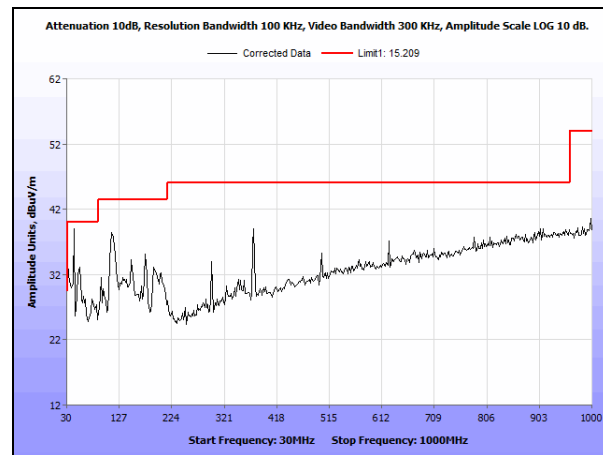


Plot 108. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5755M, n mode




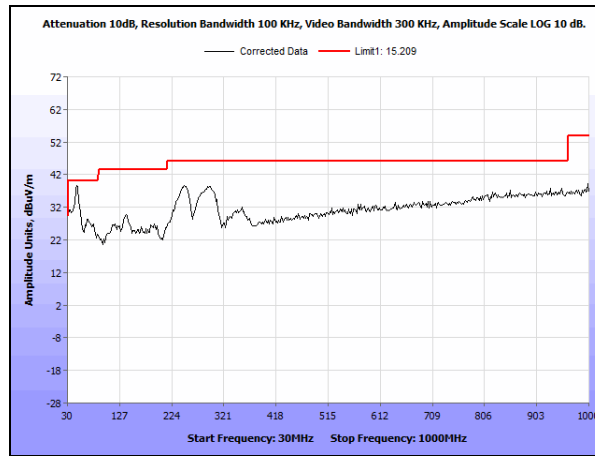


**Plot 109. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5785M, a mode**

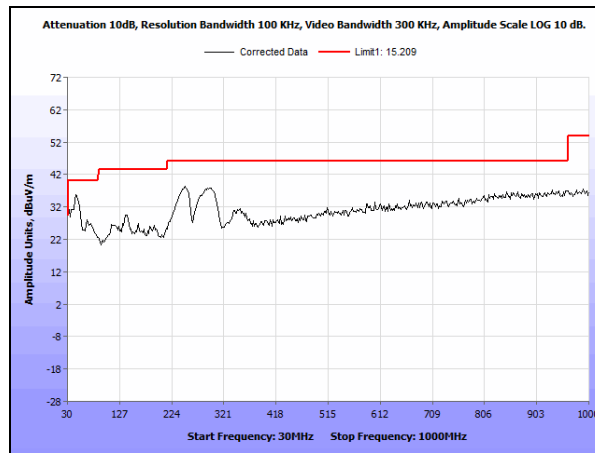


**Plot 110. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5785M, n mode**

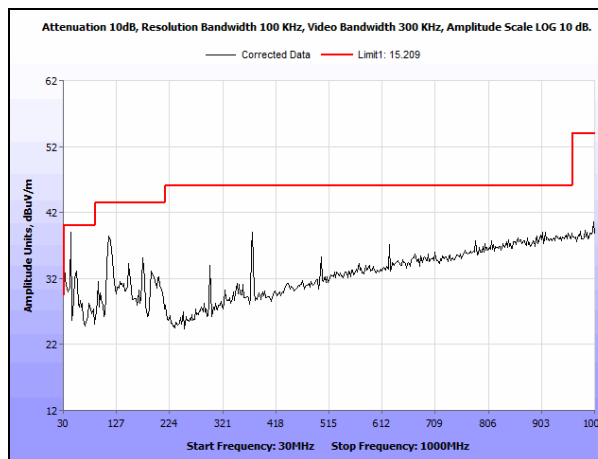

**Plot 111. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5795M, n mode**

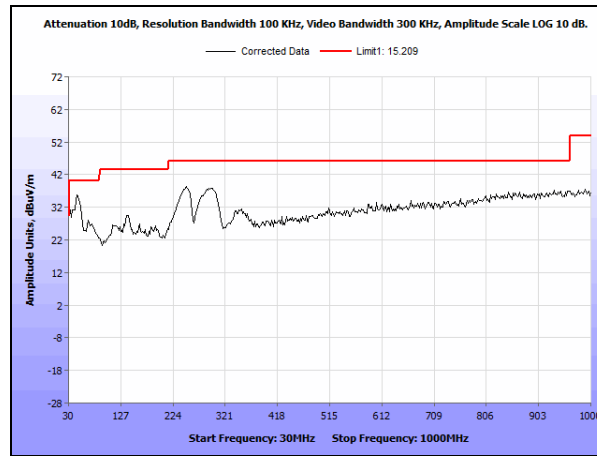

**Plot 112. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5825M, a mode**

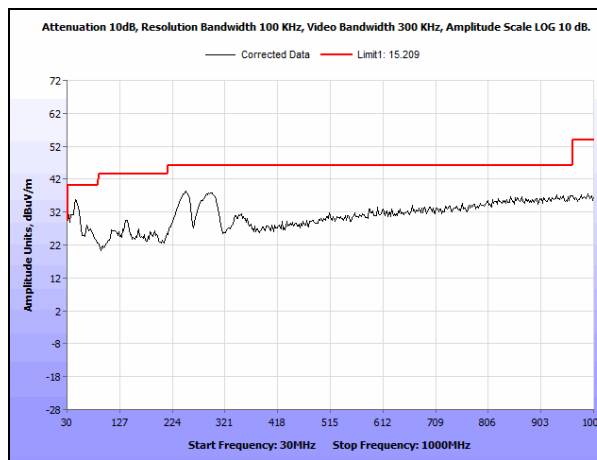


**Plot 113. Radiated Spurious Emissions, 30MHz-1GHz, Ch. 5825M, n mode**

## Undesirable Emissions Test Setup



**Photograph 1. Undesirable Emissions/Radiated Spurious Emissions, Test Setup, Below 1GHz**

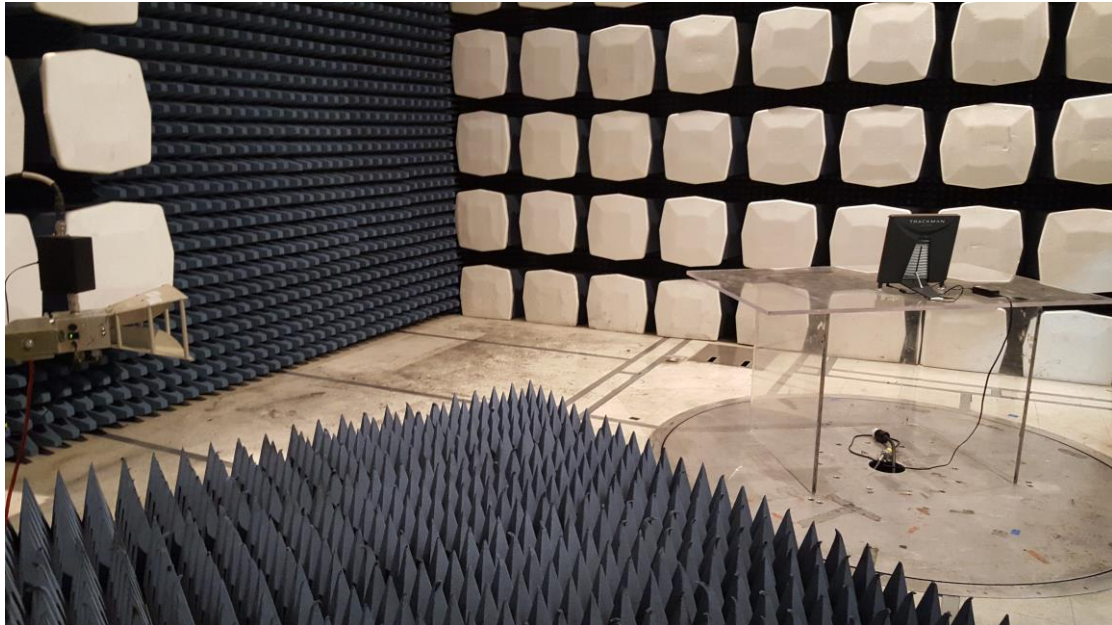

**Photograph 2. Undesirable Emissions/Radiated Spurious Emissions, Test Setup, Above 1GHz**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(b)(6) Conducted Emissions

**Test Requirement(s):** § 15.407 (b)(6): Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

§ 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Sigma$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 – 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

**Table 9. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:** The EUT was placed on a non-metallic table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz". Scans were performed with the transmitter on.

**Test Results:** The EUT was compliant with requirements of this section.


**Test Engineer(s):** Djed Mouada

**Test Date(s):** October 21, 2016

**Conducted Emissions - Voltage, AC Power, Phase Line (120VAC)**

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.157	37.96	0	37.96	79	-41.04	27.65	0	27.65	66	-38.35
0.365	35.15	0	35.15	79	-43.85	31.57	0	31.57	66	-34.43
7.324	34.16	0	34.16	73	-38.84	31.66	0	31.66	60	-28.34
2.668	22.82	0	22.82	73	-50.18	19.87	0	19.87	60	-40.13
14.39	36.35	0.12	36.47	73	-36.53	30.9	0.12	31.02	60	-28.98
20.2	32.75	0.16	32.91	73	-40.09	27.47	0.16	27.63	60	-32.37

**Table 10. Conducted Emissions - Voltage, AC Power, Phase Line (120VAC)**

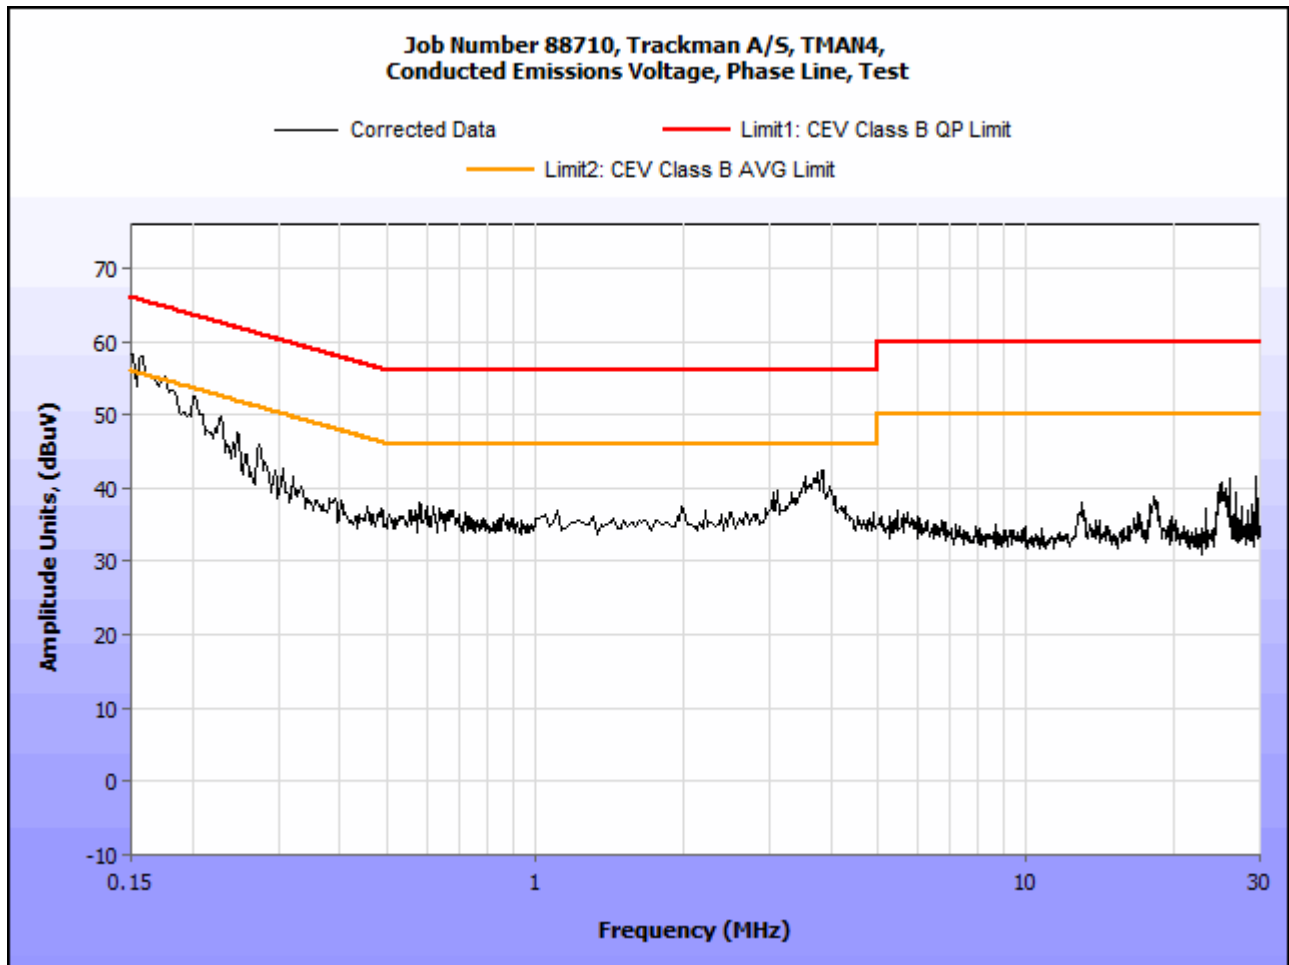


**Plot 114. Conducted Emission, Phase Line Plot**

### Conducted Emissions - Voltage, AC Power, Neutral Line (120VAC)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.26	43.22	0	43.22	61.43	-18.21	19.18	0	19.18	51.43	-32.25
0.574	42.17	0	42.17	56	-13.83	40.26	0	40.26	46	-5.74
1.287	29.4	0	29.4	56	-26.6	29.24	0	29.24	46	-16.76
13.2	29.17	0.11	29.28	60	-30.72	19.16	0.11	19.27	50	-30.73
15.97	32.15	0.12	32.27	60	-27.73	32.49	0.12	32.61	50	-17.39
20.322	32.95	0.17	33.12	60	-26.88	27.14	0.17	27.31	50	-22.69

Table 11. Conducted Emissions - Voltage, AC Power, Neutral Line (120VAC)

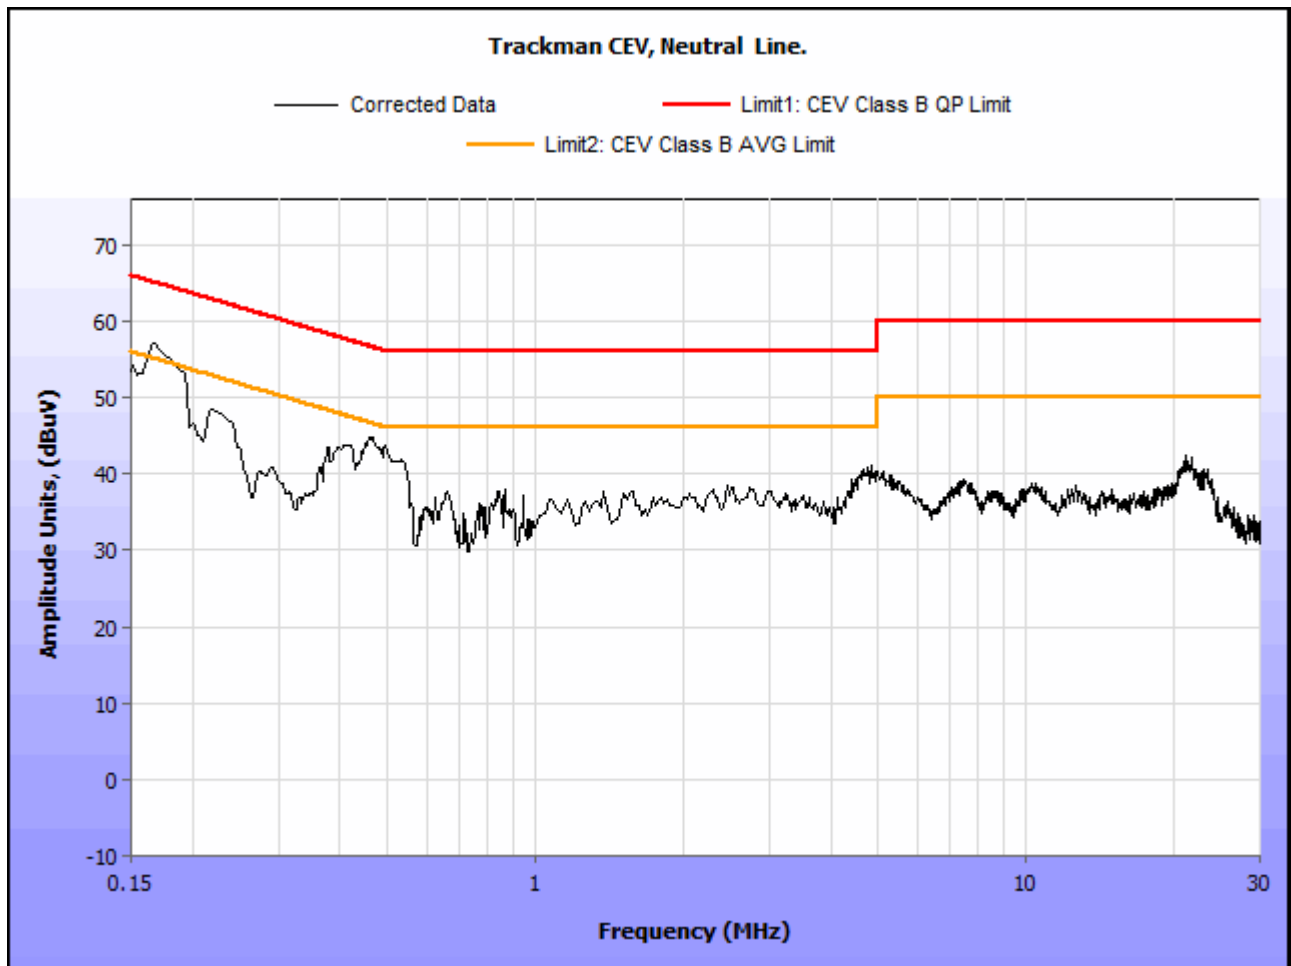

Plot 115. Conducted Emission, Neutral Line Plot

### Conducted Emission Limits Test Setup



**Photograph 3. Conducted Emissions, Test Setup**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(c) Automatic Discontinue of Transmission

**Test Requirement(s):** § 15.207 (c): The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

**Test Results:** The EUT was compliant with the requirement of this section.

**Test Engineer(s):** Djed Mouada

**Test Date(s):** October 21, 2016



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15. 407(e) 6 dB Bandwidth


**Test Requirements:** § 15.407(e): Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

**Test Procedure:** The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth,  $VBW > RBW$ . The 6 dB Bandwidth was measured and recorded.


**Test Results** The 6 dB Bandwidth was compliant with the requirements of this section. No anomalies detected.

**Test Engineer(s):** Djed Mouada


**Test Date(s):** October 21, 2016




**6dB Occupied Bandwidth, 20M Bandwidth**

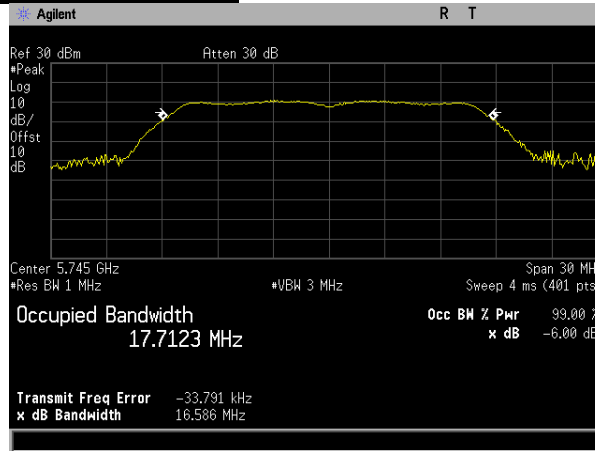

**Plot 116. 6dB Occupied Bandwidth, BW 20M, Ch. 5745M, a mode**

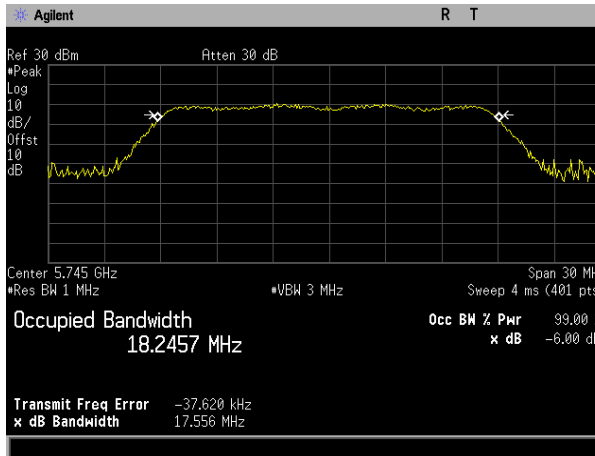

**Plot 117. 6dB Occupied Bandwidth, BW 20M, Ch. 5745M, n mode**

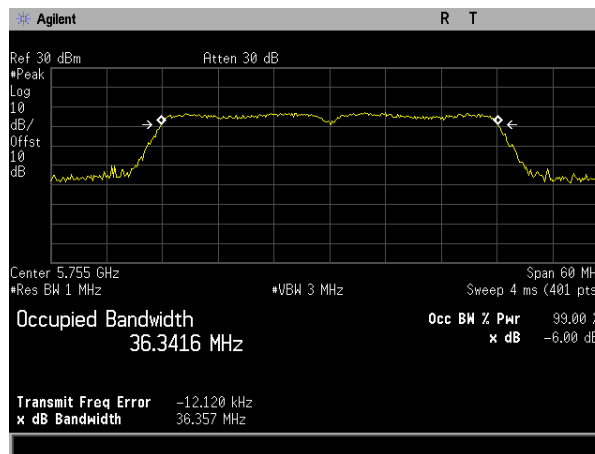

**Plot 118. 6dB, Occupied Bandwidth, BW 40, Ch. 5755M, n mode**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(g) Frequency Stability

**Test Requirements:** Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

**Test Procedure:** The EUT was connected directly to a spectrum analyzer through an attenuator. The 1<sup>st</sup> trace of the Spectrum Analyzer was taken at ambient conditions and used as a reference. A 2<sup>nd</sup> trace was used to show the drift of the carrier at extreme conditions. A delta marker was used to find the drift at a given extreme condition.

**Test Results:** The EUT was compliant with the requirements of this section.

**Test Engineer(s):** Djed Mouada

**Test Date(s):** October 21, 2016

DUT Frequency (MHz)	Temperature(°C)	Frequency (MHz)	Left -26dBc (MHz)	Right -26dBc (MHz)
5510	0	5510.4528	5487.6122	5533.2934
5510	20	5510.4452	5487.5967	5533.2938
5510	40	5510.4513	5487.6095	5533.293
5210	0	5209.9949	5187.6876	5232.3022
5210	20	5209.7205	5186.9998	5232.4413
5210	40	5210.4655	5187.61	5233.3211
5530	0	5529.9034	5506.9013	5552.9054
5530	20	5529.5097	5505.6299	5553.3896
5530	40	5529.506	5505.623	5553.389
5825	0	5824.7205	5801.9998	5847.4413
5825	20	5824.6934	5801.9446	5847.4422
5825	40	5824.4476	5801.444	5847.4513

**Table 12. Frequency Stability, Test Results**

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T6658	SPECTRUM ANALYZER	AGILENT	E4407B	12/09/2015	10/22/2017
1T4497	SIGNAL GENERATOR	AGILENT TECHNOLOGIES	E4432B	10/06/2014	2/10/2018
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	10/08/2015	04/08/2017
1T4771	PSA SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4446A	11/25/2014	05/25/2016
1T4300B	SEMI-ANECHOIC 3M CHAMBER # 1 D (2043A-1) (IC)	EMC TEST SYSTEMS	NONE	01/11/2015	01/11/2018
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	10/29/2014	10/29/2016
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	2/26/2016	8/26/2017
1T4666	HARMONIC MIXER	HP	11970Q	11/3/2016	5/3/2018
1T4745	ANTENNA, HORN	ETS-LINDGREN	3116	1/21/2017	7/21/2018
1T4752	PRE-AMPLIFIER	MITEQ	JS44-18004000-35-8P	SEE NOTE	
1T4855	WR-06 HARMONIC MIXER WITH HORN ANTENNA	OML, INC.	M06HWD	SEE NOTE	
1T4853	WR-15 HARMONIC MIXER WITH HORN ANTENNA	OML, INC.	M15HWA	SEE NOTE	
1T4854	WR-10 HARMONIC MIXER WITH HORN ANTENNA	OML, INC.	M10HWA	SEE NOTE	
1T4857	DIPLEXER	OML, INC.	DPL26 DIPLEXER	SEE NOTE	
1T4666	HARMONIC MIXER	HP	11970Q	11/3/2016	5/3/2018
331T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	

**Table 13. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

## **V. Certification & User's Manual Information**

## Certification & User's Manual Information

### L. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
  - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
  - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
- (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
- (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
- (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
- (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## Certification & User's Manual Information

### Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

# End of Report