



47 CFR PART 15B, 22H

TEST REPORT

of

CDMA 1X digital mobile phone

Model Name: HC-C2100
Brand Name: Haier
Report No.: SZ07030070E01
FCC ID: SG70704HC-C2100

prepared for

Qingdao Haier Telecom Co., Ltd.
No.1, Haier Road, Hi-tech Zone,
Qingdao, 266101, P.R.China

prepared by
**Shenzhen Electronic Product Quality Testing Center
Morlab Laboratory**

3/F, Electronic Testing Building, Shahe Road, Xili,
Nanshan District, Shenzhen, 518055 P. R. China
Tel: +86 755 86130398
Fax: +86 755 86130218



NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.



TABLE OF CONTENTS

1.	TEST CERTIFICATION	4
2.	GENERAL INFORMATION	5
2.1	Test Sample Information	5
2.2	Test Standards and Results	7
2.3	Facilities and Accreditations	8
2.3.1	Facilities	8
2.3.2	Test Environment Conditions.....	8
3.	47 CFR PART 15B REQUIREMENT	9
3.1	Test Modes	9
3.2	Conducted Emissions	11
3.2.1	Requirement	11
3.2.2	Test Procedure	11
3.2.3	Test Setup	11
3.2.4	Test Result	12
3.3	Radiated Emissions	16
3.3.1	Requirement	16
3.3.2	Test Procedure	16
3.3.3	Test Setup	16
3.3.4	Test Result	17
4.	47 CFR PART 2, PART 22H REQUIREMENTS	21
4.1	Frequencies	21
4.1.1	Requirement	21
4.1.2	Test Procedure	21
4.1.3	Test Setup	21
4.1.4	Test Result	22
4.2	Conducted RF Output Power	24
4.2.1	Requirement	24
4.2.2	Test Procedure	24
4.2.3	Test Setup	24
4.2.4	Test Result	25

4.3	20dB Occupied Bandwidth	28
4.3.1	Definition	28
4.3.2	Test Procedure	28
4.3.3	Test Setup	28
4.3.4	Test Result	29
4.4	Frequency Stability	32
4.4.1	Requirement	32
4.4.2	Test Procedure	32
4.4.3	Test Setup	32
4.4.4	Test Result	33
4.5	Conducted Out of Band Emissions	34
4.5.1	Requirement	34
4.5.2	Test Procedure	34
4.5.3	Test Setup	34
4.5.4	Test Result	35
4.6	Band Edge	39
4.6.1	Requirement	39
4.6.2	Test Procedure	39
4.6.3	Test Setup	39
4.6.4	Test Result	40
4.7	Transmitter Radiated Power (EIRP/ERP)	42
4.7.1	Requirement	42
4.7.2	Test Procedure	42
4.7.3	Test Setup	42
4.7.4	Test Result	43
4.8	Radiated Out of Band Emissions	46
4.8.1	Requirement	46
4.8.2	Test Procedure	46
4.8.3	Test Setup	46
4.8.4	Test Result	47



1. TEST CERTIFICATION

Equipment under Test: CDMA 1X digital mobile phone

Application Type: Certification
FCC ID: SG70704HC-C2100
Model Name: HC-C2100
Brand Name: Haier

Applicant Information: Qingdao Haier Telecom Co., Ltd.
Address: No.1, Haier Road, Hi-tech Zone, Qingdao, 266101,
P. R. China
Contact: Mr. Xu Jun
Tel.: +86(532)88936513
Fax: +86(532)88936513
E-mail: txkfrzh@haier.com

Emission Designator: 1M25F9W
Max. RF Output Power: 0.2Watts

Test Standards: 47 CFR Part 2, 15B, 22H
Test Date(s): April 17, 2007 - April 24, 2007
Test Result: PASS

* We Hereby Certify That:

The equipment was tested by Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. The test results of this report only apply for the sample equipment identified above. The test data, data evaluation, test procedures and equipment configurations shown in this report were made according to the requirements of related FCC rules. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by: *Wei Yanquan* Dated: 2007.04.25
 Wei Yanquan

Reviewed by: *Zhang Weimin* Dated: 2007.04.25
 Zhang Weimin

Approved by: *Shu Luan* Dated: 2007.04.25
 Shu Luan



2. GENERAL INFORMATION

2.1 Test Sample Information

For the test sample received from/supplied by the applicant, we summarized as below:

1. Equipment under Test (EUT)

EUT Description.....: CDMA 1X digital mobile phone
Model Name.....: HC-C2100
Manufacturer: Qingdao Haier Telecom Co., Ltd.
No.1, Haier Road, Hi-tech Zone, Qingdao, 266101, P.R.China
Serial No.....: C21000702100111
ESN.....: 0x2F6067C0
Hardware Version: P3.2
Software Version: QC.10.1.4.1.008.0.0
Modulation(s).....: CDMA 1X
Frequency Range.....: Tx: 825.25 - 847.75MHz
Rx: 870.25 - 892.75MHz
Power Supply.....: Battery
Model Name: C2100
Brand Name: Haier
Manufacturer: Shenzhen XWODA Electronic Co. Ltd.
Serial No.: (n.a., marked #1 by test site)
Capacitance: 800mAh
Voltage: Rated Normal Voltage: 3.7VDC
Lowest Extreme Voltage: 3.6VDC
Highest Extreme Voltage: 4.2VDC

2. Ancillary Equipments (AE)

AE-1: AC Adapter (Charger for Battery)
Model Name: LSA-80A13
Brand Name: Haier
Manufacturer: NINGBO LISHUNDA ELECTRON CO., LTD.
Serial No.: (n.a., marked #1 by test site)
Rated Input: ~ 100-240V, 50/60Hz, 0.2A
Rated Output: = 5.0V, 550mA, 3W
Wire Length: 140cm
AE-2: Earphone
Model Name: (n.a.)

Brand Name: (n.a.)
Manufacturer: (n.a.)
Serial No.: (n.a., marked #1 by test site)
Wire Length: 160cm

3. Test Sample Configuration

The Test Sample (EUT) is classified as a "Class B digital device".

According to the declaration and/or specification and/or user's manual supplied by the applicant and/or manufacturer, the EUT includes following outfits (ports):

- a) A d.c. power supply input port, which can be connected to the "AE-1: AC Adapter" supplied by applicant.
- b) An earphone port, which can be connected to the "AE-2: Earphone".

For more detailed description about the Test Sample (EUT), please refer to specification or user's manual supplied by the applicant and/or manufacturer.

4. Additional Information

The lowest, middle, highest channel numbers of the Tx used and tested in this report are separately 9 (825.27MHz), 384 (836.52MHz) and 758 (847.74MHz).



2.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 15 and Part 22 for the FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-05 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 15 (10-1-05 Edition)	Radio Frequency Devices
3	47 CFR Part 22 (10-1-05 Edition)	Public Mobile Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result	Date of Test
FCC Part 15 Requirement				
1	15.107	Conducted Emissions	PASS	2007-4-17
2	15.109	Radiated Emissions	PASS	2007-4-23
FCC Part 22 Requirement				
1	2.106 22.905	Frequencies	PASS	2007-4-17
2	2.1046	Conducted RF Output Power	PASS	2007-4-17
3	2.1049	20dB Occupied Bandwidth	(n.a.)	2007-4-17
4	2.1055 22.355	Frequency Stability	PASS	2007-4-18
5	2.1051, 2.1057 22.917	Conducted Out of Band Emissions	PASS	2007-4-17
6	2.1051, 2.1057 22.917	Band Edge	PASS	2007-4-17
7	22.913	Transmitter Radiated Power (EIPR/ERP)	PASS	2007-4-17
8	2.1053, 2.1057 22.917	Radiated Out of Band Emissions	PASS	2007-4-17



2.3 Facilities and Accreditations

2.3.1 Facilities

Shenzhen Electronic Product Quality Testing Center Morlab Laboratory is a testing organization accredited by China National Accreditation Board for Laboratories (CNAL) according to ISO/IEC 17025. The accreditation certificate number is L1659.

All measurement facilities used to collect the measurement data are located at Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen 518055 CHINA. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

2.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	20 - 25
Relative Humidity (%):	40 - 60
Atmospheric Pressure (kPa):	960

3. 47 CFR PART 15B REQUIREMENT

3.1 Test Modes

According to the description of Test Sample Configuration in section 2.1 of this test report, several test modes are employed to perform tests as below for the actual application:


1. Normal Test Mode

The Test Sample (EUT) serves as a mobile phone.

The EUT, allocated a traffic channel, operates on the middle channel of the Cellular 850MHz band under the condition of its maximum output power.

The EUT is powered by the Battery, which is charged with the AC Adapter (AE-1) powered by 120V 60Hz AC mains supply.

The figure below is the test configuration for the Test Sample (EUT) employed in this test report under this test mode:

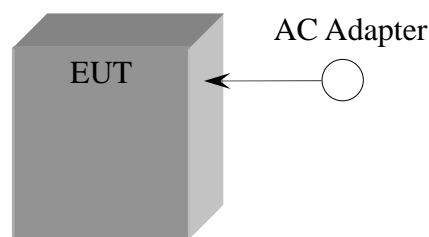


2. Earphone Test Mode

The Test Sample (EUT) serves as a mobile phone.

The EUT, allocated a traffic channel, operates on the middle channel of the Cellular 850MHz band under the condition of its maximum output power; the audio downlink is routed to the Earphone (AE-2) from the EUT.

The EUT is powered by the Battery, which is charged with the AC Adapter (AE-1) powered by 120V 60Hz AC mains supply. The volume of the Earphone (AE-2) is set to be highest.

The figure below is the test configuration for the Test Sample (EUT) employed in this test report under this test mode:

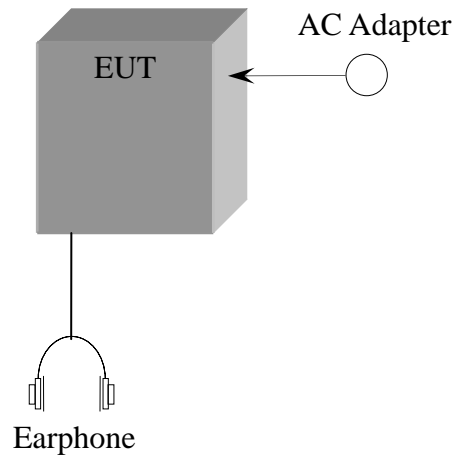

3.2 Conducted Emissions

3.2.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50Ohm line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

NOTE:

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range from 0.15MHz to 0.50MHz.

3.2.2 Test Procedure

- (a) The test frequency range is from 150kHz to 30MHz.
- (b) The Peak (PK) detector is employed to sweep the conducted interference over the test frequency range.
- (c) For the swept signals that are more than or have narrow negative margins beyond the Average (AV) and Quasi-peak (QP) limit lines, the AV and QP detectors are employed to measure these suspect signals to find their maximum QP and AV readings.
- (d) Both L Phase and N Phase lines of the power mains connected to the Test Sample (EUT) are employed to perform this test.
- (e) All Test Modes for the Test Sample (EUT) listed in section 3.1 are employed to perform this test.


3.2.3 Test Setup

1. Test Setup Sketch

The Test Sample (EUT) is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The Test Sample (EUT) is connected to the power mains through a LISN which provides 50 μ H/50Ohm of coupling

impedance for the measuring instrument of a Receiver. A Pulse Limiter is employed to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

The Test Sample (EUT) works together with a System Simulator via a Common Antenna.

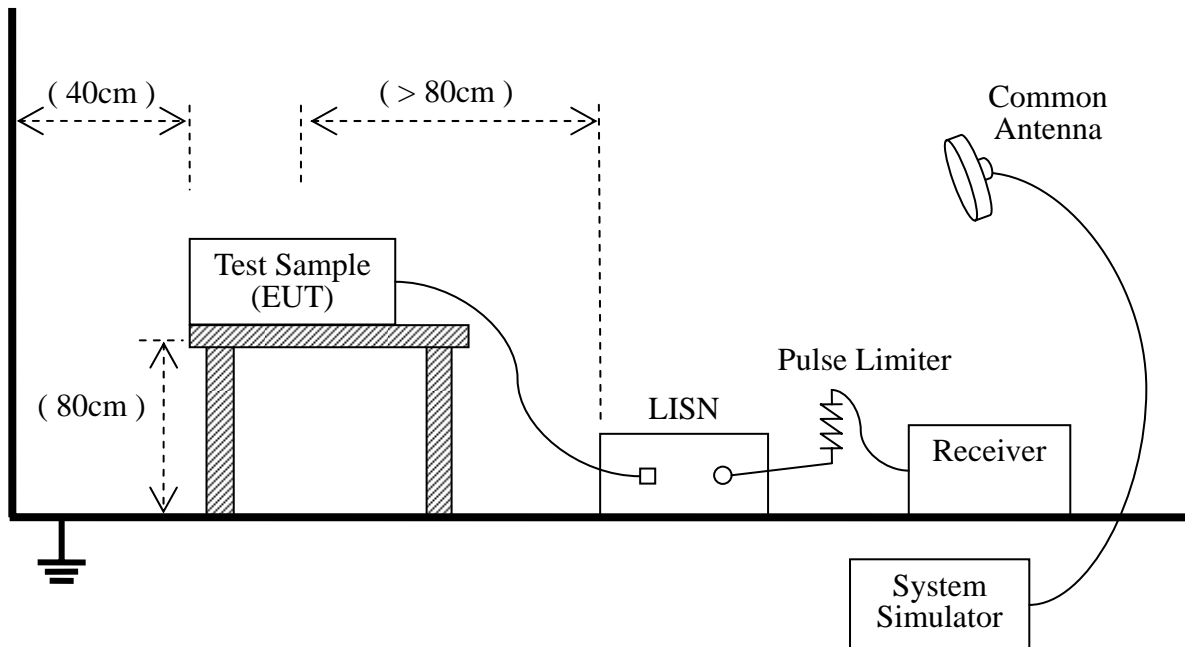

2. Equipments List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2006.07	1year
LISN	Schwarzbeck	NSLK 8127	812744	2006.08	1year
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)	(n.a.)
System Simulator	Agilent	E5515C	GB43130131	2006.06	1year
Common Antenna	(n.a.)	(n.a.)	(n.a.)	(n.a.)	(n.a.)

3.2.4 Test Result


1. Normal Test Mode

a) Test Verdict Recorded for Suspect Points


No.	@Frequency (MHz)	Suspect Emission Levels (dB μ V)				Limit (dB μ V)		Verdict
		PK	QP	AV	Phase	QP	AV	
1	0.246	45.8	43.8	38.2	L	61.9	51.9	PASS
2	0.494	41.2	38.5	34.5	L	56.1	46.1	PASS
3	0.986	39.0	36.6	34.1	L	56.0	46.0	PASS

No.	@Frequency (MHz)	Suspect Emission Levels (dB μ V)				Limit (dB μ V)		Verdict
		PK	QP	AV	Phase	QP	AV	
4	1.051	36.7	31.9	25.5	L	56.0	46.0	PASS
5	1.729	31.1	26.8	20.9	L	56.0	46.0	PASS
6	2.074	31.9	26.9	20.9	L	56.0	46.0	PASS
7	0.247	46.5	44.2	37.9	N	61.8	51.8	PASS
8	0.494	42.7	38.8	30.1	N	56.1	46.1	PASS
9	0.569	43.6	39.9	34.6	N	56.0	46.0	PASS
10	0.640	43.7	41.6	36.2	N	56.0	46.0	PASS
11	0.919	40.8	35.3	26.6	N	56.0	46.0	PASS
12	1.353	43.3	41.5	35.2	N	56.0	46.0	PASS
13	5.251	42.1	35.5	22.8	N	60.0	50.0	PASS
14	5.681	44.9	37.8	23.9	N	60.0	50.0	PASS

b) Test Plots

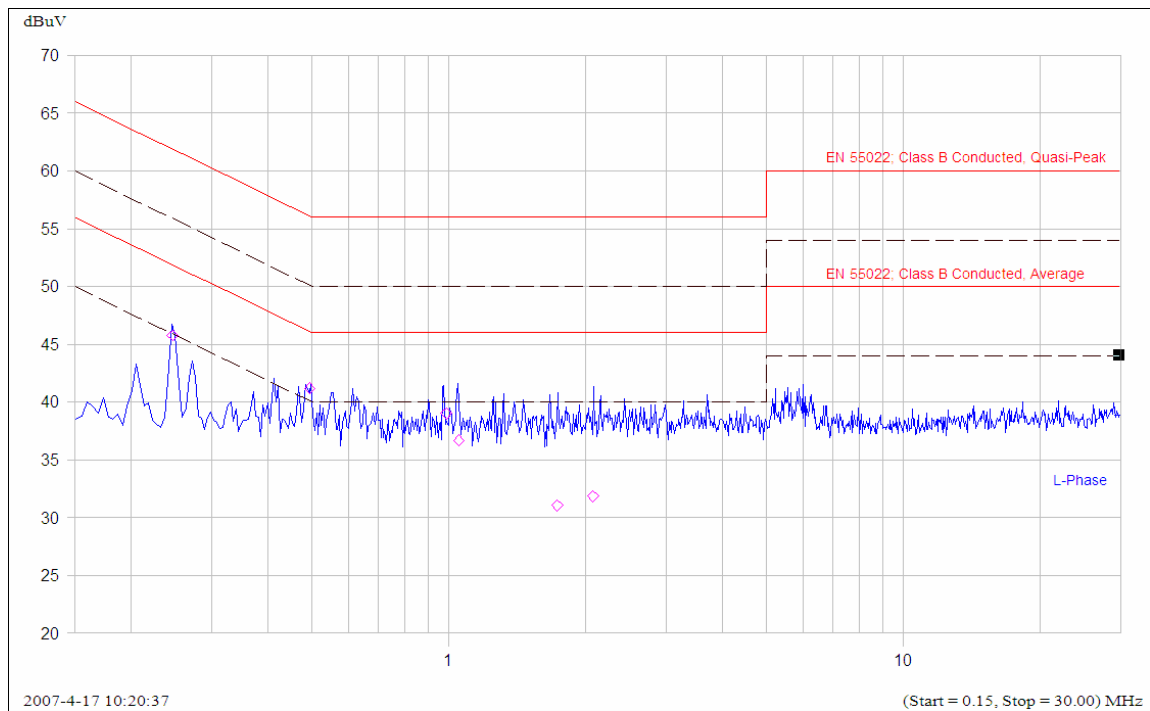

(Plot A: L Phase)

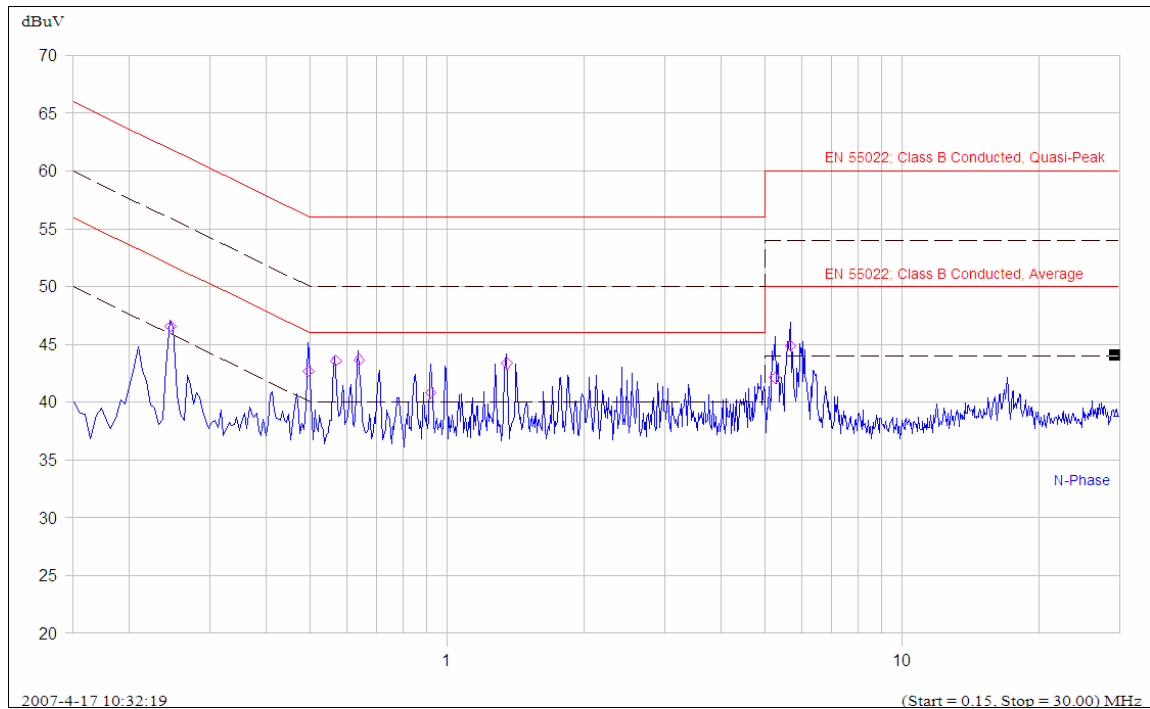


(Plot B: N Phase)

2. Earphone Test Mode


a) Test Verdict Recorded for Suspect Points

No.	@Frequency (MHz)	Suspect Emission Levels (dB μ V)				Limit (dB μ V)		Verdict
		PK	QP	AV	Phase	QP	AV	
1	0.247	46.1	44.2	38.7	L	61.9	51.9	PASS
2	0.498	42.5	38.9	34.7	L	56.1	46.1	PASS
3	0.644	42.3	39.8	35.2	L	56.0	46.0	PASS
4	1.004	42.3	40.2	37.0	L	56.0	46.0	PASS
5	1.366	43.0	40.6	33.6	L	56.0	46.0	PASS
6	5.667	43.0	38.2	26.9	L	60.0	50.0	PASS
7	0.500	44.7	42.5	36.9	N	56.0	46.0	PASS
8	0.573	47.0	44.5	39.2	N	56.0	46.0	PASS
9	0.644	46.7	45.0	39.2	N	56.0	46.0	PASS
10	0.931	46.2	44.4	38.2	N	56.0	46.0	PASS
11	1.002	46.0	44.1	37.3	N	56.0	46.0	PASS
12	1.362	46.4	44.3	37.3	N	56.0	46.0	PASS
13	1.788	44.7	42.2	33.4	N	56.0	46.0	PASS
14	2.145	44.3	41.3	32.6	N	56.0	46.0	PASS
15	5.266	43.8	35.1	22.9	N	60.0	50.0	PASS
16	5.654	47.3	44.2	31.9	N	60.0	50.0	PASS

b) Test Plots

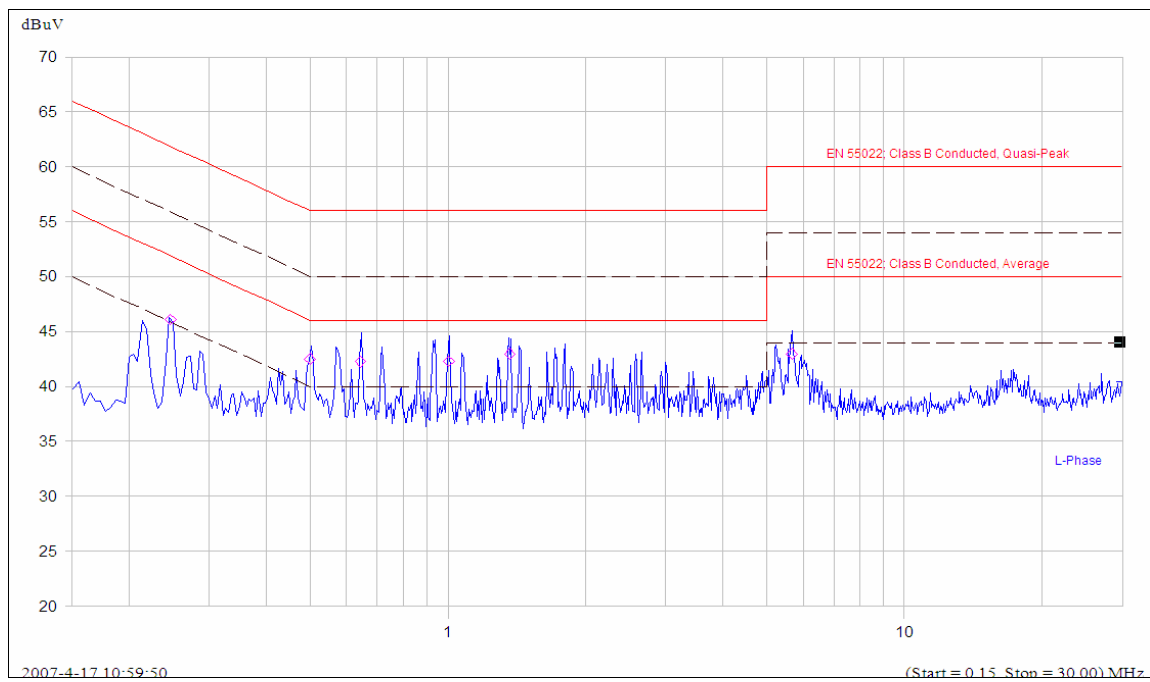

(Plot A: L Phase)

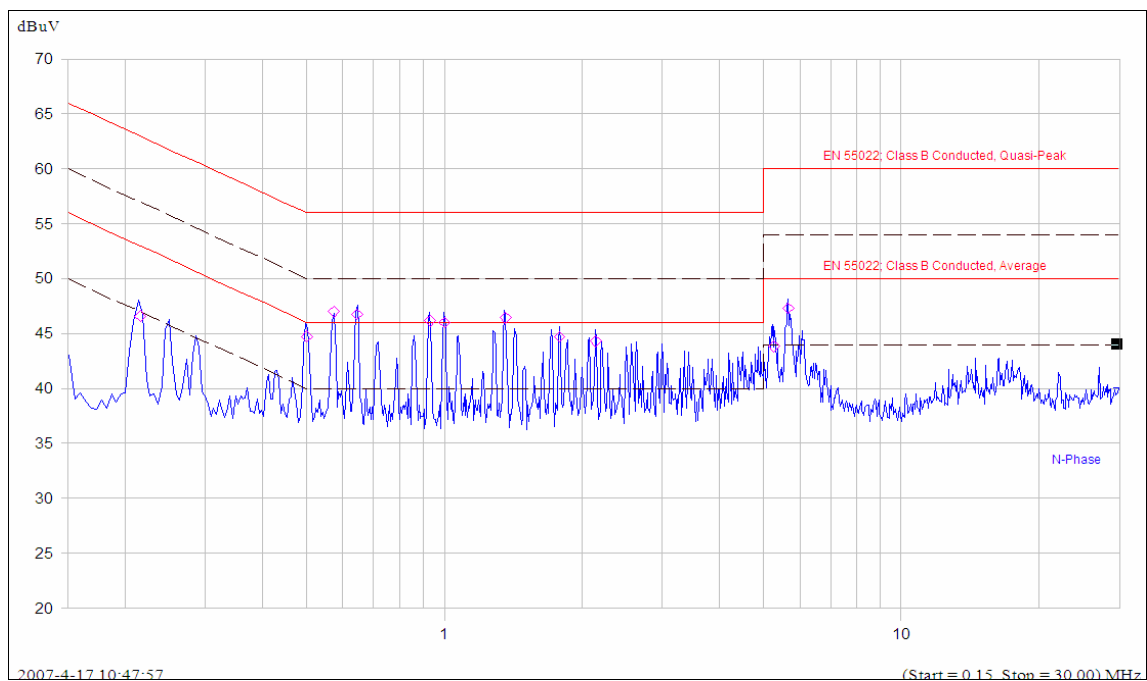

(Plot B: N Phase)

3.3 Radiated Emissions

3.3.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength	
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

NOTE:

- a) Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
- b) In the emission tables above, the tighter limit applies at the band edges.

3.3.2 Test Procedure

- (a) The test frequency range is from 30MHz to 1GHz.
- (b) The Test Antenna is located at 1m height. The Peak (PK) detector is employed to sweep the radiated interference over the test frequency range while the Turn Table is located separately at the degree of $\text{DEG}_{\text{TT}}(n) = n \cdot 45$, $n \in [0, 8]$.
- (c) For each swept signal that is more than or have narrow negative margins beyond the Quasi-peak (QP) limit line, rotate the Turn Table and vary the Test Antenna height until the emission is at its highest amplitude; then tuned the Receiver and use the QP detector to measure this suspect signal to find its maximum QP reading.
- (d) Both the Vertical (V) and the Horizontal (H) polarizations of the Test Antenna are employed to perform this test.
- (e) All Test Modes for the Test Sample (EUT) listed in section 3.1 are employed to perform this test.


3.3.3 Test Setup

1. Test Setup Sketch

The test is performed in a 3m Semi-Anechoic Chamber. The Test Sample (EUT) is placed on a 0.8m high insulating Turn Table and keeps 3m away from the Test Antenna which is a Bi-Log one with working frequency range from 30MHz to 3GHz and is mounted on a variable-height antenna master

tower. If applicable, a Preamplifier is employed for the measuring instrument of a Receiver. The factors of the whole test system are calibrated to correct the reading.

The Test Sample (EUT) works together with a System Simulator (SS) via a Common Antenna.

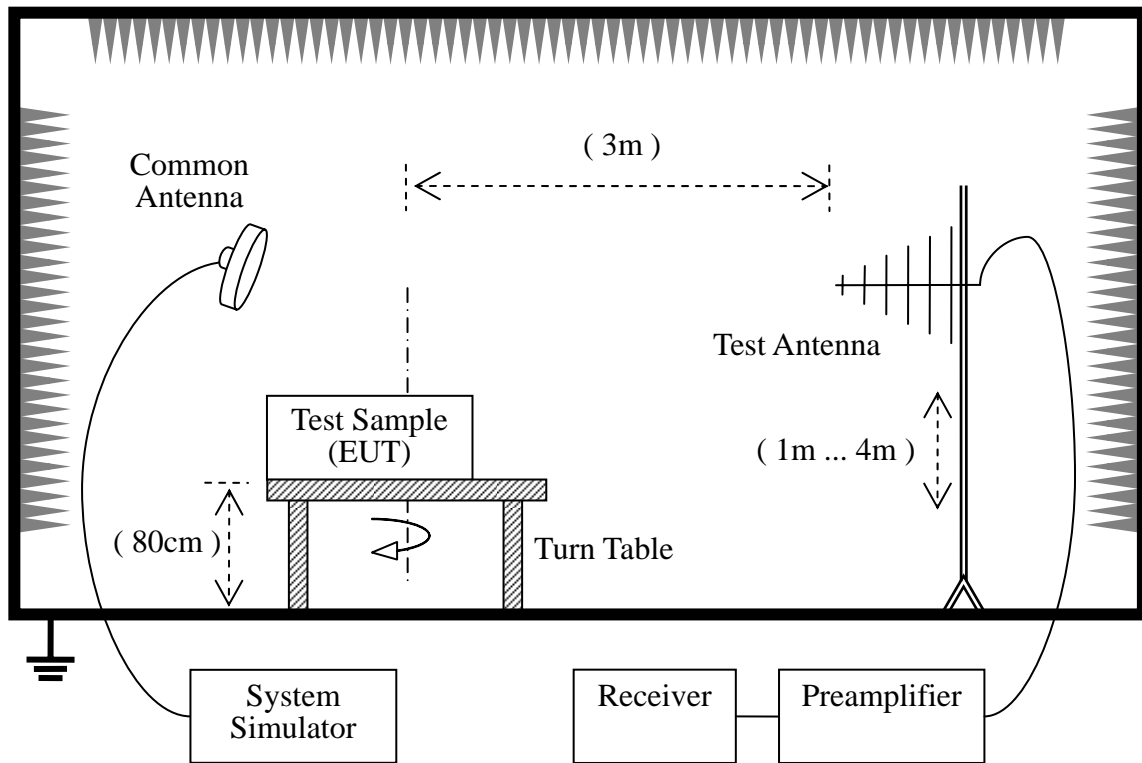

2. Equipments List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2006.07	1year
Semi-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2006.08	2year
Test Antenna (Bi-Log)	Schwarzbeck	VULB 9163	9163-274	2006.07	1year
System Simulator	Agilent	E5515C	GB43130131	2006.06	1year
Preamplifier	(n.a.)	20dB	(n.a.)	(n.a.)	(n.a.)
Common Antenna	(n.a.)	(n.a.)	(n.a.)	(n.a.)	(n.a.)

3.3.4 Test Result


NOTE: the emissions of EUT and SS carrier frequencies should be ignored.

1. Normal Test Mode


a) Test Verdict Recorded for Suspect Points

No.	@Frequency (MHz)	Suspect Emission Levels (dB μ V/m)					QP Limit (dB μ V/m)	Result
		PK	QK	Turn Table (degree)	Test Antenna			
					Height (cm)	Polar.		
1	54.024	26.9	---	---	---	V	40.0	PASS
2	132.720	21.8	---	---	---	V	43.5	PASS
3	216.036	22.2	---	---	---	V	43.5	PASS
4	672.144	28.3	---	---	---	V	46.0	PASS
5	132.780	23.6	---	---	---	H	43.5	PASS
6	815.098	41.8	36.9	284	102	H	46.0	PASS
7	854.395	41.5	36.1	283	102	H	46.0	PASS

b) Test Plots

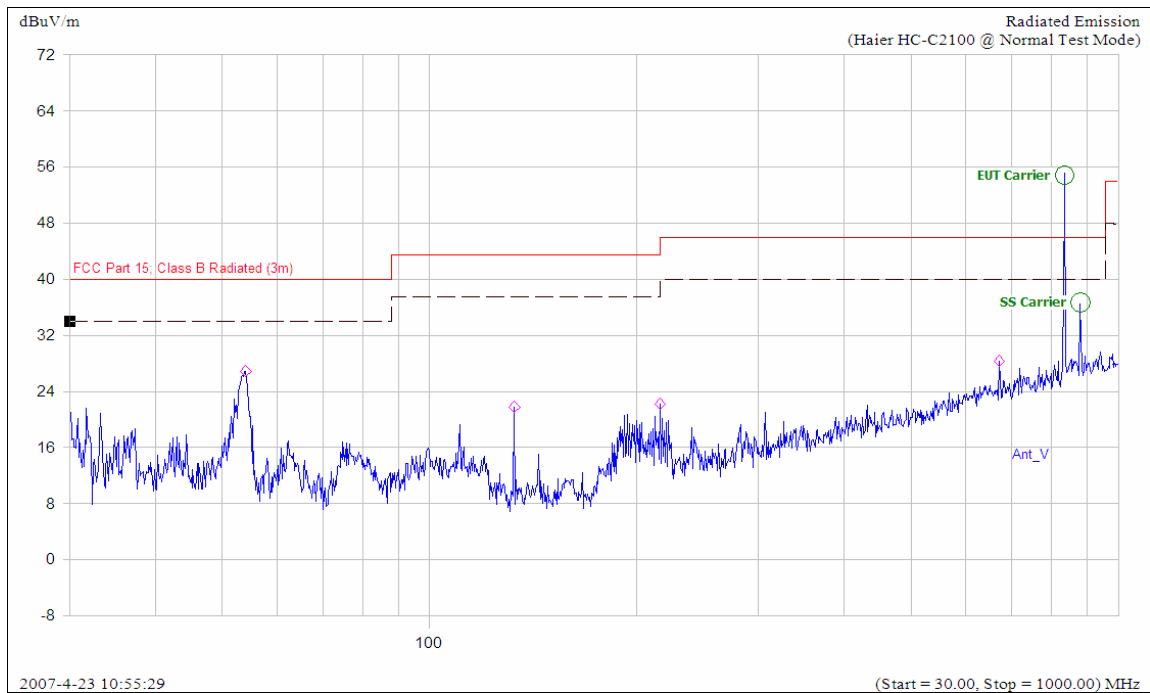

(Plot A: Test Antenna Vertical)

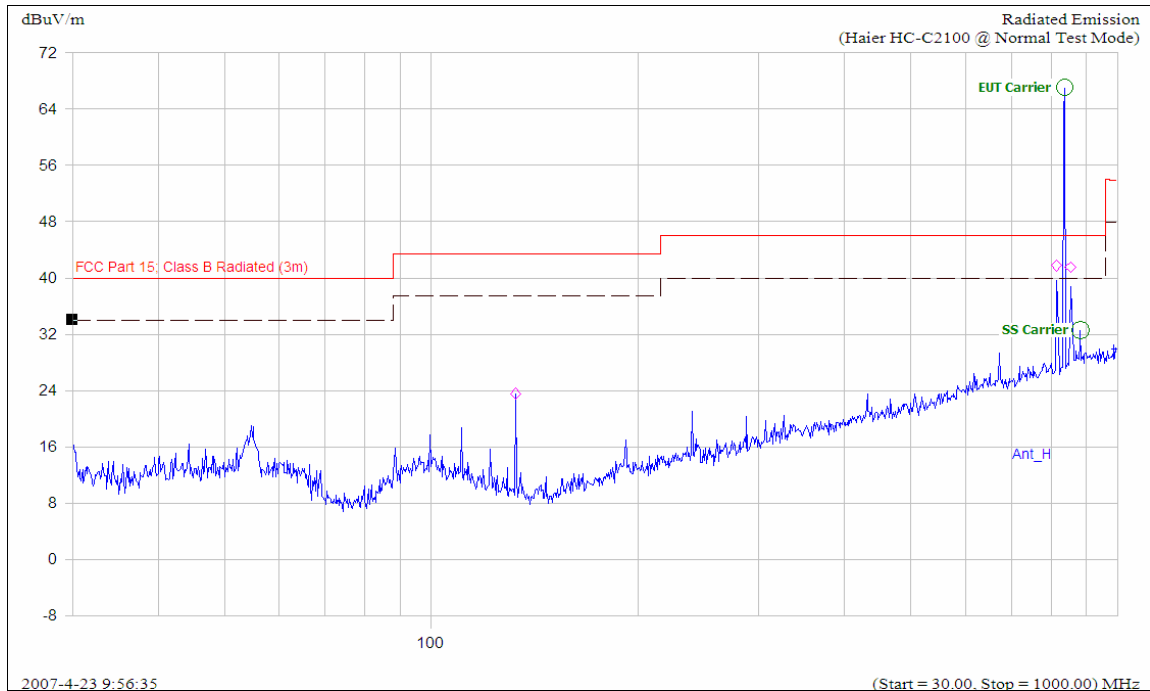


(Plot B: Test Antenna Horizontal)

2. Earphone Test Mode


a) Test Verdict Recorded for Suspect Points

No.	@Frequency (MHz)	Suspect Emission Levels (dB μ V/m)					QP Limit (dB μ V/m)	Result
		PK	QK	Turn Table (degree)	Test Antenna			
					Height (cm)	Polar.		
1	33.192	26.3	---	---	---	V	40.0	PASS
2	53.472	23.6	---	---	---	V	40.0	PASS
3	132.780	21.7	---	---	---	V	43.5	PASS
4	160.332	19.9	---	---	---	V	43.5	PASS
5	216.036	23.1	---	---	---	V	46.0	PASS
7	55.344	20.0	---	---	---	H	40.0	PASS
8	132.780	22.8	---	---	---	H	43.5	PASS
9	818.616	33.3	---	---	---	H	46.0	PASS
10	882.132	34.4	---	---	---	H	46.0	PASS

b) Test Plots

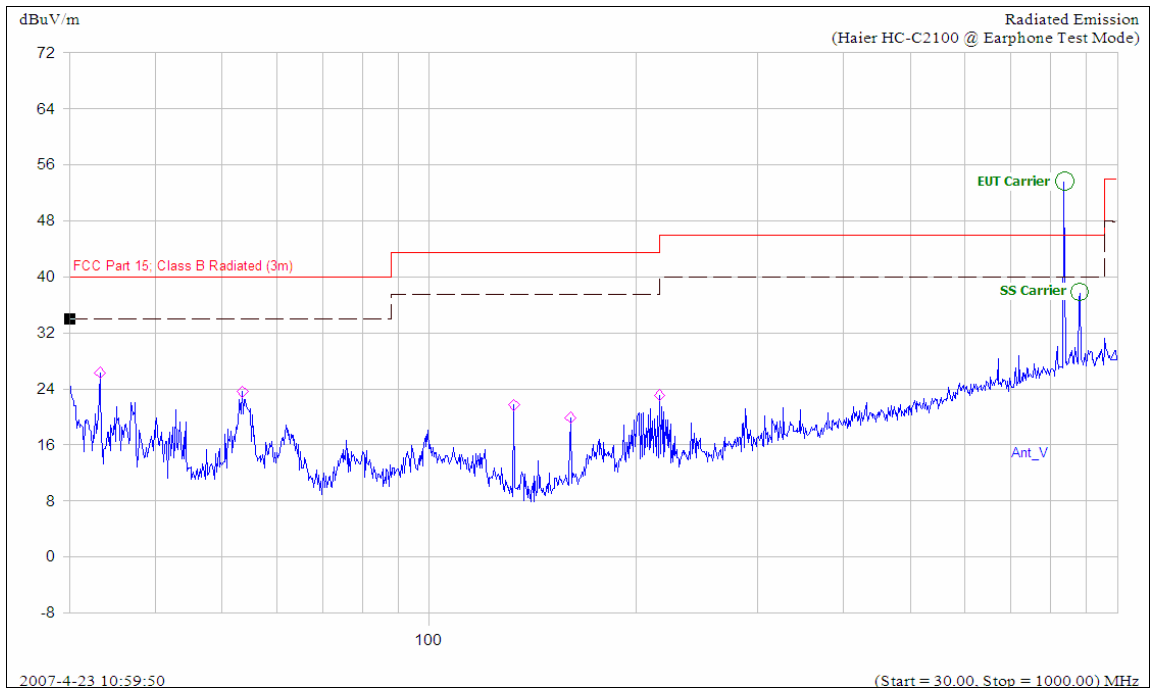

(Plot A: Test Antenna Vertical)

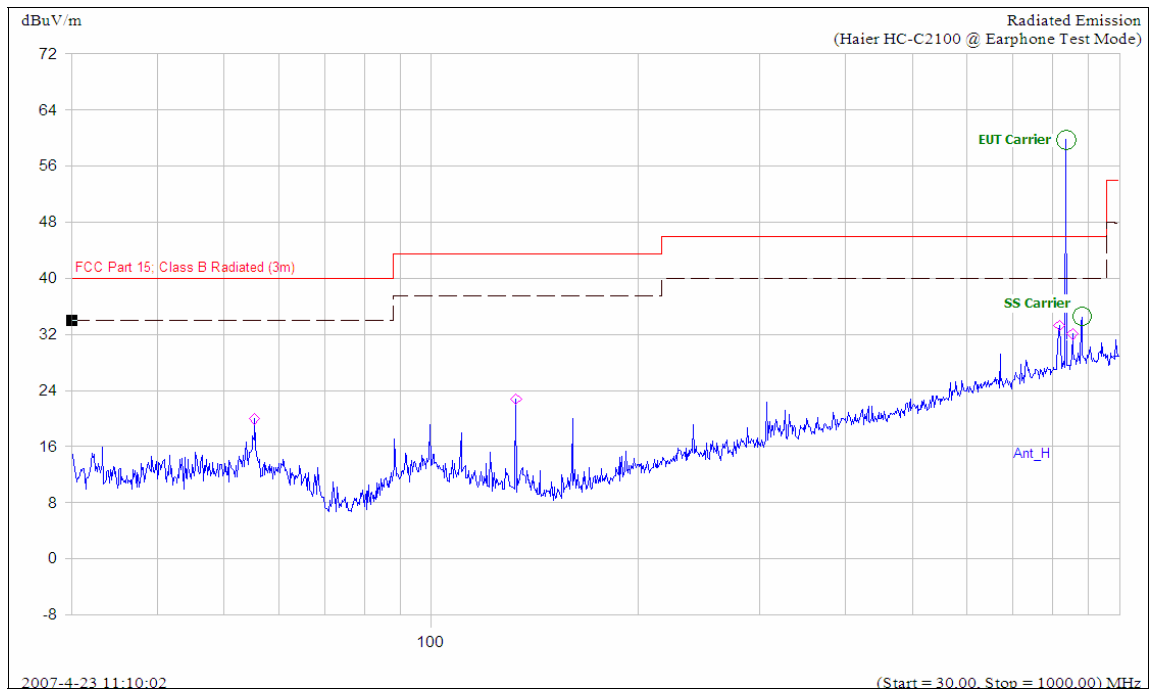

(Plot B: Test Antenna Horizontal)

4. 47 CFR PART 2, PART 22H REQUIREMENTS

4.1 Frequencies

4.1.1 Requirement

According to FCC section 22.905, the frequency blocks assignment for the cellular radiotelephone service is listed as below:

- a) Channel Block A:
Mobile 824 - 835MHz, Base 869 - 880MHz;
Mobile 845 - 846.5MHz, Base 890 - 891.5MHz
- b) Channel Block B:
Mobile 835 - 845 MHz, Base 880 - 890MHz;
Mobile 846.5 - 849 MHz, Base 891.5 - 894MHz

4.1.2 Test Procedure


- (a) The lowest and highest channels of the Test Sample (EUT) are employed to perform this test.
- (b) The Spectrum Analyzer is set as below:
 - Center Frequency: The frequency of the channel under test
 - Resolution BW: 30kHz
 - Video BW: Auto
 - Frequency Span: Wide enough to cover the complete power envelope of the signal
 - Sweep Time: Suitable to capture one transmission burst
 - Detector Mode: Peak
 - Trace Mode: Max Hold
- (c) Find the peak value of the trace from the Spectrum Analyzer and record its power.

4.1.3 Test Setup

1. Test Setup Sketch

The Test Sample (EUT), powered by the Battery, is coupled to a Spectrum Analyzer and a System Simulator with appropriate Attenuators via a Power Splitter; the RF load attached to the antenna terminal of the Test Sample (EUT) is 50Ohm. The path loss as the factor is calibrated to correct the reading.

The Test Sample (EUT) is allocated a traffic channel and operates at the corresponding working band under the condition of its maximum output power.

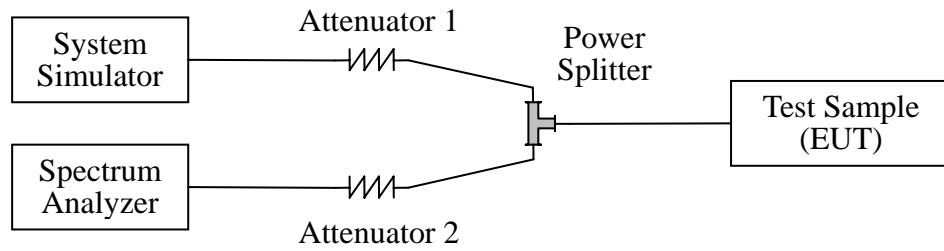

2. Equipments List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2006.06	1year
Spectrum Analyzer	Agilent	E7405A	US44210471	2006.07	1year
Power Splitter	Weinschel	1506A	NW521	(n.a.)	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)	(n.a.)

4.1.4 Test Result


The Tx frequency arrangement of the Cellular 850MHz band employed by the EUT should be from 825.27MHz to 847.74MHz (the corresponding frequency block is from 824.0MHz to 849.0MHz).

a) Test Verdict


The required frequency block is employed legally, the verdict is PASS.

Channel	Frequency (MHz)	Measured Carrier (dBm)	Refer to Plot
9	825.27	19.07	Plot A
758	847.74	15.52	Plot B

b) Test Plots

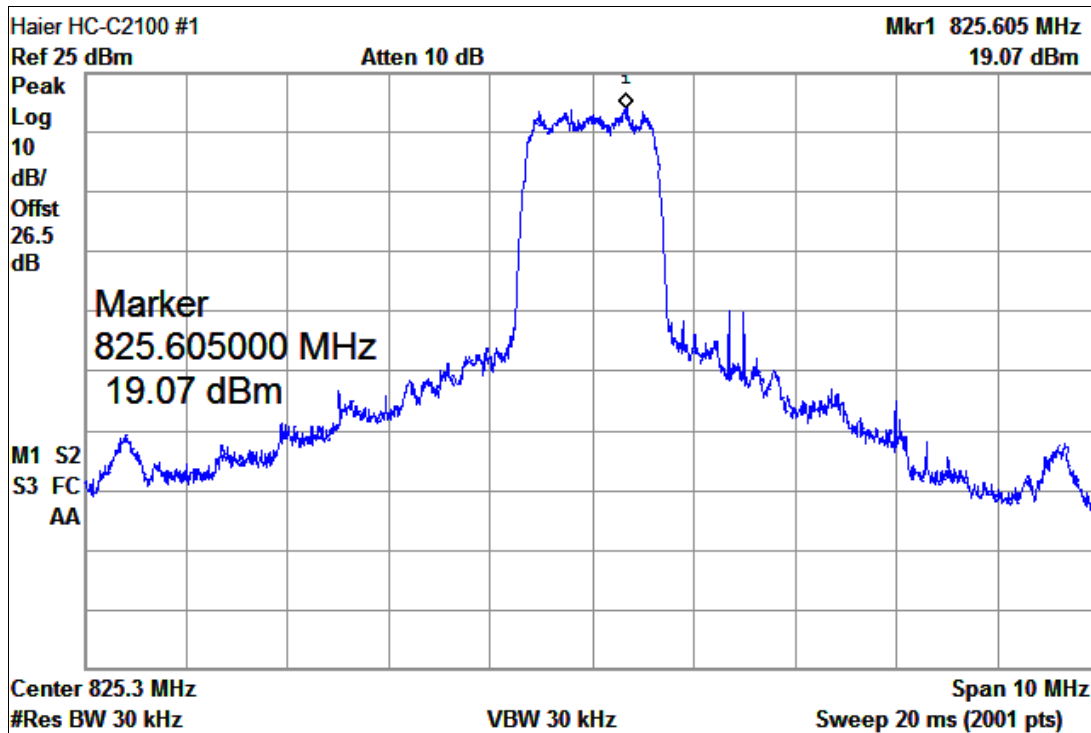

(Plot A: Channel = 9)

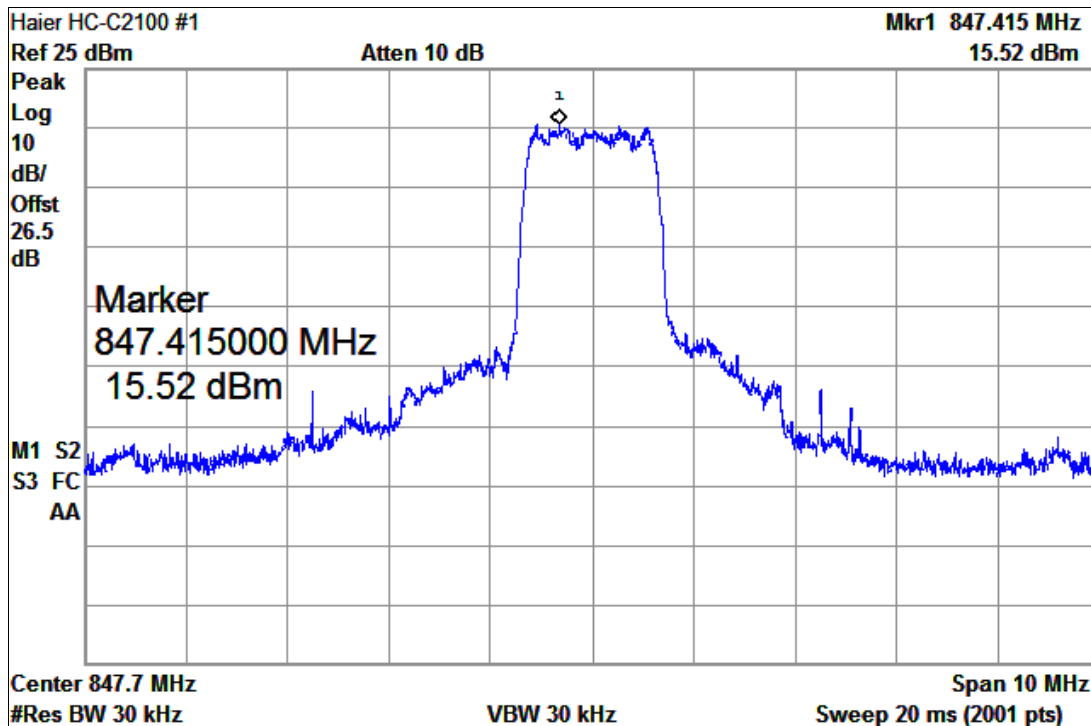

(Plot B: Channel = 758)

4.2 Conducted RF Output Power

4.2.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

4.2.2 Test Procedure


- (a) The lowest, middle and highest channels of the Test Sample (EUT) are employed to perform this test.
- (b) The Spectrum Analyzer is set as below:
 - Center Frequency: The frequency of the channel under test
 - Resolution BW: 3MHz
 - Video BW: Auto
 - Frequency Span: Wide enough to cover the complete power envelope of the signal
 - Sweep Time: Suitable to capture one transmission burst
 - Detector Mode: Peak
 - Trace Mode: Max Hold
- (c) Find the peak value of the trace from the Spectrum Analyzer and record its power.

4.2.3 Test Setup

1. Test Setup Sketch

The Test Sample (EUT), powered by the Battery, is coupled to a Spectrum Analyzer and a System Simulator with appropriate Attenuators via a Power Splitter; the RF load attached to the antenna terminal of the Test Sample (EUT) is 50Ohm. The path loss as the factor is calibrated to correct the reading.

The Test Sample (EUT) is allocated a traffic channel and operates at the corresponding working band under the condition of its maximum output power.

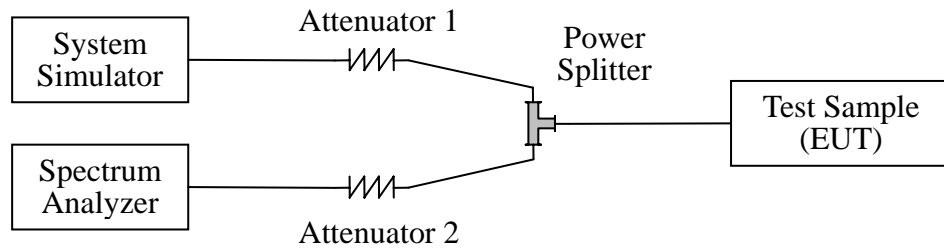

2. Equipments List


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2006.06	1year
Spectrum Analyzer	Agilent	E7405A	US44210471	2006.07	1year
Power Splitter	Weinschel	1506A	NW521	(n.a.)	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)	(n.a.)

4.2.4 Test Result


a) Test Verdict

Channel	Frequency (MHz)	Measured Output Power		Rated Output Power (dBm)	Verdict
		dBm	Refer to Plot		
9	825.27	27.62	Plot A	(n.a.)	PASS
384	836.52	27.45	Plot B		PASS
758	847.74	25.62	Plot C		PASS


b) Test Plots

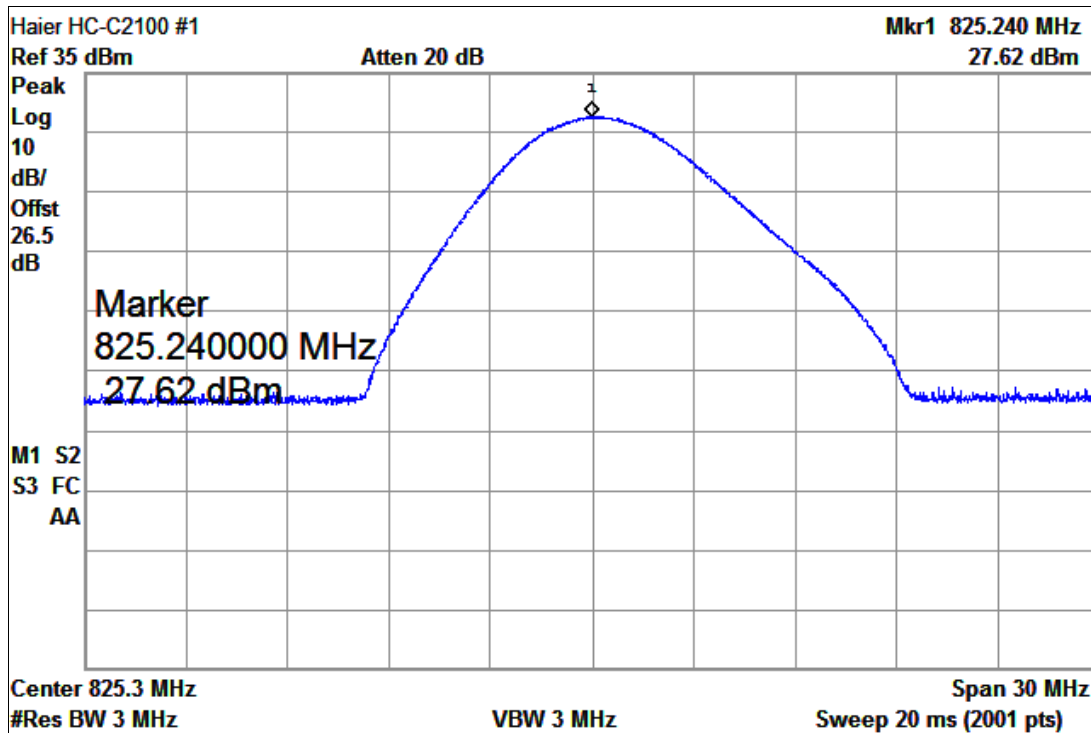

(Plot A: Channel = 9)

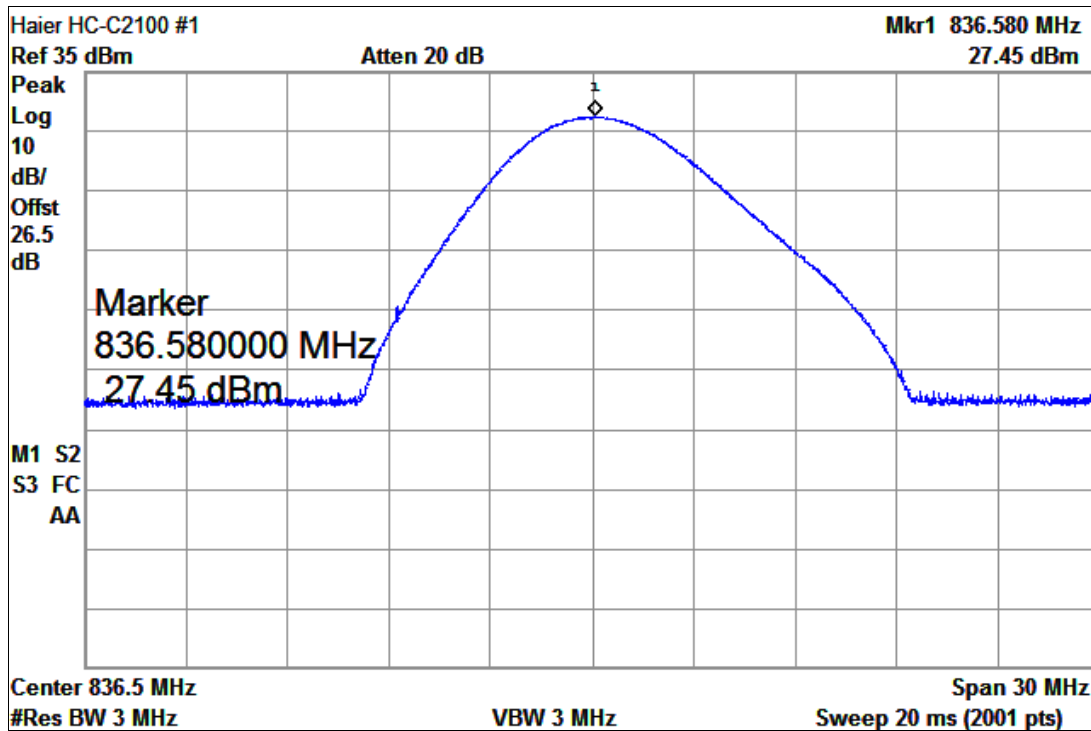

(Plot B: Channel = 384)

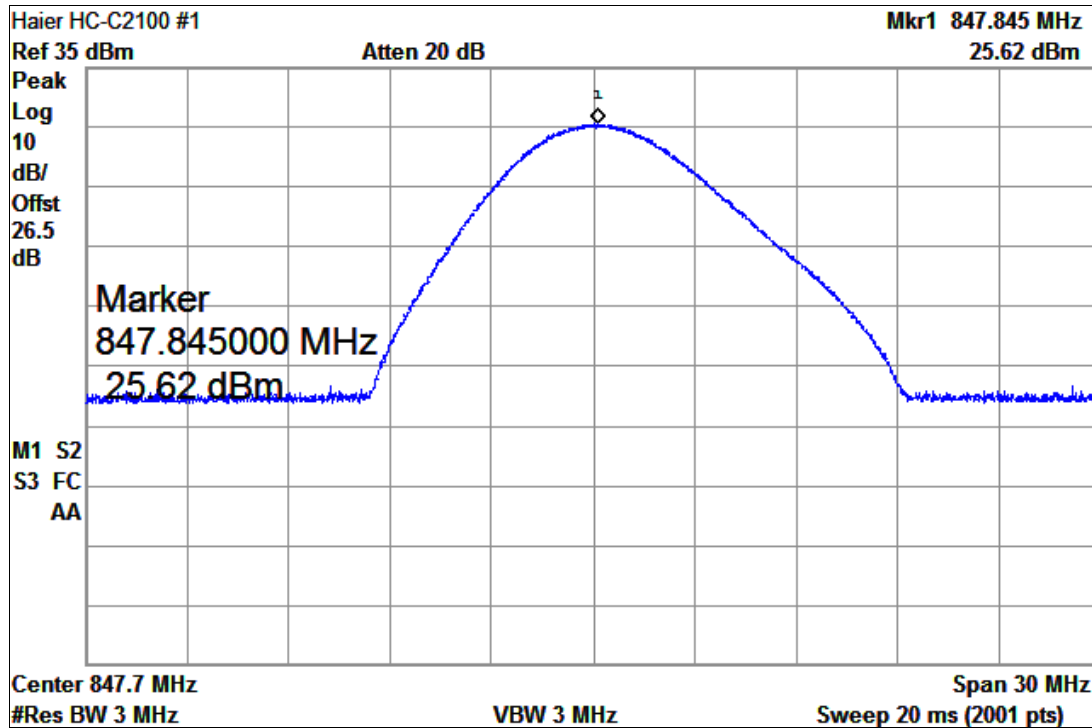

(Plot C: Channel = 758)

4.3 20dB Occupied Bandwidth

4.3.1 Definition

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\%$ equal to 20dB) taking the total RF output power as reference.

4.3.2 Test Procedure

- (a) The lowest, middle and highest channels of the Test Sample (EUT) are employed to perform this test.
- (b) The Spectrum Analyzer is set as below:
 - Center Frequency: The frequency of the channel under test
 - Resolution BW: 30kHz
 - Video BW: Auto
 - Frequency Span: Wide enough to cover the complete power envelope of the signal
 - Sweep Time: Suitable to capture one transmission burst
 - Detector Mode: Peak
 - Trace Mode: Max Hold
- (c) Find the peak value of the trace and place the Spectrum Analyzer marker on this peak as marker#1.
- (d) Use a second marker of the Spectrum Analyzer and find the frequency below the operating frequency at which the level is 20dB below the power of the marker#1. This frequency is recorded as f_L .
- (e) Use a third marker (or the delta marker of the second marker) of the Spectrum Analyzer and find the frequency above the operating frequency at which the level is 20dB below the power of the marker#1. This frequency is recorded as f_H .
- (f) The difference between the frequencies measured ($f_H - f_L$) is the 20dB Occupied Bandwidth.


4.3.3 Test Setup

1. Test Setup Sketch

The Test Sample (EUT), powered by the Battery, is coupled to a Spectrum Analyzer and a System

Simulator with appropriate Attenuators via a Power Splitter; the RF load attached to the antenna terminal of the Test Sample (EUT) is 50Ohm. The path loss as the factor is calibrated to correct the reading.

The Test Sample (EUT) is allocated a traffic channel and operates at the corresponding working band under the condition of its maximum output power.

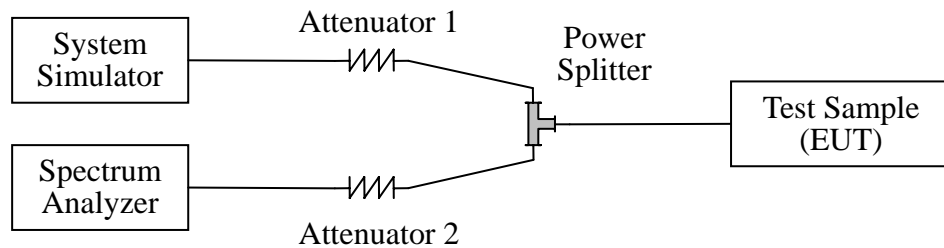

2. Equipments List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2006.06	1year
Spectrum Analyzer	Agilent	E7405A	US44210471	2006.07	1year
Power Splitter	Weinschel	1506A	NW521	(n.a.)	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)	(n.a.)


4.3.4 Test Result

The measured 20dB occupied bandwidth is about 1.4MHz.


a) Test Verdict

Channel	Frequency (MHz)	Measured 20dB Occupied Bandwidth (kHz)	Refer to Plot
9	825.27	1400	Plot A
384	836.52	1395	Plot B
758	847.74	1400	Plot C


b) Test Plots

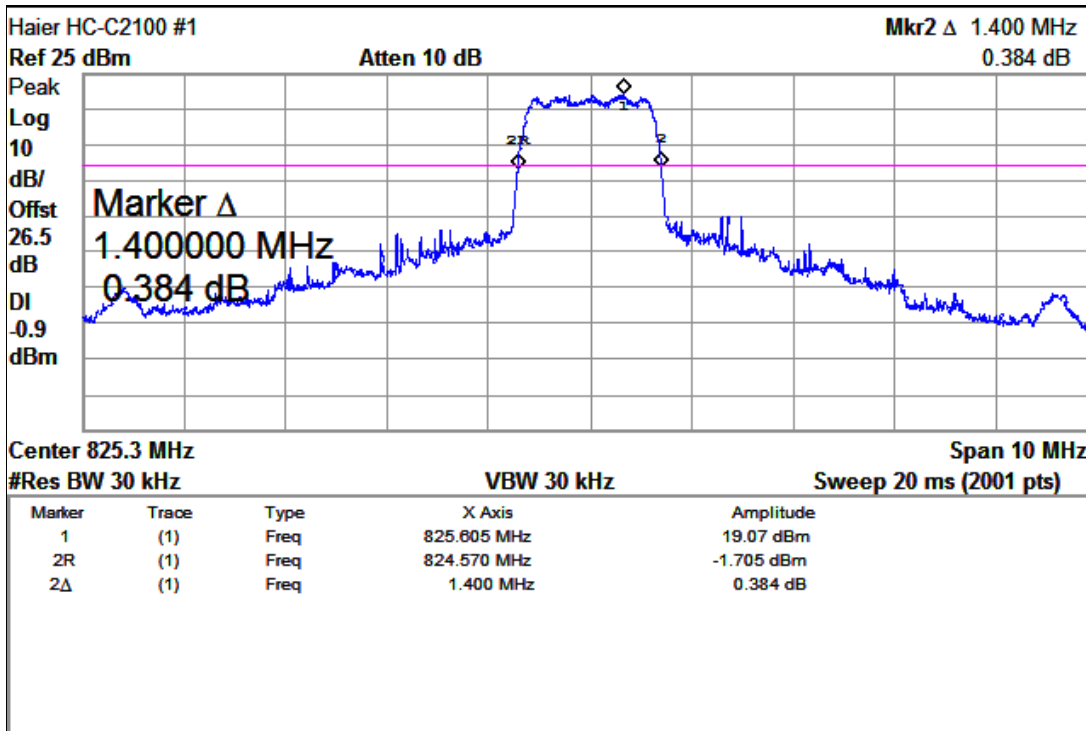

(Plot A: Channel = 9)

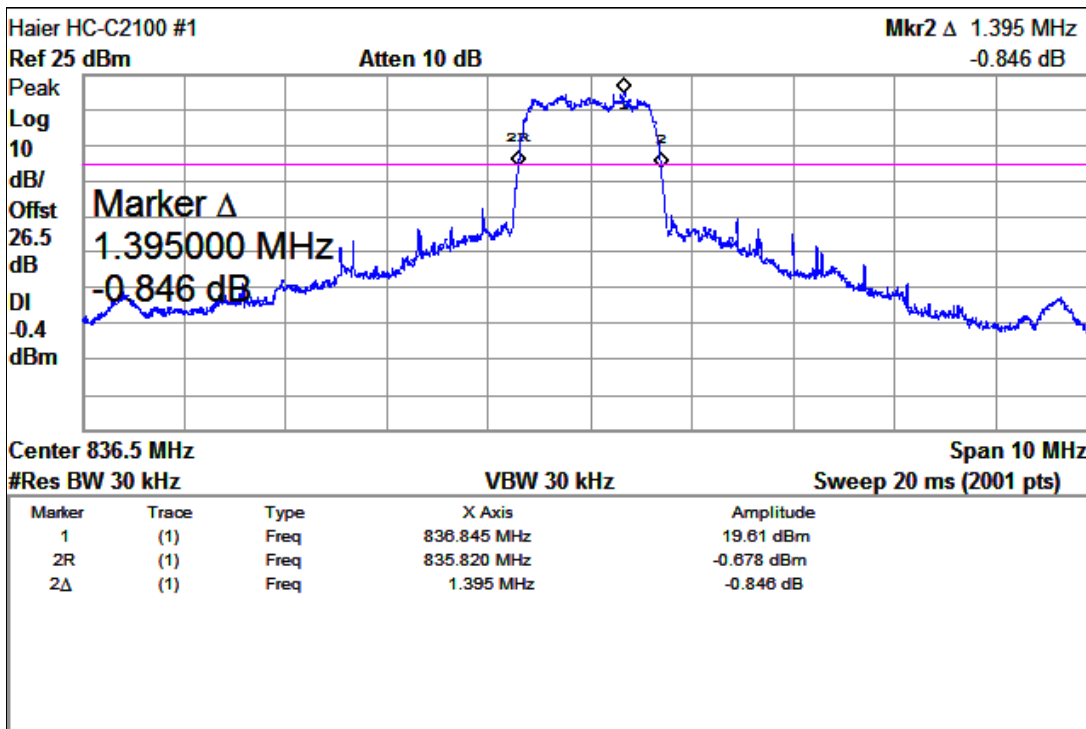

(Plot B: Channel = 384)

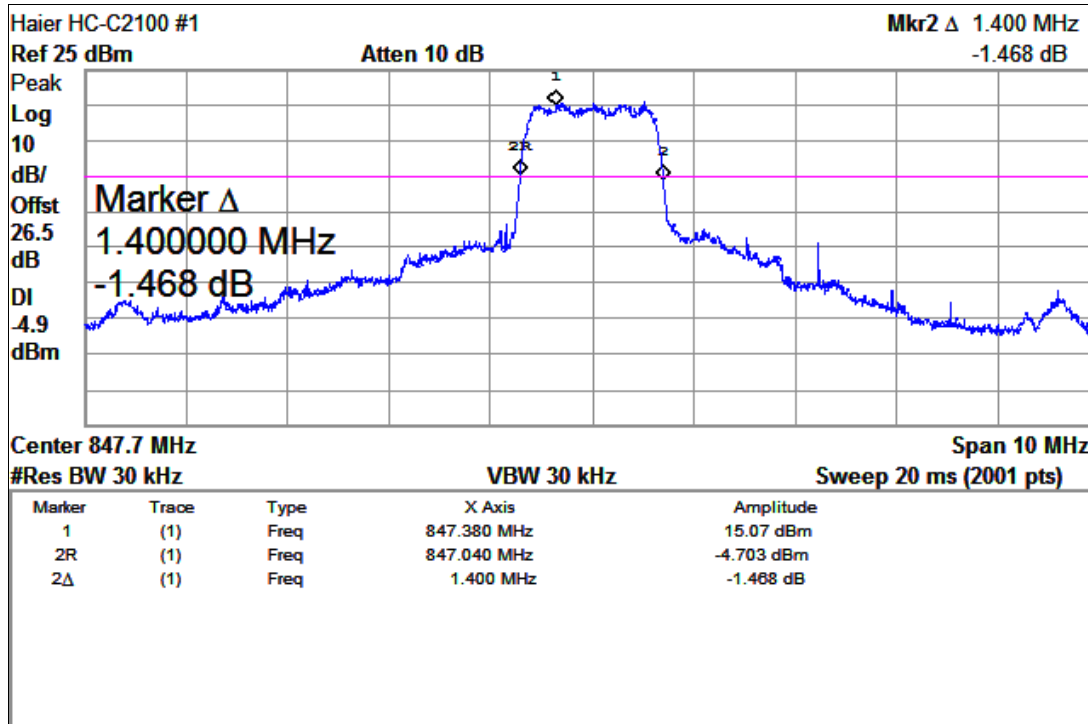

(Plot C: Channel = 758)

4.4 Frequency Stability

4.4.1 Requirement

According to FCC section 22.355, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

For the Cellular 850MHz band, the frequency deviation limit is $\pm 2.5\text{ppm}$.

4.4.2 Test Procedure

- (a) The lowest, middle and highest channels of the Test Sample (EUT) are employed to perform this test.
- (b) The normal test conditions and extreme test conditions are employed to performed this test:
 - Normal voltage (3.7VDC) and extreme temperatures (-30°C to $+50^{\circ}\text{C}$ at intervals of 10°C)
 - Extreme voltages (4.2VDC and 3.6VDC) and normal temperature ($+23^{\circ}\text{C}$)
- (c) Find the maximum frequency deviation from the operating frequency directly via the measuring instrument of the System Simulator.


4.4.3 Test Setup

1. Test Setup Sketch

The Test Sample (EUT) is typically powered by the Battery. The power source of the Test Sample (EUT) is replaced by a test DC Power Supply capable of producing normal and extreme test voltages.

The Test Sample (EUT) is coupled to a System Simulator; the RF load attached to the antenna terminal of the Test Sample (EUT) is 50Ohm. The path loss as the factor is calibrated to correct the reading.

The Test Sample (EUT) is allocated a traffic channel and operates at the corresponding working band under the condition of its maximum output power.

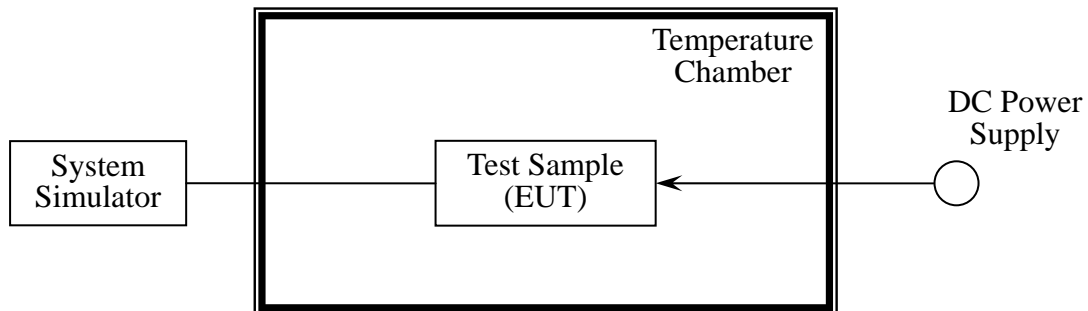

2. Equipments List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2006.06	1year
DC Power Supply	Good Will	GPS-3030DD	EF920938	2006.06	2year
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2006.03	1year

4.4.4 Test Result

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9 (825.27MHz)		Channel = 384 (836.52MHz)		Channel = 758 (847.74MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.7	-30	9.83	±2063.2	8.19	±2091.3	7.86	±2119.3	PASS
	-20	8.30		8.28		6.81		
	-10	9.65		9.00		8.92		
	0	10.12		8.24		6.03		
	+10	10.80		8.20		3.38		
	+20	15.55		8.65		4.03		
	+30	16.37		8.62		3.32		
	+40	17.89		10.19		2.75		
	+50	17.53		9.92		4.22		
4.2	+23	14.84		10.44		3.26		
3.6	+23	14.72		9.80		3.75		

4.5 Conducted Out of Band Emissions

4.5.1 Requirement

According to FCC section 22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB, which is calculated to be -13dBm.

4.5.2 Test Procedure


- (a) The lowest, middle and highest channels of the Test Sample (EUT) are employed to perform this test.
- (b) The test frequency range is from 9kHz to the 10th harmonic of the fundamental frequency.
- (c) The Spectrum Analyzer is set as below:
 - Resolution BW: 3MHz
 - Video BW: Auto
 - Sweep Time: Suitable to capture one transmission burst
 - Detector Mode: Peak
 - Trace Mode: Max Hold
- (d) Adjust the frequency range to capture the highest level of the emission. The value is recorded and compared with the limit line.

4.5.3 Test Setup

1. Test Setup Sketch

The Test Sample (EUT), powered by the Battery, is coupled to a Spectrum Analyzer and a System Simulator (SS) with appropriate Attenuators via a Power Splitter; the RF load attached to the antenna terminal of the Test Sample (EUT) is 50Ohm. The path loss as the factor is calibrated to correct the reading.

The Test Sample (EUT) is allocated a traffic channel and operates at the corresponding working band under the condition of its maximum output power.

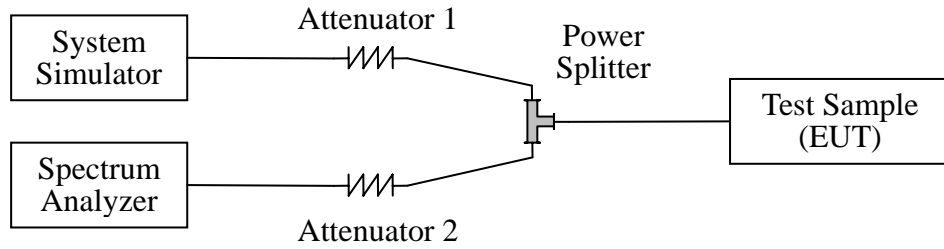

2. Equipments List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2006.06	1year
Spectrum Analyzer	Agilent	E7405A	US44210471	2006.07	1year
Power Splitter	Weinschel	1506A	NW521	(n.a.)	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)	(n.a.)


4.5.4 Test Result

NOTE: the emissions of EUT and SS carrier frequencies should be ignored.


a) Test Verdict

Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
9	825.27	< -20	Plot A.1/A.2	-13	PASS
384	836.52	< -20	Plot B.1/B.2		PASS
758	847.74	< -20	Plot C.1/C.2		PASS


b) Test Plots for the Whole Measurement Frequency Range

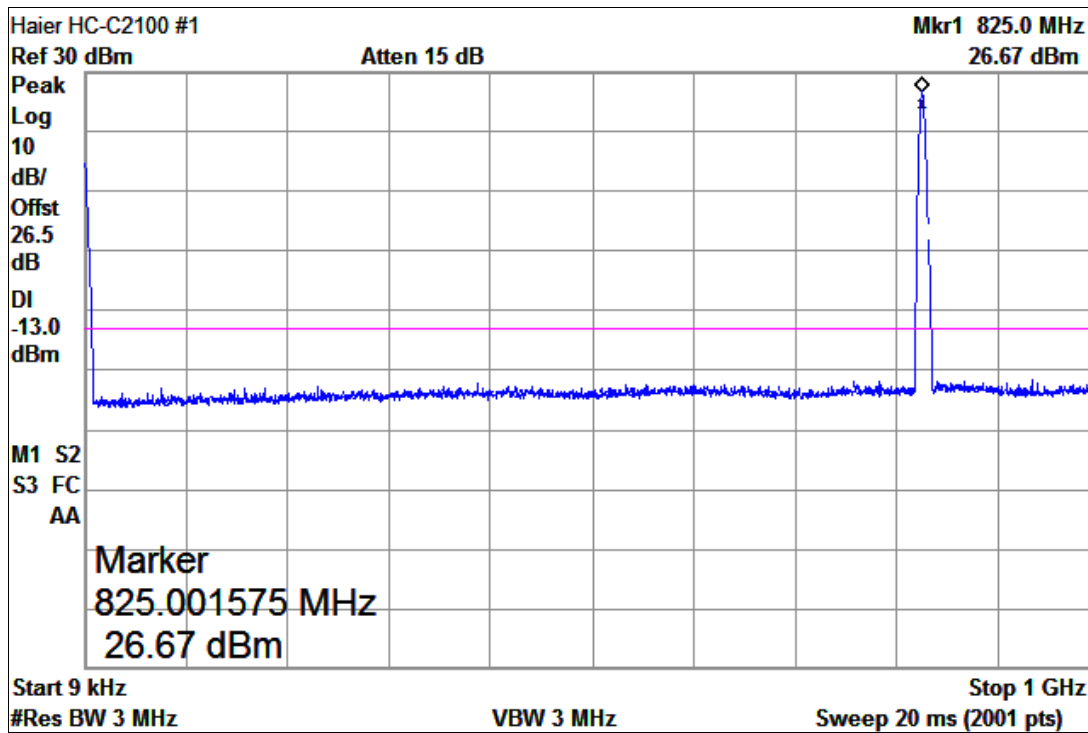


(Plot A.1: Channel = 9, 9kHz to 1GHz)

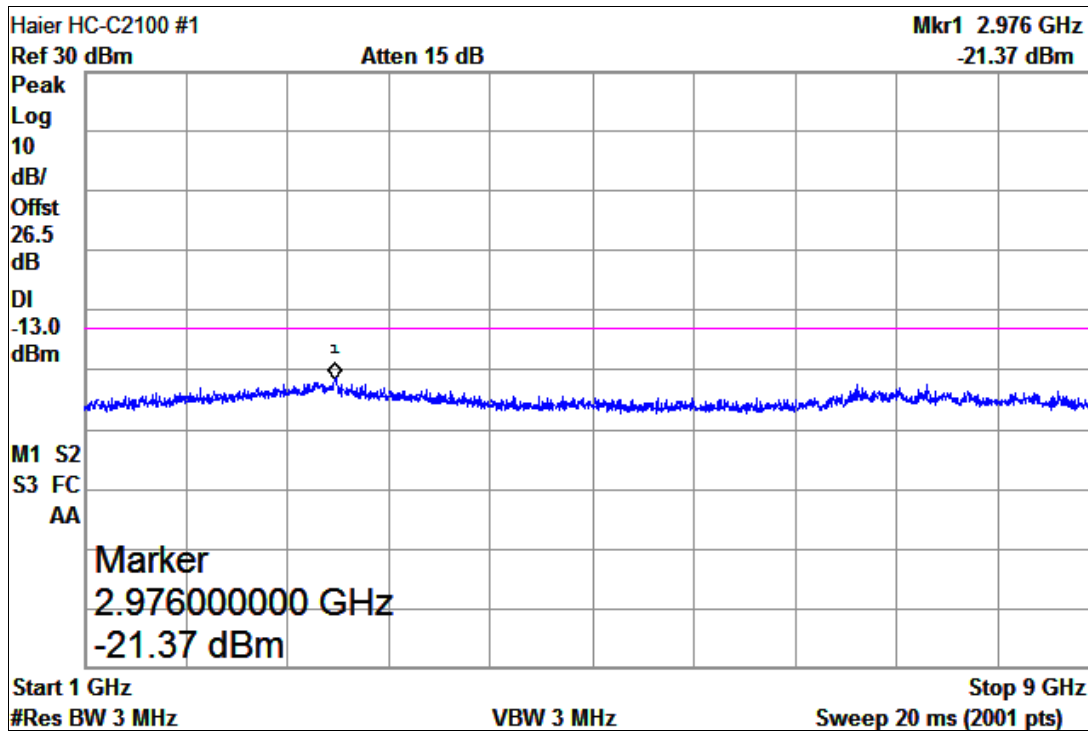


(Plot A.2: Channel = 9, 1GHz to 9GHz)

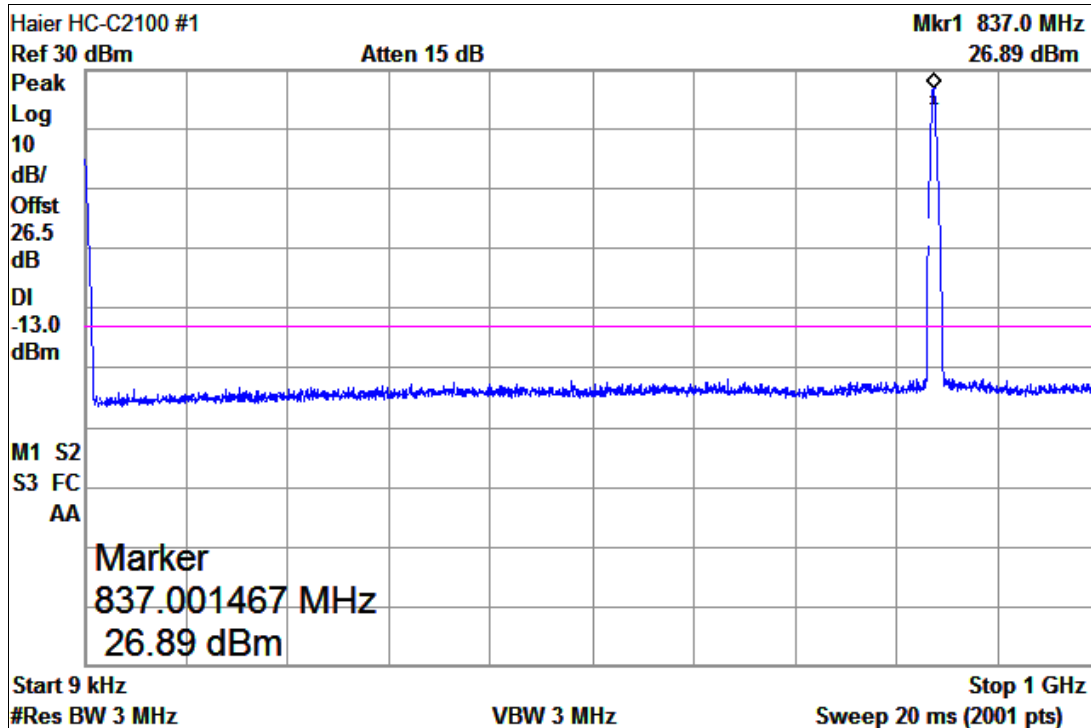


(Plot B.1: Channel = 384, 9kHz to 1GHz)

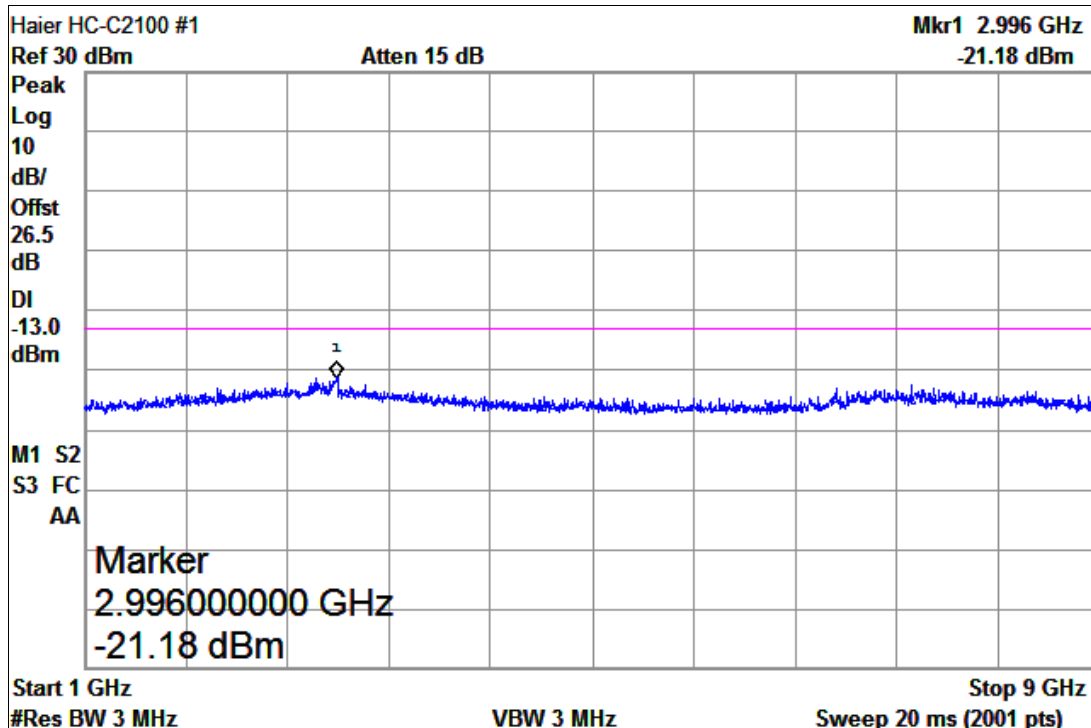

(Plot B.2: Channel = 384, 1GHz to 9GHz)

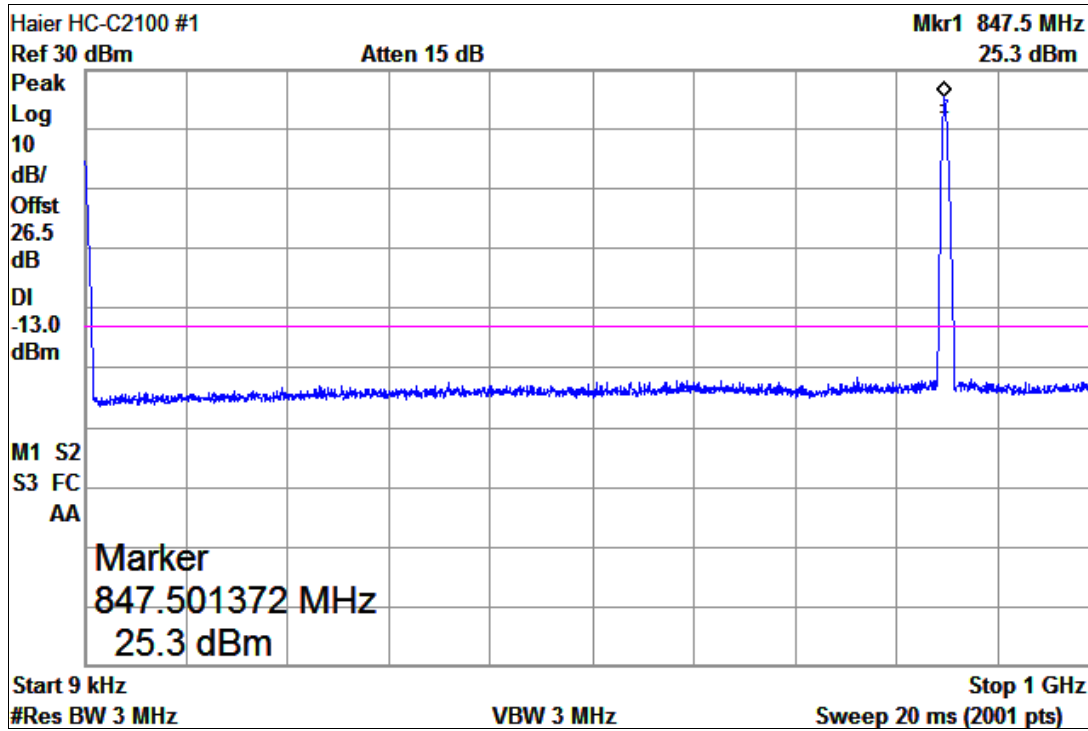

(Plot C.1: Channel = 758, 9kHz to 1GHz)

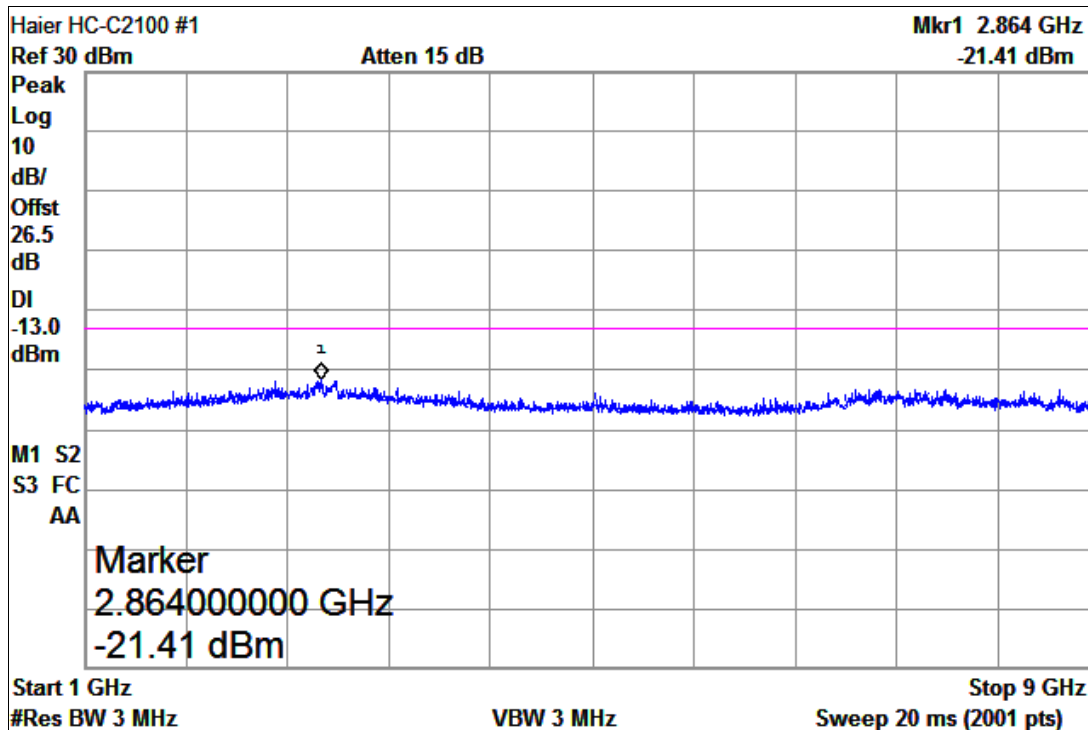

(Plot C.2: Channel = 758, 1GHz to 9GHz)

4.6 Band Edge

4.6.1 Requirement

According to FCC section 22.917(b), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

4.6.2 Test Procedure


- (a) The lowest and highest channels of the Test Sample (EUT) are employed to perform this test.
- (b) The Spectrum Analyzer is set as below:
 - Frequency Range: 1MHz bands immediately outside and adjacent to the frequency block
 - Resolution BW: 30kHz
 - Video BW: Auto
 - Sweep Time: Suitable to capture one transmission burst
 - Detector Mode: Peak
 - Trace Mode: Max Hold
- (c) Find the peak value of the trace from the Spectrum Analyzer over the test frequency range and record its power.

4.6.3 Test Setup

1. Test Setup Sketch

The Test Sample (EUT), powered by the Battery, is coupled to a Spectrum Analyzer and a System Simulator with appropriate Attenuators via a Power Splitter; the RF load attached to the antenna terminal of the Test Sample (EUT) is 50Ohm. The path loss as the factor is calibrated to correct the reading.

The Test Sample (EUT) is allocated a traffic channel and operates at the corresponding working band under the condition of its maximum output power.

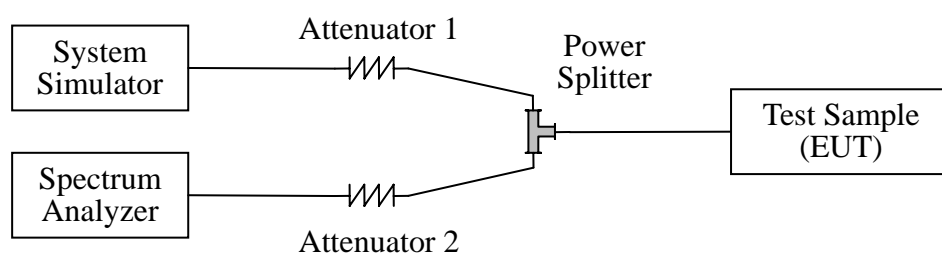

2. Equipments List


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2006.06	1year
Spectrum Analyzer	Agilent	E7405A	US44210471	2006.07	1year
Power Splitter	Weinschel	1506A	NW521	(n.a.)	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)	(n.a.)

4.6.4 Test Result


a) Test Verdict

Channel	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
9	825.27	-17.35	Plat A	-13	PASS
758	847.74	-17.97	Plot B		PASS

b) Test Plots

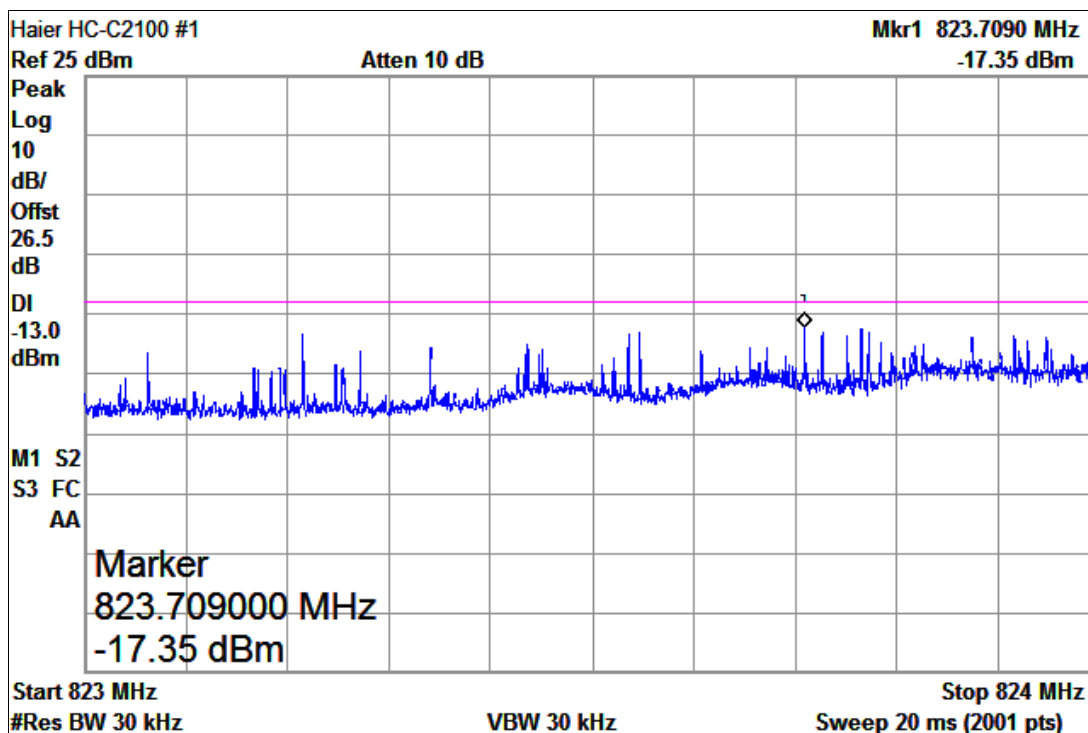

(Plot A: Channel = 9)

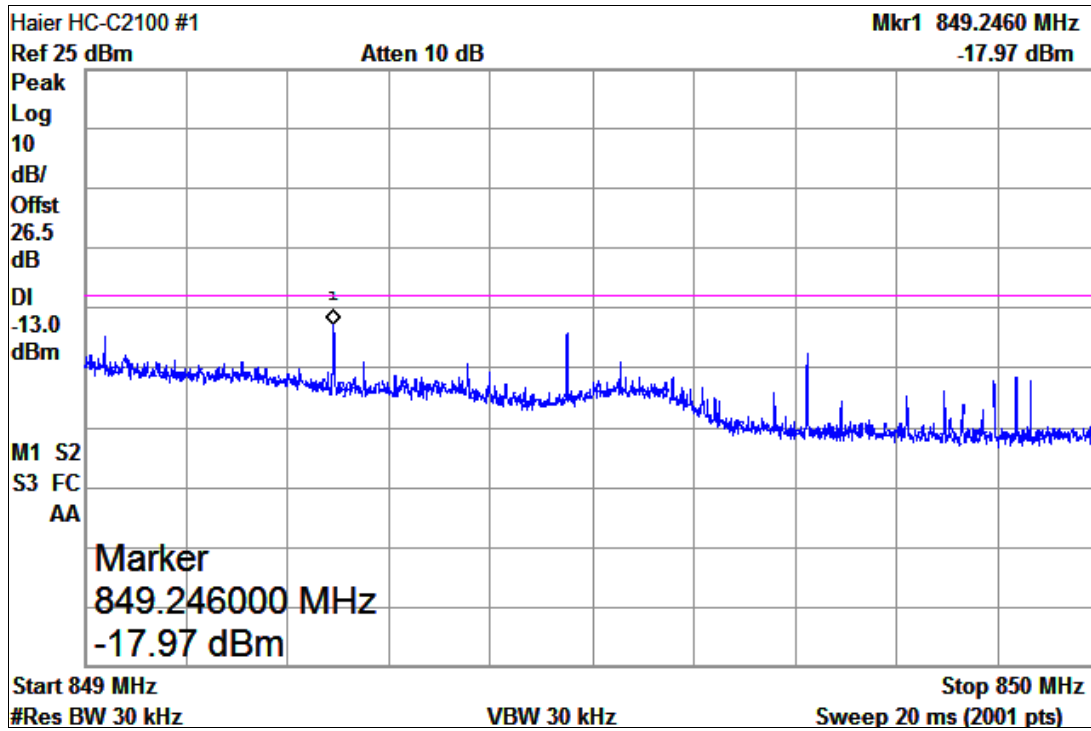

(Plot B: Channel = 758)

4.7 Transmitter Radiated Power (EIRP/ERP)

4.7.1 Requirement

According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts.

4.7.2 Test Procedure

- (a) The lowest, middle and highest channels of the Test Sample (EUT) are employed to perform this test.
- (b) The Spectrum Analyzer is set as below:
 - Center Frequency: The frequency of the channel under test
 - Resolution BW: 3MHz
 - Video BW: Auto
 - Frequency Span: Wide enough to cover the complete power envelope of the signal
 - Sweep Time: Suitable to capture one transmission burst
 - Detector Mode: Peak
 - Trace Mode: Max Hold
- (c) Rotate the Turn Table and vary the polarization of the Test Antenna to find the peak value of the trace from the Spectrum Analyzer and record its power as the maximum radiated power.


4.7.3 Test Setup

1. Test Setup Sketch

The test is performed in a 3m Full-Anechoic Chamber. The Test Sample (EUT), powered by the Battery, is placed on a 1.8m high insulating Turn Table and keeps 3m away from the Test Antenna which is a Bi-Log one with working frequency range from 30MHz to 3GHz. The Test Antenna is located at the same height as the Test Sample (EUT). The factor of the whole system is pre-calibrated using the "Substitution" method and calculated to correct the reading

The Test Sample (EUT) is allocated a traffic channel and operates at the corresponding working band under the condition of its maximum output power.

The Test Sample (EUT) works together with a System Simulator via a Common Antenna.

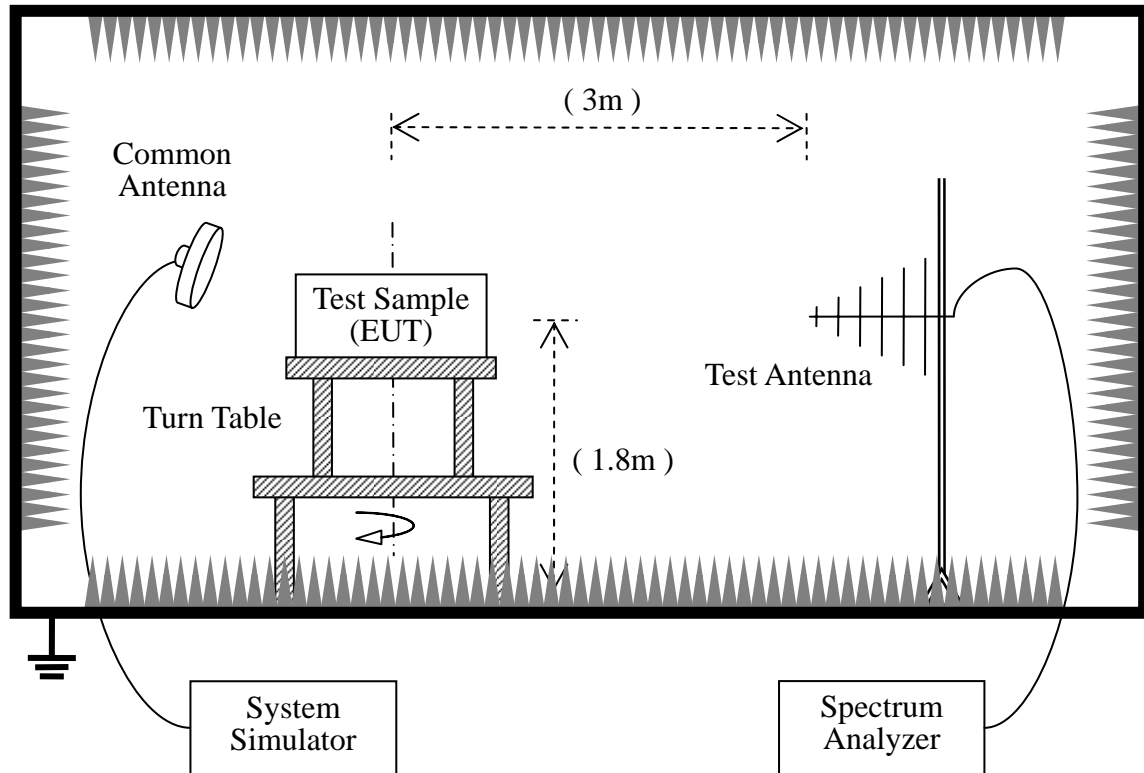

2. Equipments List


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E7405A	US44210471	2006.07	1year
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2006.08	2year
Test Antenna (Bi-Log)	Schwarzbeck	VULB 9163	9163-274	2006.07	1year
System Simulator	Agilent	E5515C	GB43130131	2006.06	1year
Common Antenna	(n.a.)	(n.a.)	(n.a.)	(n.a.)	(n.a.)

4.7.4 Test Result


a) Test Verdict

Channel	Frequency (MHz)	Measured ERP			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
9	825.27	21.36	0.14	Plot A	38.45	7	PASS
384	836.52	19.74	0.09	Plot B			PASS
758	847.74	23.07	0.20	Plot C			PASS


b) Test Plots

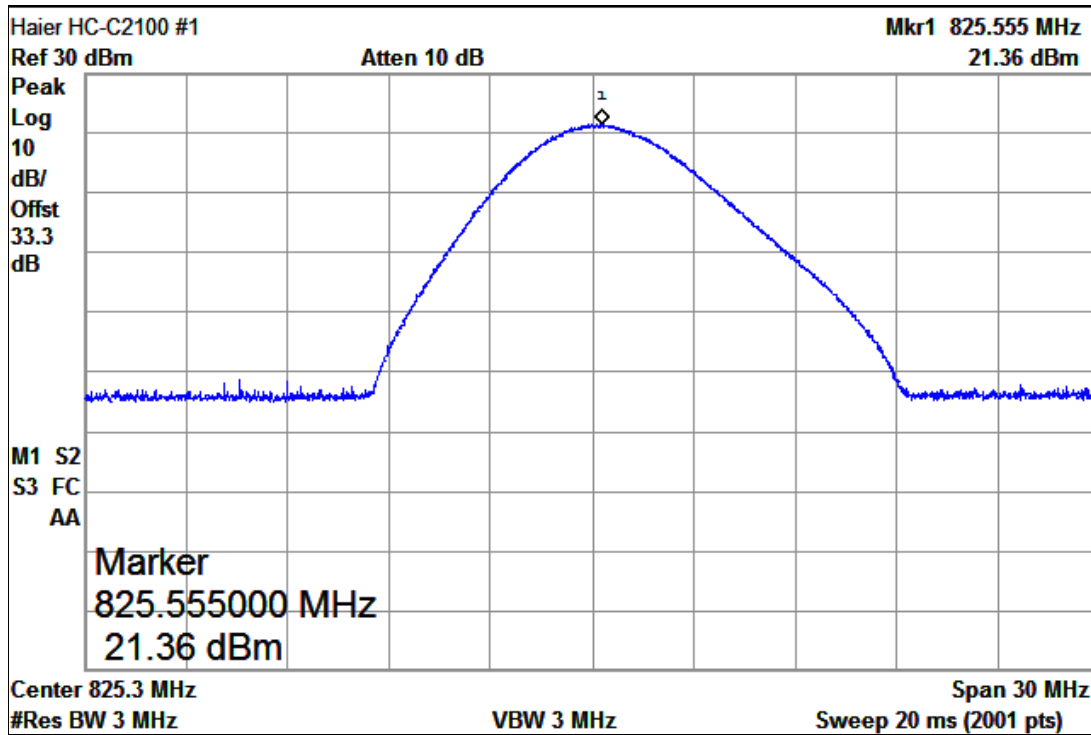

(Plot A: Channel = 9)

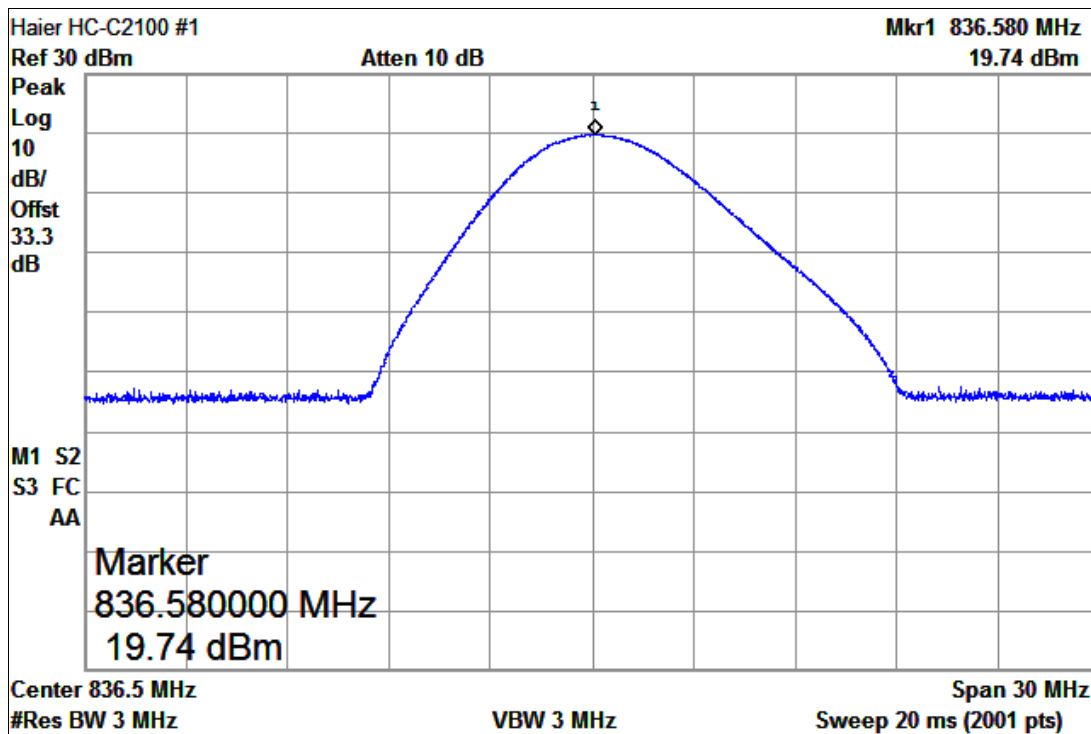

(Plot B: Channel = 384)

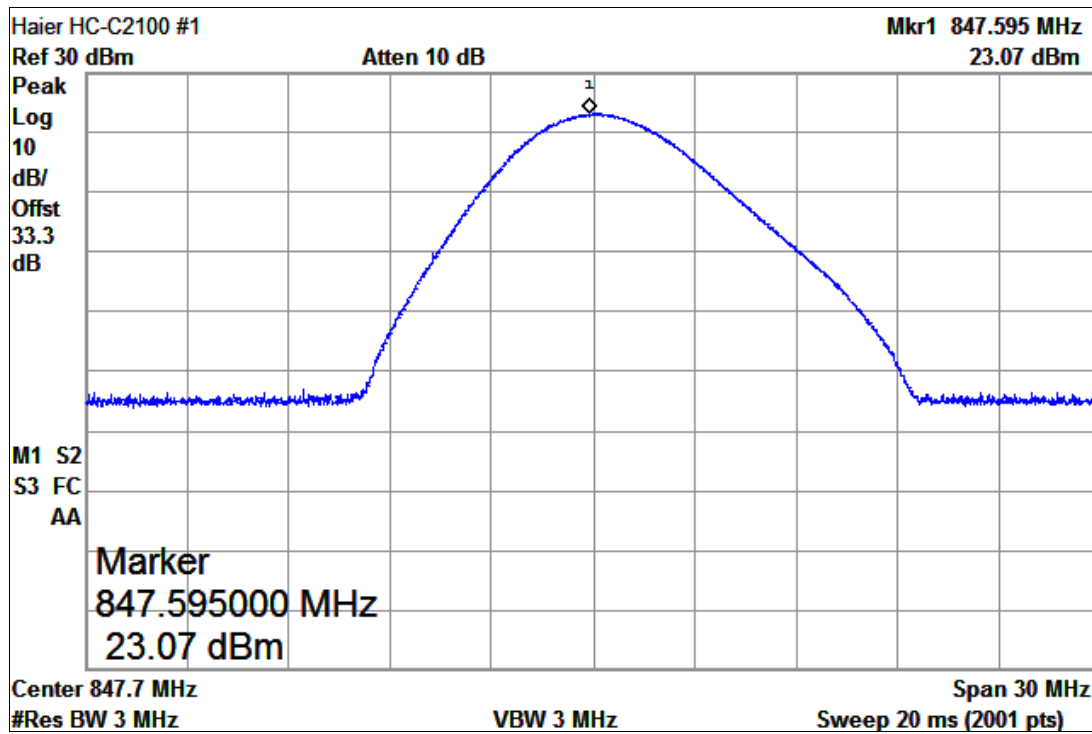

(Plot C: Channel = 758)

4.8 Radiated Out of Band Emissions

4.8.1 Requirement

According to FCC section 22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB, which is calculated to be -13dBm.

4.8.2 Test Procedure


- (a) The lowest, middle and highest channels of the Test Sample (EUT) are employed to perform this test.
- (b) The test frequency range is from 30MHz to the 10th harmonic of the fundamental frequency.
- (c) The Spectrum Analyzer is set as below:
 - Resolution BW: 1MHz
 - Video BW: Auto
 - Sweep Time: Suitable to capture one transmission burst
 - Detector Mode: Peak
 - Trace Mode: Max Hold
- (d) Adjust the frequency range and rotate the Turn Table to capture the highest level of the emission. The value is recorded and compared with the limit line.
- (e) Both the Vertical and the Horizontal polarizations of the Test Antenna are employed to perform this test.

4.8.3 Test Setup

1. Test Setup Sketch

The test is performed in a 3m Full-Anechoic Chamber. The Test Sample (EUT), powered by the Battery, is placed on a 1.8m high insulating Turn Table and keeps 3m away from the Test Antenna which is a Bi-Log one with working frequency range from 30MHz to 3GHz while a Horn one with working frequency range above 3GHz. The Test Antenna is located at the same height as the Test Sample (EUT). If applicable, a Filter (Notch and High-Pass) and a Preamplifier are employed for the measuring instrument of Spectrum Analyzer. The factor of the whole system is pre-calibrated using the "Substitution" method and calculated to correct the reading

The Test Sample (EUT) is allocated a traffic channel and operates at the corresponding working band under the condition of its maximum output power. The Test Sample (EUT) works together with a System Simulator via a Common Antenna.

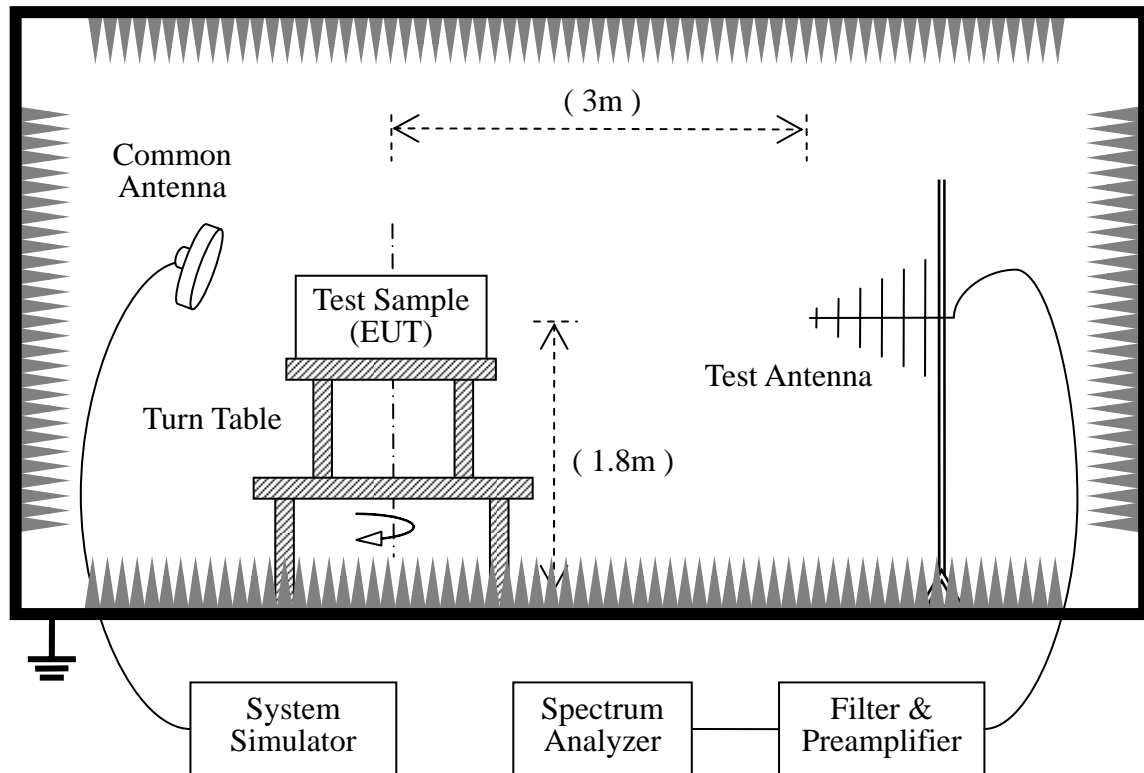

2. Equipments List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E7405A	US44210471	2006.07	1year
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2006.08	2year
Test Antenna (Bi-Log)	Schwarzbeck	VULB 9163	9163-274	2006.07	1year
Test Antenna (Horn)	Schwarzbeck	BBHA 9120C	9120C-384	2006.07	1year
System Simulator	Agilent	E5515C	GB43130131	2006.06	1year
Preamplifier	(n.a.)	20dB	(n.a.)	(n.a.)	(n.a.)
Filter (Notch)	(n.a.)	(n.a.)	(n.a.)	(n.a.)	(n.a.)
Filter (High-Pass)	(n.a.)	(n.a.)	(n.a.)	(n.a.)	(n.a.)
Common Antenna	(n.a.)	(n.a.)	(n.a.)	(n.a.)	(n.a.)


4.8.4 Test Result

NOTE: the emissions of EUT and SS carrier frequencies should be ignored.


a) Test Verdict

Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)		Refer to Plot	Limit (dBm)	Verdict
		Test Antenna Horizontal	Test Antenna Vertical			
9	825.27	< -30	< -30	Plot A.1 to A.4	-13	PASS
384	836.52	< -30	< -30	Plot B.1 to B.4		PASS
758	847.74	< -30	< -30	Plot C.1 to C.4		PASS


b) Test Plots for the Whole Measurement Frequency Range

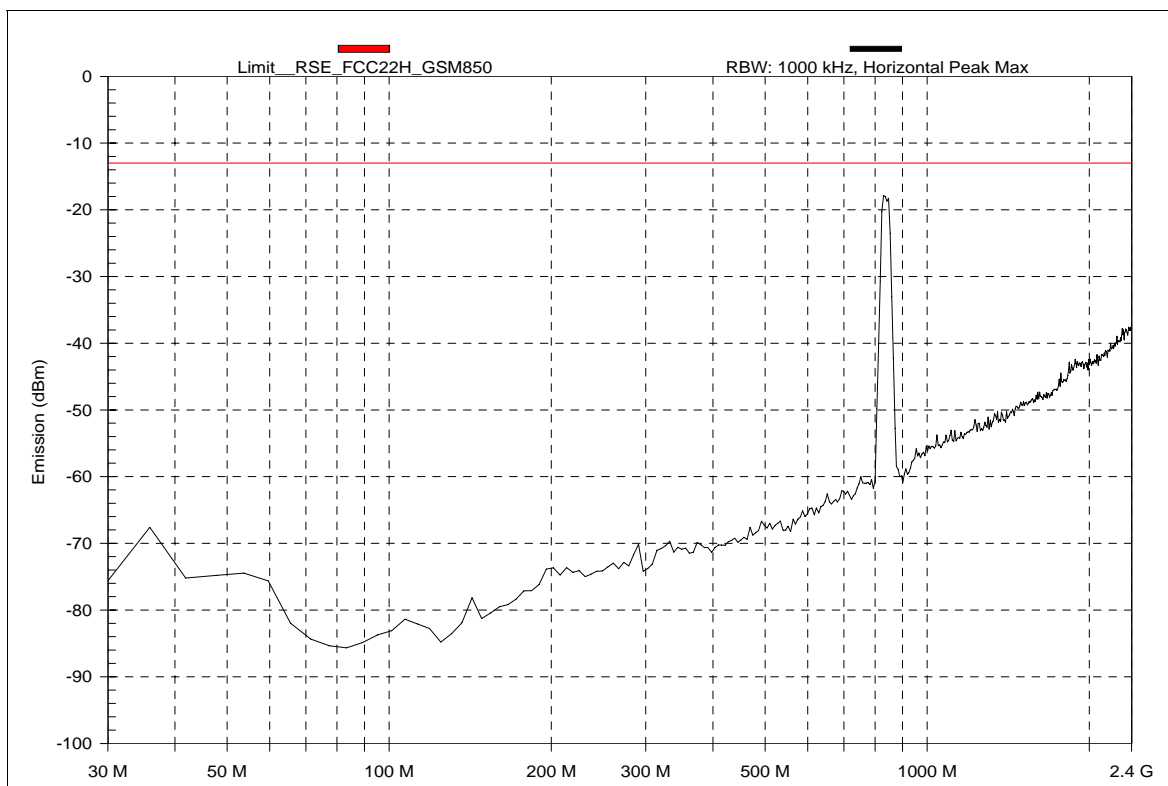


(Plot A.1: Channel = 9, Test Antenna Horizontal, 30MHz to 2.4GHz)

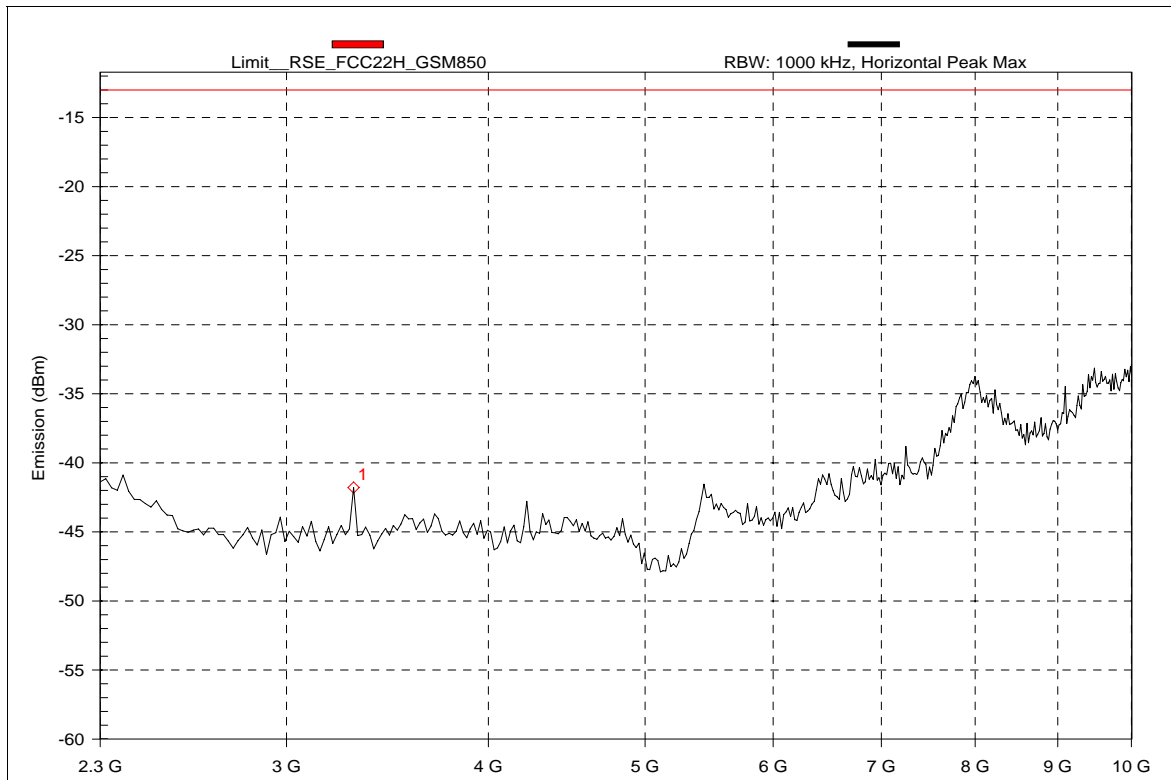


(Plot A.2: Channel = 9, Test Antenna Horizontal, 2.4GHz to 9GHz)

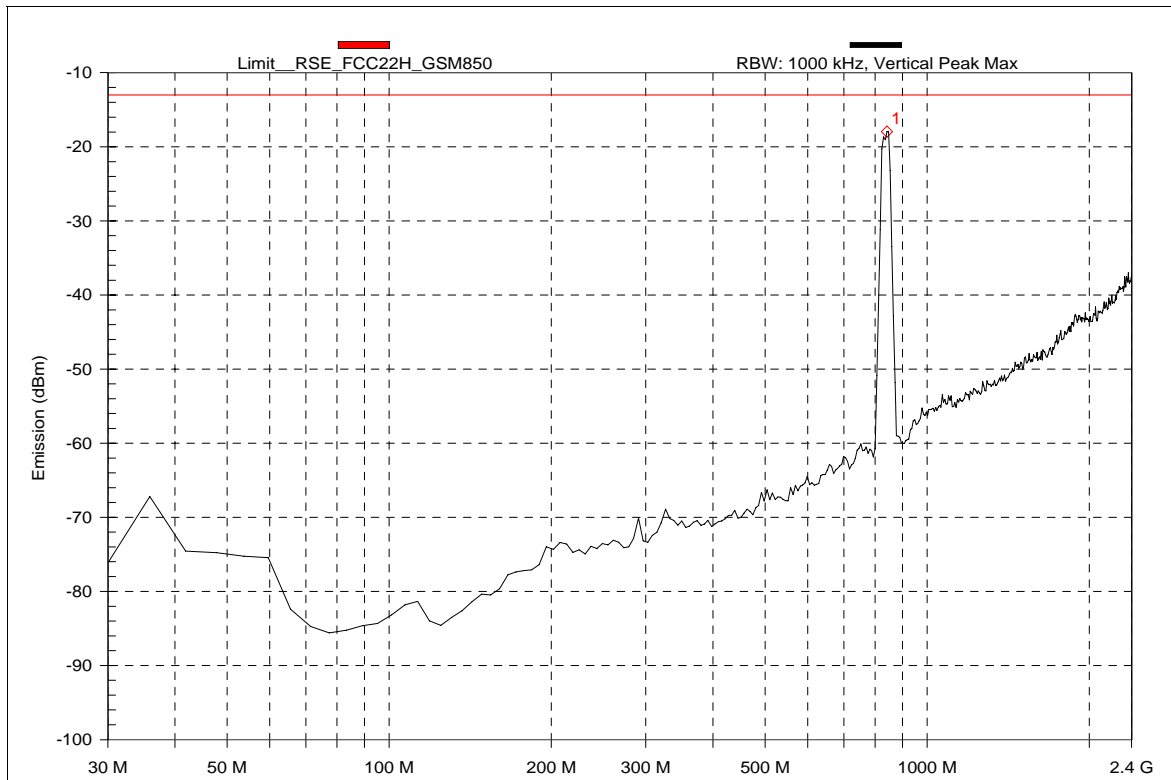


(Plot A.3: Channel = 9, Test Antenna Vertical, 30MHz to 2.4GHz)

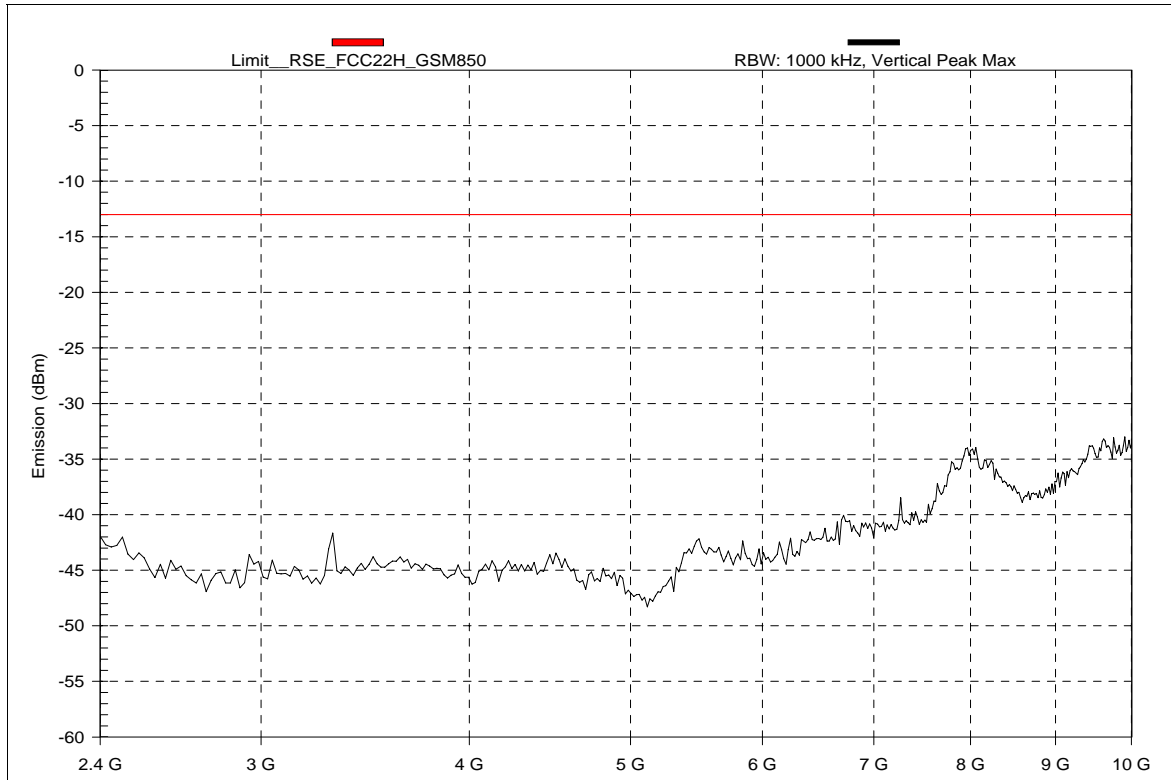


(Plot A.4: Channel = 9, Test Antenna Vertical, 2.4GHz to 9GHz)

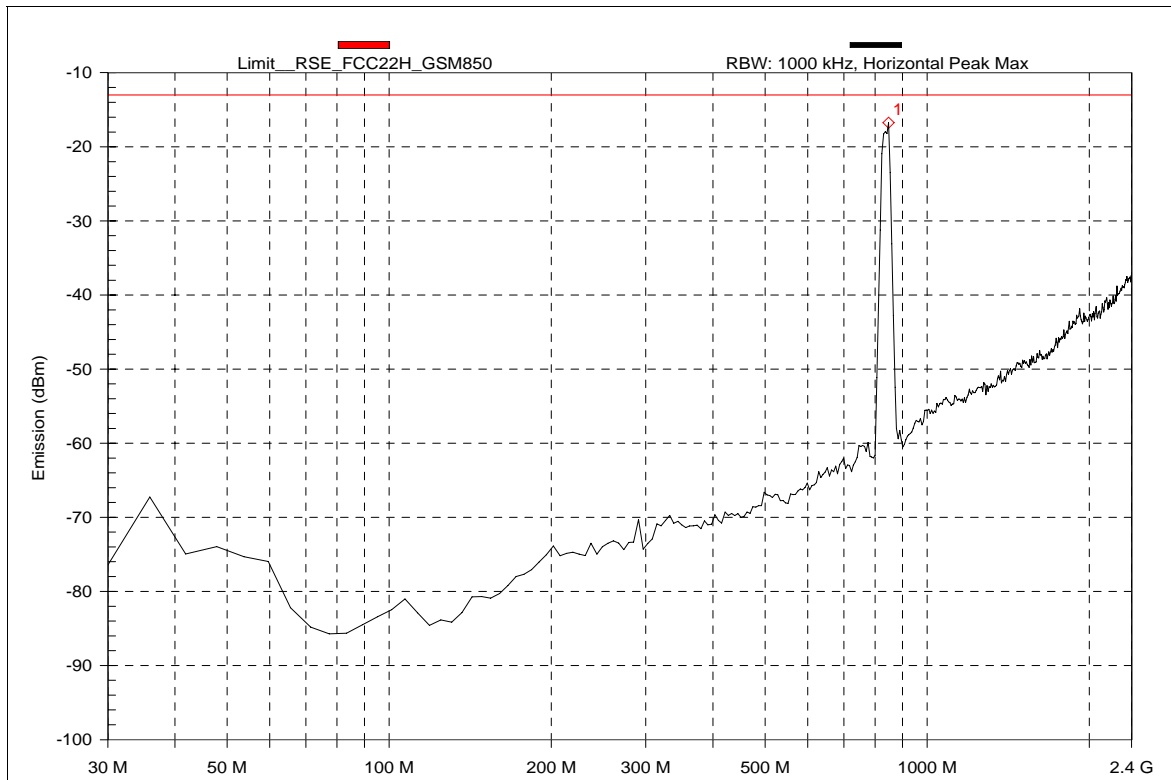


(Plot B.1: Channel = 384, Test Antenna Horizontal, 30MHz to 2.4GHz)

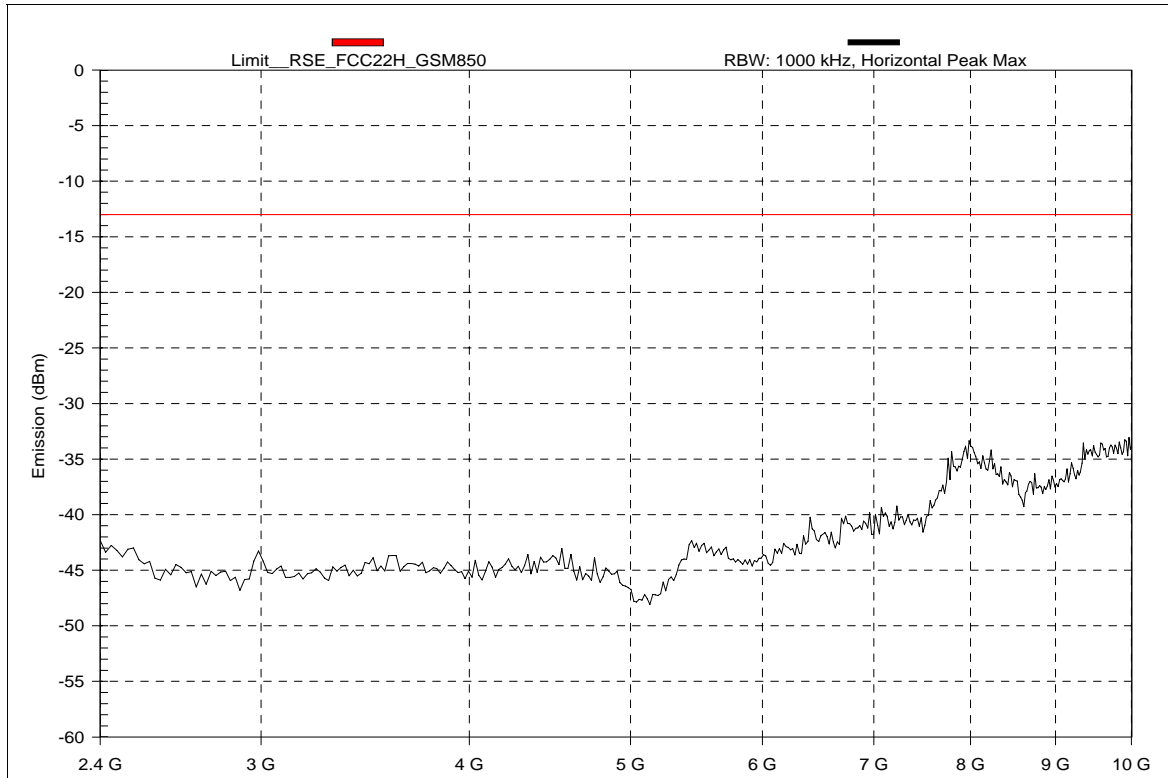


(Plot B.2: Channel = 384, Test Antenna Horizontal, 2.4GHz to 9GHz)

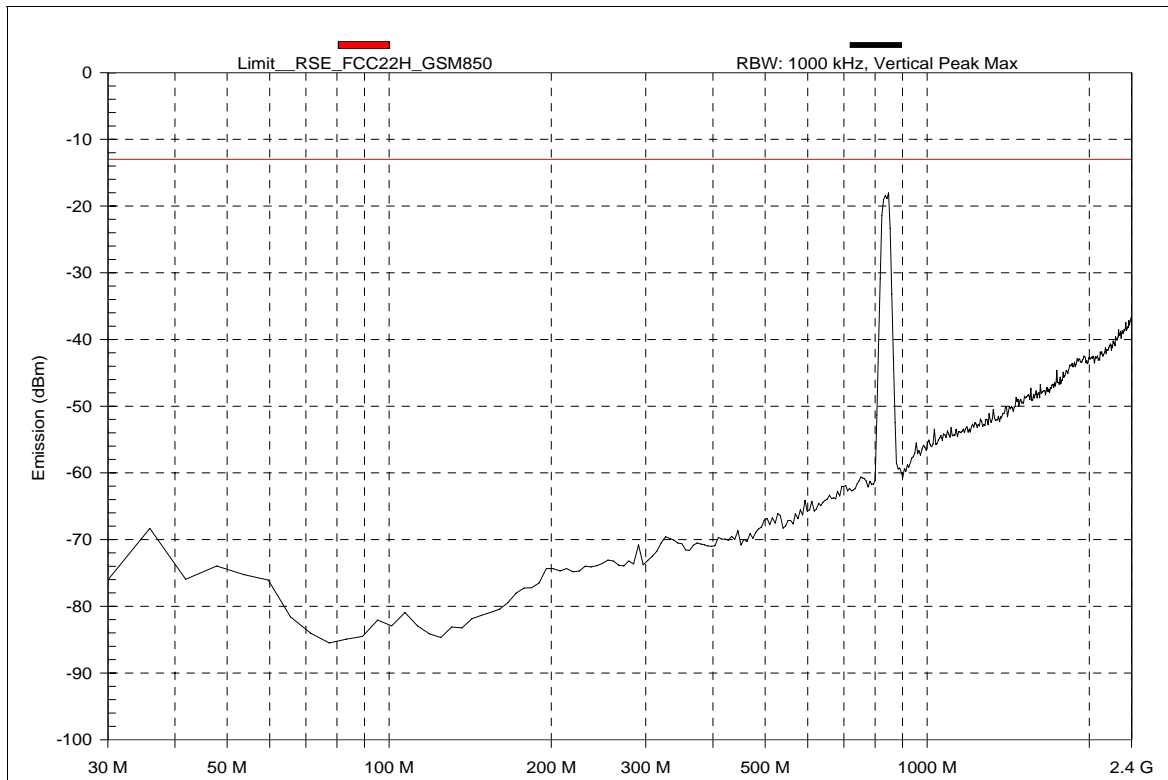


(Plot B.3: Channel = 384, Test Antenna Vertical, 30MHz to 2.4GHz)

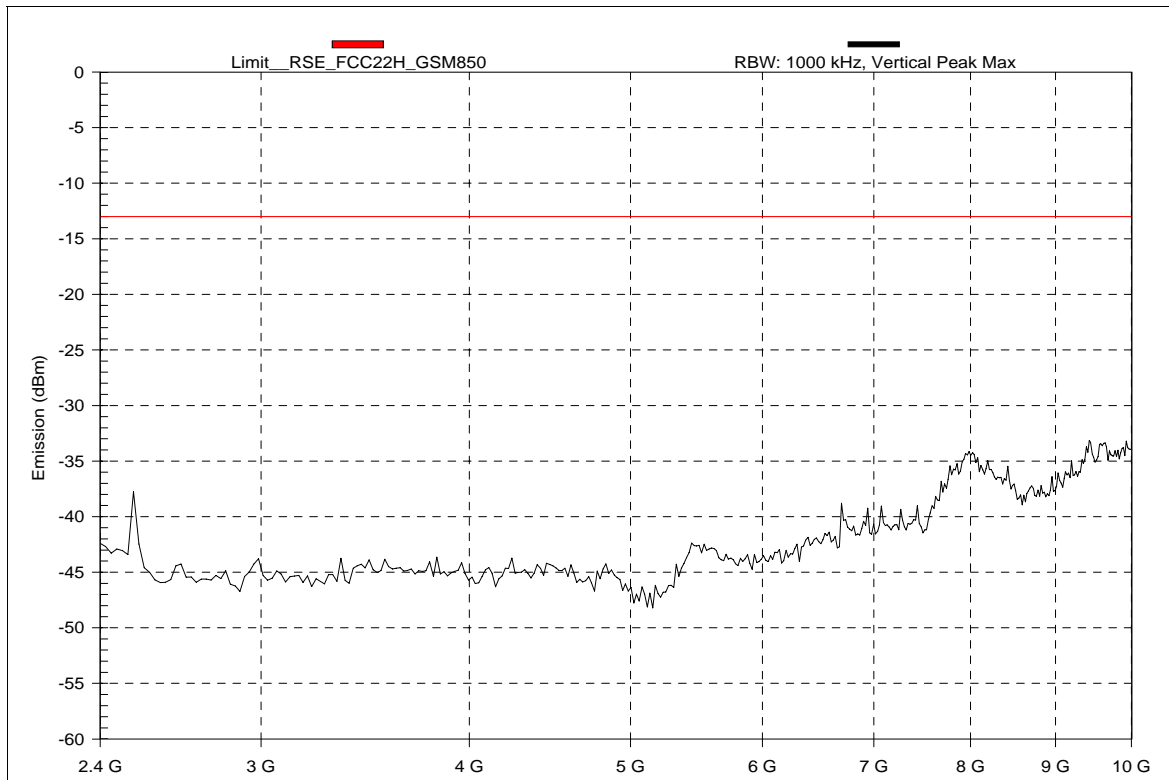


(Plot B.4: Channel = 384, Test Antenna Vertical, 2.4GHz to 9GHz)

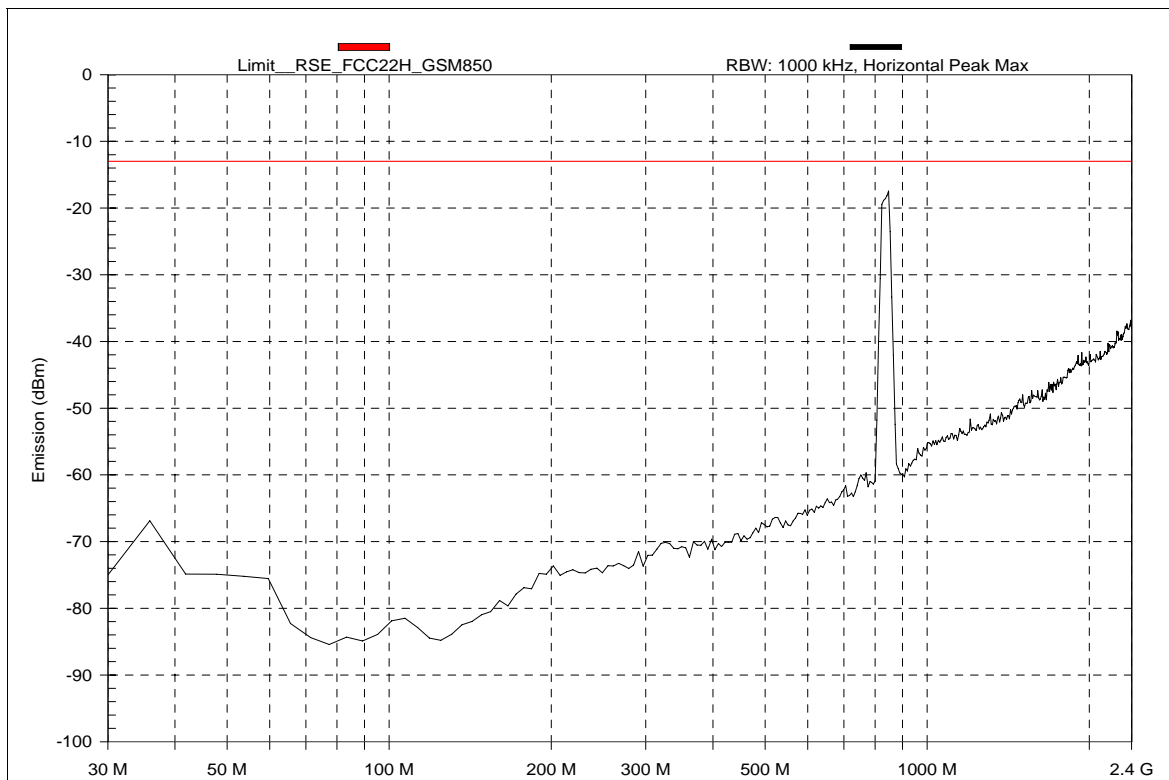


(Plot C.1: Channel = 758, Test Antenna Horizontal, 30MHz to 2.4GHz)

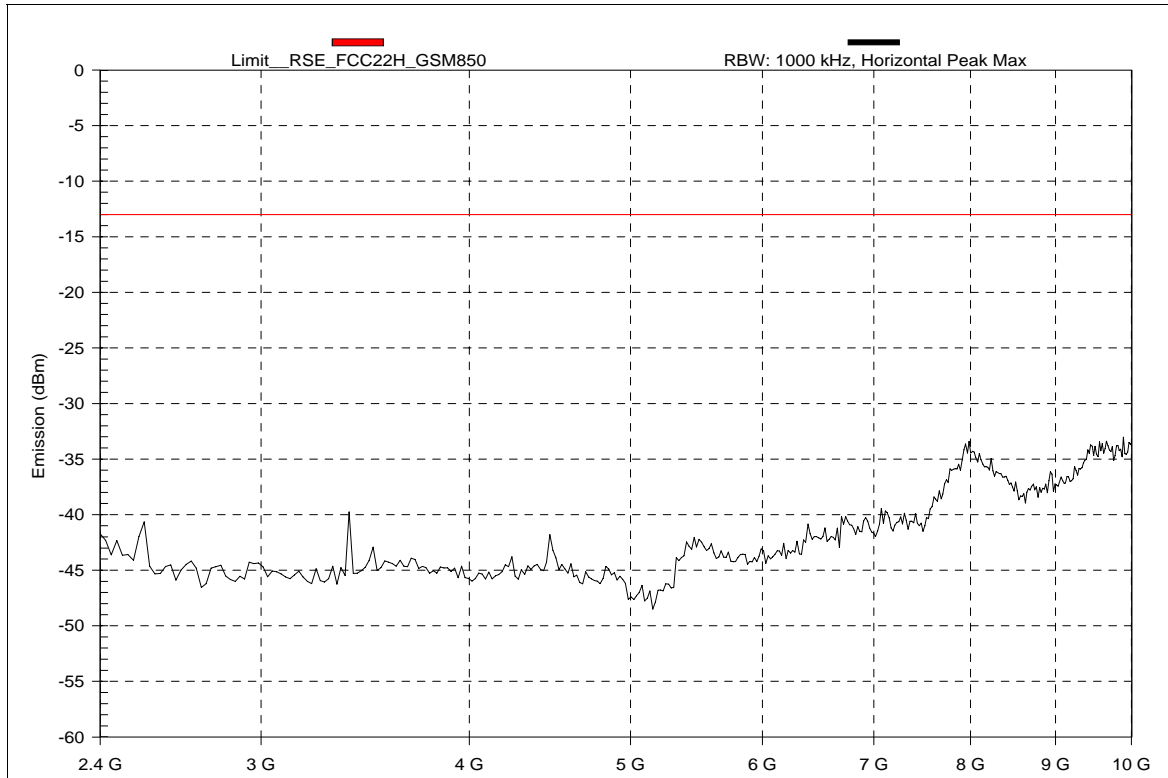

(Plot C.2: Channel = 758, Test Antenna Horizontal, 2.4GHz to 9GHz)

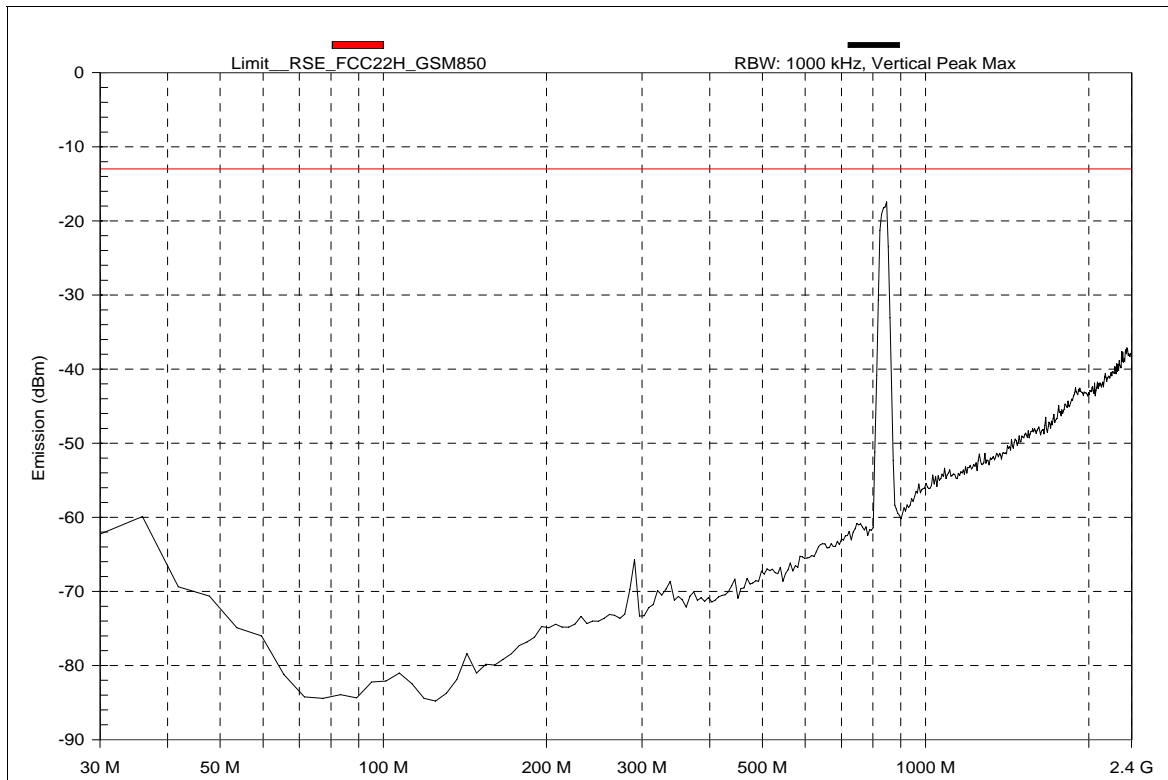

(Plot C.3: Channel = 758, Test Antenna Vertical, 30MHz to 2.4GHz)

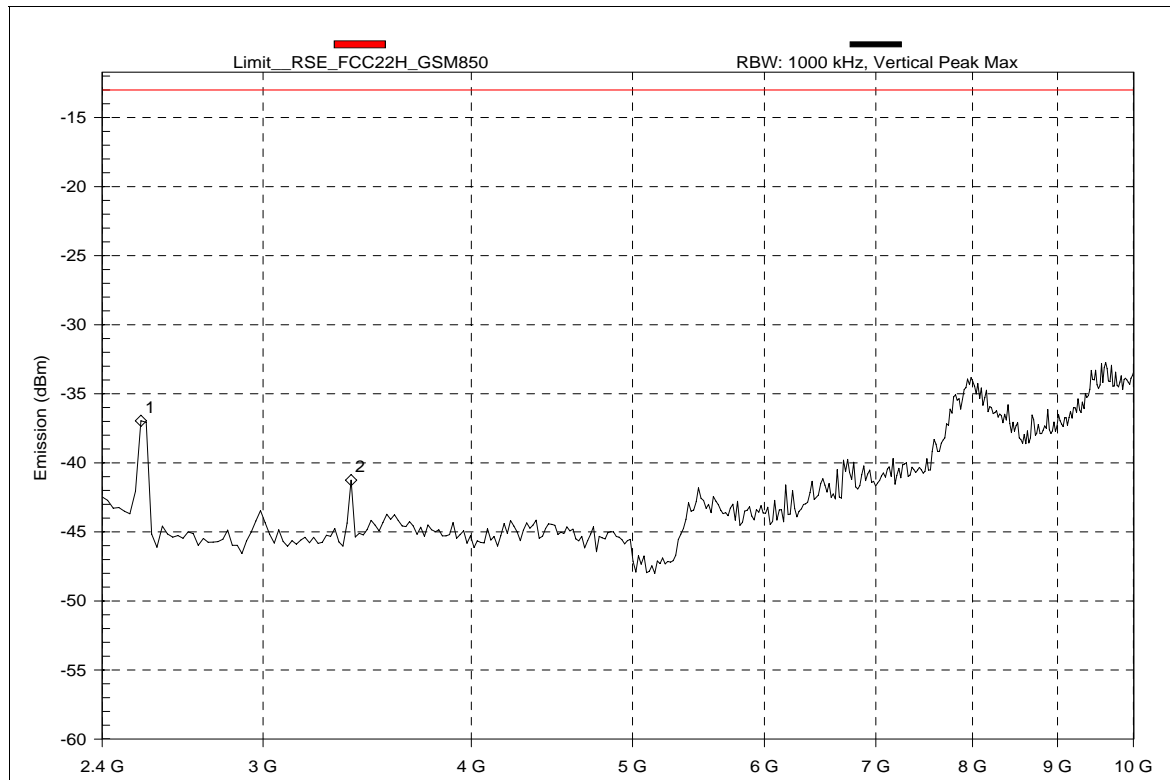

(Plot C.4: Channel = 758, Test Antenna Vertical, 2.4GHz to 9GHz)



** END OF REPORT **