



47 CFR PART 22 H, 24E

# TEST REPORT

of

**HC-D2100**

Model Name: HC-D2100  
Brand Name: Haier  
Report No.: SZ09010024E01  
FCC ID: SG70901HC-D2100

*prepared for*

**Qingdao Haier Telecom Co., Ltd.**

No.1, Haier Road, Hi-tech Zone, Qingdao, 260001, P.R. China

*prepared by*

**Shenzhen Morlab Communications Technology Co., Ltd.**

3/F, Electronic Testing Building, Shahe Road, Xili,  
Nanshan District, Shenzhen, 518055 P.R. China

Tel: +86 755 86130398

Fax: +86 755 86130218



**NOTE:** This test report can be duplicated completely for the legal use with the approval of the applicant, it shall not be reproduced except in full, without the written approval of Shenzhen Morlab Communications Technology Co., Ltd. Any objections should be raised to us within thirty workdays since the date of issue.



## TABLE OF CONTENTS

<b>1.</b>	<b>TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2.</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
<b>2.1</b>	<b>Equipment under Test (EUT) Description .....</b>	<b>5</b>
<b>2.2</b>	<b>Test Standards and Results .....</b>	<b>6</b>
<b>2.3</b>	<b>Facilities and Accreditations .....</b>	<b>7</b>
2.3.1	Facilities .....	7
2.3.2	Test Equipments .....	7
2.3.3	Test Environment Conditions.....	8
<b>3.</b>	<b>47 CFR PART 2, PART 22H, PART 24E REQUIREMENTS .....</b>	<b>9</b>
<b>3.1</b>	<b>General Information.....</b>	<b>9</b>
3.1.1	Conducted Related Tests .....	9
3.1.2	Radiated Power and Spurious Emission Tests .....	10
3.1.3	Frequency Stability Test.....	11
<b>3.2</b>	<b>Frequencies.....</b>	<b>12</b>
3.2.1	Requirement .....	12
3.2.2	Test Procedure .....	12
3.2.3	Test Result .....	13
<b>3.3</b>	<b>Conducted RF Output Power .....</b>	<b>15</b>
3.3.1	Requirement .....	15
3.3.2	Test Procedure .....	15
3.3.3	Test Result .....	15
<b>3.4</b>	<b>Occupied Bandwidth .....</b>	<b>18</b>
3.4.1	Occupied Bandwidth Definition .....	18
3.4.2	Test Procedure .....	18
3.4.3	Test Result .....	18
<b>3.5</b>	<b>Conducted Spurious Emission.....</b>	<b>21</b>
3.5.1	Requirement .....	21
3.5.2	Test Procedure .....	21
3.5.3	Test Result .....	22
<b>3.6</b>	<b>Transmitter Radiated Power (EIRP/ERP).....</b>	<b>29</b>



3.6.1	Requirement .....	29
3.6.2	Test Procedure .....	29
3.6.3	Test Result .....	29
<b>3.7</b>	<b>Radiated Spurious Emission .....</b>	<b>32</b>
3.7.1	Requirement .....	32
3.7.2	Test Procedure .....	32
3.7.3	Test Result .....	33
<b>3.8</b>	<b>Frequency Stability .....</b>	<b>38</b>
3.8.1	Frequency Stability Requirement .....	38
3.8.2	Test Procedure .....	38
3.8.3	Test Result .....	39

## 1. Test Result Certification

Equipment under Test: HC-D2100

Brand Name: Haier

Model Name: HC-D2100

FCC ID: SG70901HC-D2100

Applicant: Qingdao Haier Telecom Co., Ltd.

No.1,Haier Road,Hi-tech Zone,Qingdao,260001,P.R.China

Manufacturer: Qingdao Haier Telecom Co.,Ltd.

No.1,Haier Road,Hi-tech Zone,Qingdao,260001,P.R.China

Test Standards: 47 CFR Part 2

47 CFR Part 22 Subpart H

47 CFR Part 24 Subpart E

Test date: January 8, 2009–January 17, 2009

Test Result: PASS

### \* We Hereby Certify That:

The equipment under test was tested by Shenzhen Morlab Communications Technology Co., Ltd. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related FCC rules.


The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by:




Li Yi

Dated:



Reviewed by:



Wei Yanquan

Dated:





Approved by:



Shu Luan

Dated:

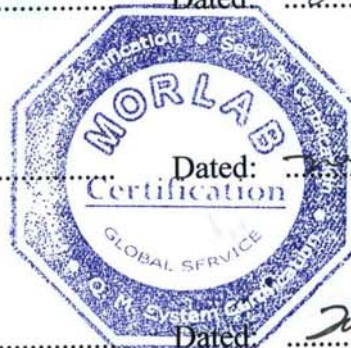





## 2.2 Test Standards and Results

The objective of the report is to perform tests according to 47 CFR Part 15 Part 22 and Part 24 for FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-05 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-05 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-05 Edition)	Personal Communications Services

Test detailed items and the results are as below:

No.	Section	Description	Result
FCC Part 22, 24 Requirement			
1	2.106; 22.905 24.229	Frequencies	PASS
2	2.1046	Conducted RF Output Power	PASS
3	2.1049	20dB Occupied Bandwidth	PASS
4	2.1055; 22.355 24.235	Frequency Stability	PASS
5	2.1051; 2.1057 22.917; 24.238	Conducted Out of Band Emissions	PASS
6	2.1051; 2.1057 22.917; 24.238	Band Edge	PASS
7	22.913; 24.232	Transmitter Radiated Power (EIPR/ERP)	PASS
8	2.1053; 2.1057 22.917; 24.238	Radiated Out of Band Emissions	PASS

## 2.3 Facilities and Accreditations

### 2.3.1 Facilities

Shenzhen Electronic Product Quality Testing Center Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is CNAS L1659.

All measurement facilities used to collect the measurement data are located at Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, P. R. China. The site was constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22, the FCC registration number is 741109.

### 2.3.2 Test Equipments

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2008.09	1year
Spectrum Analyzer	Agilent	E7405A	US44210471	2008.09	1year
Telecommunication Antenna	European Antennas	PSA-45010R/356	403688-001	(n.a.)	(n.a.)
Trilogy Antenna	Schwarzbeck	VULB 9163	9163-274	2008.08	1year
Horn Antenna	Schwarzbeck	BBHA 9120C	9120C-384	2008.08	1year
Power Splitter	Weinschel	1506A	NW521	(n.a.)	(n.a.)
Anechoic Chamber	Albatross Projects GmbH	9m*6m*6m	(n.a.)	2008.08	2year
DC Power Supply	Good Will	GPS-3030DD	EF920938	2007.06	2year
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2008.03	1year
LISN	Schwarzbeck	NSLK 8127	812744	2008.09	1year
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)	(n.a.)
Bluetooth-Headset	Nokia	HS-36W	(n.a.)	(n.a.)	(n.a.)
Wireless Router	(n.a.)	D-Link	BN64448000052	(n.a.)	(n.a.)
T-Flash Card	SanDisk	256MB	(n.a.)	(n.a.)	(n.a.)

NOTE:

- Equipments listed above have been calibrated and are in the period of validation.

### 2.3.3 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:


Temperature:	20 - 25°C
Relative Humidity:	40 - 60%
Atmospheric Pressure:	86-106kPa



### 3. 47 CFR Part 2, Part 22H, Part 24E Requirements


#### 3.1 General Information

##### 3.1.1 Conducted Related Tests

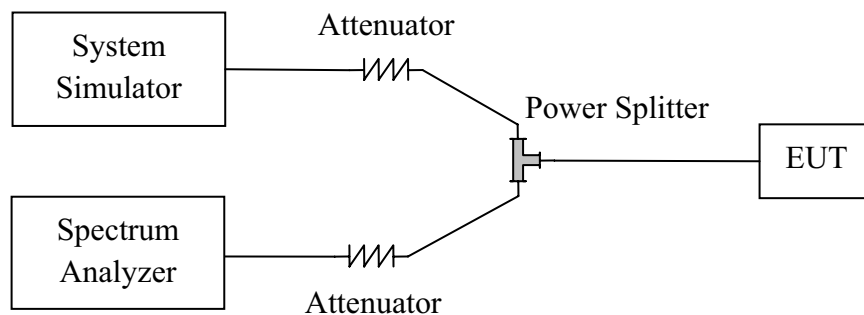


1. The EUT is coupled to the Spectrum Analyzer and the System Simulator with the suitable Attenuators through the Power Splitter; the path loss is calibrated to correct the reading.
2. The EUT is configured here as MS + Battery.
3. The EUT is commanded via the System Simulator (SS) to operate at the maximum output power .A communication link is established between the EUT and the SS.
4. The Spectrum Analyzer is set to max-peak detector function and maximum hold mode.

### 3.1.2 Radiated Power and Spurious Emission Tests

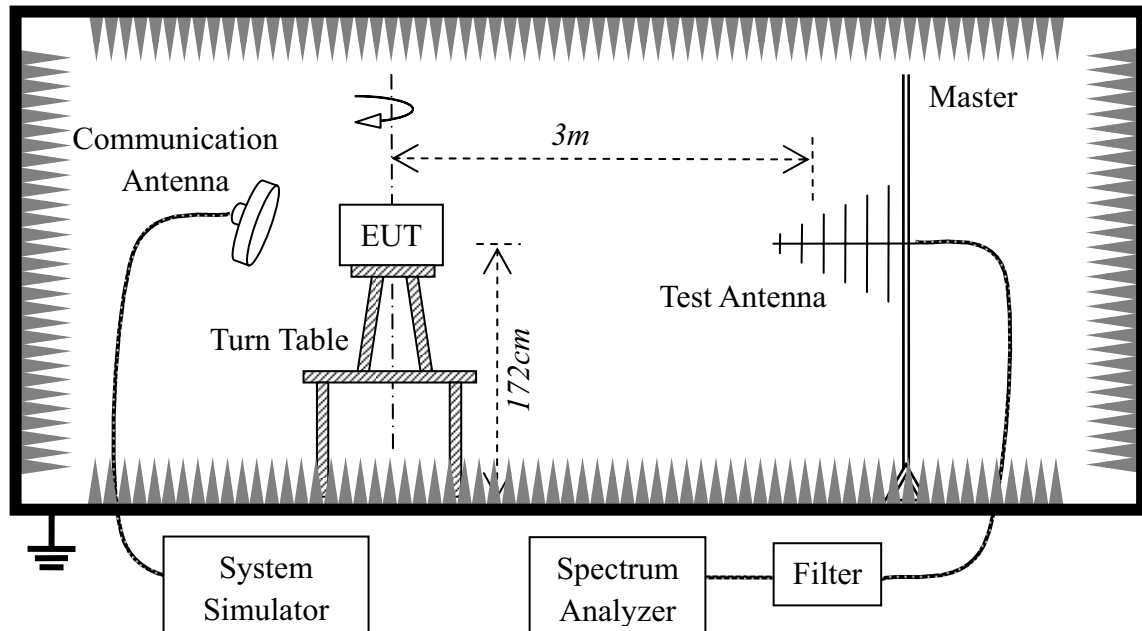

1. The test is performed in a full-Anechoic Chamber; the air loss of the site and the factors of the test system are pre-calibrated using the substitution method.
2. The EUT is configured as MS + Battery.
3. The EUT is placed on the vertical axis of a Turn Table 1.72 meters above the ground.
4. The Test Antenna is a bi-log one or a horn one, and the Test Antenna is at the same height as the EUT.
5. The EUT is commanded via the System Simulator (SS) to operate at the maximum output power. A communication link is established between the EUT and the SS.
6. The Spectrum Analyzer is set to max-peak detector function and maximum hold mode.

### 3.1.3 Frequency Stability Test

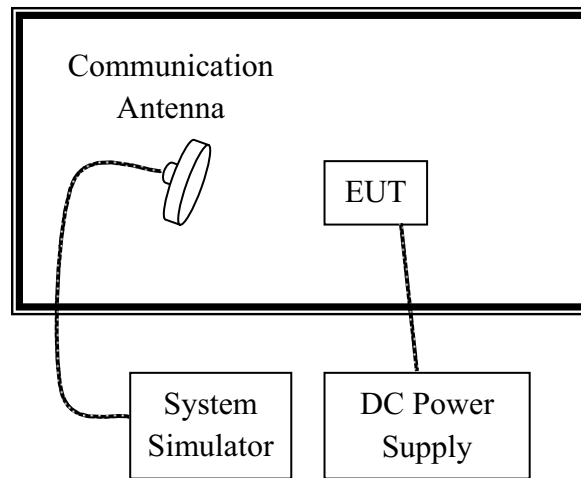

1. The test is performed in a Temperature Chamber.
2. The EUT is configured as MS + DC Power Supply.

## 3.2 Frequencies

### 3.2.1 Requirement

According to FCC §22.905, the frequencies blocks assignment for the Cellular Radiotelephone Service are listed as below.

- (a) Channel Block A:
  - Mobile 824 - 835MHz, Base 869 - 880MHz;
  - Mobile 845 - 846.5MHz, Base 890 - 891.5MHz
- (b) Channel Block B:
  - Mobile 835 - 845 MHz, Base 880 - 890MHz;
  - Mobile 846.5 - 849 MHz, Base 891.5 - 894MHz

According to FCC section 24.229, the frequencies available in the Broadband PCS services are listed as below, in accordance with the frequency allocations table of FCC section 2.106.

- (a) The following frequency blocks are available for assignment on an MTA basis:
  - Block A: 1850 - 1865MHz paired with 1930 - 1945MHz;
  - Block B: 1870 - 1885MHz paired with 1950 - 1965MHz.
- (b) The following frequency blocks are available for assignment on a BTA basis:
  - Block C: 1895 - 1910 MHz paired with 1975 - 1990MHz;
  - Block D: 1865 - 1870 MHz paired with 1945 - 1950MHz;
  - Block E: 1885 - 1890 MHz paired with 1965 - 1970MHz;
  - Block F: 1890 - 1895 MHz paired with 1970 - 1975MHz.

### 3.2.2 Test Procedure

1. Perform test system setup as section 3.1.1.
2. The resolution bandwidth (RBW) of the Spectrum Analyzer was set to at least 1% of the emission bandwidth of the fundamental emission of the transmitter, e.g. for GSM modulated signal (here used):  $RBW=VBW=3kHz$ , for CDMA modulated signal:  $RBW=VBW=30kHz$ .
3. The transmitter frequency arrangement of the Cellular 800MHz (or Cellular 1900MHz) band employed by the EUT should be from 825.27MHz to 847.74MHz (or 1850.2MHz to 1909.8MHz). The lowest and the highest channel were selected to perform tests respectively. Set the TCH number to 9 (or 25).
4. Set the Spectrum Analyzer suitably to capture the waveform, search peak and mark, and then record the plot.
5. Set the TCH number to 758 (or 1175), then repeat step 5.


### 3.2.3 Test Result

1. Test Verdict:


The required frequency block is employed legally, the verdict is PASS.

Band	Channel	Frequency (MHz)	Measured Carrier (dBm)	Refer to Plot
CDMA 800MHz	9	825.30	14.59	Plot A
	758	847.84	14.38	Plot B
CDMA 1900MHz	25	1851.3	13.38	Plot C
	1175	1908.8	14.83	Plot D


2. Test Plot:

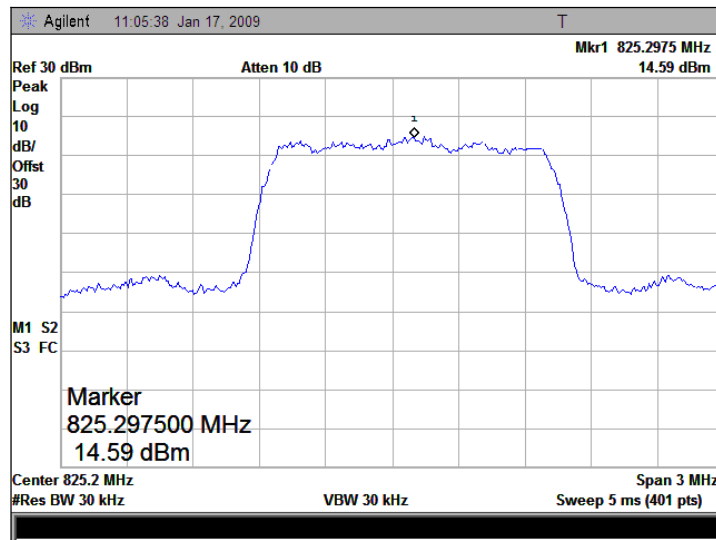


(Plot A: CDMA 800MHz Channel = 9)

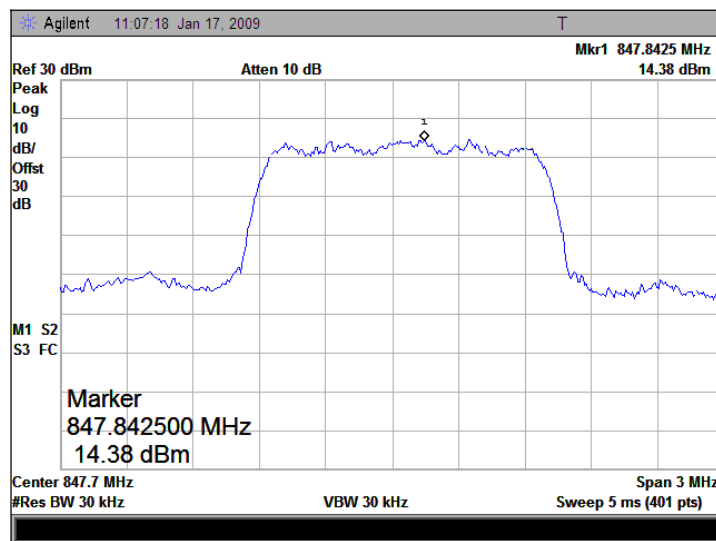

(Plot B: CDMA 800MHz Channel = 758)

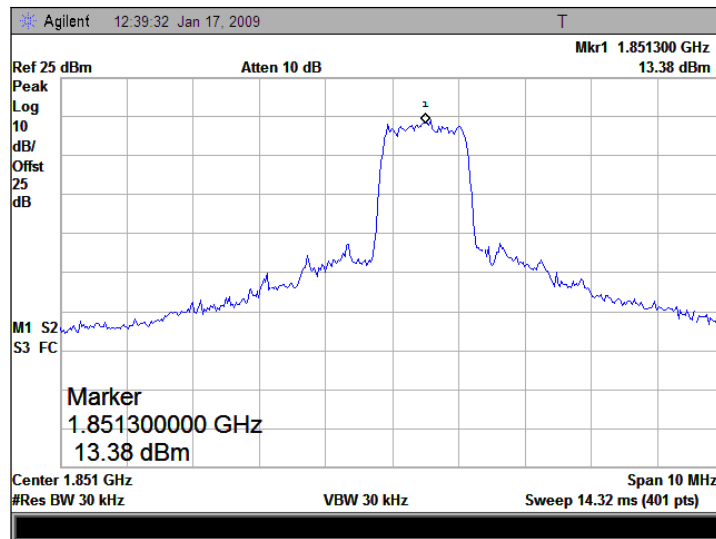

(Plot C: CDMA 1900MHz Channel = 25)

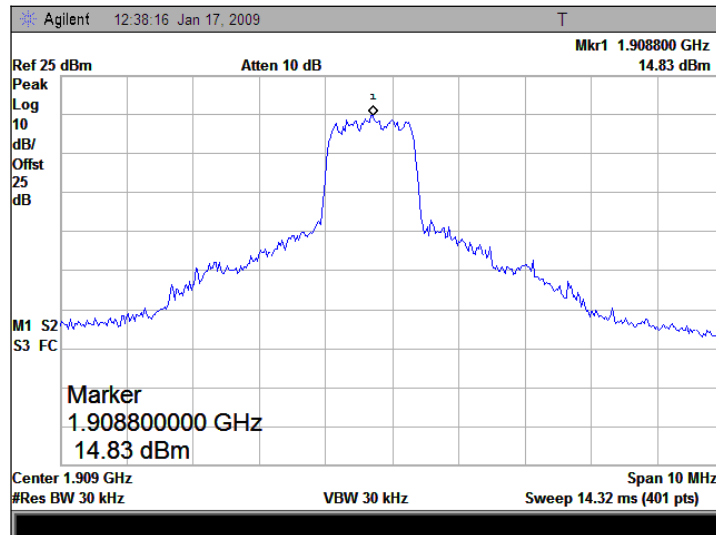

(Plot D: CDMA 1900MHz Channel = 1175)

### 3.3 Conducted RF Output Power

#### 3.3.1 Requirement


According to FCC §2.1046 (a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in §2.1033 (c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

#### 3.3.2 Test Procedure


1. Perform test system setup as section 3.1.1 (the radio frequency load attached to the EUT antenna terminal is 50Ω).
2. The resolution bandwidth of the Spectrum Analyzer is set to be comparable to the emission bandwidth of the transmitter, e.g. for GSM modulated signal (here used): RBW=VBW=1MHz, for CDMA modulated signal: RBW=VBW=3MHz.
3. The low, middle and the high channels are selected to perform tests respectively. Set the TCH number to 9 (or 25) as the low channel.
4. Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; search peak and mark it; finally record the peak and the plot.
5. Set the TCH number to 384(or 600) as the middle channel, then repeat step 4.
6. Set the TCH number to 758(or 1175) as the high channel, then repeat step 4.

#### 3.3.3 Test Result


Band	Channel	Frequency (MHz)	Measured Output Power		Rated Output Power		Verdict
			dBm	Refer to Plot	dBm	W	
CDMA 800MHz	9	825.27	24.19	Plot A1	33	2	PASS
	384	836.52	25.45	Plot A2			PASS
	758	847.74	24.67	Plot A3			PASS
CDMA 1900MHz	25	1850.2	23.61	Plot B1	33	2	PASS
	600	1880.0	22.25	Plot B2			PASS
	1175	1909.8	22.37	Plot B3			PASS

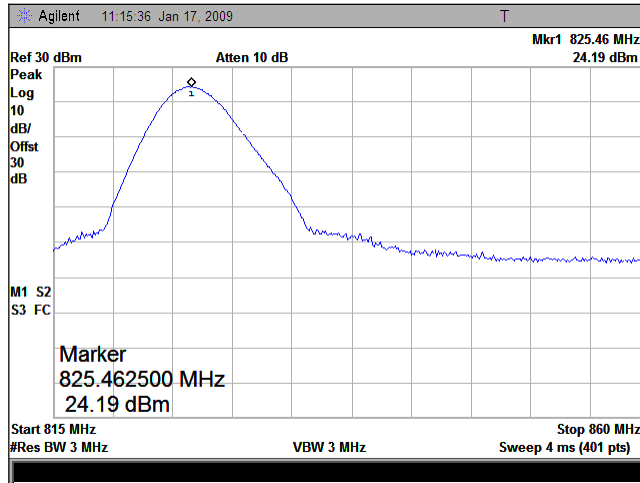

(Plot A1: CDMA 800MHz)

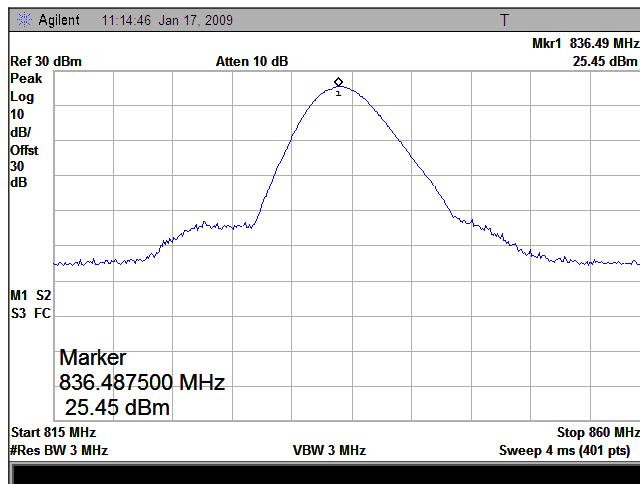


(Plot A2: CDMA 800MHz)

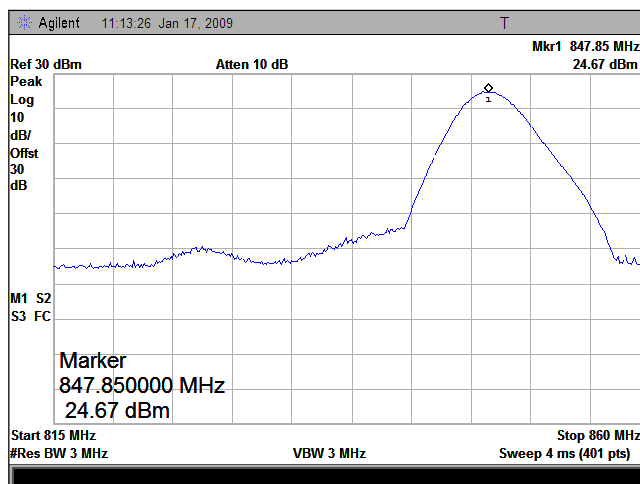


(Plot A3: CDMA 800MHz)




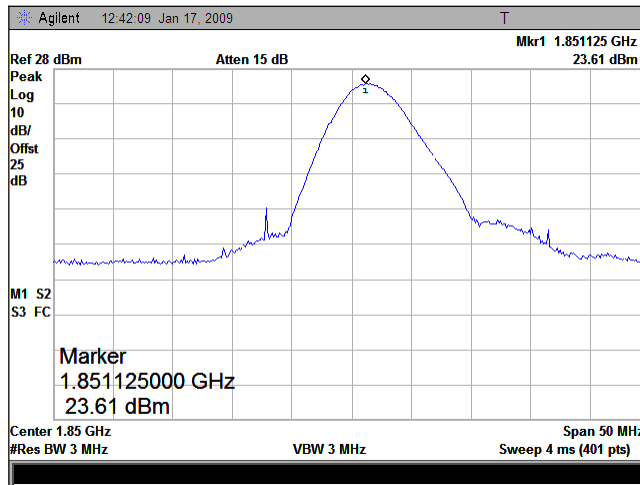

(Plot B1: CDMA 1900MHz)

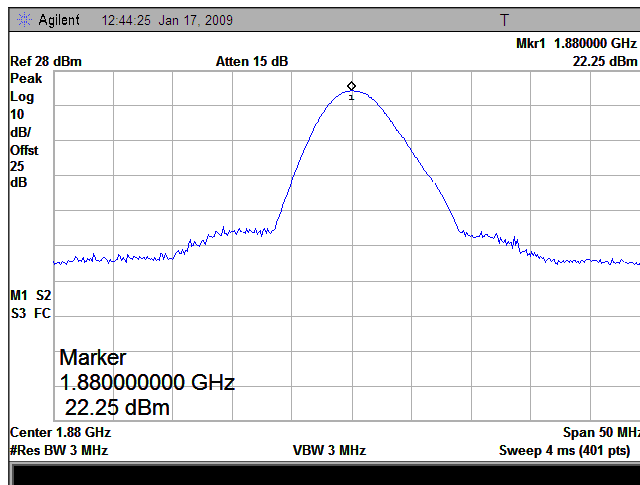

(Plot B2: CDMA 1900MHz)

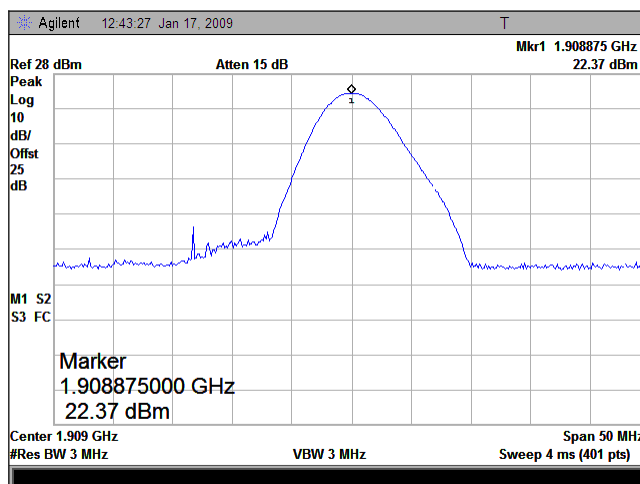

(Plot B3: CDMA 1900MHz)

### 3.4 Occupied Bandwidth

#### 3.4.1 Occupied Bandwidth Definition

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.


Occupied bandwidth is also known as the 99% emission bandwidth, or 20dB bandwidth ( $10 \cdot \log 1\% = 20\text{dB}$ ) taking the total RF output power as reference.

#### 3.4.2 Test Procedure


1. Perform test system setup as section 3.1.1.
2. The resolution bandwidth of the Spectrum Analyzer is set to at least one percent of the emission bandwidth, e.g. for GSM modulated signal (here used):  $\text{RBW}=\text{VBW}=3\text{kHz}$ , for CDMA modulated signal:  $\text{RBW}=\text{VBW}=30\text{kHz}$ .
3. The low, middle and the high channels are selected to perform tests respectively. Set the TCH number to 9 (or 25) as the low channel.
4. Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; search peak; make a line whose value is 20dB lower than the peak; mark two points which the line intersected the waveform at; finally record the delta of the two points as the occupied bandwidth and the plot.
5. Set the TCH number to 384 (or 600) as middle channel, then repeat step 4.
6. Set the TCH number to 758 (or 1175) as high channel, then repeat step 4.

#### 3.4.3 Test Result


Band	Channel	Frequency (MHz)	Measured 20dB Occupied Bandwidth (MHz)	Refer to Plot
CDMA 800MHz	9	825.27	1.395	Plot A
	384	836.52	1.405	Plot B
	758	847.74	1.405	Plot C
CDMA 1900MHz	25	1850.2	1.406	Plot D
	600	1880.0	1.41	Plot E
	1175	1909.8	1.42	Plot F

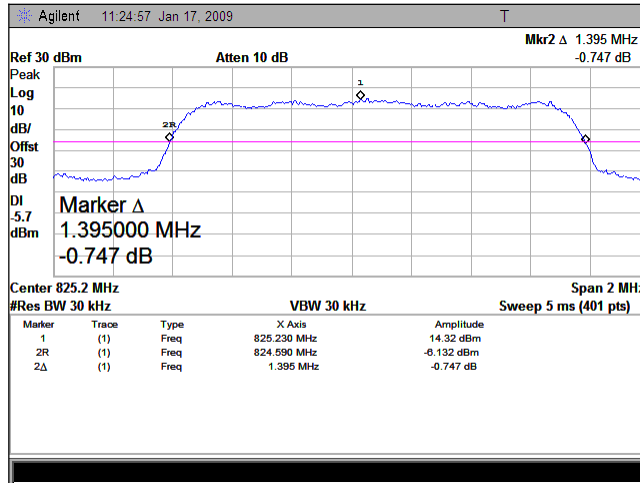


(Plot A: CDMA 800MHz Channel = 9)

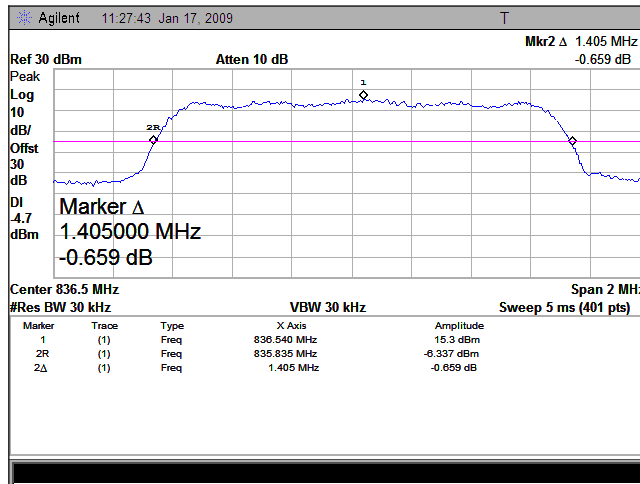


(Plot B: CDMA 800MHz Channel = 384)

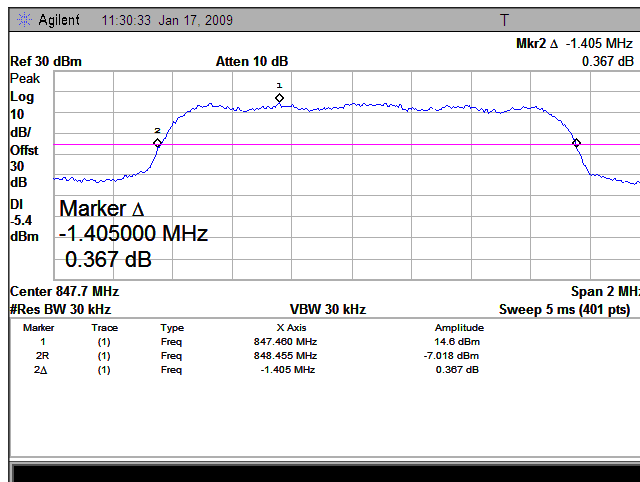


(Plot C: CDMA 800MHz Channel = 758)

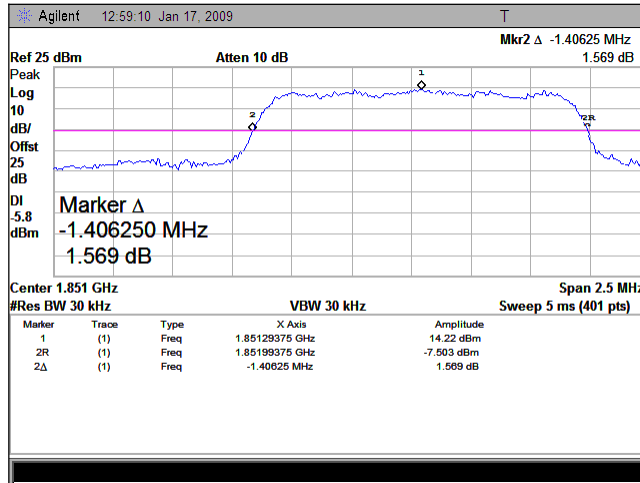

(Plot D: CDMA 1900MHz Channel = 25)

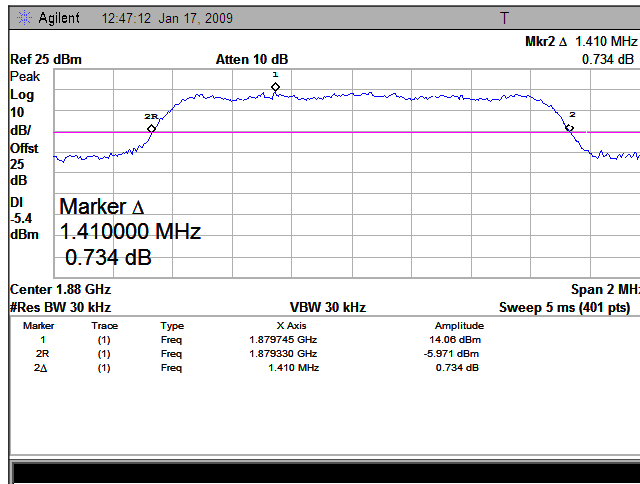

(Plot E: CDMA 1900MHz Channel = 600)

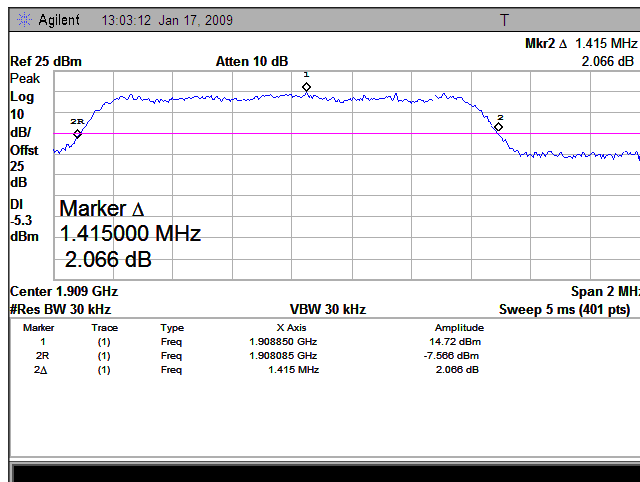

(Plot F: CDMA 1900MHz Channel = 1175)

## **3.5 Conducted Spurious Emission**

### **3.5.1 Requirement**

According to FCC section 22.917(a) and FCC section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB. This calculated to be -13dBm.

According to FCC §22.917 (a), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Thus the 26dB emission bandwidth is measurement for showing compliance at the band-edge.

### **3.5.2 Test Procedure**

1. Perform test system setup as section 3.1.1.
2. Make a limit line whose value is -13dBm on the Spectrum Analyzer.
3. The lowest, middle and the highest channels are selected to perform tests respectively. Set the TCH number to 9 (or 25) as the lowest channel.
4. Set the RBW of the Spectrum Analyzer to 1MHz and the measuring frequency range from 30 MHz to 10<sup>th</sup> harmonic of the fundamental frequency; mark the fundamental frequency and the harmonics thereof; finally record the harmonics and the plot. Note: the measuring frequency range can be divided into several parts to perform tests.
5. In the 1MHz bands immediately outside and adjacent to the frequency black, the RBW of the Spectrum Analyzer was set to at least one percent of the emission bandwidth of the fundamental emission of the transmitter, e.g. for GSM modulated signal (here used): RBW=3kHz, for CDMA modulated signal: RBW=30kHz.
6. Set the TCH number to 384 (or 600) as the middle channel, then repeat step 4 and 5.
7. Set the TCH number to 758 (or 1175) as the highest channel, then repeat step 4 and 5.

### 3.5.3 Test Result


#### 3.5.3.1 Table for the Harmonics and Plots for the Spurious Emission

1. Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
CDMA 800MHz	9	825.27	<-20	Plot A.1/A.2	-13	PASS
	384	836.52	<-20	Plot B.1/B.2		PASS
	758	847.74	<-20	Plot C.1/C.2		PASS
CDMA 1900MHz	25	1850.2	<-20	Plot D.1/D.2	-13	PASS
	600	1880.0	<-20	Plot E.1/E.2		PASS
	1175	1909.8	<-20	Plot F.1/F.2		PASS

2. Test Plot for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

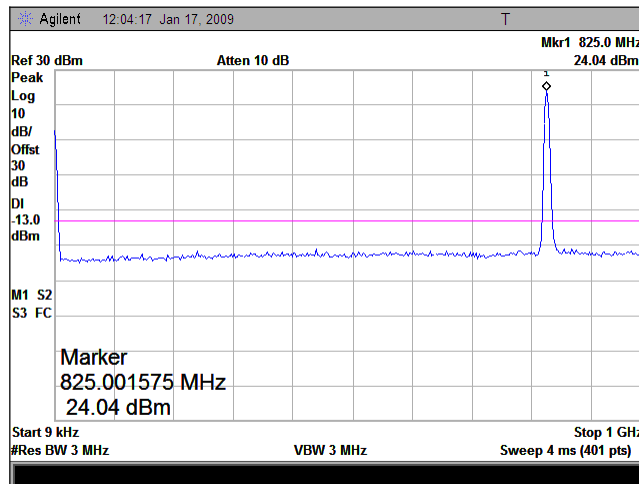


(Plot A.1: CDMA 800MHz Channel = 9, 30MHz to 1GHz)

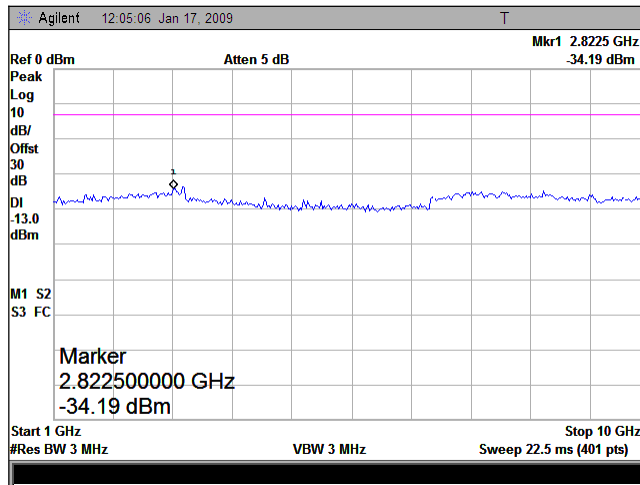


(Plot A.2: CDMA 800MHz Channel = 9, 1GHz to 10GHz)

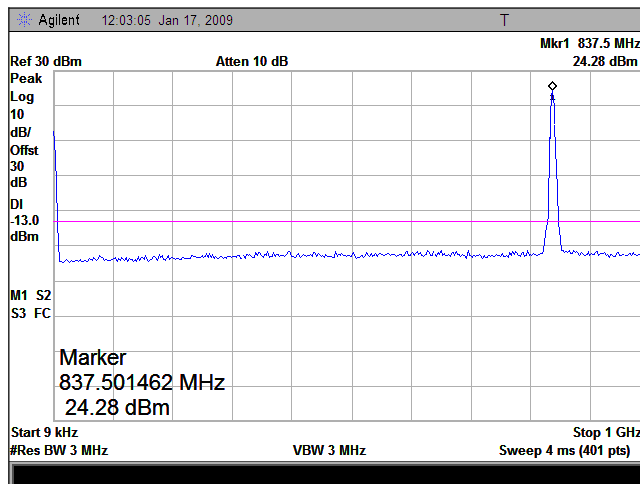


(Plot B.1: CDMA 800MHz Channel = 384, 30MHz to 1GHz)

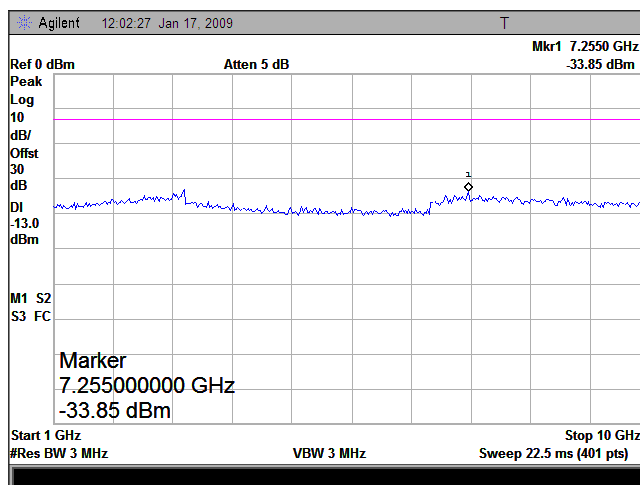


(Plot B.2: CDMA 800MHz Channel = 384, 1GHz to 10GHz)

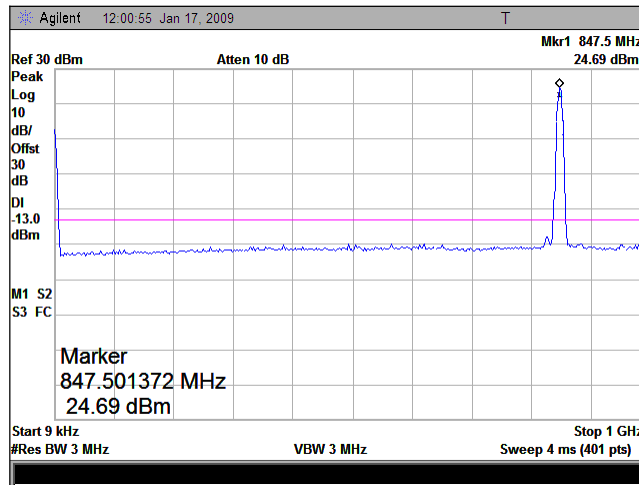

(Plot C.1: CDMA 800MHz Channel = 758, 30MHz to 1GHz)

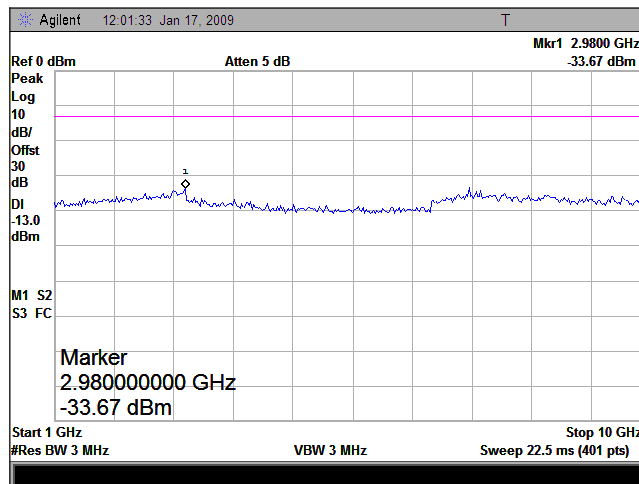


(Plot C.2: CDMA 800MHz Channel = 758, 1GHz to 10GHz)

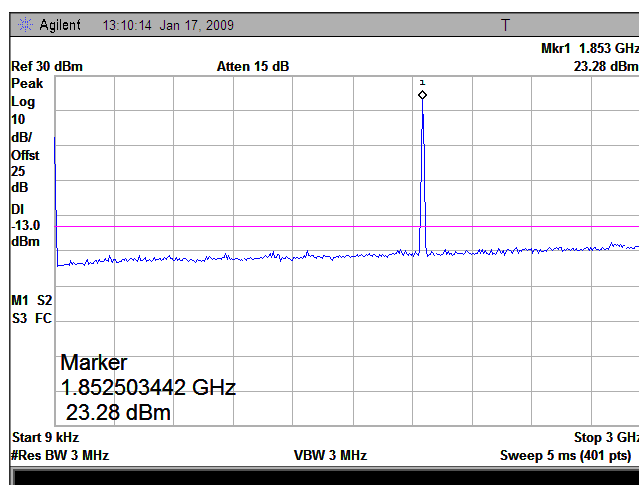


(Plot D.1: CDMA 1900MHz Channel = 25, 30MHz to 3GHz)




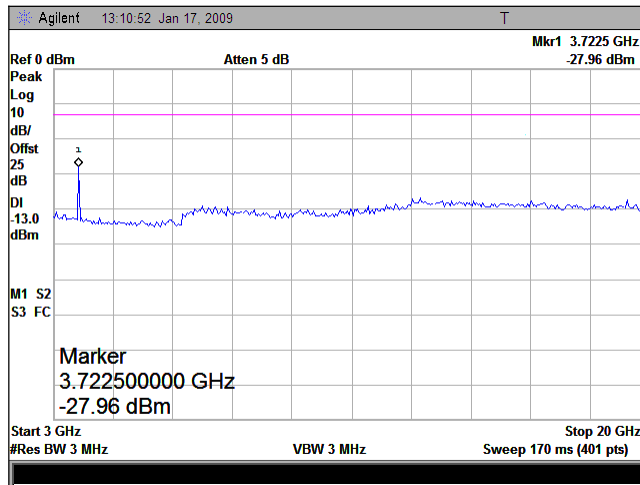


(Plot D.2: CDMA 1900MHz Channel = 25, 3GHz to 20GHz)

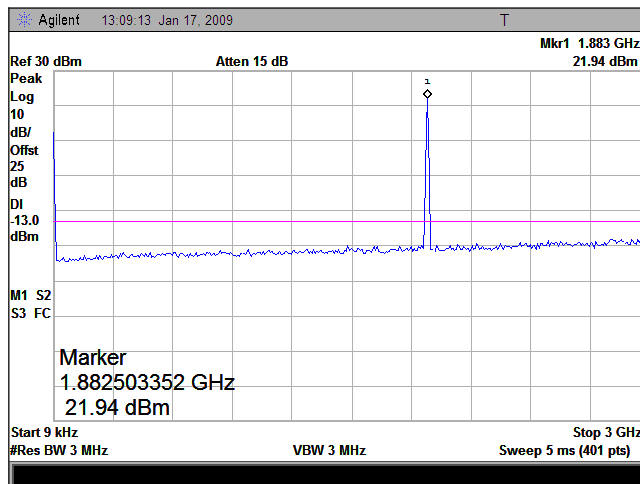


(Plot E.1: CDMA 1900MHz Channel = 600, 30MHz to 3GHz)

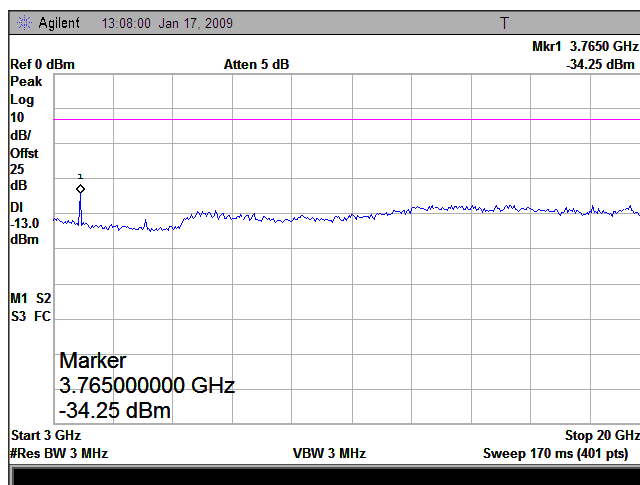

(Plot E.2: CDMA 1900MHz Channel = 600, 3GHz to 20GHz)

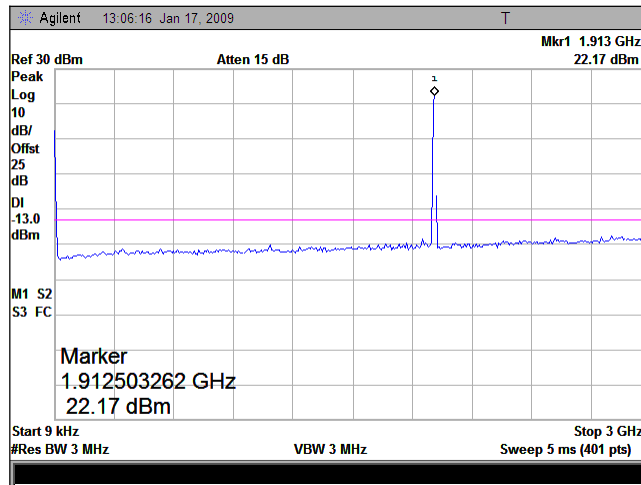

(Plot F.1: CDMA 1900MHz Channel = 1175, 30MHz to 3GHz)

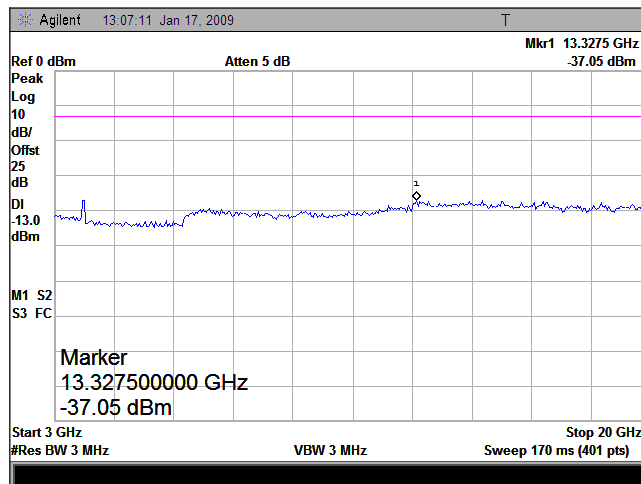

(Plot F.2: CDMA 1900MHz Channel = 1175, 2GHz to 20GHz)


### 3.5.3.2 Plot for Band-edge

The lowest and highest channels are tested to verify the band edge emissions.


1. Test Verdict:

Band	Channel 1	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
CDMA 800MHz	9	825.27	-22.37	Plat A	-13	PASS
	758	847.74	-24.2	Plot B		PASS
CDMA 1900MHz	25	1850.2	-21	Plat C	-13	PASS
	1175	1909.8	-18.22	Plot D		PASS


2. Test Plot:

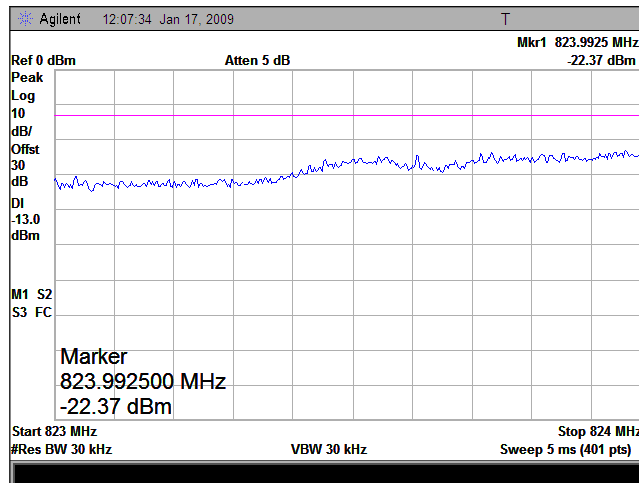


(Plot A: Channel = 9)

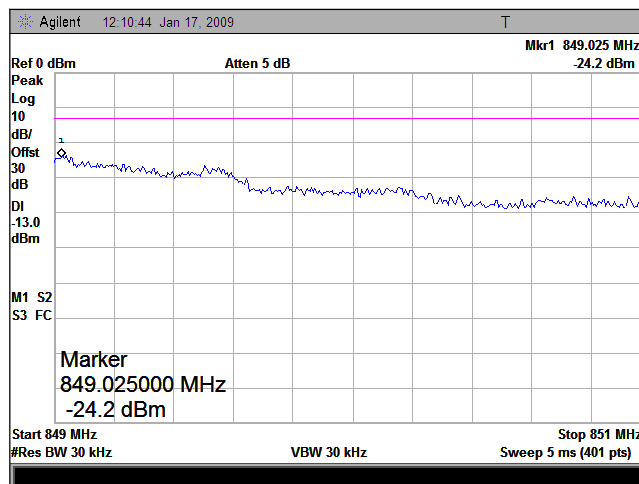

(Plot B: Channel = 758)

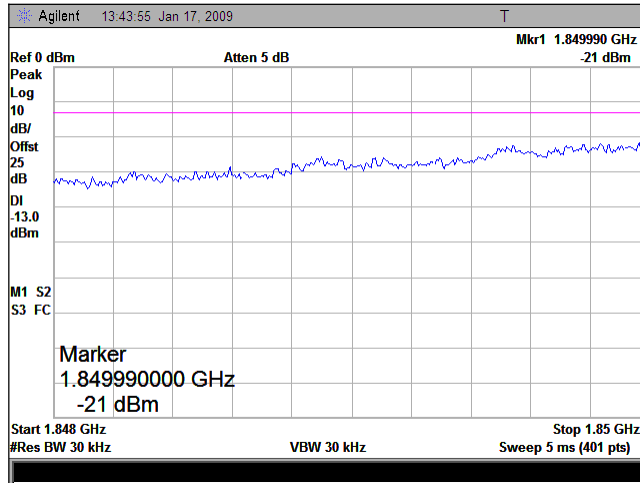

(Plot C: Channel = 25)

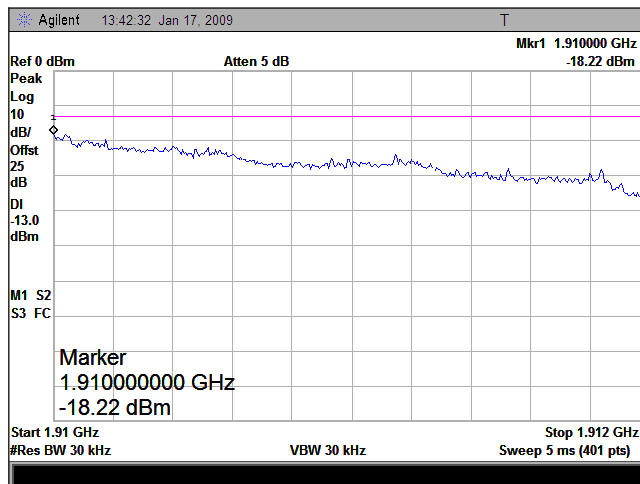

(Plot D: Channel = 1175)

### 3.6 Transmitter Radiated Power (EIRP/ERP)

#### 3.6.1 Requirement


According to FCC §22.913, the ERP of Cellular mobile transmitters must not exceed 7 Watts (38.5dBm).

#### 3.6.2 Test Procedure


1. Perform test system setup as section 3.1.2.
2. The resolution bandwidth of the Spectrum Analyzer is set to be comparable to the emission bandwidth of the transmitter, e.g. for GSM modulated signal (here used): RBW=VBW=1MHz, for CDMA modulated signal: RBW=VBW=3MHz.
3. The low, middle and the high channels are selected to perform tests respectively. Set the TCH number to 9 (or 25) as the low channel.
4. Employ the bi-log Test Antenna as the test system receiving antenna; set the polarization of the Test Antenna to be the same as that of the EUT transmitting antenna.
5. Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; actuate the Turn Table to turn from 0 degrees to 360 degrees to find the maximum reading via the Spectrum Analyzer, mark the peak; finally record the peak and the plot.
6. Set the TCH number to 384 (or 600) as the middle channel, then repeat step 5.
7. Set the TCH number to 758 (or 1175) as the high channel, then repeat step 5.

#### 3.6.3 Test Result


Band	Channel	Frequency (MHz)	Measured ERP/EIRP			Limit		Verdict
			dBm	W	Refer to Plot	dBm	W	
CDMA 800MHz	9	825.27	24.59	0.288	Plot A	38.45	7	PASS
	384	836.52	26.14	0.411	Plot B			PASS
	758	847.74	27.63	0.579	Plot C			PASS
CDMA 1900MHz	25	1850.2	22.89	0.195	Plot D	33	2	PASS
	600	1880.0	24.26	0.267	Plot E			PASS
	1175	1909.8	20.35	0.108	Plot F			PASS

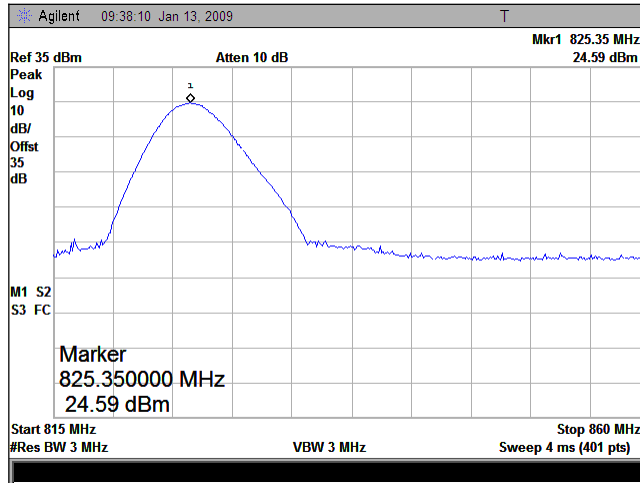


(Plot A: CDMA 800MHz Channel = 9)

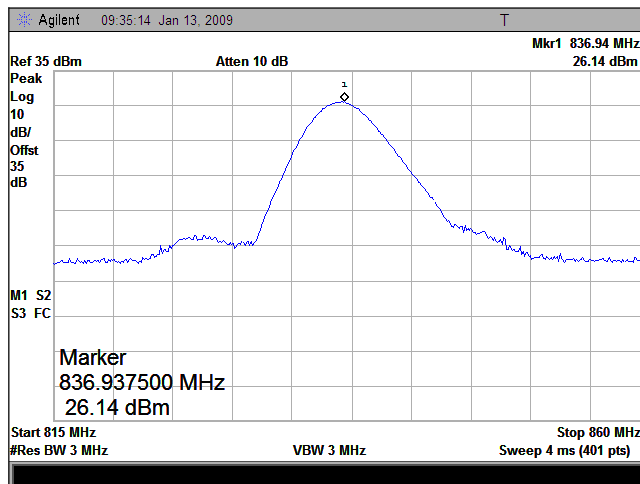


(Plot B: CDMA 800MHz Channel = 384)

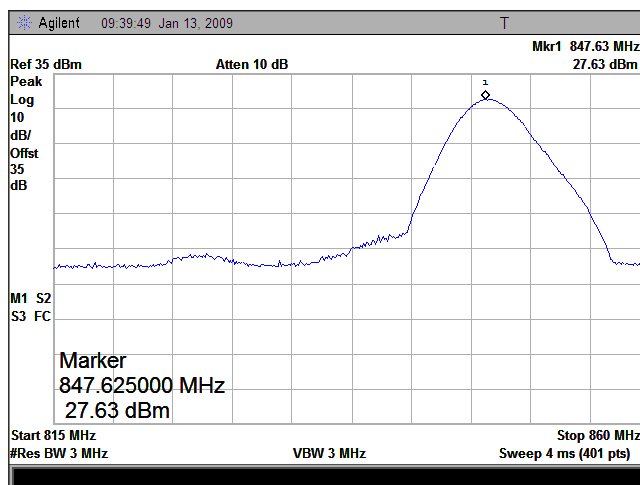


(Plot C: CDMA 800MHz Channel = 758)

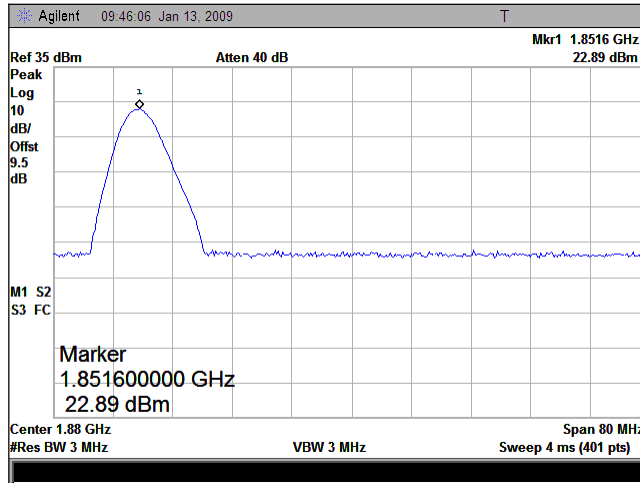

(Plot D: CDMA 1900MHz Channel = 25)

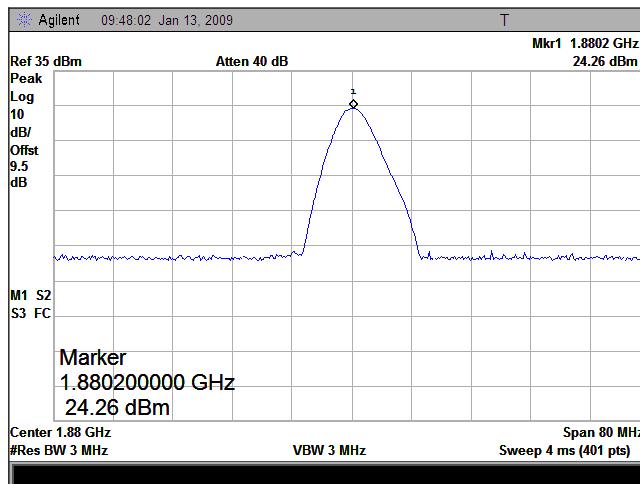

(Plot E: CDMA 1900MHz Channel = 600)

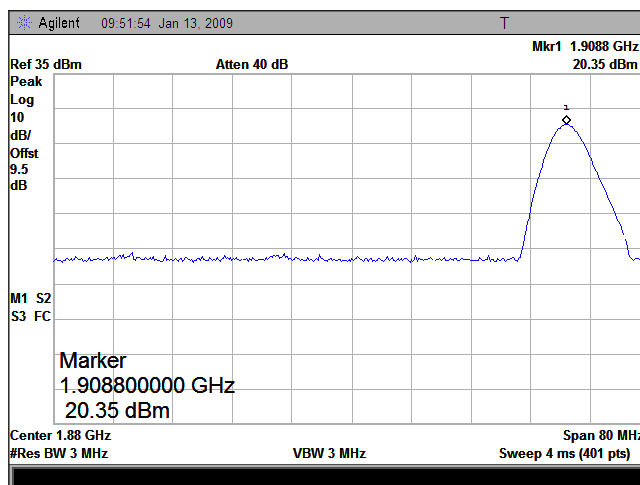

(Plot F: CDMA 1900MHz Channel = 1175)

## **3.7 Radiated Spurious Emission**

### **3.7.1 Requirement**

According to FCC §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB. This calculated to be -13dBm.

### **3.7.2 Test Procedure**

1. Perform test system setup as section 3.1.2.
2. Make a limit line whose value is -13dBm on the Spectrum Analyzer, and set the RBW of the Spectrum Analyzer to 1MHz.
3. The low, middle and the high channels are selected to perform tests respectively. Set the TCH number to 9 (or 25) as the low channel.
4. Employ the bi-log Test Antenna as the test system receiving antenna and set the frequency range of the Spectrum Analyzer from 30MHz to 3GHz.
5. The measurement is performed with the Test Antenna at both horizontal and vertical polarization respectively. Set the polarization of the Test Antenna to be horizontal.
6. Actuate the Turn Table to turn from 0 degrees to 360 degrees to find the maximum reading via the Spectrum Analyzer, mark the fundamental frequency and the harmonics thereof, after then record the harmonics and the plot.
7. Set the polarization of the Test Antenna to be vertical, then repeat step 6.
8. Employ the horn Test Antenna as the test system receiving antenna and set the frequency range of the Spectrum Analyzer from 3GHz to 10<sup>th</sup> harmonic of the fundamental frequency (here used 10GHz), then repeat step 5 to 7.
9. Set the TCH number to 384 (or 600) as the middle channel, then repeat step 4 to 8.
10. Set the TCH number to 758 (or 1175) as the high channel, then repeat step 4 to 8.



### 3.7.3 Test Result


#### 3.7.3.1 Table for the Harmonics

Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)		Refer to Plot	Limit (dBm)	Verdict
			Test Antenna Horizontal	Test Antenna Vertical			
CDMA 800MHz	9	825.27	<-25	<-25	Plot A.1/A.2	-13	PASS
	384	836.52	<-25	<-25	Plot B.1/B.2		PASS
	758	847.74	<-25	<-25	Plot C.1/C.2		PASS
CDMA 1900MHz	25	1850.2	<-25	<-25	Plot D.1/D.2	-13	PASS
	600	1880.0	<-25	<-25	Plot E.1/E.2		PASS
	1175	1909.8	<-25	<-25	Plot F.1/F.2		PASS

Test Plot for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

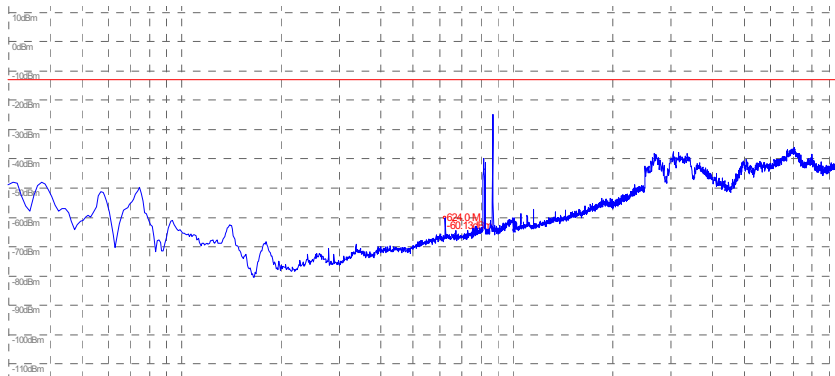


(Plot A.1: CDMA 800MHz Channel = 9, Test Antenna Horizontal)

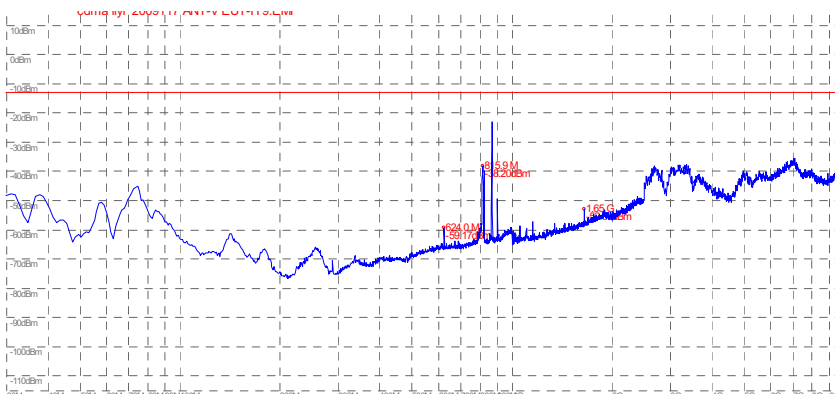


(Plot A.2: CDMA 800MHz Channel = 9, Test Antenna Vertical)

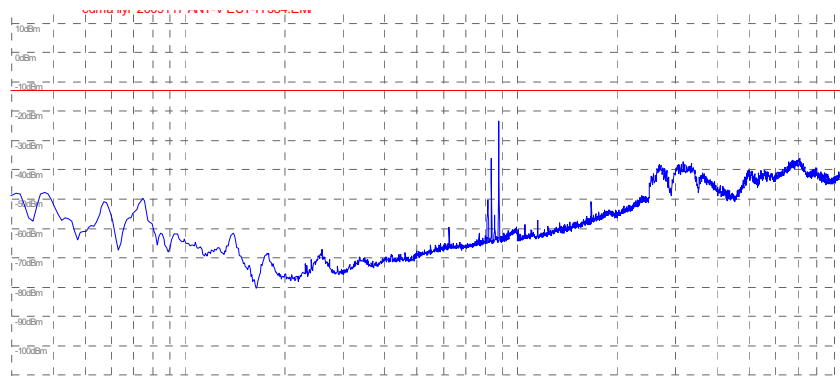


(Plot B.1: CDMA 800MHz Channel = 384, Test Antenna Horizontal)

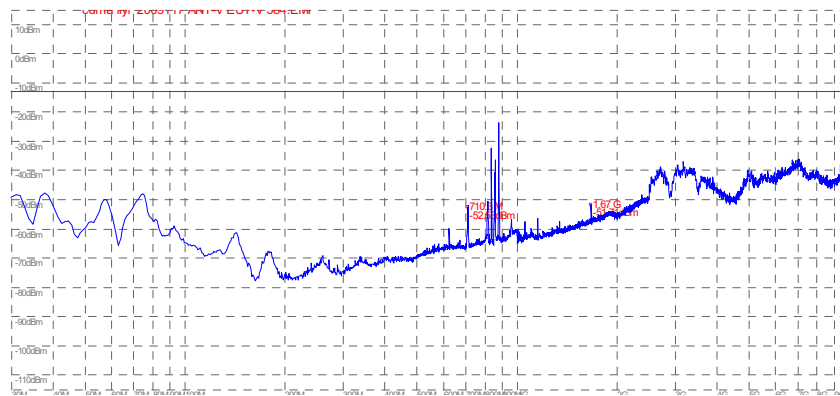


(Plot B.2: CDMA 800MHz Channel = 384, Test Antenna Vertical)

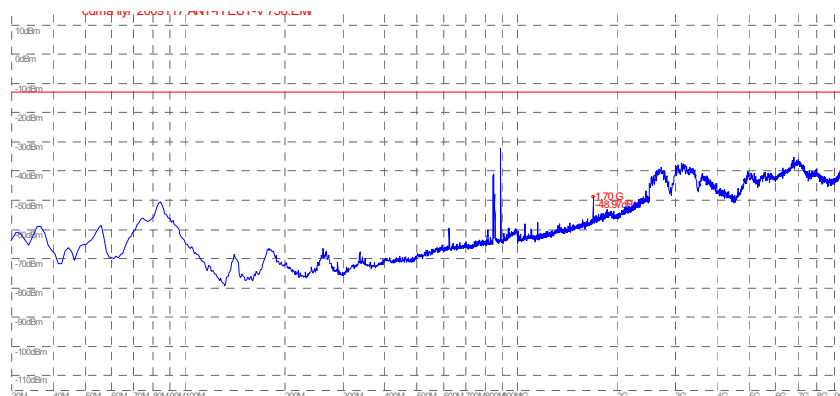


(Plot C.1: CDMA 800MHz Channel = 758, Test Antenna Horizontal)

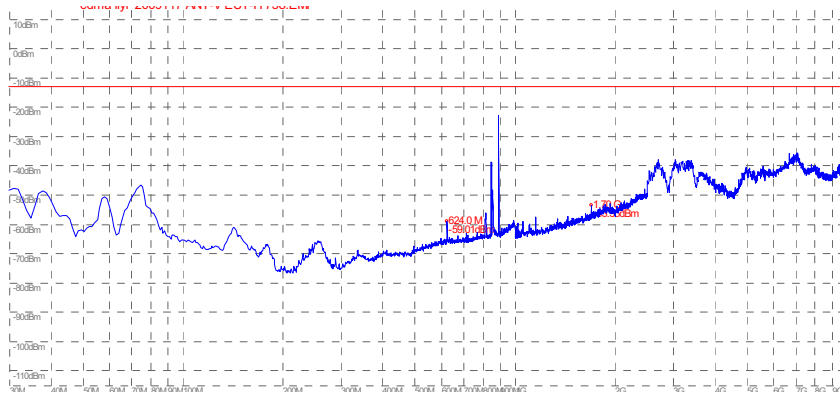


(Plot C.2: CDMA 800MHz Channel = 758, Test Antenna Vertical)

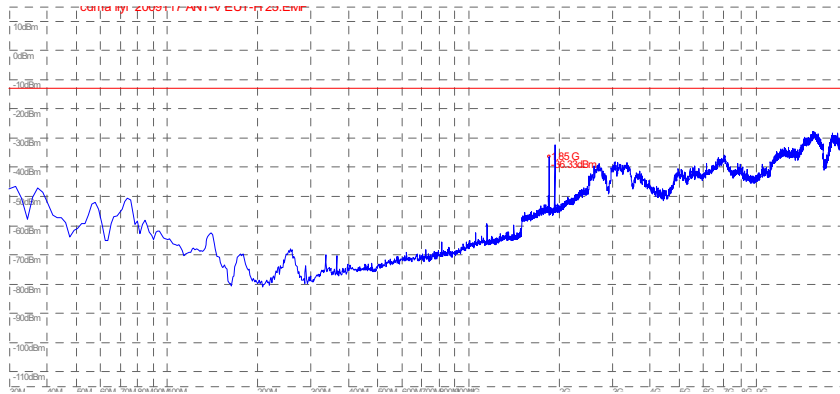


(Plot D.1: CDMA 1900MHz Channel = 25, Test Antenna Horizontal)

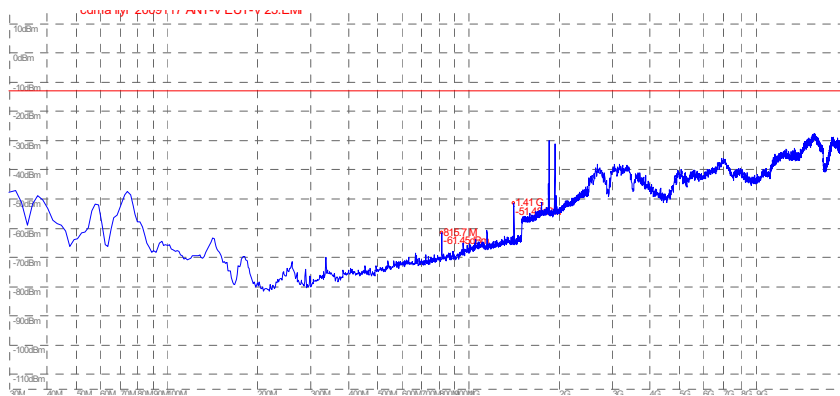


(Plot D.2: CDMA 1900MHz Channel = 25, Test Antenna Vertical)

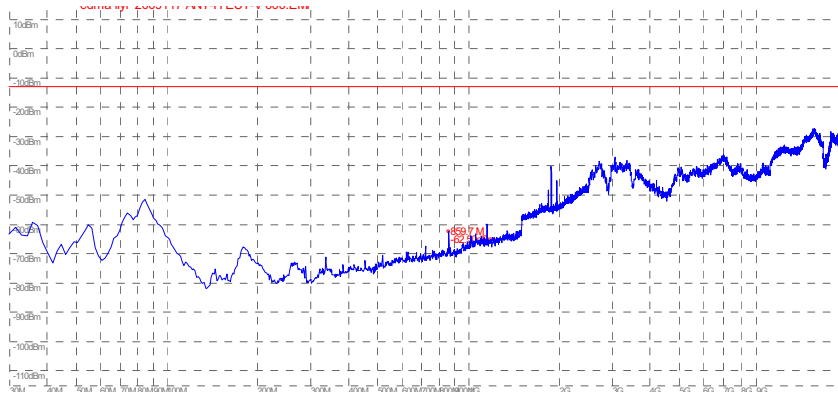


(Plot E.1: CDMA 1900MHz Channel = 600, Test Antenna Horizontal)

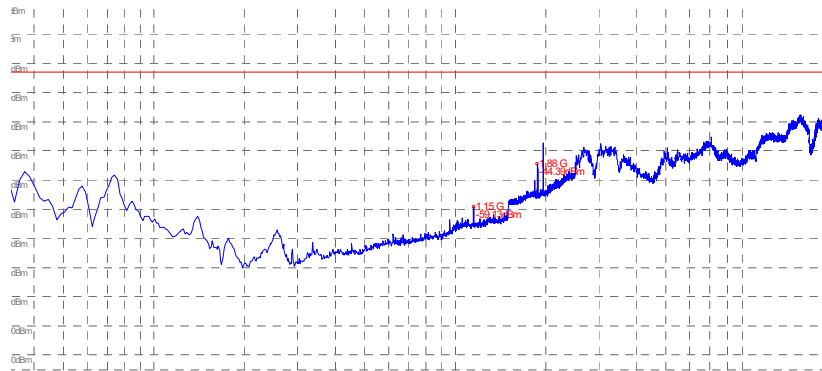

(Plot E.2: CDMA 1900MHz Channel = 600, Test Antenna Vertical)

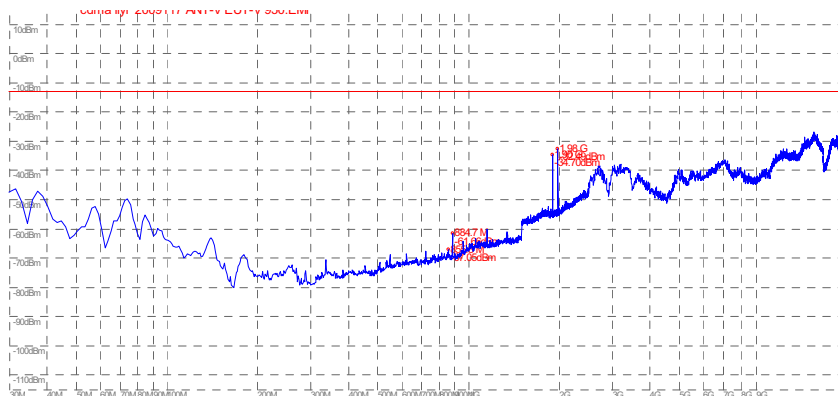

(Plot F.1: CDMA 1900MHz Channel = 1175, Test Antenna Horizontal)

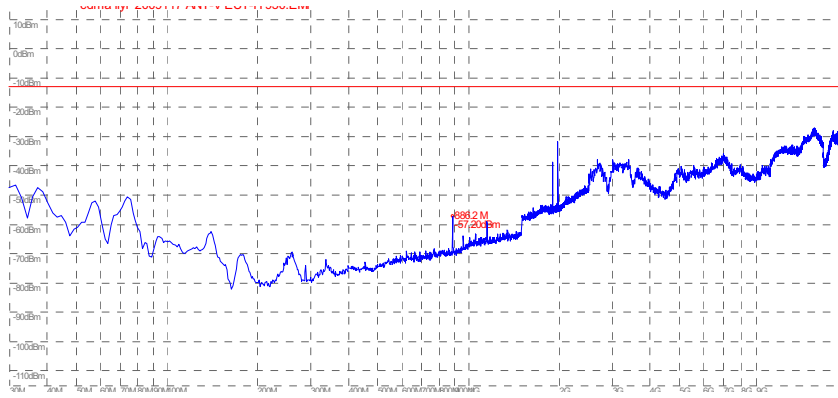

(Plot F.2: CDMA 1900MHz Channel = 1175, Test Antenna Vertical)

## 3.8 Frequency Stability

### 3.8.1 Frequency Stability Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

(a) Temperature:

The temperature is varied from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  at intervals of not more than  $10^{\circ}\text{C}$ .

(b) Primary Supply Voltage:

For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

### 3.8.2 Test Procedure

1. Perform test system setup as section 3.1.3.
2. Set the voltage of the DC Power Supply to normal supply voltage (here used 3.7V) and the temperature of the Temperature Chamber to vary from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  at intervals of  $10^{\circ}\text{C}$ .
3. At each temperature level, the EUT is powered off and kept in the Temperature Chamber for two hours. After sufficient stabilization, turn on the EUT, command it via the System Simulator (SS) to operate at the maximum output power i.e. A communication link is established between the EUT and the SS.
4. The low, middle and the high channels are selected to perform tests respectively. Set the TCH number to 9 (or 25) as the low channel.
5. The frequency deviation is measured (directly read from the SS, which can report the parameter) within three minutes.
6. Set the TCH number to 190 (or 600) as the middle channel, then repeat step 5.
7. Set the TCH number to 758 (or 1175) as the high channel, then repeat step 5.
8. Adjust the temperature of the Temperature Chamber as specified in step 2, then repeat step 3 to 7.
9. Set the voltage of the DC Power Supply to high extreme supply voltage (here used 4.2V) and the temperature of the Temperature Chamber to normal (here used  $+22^{\circ}\text{C}$ ), then repeat step 3 to 8.
10. Set the voltage of the DC Power Supply to low extreme supply voltage (here used 3.6V) and the temperature of the Temperature Chamber to normal (here used  $+22^{\circ}\text{C}$ ), then repeat step 3 to 8.

### 3.8.3 Test Result

The nominal, highest and lowest extreme voltages are separately 3.7VDC, 4.2VDC and 3.6VDC, which are specified by the applicant; the normal temperature here used is 25°C. The frequency deviation limit of CDMA 800MHz band is  $\pm 2.5$ ppm, and CDMA 1900MHz is  $\pm 1$ ppm

Band	Test Conditions		Frequency Deviation						Verdict
	Power (VDC)	Temperature (°C)	Channel = 9 (825.27MHz)		Channel = 384 (836.52MHz)		Channel = 758 (847.74MHz)		
			Hz	Limits	Hz	Limits	Hz	Limits	
CDMA 800MHz	3.7	-30	28.3	$\pm 2063$	17.42	$\pm 2091$	36.81	$\pm 2119$	PASS
		-20	19.6		35.16		8.48		
		-10	14.5		36.47		34.15		
		0	24.1		-17.46		32.57		
		+10	-8.4		23.65		22.48		
		+20	24.68		-12.75		-34.65		
		+30	31.85		33.41		26.67		
		+40	41.27		24.18		17.38		
		+50	39.46		18.42		-21.86		
	4.2	+25	18.34	38.78	32.09				
3.6	+25	-30.61	27.43	18.42					
Band	Test Conditions		Frequency Deviation						Verdict
	Power (VDC)	Temperature (°C)	Channel = 25 (1850.2MHz)		Channel = 600 (1880.0MHz)		Channel = 1175 (1909.8MHz)		
			Hz	Limits	Hz	Limits	Hz	Limits	
CDMA 1900MHz	3.7	-30	21.84	$\pm 1850.2$	-31.82	$\pm 1880.0$	34.72	$\pm 1909.8$	PASS
		-20	23.43		34.08		14.65		
		-10	17.24		25.71		28.64		
		0	35.74		-15.52		-24.92		
		+10	15.37		8.93		-25.28		
		+20	-25.53		36.56		9.47		
		+30	18.58		14.77		14.69		
		+40	7.12		21.26		31.25		
		+50	-13.53		-15.84		-12.55		
	4.2	+25	36.27	-26.86	40.83				
3.6	+25	24.68	17.75	34.11					

\*\* END OF REPORT \*\*