



Report No.: SZ12030017S01



# SAR TEST REPORT

Issued to

**Qingdao Haier Telecom Co.Ltd.**

For

**Mobile Phone**

Model Name : HW-N72W  
 Trade Name : Haier  
 Brand Name : Haier  
 FCC ID : SG71203HW-N72W  
 Standard : FCC Oet65 Supplement C Jun.2001  
 47CFR 2.1093  
 ANSI C95.1-1999  
 IEEE 1528-2003  
 MAX SAR : Head: 1.144W/kg  
 Body: 1.156W/kg  
 Test date : 2012-3-17&2012-4-12  
 Issue date : 2012-4-20

**Shenzhen MORLAB Communication Technology Co., Ltd.**



Tested by Zhu Zhan  
 Zhu Zhan  
 Date 2012.4.20

Approved by Wei Yanqun  
 Wei Yanqun  
 Date 2012.4.20

Review by Samuel Peng  
 Samuel Peng  
 Date 2012.4.20



The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced either in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his GPRSer, Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

## DIRECTORY

<b>TESTING LABORATORY .....</b>	<b>4</b>
<b>1.1. Identification of the Responsible Testing Laboratory .....</b>	<b>4</b>
<b>1.2. Identification of the Responsible Testing Location .....</b>	<b>4</b>
<b>1.3. Accreditation Certificate .....</b>	<b>4</b>
<b>1.4. List of Test Equipments .....</b>	<b>4</b>
<b>2. TECHNICAL INFORMATION .....</b>	<b>5</b>
<b>2.1. Identification of Applicant .....</b>	<b>5</b>
<b>2.2. Identification of Manufacturer .....</b>	<b>5</b>
<b>2.3. Equipment Under Test (EUT) .....</b>	<b>5</b>
<b>2.3.1. Photographs of the EUT .....</b>	<b>5</b>
<b>2.3.2. Identification of all used EUT .....</b>	<b>5</b>
<b>2.4. Applied Reference Documents .....</b>	<b>6</b>
<b>2.5. Device Category and SAR Limits .....</b>	<b>6</b>
<b>2.6. Test Environment/Conditions .....</b>	<b>7</b>
<b>3. SPECIFIC ABSORPTION RATE (SAR) .....</b>	<b>8</b>
<b>3.1. Introduction .....</b>	<b>8</b>
<b>3.2. SAR Definition .....</b>	<b>8</b>
<b>4. SAR MEASUREMENT SETUP .....</b>	<b>9</b>
<b>4.1. The Measurement System .....</b>	<b>9</b>
<b>4.2. Probe .....</b>	<b>9</b>
<b>4.3. Probe Calibration Process .....</b>	<b>11</b>
<b>4.3.1 Dosimetric Assessment Procedure .....</b>	<b>11</b>
<b>4.3.2 Free Space Assessment Procedure .....</b>	<b>11</b>
<b>4.3.2 Temperature Assessment Procedure .....</b>	<b>11</b>
<b>4.4. Phantom .....</b>	<b>12</b>
<b>4.5. Device Holder .....</b>	<b>12</b>
<b>5. TISSUE SIMULATING LIQUIDS .....</b>	<b>13</b>
<b>6. UNCERTAINTY ASSESSMENT .....</b>	<b>15</b>
<b>6.1. UNCERTAINTY EVALUATION FOR HANDSET SAR TEST .....</b>	<b>15</b>
<b>6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK .....</b>	<b>16</b>
<b>7. SAR MEASUREMENT EVALUATION .....</b>	<b>18</b>

<b>7.1. System Setup</b> .....	18
<b>7.2. Validation Results</b> .....	19
<b>8. OPERATIONAL CONDITIONS DURING TEST</b> .....	<b>20</b>
<b>8.1. Informations on the testing</b> .....	20
<b>8.2. Body-worn Configurations</b> .....	21
<b>8.3. Measurement procedure</b> .....	21
<b>8.4. Description of interpolation/extrapolation scheme</b> .....	22
<b>9. 3G MEASUREMENT PROCEDURES</b> .....	<b>23</b>
<b>9.1. Procedures Used To Establish Test Signal</b> .....	23
<b>9.2. SAR Measurement Conditions for WCDMA</b> .....	错误! 未定义书签。
<b>9.3. Output Power Verification</b> .....	23
<b>9.4. Measurement Of Conducted Peak Output Power.</b> .....	25
<b>10. WIRELESS HOT SPOT SAR EVALUATION PROCEDURES</b> .....	<b>28</b>
<b>11. TEST RESULTS LIST</b> .....	<b>29</b>
<b>12. MULTIPLE TRANSMITTERS EVALUATION</b> .....	<b>33</b>
<b>ANNEX A EUT SETUP PHOTOS</b> .....	<b>34</b>
<b>ANNEX B GRAPH TEST RESULTS</b> .....	<b>40</b>

Change History		
Issue	Date	Reason for change
1.0	Apr. 12, 2012	First edition
2.0	Apr. 18, 2012	Add evaluation of HSDPA and HSUPA and dual SIM slot.
3.0	Apr. 20, 2012	Correct information about test date.

## Testing Laboratory

### 1.1. Identification of the Responsible Testing Laboratory

Company Name: Shenzhen Morlab Communications Technology Co., Ltd.  
 Department: Morlab Laboratory  
 Address: 3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China  
 Responsible Test Lab Manager: Mr. Shu Luan  
 Telephone: +86 755 86130268  
 Facsimile: +86 755 86130218

### 1.2. Identification of the Responsible Testing Location

Name: Shenzhen Morlab Communications Technology Co., Ltd.  
 Morlab Laboratory  
 Address: 3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China

### 1.3. Accreditation Certificate

Accredited Testing Laboratory: No. CNAS L3572

### 1.4. List of Test Equipments

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Rohde&Schwarz (CMU200, SN:105894)	2011-9-26	1year
3	Voltmeter	Keithley (2000, SN:1000572)	2011-9-24	1year
4	Synthetizer	Rohde&Schwarz (SML_03, SN:101868)	2011-9-24	1year
5	Amplifier	Nucl udes (ALB216, SN:10800)	2011-9-24	1year
6	Power Meter	Rohde&Schwarz (NRVD, SN:101066)	2011-9-24	1year
7	Probe	Satimo (SN:SN_3708_EP80)	2011-9-24	1year
8	Phantom	Satimo (SN:SN_36_08_SAM62)	2011-9-24	1year
9	Liquid	Satimo (Last Calibration: 2012-3-17)	N/A	N.A
10	Dipole 835MHz	Satimo (SN 36/08 DIPC 99)	2011-9-24	1year
11	Dipole 1900MHz	Satimo (SN 36/08 DIPF 102)	2011-9-24	1year
12	Dipole 2450MHz	Satimo (SN 36/08 DIPJ 103)	2011-9-24	1year

## 2. Technical Information

Note: the following data is based on the information by the applicant.

### 2.1. Identification of Applicant

Company Name: Qingdao Haier Telecom Co.Ltd.  
 Address: No.1,Haier Road,Hi-tech Zone,Qingdao,266101,P.R.China

### 2.2. Identification of Manufacturer

Company Name: Qingdao Haier Telecom Co.Ltd.  
 Address: No.1,Haier Road,Hi-tech Zone,Qingdao,266101,P.R.China

### 2.3. Equipment Under Test (EUT)

Model Name: HW-N72W  
 Trade Name: Haier  
 Brand Name: Haier  
 Hardware Version: SP  
 Software Version: N72W\_P0.00.40\_S040\_120308  
 Frequency Bands: GSM 850MHz / PCS 1900MHz; WCDMA 850MHz/1900MHz;  
 WIFI802.11 B/G/N; Bluetooth  
 Modulation Mode: GSM/GPRS: GMSK; EDGE: 8PSK  
 WIFI802.11B: DSSS; WIFI802.11G: OFDM  
 WIFI 802.11N: OFDM  
 WCDMA/HSDPA/HSUPA:QPSK  
 Multislot Class: GPRS: Multislot Class 12; EDGE: Multislot Class 12  
 Antenna type: Fixed Internal Antenna  
 Development Stage: Identical prototype  
 Battery Model: H11228  
 Battery specification: 1500mAh3.7V  
 WCDMA release: Release 6

#### 2.3.1. Photographs of the EUT

Please see for photographs of the EUT.

#### 2.3.2. Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	SP	N72W_P0.00.40_S040_120308

## 2.4. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	<b>47 CFR§2.1093</b>	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	<b>FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)</b>	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields
3	<b>ANSI C95.1-1999</b>	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz
4	<b>IEEE 1528-2003</b>	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.
5	<b>KDB 648474 D1</b>	SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas
6	<b>KDB941225D1 v02</b>	SAR Measurement Procedures for 3G Devices
7	<b>KDB 941225 D6</b>	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
8	<b>KDB 2484227</b>	SAR Measurement Procedures for 802.11 a/b/g Transmitters

## 2.5. Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

## 2.6. Test Environment/Conditions

Normal Temperature (NT):	20 ... 25 °C
Relative Humidity:	30 ... 75 %
Air Pressure:	980 ... 1020 hPa
Test frequency:	GSM 850MHz PCS 1900MHz WCDMA 850MHz WCDMA1900MHz WIFI 802.11B
Operation mode:	Call established
Power Level:	GSM 850 MHz Maximum output power(level 5) PCS 1900 MHz Maximum output power(level 0) WCDMA Maximum output power WIFI Maximum output power

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 125, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz ,or to 9262, 9400 and 9538 respectively in the case of WCDMA 19000, or to 4132, 4175 and 4233 respectively in the case of WCDMA 850. The EUT is commanded to operate at maximum transmitting power.

During WIFI SAR test, the EUT was located at channel 1, 6, 11. And EUT was commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

For SAR testing, EUT is in GPRS/EDGE or WCDMA link mode. In GPRS/EDGE link mode, its crest factor is 2, because EUT is set in GPRS/EDGE multi-slot class 12 with 4 uplink slots. In WCDMA and WIFI mode, its crest factor is 1.

There are two SIM slots in the phone. One is “2G” SIM slot; the other is “3G/2G” SIM slot. They use the same RF module. The “3G/2G” slot has higher power in 2G mode, so SAR test is performed using “3G/2G” slot for both 2G and 3G mode .

### 3. Specific Absorption Rate (SAR)

#### 3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

#### 3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

, where C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

, where  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



## 4. SAR Measurement Setup

### 4.1. The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

### 4.2. Probe


For the measurements the Specific Dosimetric E-Field Probe SN 37/08 EP80 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 6.5 mm
- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm  
(repeatability better than +/- 1mm)

- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.25 dB
- Calibration range: 835to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with CENELEC EN 62209 and IEEE 1528 std, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 622091 annexe technique using reference guide at the five frequencies.

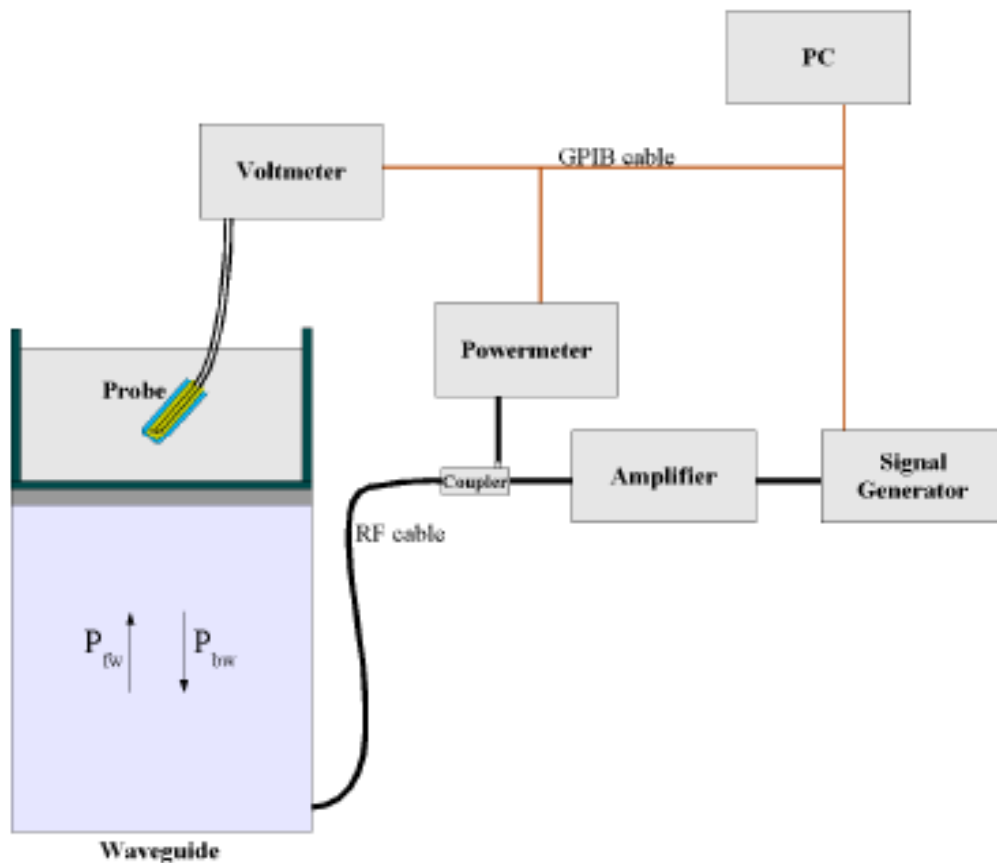

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

$P_{fw}$  = Forward Power

$P_{bw}$  = Backward Power

a and b = Waveguide dimensions

$\delta$  = Skin depth

Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage  $V_{lin}(N)$  is obtained from the displayed output voltage  $V(N)$  using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

### 4.3. Probe Calibration Process

#### 4.3.1 Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm<sup>2</sup>) using an with CALISAR, Antenna proprietary calibration system.

#### 4.3.2 Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm<sup>2</sup>.

#### 4.3.2 Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

$\Delta t$  = exposure time (30 seconds),

$C$  = heat capacity of tissue (brain or muscle),

$\Delta T$  = temperature increase due to RF exposure.

SAR is proportional to  $\Delta T / \Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

$\sigma$  = simulated tissue conductivity,


$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)

#### 4.4. Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

#### 4.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

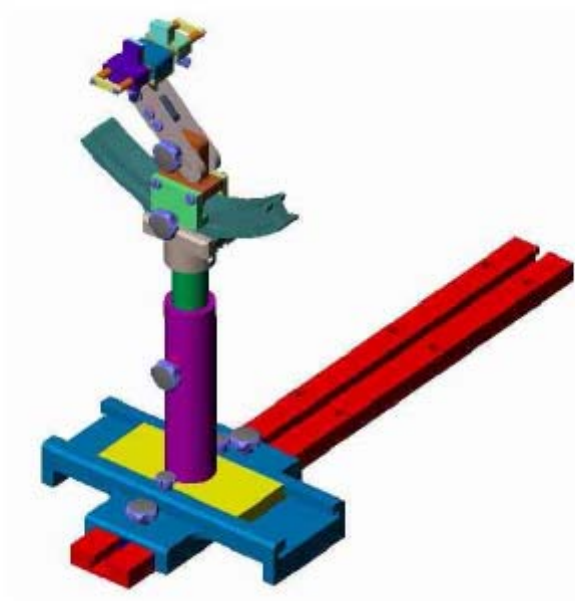

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

## 5. Tissue Simulating Liquids

Simulant liquids that are used for testing at frequencies of 850, 1900MHz and 2450MHz. which are made mainly of sugar, salt and water solutions may be left in the phantoms. Approximately 20litres are needed for an upright head compared to about 25 litres for a horizontal bath phantom. The liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is (head SAR) or from the flat phantom to the liquid top surface (body SAR) is 15cm.

Following are the recipes for one liter of head and body tissue simulating liquid for frequency band 835 MHz, 1900 MHz and 2450 MHz.

Ingredients (% by weight )	Frequency Band		Frequency Band		Frequency Band	
	835MHz		1900MHz		2450MHz	
Tissue Type	Head	Body	Head	Body	Head	Body
Water	41.45	52.4	54.9	40.4	62.7	73.2
Salt(NaCl)	1.45	1.4	0.18	0.5	0.5	0.04
Sugar	56.0	45.0	0.0	58.0	0.0	0.0
HEC	1.0	1.0	0.0	1.0	0.0	0.0
Bactericide	0.1	0.1	0.0	0.1	0.0	0.0
Triton	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	44.92	0.0	36.8	0.0
Acticide SPX	0.0	0.0	0.0	0.0	0.0	26.7
Dielectric Constant	42.45	56.1	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.91	0.95	1.42	1.45	1.88	1.78

### Recipes for Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.

**Table 1: Dielectric Performance of Head Tissue Simulating Liquid**

Temperature: 23.0~23.8°C, humidity: 54~60%.			
/	Frequency	Permittivity $\epsilon$	Conductivity $\sigma$ (S/m)
<b>Target value</b>	835 MHZ	41.5	0.90
<b>Validation value (Mar. 17)</b>	835 MHZ	41.675999	0.894409
<b>Target value</b>	2450 MHz	39.7	1.93
<b>Target value</b>	1900 MHZ	40	1.40
<b>Validation value (Mar. 17)</b>	1900 MHZ	38.509998	1.436111
<b>Validation value (Mar. 17)</b>	2450 MHz	39.622857	1.964313
<b>Target value</b>	1900 MHZ	40	1.40
<b>Validation value (Apr. 12)</b>	1900 MHZ	39.278972	1.453621

For body-worn measurements, the device was tested against flat phantom representing the user body. Under measurement phone was put on in the phone holder.

**Table 2: Dielectric Performance of Body Tissue Simulating Liquid**

<b>Temperature: 23.0~23.8°C, humidity: 54~60%.</b>			
<b>/</b>	<b>Frequency</b>	<b>Permittivity <math>\epsilon</math></b>	<b>Conductivity <math>\sigma</math> (S/m)</b>
<b>Target value</b>	835 MHz	55.2	0.97
<b>Validation value (Mar. 17)</b>	835 MHz	55.709999	0.9809033
<b>Target value</b>	1900 MHz	53.3	1.52
<b>Validation value (Ma. 17)</b>	1900 MHz	52.548876	1.553978
<b>Target value</b>	2450 MHz	52.7	1.95
<b>Validation value (Mar. 17)</b>	2450 MHz	52.548876	1.974257
<b>Target value</b>	1900 MHz	53.3	1.52
<b>Validation value (Apr. 12)</b>	1900 MHz	52.427771	1.516882

## 6. Uncertainty Assessment

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

### 6.1. UNCERTAINTY EVALUATION FOR HANDSET SAR TEST

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+ - % )	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
<b>Measurement System</b>									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.76	$\infty$
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	$\infty$
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	$\infty$
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	$\infty$
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
<b>Test sample Related</b>									
Test sample positioning	E.4.2.1	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1.1	5.00	N	1	1	1	5.00	5.00	N-1
Output power Power drift - SAR drift measurement	6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	$\infty$
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$

Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	$\infty$
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	$\infty$
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				11.55	10.67	
Expanded Uncertainty (95% Confidence interval)			K=2				23.11	21.33	

## 6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
<b>Measurement System</b>									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.76	$\infty$
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	$\infty$
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	$\infty$
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	$\infty$
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
<b>Dipole</b>									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	$\infty$



Input power and SAR drift measurement	8,6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	$\infty$
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	$\infty$
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	$\sqrt{3}$	0.64	0.43	1.85	1.24	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	$\infty$
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	$\sqrt{3}$	0.6	0.49	3.46	2.83	M
Combined Standard Uncertainty			RSS				8.83	8.37	
Expanded Uncertainty (95% Confidence interval)			K=2				17.66	16.73	

## 7. SAR Measurement Evaluation


### 7.1. System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz, 1900 MHz and 2450MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

Equipments:

name	Type and specification
Signal generator	E4433B
Directional coupler	450MHz-3GHz
Amplifier	3W 502(10-2500MHz)
Reference dipole	835MHz:SN 36/08 DIPC 99 1900MHz:SN 36/08 DIPF 102 2450MHz:SN 36/08 DIPJ 103

System Verification Setup Block Diagram

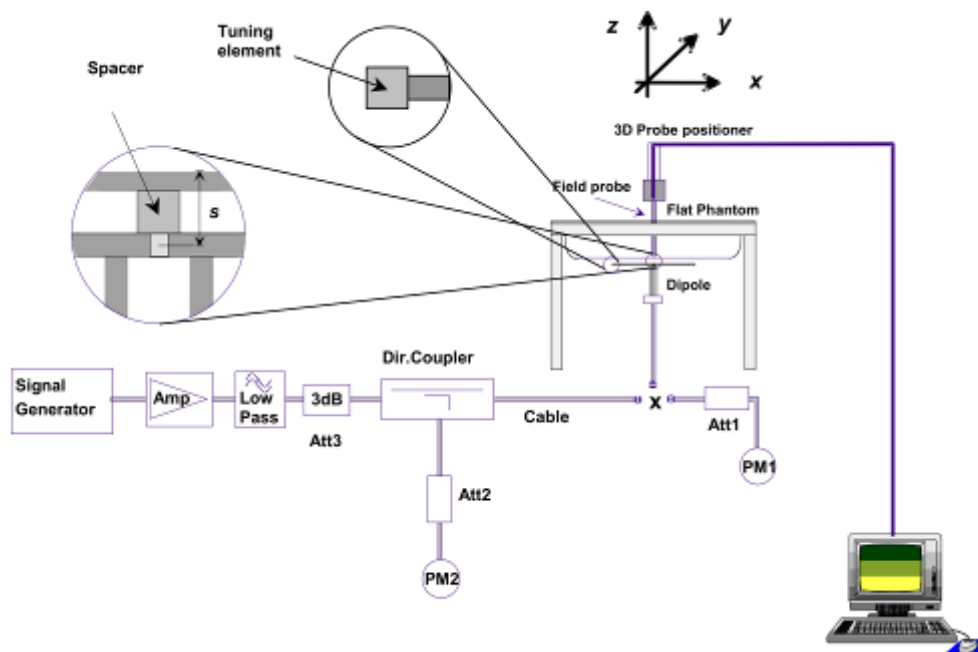

## 7.2. Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %.

Cal. On Mar.17, 2012

Frequency	835MHz(Head)	835MHz(Body)	1900MHz(Head)	1900MHz(Body)
Target value (1g)	9.714 W/Kg	9.714 W/Kg	39.89 W/Kg	39.89 W/Kg
250 mW input power	2.478 W/Kg	2.386 W/Kg	9.455 W/Kg	9.740 W/Kg
Test value (1g)	9.912 W/Kg	9.544W/Kg	37.820 W/Kg	38.960 W/Kg

Cal. On Mar.17, 2012

Frequency	2450MHz(Head)	2450MHz(Body)
Target value (1g)	52.4 W/Kg	52.4 W/Kg
250 mW input power	12.443 W/Kg	12.789 W/Kg
Test value (1g)	49.772W/Kg	51.156 W/Kg

Cal. On Apr.12, 2012

Frequency	1900MHz(Head)	1900MHz(Body)
Target value (1g)	39.89 W/Kg	39.89 W/Kg
250 mW input power	10.410 W/Kg	9.835 W/Kg
Test value (1g)	41.640 W/Kg	39.340 W/Kg


**Note:** System checks the specific test data please see page 157~172

## 8. Operational Conditions During Test

### 8.1. Informations on the testing

The mobile phone antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The mobile phone is set to transmit at its highest output peak power level.

The mobile phone is test in the “cheek” and “tilted” positions on the left and right sides of the phantom. The mobile phone is placed with the vertical centre line of the body of the mobile phone and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom.

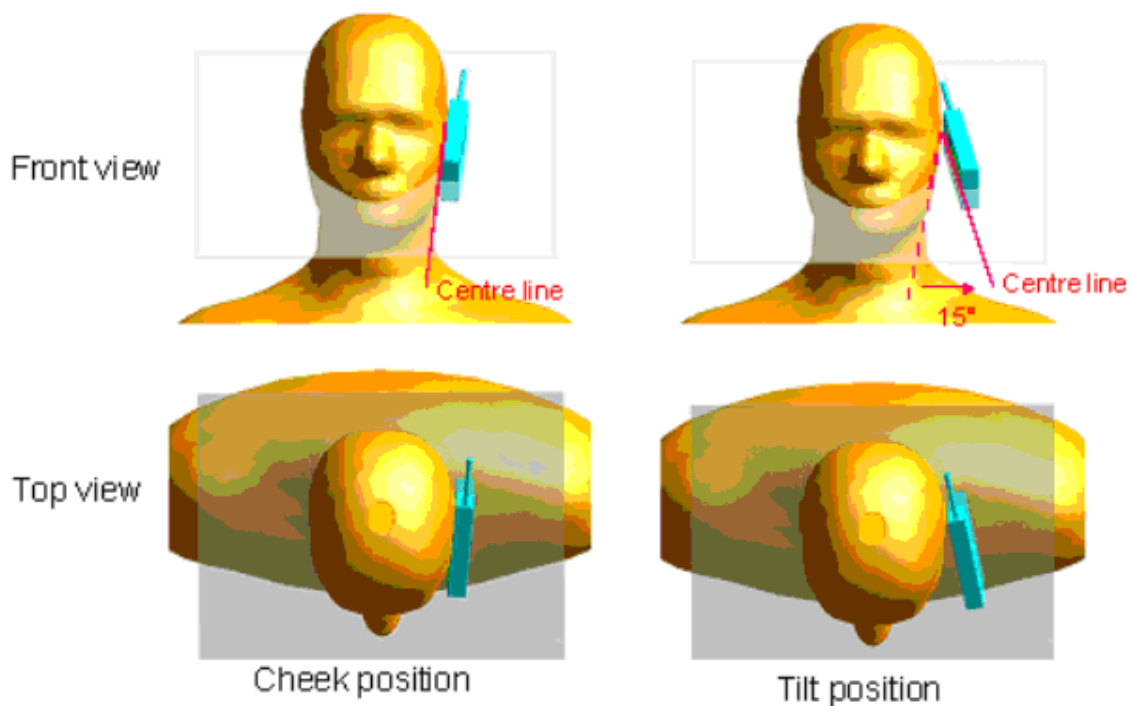

Description of the “cheek” position:

The mobile phone is well placed in the reference plane and the earpiece is in contact with the ear. Then the mobile phone is moved until any point on the front side get in contact with the cheek of the phantom or until contact with the ear is lost.

Description of the “tilted” position:

The mobile phone is well placed in the “cheek” position as described above. Then the mobile phone is moved outward away from the month by an angle of 15 degrees or until contact with the ear lost.


Remark: Please refer to Appendix B for the test setup photos.

## 8.2. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

The depth of the body tissue was 15.1cm. The distance between the back of the device and the bottom of the flat phantom is 1.5cm(taking into account of the IEEE 1528 and the place of the antenna)

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

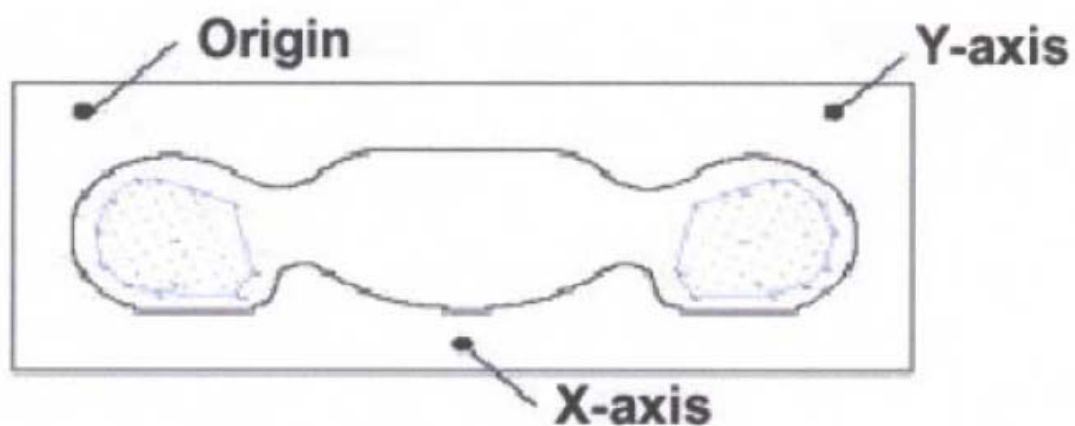

SAR Measurement Points in Area Scan

## 8.3. Measurement procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

#### **8.4. Description of interpolation/extrapolation scheme**

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

## **9. 3G MEASUREMENT PROCEDURES**

### **9.1.WCDMA Handsets Test Configuration**

The following procedures are applicable to WCDMA handsets operating under 3GPP Release 99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (refer measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH<sub>n</sub>), HSDPA and HSPA(HSDPA/HSUPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fised reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

### **9.2. Output Power Verification**

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC(transmit power control) set to all “1’s” for WCDMA/HSDPA or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCH and spreading codes) should be tabulated in the test report. All configurations that are not supported by the EUT or cannot be measured due to technical or equipment limitations should be clearly identified.

If Maximum SAR for 12.2kbps RMC is  $\leq 75\%$  of the SAR limit and maximum average output of each RF channel with HSUPA/HSDPA active is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2kbps RMC (refer to Page 24 of the report), according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.

### **9.3. Head SAR measurements**

SAR for head exposure configurations in voice mode is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”.SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2kbps RMC and the maximum SAR for 12.2 kbps RMC is  $\leq 75\%$  of the SAR limit. Otherwise, SAR is measured on the maximum output channel in 12.2 kbps AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that result in the highest SAR 12.2 kbps RMC for that RF channel.

### **9.4. Body SAR measurements**

SAR for body exposure configurations in voice and data modes is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. SAR for other spreading codes and multiple DPDCH<sub>n</sub>, when

supported by the DUT, are not required when the maximum average output of each RF channel, for spreading codes and multiple DPDCHn configuration are less than 1/4 dB higher than those measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCHn using the exposure configuration that results in the highest SAR with 12.2 kbps RMC. When more than 2 DPDCHn are supported by the DUT, it may be necessary to configure additional DPDCHn for a DUT using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

### **9.5. Handsets with Release 6 HSPA(HSDPA/HSUPA)**

Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is  $\leq 75\%$  of the SAR limit. Otherwise, SAR is measured for HSPA using the additional body SAR procedures in the “Release 6 HSPA Data Devices” section of this document, on the maximum output channel with the body exposure configuration that results in the highest SAR in 12.2 kbps RMC for that RF channel. When VOIP is applicable for head exposure in HSPA, SAR is not required when the maximum output of each RF channel with HSPA is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurement should be tested for head exposure.



## 9.6. Measurement Of Conducted Peak Output Power.

### 1. WCDMA Conducted peak output power

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	22.52	22.69	22.59	23.28	22.38	22.34
HSDPA	1	22.18	22.24	22.52	22.69	22.25	22.18
	2	22.17	22.25	22.46	22.55	22.21	22.17
	3	21.66	21.71	22.05	22.11	21.73	21.65
	4	21.69	21.72	21.98	22.09	21.73	21.71
HSUPA	1	22.17	22.45	22.32	22.66	21.21	21.17
	2	20.15	20.57	20.33	20.65	19.77	19.49
	3	21.25	21.47	21.31	21.55	20.29	20.29
	4	20.16	20.51	20.29	20.58	19.22	19.21
	5	22.16	22.42	22.29	22.65	21.19	21.15

Band	Channel	Power Drift (%)
WCDMA 850	4132	/
	4175	-1.70
	4233	/
WCDMA 1900	9262	/
	9400	-0.93
	9538	/

### 2. GSM Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power (dBm)	Power Drift (%)
GSM 850	128	824.2	30.22	-1.20
	190	836.6	29.77	/
	251	848.8	29.56	/
PCS 1900	512	1850.2	26.82	-1.42
	661	1880.0	26.47	/
	810	1909.8	25.59	/

## 2. GPRS Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	30.04	30.02	30.05	30.02
	190	836.6	29.76	29.64	29.76	29.72
	251	848.8	29.43	29.40	29.41	29.48
PCS 1900	512	1850.2	26.75	26.71	26.66	26.68
	661	1880.0	26.22	26.22	26.23	26.25
	810	1909.8	25.31	25.35	25.33	25.30

## GPRS Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)				Power Drift (%)
			Slot 1	Slot 2	Slot 3	Slot 4	Slot 4
GSM 850	128	824.2	21.04	24.00	25.79	27.01	-0.68
	190	836.6	20.76	23.62	25.50	26.71	-0.93
	251	848.8	20.43	23.38	25.15	26.47	-1.80
PCS 1900	512	1850.2	17.75	20.69	22.40	23.67	-2.89
	661	1880.0	17.22	20.2	21.97	23.24	/
	810	1909.8	16.31	19.33	21.07	22.29	/

## 3. EDGE Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	29.42	29.49	29.31	29.40
	190	836.6	29.46	29.35	29.45	29.74
	251	848.8	29.20	29.14	29.15	29.17
PCS 1900	512	1850.2	26.22	26.30	26.20	26.45
	661	1880.0	24.98	24.92	24.87	25.02
	810	1909.8	23.75	24.15	24.19	24.13

## EDGE Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)				Power Drift (%)
			Slot 1	Slot 2	Slot 3	Slot 4	Slot 4
GSM 850	128	824.2	20.42	23.47	25.05	26.39	-0.08
	190	836.6	20.46	23.33	25.19	26.73	-0.35
	251	848.8	20.20	23.12	24.89	26.16	-1.14
PCS 1900	512	1850.2	17.22	20.28	21.94	23.44	-1.04
	661	1880.0	15.98	18.90	20.61	22.01	
	810	1909.8	14.75	18.13	19.93	21.12	

## Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up2Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Correct Factor	-9.00dB	-6.02dB	-4.26dB	-3.01dB

- Note: 1. Correct Factor= $10 \cdot \log$  (Duty Cycle)  
 2. Average Power= Peak Power+ Correct Factor

## 4. Wifi peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)				Power Drift (%)
			802.11B (DSSS)	802.11G (OFDM)	802.11N20 (OFDM)	802.11N40 (OFDM)	802.11B (DSSS)
WiFi	1	2412	12.93	9.23	9.72	9.52	-1.71
	6	2437	12.24	9.47	9.75	9.57	/
	11	2462	12.43	10.35	9.79	9.89	/


## 5. Bluetooth peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			GFSK	$\Pi/4$ -DQPSK	8-DPSK
BT	0	2402	2.16	0.37	0.31
	38	2441	3.57	1.74	1.69
	79	2480	5.17	3.85	3.93

## 10. Wireless Hot Spot SAR Evaluation Procedures

This Portable Devices with Wireless Router function. And the SAR evaluation procedures accord with KDB 941225 D06 Hot Spot SAR v01.

1. SAR must be tested for all surfaces and edges (side) with a transmitting antenna with in 2.5 cm from that surface or edge, at a test separation distance of 10 mm, in the wireless modes that support wireless routing.
2. Edge configurations:

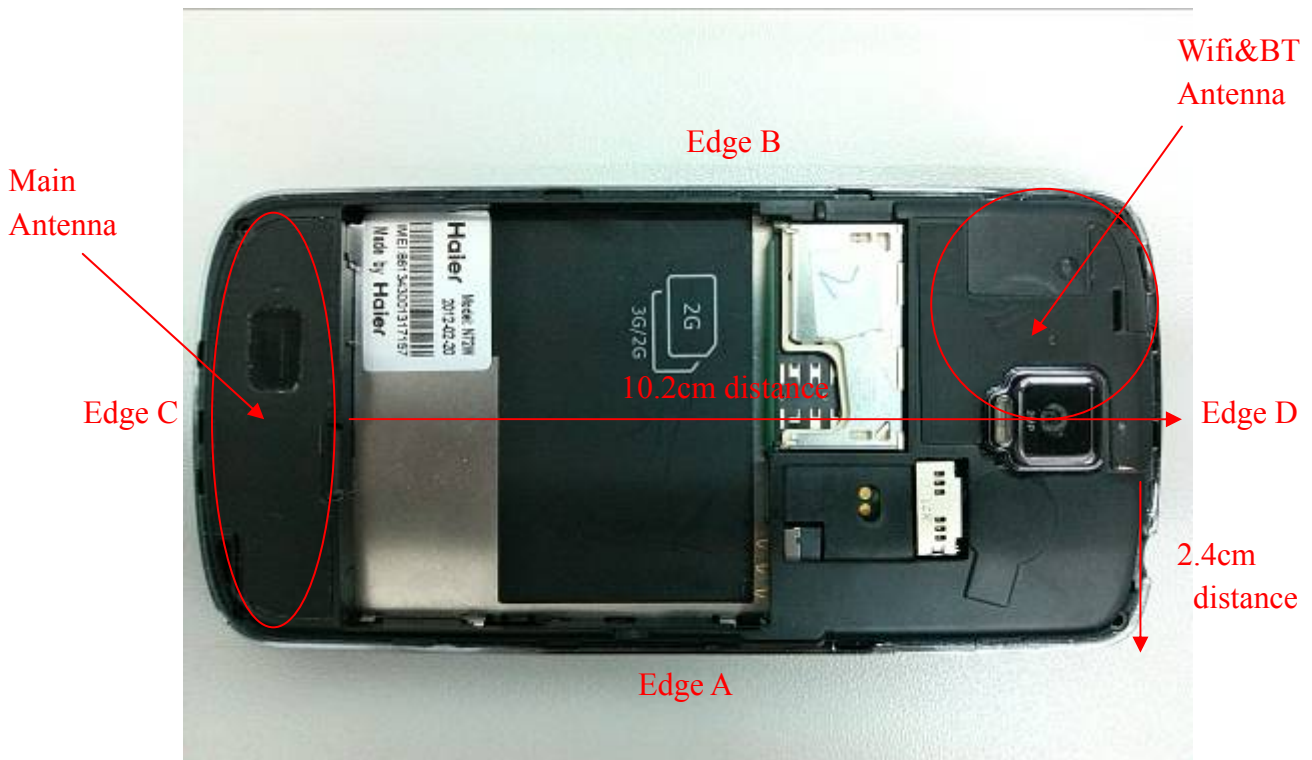

3. WCDMA&GSM antenna is located at edge C, the distance between WCDMA&GSM antenna and edge D is 10.2cm larger than 2.5cm. according with KDB941225 D06, the SAR measurement of edge D of WCDMA and GSM are not required.
4. Wifi antenna is located at edge D, the distance between wifi antenna and edge C is larger than 2.5cm. according with KDB941225 D06, the SAR measurement of edge C, is not required.

## 11. Test Results List

Summary of Measurement Results (GSM 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak			
			Device Test channel,			
			Channel 128	Channel 190	Channel 251	
Right Side Of Head	Cheek/Touch	Internal	0.185	/	/	
	Ear/Tilt	Internal	0.139	/	/	
Left Side Of Head	Cheek/Touch	Internal	0.194	/	/	
	Ear/Tilt	Internal	0.156	/	/	
Body (10mm Separation)	GSM	Back upward	Internal	0.510	/	/
		Face Upward	Internal	0.253	/	/
	GPRS	Back upward	Internal	1.112	1.156	0.944
		Face Upward	Internal	0.628	/	/
		EDGE A	Internal	0.457	/	/
		EDGE B	Internal	0.146	/	/
	EDGE C	Internal	0.210	/	/	
	EDGE	Back upward	Internal	1.099	0.928	1.089

Note: The highest power channel is 128 for GSM/ GPRS/ EDGE mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.

## Summary of Measurement Results (GSM 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak			
			Device Test channel,			
			Channel 512	Channel 661	Channel 810	
Right Side Of Head	Cheek/Touch	Internal	0.389	/	/	
	Ear/Tilt	Internal	0.083	/	/	
Left Side Of Head	Cheek/Touch	Internal	0.690	/	/	
	Ear/Tilt	Internal	0.376	/	/	
Body (10mm Separation)	GSM	Back upward	Internal	0.379	/	/
		Face Upward	Internal	0.223	/	/
	GPRS	Back upward	Internal	0.527	/	/
		Face Upward	Internal	0.284	/	/
		EDGE A	Internal	0.452	/	/
		EDGE B	Internal	0.343	/	/
	EDGE C	Internal	0.608	/	/	
	EDGE	Back upward	Internal	0.513	/	/

Note: The highest power channel is 512 for GSM/GPRS/EDGE mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.

## Summary of Measurement Results (WCDMA 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
			Device Test channel		
			Channel 4132	Channel 4175	Channel 4233
Right Side Of Head	Cheek/Touch	Internal	/	0.189	/
	Ear/Tilt	Internal	/	0.147	/
Left Side Of Head	Cheek/Touch	Internal	/	0.218	/
	Ear/Tilt	Internal	/	0.168	/
Body (10mm Separation)	Back upward	Internal	/	0.392	/
	Face Upward	Internal	/	0.260	/
	EDGE A	Internal	/	0.155	/
	EDGE B	Internal	/	0.192	/
	EDGE C	Internal	/	0.312	/

- Note: 1. The highest power channel is 4175 for WCDMA 850MHz mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.
2. Maximum SAR for 12.2kbps RMC is  $0.392 \text{ W/Kg} \leq 75\%$  of the SAR limit (i.e.  $1.2 \text{ W/Kg}$  1g) and maximum average output of each RF channel with HSUPA/HSDPA active is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2kbps RMC (refer to Page 24 of the report), according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.

#### Summary of Measurement Results (WCDMA 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
			Device Test channel		
			Channel 9262	Channel 9400	Channel 9538
Right Side Of Head	Cheek/Touch	Internal	0.649	/	/
	Ear/Tilt	Internal	0.188	/	/
Left Side Of Head	Cheek/Touch	Internal	1.144	0.995	1.017
	Ear/Tilt	Internal	0.599	/	/
Body (10mm Separation)	Back upward	Internal	0.734	/	/
	Face Upward	Internal	0.507	/	/
	EDGE A	Internal	0.417	/	/
	EDGE B	Internal	0.611	/	/
	EDGE C	Internal	0.703	/	/

- Note: 1. The highest power channel is 9262 for WCDMA 1900MHz mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.
2. Maximum SAR for 12.2kbps RMC is  $1.144 \text{ W/Kg} \leq 75\%$  of the SAR limit (i.e.  $1.2 \text{ W/Kg}$  1g) and maximum average output of each RF channel with HSUPA/HSDPA active is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2kbps RMC (refer to Page 24 of the report), according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.

## Summary of Measurement Results (WLAN 802.11B Band)


Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Antenna Positions	SAR(W/Kg), 1g Peak		
			Device Test channel		
			Channel 1	Channel 6	Channel 11
Right Side Of Head	Cheek/Touch	Internal	0.185	/	/
	Ear/Tilt	Internal	0.127	/	/
Left Side Of Head	Cheek/Touch	Internal	0.149	/	/
	Ear/Tilt	Internal	0.085	/	/
Body (10mm Separation)	Back upward	Internal	0.136	/	/
	Face Upward	Internal	0.098	/	/
	EDGE A	Internal	0.107	/	/
	EDGE B	Internal	0.109	/	/
	EDGE D	Internal	0.081	/	/

Note : The highest power channel is 1 at 802.11B mode, refer to KDB 648474, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 648474, testing for the other channels is not required.



## 12. Multiple Transmitters Evaluation

The are three transmitters build in EUT, As following :

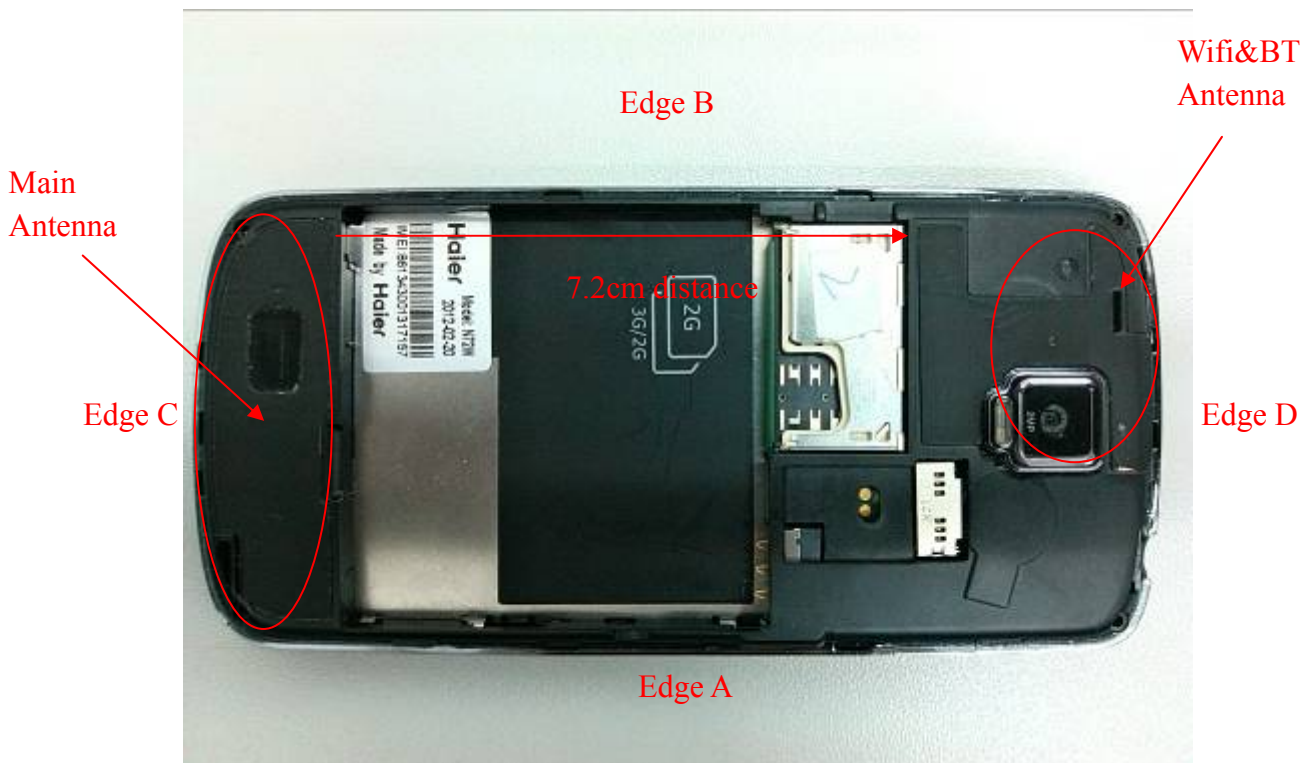

1. The GSM and WCDMA can't simultaneous transmitting.
2. The BT and Wifi can't simultaneous transmitting.
3. The distance between Main Antenna (GSM & WCDMA) and WIFI&BT antenna is 7.2cm.
4. The Wifi mode Head Max. 1-g SAR vauel is **0.185W/Kg**, and the Main Antenna Head Max. 1-g SAR vauel is **1.144W/Kg**, the sum of 1-g SAR vauel is **1.329 W/Kg** less than 1.6W/Kg ;  
The Wifi mode Body Max. 1-g SAR vauel is **0.136 W/Kg**, and the Main Antenna Body Max. 1-g SAR vauel is **1.156 W/Kg**, the sum of 1-g SAR vauel is **1.292 W/Kg** less than 1.6W/Kg.  
According with KDB 648474 D01, when the sum of the 1-g SAR is <1.6 W/kg for all simultaneous transmitting antennas, and the Simultaneous Transmission SAR is not required.
5. The BT Max. Peak output power is 5.17dBm (3.29mW) less than  $P_{ref} \{P_{ref} = \frac{1}{2} \cdot 60 / f(\text{GHz})\}$ , according to KDB 648474 D01, Bluetooth Stand-alone SAR is not required. And the distance between BT antenna and main antenna is 7.2 cm larger than 5 cm, according to KDB 648474 D01, simultaneous transmission SAR evaluation is also not required between Bluetooth antenna and Main Antenna.

## Annex A EUT Setup Photos

### 1 EUT Left Head Touch Cheek Position



### 2 EUT Left Head Tilt15 Position



### 3 EUT Right Head Touch Cheek Position



### 4 EUT Right Head Tilt15 Position



## 5 Side Position



## 6 Side Position (with earphone)






## 7 Edge A



## 8 Edge B

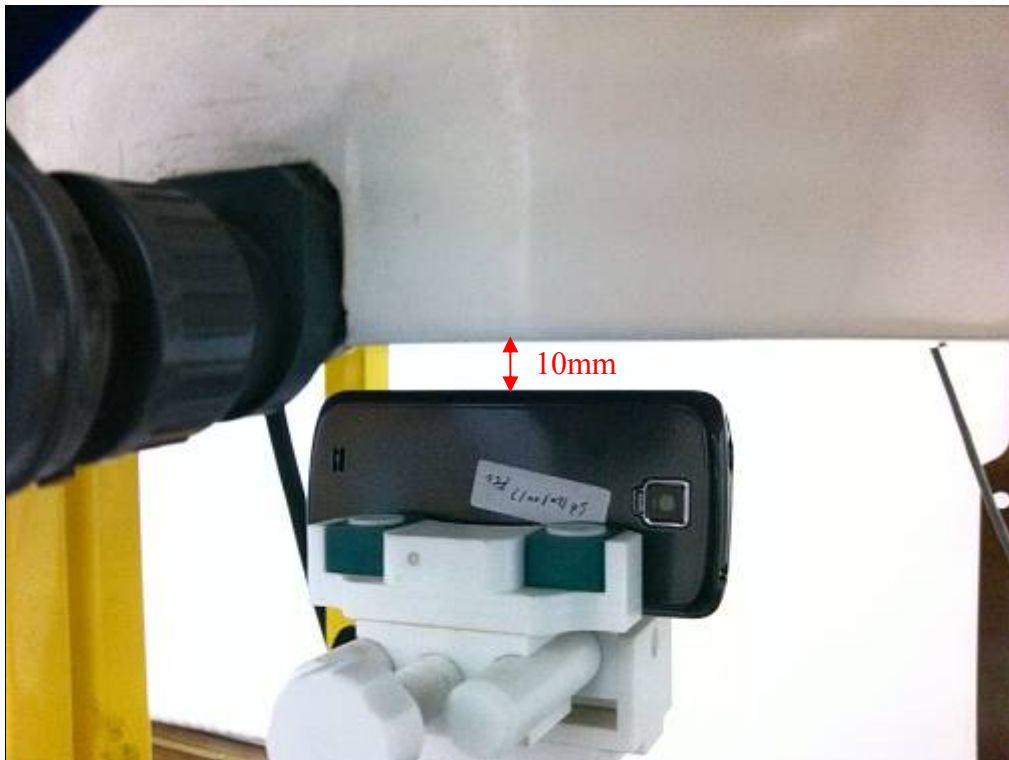

## 9 Edge C



## 10 Edge D



Liquid Level Photo



## Annex B Graph Test Results

<b>BAND</b>	<b><u>PARAMETERS</u></b>
<b><u>GSM850</u></b>	<p><u>Measurement 1:</u> Right Head with Cheek device position on Low Channel in GSM mode</p> <p><u>Measurement 2:</u> Right Head with Tilt device position on Low Channel in GSM mode</p> <p><u>Measurement 3:</u> Left Head with Cheek device position on Low Channel in GSM mode</p> <p><u>Measurement 4:</u> Left Head with Tilt device position on Low Channel in GSM mode</p> <p><u>Measurement 5:</u> Validation Plane with Body device position on Low Channel in GSM mode</p> <p><u>Measurement 6:</u> Validation Plane with Body device position on Low Channel in GSM mode</p> <p><u>Measurement 7:</u> Validation Plane with Body device position on Low Channel in GPRS mode</p> <p><u>Measurement 8:</u> Validation Plane with Body device position on Middle Channel in GPRS mode</p> <p><u>Measurement 9:</u> Validation Plane with Body device position on High Channel in GPRS mode</p> <p><u>Measurement 10:</u> Validation Plane with Body device position on Low Channel in GPRS mode</p> <p><u>Measurement 11:</u> Validation Plane with Body device position on Low Channel in GPRS mode</p> <p><u>Measurement 12:</u> Validation Plane with Body device position on Low Channel in GPRS mode</p> <p><u>Measurement 13:</u> Validation Plane with Body device position on Low Channel in GPRS mode</p> <p><u>Measurement 14:</u> Validation Plane with Body device position on Low Channel in EDGE mode</p> <p><u>Measurement 15:</u> Validation Plane with Body device position on Middle Channel in EDGE mode</p> <p><u>Measurement 16:</u> Validation Plane with Body device position on High Channel in EDGE mode</p>
<b><u>GSM1900</u></b>	<p><u>Measurement 17:</u> Right Head with Cheek device position on Low Channel in GSM mode</p> <p><u>Measurement 18:</u> Right Head with Tilt device position on Low Channel in GSM mode</p> <p><u>Measurement 19:</u> Left Head with Cheek device position on Low Channel in GSM mode</p> <p><u>Measurement 20:</u> Left Head with Tilt device position on Low Channel in GSM mode</p>



	<p><u>Measurement 21:</u> Validation Plane with Body device position on Low Channel in GSM mode</p> <p><u>Measurement 22:</u> Validation Plane with Body device position on Low Channel in GSM mode</p> <p><u>Measurement 23:</u> Validation Plane with Body device position on Low Channel in GPRS mode</p> <p><u>Measurement 24:</u> Validation Plane with Body device position on Low Channel in GPRS mode</p> <p><u>Measurement 25:</u> Validation Plane with Body device position on Low Channel in GPRS mode</p> <p><u>Measurement 26:</u> Validation Plane with Body device position on Low Channel in GPRS mode</p> <p><u>Measurement 27:</u> Validation Plane with Body device position on Low Channel in GPRS mode</p> <p><u>Measurement 28:</u> Validation Plane with Body device position on Low Channel in EDGE mode</p>
<p><b><u>WCDMA</u></b> <b><u>850</u></b></p>	<p><u>Measurement 29:</u> Right Head with Cheek device position on Middle Channel in CDMA mode</p> <p><u>Measurement 30:</u> Right Head with Tilt device position on Middle Channel in CDMA mode</p> <p><u>Measurement 31:</u> Left Head with Cheek device position on Middle Channel in CDMA mode</p> <p><u>Measurement 32:</u> Left Head with Tilt device position on Middle Channel in CDMA mode</p> <p><u>Measurement 33:</u> Validation Plane with Body device position on Middle Channel in CDMA mode</p> <p><u>Measurement 34:</u> Validation Plane with Body device position on Middle Channel in CDMA mode</p> <p><u>Measurement 35:</u> Validation Plane with Body device position on Middle Channel in CDMA mode</p> <p><u>Measurement 36:</u> Validation Plane with Body device position on Middle Channel in CDMA mode</p> <p><u>Measurement 37:</u> Validation Plane with Body device position on Middle Channel in CDMA mode</p>
<p><b><u>WCDMA</u></b> <b><u>1900</u></b></p>	<p><u>Measurement 38:</u> Right Head with Cheek device position on Low Channel in CDMA mode</p> <p><u>Measurement 39:</u> Right Head with Tilt device position on Low Channel in CDMA mode</p> <p><u>Measurement 40:</u> Left Head with Cheek device position on Low Channel in CDMA mode</p> <p><u>Measurement 41:</u> Left Head with Cheek device position on Middle Channel in CDMA mode</p> <p><u>Measurement 42:</u> Left Head with Cheek device position on High Channel in CDMA mode</p>

	<p><u>Measurement 43:</u> Left Head with Tilt device position on Low Channel in CDMA mode</p> <p><u>Measurement 44:</u> Validation Plane with Body device position on Low Channel in CDMA mode</p> <p><u>Measurement 45:</u> Validation Plane with Body device position on Low Channel in CDMA mode</p> <p><u>Measurement 46:</u> Validation Plane with Body device position on Low Channel in CDMA mode</p> <p><u>Measurement 47:</u> Validation Plane with Body device position on Low Channel in CDMA mode</p> <p><u>Measurement 48:</u> Validation Plane with Body device position on Low Channel in CDMA mode</p>
<p><b><u>WIFI</u></b> <b><u>802.11B</u></b></p>	<p><u>Measurement 49:</u> Right Head with Cheek device position on Low Channel in DSSS mode</p> <p><u>Measurement 50:</u> Right Head with Tilt device position on Low Channel in DSSS mode</p> <p><u>Measurement 51:</u> Left Head with Cheek device position on Low Channel in DSSS mode</p> <p><u>Measurement 52:</u> Left Head with Tilt device position on Low Channel in DSSS mode</p> <p><u>Measurement 53:</u> Validation Plane with Body device position on Low Channel in DSSS mode</p> <p><u>Measurement 54:</u> Validation Plane with Body device position on Low Channel in DSSS mode</p> <p><u>Measurement 55:</u> Validation Plane with Body device position on Low Channel in DSSS mode</p> <p><u>Measurement 56:</u> Validation Plane with Body device position on Low Channel in DSSS mode</p> <p><u>Measurement 57:</u> Validation Plane with Body device position on Low Channel in DSSS mode</p>

# MEASUREMENT 1

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 8 minutes 2 seconds


## A. Experimental conditions.

<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	GSM

## B. SAR Measurement Results

Lower Band SAR (Channel 128):

<b>Frequency (MHz)</b>	824.200000
<b>Relative permittivity (real part)</b>	40.669998
<b>Relative permittivity</b>	19.120001
<b>Conductivity (S/m)</b>	0.888655
<b>Power drift (%)</b>	0.740000
<b>Ambient Temperature:</b>	22.3°C
<b>Liquid Temperature:</b>	22.6°C
<b>ConvF:</b>	28.479,25.214,27.196
<b>Crest factor:</b>	1:8

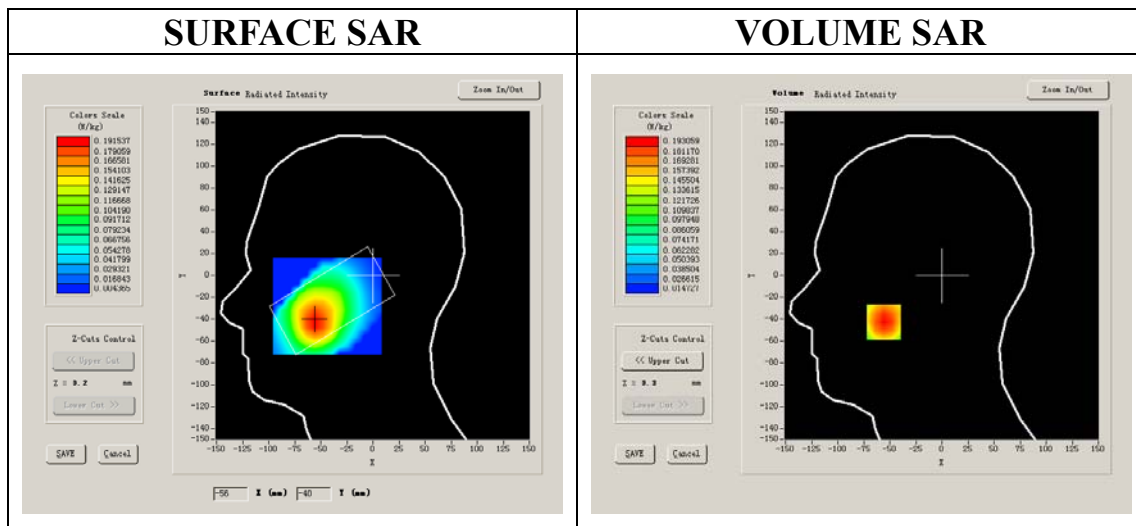


**Maximum location: X=-56.00, Y=-43.00**

<b>SAR 10g (W/Kg)</b>	0.127015
<b>SAR 1g (W/Kg)</b>	0.185384


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.1931	0.1401	0.0983	0.0707	0.0505	0.0360


**SAR, Z Axis Scan (X = -56, Y = -43)**

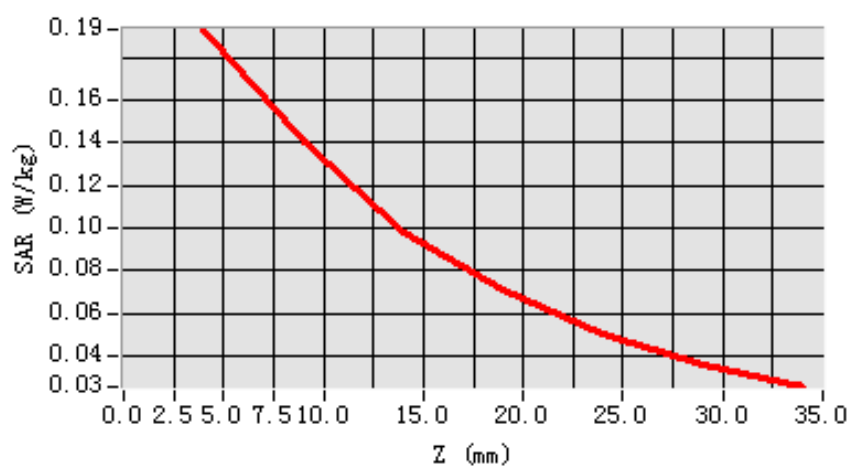

**3D scen shot**

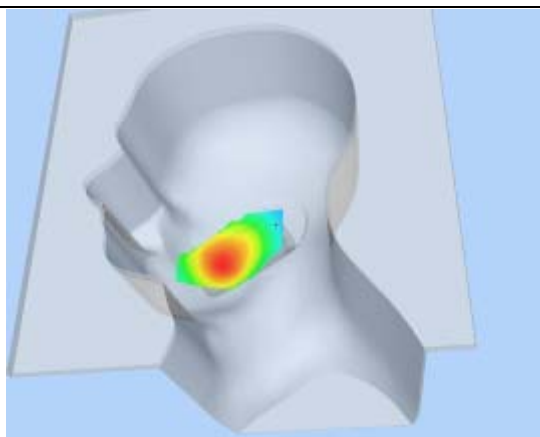

**Hot spot position**

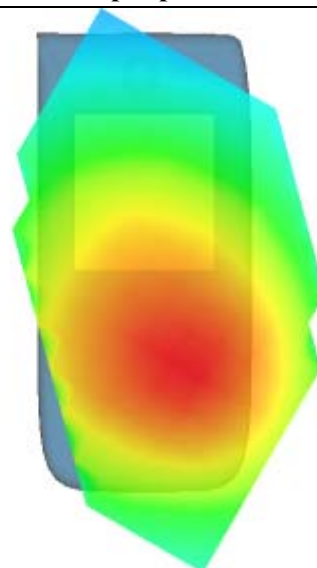

## MEASUREMENT 2

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 7 minutes 40 seconds


### A. Experimental conditions.

<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Tilt
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	GSM

### B. SAR Measurement Results

Lower Band SAR (Channel 128):

<b>Frequency (MHz)</b>	824.200000
<b>Relative permittivity (real part)</b>	40.669998
<b>Relative permittivity</b>	19.120001
<b>Conductivity (S/m)</b>	0.888655
<b>Power drift (%)</b>	-0.580000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.479,25.214,27.196
<b>Crest factor:</b>	1:8

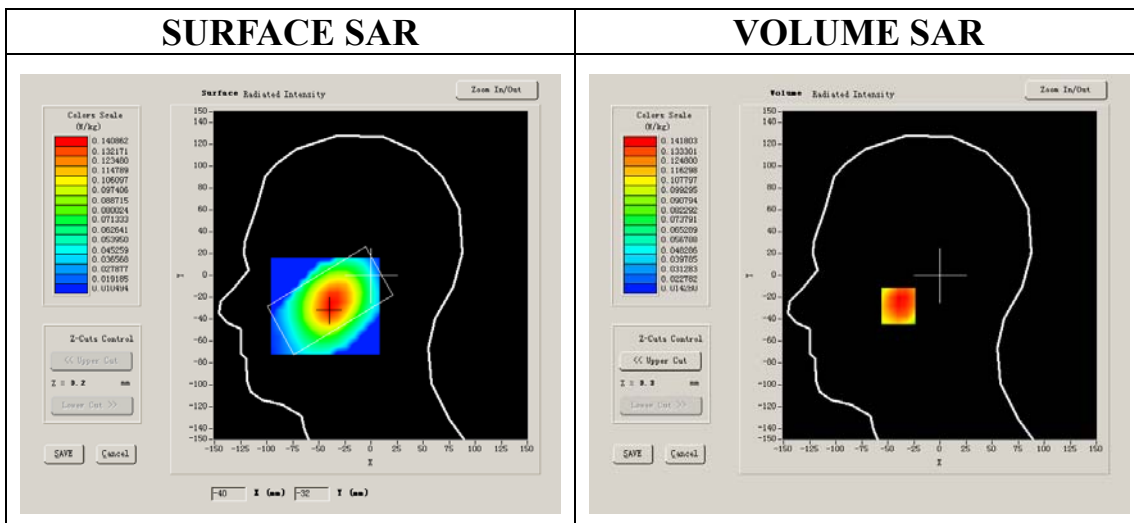


**Maximum location: X=-39.00, Y=-28.00**

<b>SAR 10g (W/Kg)</b>	0.098214
<b>SAR 1g (W/Kg)</b>	0.138810


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.1408	0.1058	0.0788	0.0600	0.0454	0.0309


**SAR, Z Axis Scan (X = -39, Y = -28)**

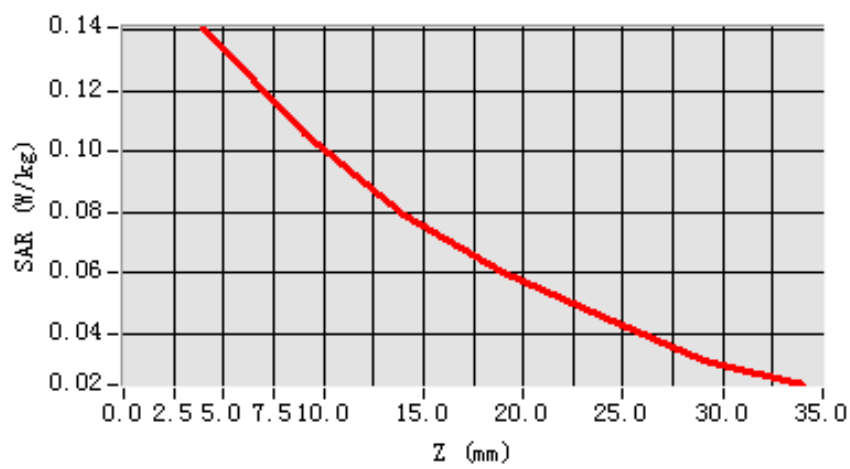

**3D scen shot**

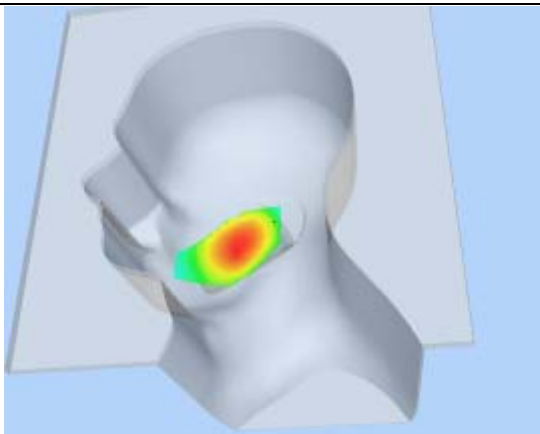

**Hot spot position**

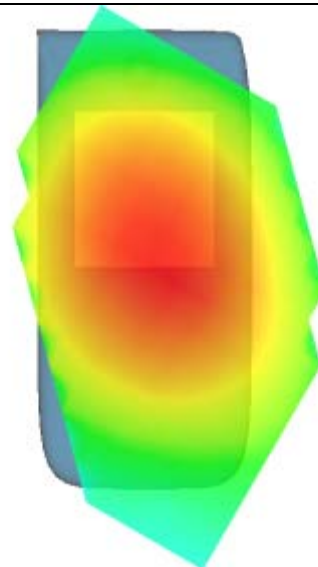

## MEASUREMENT 3

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 8 minutes 0 seconds


### A. Experimental conditions.

<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	GSM

### B. SAR Measurement Results

Lower Band SAR (Channel 128):

<b>Frequency (MHz)</b>	824.200000
<b>Relative permittivity (real part)</b>	40.669998
<b>Relative permittivity</b>	19.120001
<b>Conductivity (S/m)</b>	0.888655
<b>Power drift (%)</b>	-0.220000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.479,25.214,27.196
<b>Crest factor:</b>	1:8

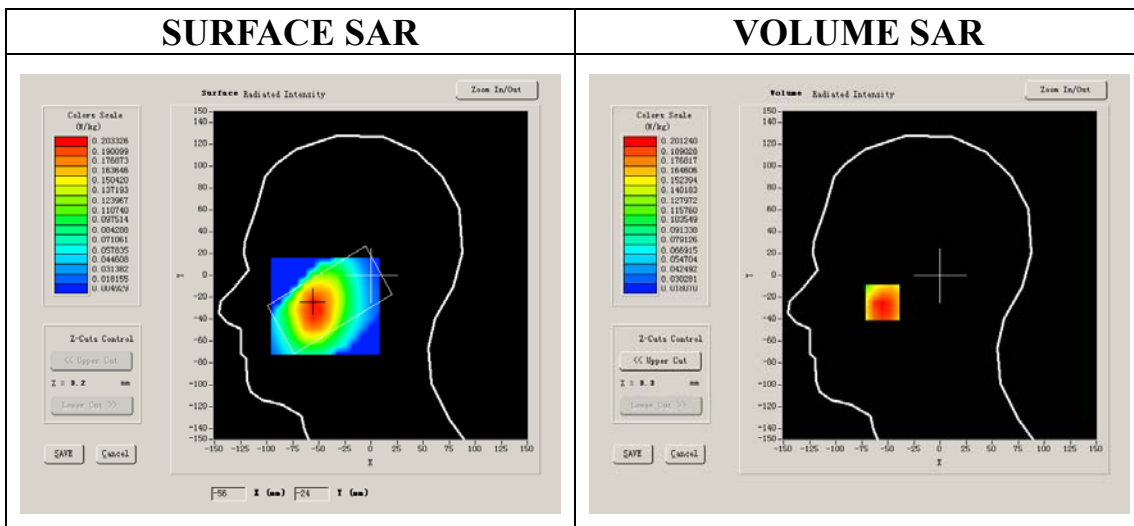


**Maximum location: X=-55.00, Y=-25.00**

<b>SAR 10g (W/Kg)</b>	0.133146
<b>SAR 1g (W/Kg)</b>	0.194279


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.2012	0.1460	0.1055	0.0756	0.0541	0.0393


**SAR, Z Axis Scan (X = -55, Y = -25)**

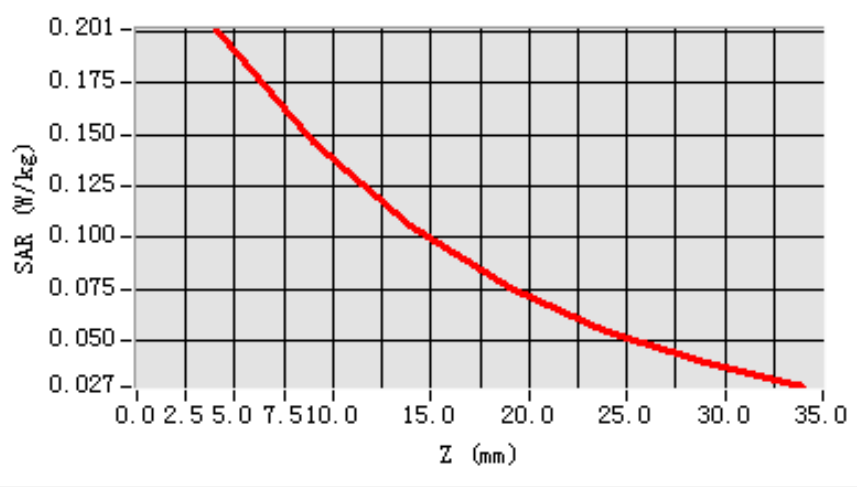

**3D scen shot**

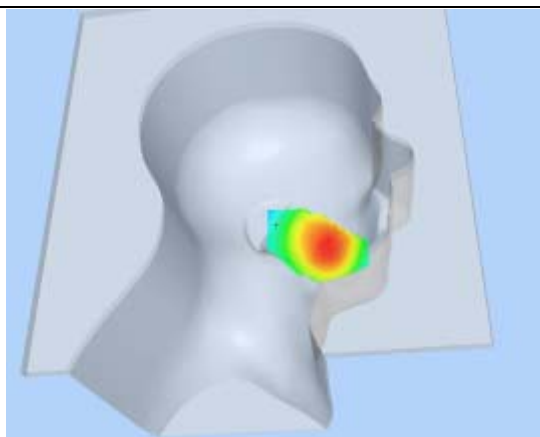

**Hot spot position**

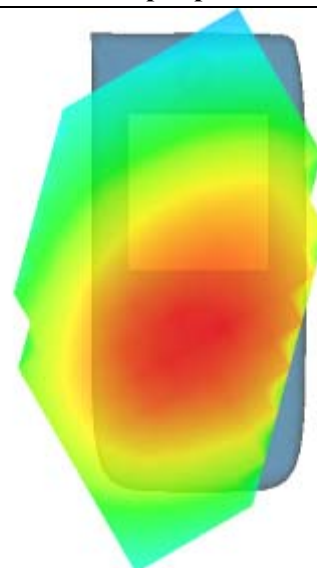



## MEASUREMENT 4

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 7 minutes 35 seconds


### A. Experimental conditions.

<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Tilt
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	GSM

### B. SAR Measurement Results

Lower Band SAR (Channel 128):

<b>Frequency (MHz)</b>	824.200000
<b>Relative permittivity (real part)</b>	40.669998
<b>Relative permittivity</b>	19.120001
<b>Conductivity (S/m)</b>	0.888655
<b>Power drift (%)</b>	-1.200000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.479,25.214,27.196
<b>Crest factor:</b>	1:8

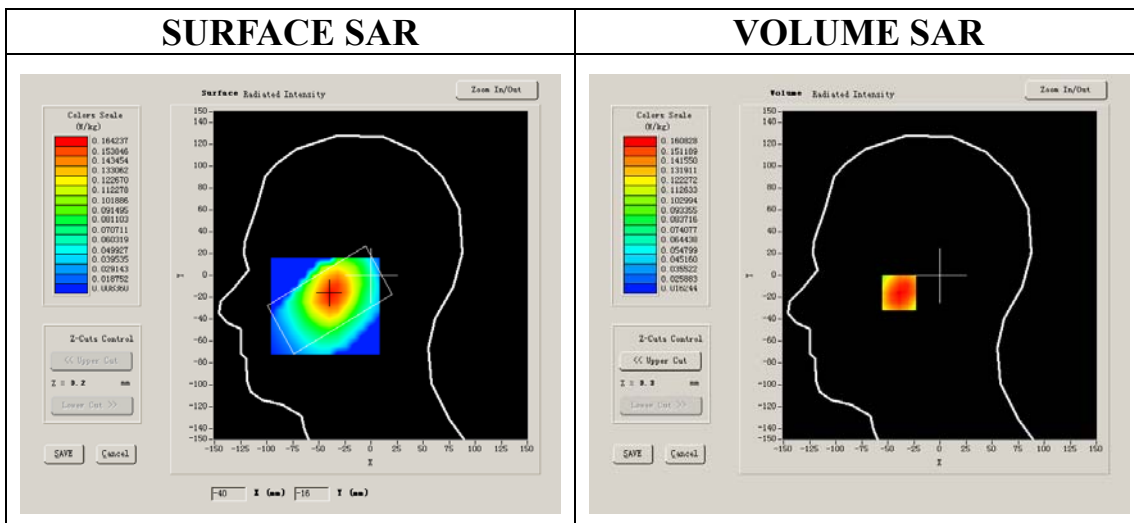


**Maximum location: X=-39.00, Y=-16.00**

<b>SAR 10g (W/Kg)</b>	0.110485
<b>SAR 1g (W/Kg)</b>	0.155828


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.1608	0.1222	0.0902	0.0667	0.0487	0.0350


**SAR, Z Axis Scan (X = -39, Y = -16)**

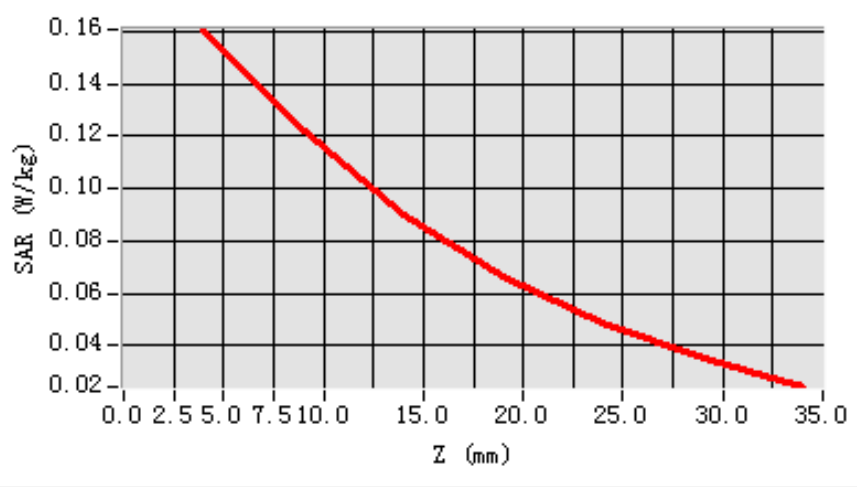

**3D scen shot**

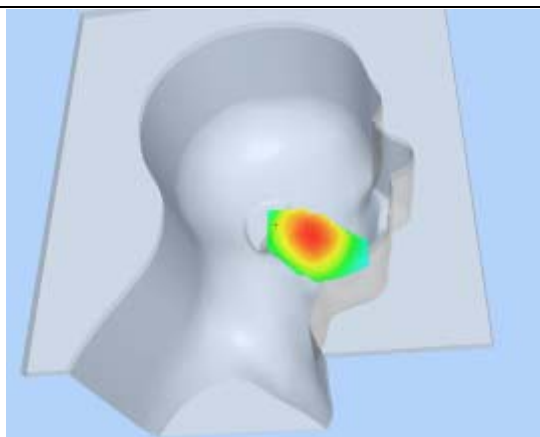

**Hot spot position**

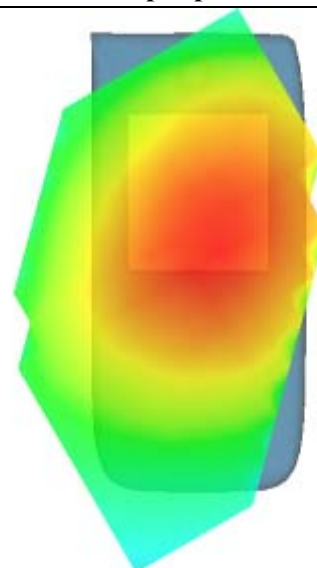

## MEASUREMENT 5

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	GSM

### B. SAR Measurement Results

Lower Band SAR (Channel 128):

<b>Frequency (MHz)</b>	824.200000
<b>Relative permittivity (real part)</b>	55.709999
<b>Relative permittivity</b>	21.709999
<b>Conductivity (S/m)</b>	1.009033
<b>Power drift (%)</b>	-0.400000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559, 25.681, 27.588
<b>Crest factor:</b>	1:2

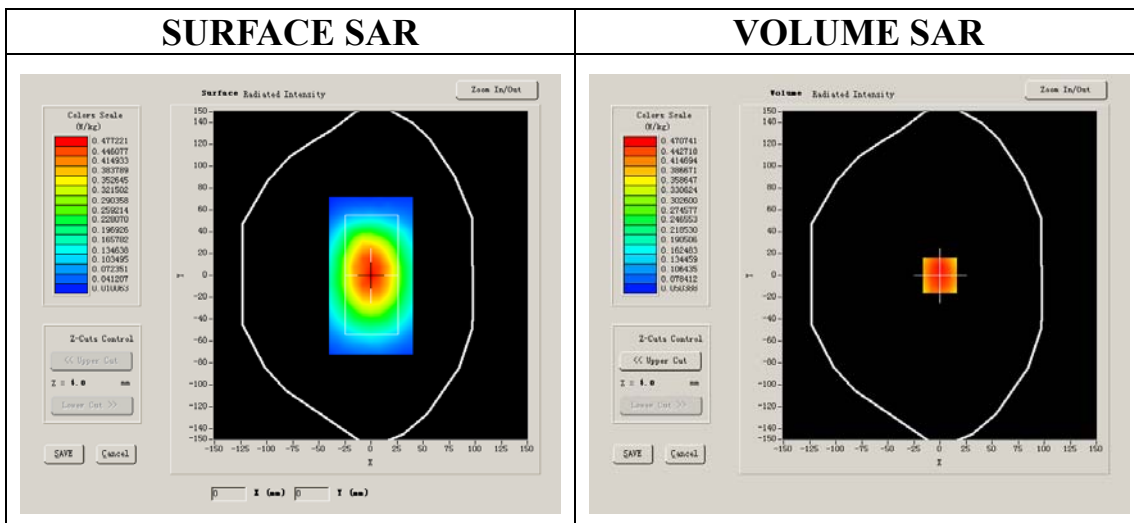


**Maximum location: X=0.00, Y=0.00**

<b>SAR 10g (W/Kg)</b>	0.362278
<b>SAR 1g (W/Kg)</b>	0.510623


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.5263	0.3961	0.2884	0.2086	0.1470	0.1059


**SAR, Z Axis Scan (X = 0, Y = 0)**

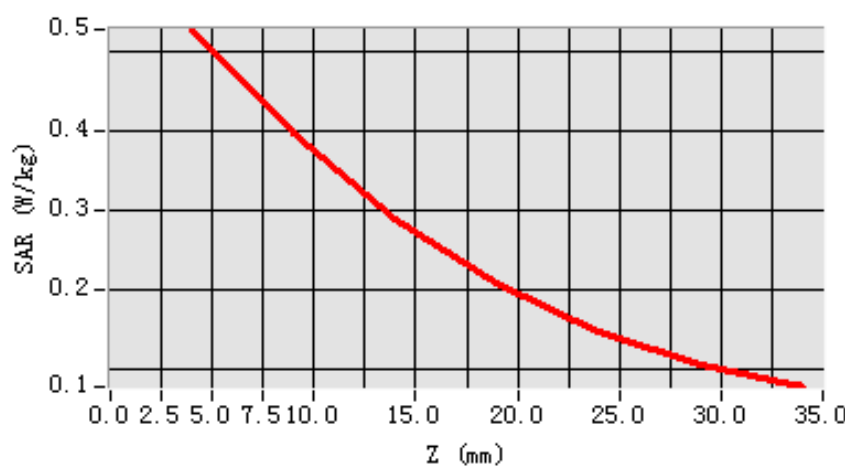

**3D scen shot**

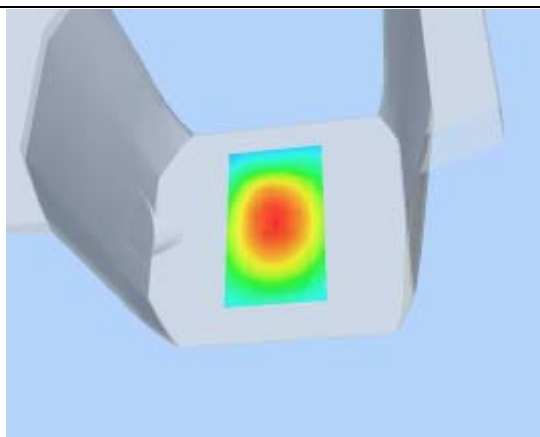

**Hot spot position**

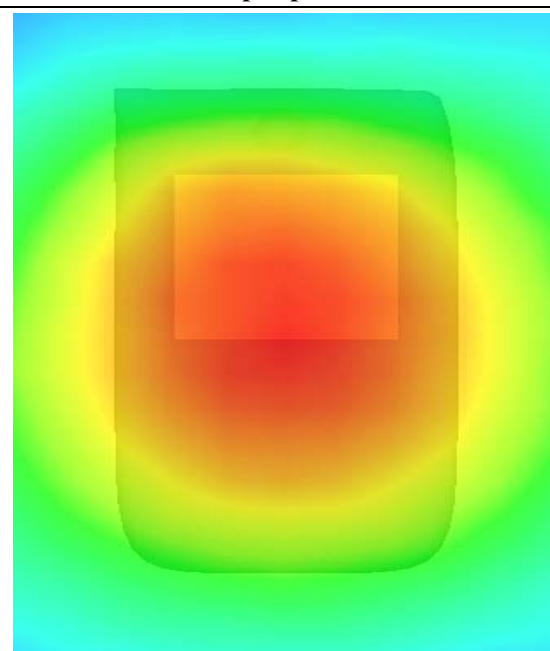

## MEASUREMENT 6

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 6 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	GSM

### B. SAR Measurement Results

Lower Band SAR (Channel 128):

<b>Frequency (MHz)</b>	824.200000
<b>Relative permittivity (real part)</b>	55.709999
<b>Relative permittivity</b>	21.709999
<b>Conductivity (S/m)</b>	1.009033
<b>Power drift (%)</b>	0.560000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559, 25.681, 27.588
<b>Crest factor:</b>	1:8

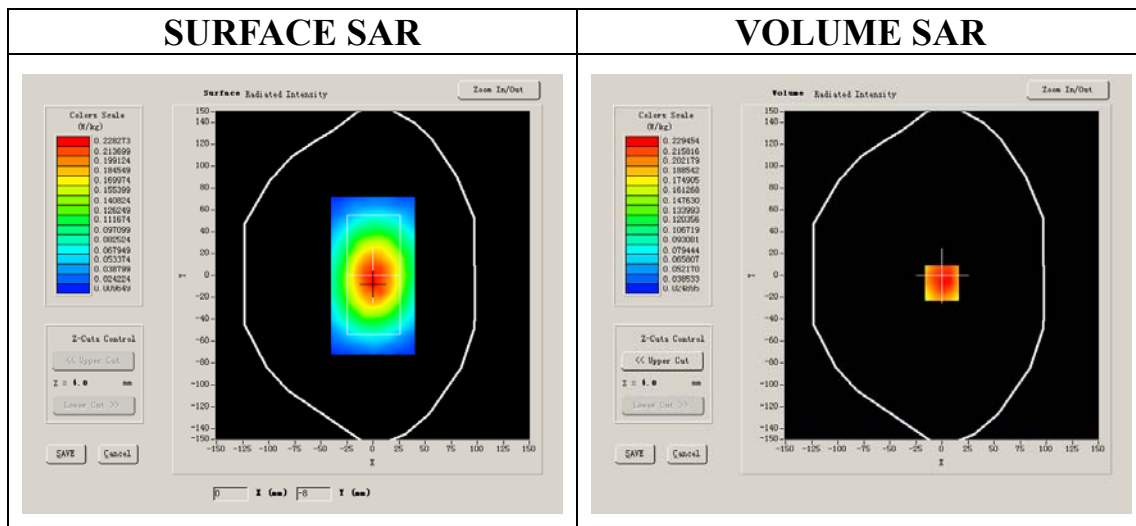


**Maximum location: X=0.00, Y=-7.00**

<b>SAR 10g (W/Kg)</b>	0.175593
<b>SAR 1g (W/Kg)</b>	0.252899


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.2605	0.1815	0.1401	0.0953	0.0740	0.0538


**SAR, Z Axis Scan (X = 0, Y = -7)**

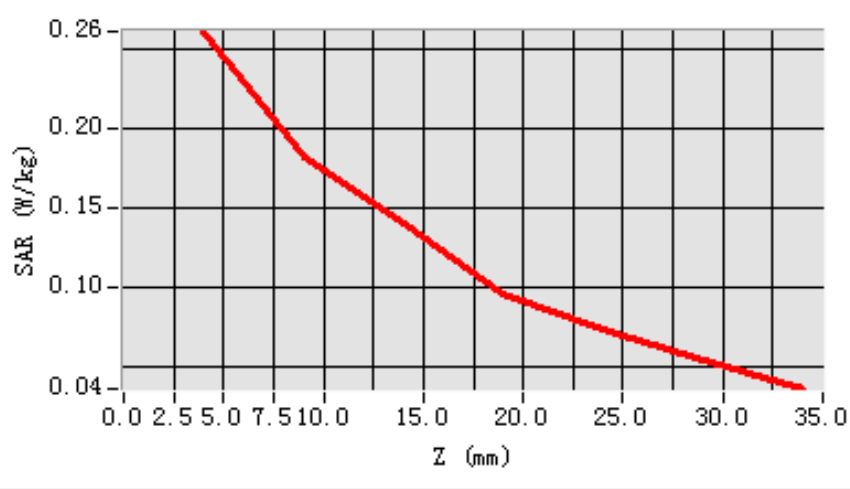

**3D scen shot**

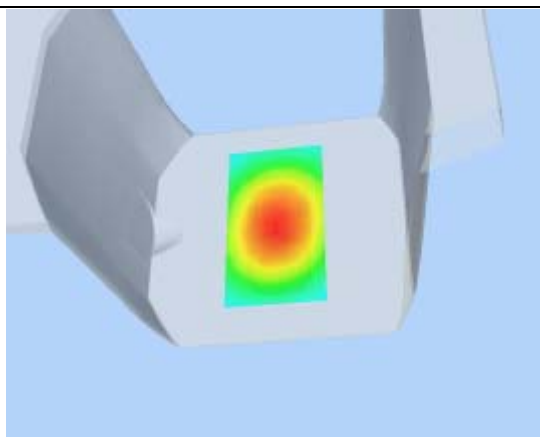

**Hot spot position**

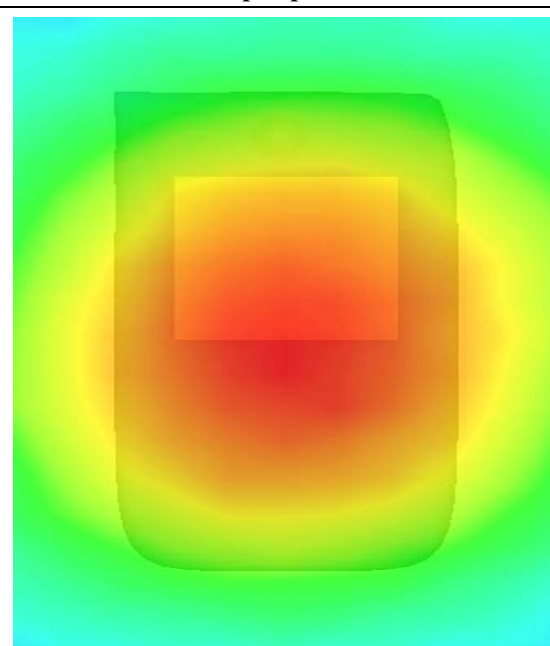

# MEASUREMENT 7

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 5 seconds


## A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	GPRS

## B. SAR Measurement Results

Lower Band SAR (Channel 128):

<b>Frequency (MHz)</b>	824.200012
<b>Relative permittivity (real part)</b>	54.116001
<b>Relative permittivity</b>	21.284550
<b>Conductivity (S/m)</b>	0.974596
<b>Power drift (%)</b>	-0.680000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559, 25.681, 27.588
<b>Crest factor:</b>	1:2

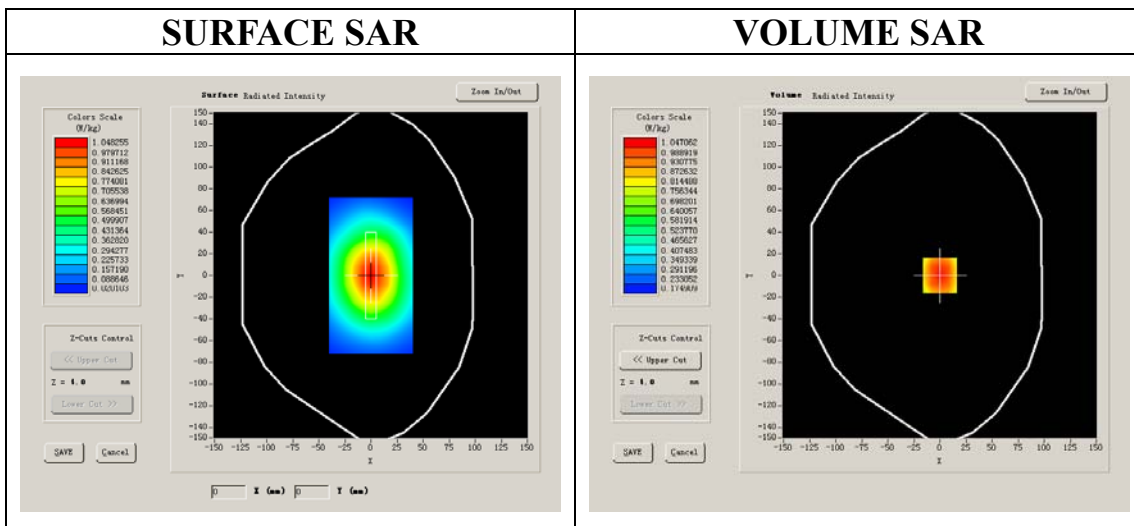


**Maximum location: X=0.00, Y=0.00**

<b>SAR 10g (W/Kg)</b>	0.834344
<b>SAR 1g (W/Kg)</b>	1.111822


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	1.1495	0.9198	0.7027	0.5770	0.4505	0.3514


**SAR, Z Axis Scan (X = 0, Y = 0)**

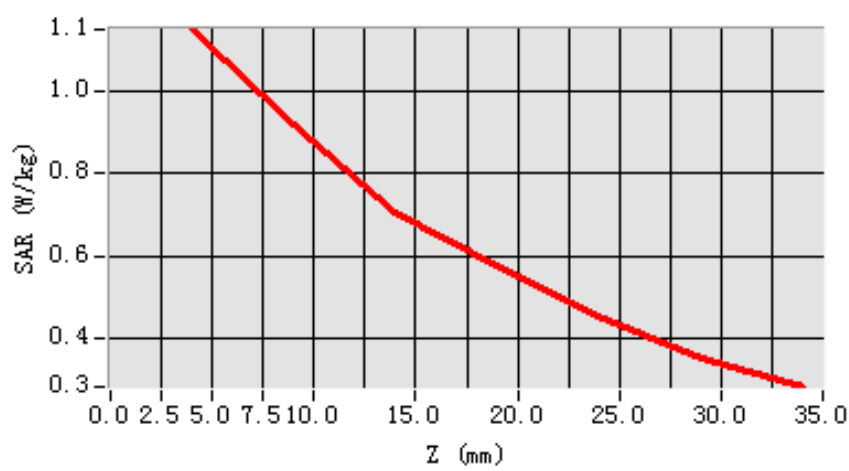

**3D scene shot**

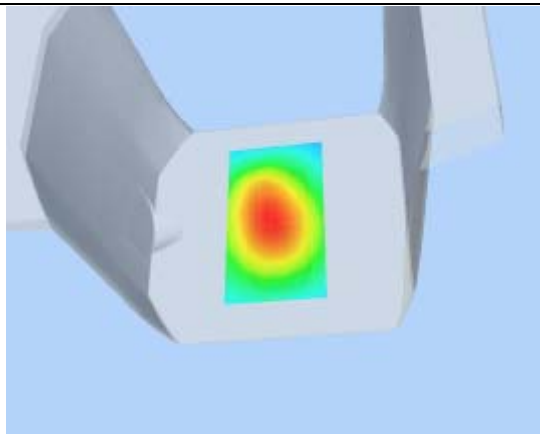

**Hot spot position**

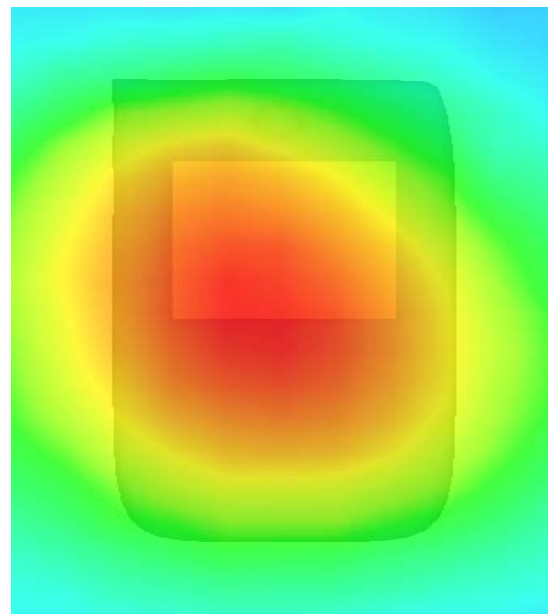



## MEASUREMENT 8

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 6 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM850
<b>Channels</b>	Middle
<b>Signal</b>	GPRS

### B. SAR Measurement Results


Middle Band SAR (Channel 190):

<b>Frequency (MHz)</b>	836.599976
<b>Relative permittivity (real part)</b>	55.709999
<b>Relative permittivity</b>	21.709999
<b>Conductivity (S/m)</b>	1.009033
<b>Power drift (%)</b>	-0.930000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559, 25.681, 27.588
<b>Crest factor:</b>	1:2

#### SURFACE SAR

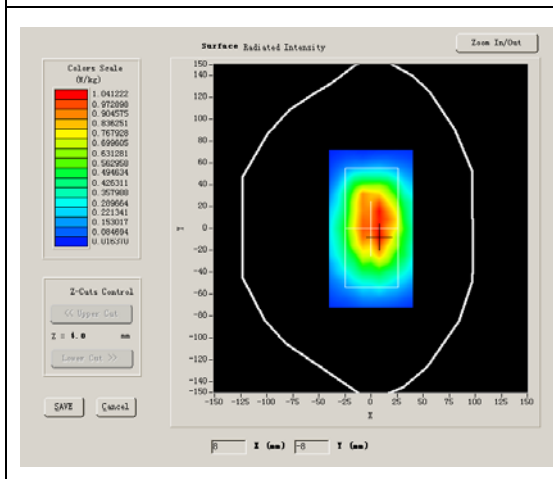

#### VOLUME SAR

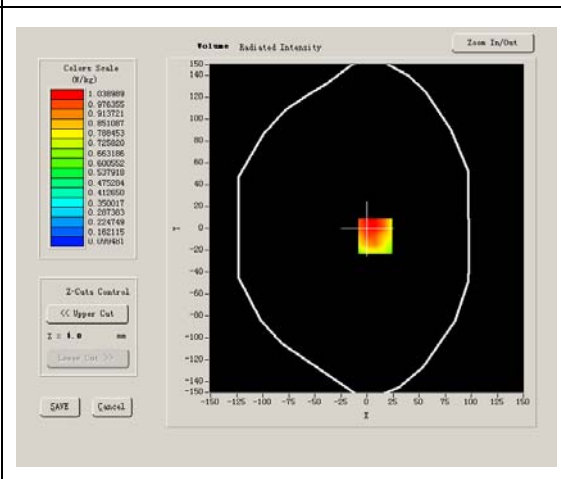


**Maximum location: X=8.00, Y=-7.00**

<b>SAR 10g (W/Kg)</b>	0.781654
<b>SAR 1g (W/Kg)</b>	1.156038


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	1.0958	0.7822	0.5438	0.4048	0.3006	0.2249


**SAR, Z Axis Scan (X = 8, Y = -7)**

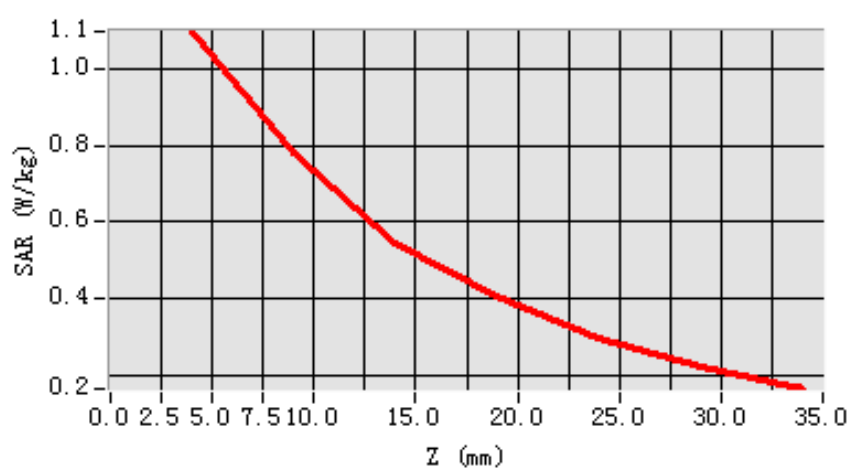

**3D scen shot**

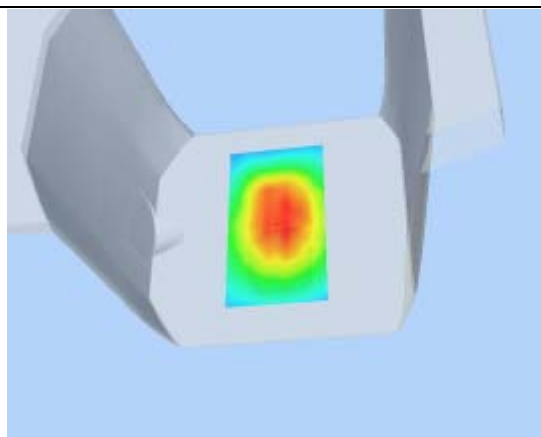

**Hot spot position**

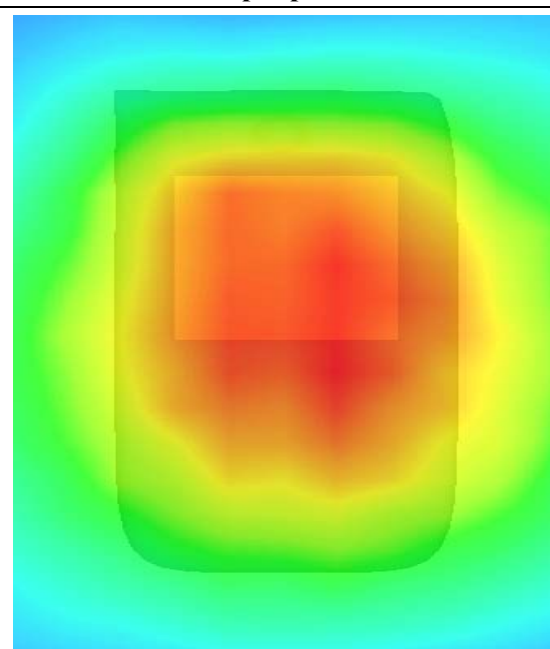

## MEASUREMENT 9

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 6 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM850
<b>Channels</b>	High
<b>Signal</b>	GPRS

### B. SAR Measurement Results

Higher Band SAR (Channel 251):

<b>Frequency (MHz)</b>	848.800000
<b>Relative permittivity (real part)</b>	55.709999
<b>Relative permittivity</b>	21.709999
<b>Conductivity (S/m)</b>	1.009033
<b>Power drift (%)</b>	-1.800000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559, 25.681, 27.588
<b>Crest factor:</b>	1:2

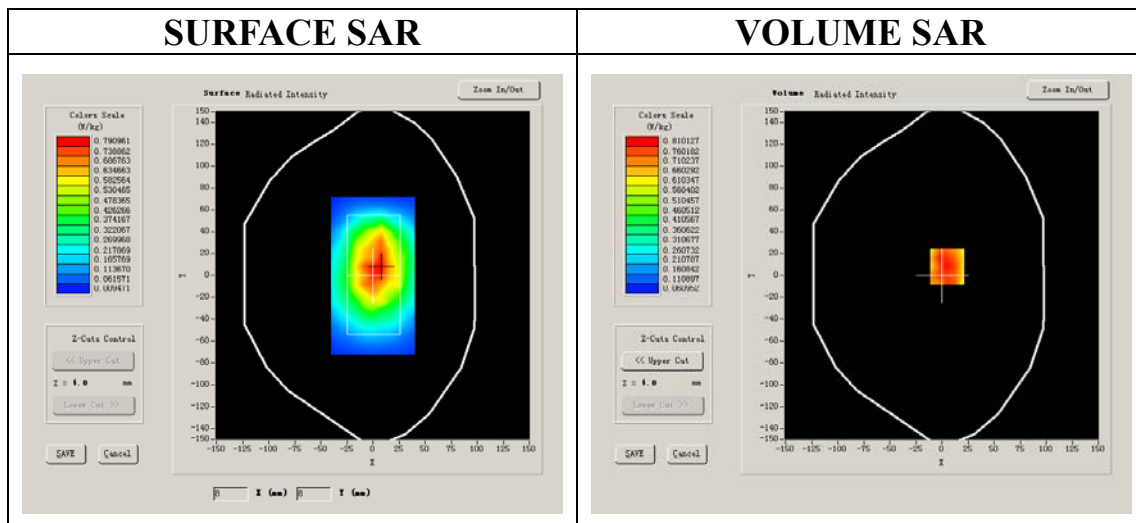


**Maximum location: X=5.00, Y=8.00**

<b>SAR 10g (W/Kg)</b>	0.603036
<b>SAR 1g (W/Kg)</b>	0.943655


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>0.9611</b>	<b>0.5905</b>	<b>0.4577</b>	<b>0.3353</b>	<b>0.2402</b>	<b>0.1683</b>


**SAR, Z Axis Scan (X = 5, Y = 8)**

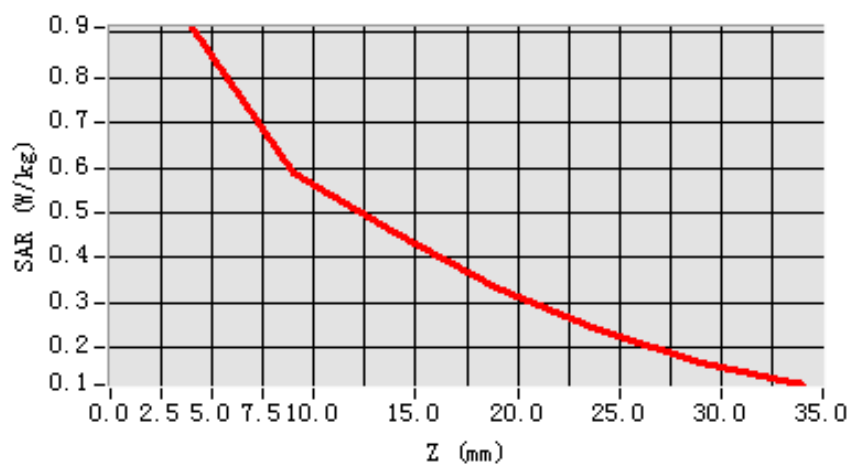

**3D scen shot**

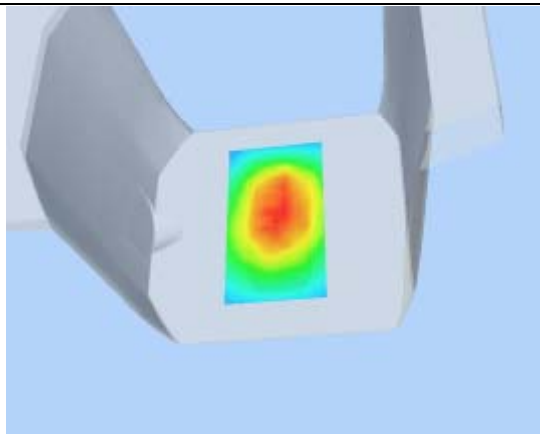

**Hot spot position**

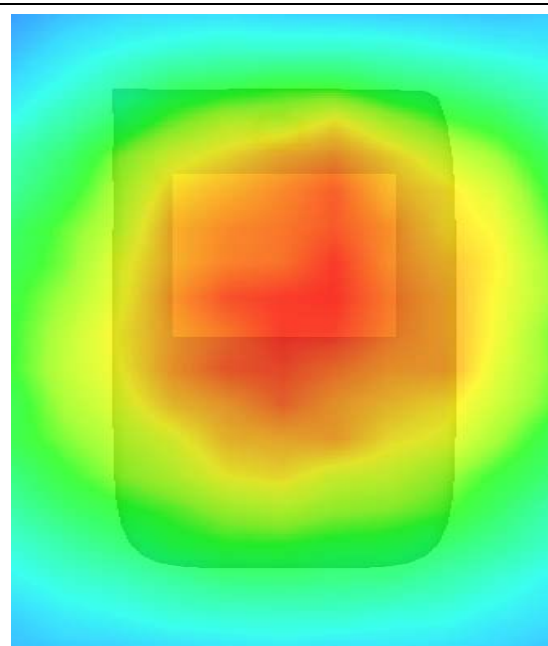

# MEASUREMENT 10

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 4 seconds


## A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	GPRS

## B. SAR Measurement Results

Lower Band SAR (Channel 128):

<b>Frequency (MHz)</b>	824.200012
<b>Relative permittivity (real part)</b>	54.116001
<b>Relative permittivity</b>	21.284550
<b>Conductivity (S/m)</b>	0.974596
<b>Power drift (%)</b>	-2.120000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559, 25.681, 27.588
<b>Crest factor:</b>	1:2

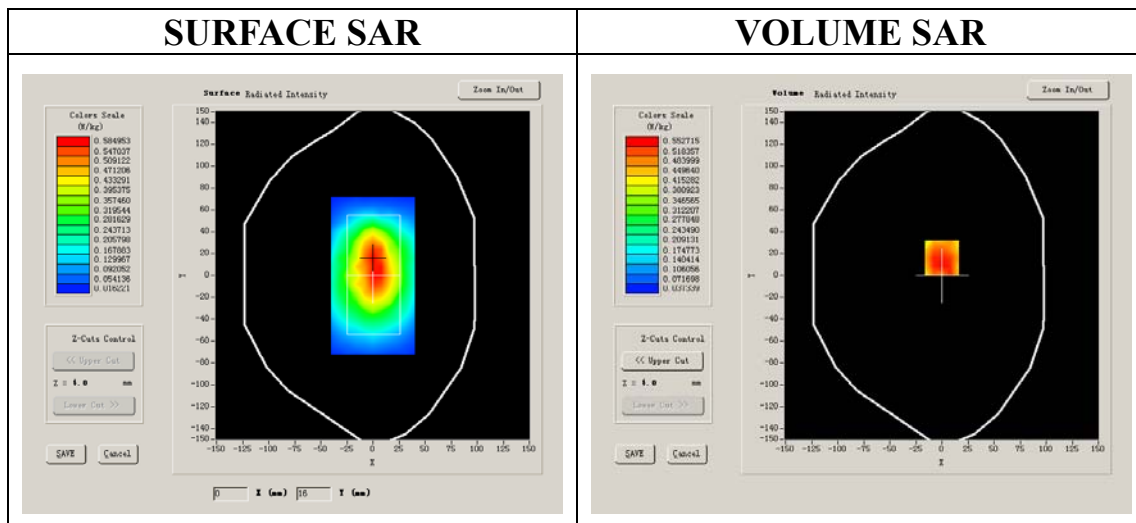


**Maximum location: X=0.00, Y=16.00**

<b>SAR 10g (W/Kg)</b>	0.422530
<b>SAR 1g (W/Kg)</b>	0.627797


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.6075	0.3937	0.2892	0.2323	0.1492	0.1015


**SAR, Z Axis Scan (X = 0, Y = 16)**

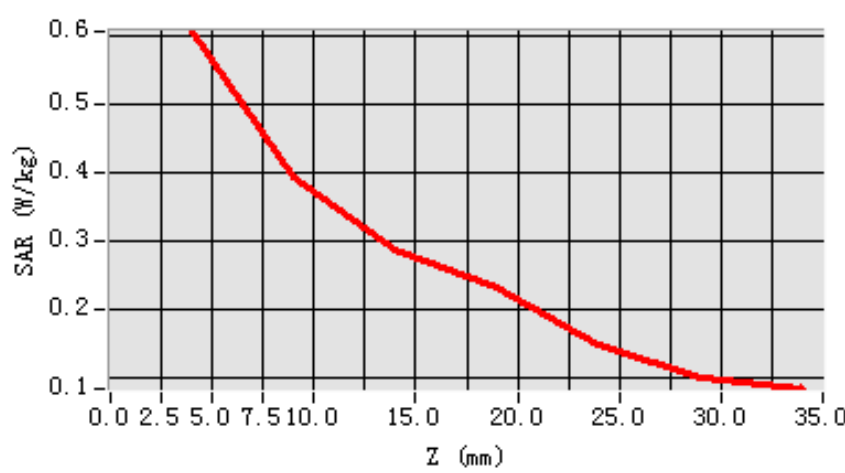

**3D scen shot**

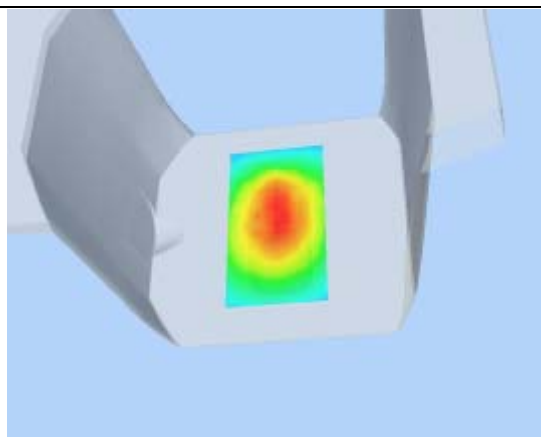

**Hot spot position**

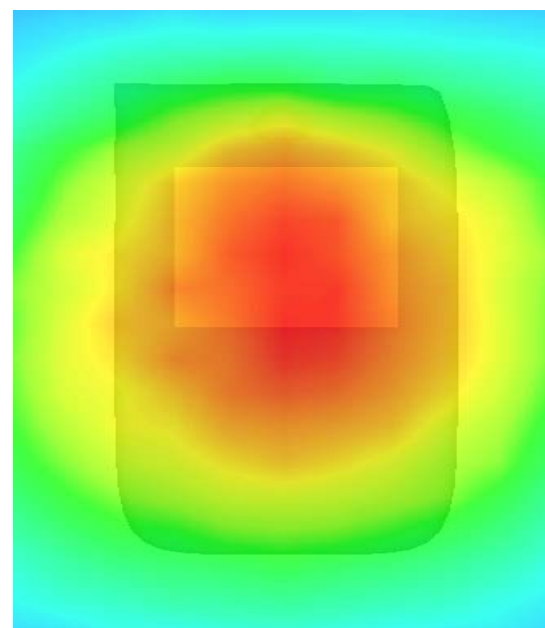

# MEASUREMENT 11

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 4 seconds


## A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	GPRS

## B. SAR Measurement Results

Lower Band SAR (Channel 128):

<b>Frequency (MHz)</b>	824.200012
<b>Relative permittivity (real part)</b>	54.116001
<b>Relative permittivity</b>	21.284550
<b>Conductivity (S/m)</b>	0.974596
<b>Power drift (%)</b>	-0.420000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559, 25.681, 27.588
<b>Crest factor:</b>	1:2

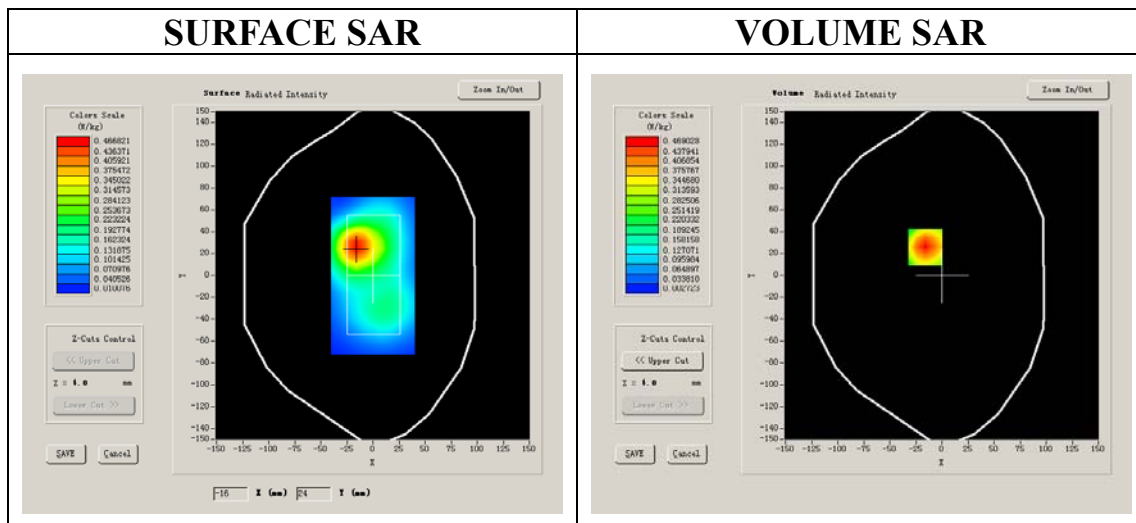


**Maximum location: X=-16.00, Y=26.00**

<b>SAR 10g (W/Kg)</b>	0.240097
<b>SAR 1g (W/Kg)</b>	0.457210


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.4799	0.2306	0.1143	0.0559	0.0267	0.0150


**SAR, Z Axis Scan (X = -16, Y = 26)**

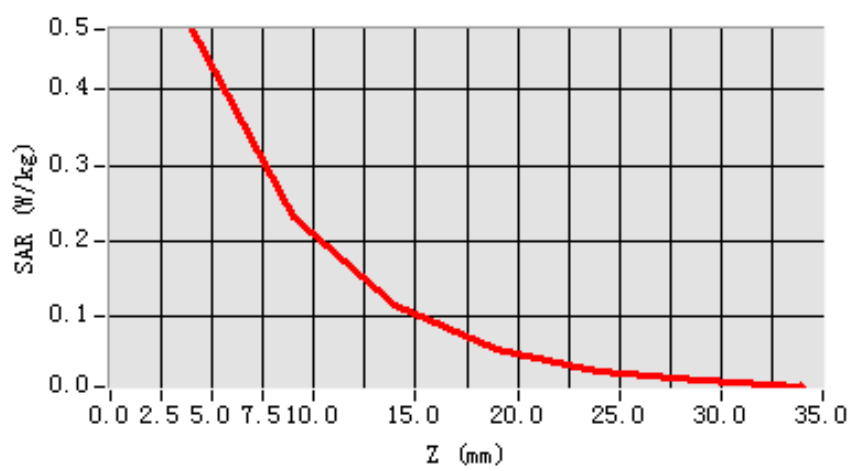

**3D scen shot**

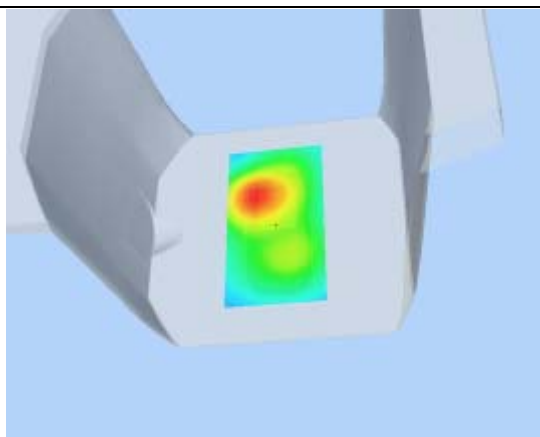

**Hot spot position**

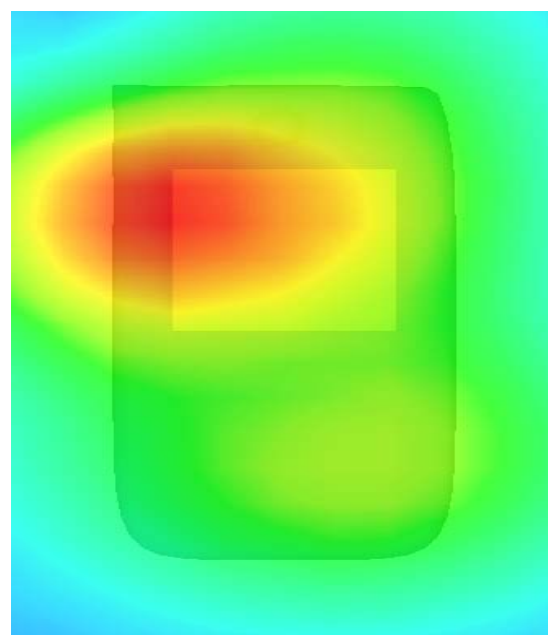



## MEASUREMENT 12

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	GPRS

### B. SAR Measurement Results

Lower Band SAR (Channel 128):

<b>Frequency (MHz)</b>	824.200000
<b>Relative permittivity (real part)</b>	55.709999
<b>Relative permittivity</b>	21.709999
<b>Conductivity (S/m)</b>	1.009033
<b>Power drift (%)</b>	-0.510000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559, 25.681, 27.588
<b>Crest factor:</b>	1:2

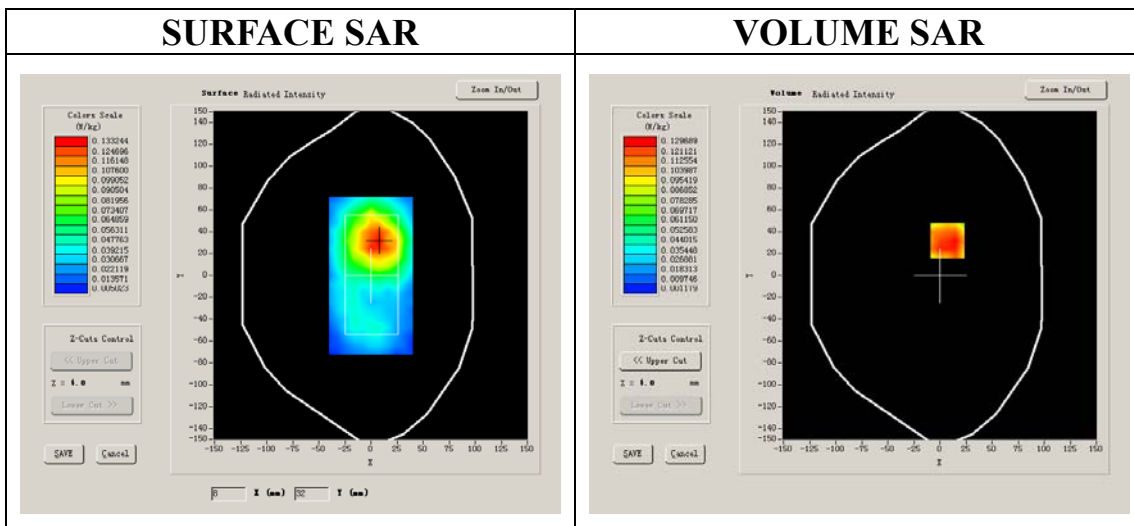


Maximum location: X=7.00, Y=32.00

SAR 10g (W/Kg)	0.076992
SAR 1g (W/Kg)	0.146058


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1411	0.0705	0.0341	0.0177	0.0066	0.0083


SAR, Z Axis Scan (X = 7, Y = 32)

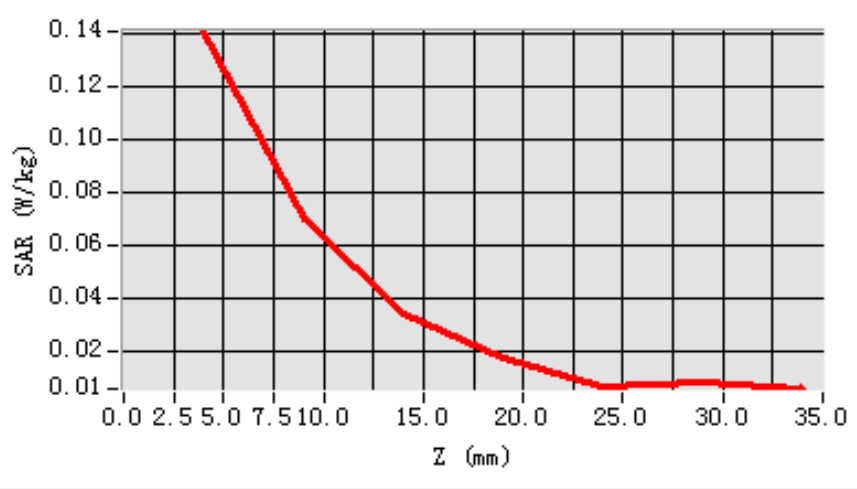

3D scen shot

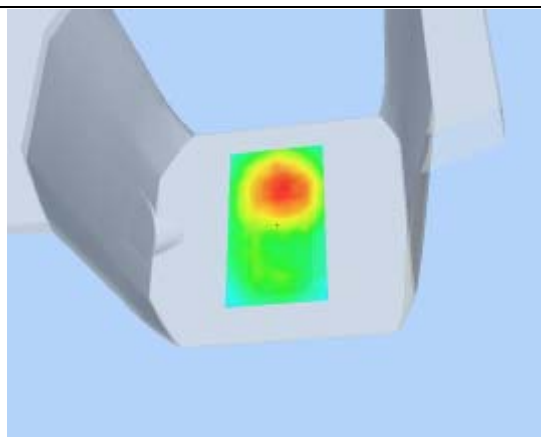

Hot spot position

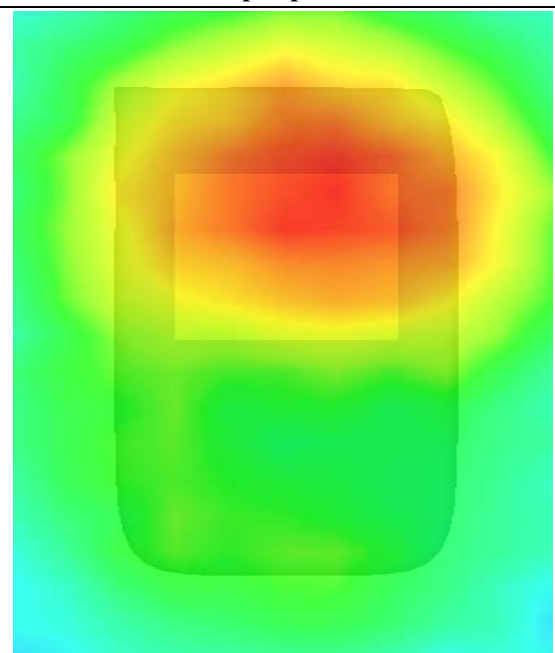

## MEASUREMENT 13

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 4 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	GPRS

### B. SAR Measurement Results

Lower Band SAR (Channel 128):

<b>Frequency (MHz)</b>	824.200012
<b>Relative permittivity (real part)</b>	54.116001
<b>Relative permittivity</b>	21.284550
<b>Conductivity (S/m)</b>	0.974596
<b>Power drift (%)</b>	-1.530000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559, 25.681, 27.588
<b>Crest factor:</b>	1:2

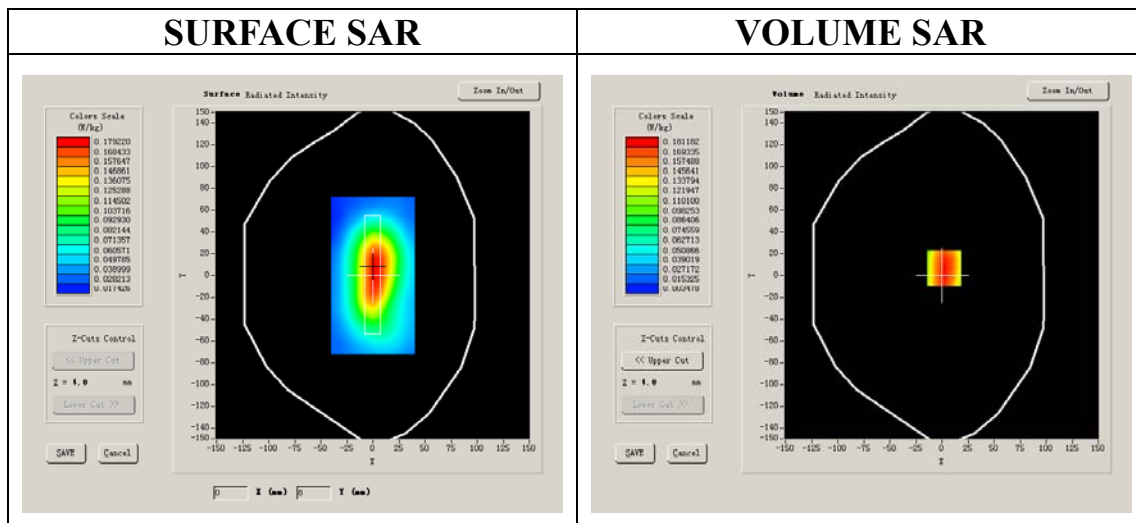


**Maximum location: X=2.00, Y=7.00**

<b>SAR 10g (W/Kg)</b>	0.115660
<b>SAR 1g (W/Kg)</b>	0.209630


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.2174	0.1087	0.0554	0.0271	0.0193	0.0094


**SAR, Z Axis Scan (X = 2, Y = 7)**

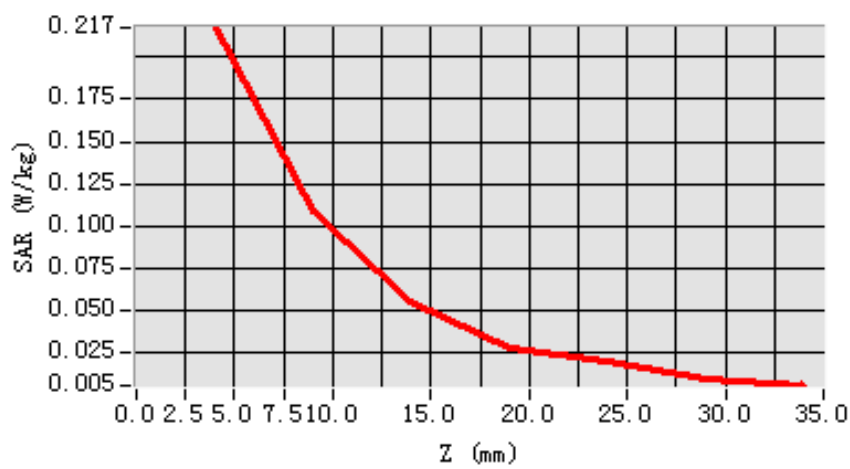

**3D scen shot**

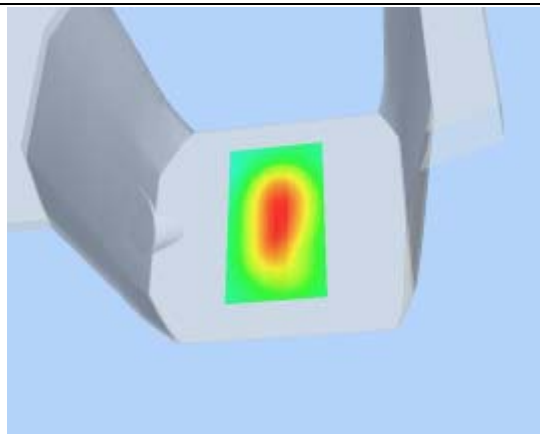

**Hot spot position**

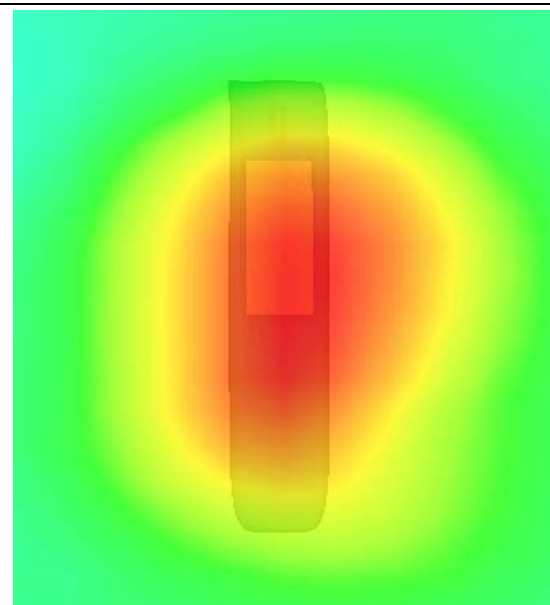

# MEASUREMENT 14

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds


## A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	EDGE

## B. SAR Measurement Results

Lower Band SAR (Channel 128):

<b>Frequency (MHz)</b>	824.200000
<b>Relative permittivity (real part)</b>	55.709999
<b>Relative permittivity</b>	21.709999
<b>Conductivity (S/m)</b>	1.009033
<b>Power drift (%)</b>	-0.080000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559, 25.681, 27.588
<b>Crest factor:</b>	1:2

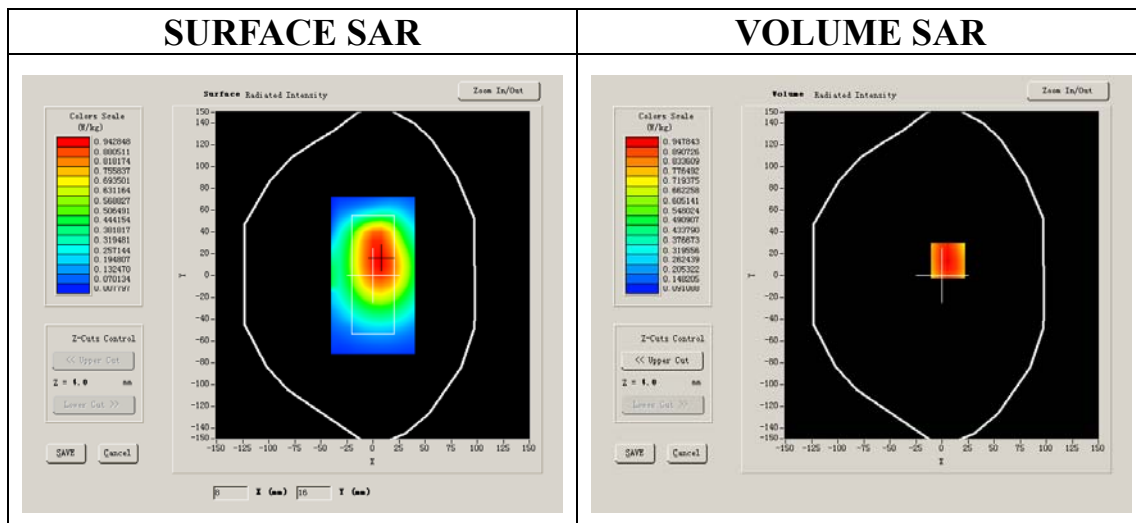


**Maximum location: X=6.00, Y=14.00**

<b>SAR 10g (W/Kg)</b>	0.787447
<b>SAR 1g (W/Kg)</b>	1.098586


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	1.1375	0.8492	0.6175	0.4562	0.3298	0.2387


**SAR, Z Axis Scan (X = 6, Y = 14)**

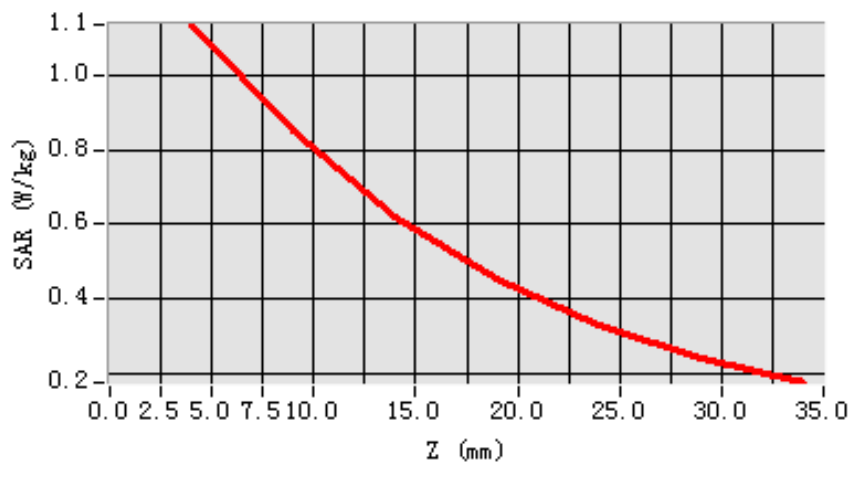

**3D seen shot**

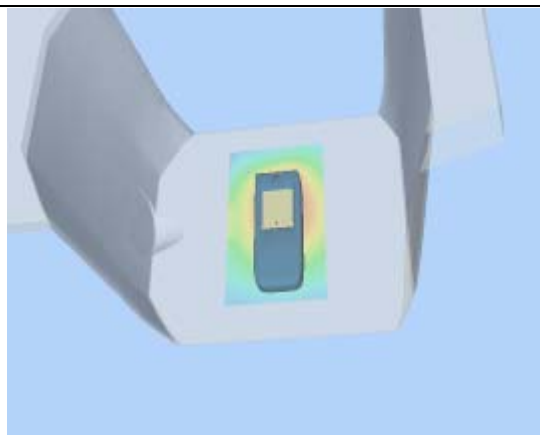

**Hot spot position**

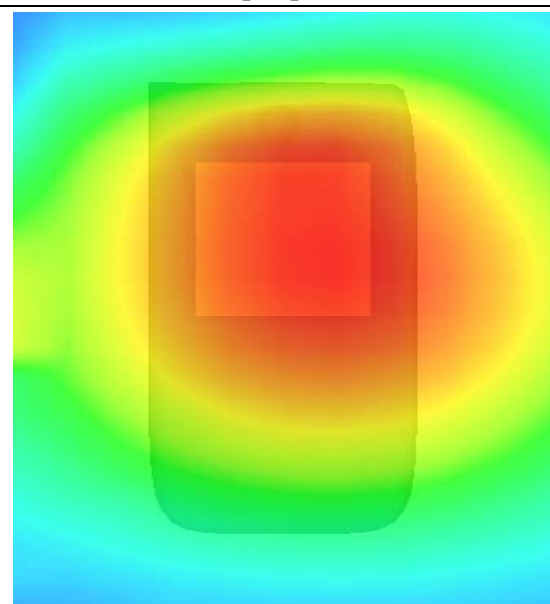

## MEASUREMENT 15

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM850
<b>Channels</b>	Middle
<b>Signal</b>	EDGE

### B. SAR Measurement Results

Middle Band SAR (Channel 190):

<b>Frequency (MHz)</b>	836.600000
<b>Relative permittivity (real part)</b>	55.709999
<b>Relative permittivity</b>	21.709999
<b>Conductivity (S/m)</b>	1.009033
<b>Power drift (%)</b>	-0.350000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559, 25.681, 27.588
<b>Crest factor:</b>	1:2

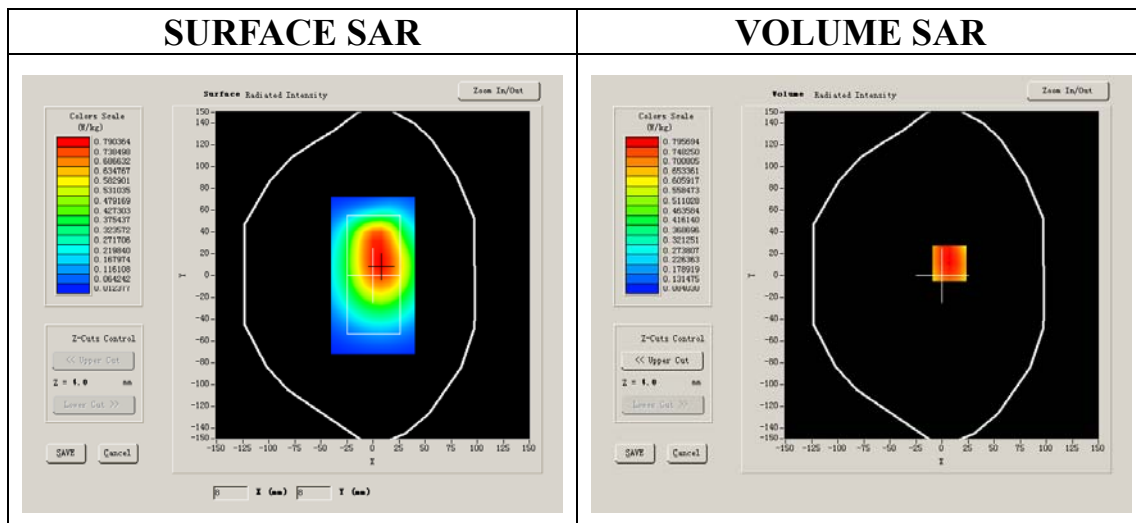


**Maximum location: X=7.00, Y=11.00**

<b>SAR 10g (W/Kg)</b>	0.665345
<b>SAR 1g (W/Kg)</b>	0.928191


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.9592	0.7106	0.5268	0.3883	0.2850	0.2082


**SAR, Z Axis Scan (X = 7, Y = 11)**

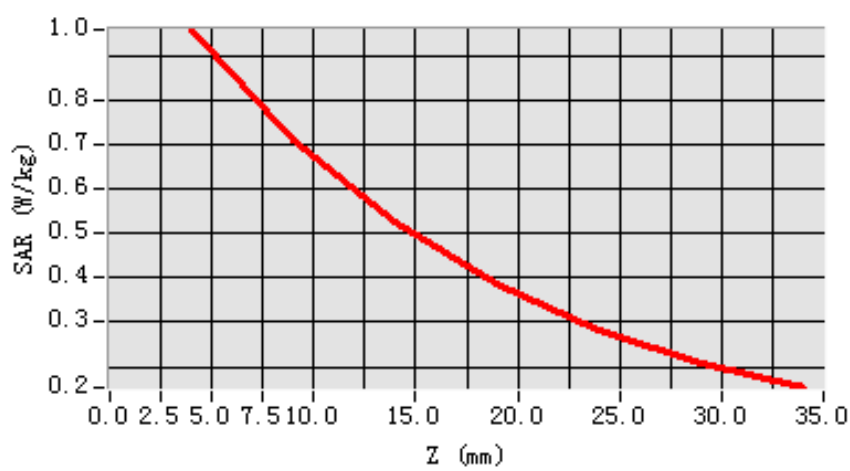

**3D scen shot**

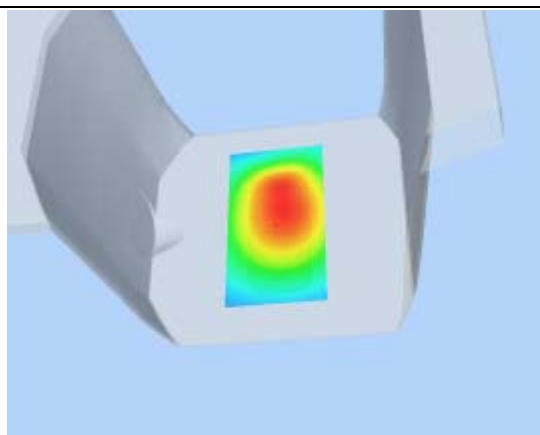

**Hot spot position**

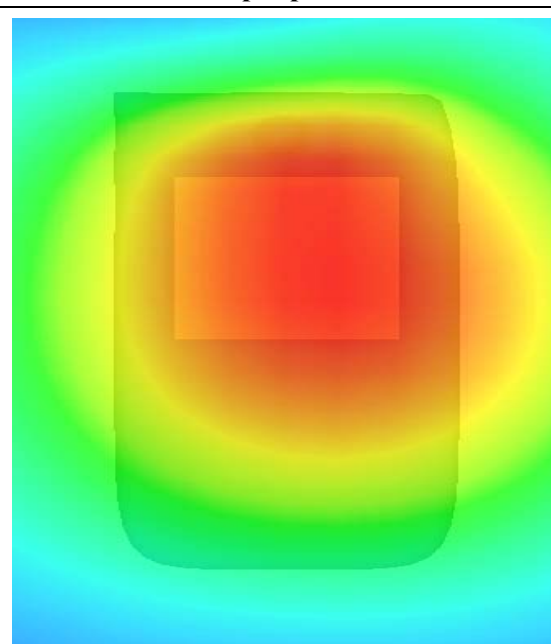



## MEASUREMENT 16

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM850
<b>Channels</b>	High
<b>Signal</b>	EDGE

### B. SAR Measurement Results

Higher Band SAR (Channel 251):

<b>Frequency (MHz)</b>	848.800000
<b>Relative permittivity (real part)</b>	55.709999
<b>Relative permittivity</b>	21.709999
<b>Conductivity (S/m)</b>	1.009033
<b>Power drift (%)</b>	-1.140000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559, 25.681, 27.588
<b>Crest factor:</b>	1:2

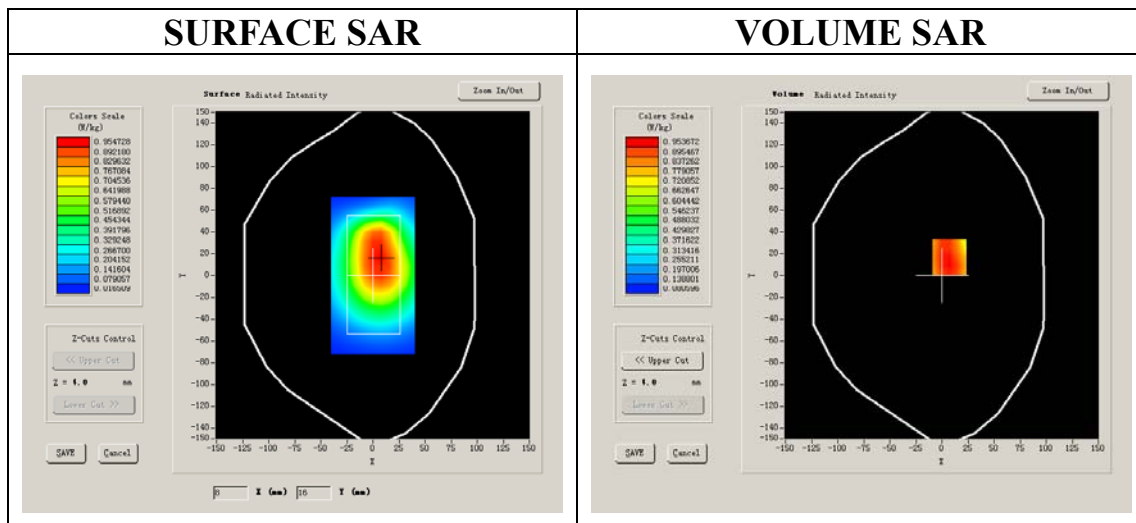


**Maximum location: X=7.00, Y=17.00**

<b>SAR 10g (W/Kg)</b>	0.777932
<b>SAR 1g (W/Kg)</b>	1.089421


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	1.1285	0.8317	0.6058	0.4391	0.3166	0.2270


**SAR, Z Axis Scan (X = 7, Y = 17)**

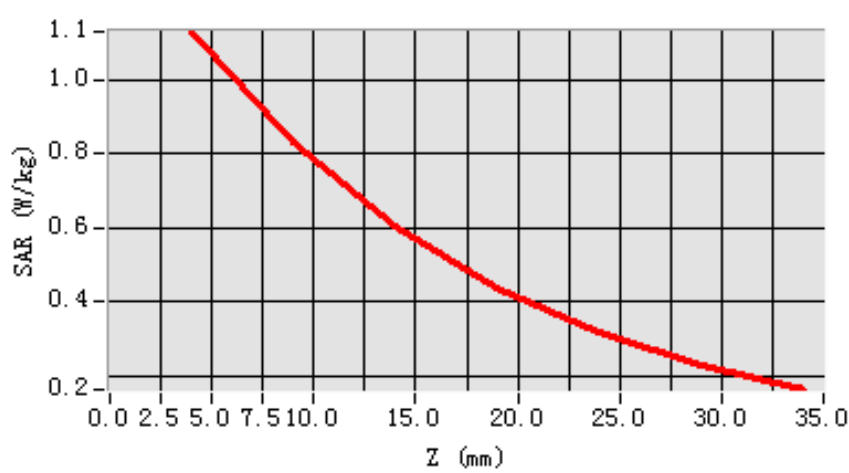

**3D scen shot**

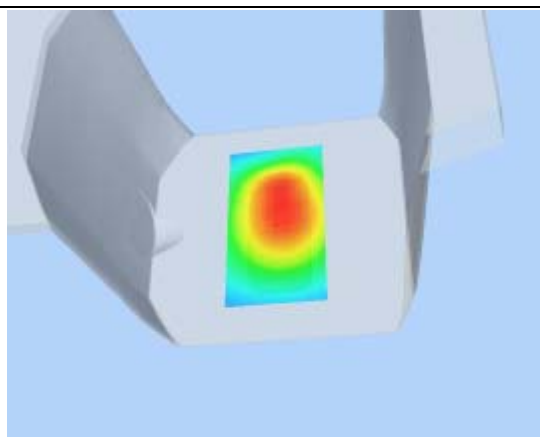

**Hot spot position**

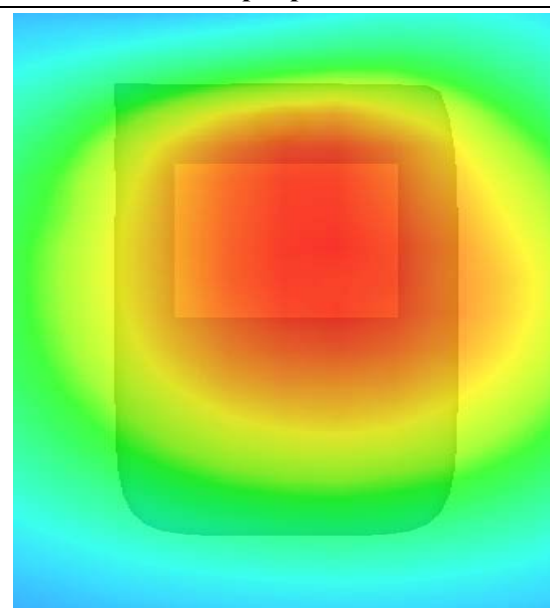

# MEASUREMENT 17

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 8 minutes 12 seconds

## A. Experimental conditions.


<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	GSM

## B. SAR Measurement Results


Lower Band SAR (Channel 512):

<b>Frequency (MHz)</b>	1850.200000
<b>Relative permittivity (real part)</b>	38.509998
<b>Relative permittivity</b>	13.750000
<b>Conductivity (S/m)</b>	1.436111
<b>Power drift (%)</b>	0.050000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	40.136,34.843,38.721
<b>Crest factor:</b>	1:8

### SURFACE SAR

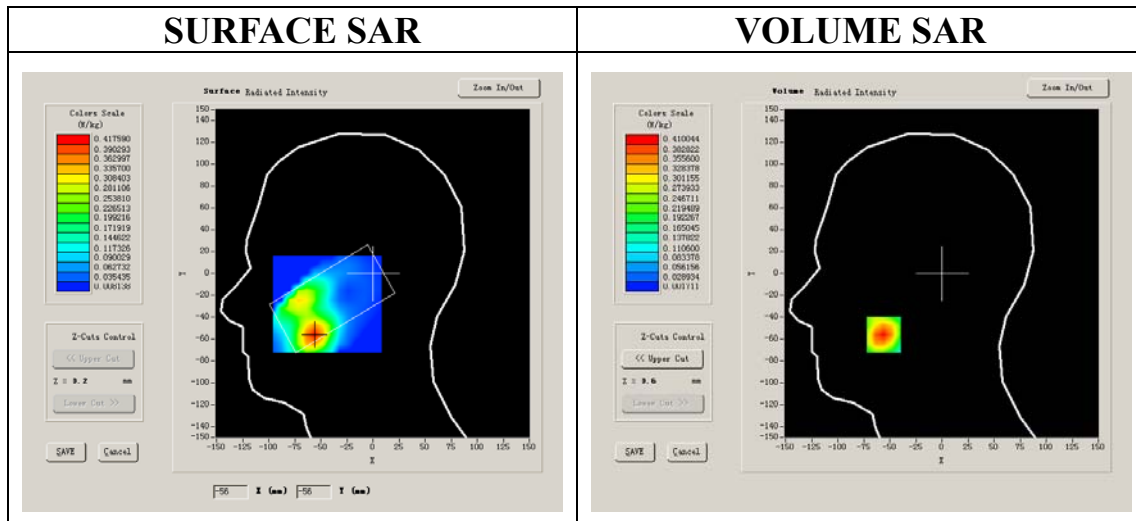

### VOLUME SAR

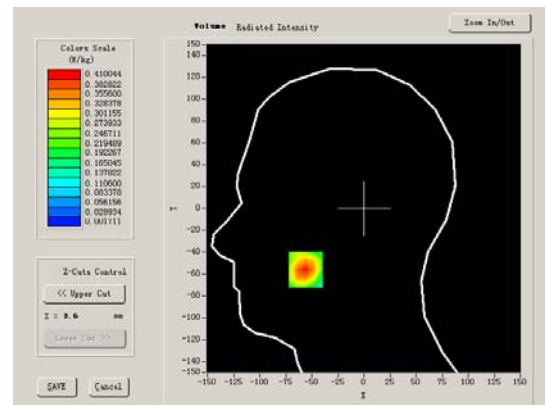


**Maximum location: X=-56.00, Y=-56.00**

<b>SAR 10g (W/Kg)</b>	0.198342
<b>SAR 1g (W/Kg)</b>	0.388818


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4100	0.2023	0.0956	0.0471	0.0227	0.0108


**SAR, Z Axis Scan (X = -56, Y = -56)**

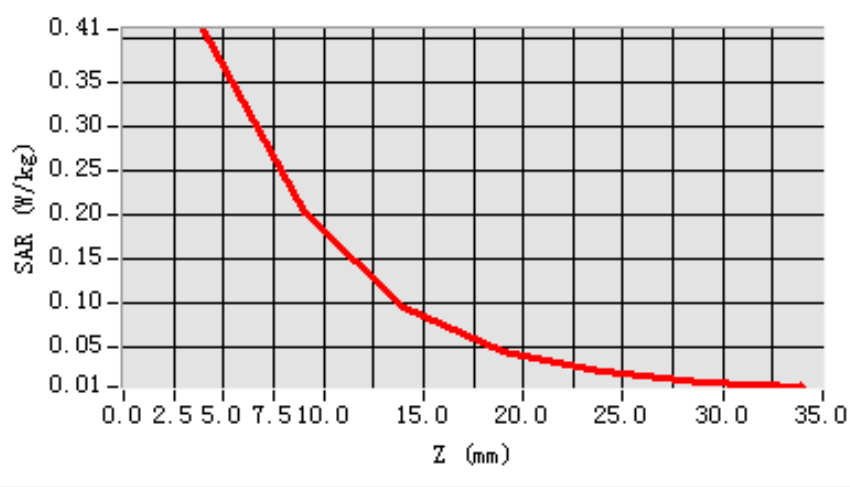

**3D scen shot**

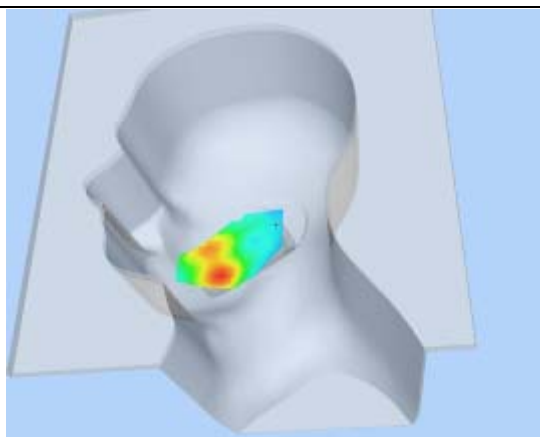

**Hot spot position**

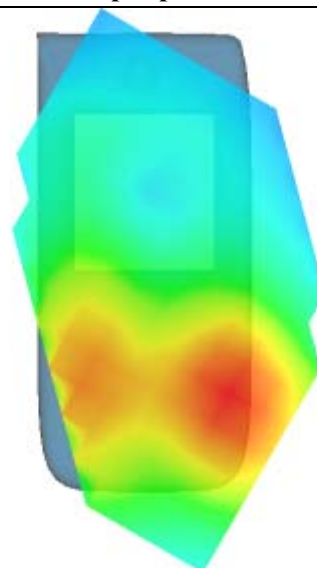

# MEASUREMENT 18

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 8 minutes 32 seconds

## A. Experimental conditions.


<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Tilt
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	GSM

## B. SAR Measurement Results


Lower Band SAR (Channel 512):

<b>Frequency (MHz)</b>	1850.200000
<b>Relative permittivity (real part)</b>	38.509998
<b>Relative permittivity</b>	13.750000
<b>Conductivity (S/m)</b>	1.436111
<b>Power drift (%)</b>	-0.940000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.136,34.843,38.721
<b>Crest factor:</b>	1:8

### SURFACE SAR

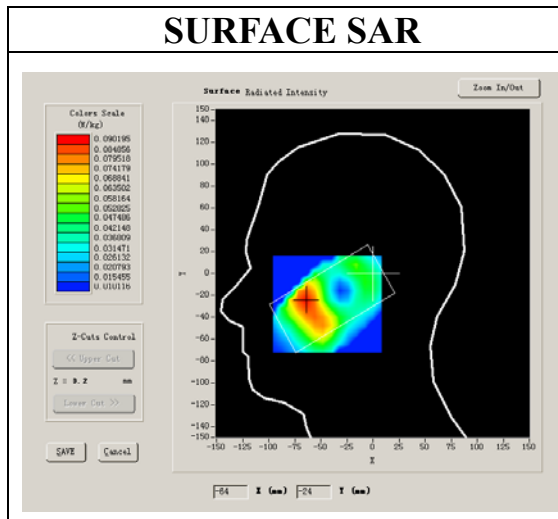

### VOLUME SAR

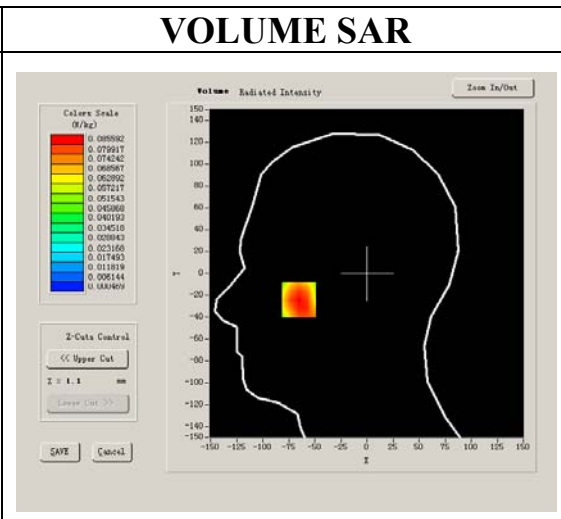


**Maximum location: X=-65.00, Y=-24.00**

<b>SAR 10g (W/Kg)</b>	0.046307
<b>SAR 1g (W/Kg)</b>	0.083053


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>0.0856</b>	<b>0.0457</b>	<b>0.0233</b>	<b>0.0123</b>	<b>0.0067</b>	<b>0.0029</b>


**SAR, Z Axis Scan (X = -65, Y = -24)**

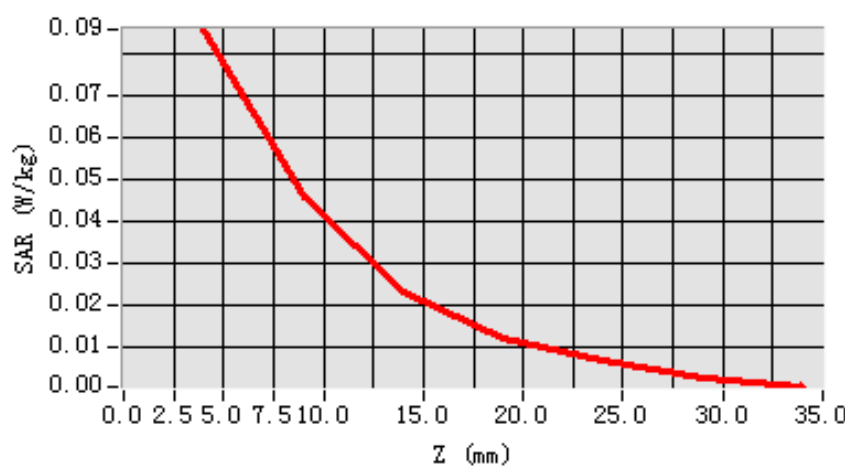

**3D scen shot**

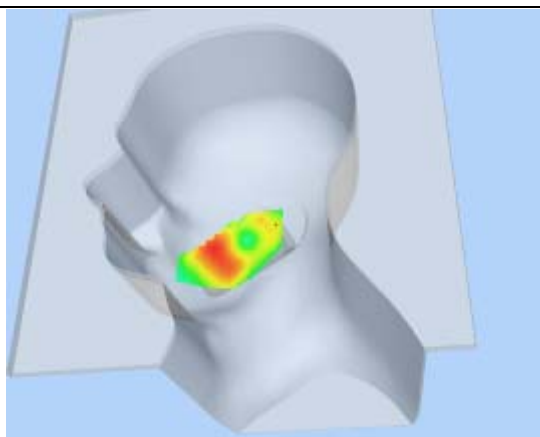

**Hot spot position**

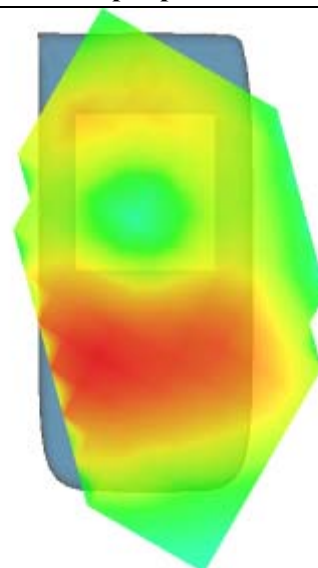

## MEASUREMENT 19

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 8 minutes 6 seconds


### A. Experimental conditions.

<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	GSM

### B. SAR Measurement Results

Lower Band SAR (Channel 512):

<b>Frequency (MHz)</b>	1850.200000
<b>Relative permittivity (real part)</b>	38.509998
<b>Relative permittivity</b>	13.750000
<b>Conductivity (S/m)</b>	1.436111
<b>Power drift (%)</b>	-0.430000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.136,34.843,38.721
<b>Crest factor:</b>	1:8

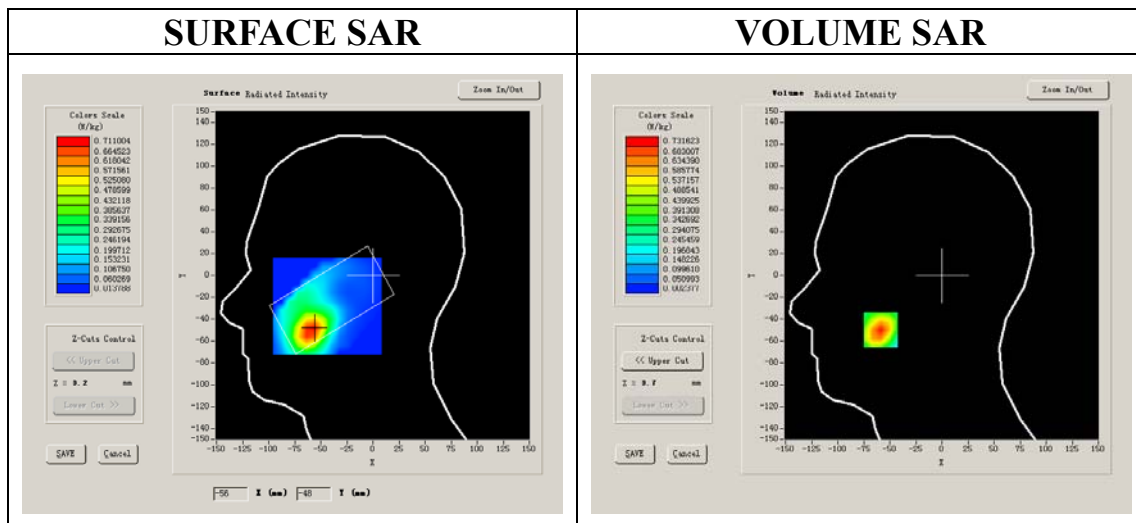


**Maximum location: X=-59.00, Y=-50.00**

<b>SAR 10g (W/Kg)</b>	0.338898
<b>SAR 1g (W/Kg)</b>	0.690481


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.7316	0.3321	0.1581	0.0723	0.0346	0.0160


**SAR, Z Axis Scan (X = -59, Y = -50)**

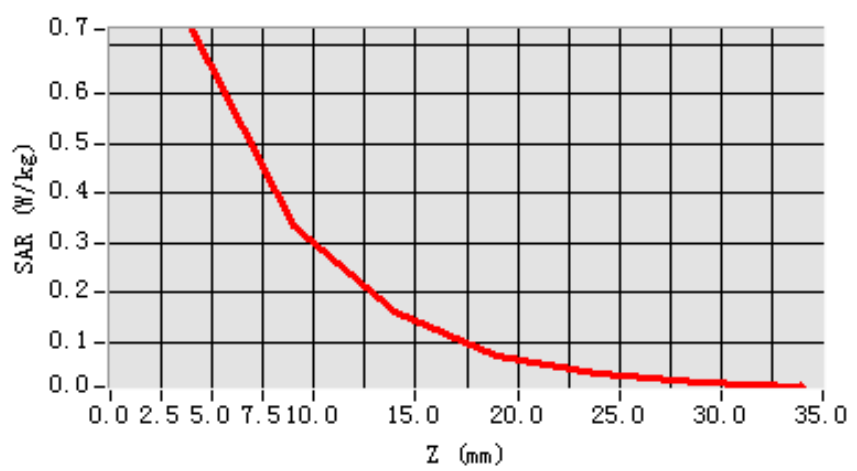

**3D scen shot**

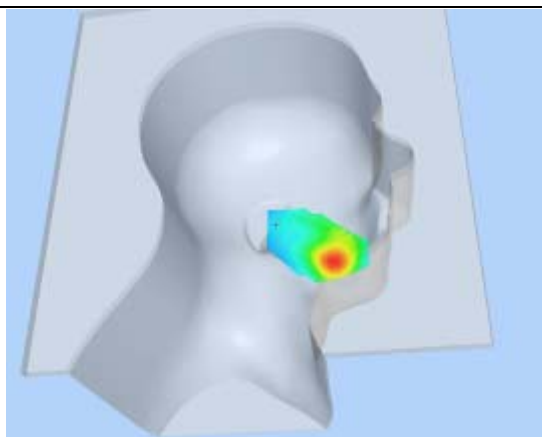

**Hot spot position**

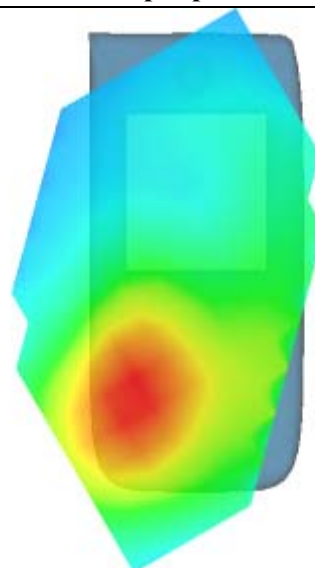



## MEASUREMENT 20

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 8 minutes 6 seconds


### A. Experimental conditions.

<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Tilt
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	GSM

### B. SAR Measurement Results

Lower Band SAR (Channel 512):

<b>Frequency (MHz)</b>	1850.200000
<b>Relative permittivity (real part)</b>	38.509998
<b>Relative permittivity</b>	13.750000
<b>Conductivity (S/m)</b>	1.436111
<b>Power drift (%)</b>	-0.490000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.136,34.843,38.721
<b>Crest factor:</b>	1:8

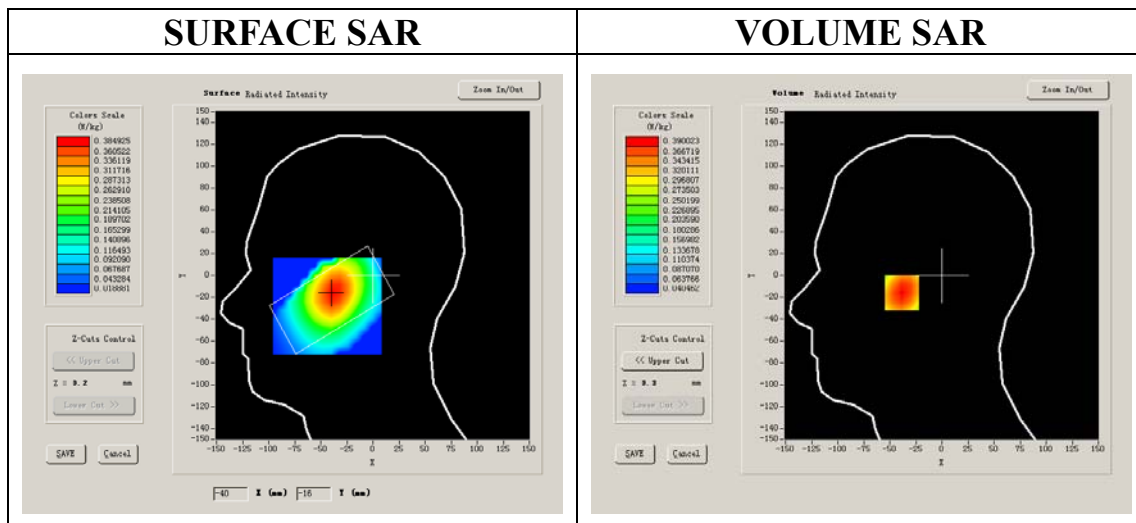


**Maximum location: X=-38.00, Y=-16.00**

<b>SAR 10g (W/Kg)</b>	0.269316
<b>SAR 1g (W/Kg)</b>	0.375690


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.3900	0.2950	0.2226	0.1644	0.1202	0.0854


**SAR, Z Axis Scan (X = -38, Y = -16)**

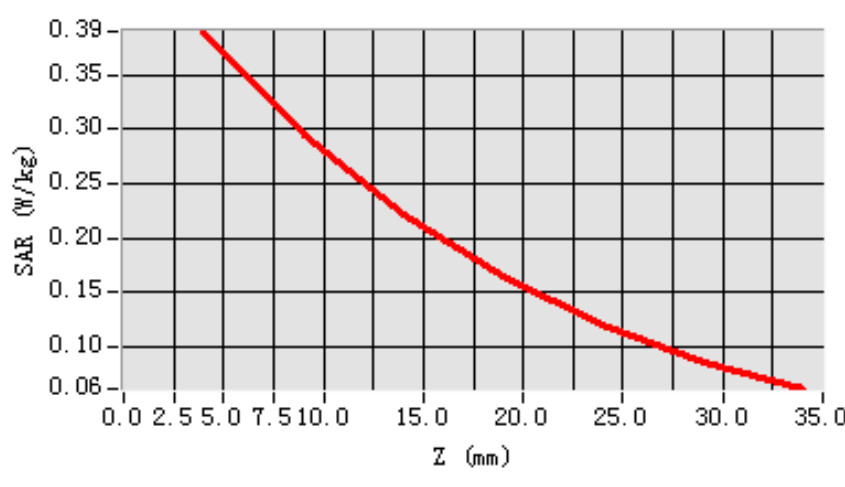

**3D scen shot**

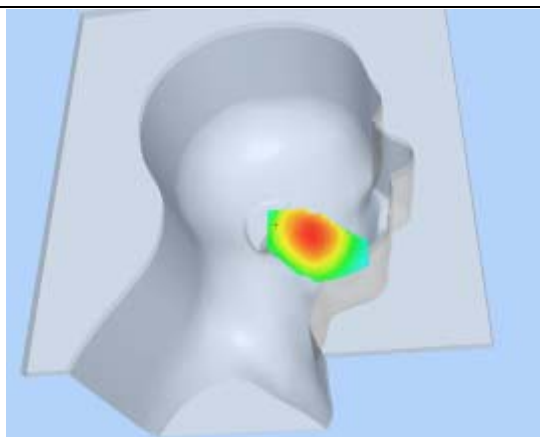

**Hot spot position**

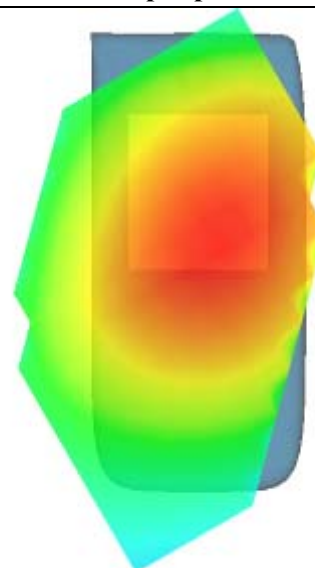

# MEASUREMENT 21

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds


## A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	GSM

## B. SAR Measurement Results

Lower Band SAR (Channel 512):

<b>Frequency (MHz)</b>	1850.200000
<b>Relative permittivity (real part)</b>	52.540001
<b>Relative permittivity</b>	14.070000
<b>Conductivity (S/m)</b>	1.469533
<b>Power drift (%)</b>	-0.060000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:8

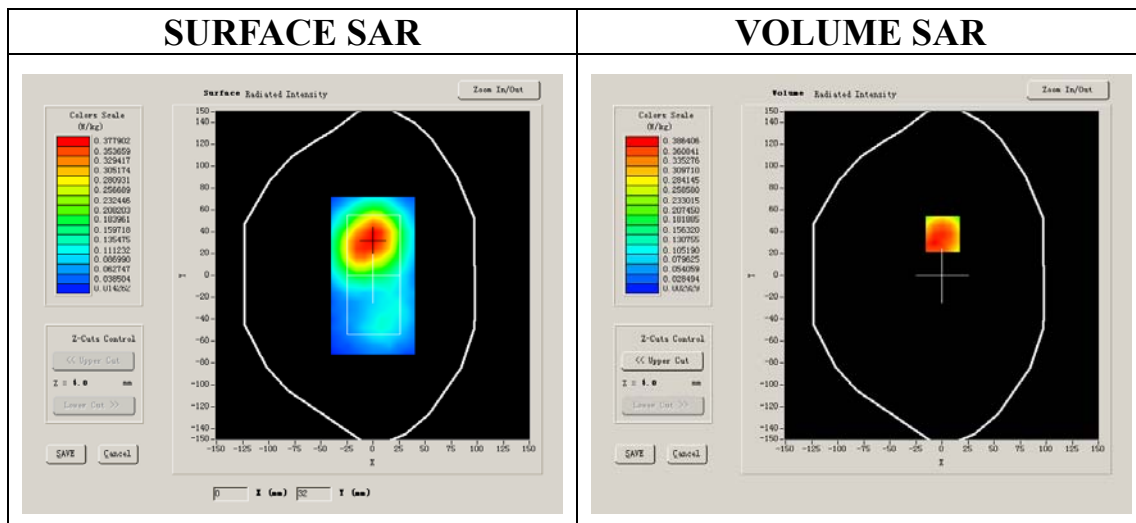


**Maximum location: X=1.00, Y=38.00**

<b>SAR 10g (W/Kg)</b>	0.208873
<b>SAR 1g (W/Kg)</b>	0.379165


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.3835	0.1870	0.0989	0.0513	0.0193	0.0104


**SAR, Z Axis Scan (X = 1, Y = 38)**

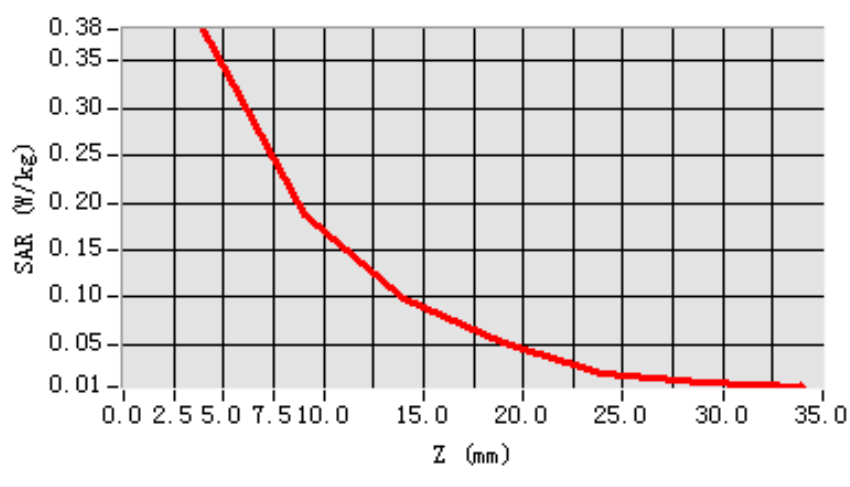

**3D scen shot**

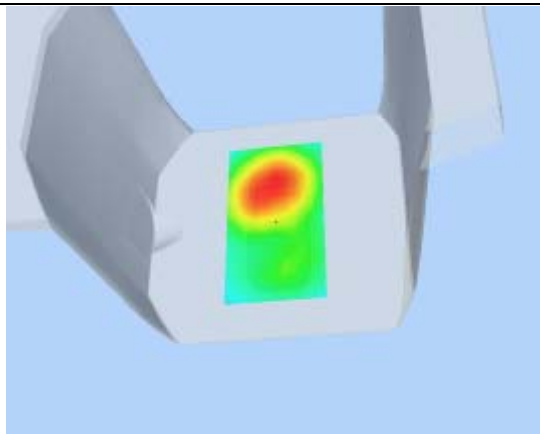

**Hot spot position**

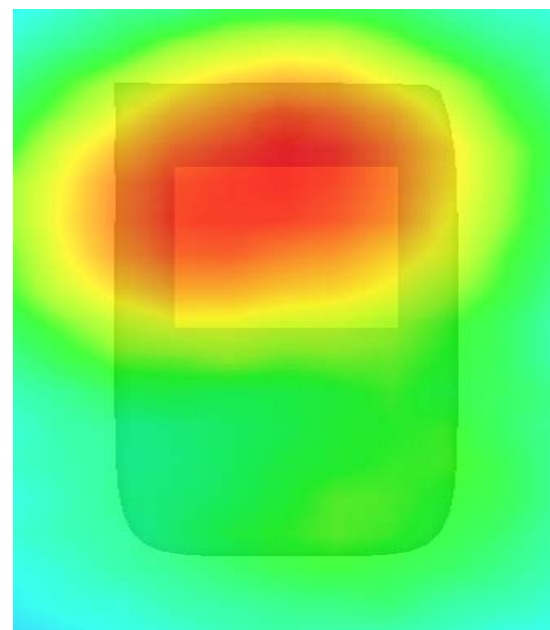

## MEASUREMENT 22

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	GSM

### B. SAR Measurement Results

Lower Band SAR (Channel 512):

<b>Frequency (MHz)</b>	1850.200000
<b>Relative permittivity (real part)</b>	52.540001
<b>Relative permittivity</b>	14.070000
<b>Conductivity (S/m)</b>	1.469533
<b>Power drift (%)</b>	-1.420000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:8

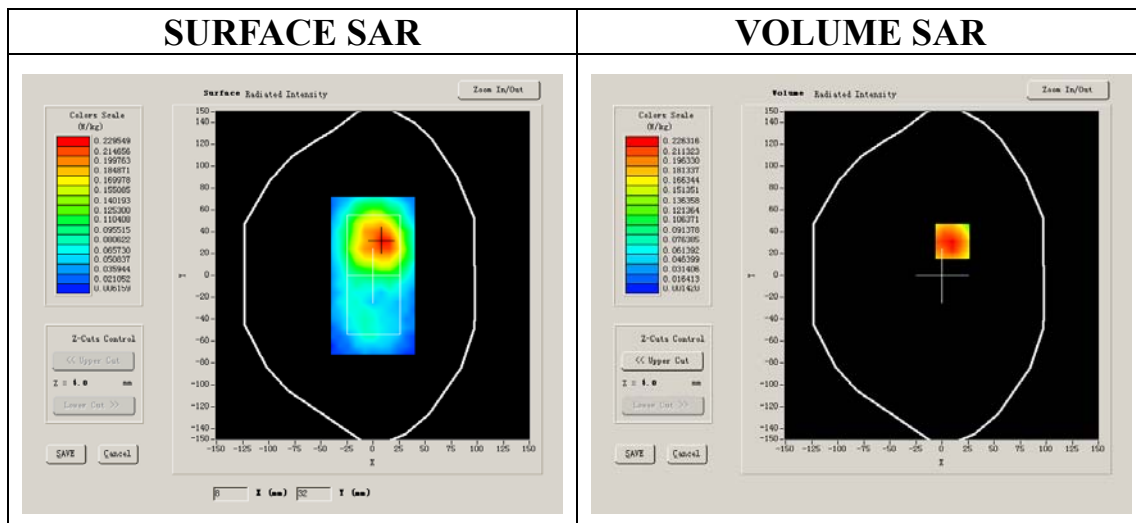


**Maximum location: X=10.00, Y=31.00**

<b>SAR 10g (W/Kg)</b>	0.119680
<b>SAR 1g (W/Kg)</b>	0.223116


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.2316	0.1126	0.0528	0.0237	0.0120	0.0068


**SAR, Z Axis Scan (X = 10, Y = 31)**

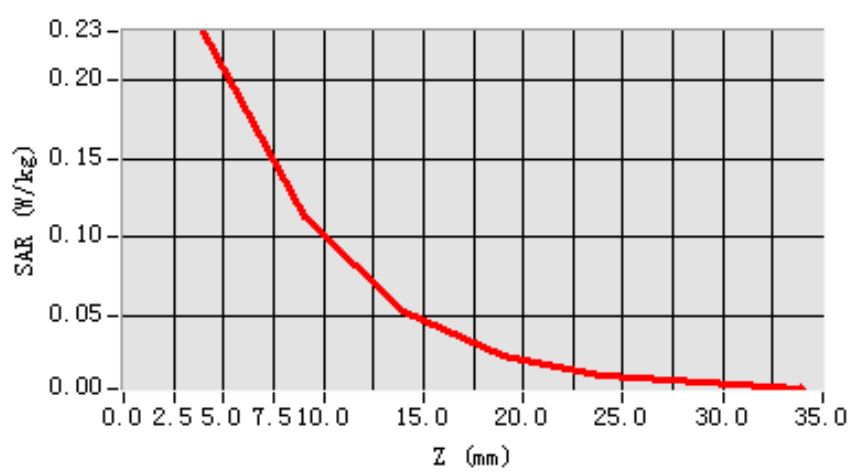

**3D scen shot**

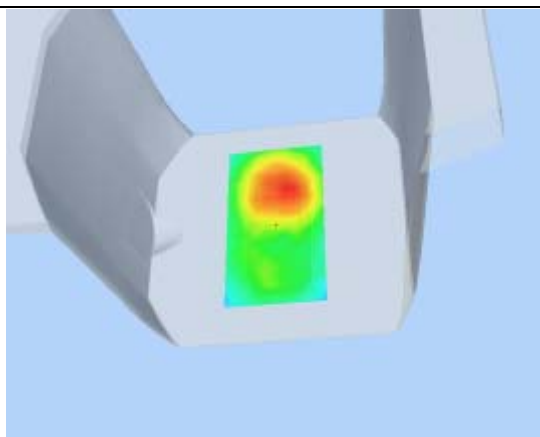

**Hot spot position**

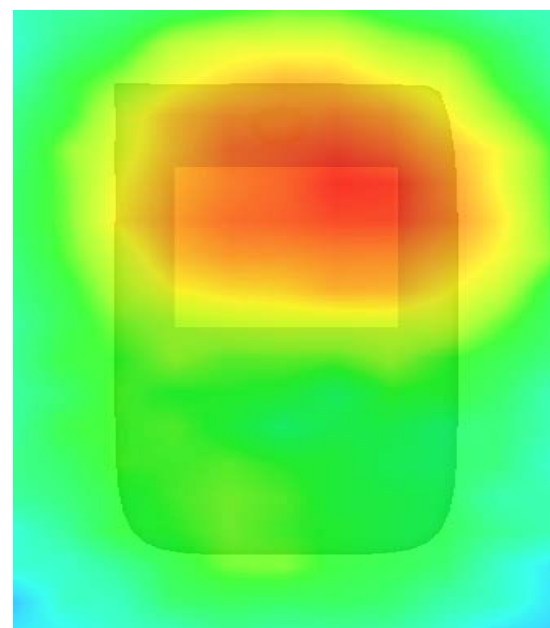

## MEASUREMENT 23

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	GPRS

### B. SAR Measurement Results

Lower Band SAR (Channel 512):

<b>Frequency (MHz)</b>	1850.200000
<b>Relative permittivity (real part)</b>	52.540001
<b>Relative permittivity</b>	14.070000
<b>Conductivity (S/m)</b>	1.446240
<b>Power drift (%)</b>	-2.890000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:2

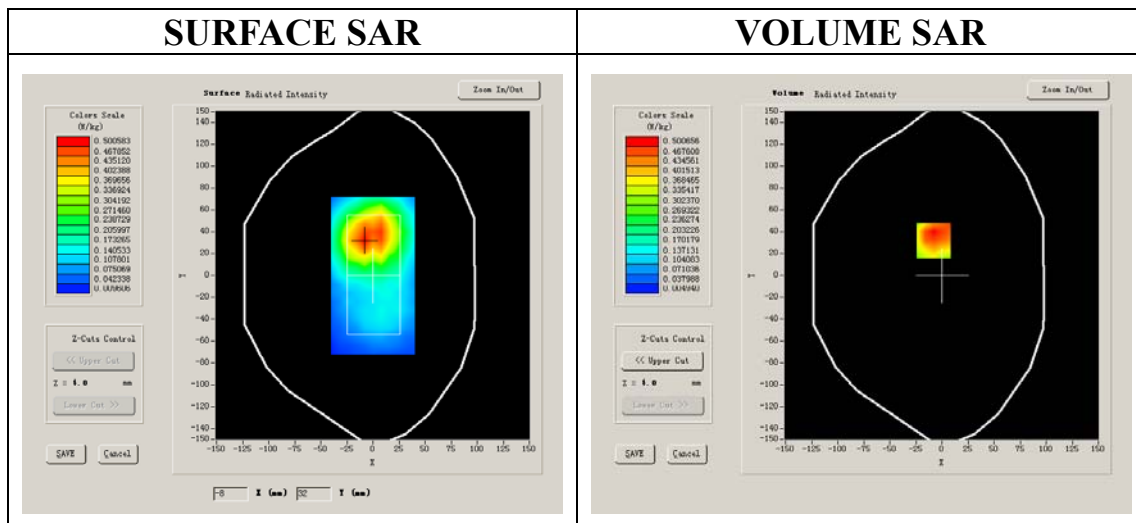


**Maximum location: X=-8.00, Y=32.00**

<b>SAR 10g (W/Kg)</b>	0.279633
<b>SAR 1g (W/Kg)</b>	0.527061


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.5051	0.2582	0.1224	0.0651	0.0315	0.0215


**SAR, Z Axis Scan (X = -8, Y = 32)**

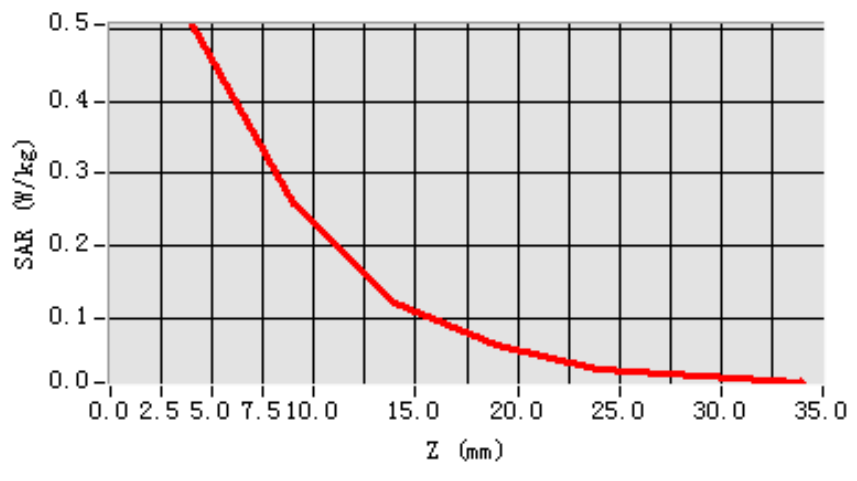

**3D seen shot**

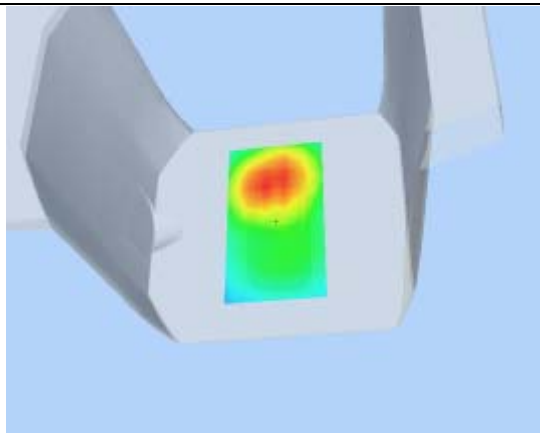

**Hot spot position**

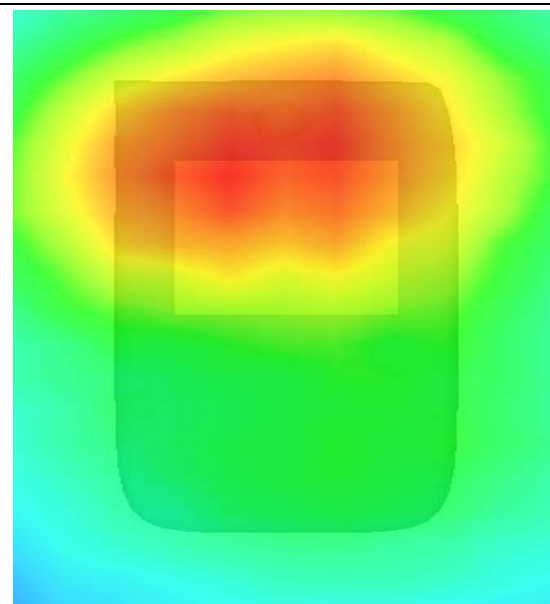



## MEASUREMENT 24

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	GPRS

### B. SAR Measurement Results

Lower Band SAR (Channel 512):

<b>Frequency (MHz)</b>	1850.200000
<b>Relative permittivity (real part)</b>	52.540001
<b>Relative permittivity</b>	14.070000
<b>Conductivity (S/m)</b>	1.469533
<b>Power drift (%)</b>	-1.260000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:2


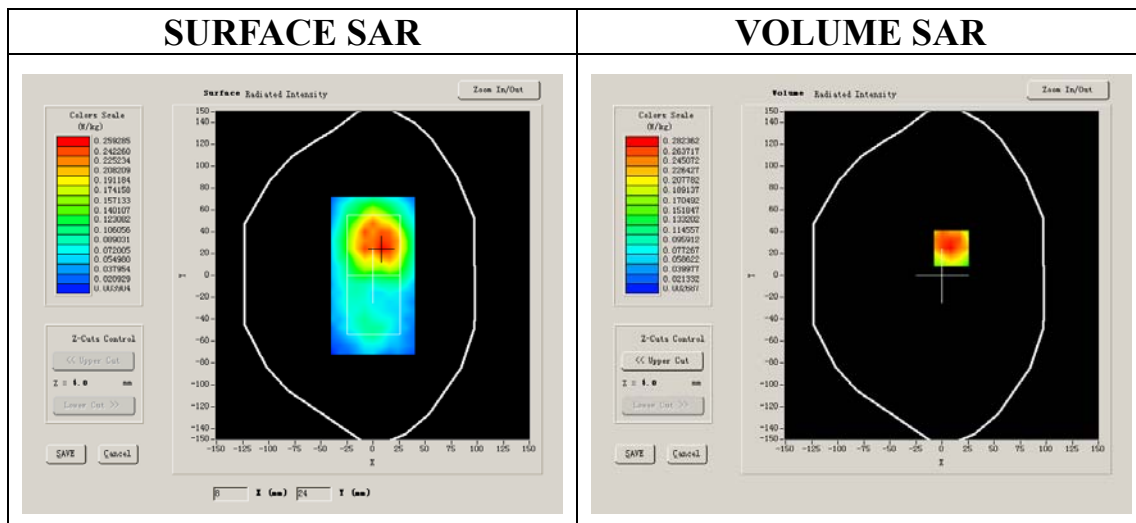


Maximum location: X=9.00, Y=25.00

SAR 10g (W/Kg)	0.149459
SAR 1g (W/Kg)	0.284037

**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.2889	0.1392	0.0564	0.0373	0.0167	0.0050

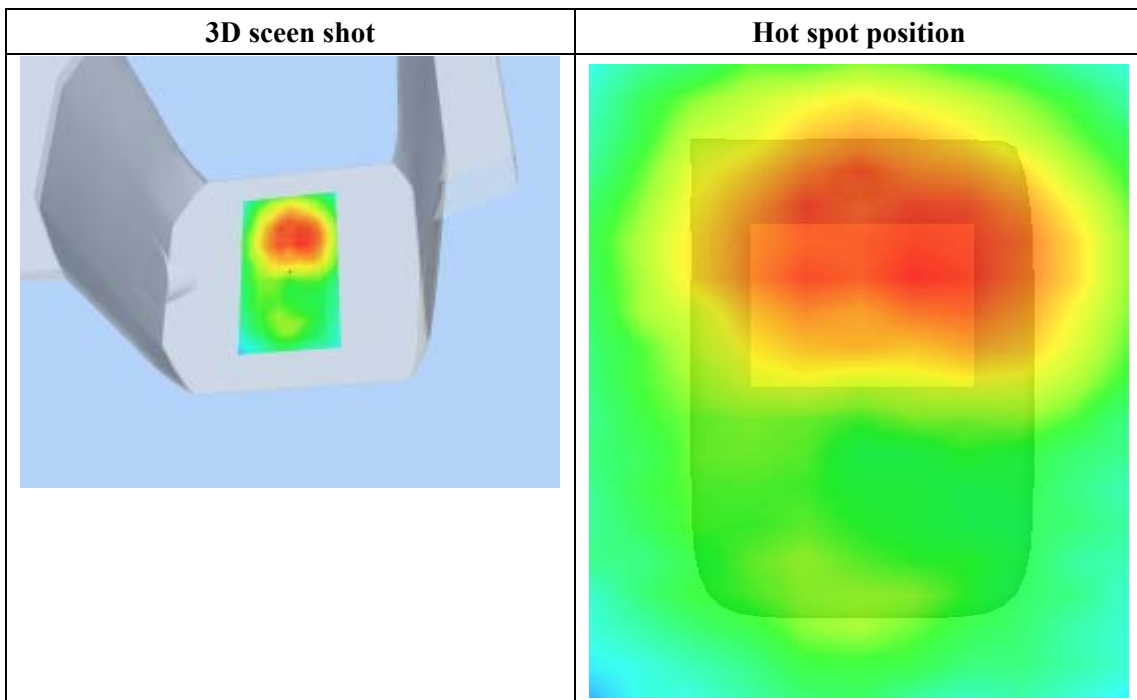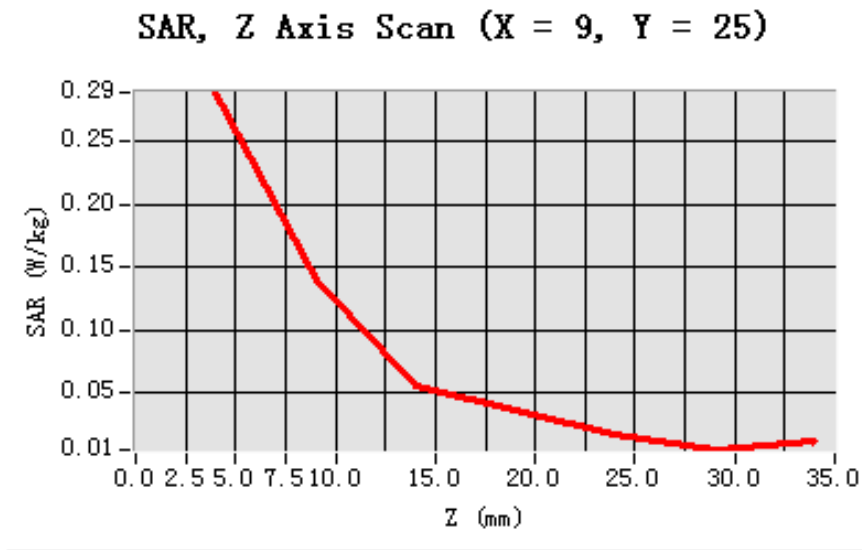

## MEASUREMENT 25

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	GPRS

### B. SAR Measurement Results

Lower Band SAR (Channel 512):

<b>Frequency (MHz)</b>	1850.200000
<b>Relative permittivity (real part)</b>	52.540001
<b>Relative permittivity</b>	14.070000
<b>Conductivity (S/m)</b>	1.469533
<b>Power drift (%)</b>	-5.260000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:2

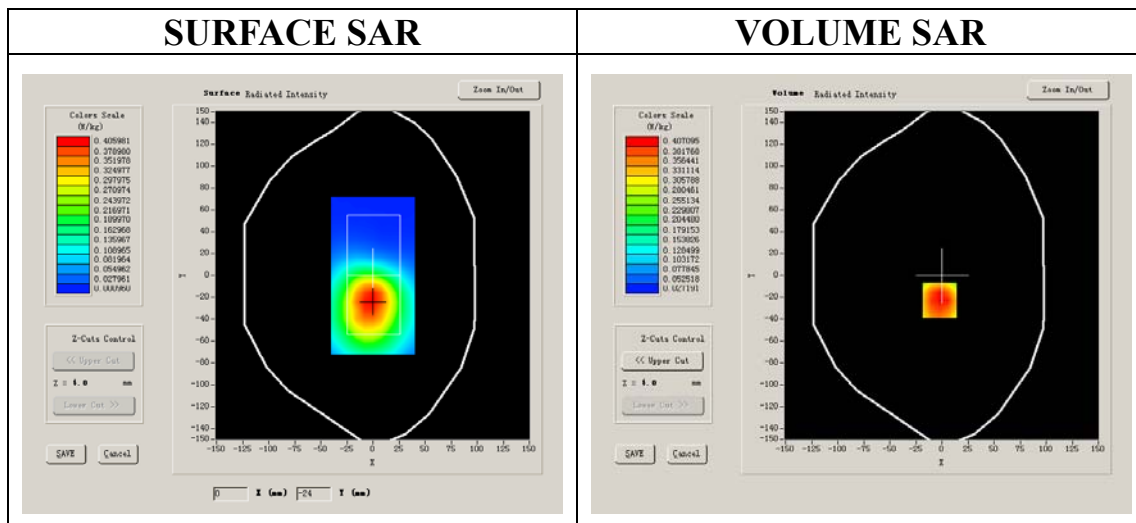


**Maximum location: X=-2.00, Y=-23.00**

<b>SAR 10g (W/Kg)</b>	0.300793
<b>SAR 1g (W/Kg)</b>	0.451556


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.4622	0.3228	0.2248	0.1616	0.1102	0.0775


**SAR, Z Axis Scan (X = -2, Y = -23)**

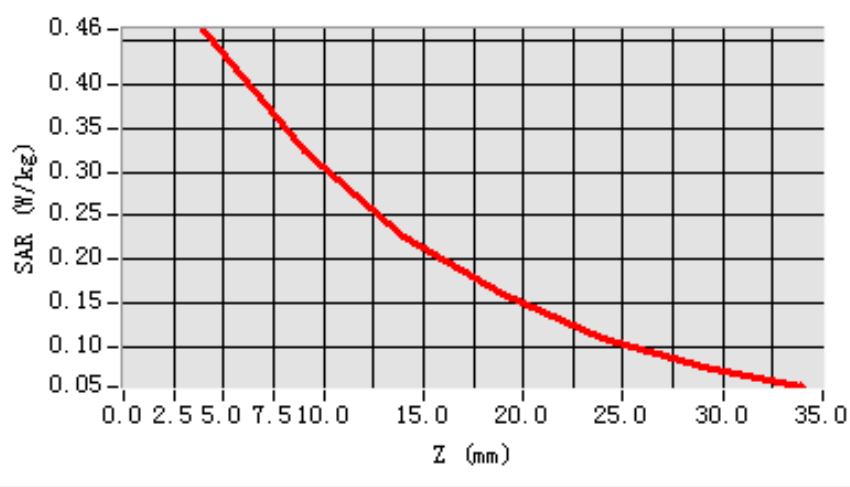

**3D scen shot**

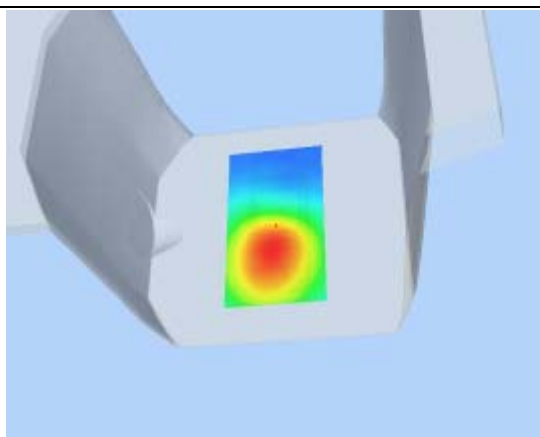

**Hot spot position**

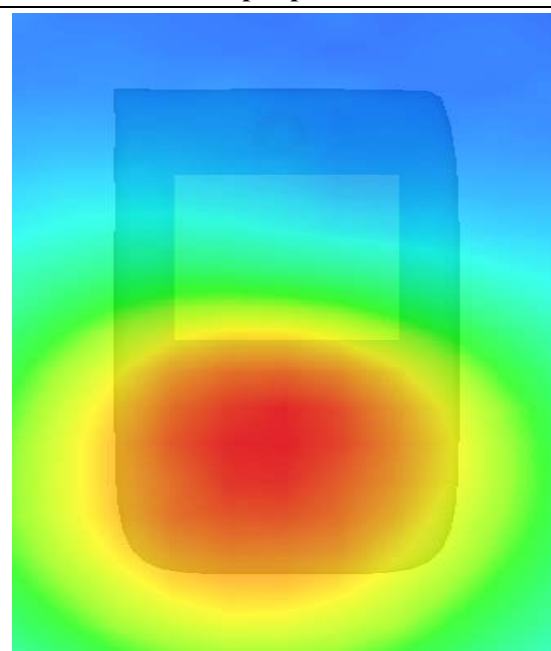

## MEASUREMENT 26

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	GPRS

### B. SAR Measurement Results

Lower Band SAR (Channel 512):

<b>Frequency (MHz)</b>	1850.200000
<b>Relative permittivity (real part)</b>	52.540001
<b>Relative permittivity</b>	14.070000
<b>Conductivity (S/m)</b>	1.469533
<b>Power drift (%)</b>	-5.260000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:2

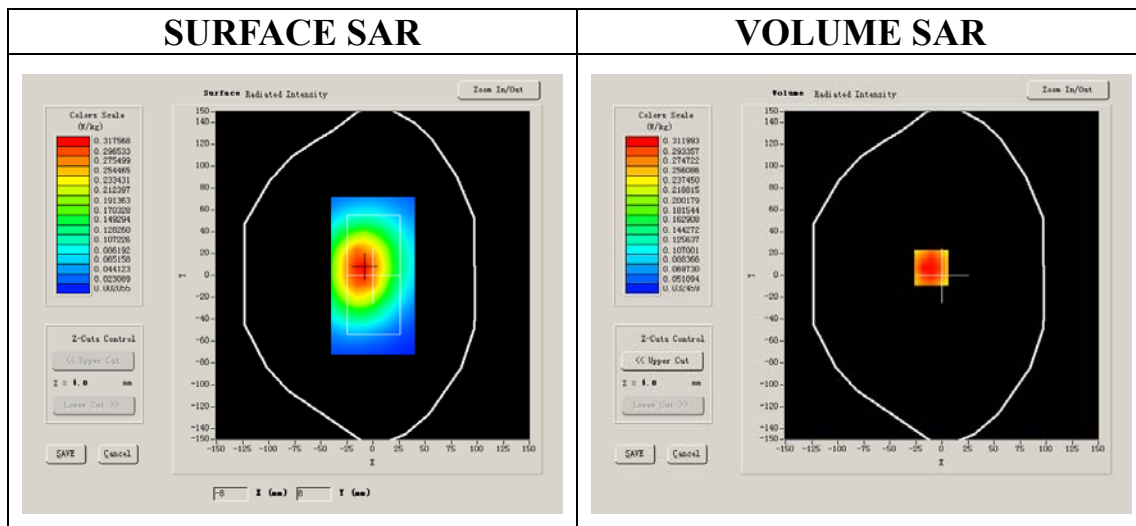



**Maximum location: X=-10.00, Y=7.00**

<b>SAR 10g (W/Kg)</b>	0.236199
<b>SAR 1g (W/Kg)</b>	0.343479

**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.3515	0.2531	0.1773	0.1306	0.0936	0.0686

**SAR, Z Axis Scan (X = -10, Y = 7)**

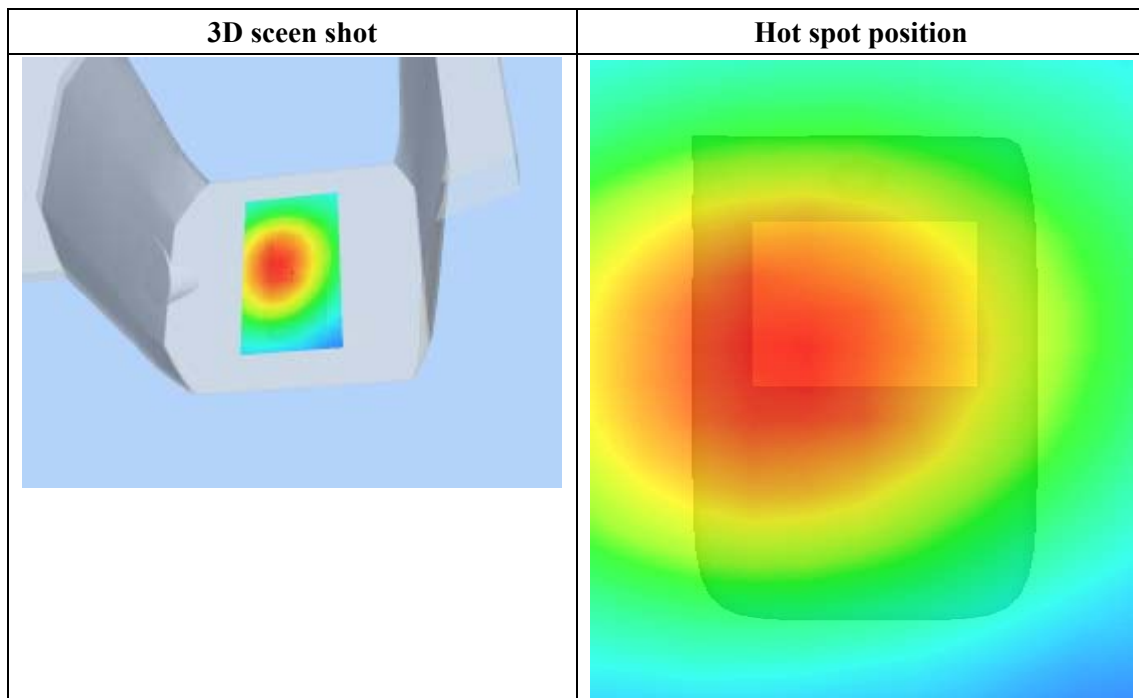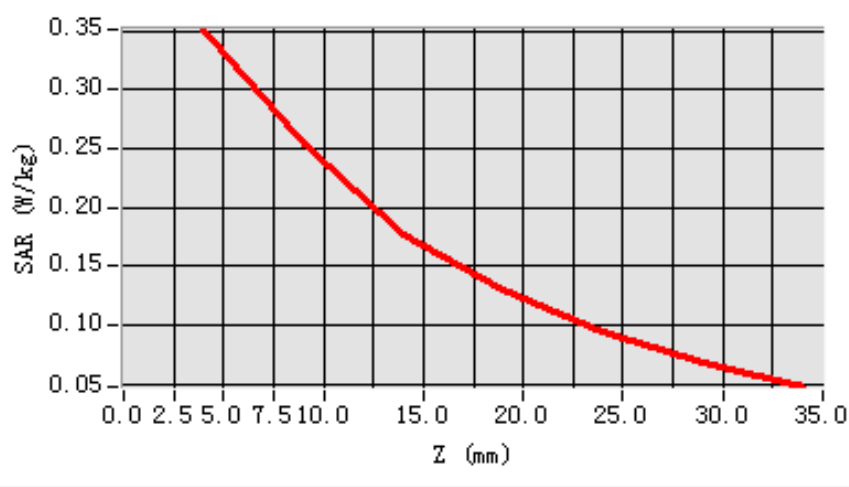

## MEASUREMENT 27

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	GPRS

### B. SAR Measurement Results


Lower Band SAR (Channel 512):

<b>Frequency (MHz)</b>	1850.200000
<b>Relative permittivity (real part)</b>	52.540001
<b>Relative permittivity</b>	14.070000
<b>Conductivity (S/m)</b>	1.469533
<b>Power drift (%)</b>	-1.260000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:2

#### SURFACE SAR

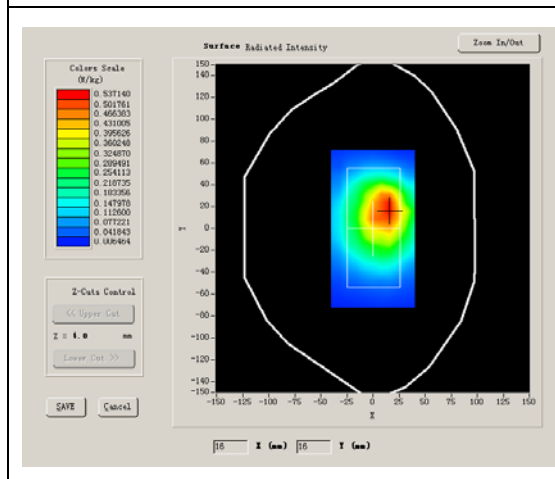

#### VOLUME SAR

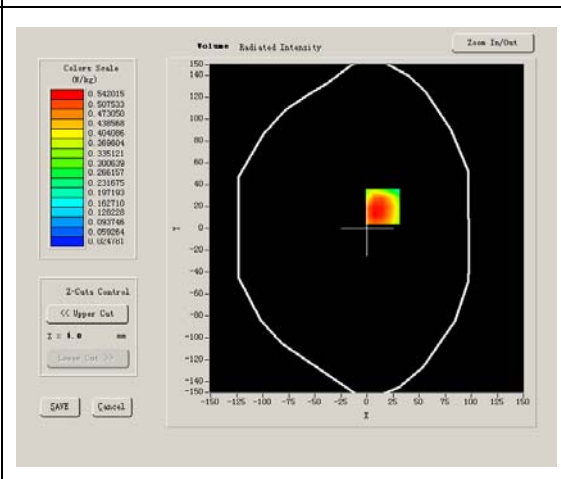


**Maximum location: X=15.00, Y=20.00**

<b>SAR 10g (W/Kg)</b>	0.382176
<b>SAR 1g (W/Kg)</b>	0.607994


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.6004	0.3849	0.2175	0.1662	0.1204	0.0723


**SAR, Z Axis Scan (X = 15, Y = 20)**

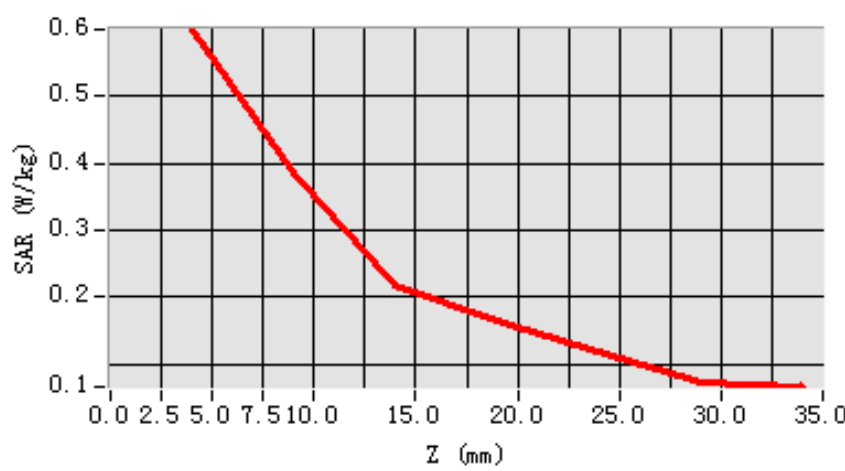

**3D scen shot**

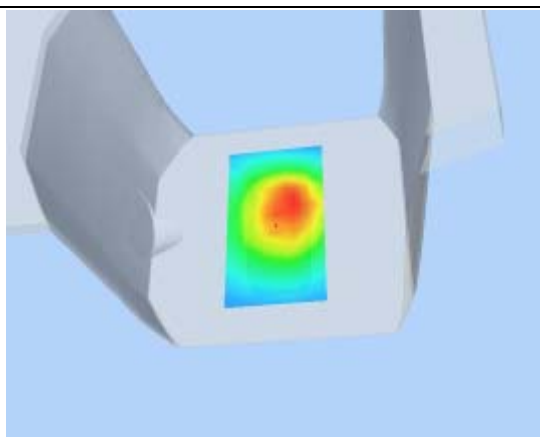

**Hot spot position**

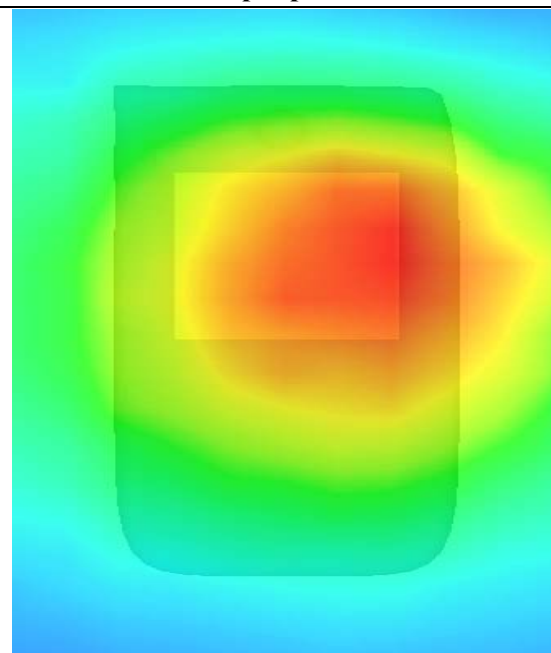



## MEASUREMENT 28

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 9 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	EDGE

### B. SAR Measurement Results

Lower Band SAR (Channel 512):

<b>Frequency (MHz)</b>	1850.200000
<b>Relative permittivity (real part)</b>	52.540001
<b>Relative permittivity</b>	14.070000
<b>Conductivity (S/m)</b>	1.469533
<b>Power drift (%)</b>	-1.040000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:2

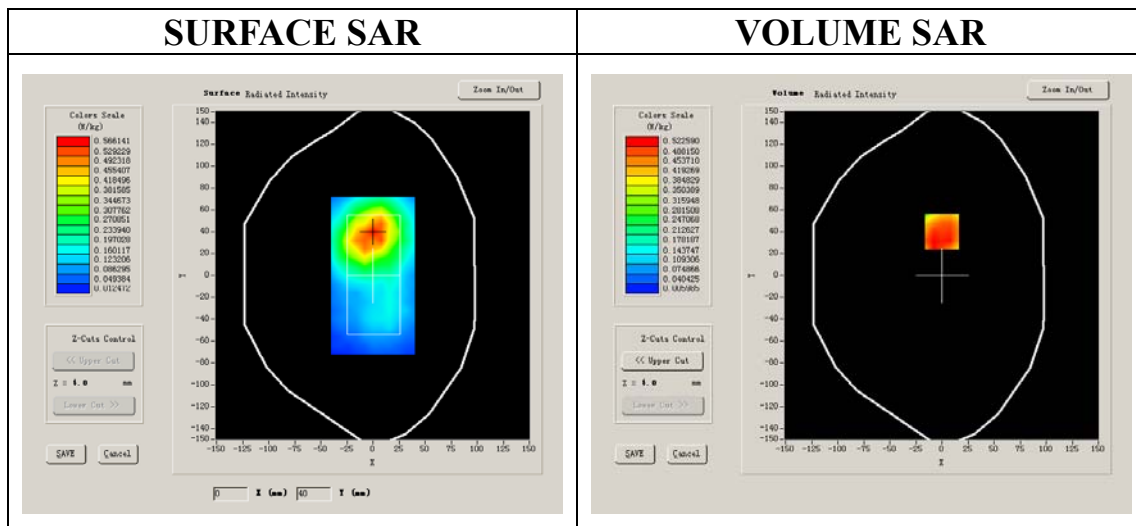


**Maximum location: X=0.00, Y=40.00**

<b>SAR 10g (W/Kg)</b>	0.282900
<b>SAR 1g (W/Kg)</b>	0.512539


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.5046	0.2445	0.1242	0.0585	0.0359	0.0150


**SAR, Z Axis Scan (X = 0, Y = 40)**

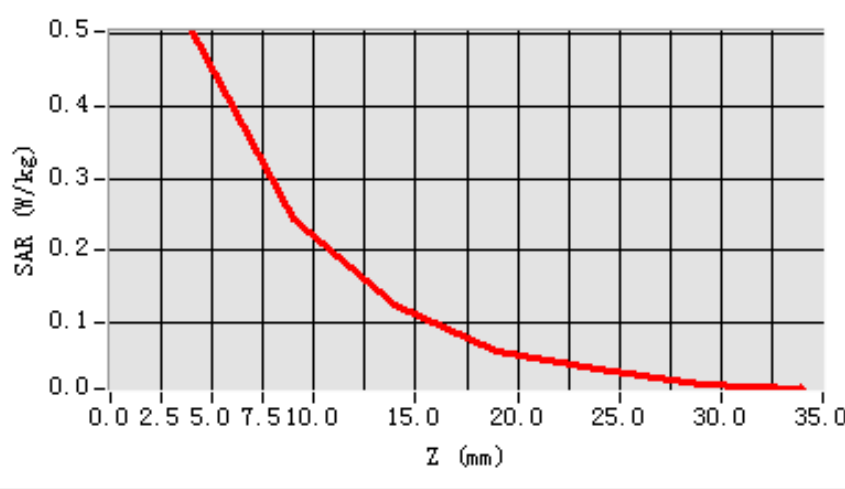

**3D scen shot**

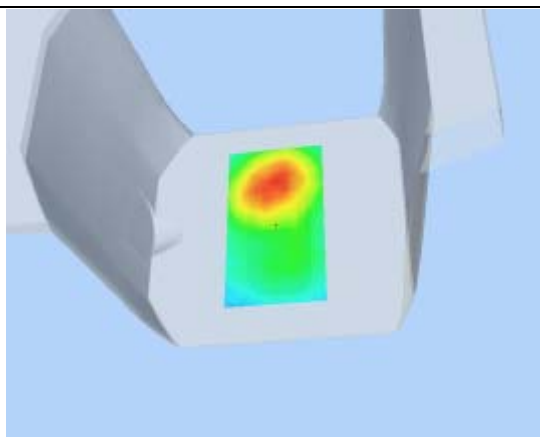

**Hot spot position**

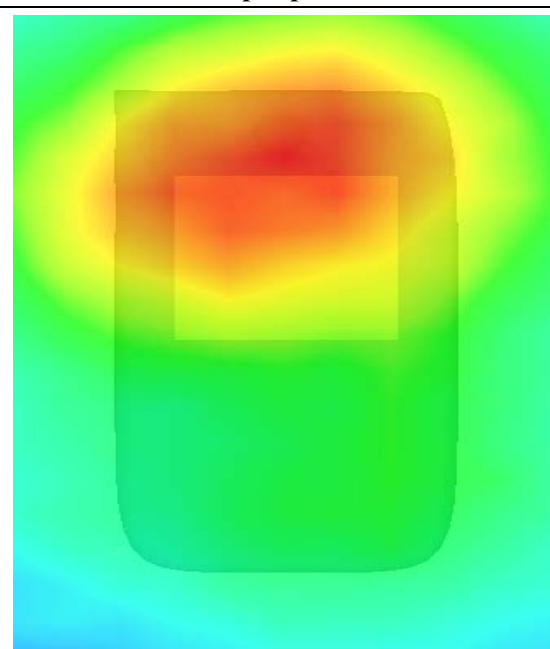

## MEASUREMENT 29

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 8 minutes 1 seconds

### A. Experimental conditions.


<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	WCDMA850
<b>Channels</b>	Middle
<b>Signal</b>	CDMA

### B. SAR Measurement Results


Middle Band SAR (Channel 4182):

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	39.910000
<b>Relative permittivity</b>	13.230000
<b>Conductivity (S/m)</b>	0.614460
<b>Power drift (%)</b>	-1.700000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.479,25.214,27.196
<b>Crest factor:</b>	1:1

#### SURFACE SAR

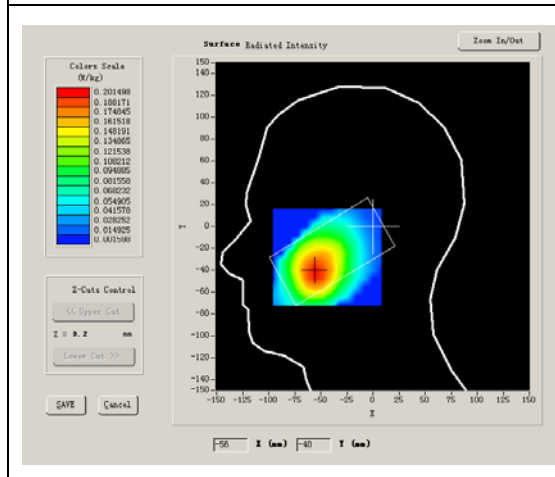

#### VOLUME SAR

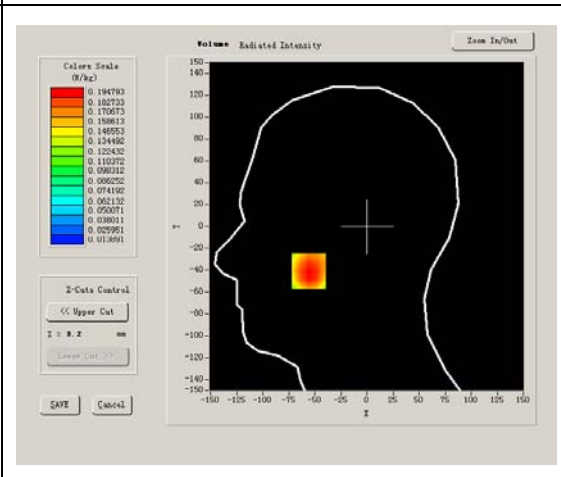


**Maximum location: X=-56.00, Y=-41.00**

<b>SAR 10g (W/Kg)</b>	0.130963
<b>SAR 1g (W/Kg)</b>	0.189440


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.1948	0.1461	0.1020	0.0728	0.0525	0.0370


**SAR, Z Axis Scan (X = -56, Y = -41)**

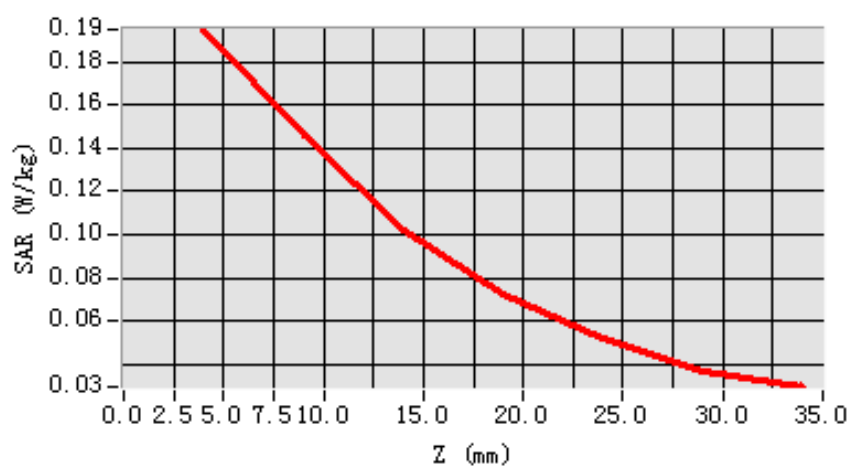

**3D scen shot**

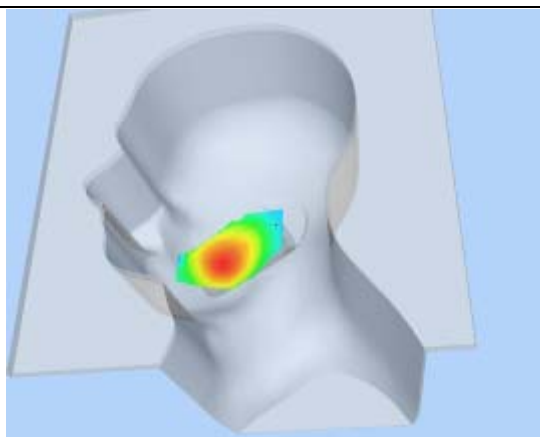

**Hot spot position**

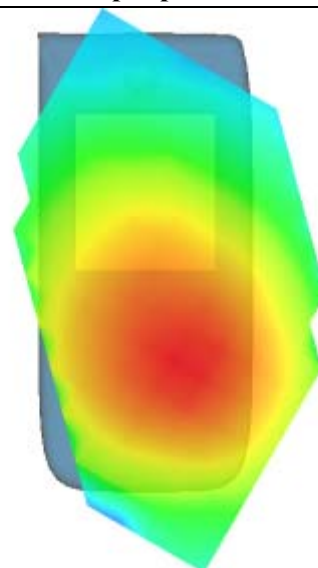

## MEASUREMENT 30

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 7 minutes 39 seconds


### A. Experimental conditions.

<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Tilt
<b>Band</b>	WCDMA850
<b>Channels</b>	Middle
<b>Signal</b>	CDMA

### B. SAR Measurement Results

Middle Band SAR (Channel 4182):

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	39.910000
<b>Relative permittivity</b>	13.230000
<b>Conductivity (S/m)</b>	0.614460
<b>Power drift (%)</b>	1.660000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.479,25.214,27.196
<b>Crest factor:</b>	1:1

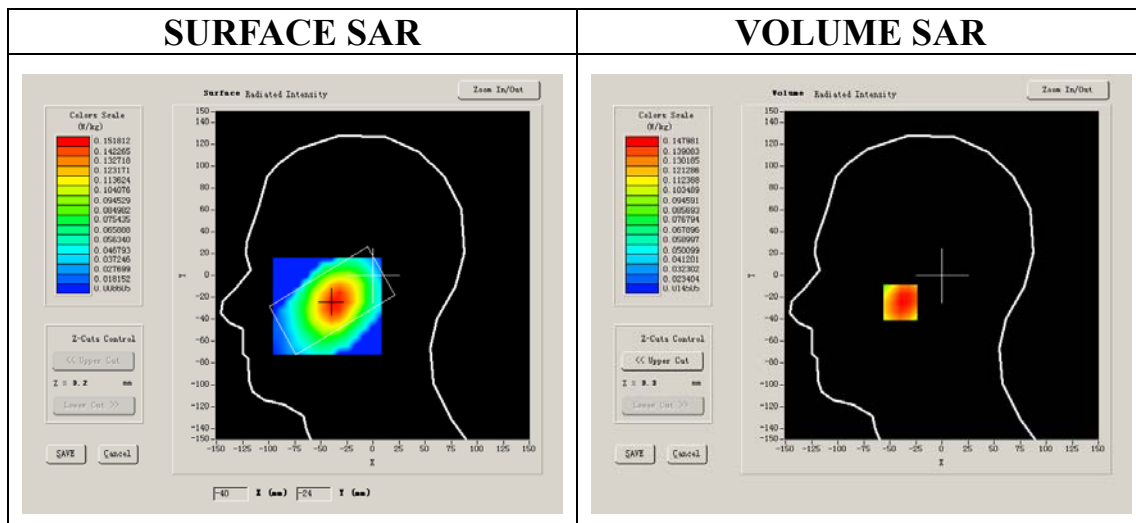


**Maximum location: X=-39.00, Y=-25.00**

<b>SAR 10g (W/Kg)</b>	0.105193
<b>SAR 1g (W/Kg)</b>	0.146888


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>0.1480</b>	<b>0.1193</b>	<b>0.0890</b>	<b>0.0656</b>	<b>0.0471</b>	<b>0.0328</b>


**SAR, Z Axis Scan (X = -39, Y = -25)**

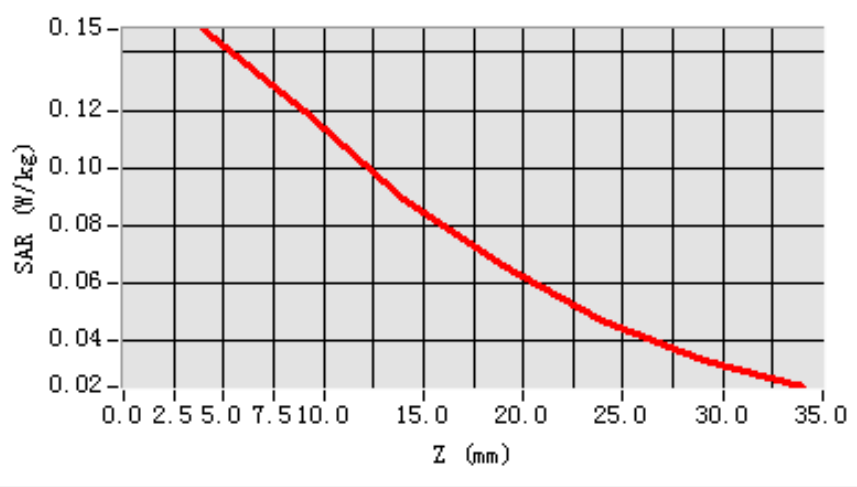

**3D scen shot**

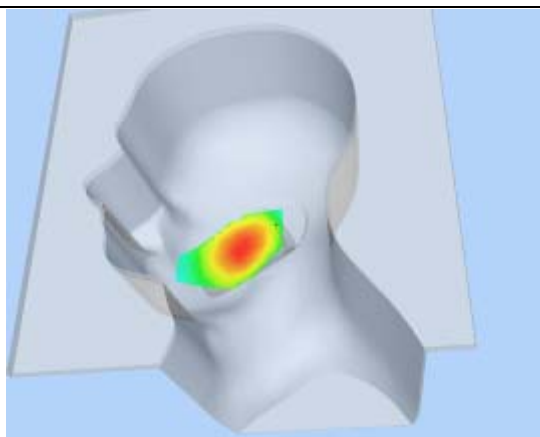

**Hot spot position**

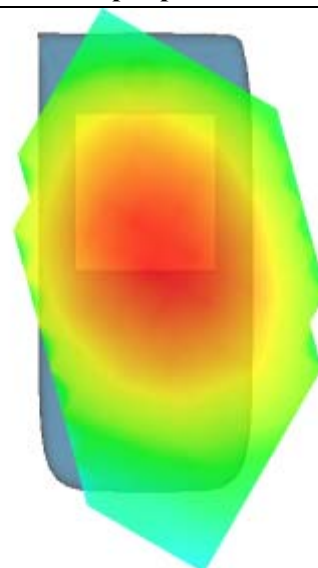

# MEASUREMENT 31

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 7 minutes 58 seconds

## A. Experimental conditions.


<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	WCDMA850
<b>Channels</b>	Middle
<b>Signal</b>	CDMA

## B. SAR Measurement Results


Middle Band SAR (Channel 4182):

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	39.910000
<b>Relative permittivity</b>	13.230000
<b>Conductivity (S/m)</b>	0.614460
<b>Power drift (%)</b>	-1.090000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.136,34.843,38.721
<b>Crest factor:</b>	1:1

### SURFACE SAR

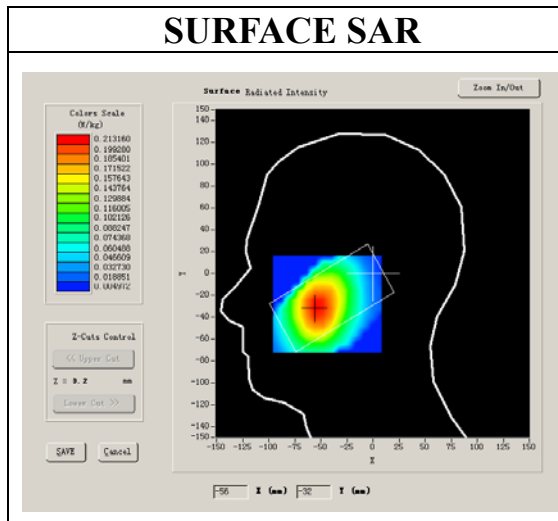

### VOLUME SAR

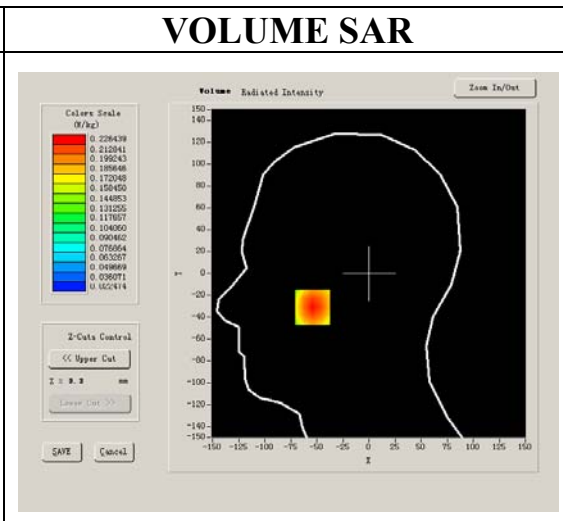


**Maximum location: X=-54.00, Y=-31.00**

<b>SAR 10g (W/Kg)</b>	0.149827
<b>SAR 1g (W/Kg)</b>	0.217548


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>0.2264</b>	<b>0.1584</b>	<b>0.1152</b>	<b>0.0883</b>	<b>0.0605</b>	<b>0.0459</b>


**SAR, Z Axis Scan (X = -54, Y = -31)**

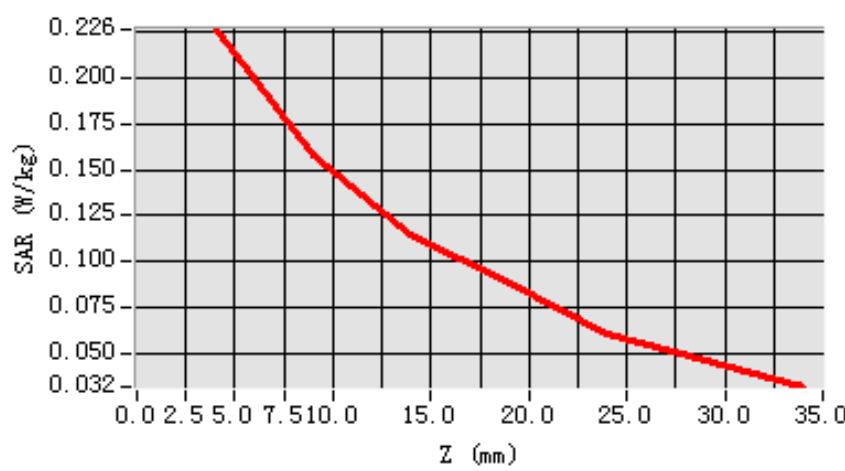

**3D scen shot**

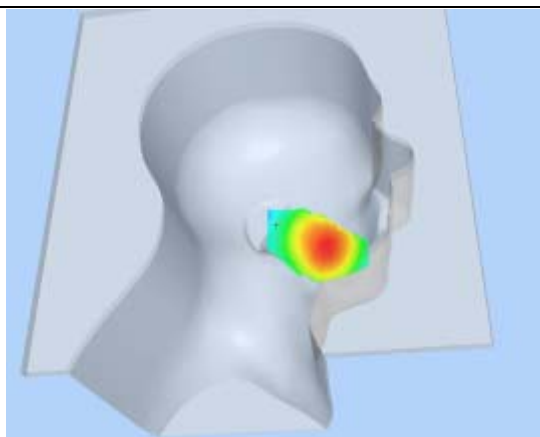

**Hot spot position**

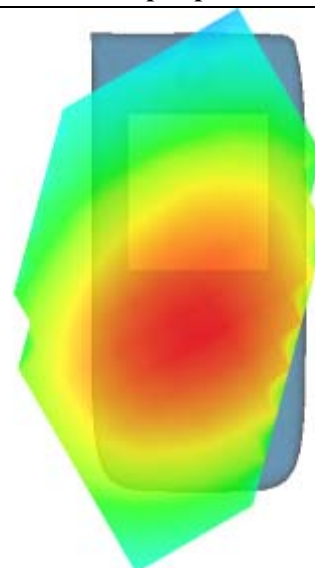



## MEASUREMENT 32

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 7 minutes 36 seconds


### A. Experimental conditions.

<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Tilt
<b>Band</b>	WCDMA850
<b>Channels</b>	Middle
<b>Signal</b>	CDMA

### B. SAR Measurement Results

Middle Band SAR (Channel 4182):

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	39.910000
<b>Relative permittivity</b>	13.230000
<b>Conductivity (S/m)</b>	0.614460
<b>Power drift (%)</b>	0.150000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.479,25.214,27.196
<b>Crest factor:</b>	1:1

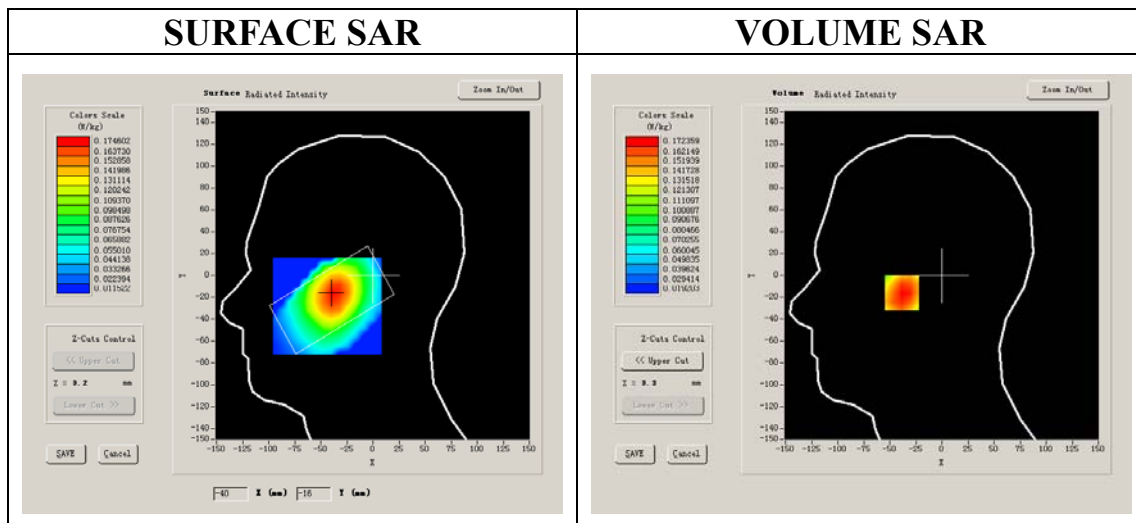


**Maximum location: X=-38.00, Y=-16.00**

<b>SAR 10g (W/Kg)</b>	0.120489
<b>SAR 1g (W/Kg)</b>	0.168095


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.1724	0.1298	0.1020	0.0751	0.0592	0.0437


**SAR, Z Axis Scan (X = -38, Y = -16)**

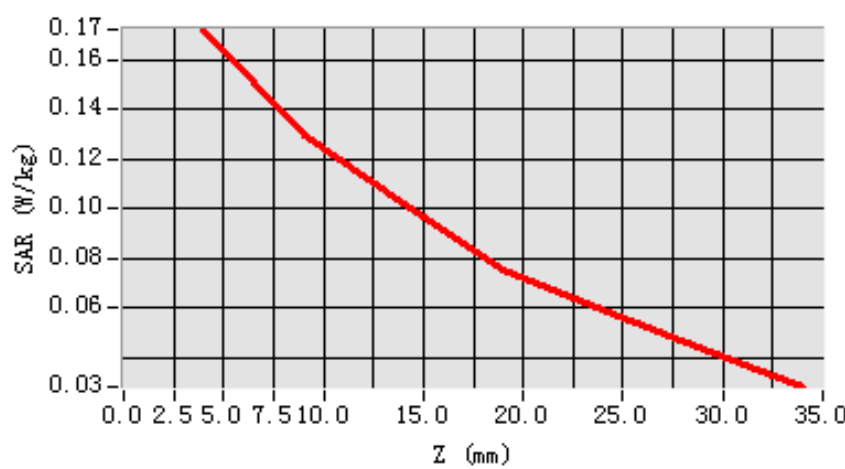

**3D scen shot**

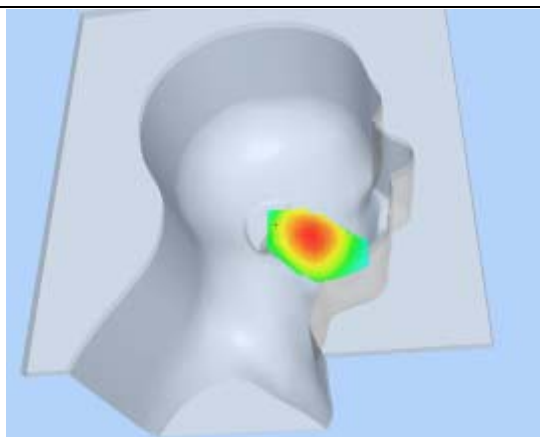

**Hot spot position**

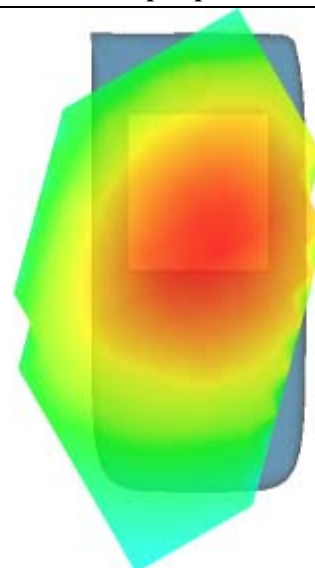

## MEASUREMENT 33

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 8 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	WCDMA850
<b>Channels</b>	Middle
<b>Signal</b>	CDMA

### B. SAR Measurement Results


Middle Band SAR (Channel 4182):

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	51.341000
<b>Relative permittivity</b>	15.877050
<b>Conductivity (S/m)</b>	0.737401
<b>Power drift (%)</b>	0.410000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559,25.681,27.588
<b>Crest factor:</b>	1:1

#### SURFACE SAR

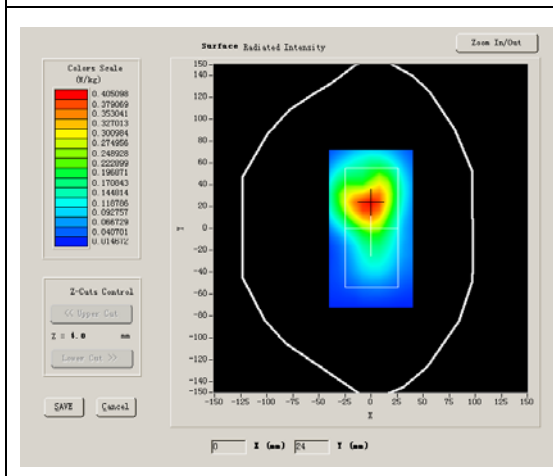

#### VOLUME SAR

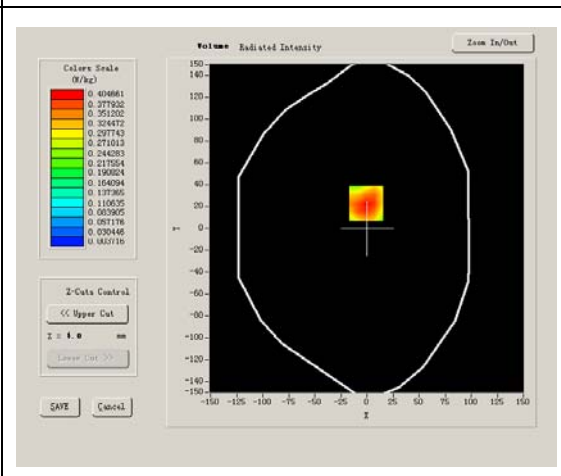


**Maximum location: X=-1.00, Y=23.00**

<b>SAR 10g (W/Kg)</b>	0.212124
<b>SAR 1g (W/Kg)</b>	0.391650


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.4047	0.2018	0.0967	0.0484	0.0251	0.0120


**SAR, Z Axis Scan (X = -1, Y = 23)**

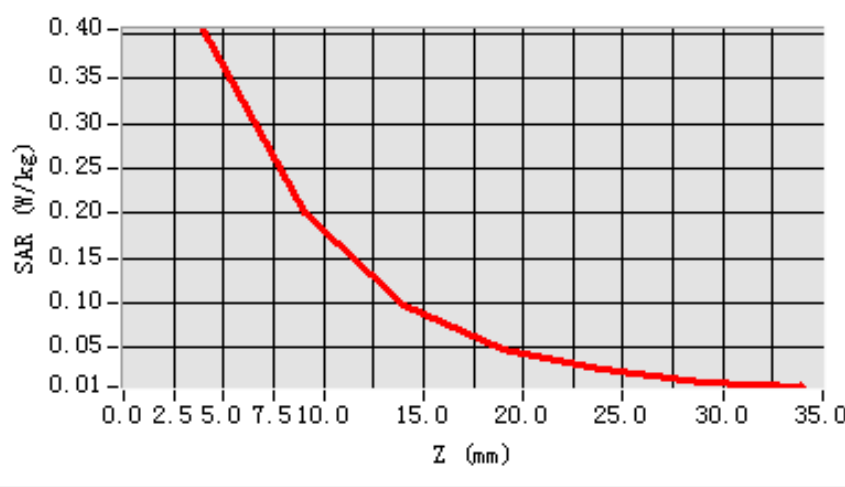

**3D scen shot**

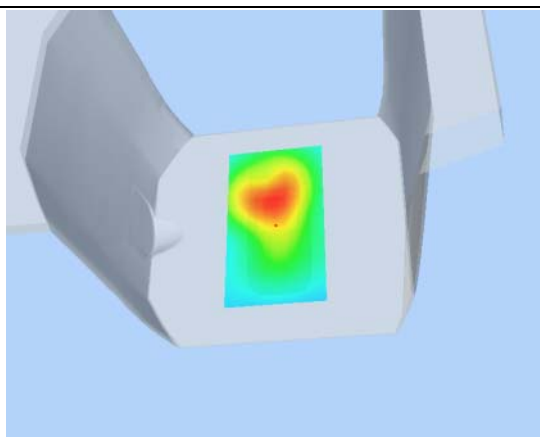

**Hot spot position**

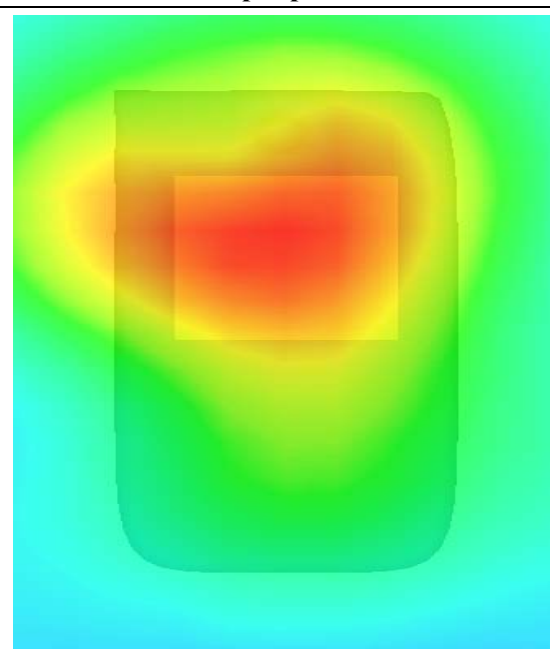

## MEASUREMENT 34

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 5 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	WCDMA850
<b>Channels</b>	Middle
<b>Signal</b>	CDMA

### B. SAR Measurement Results


Middle Band SAR (Channel 4182):

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	51.341000
<b>Relative permittivity</b>	15.877050
<b>Conductivity (S/m)</b>	0.737401
<b>Power drift (%)</b>	0.090000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559,25.681,27.588
<b>Crest factor:</b>	1:1

#### SURFACE SAR

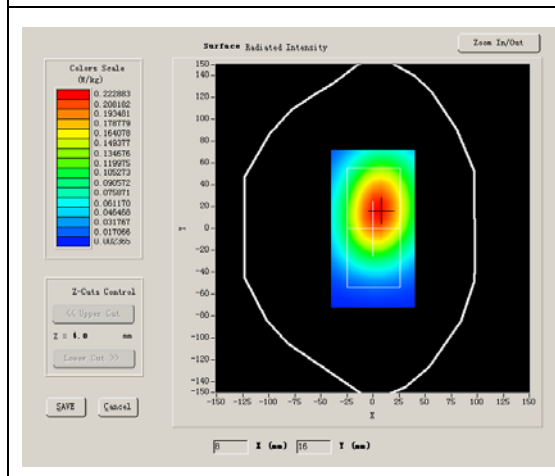

#### VOLUME SAR

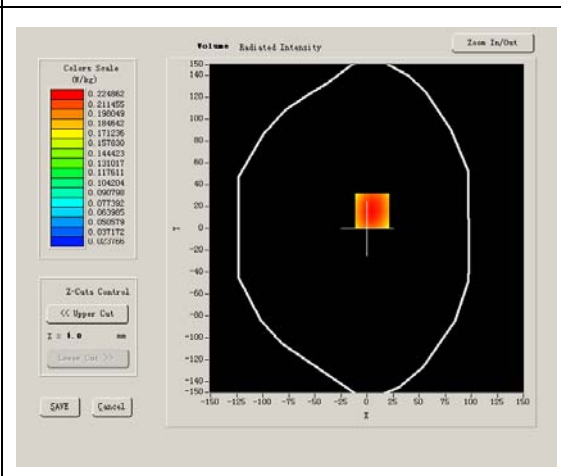


**Maximum location: X=5.00, Y=16.00**

<b>SAR 10g (W/Kg)</b>	0.182664
<b>SAR 1g (W/Kg)</b>	0.260227


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.2699	0.1959	0.1408	0.1011	0.0727	0.0522


**SAR, Z Axis Scan (X = 5, Y = 16)**

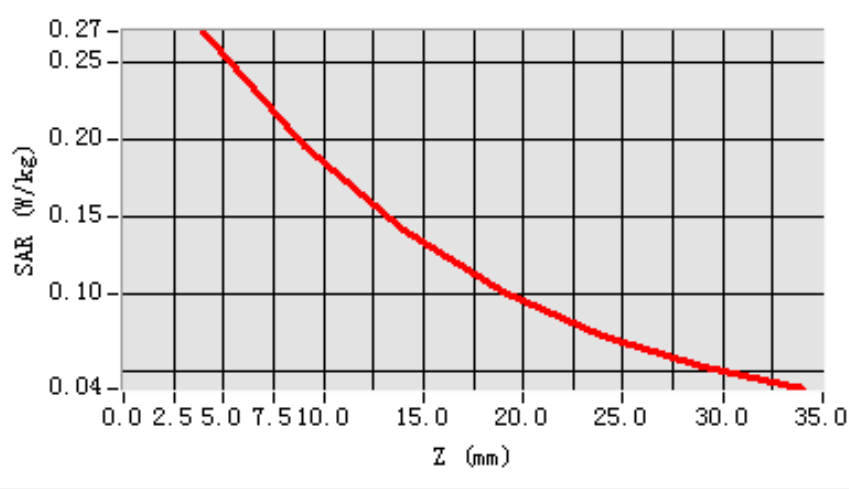

**3D scen shot**

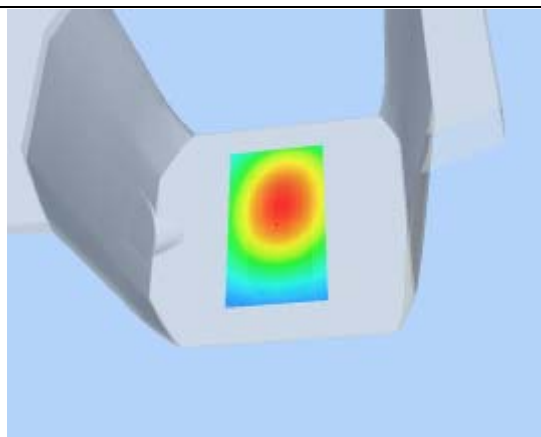

**Hot spot position**

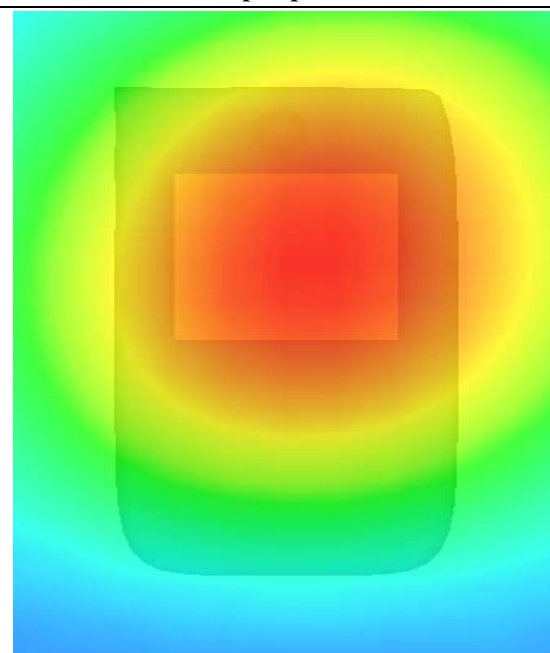

## MEASUREMENT 35

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 5 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	WCDMA850
<b>Channels</b>	Middle
<b>Signal</b>	CDMA

### B. SAR Measurement Results


Middle Band SAR (Channel 4182):

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	51.341000
<b>Relative permittivity</b>	15.877050
<b>Conductivity (S/m)</b>	0.737401
<b>Power drift (%)</b>	0.280000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559,25.681,27.588
<b>Crest factor:</b>	1:1

#### SURFACE SAR

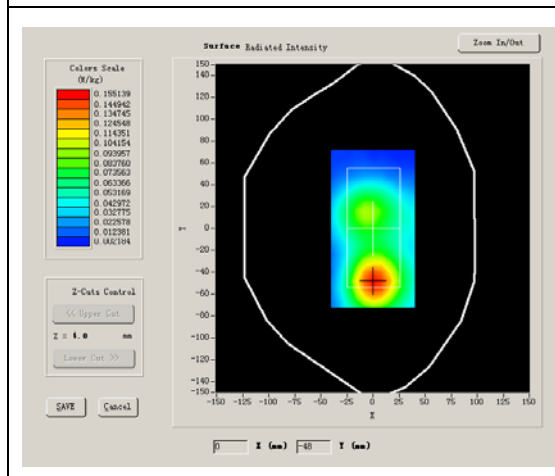

#### VOLUME SAR

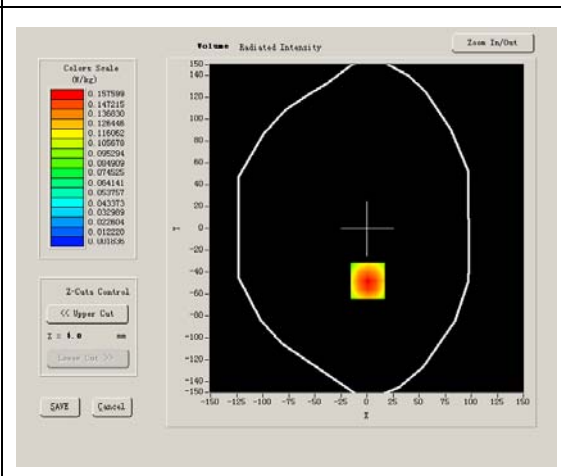


**Maximum location: X=1.00, Y=-48.00**

<b>SAR 10g (W/Kg)</b>	0.084342
<b>SAR 1g (W/Kg)</b>	0.155475


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.1613	0.0798	0.0412	0.0215	0.0112	0.0067


**SAR, Z Axis Scan (X = 1, Y = -48)**

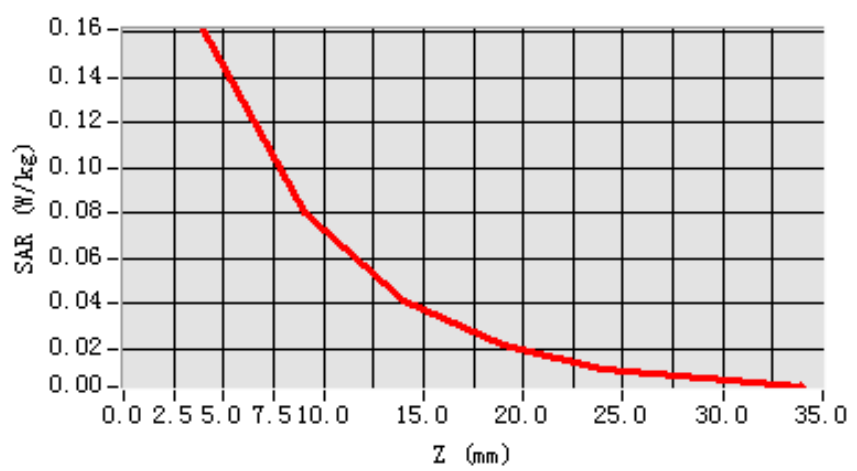

**3D scen shot**

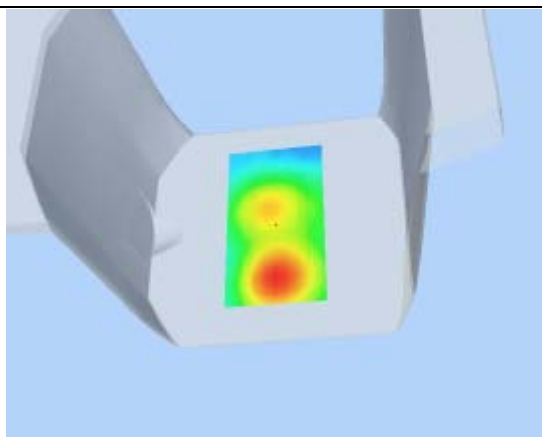

**Hot spot position**

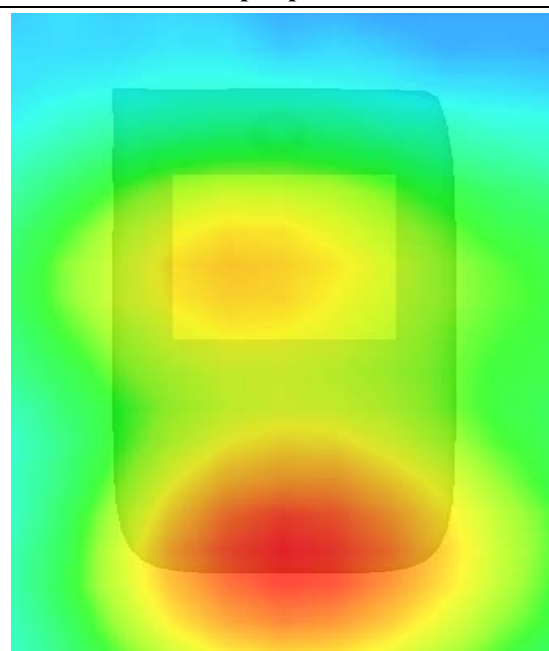



## MEASUREMENT 36

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 5 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	WCDMA850
<b>Channels</b>	Middle
<b>Signal</b>	CDMA

### B. SAR Measurement Results


Middle Band SAR (Channel 4182):

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	51.341000
<b>Relative permittivity</b>	15.877050
<b>Conductivity (S/m)</b>	0.737401
<b>Power drift (%)</b>	0.740000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559,25.681,27.588
<b>Crest factor:</b>	1:1

#### SURFACE SAR

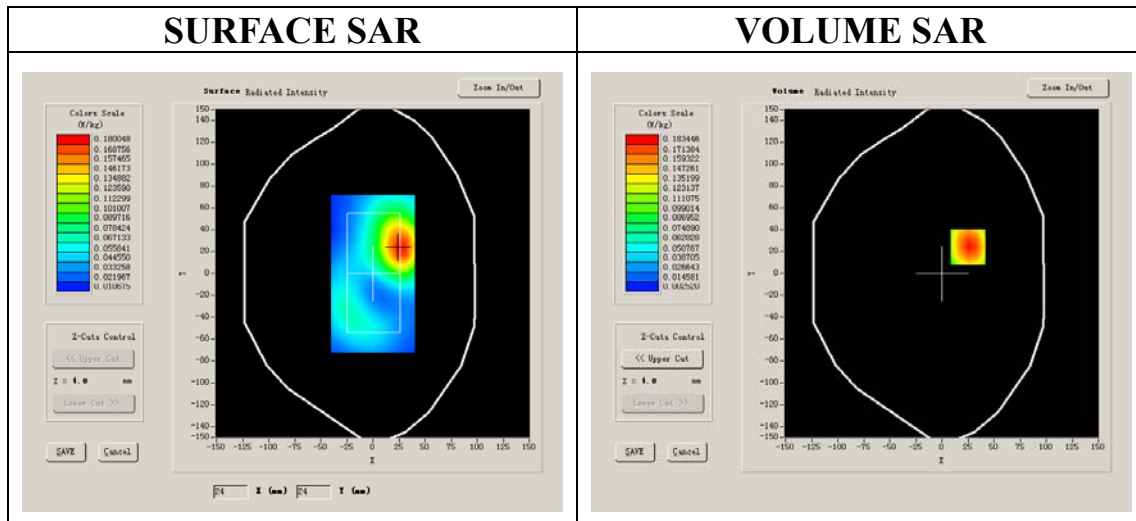

#### VOLUME SAR

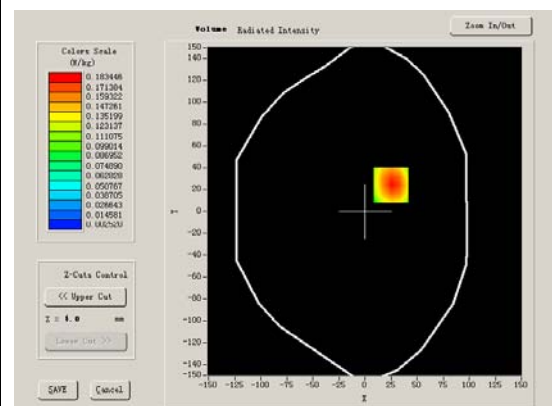


Maximum location: X=25.00, Y=24.00

SAR 10g (W/Kg)	0.104635
SAR 1g (W/Kg)	0.191565


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1998	0.1004	0.0532	0.0295	0.0153	0.0093


SAR, Z Axis Scan (X = 25, Y = 24)

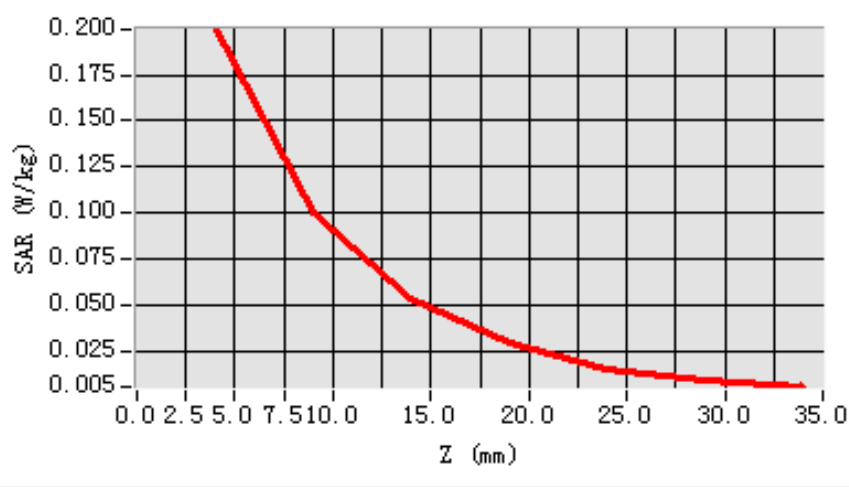

3D scen shot

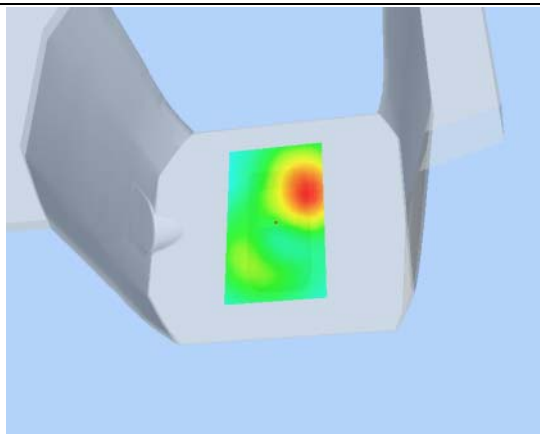

Hot spot position

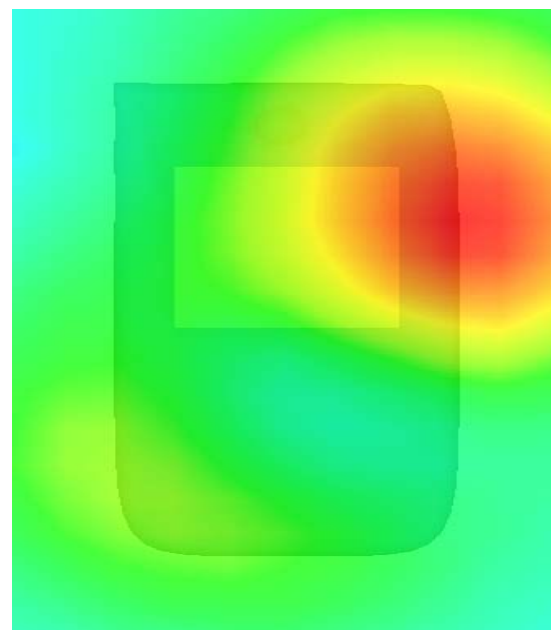

## MEASUREMENT 37

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 5 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	WCDMA850
<b>Channels</b>	Middle
<b>Signal</b>	CDMA

### B. SAR Measurement Results

Middle Band SAR (Channel 4182):

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	51.341000
<b>Relative permittivity</b>	15.877050
<b>Conductivity (S/m)</b>	0.737401
<b>Power drift (%)</b>	0.740000
<b>Ambient Temperature:</b>	22.5°C
<b>Liquid Temperature:</b>	22.8°C
<b>ConvF:</b>	28.559,25.681,27.588
<b>Crest factor:</b>	1:1

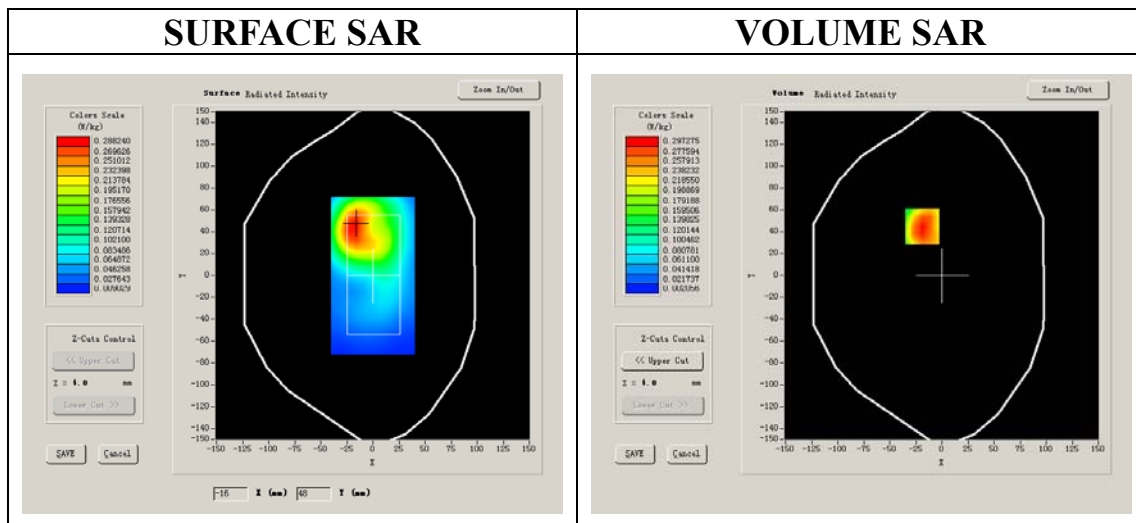


**Maximum location: X=-19.00, Y=45.00**

<b>SAR 10g (W/Kg)</b>	0.165473
<b>SAR 1g (W/Kg)</b>	0.311999


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.3237	0.1553	0.0743	0.0377	0.0187	0.0083


**SAR, Z Axis Scan (X = -19, Y = 45)**

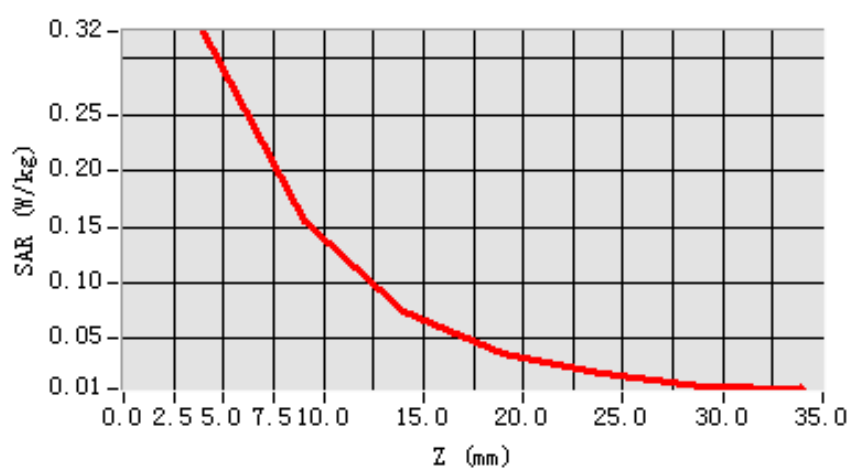

**3D scen shot**

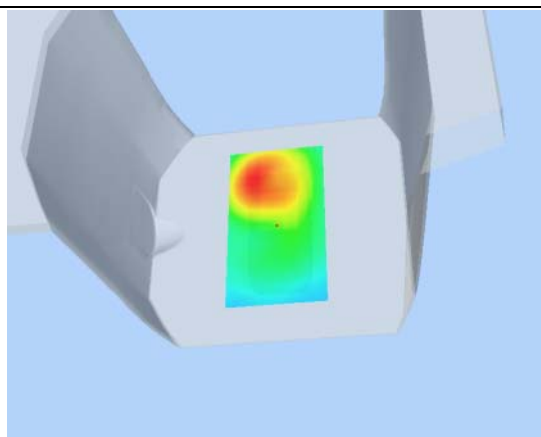

**Hot spot position**

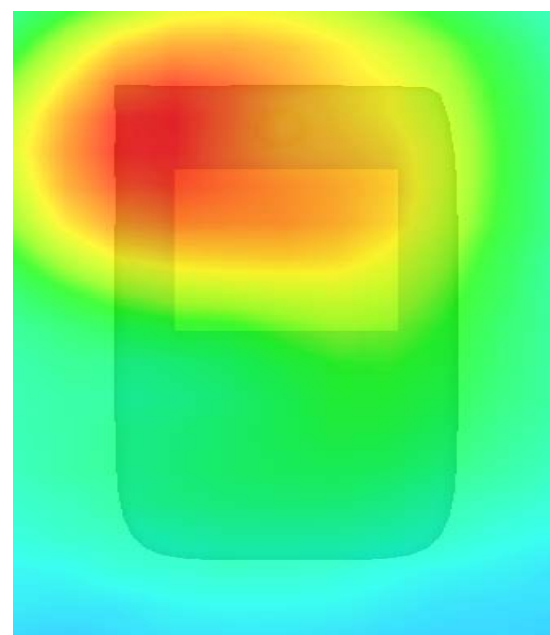

## MEASUREMENT 38

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 12/4/2012

Measurement duration: 8 minutes 9 seconds


### A. Experimental conditions.

<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	WCDMA1900
<b>Channels</b>	Low
<b>Signal</b>	CDMA

### B. SAR Measurement Results

Lower Band SAR (Channel 9262):

<b>Frequency (MHz)</b>	1852.400000
<b>Relative permittivity (real part)</b>	39.910000
<b>Relative permittivity</b>	13.230000
<b>Conductivity (S/m)</b>	1.381800
<b>Power drift (%)</b>	0.280000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.136,34.843,38.721
<b>Crest factor:</b>	1:1

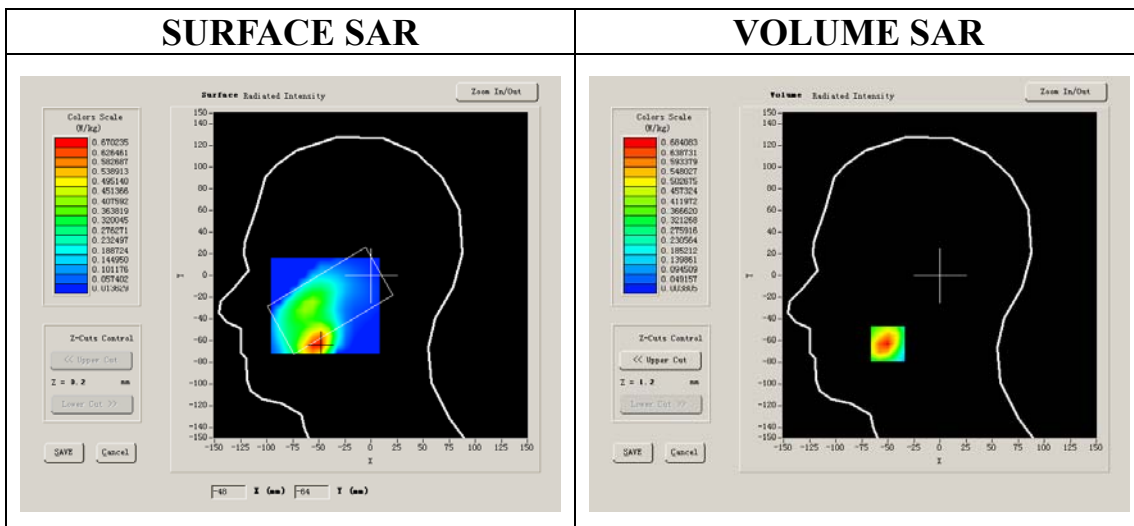


**Maximum location: X=-50.00, Y=-63.00**

<b>SAR 10g (W/Kg)</b>	0.315161
<b>SAR 1g (W/Kg)</b>	0.648716


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.6841	0.3083	0.1463	0.0714	0.0328	0.0181


**SAR, Z Axis Scan (X = -50, Y = -63)**

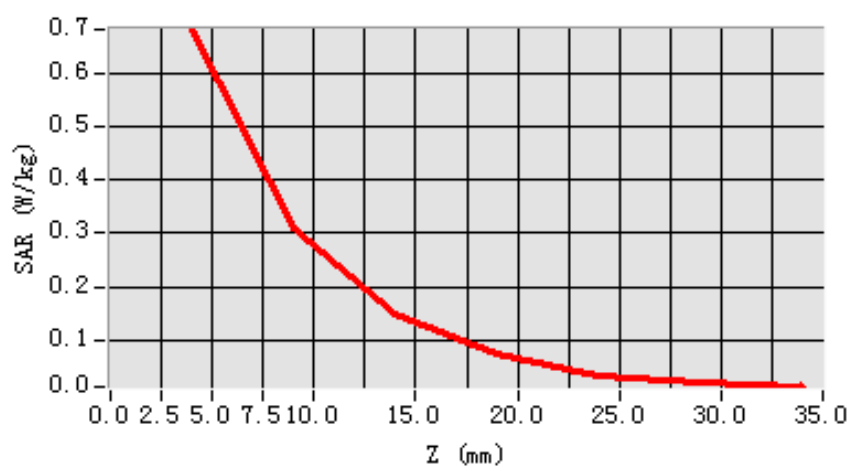

**3D scen shot**

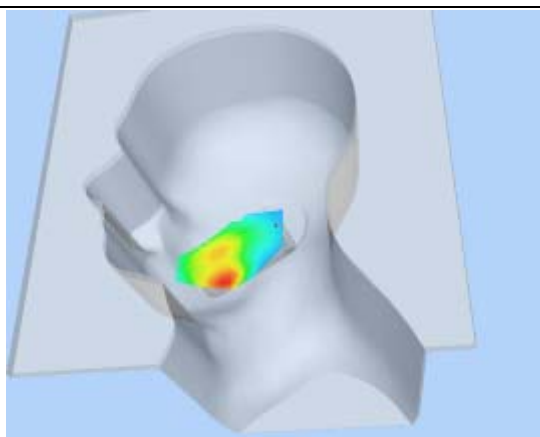

**Hot spot position**

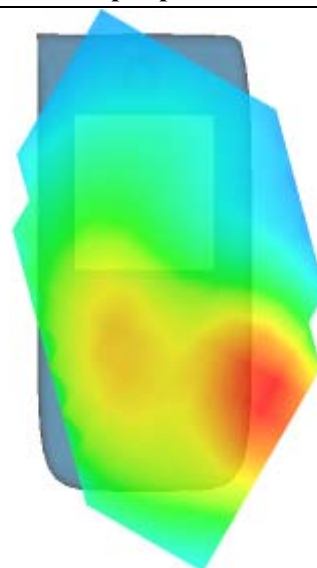

## MEASUREMENT 39

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 12/4/2012

Measurement duration: 7 minutes 28 seconds

### A. Experimental conditions.


<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Tilt
<b>Band</b>	WCDMA1900
<b>Channels</b>	Low
<b>Signal</b>	CDMA

### B. SAR Measurement Results


Lower Band SAR (Channel 9262):

<b>Frequency (MHz)</b>	1852.400000
<b>Relative permittivity (real part)</b>	39.910000
<b>Relative permittivity</b>	13.230000
<b>Conductivity (S/m)</b>	1.381800
<b>Power drift (%)</b>	0.160000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.136,34.843,38.721
<b>Crest factor:</b>	1:1

#### SURFACE SAR

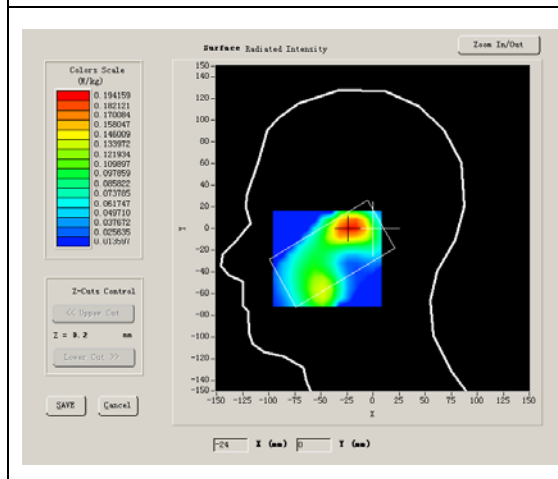

#### VOLUME SAR

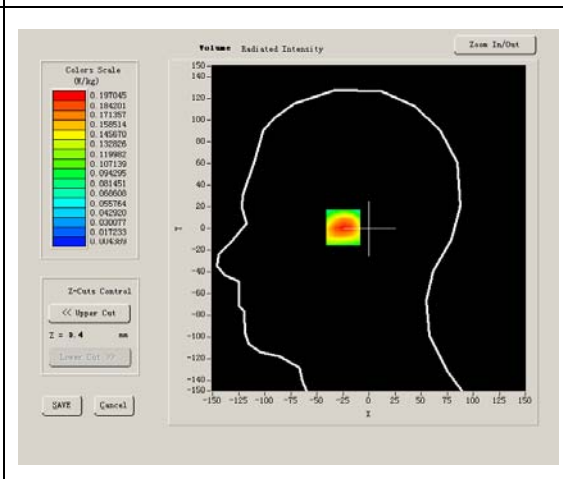


**Maximum location: X=-21.00, Y=1.00**

<b>SAR 10g (W/Kg)</b>	0.100871
<b>SAR 1g (W/Kg)</b>	0.187656


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.1970	0.1051	0.0576	0.0316	0.0151	0.0107


**SAR, Z Axis Scan (X = -21, Y = 1)**

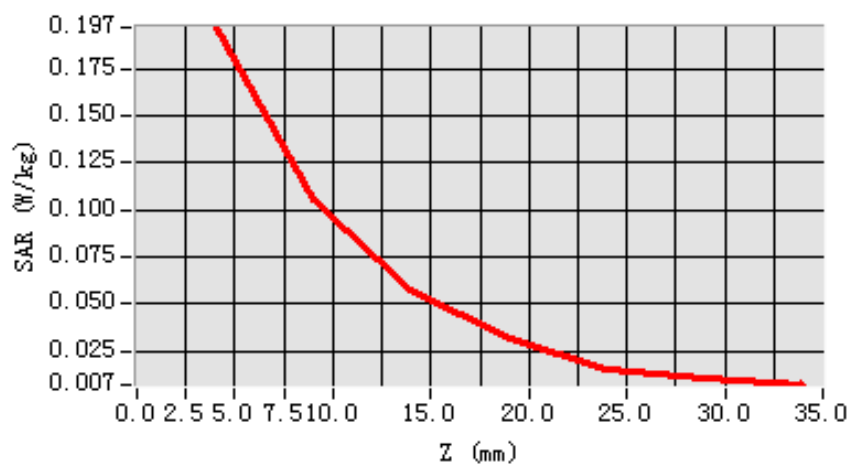

**3D scen shot**

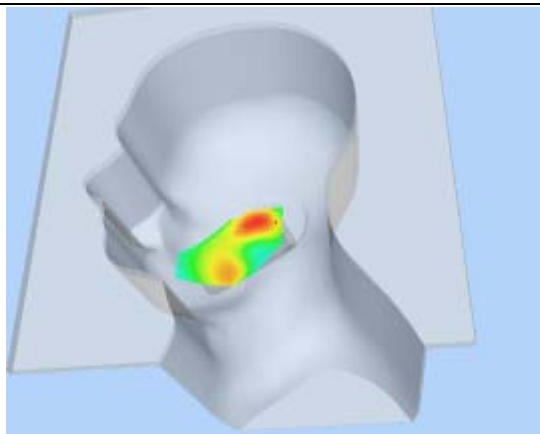

**Hot spot position**

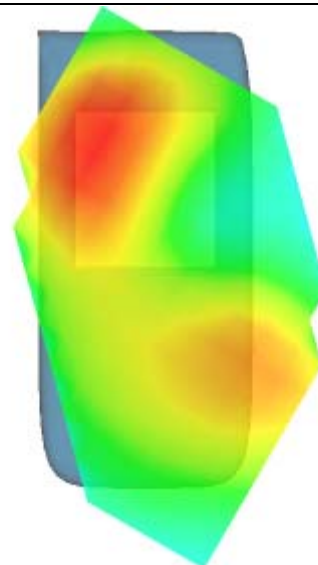



## MEASUREMENT 40

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 12/4/2012

Measurement duration: 8 minutes 7 seconds


### A. Experimental conditions.

<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	WCDMA1900
<b>Channels</b>	Low
<b>Signal</b>	CDMA

### B. SAR Measurement Results

Lower Band SAR (Channel 9262):

<b>Frequency (MHz)</b>	1852.400000
<b>Relative permittivity (real part)</b>	39.910000
<b>Relative permittivity</b>	13.230000
<b>Conductivity (S/m)</b>	1.381800
<b>Power drift (%)</b>	-0.290000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.136,34.843,38.721
<b>Crest factor:</b>	1:1

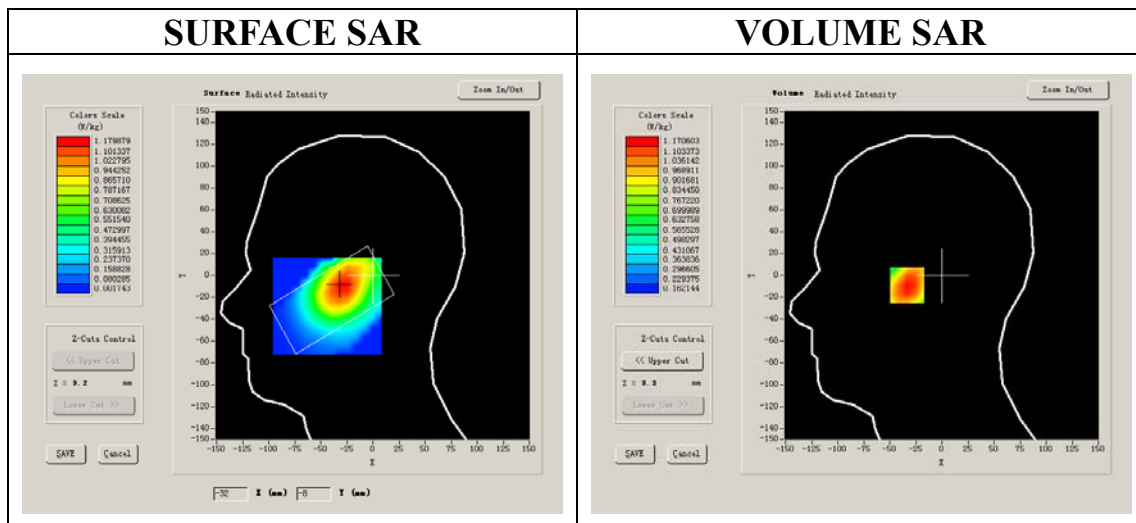


**Maximum location: X=-30.00, Y=-9.00**

<b>SAR 10g (W/Kg)</b>	0.863695
<b>SAR 1g (W/Kg)</b>	1.144462


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	1.1706	0.9336	0.7632	0.6387	0.5297	0.4039


**SAR, Z Axis Scan (X = -30, Y = -9)**

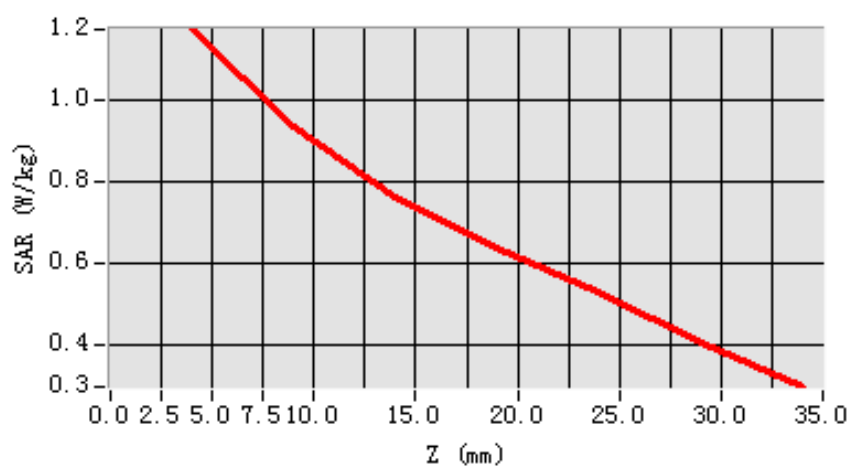

**3D scen shot**

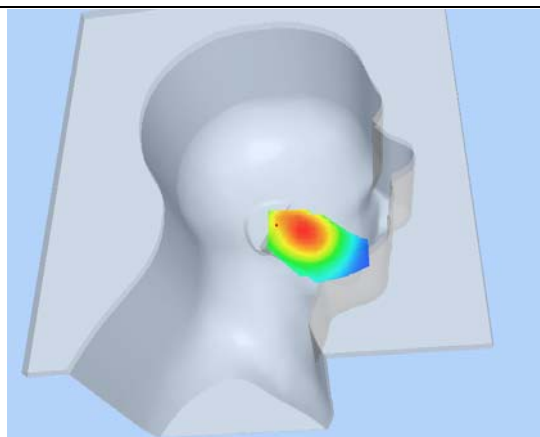

**Hot spot position**

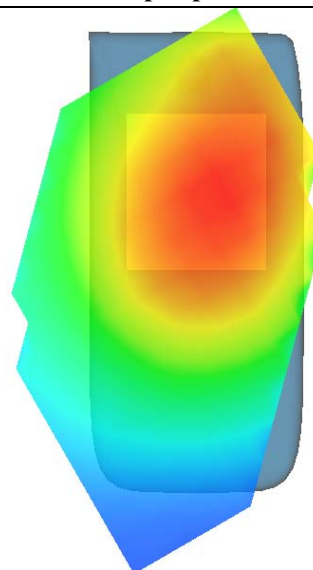

# MEASUREMENT 41

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 12/4/2012

Measurement duration: 8 minutes 8 seconds

## A. Experimental conditions.


<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	WCDMA1900
<b>Channels</b>	Middle
<b>Signal</b>	CDMA

## B. SAR Measurement Results


Middle Band SAR (Channel 9400):

<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	39.910000
<b>Relative permittivity</b>	13.230000
<b>Conductivity (S/m)</b>	1.381800
<b>Power drift (%)</b>	-0.100000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.136,34.843,38.721
<b>Crest factor:</b>	1:1

### SURFACE SAR

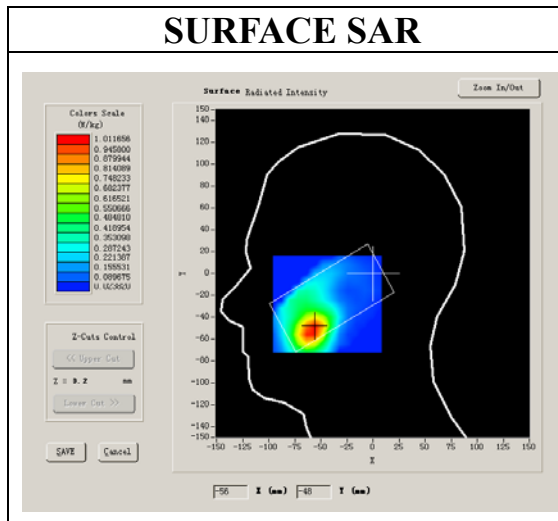

### VOLUME SAR

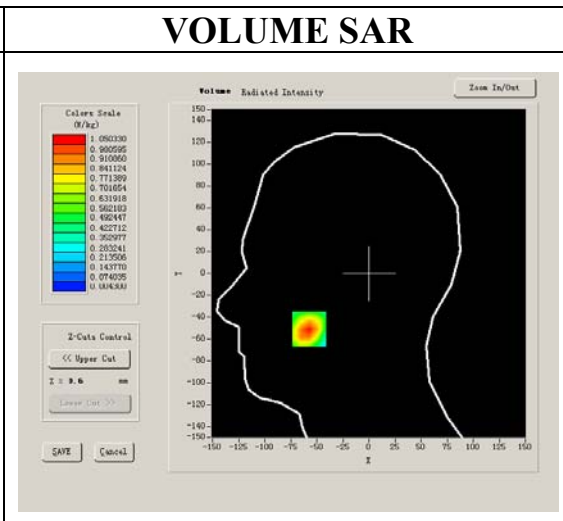


**Maximum location: X=-57.00, Y=-51.00**

<b>SAR 10g (W/Kg)</b>	0.494179
<b>SAR 1g (W/Kg)</b>	0.995102


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	1.0503	0.4965	0.2434	0.1148	0.0573	0.0210


**SAR, Z Axis Scan (X = -57, Y = -51)**

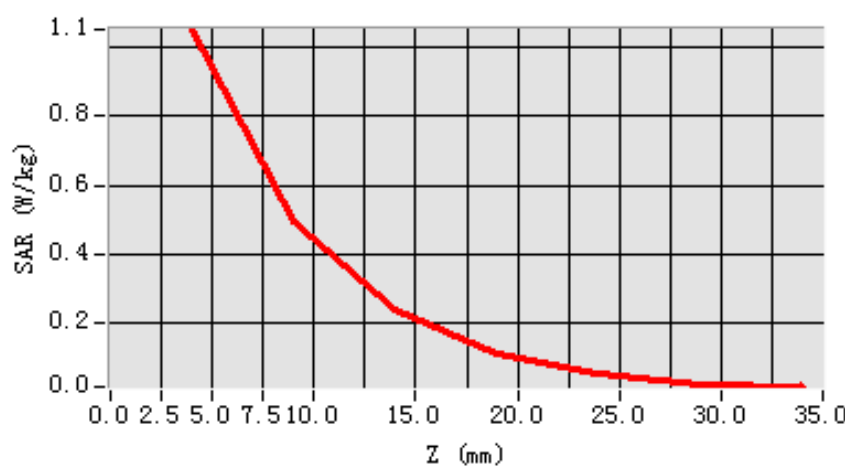

**3D scen shot**

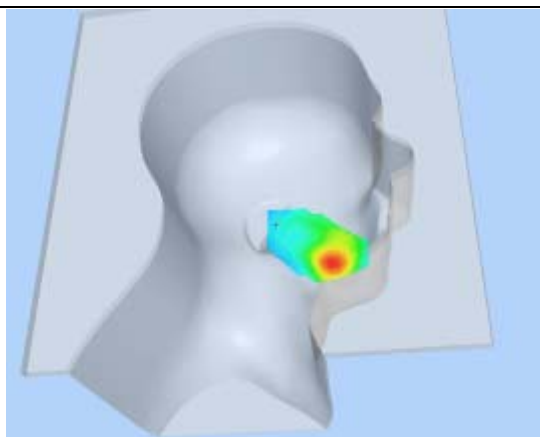

**Hot spot position**

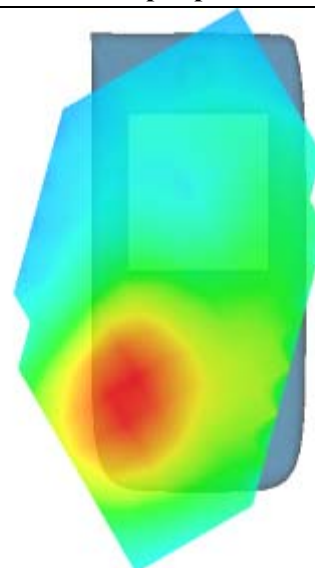

## MEASUREMENT 42

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 12/4/2012

Measurement duration: 8 minutes 9 seconds

### A. Experimental conditions.


<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	WCDMA1900
<b>Channels</b>	High
<b>Signal</b>	CDMA

### B. SAR Measurement Results


Higher Band SAR (Channel 9538):

<b>Frequency (MHz)</b>	1907.600000
<b>Relative permittivity (real part)</b>	39.799999
<b>Relative permittivity</b>	13.380000
<b>Conductivity (S/m)</b>	1.417537
<b>Power drift (%)</b>	0.530000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.136,34.843,38.721
<b>Crest factor:</b>	1:1

#### SURFACE SAR

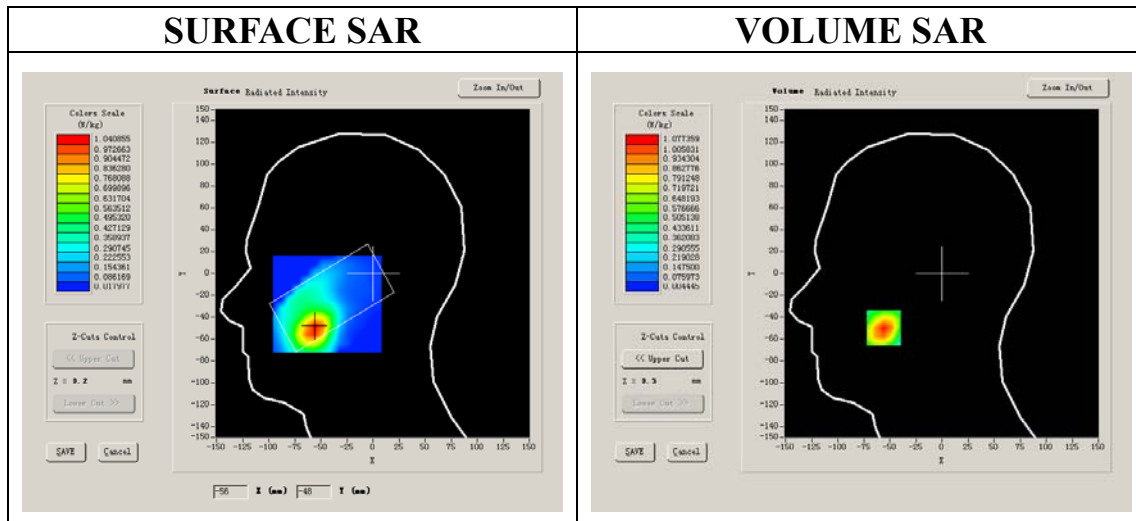

#### VOLUME SAR

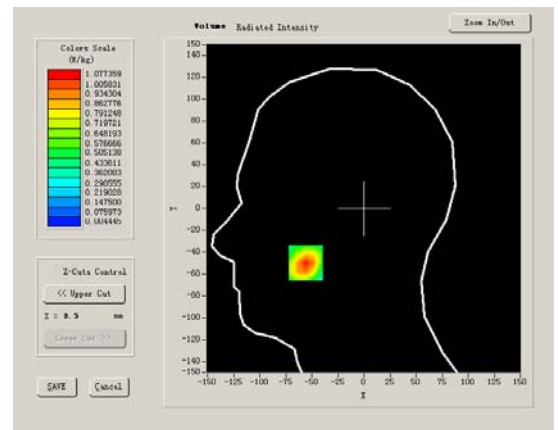


**Maximum location: X=-56.00, Y=-50.00**

<b>SAR 10g (W/Kg)</b>	0.503442
<b>SAR 1g (W/Kg)</b>	1.016870


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	1.0774	0.5170	0.2393	0.1141	0.0506	0.0325


**SAR, Z Axis Scan (X = -56, Y = -50)**

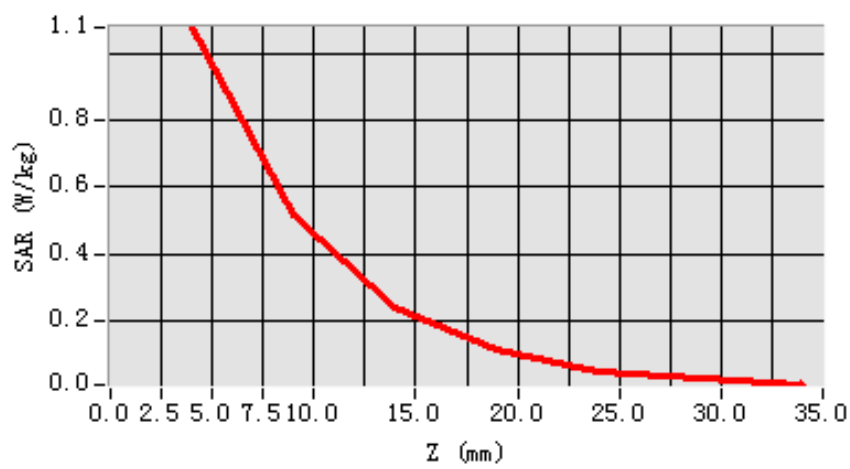

**3D scen shot**

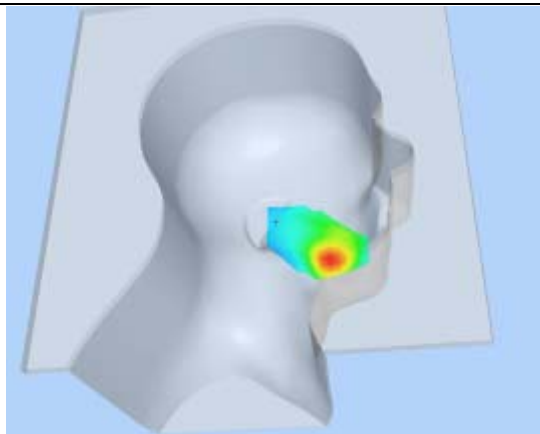

**Hot spot position**

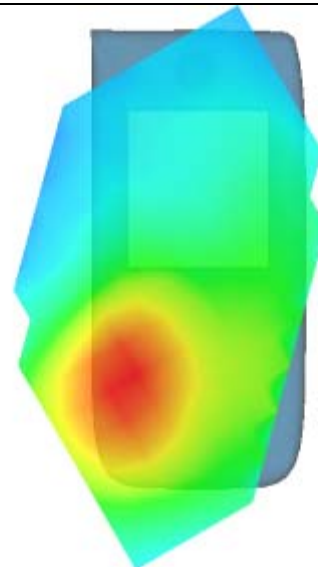

## MEASUREMENT 43

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 12/4/2012

Measurement duration: 8 minutes 7 seconds


### A. Experimental conditions.

<b>Phantom File</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Tilt
<b>Band</b>	WCDMA1900
<b>Channels</b>	Low
<b>Signal</b>	CDMA

### B. SAR Measurement Results

Lower Band SAR (Channel 9262):

<b>Frequency (MHz)</b>	1852.400000
<b>Relative permittivity (real part)</b>	39.910000
<b>Relative permittivity</b>	13.230000
<b>Conductivity (S/m)</b>	1.381800
<b>Power drift (%)</b>	-0.500000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.136,34.843,38.721
<b>Crest factor:</b>	1:1

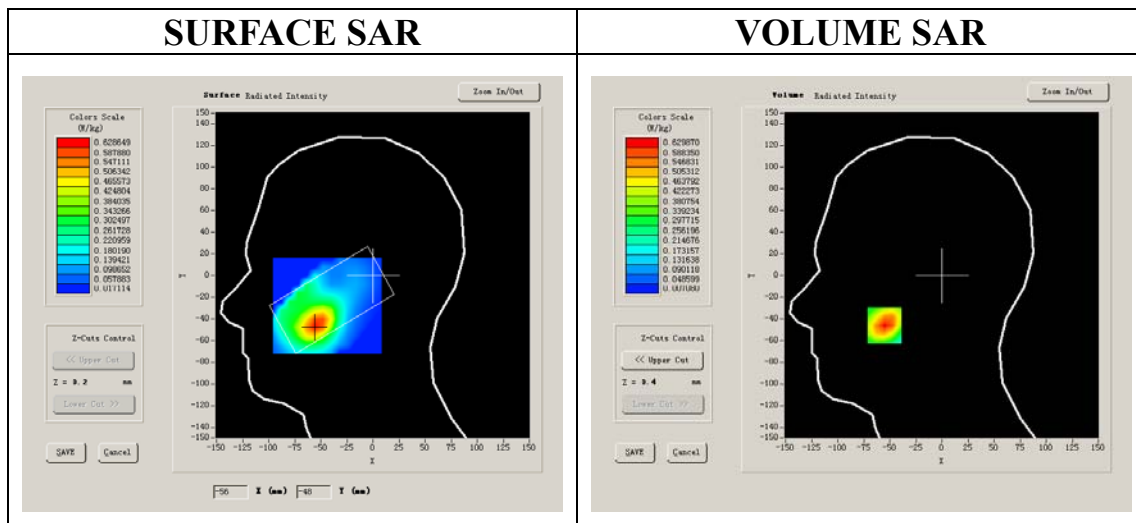


**Maximum location: X=-55.00, Y=-46.00**

<b>SAR 10g (W/Kg)</b>	0.304702
<b>SAR 1g (W/Kg)</b>	0.598519


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.6299	0.3072	0.1505	0.0744	0.0375	0.0171


**SAR, Z Axis Scan (X = -55, Y = -46)**

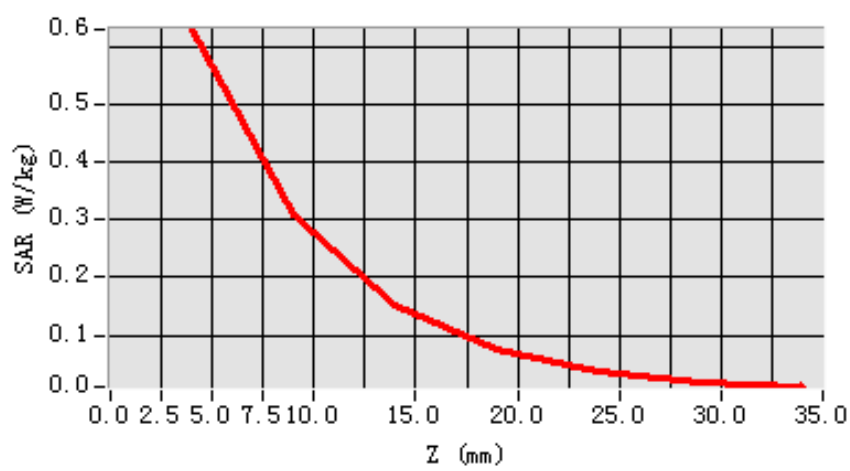

**3D scen shot**

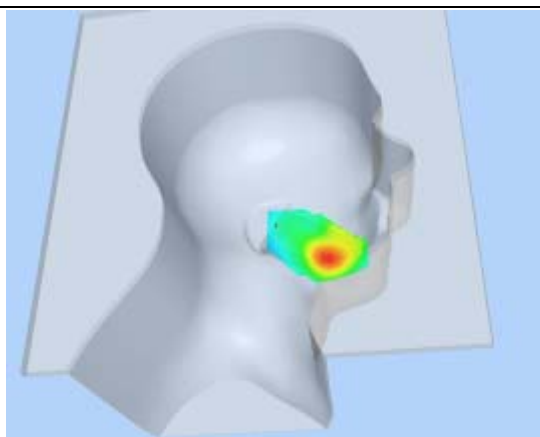

**Hot spot position**

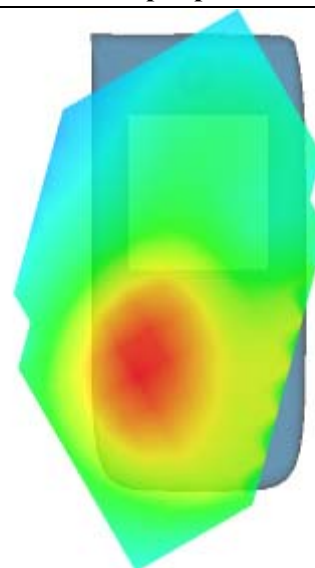



## MEASUREMENT 44

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 12/4/2012

Measurement duration: 9 minutes 11 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	WCDMA1900
<b>Channels</b>	Low
<b>Signal</b>	CDMA

### B. SAR Measurement Results

Lower Band SAR (Channel 9262):

<b>Frequency (MHz)</b>	1852.400000
<b>Relative permittivity (real part)</b>	51.341000
<b>Relative permittivity</b>	15.877050
<b>Conductivity (S/m)</b>	1.658270
<b>Power drift (%)</b>	0.230000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.625,34.773,38.535

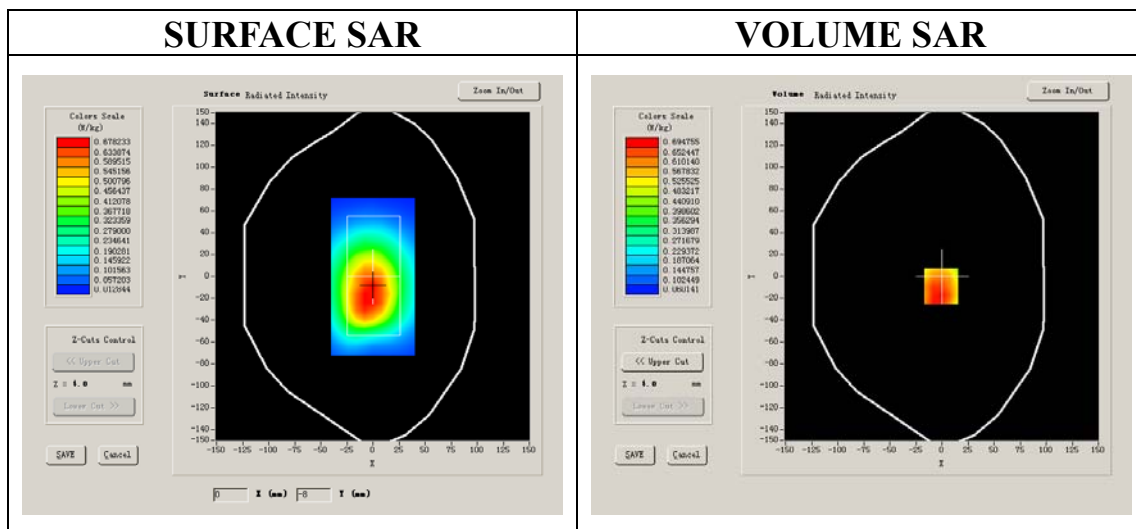


**Maximum location: X=-1.00, Y=-9.00**

<b>SAR 10g (W/Kg)</b>	0.501791
<b>SAR 1g (W/Kg)</b>	0.733746


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.7272	0.5107	0.3736	0.2647	0.1863	0.1312


**SAR, Z Axis Scan (X = -1, Y = -9)**

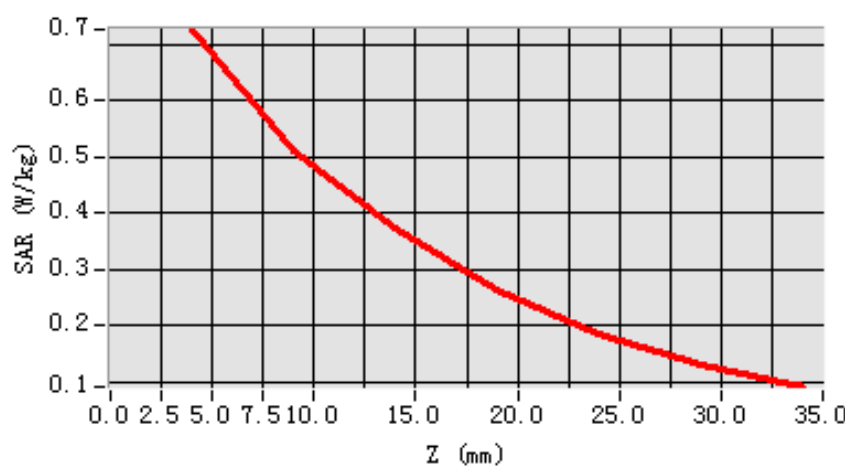

**3D scen shot**

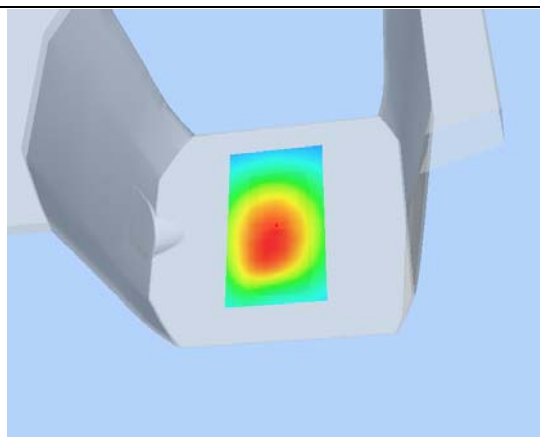

**Hot spot position**

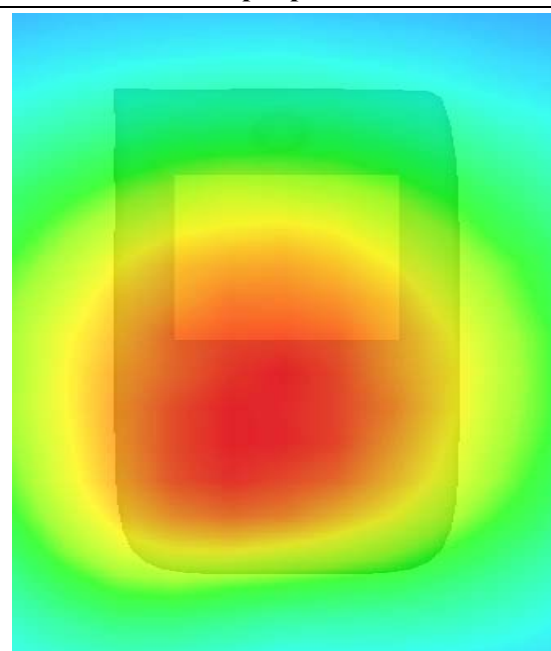

## MEASUREMENT 45

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 12/4/2012

Measurement duration: 9 minutes 12 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	WCDMA1900
<b>Channels</b>	Low
<b>Signal</b>	CDMA

### B. SAR Measurement Results

Lower Band SAR (Channel 9262):

<b>Frequency (MHz)</b>	1852.400000
<b>Relative permittivity (real part)</b>	51.341000
<b>Relative permittivity</b>	15.877050
<b>Conductivity (S/m)</b>	1.658270
<b>Power drift (%)</b>	1.130000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:1

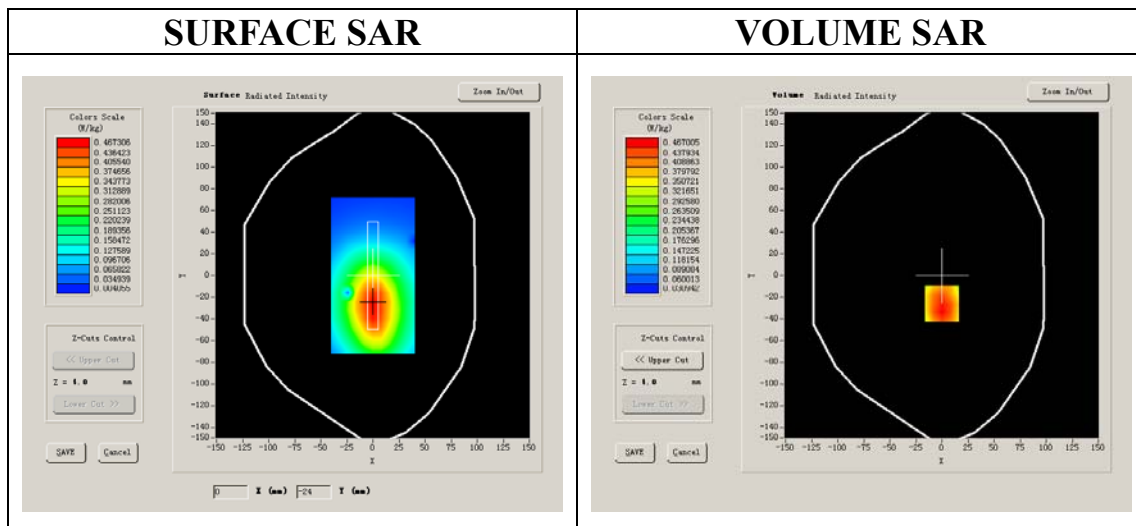


**Maximum location: X=0.00, Y=-26.00**

<b>SAR 10g (W/Kg)</b>	0.336763
<b>SAR 1g (W/Kg)</b>	0.507310


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.5176	0.3617	0.2425	0.1690	0.1222	0.0870


**SAR, Z Axis Scan (X = 0, Y = -26)**

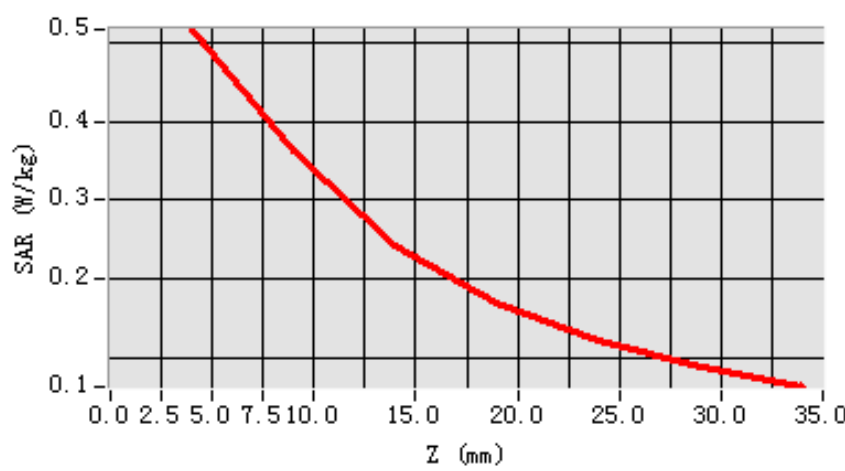

**3D scen shot**

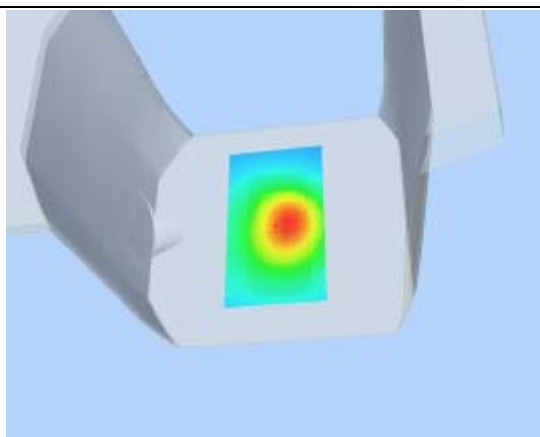

**Hot spot position**

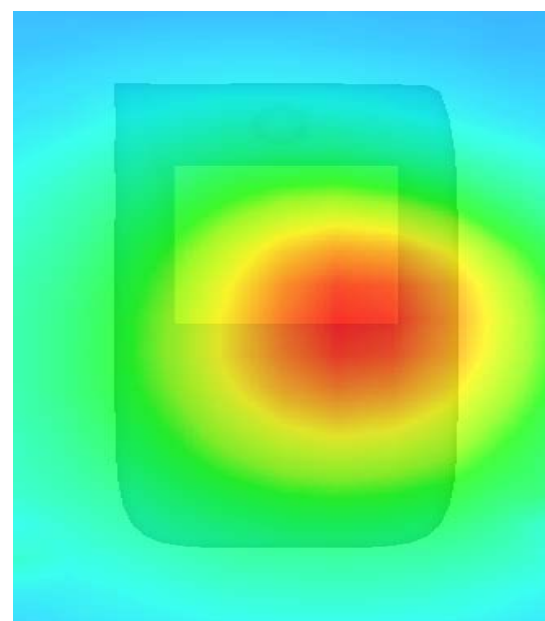

## MEASUREMENT 46

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 12/4/2012

Measurement duration: 9 minutes 12 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	WCDMA1900
<b>Channels</b>	Low
<b>Signal</b>	CDMA

### B. SAR Measurement Results

Lower Band SAR (Channel 9262):

<b>Frequency (MHz)</b>	1852.400000
<b>Relative permittivity (real part)</b>	51.341000
<b>Relative permittivity</b>	15.877050
<b>Conductivity (S/m)</b>	1.658270
<b>Power drift (%)</b>	0.250000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:1

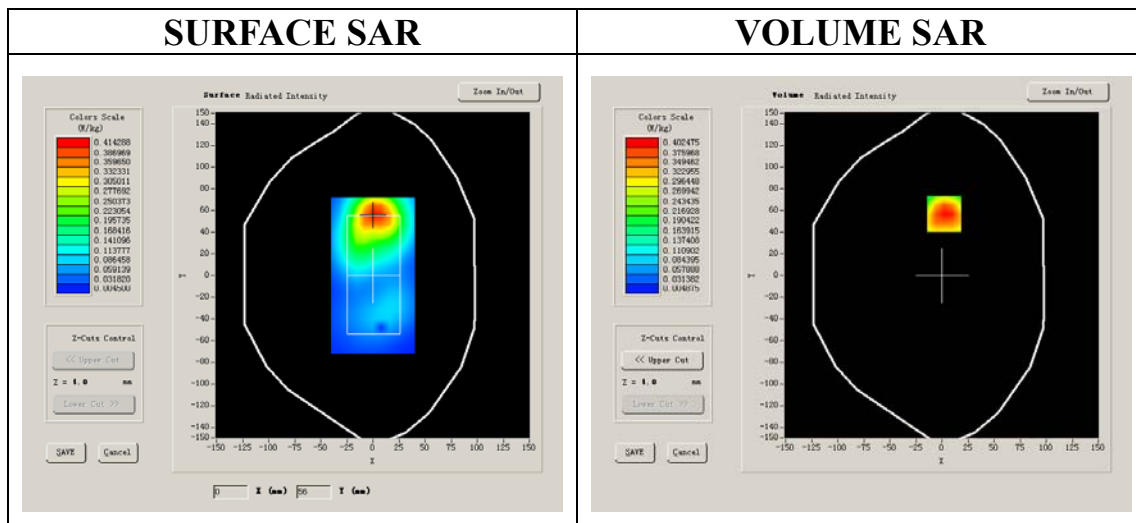


**Maximum location: X=2.00, Y=57.00**

<b>SAR 10g (W/Kg)</b>	0.219887
<b>SAR 1g (W/Kg)</b>	0.416725


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.4304	0.2078	0.1006	0.0501	0.0252	0.0138


**SAR, Z Axis Scan (X = 2, Y = 57)**

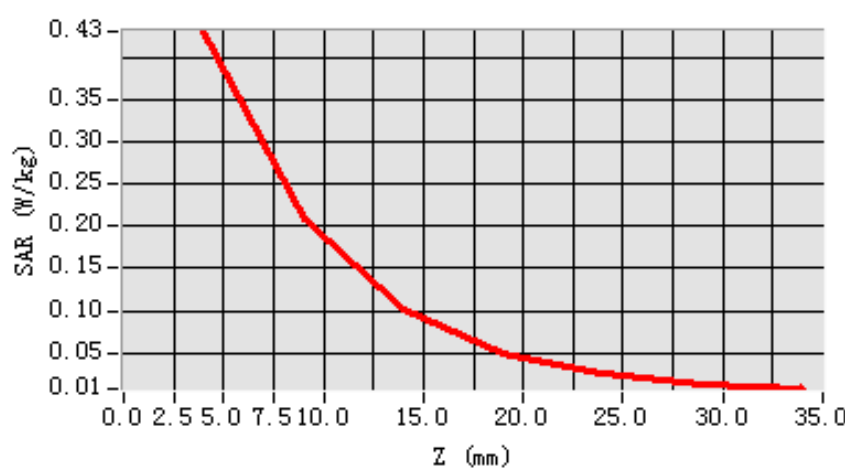

**3D scene shot**

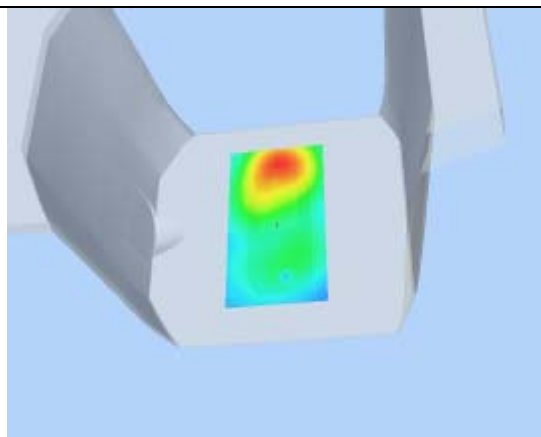

**Hot spot position**

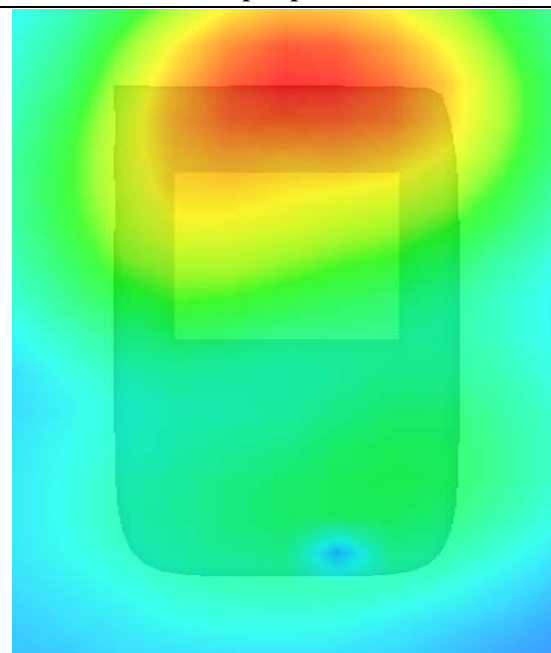

## MEASUREMENT 47

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 12/4/2012

Measurement duration: 9 minutes 14 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	WCDMA1900
<b>Channels</b>	Low
<b>Signal</b>	CDMA

### B. SAR Measurement Results


Lower Band SAR (Channel 9262):

<b>Frequency (MHz)</b>	1852.400000
<b>Relative permittivity (real part)</b>	51.341000
<b>Relative permittivity</b>	15.877050
<b>Conductivity (S/m)</b>	1.658270
<b>Power drift (%)</b>	0.080000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:1

#### SURFACE SAR

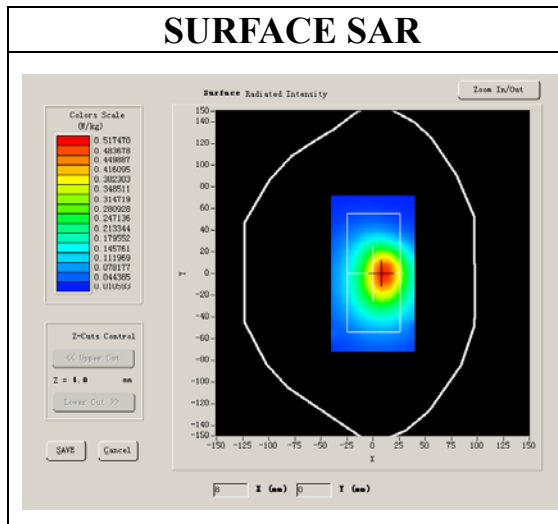

#### VOLUME SAR

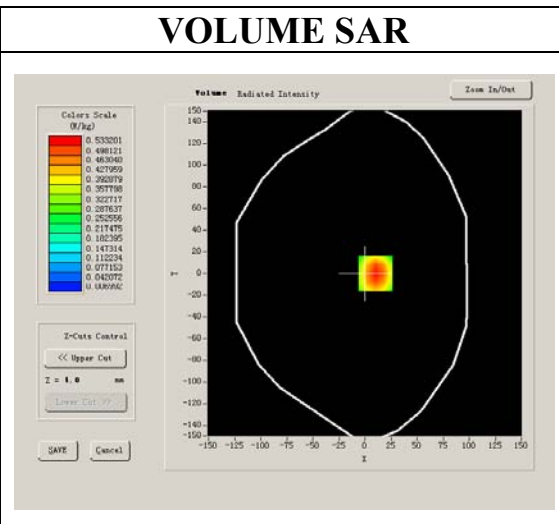


**Maximum location: X=10.00, Y=0.00**

<b>SAR 10g (W/Kg)</b>	0.324745
<b>SAR 1g (W/Kg)</b>	0.611231


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.6399	0.3135	0.1472	0.0767	0.0403	0.0214


**SAR, Z Axis Scan (X = 10, Y = 0)**

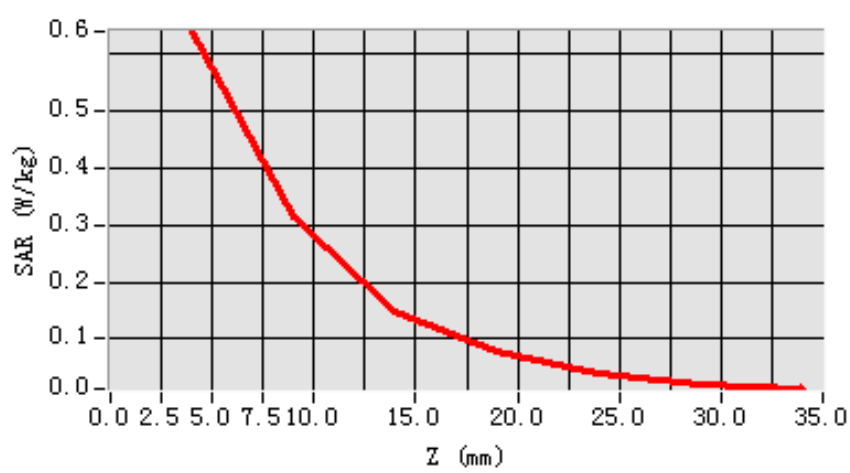

**3D scen shot**

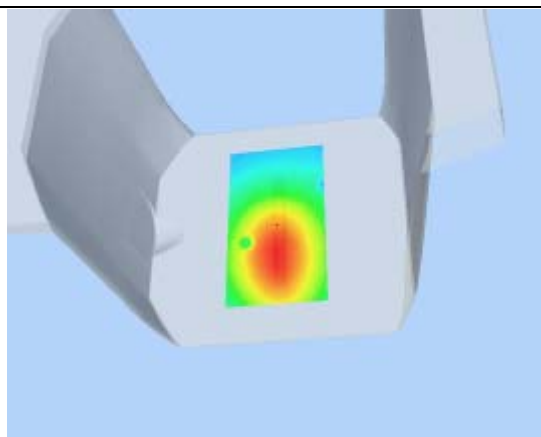

**Hot spot position**

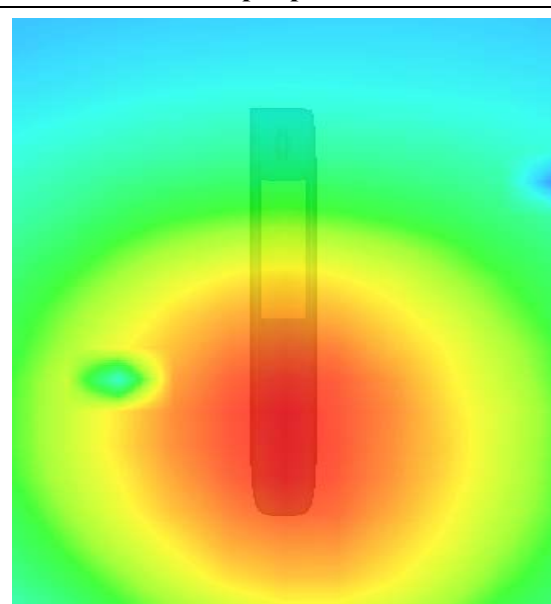



## MEASUREMENT 48

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 12/4/2012

Measurement duration: 9 minutes 12 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	WCDMA1900
<b>Channels</b>	Low
<b>Signal</b>	CDMA

### B. SAR Measurement Results


Lower Band SAR (Channel 9262):

<b>Frequency (MHz)</b>	1852.400000
<b>Relative permittivity (real part)</b>	51.341000
<b>Relative permittivity</b>	15.877050
<b>Conductivity (S/m)</b>	1.658270
<b>Power drift (%)</b>	0.740000
<b>Ambient Temperature:</b>	22.6°C
<b>Liquid Temperature:</b>	22.7°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:1

#### SURFACE SAR

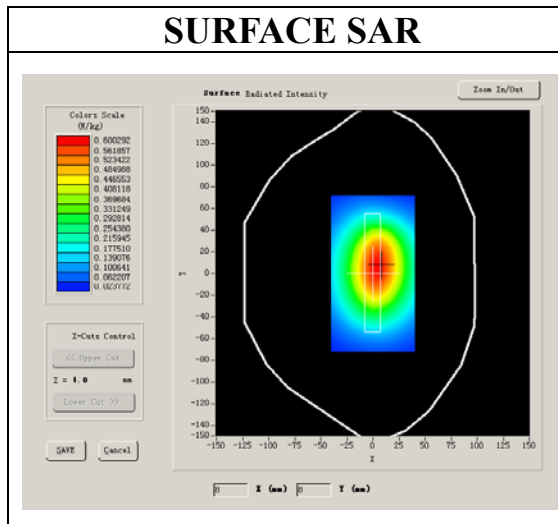

#### VOLUME SAR

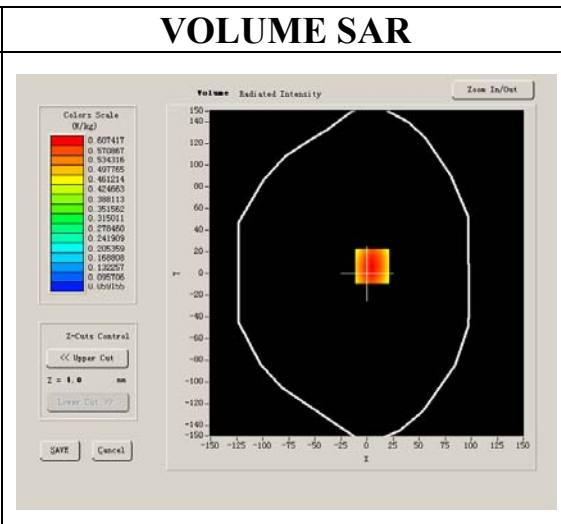


**Maximum location: X=5.00, Y=7.00**

<b>SAR 10g (W/Kg)</b>	0.482055
<b>SAR 1g (W/Kg)</b>	0.703149


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.7289	0.5112	0.3622	0.2581	0.1841	0.1325


**SAR, Z Axis Scan (X = 5, Y = 7)**

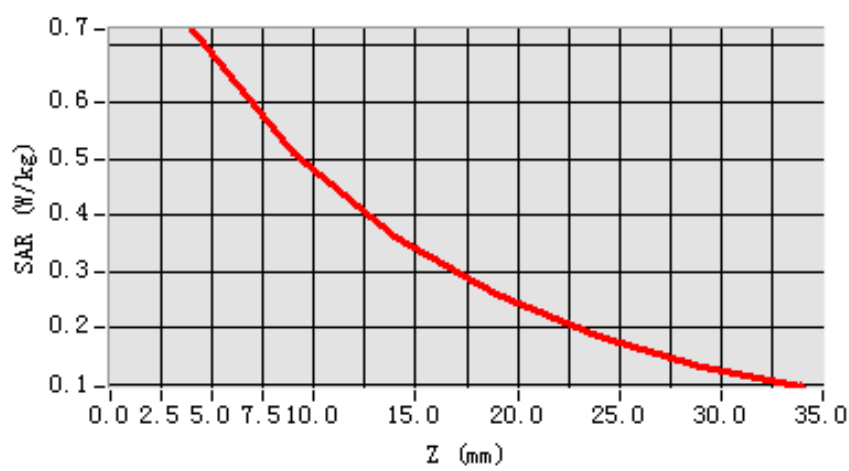

**3D scen shot**

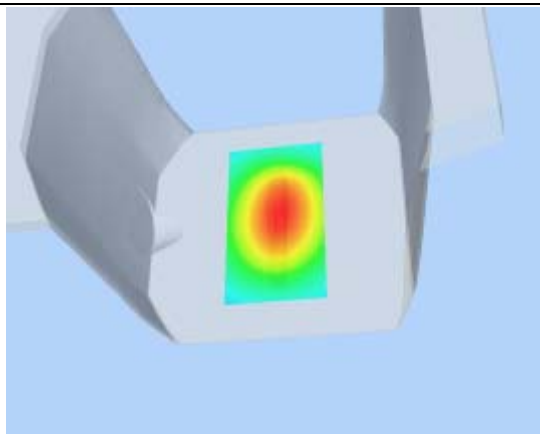

**Hot spot position**

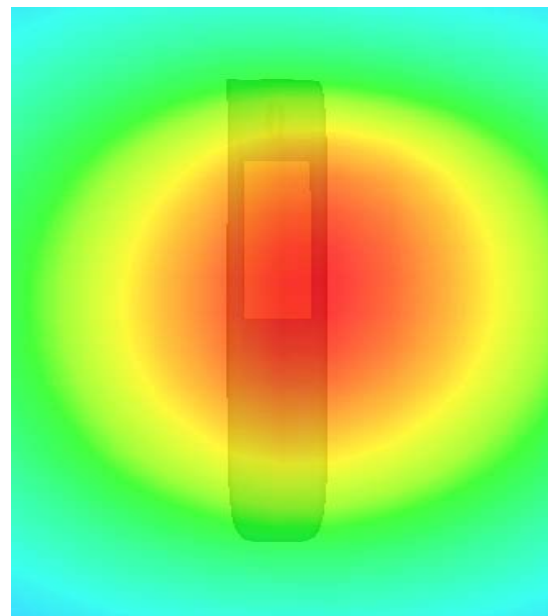

## MEASUREMENT 49

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 8 minutes 17 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	802.11B
<b>Channels</b>	Low
<b>Signal</b>	DSSS

### B. SAR Measurement Results

Lower Band SAR (Channel 1)

<b>Frequency (MHz)</b>	2412.000000
<b>Relative permittivity (real part)</b>	39.622857
<b>Relative permittivity</b>	15.490000
<b>Conductivity (S/m)</b>	1.964313
<b>Power drift (%)</b>	-0.430000
<b>Ambient Temperature:</b>	22.3°C
<b>Liquid Temperature:</b>	21.5°C
<b>ConvF:</b>	39.563,33.614,37.677
<b>Crest factor:</b>	1:1

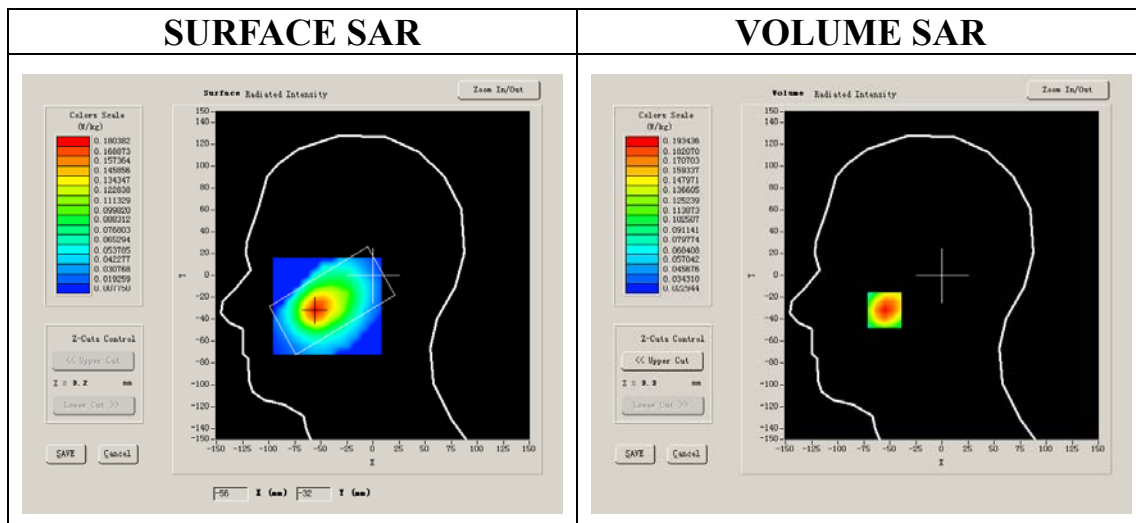


**Maximum location: X=-55.00, Y=-32.00**

<b>SAR 10g (W/Kg)</b>	0.137837
<b>SAR 1g (W/Kg)</b>	0.185303


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.1934	0.1534	0.1305	0.1010	0.0793	0.0611


**SAR, Z Axis Scan (X = -55, Y = -32)**

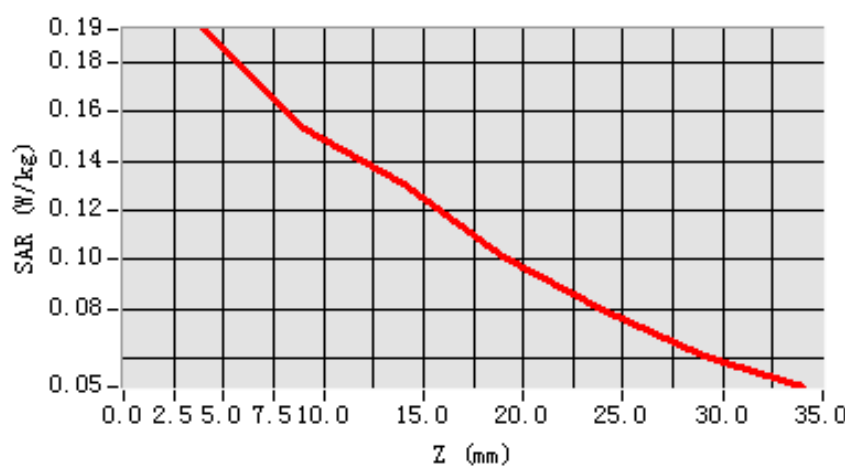

**3D scen shot**

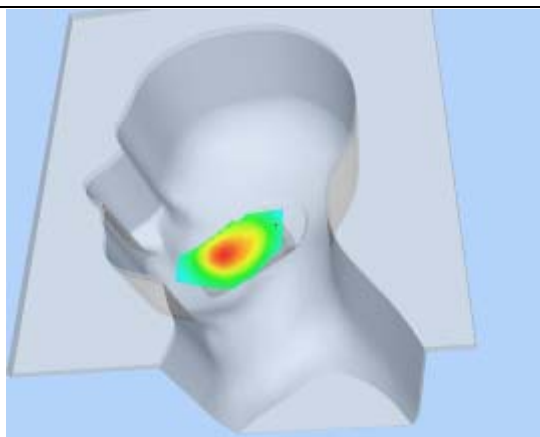

**Hot spot position**

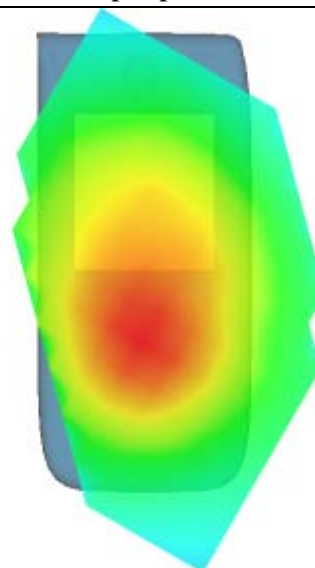

## MEASUREMENT 50

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 8 minutes 15 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Tilt
<b>Band</b>	802.11B
<b>Channels</b>	Low
<b>Signal</b>	DSSS

### B. SAR Measurement Results

Lower Band SAR (Channel 1)

<b>Frequency (MHz)</b>	2412.000000
<b>Relative permittivity (real part)</b>	39.622857
<b>Relative permittivity</b>	15.490000
<b>Conductivity (S/m)</b>	1.964313
<b>Power drift (%)</b>	-0.630000
<b>Ambient Temperature:</b>	22.3°C
<b>Liquid Temperature:</b>	21.5°C
<b>ConvF:</b>	39.563,33.614,37.677
<b>Crest factor:</b>	1:1

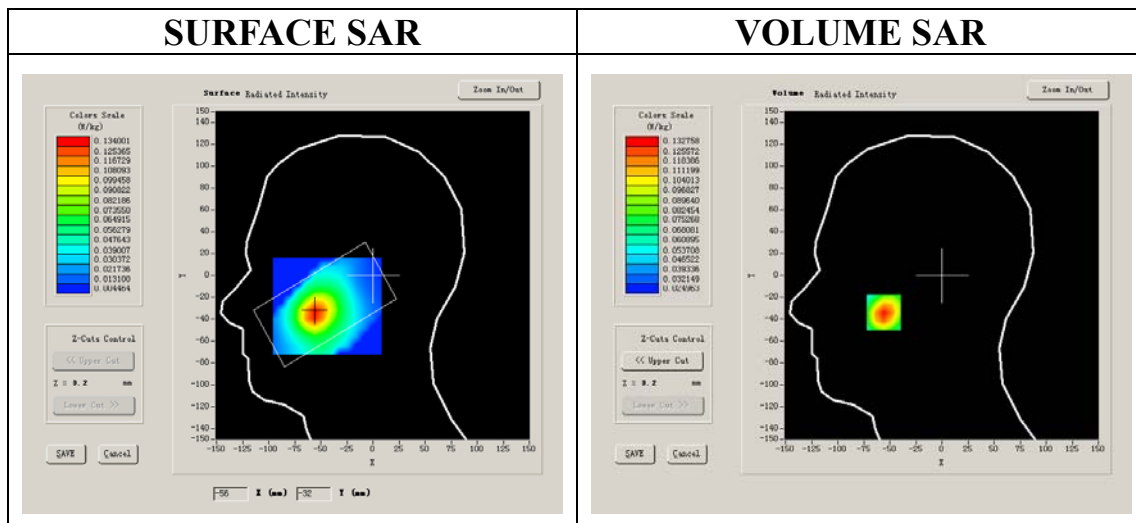


**Maximum location: X=-56.00, Y=-34.00**

<b>SAR 10g (W/Kg)</b>	0.098993
<b>SAR 1g (W/Kg)</b>	0.126820


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.1328	0.1171	0.1015	0.0853	0.0675	0.0547


**SAR, Z Axis Scan (X = -56, Y = -34)**

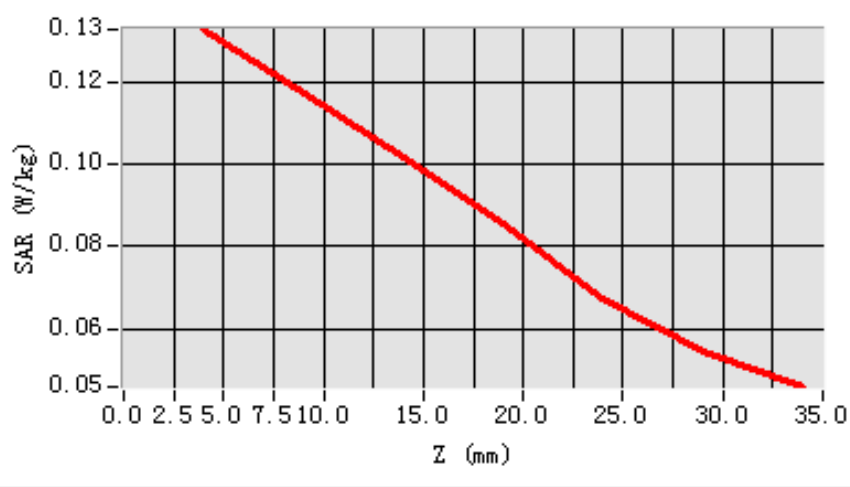

**3D scen shot**

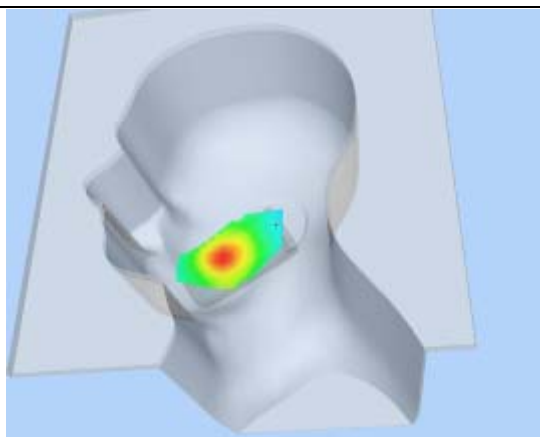

**Hot spot position**

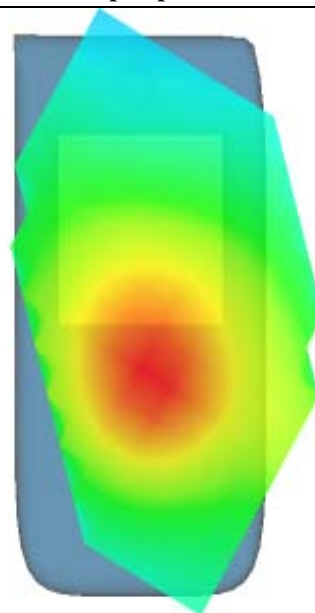

# MEASUREMENT 51

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 8 minutes 17 seconds


## A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	802.11B
<b>Channels</b>	Low
<b>Signal</b>	DSSS

## B. SAR Measurement Results

Lower Band SAR (Channel 1)

<b>Frequency (MHz)</b>	2412.000000
<b>Relative permittivity (real part)</b>	39.622857
<b>Relative permittivity</b>	15.490000
<b>Conductivity (S/m)</b>	1.964313
<b>Power drift (%)</b>	0.510000
<b>Ambient Temperature:</b>	22.3°C
<b>Liquid Temperature:</b>	21.5°C
<b>ConvF:</b>	39.563,33.614,37.677
<b>Crest factor:</b>	1:1

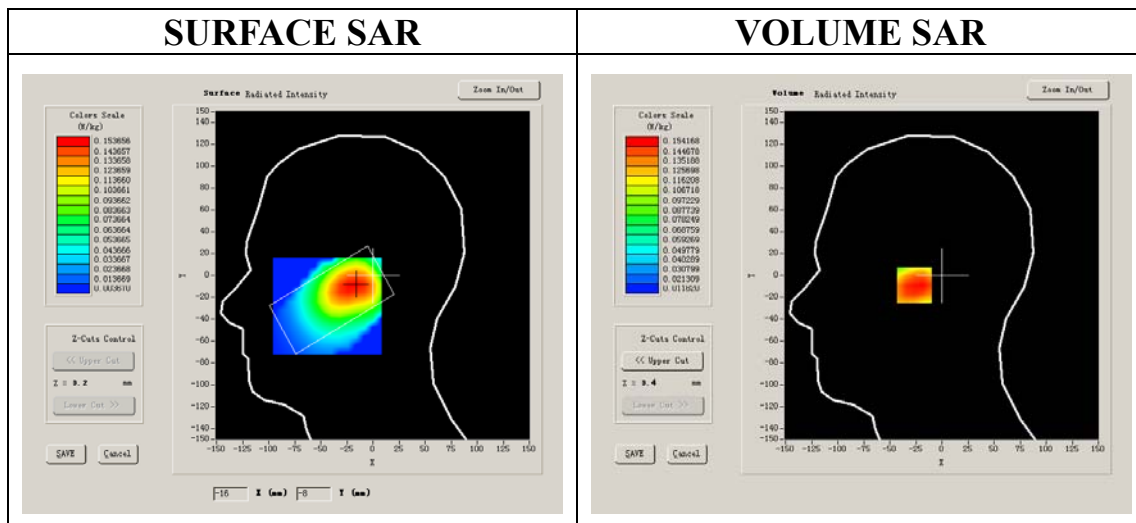


**Maximum location: X=-21.00, Y=-9.00**

<b>SAR 10g (W/Kg)</b>	0.101844
<b>SAR 1g (W/Kg)</b>	0.149169


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>0.1520</b>	<b>0.1074</b>	<b>0.0781</b>	<b>0.0560</b>	<b>0.0393</b>	<b>0.0270</b>


**SAR, Z Axis Scan (X = -21, Y = -9)**

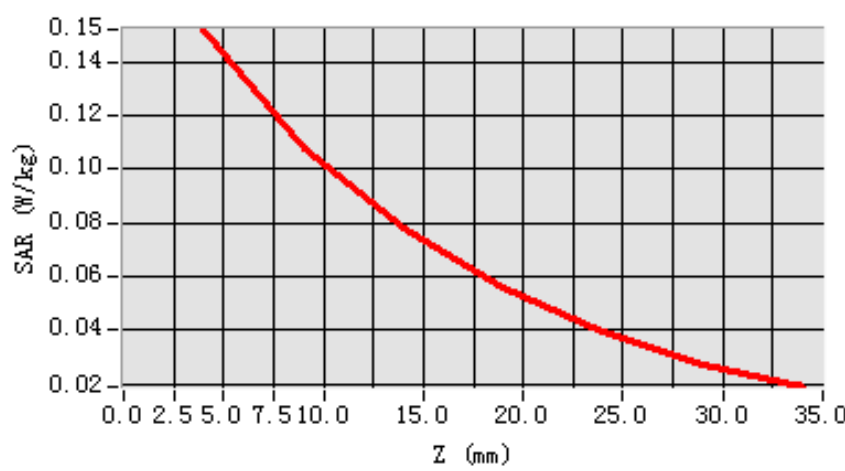

**3D scen shot**

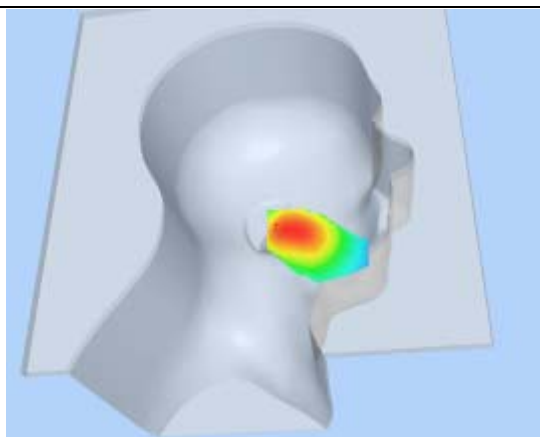

**Hot spot position**

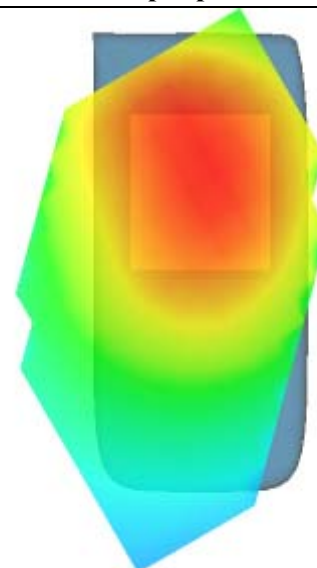



## MEASUREMENT 52

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 8 minutes 17 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Tilt
<b>Band</b>	802.11B
<b>Channels</b>	Low
<b>Signal</b>	DSSS

### B. SAR Measurement Results

Lower Band SAR (Channel 1)

<b>Frequency (MHz)</b>	2412.000000
<b>Relative permittivity (real part)</b>	39.622857
<b>Relative permittivity</b>	15.490000
<b>Conductivity (S/m)</b>	1.964313
<b>Power drift (%)</b>	0.620000
<b>Ambient Temperature:</b>	22.3°C
<b>Liquid Temperature:</b>	21.5°C
<b>ConvF:</b>	39.563,33.614,37.677
<b>Crest factor:</b>	1:1

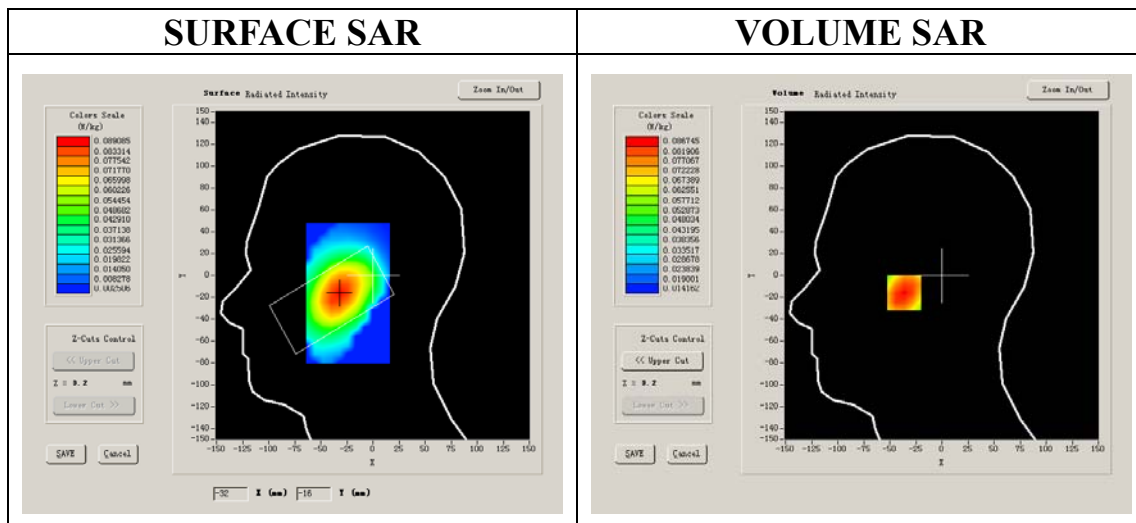


**Maximum location: X=-32.00, Y=-16.00**

<b>SAR 10g (W/Kg)</b>	0.068461
<b>SAR 1g (W/Kg)</b>	0.084536


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.0867	0.0748	0.0649	0.0542	0.0451	0.0352


**SAR, Z Axis Scan (X = -32, Y = -16)**

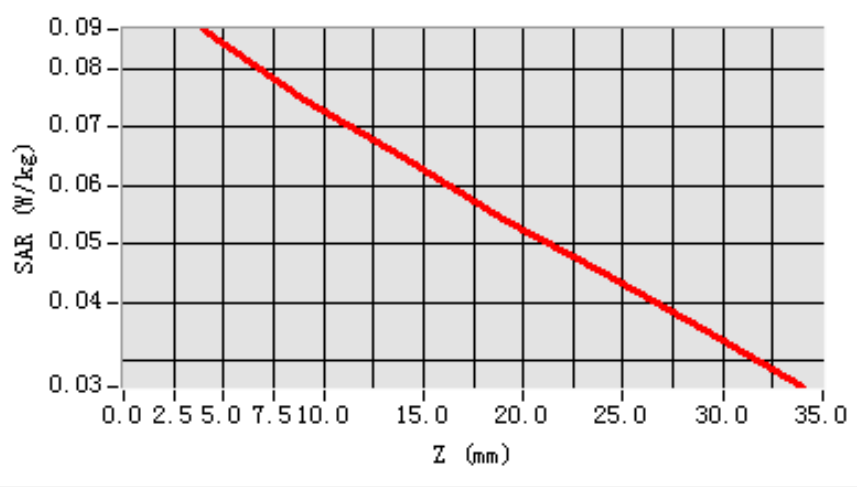

**3D scen shot**

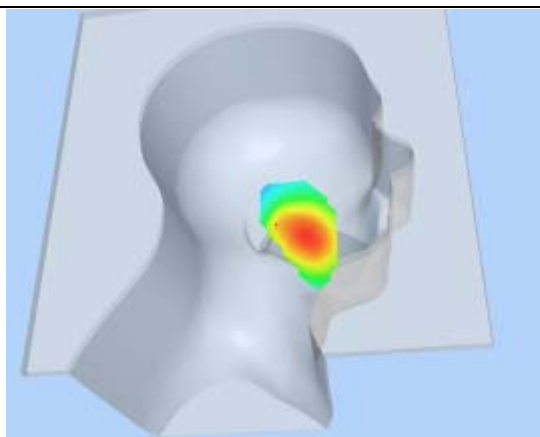

**Hot spot position**

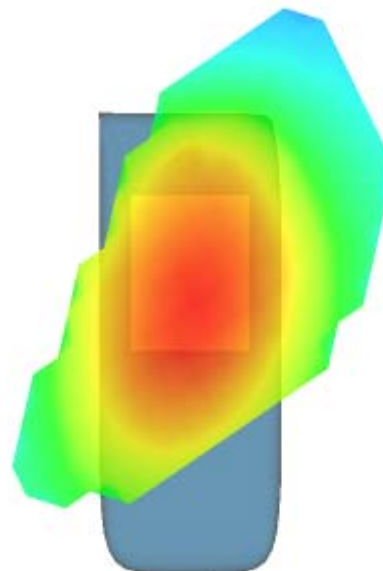

## MEASUREMENT 53

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 10 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	802.11B
<b>Channels</b>	Low
<b>Signal</b>	DSSS

### B. SAR Measurement Results

Lower Band SAR (Channel 1)

<b>Frequency (MHz)</b>	2412.000000
<b>Relative permittivity (real part)</b>	52.548876
<b>Relative permittivity</b>	15.500000
<b>Conductivity (S/m)</b>	1.974257
<b>Power drift (%)</b>	-1.710000
<b>Ambient Temperature:</b>	22.0°C
<b>Liquid Temperature:</b>	21.8°C
<b>ConvF:</b>	39.772,33.946,37.835
<b>Crest factor:</b>	1:1

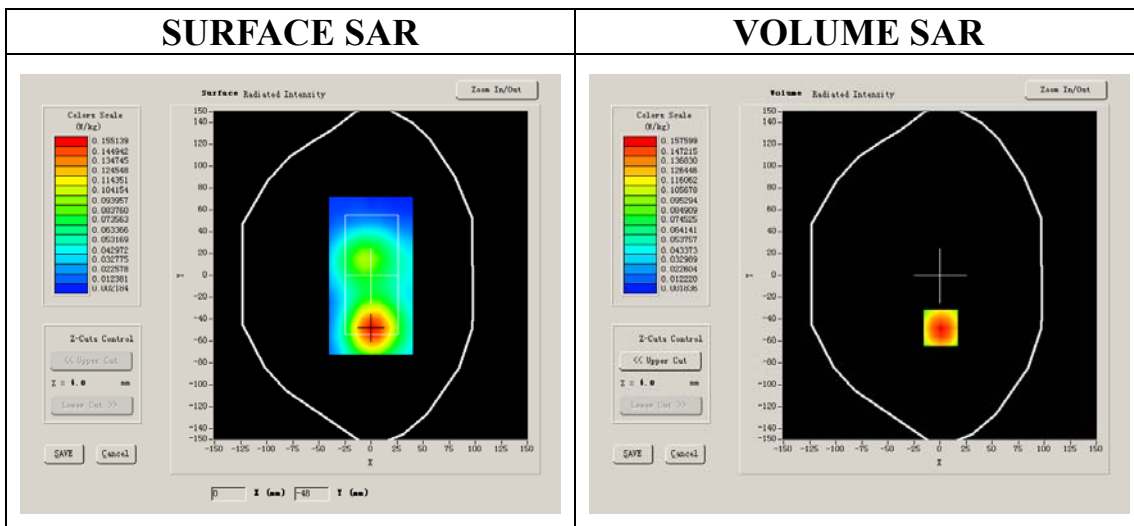


**Maximum location: X=18.00, Y=0.00**

<b>SAR 10g (W/Kg)</b>	0.084234
<b>SAR 1g (W/Kg)</b>	0.136156


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.1413	0.0877	0.0547	0.0367	0.0235	0.0150


**SAR, Z Axis Scan (X = 18, Y = 0)**

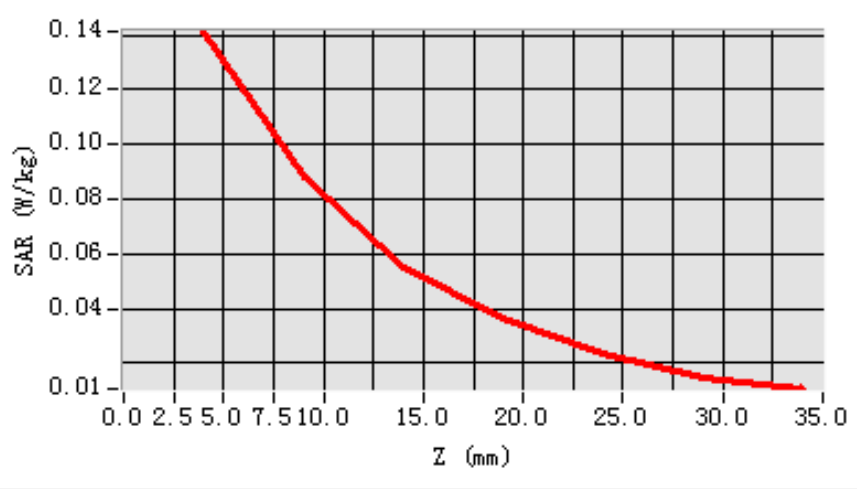

**3D scen shot**

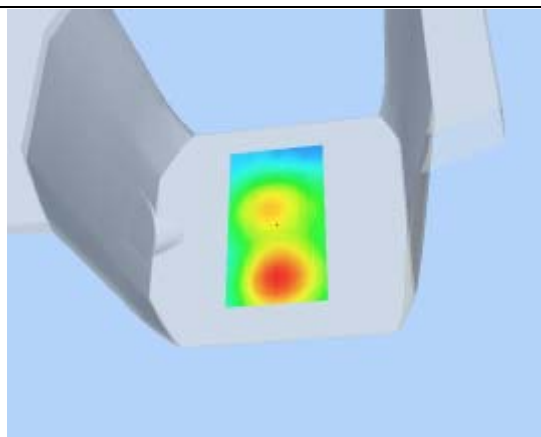

**Hot spot position**

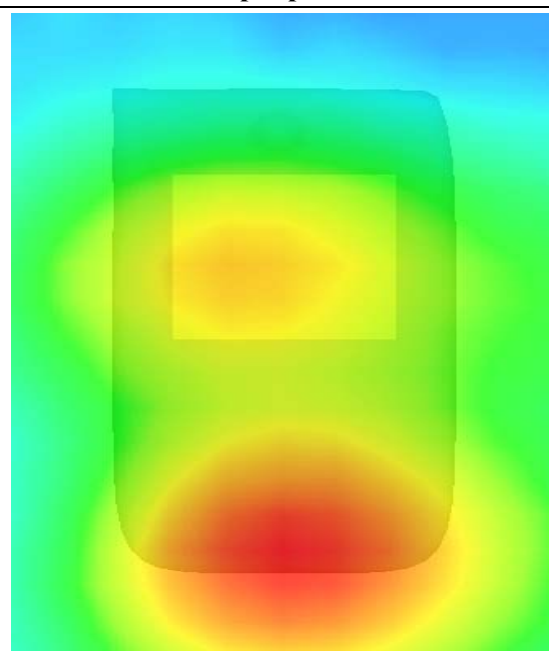

# MEASUREMENT 54

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 10 seconds


## A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	802.11B
<b>Channels</b>	Low
<b>Signal</b>	DSSS

## B. SAR Measurement Results

Lower Band SAR (Channel 1)

<b>Frequency (MHz)</b>	2412.000000
<b>Relative permittivity (real part)</b>	52.548876
<b>Relative permittivity</b>	15.500000
<b>Conductivity (S/m)</b>	1.974257
<b>Power drift (%)</b>	-1.520000
<b>Ambient Temperature:</b>	22.0°C
<b>Liquid Temperature:</b>	21.8°C
<b>ConvF:</b>	39.772,33.946,37.835
<b>Crest factor:</b>	1:1

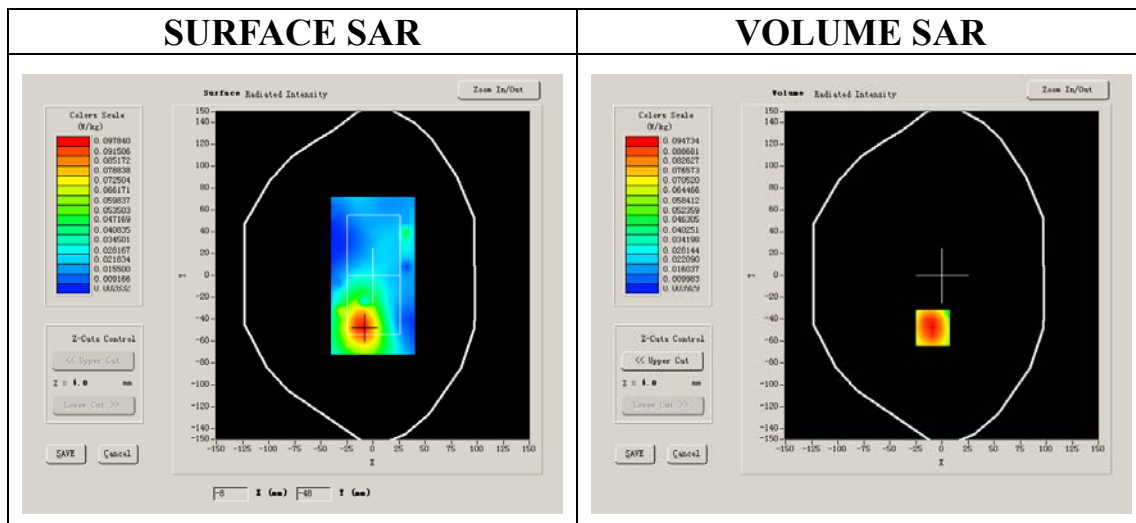


**Maximum location: X=-9.00, Y=-48.00**

<b>SAR 10g (W/Kg)</b>	0.068440
<b>SAR 1g (W/Kg)</b>	0.098294


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.1032	0.0773	0.0568	0.0424	0.0337	0.0260


**SAR, Z Axis Scan (X = -9, Y = -48)**

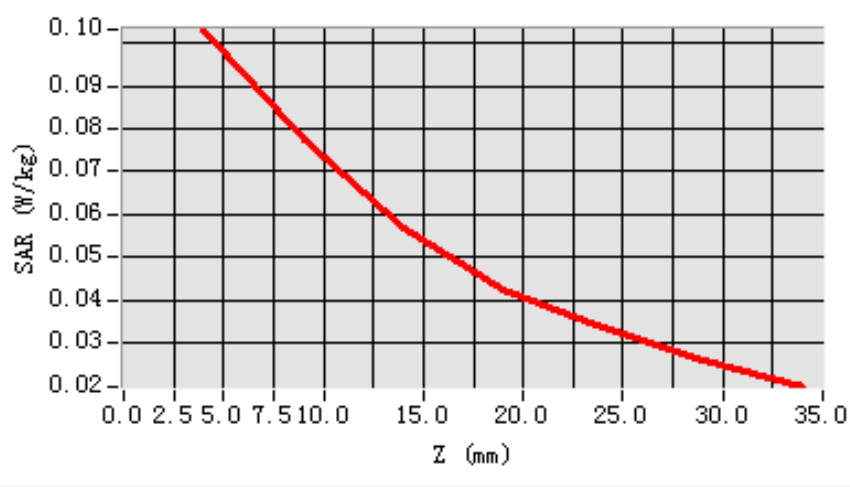

**3D scen shot**

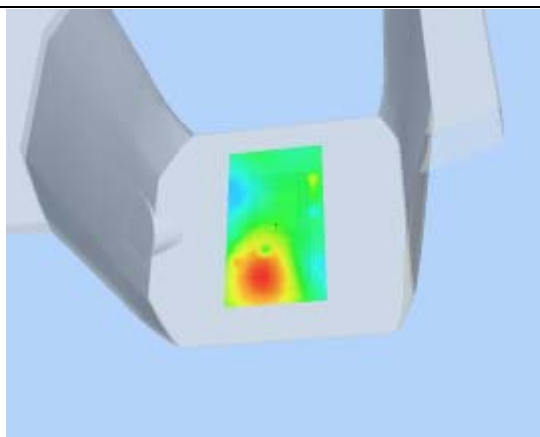

**Hot spot position**

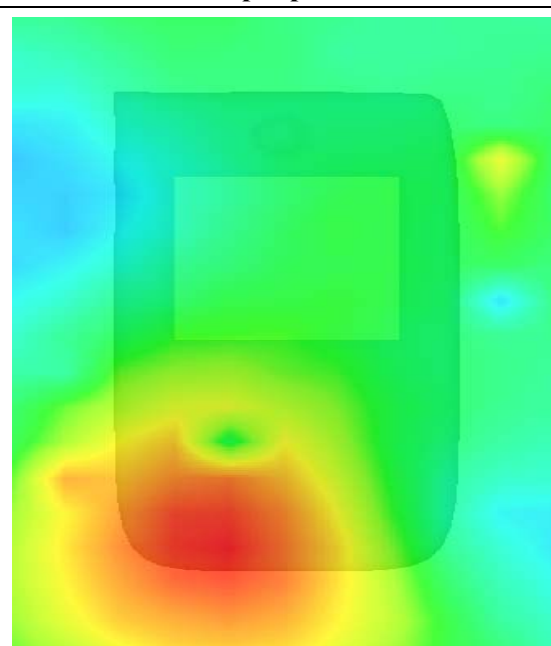

## MEASUREMENT 55

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 10 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	802.11B
<b>Channels</b>	Low
<b>Signal</b>	DSSS

### B. SAR Measurement Results


Lower Band SAR (Channel 1)

<b>Frequency (MHz)</b>	2412.000000
<b>Relative permittivity (real part)</b>	52.548876
<b>Relative permittivity</b>	15.500000
<b>Conductivity (S/m)</b>	1.974257
<b>Power drift (%)</b>	-1.360000
<b>Ambient Temperature:</b>	22.0°C
<b>Liquid Temperature:</b>	21.8°C
<b>ConvF:</b>	39.772,33.946,37.835
<b>Crest factor:</b>	1:1

#### SURFACE SAR

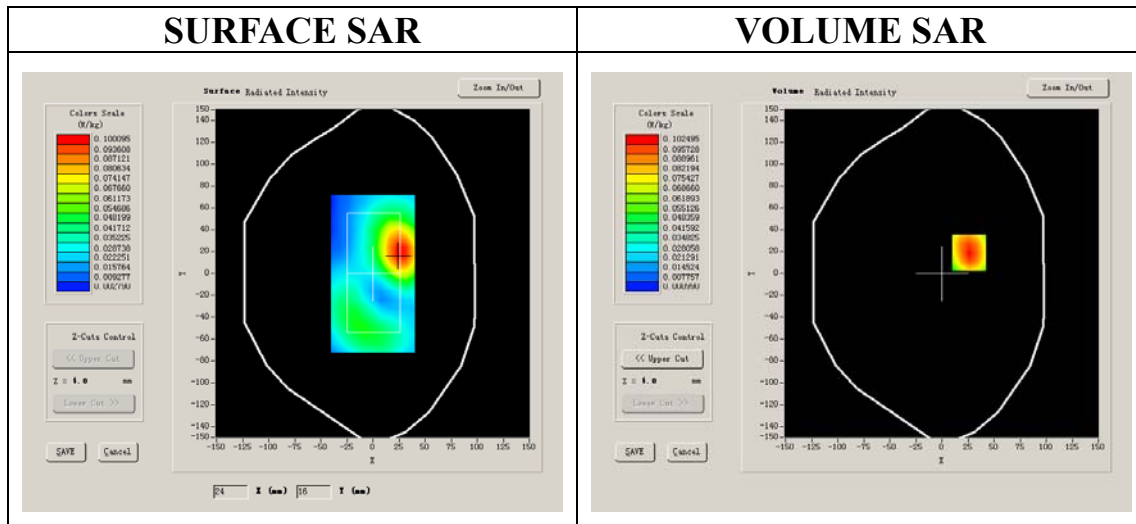

#### VOLUME SAR

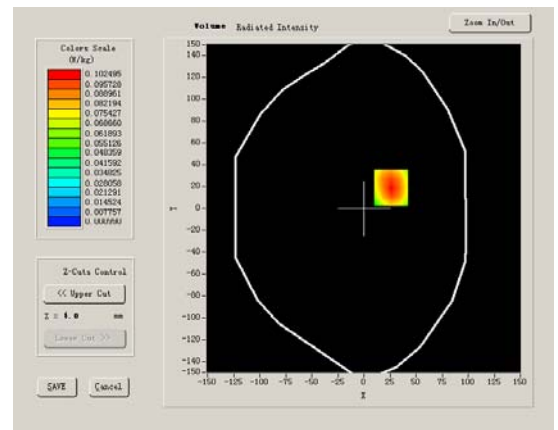


**Maximum location: X=26.00, Y=19.00**

<b>SAR 10g (W/Kg)</b>	0.058550
<b>SAR 1g (W/Kg)</b>	0.106529


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.1116	0.0560	0.0306	0.0160	0.0087	0.0048


**SAR, Z Axis Scan (X = 26, Y = 19)**

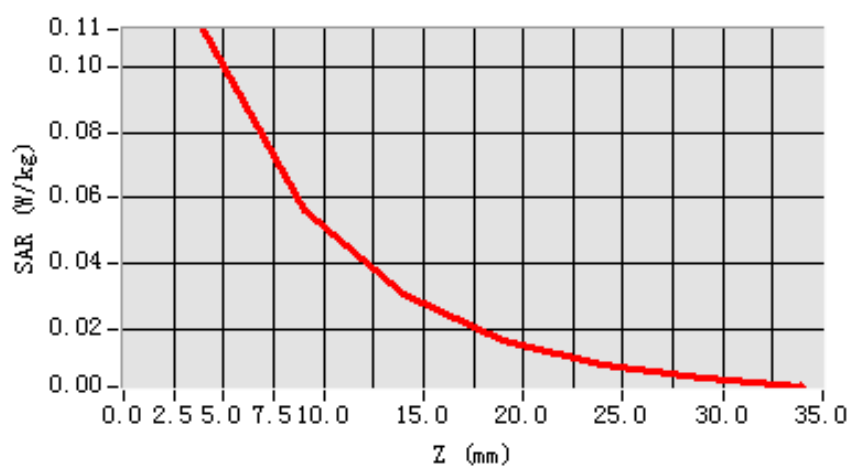

**3D scen shot**

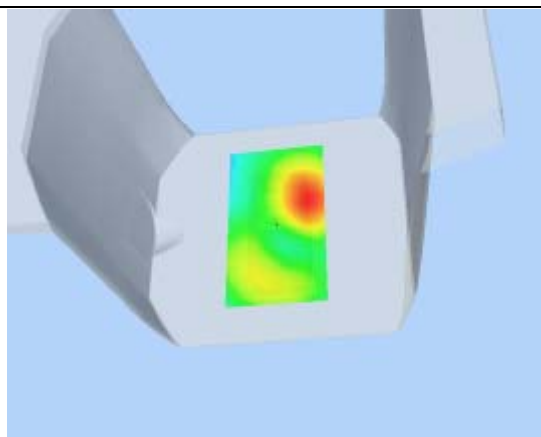

**Hot spot position**

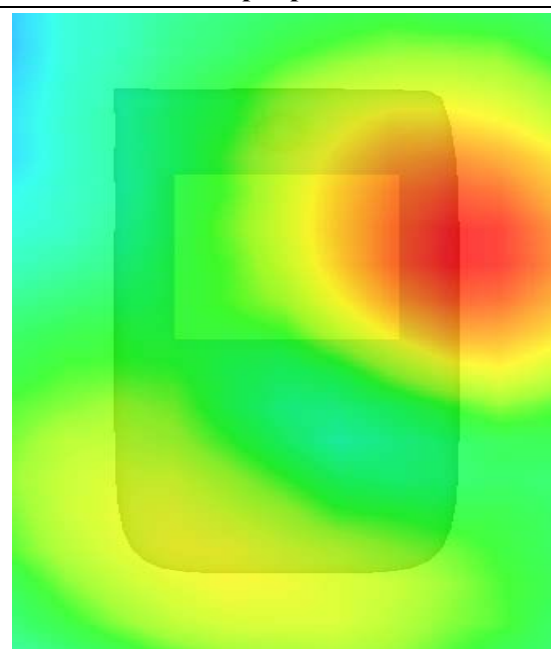



## MEASUREMENT 56

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 10 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	802.11B
<b>Channels</b>	Low
<b>Signal</b>	DSSS

### B. SAR Measurement Results

Lower Band SAR (Channel 1)

<b>Frequency (MHz)</b>	2412.000000
<b>Relative permittivity (real part)</b>	52.548876
<b>Relative permittivity</b>	15.500000
<b>Conductivity (S/m)</b>	1.974257
<b>Power drift (%)</b>	-1.090000
<b>Ambient Temperature:</b>	22.0°C
<b>Liquid Temperature:</b>	21.8°C
<b>ConvF:</b>	39.772,33.946,37.835
<b>Crest factor:</b>	1:1

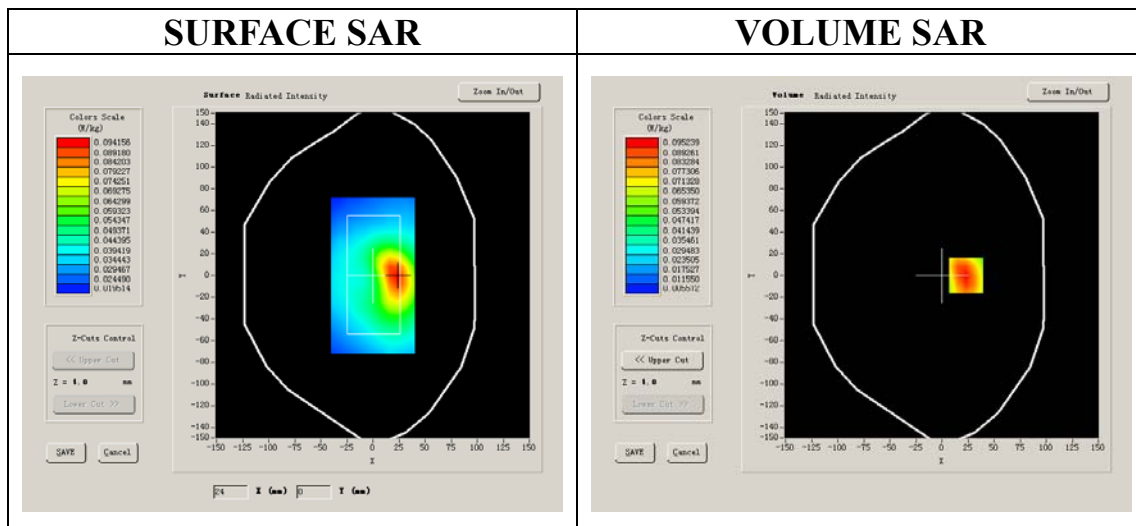


**Maximum location: X=23.00, Y=0.00**

<b>SAR 10g (W/Kg)</b>	0.068229
<b>SAR 1g (W/Kg)</b>	0.109468


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.1143	0.0712	0.0453	0.0299	0.0203	0.0137


**SAR, Z Axis Scan (X = 23, Y = 0)**

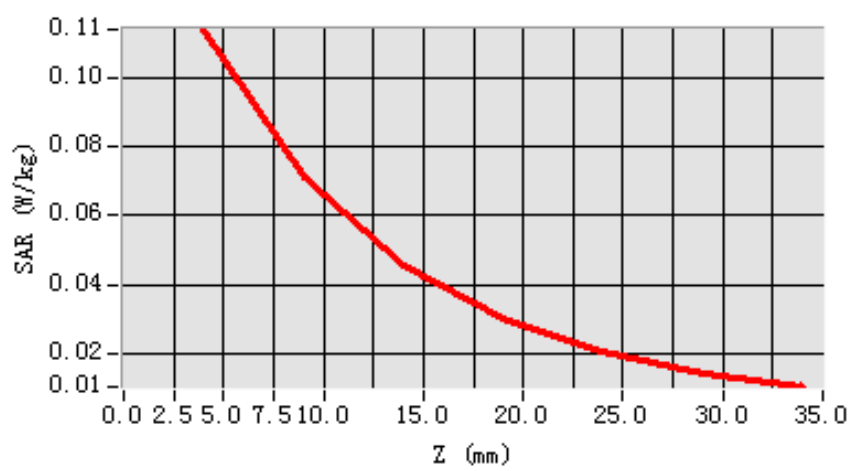

**3D scene shot**

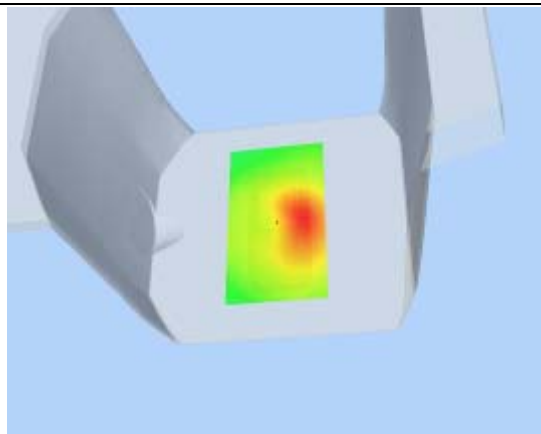

**Hot spot position**

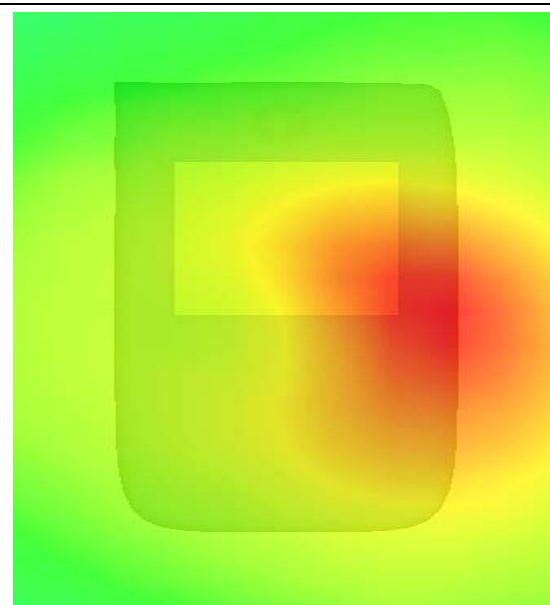

## MEASUREMENT 57

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 10 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Body
<b>Band</b>	802.11B
<b>Channels</b>	Low
<b>Signal</b>	DSSS

### B. SAR Measurement Results

Lower Band SAR (Channel 1)

<b>Frequency (MHz)</b>	2412.000000
<b>Relative permittivity (real part)</b>	52.548876
<b>Relative permittivity</b>	15.500000
<b>Conductivity (S/m)</b>	1.974257
<b>Power drift (%)</b>	-0.290000
<b>Ambient Temperature:</b>	22.0°C
<b>Liquid Temperature:</b>	21.8°C
<b>ConvF:</b>	39.772,33.946,37.835
<b>Crest factor:</b>	1:1


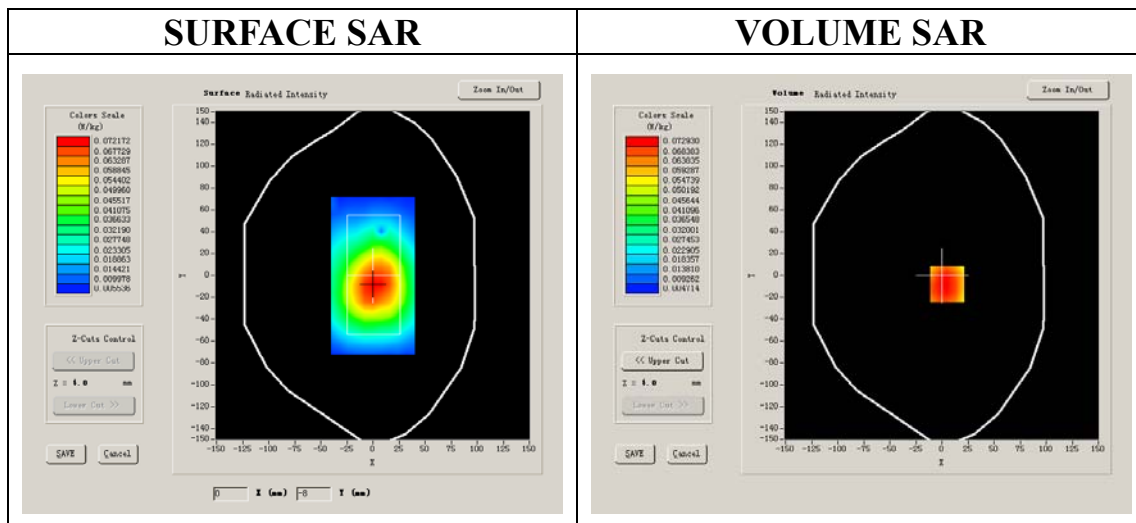


**Maximum location: X=5.00, Y=-8.00**

<b>SAR 10g (W/Kg)</b>	0.059902
<b>SAR 1g (W/Kg)</b>	0.080876

**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	0.0799	0.0670	0.0523	0.0433	0.0352	0.0269

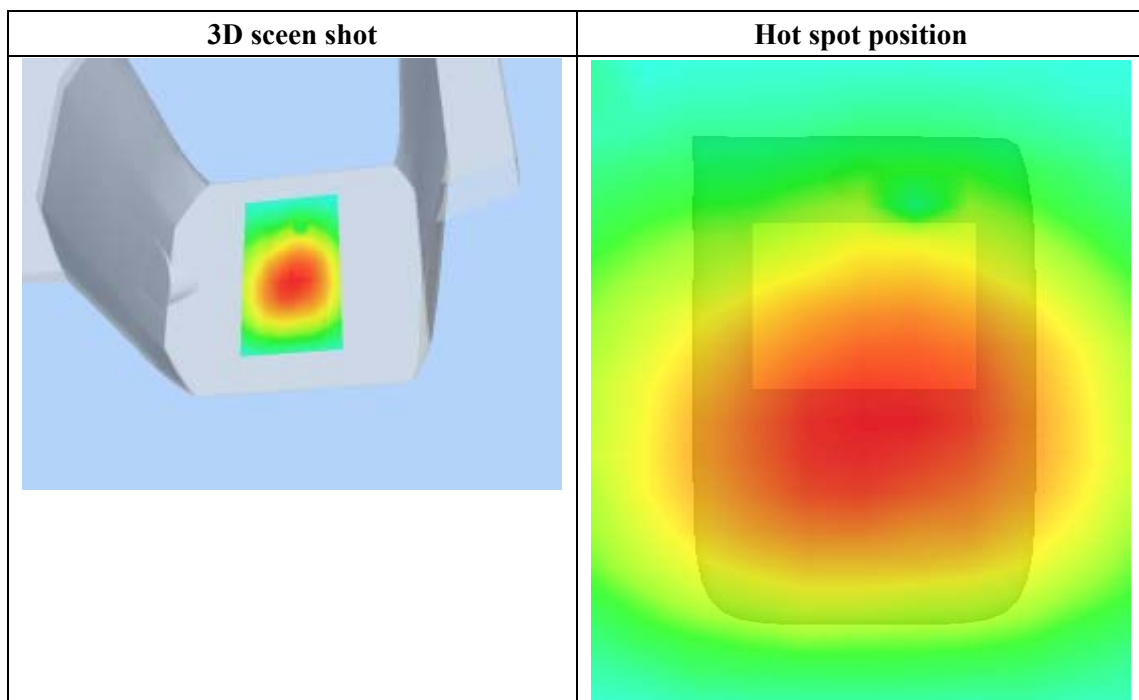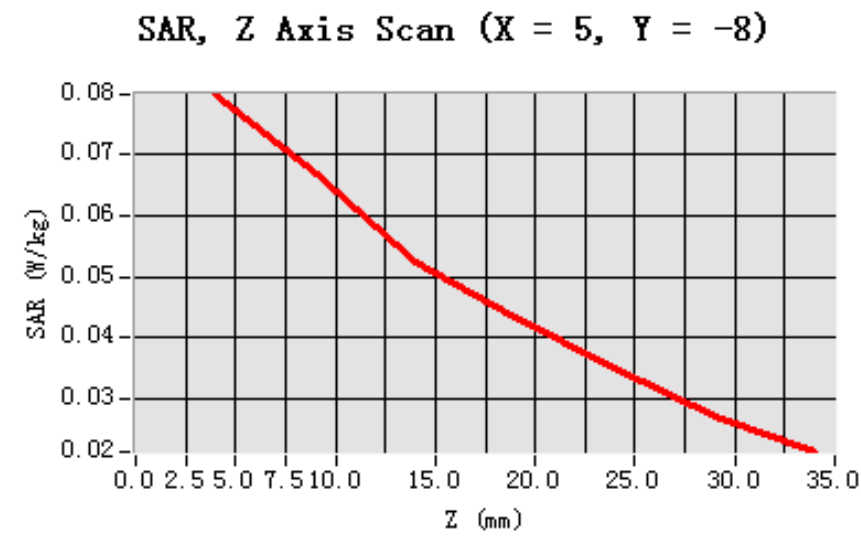

## System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 13 minutes 27 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	
<b>Band</b>	835MHz
<b>Channels</b>	
<b>Signal</b>	CW

### B. SAR Measurement Results

#### Band SAR

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	41.675999
<b>Relative permittivity</b>	15.070000
<b>Conductivity (S/m)</b>	0.894409
<b>Power drift (%)</b>	-0.050000
<b>Ambient Temperature:</b>	22.4°C
<b>Liquid Temperature:</b>	21.5°C
<b>ConvF:</b>	28.479,25.214,27.196
<b>Crest factor:</b>	1:1

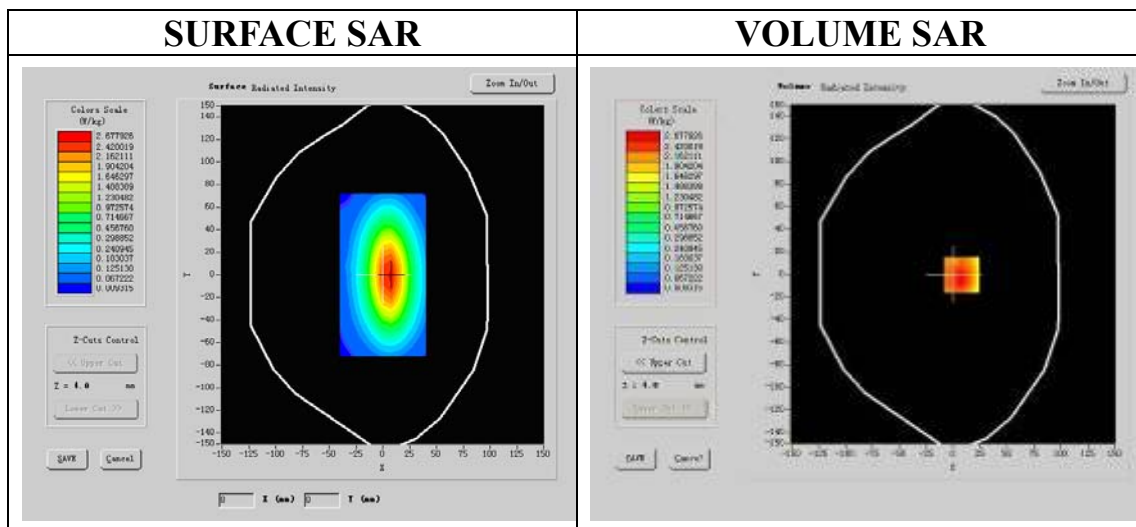


**Maximum location: X=5.00, Y=1.00**


<b>SAR 10g (W/Kg)</b>	1.685732
<b>SAR 1g (W/Kg)</b>	2.478462

**Z Axis Scan**


<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>2.4754</b>	<b>1.2251</b>	<b>0.5257</b>	<b>0.2114</b>

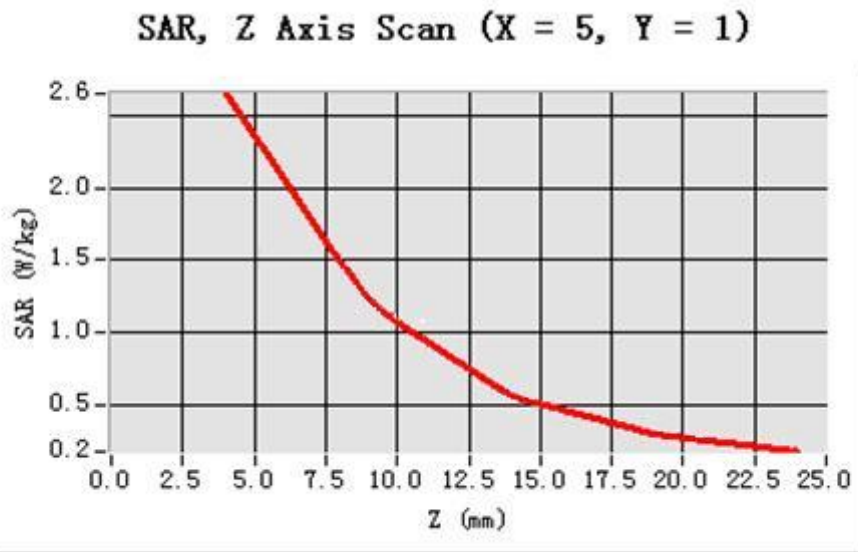

**3D scen shot**

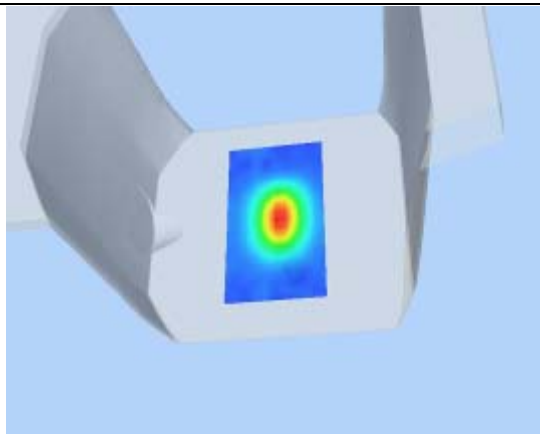

**Hot spot position**

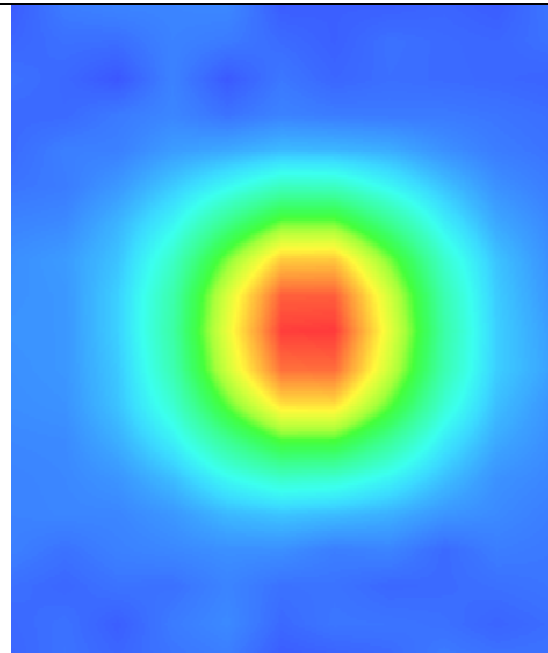

## System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 13 minutes 27 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	
<b>Band</b>	835MHz
<b>Channels</b>	
<b>Signal</b>	CW

### B. SAR Measurement Results


#### Band SAR

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	55.709999
<b>Relative permittivity</b>	21.709999
<b>Conductivity (S/m)</b>	0.9809033
<b>Power drift (%)</b>	-0.170000
<b>Ambient Temperature:</b>	22.4°C
<b>Liquid Temperature:</b>	21.5°C
<b>ConvF:</b>	28.559,25.681,27.588
<b>Crest factor:</b>	1:1

#### SURFACE SAR

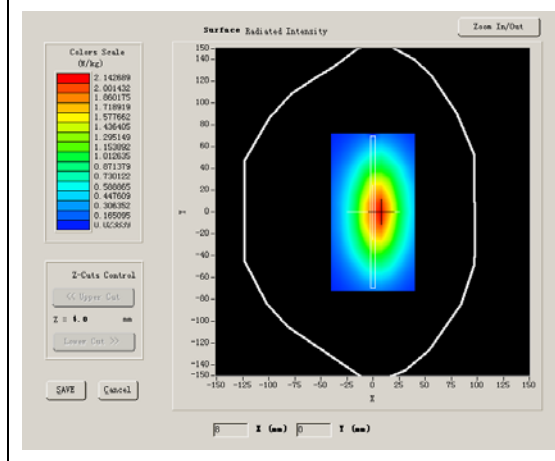

#### VOLUME SAR

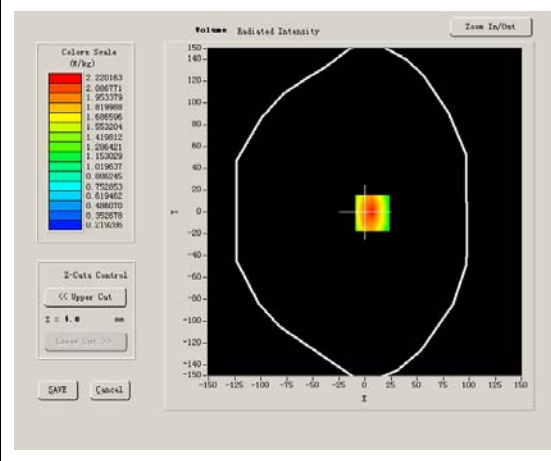


**Maximum location: X=7.00, Y=-1.00**

<b>SAR 10g (W/Kg)</b>	1.539476
<b>SAR 1g (W/Kg)</b>	2.385979


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5209	1.6629	1.1437	0.8075	0.5889	0.4143


**SAR, Z Axis Scan (X = 7, Y = -1)**

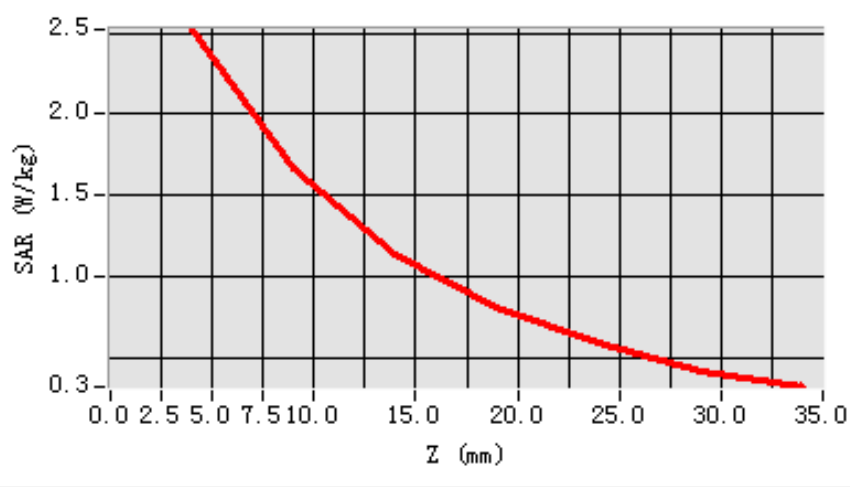

**3D scen shot**

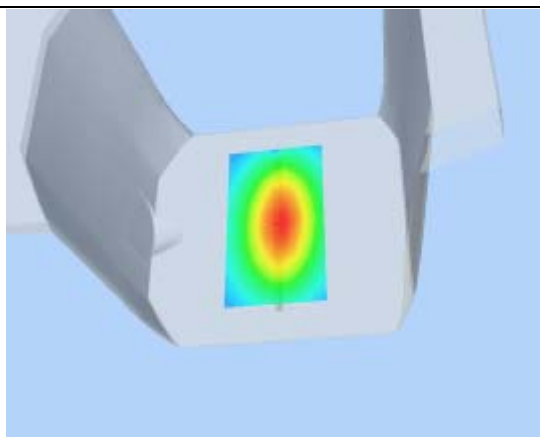

**Hot spot position**

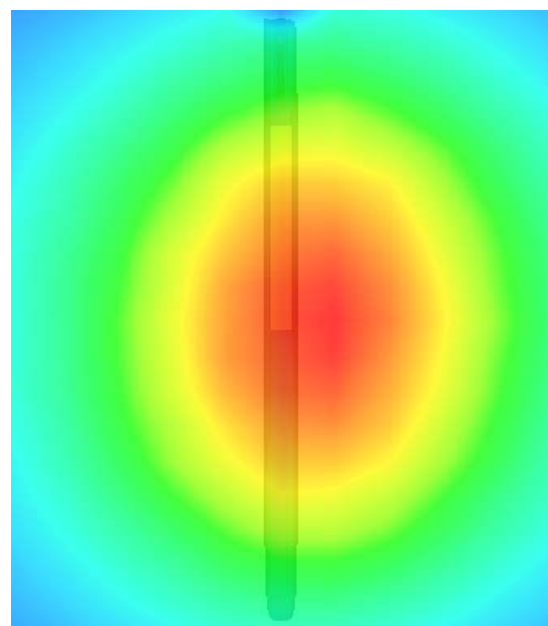



## System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 13 minutes 27 seconds


### A. Experimental conditions.

<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	
<b>Band</b>	1900MHz
<b>Channels</b>	
<b>Signal</b>	CW

### B. SAR Measurement Results

#### Band SAR

<b>Frequency (MHz)</b>	1900.000000
<b>Relative permittivity (real part)</b>	38.509998
<b>Relative permittivity</b>	15.070000
<b>Conductivity (S/m)</b>	1.436111
<b>Power drift (%)</b>	-0.140000
<b>Ambient Temperature:</b>	22.3°C
<b>Liquid Temperature:</b>	22.6°C
<b>ConvF:</b>	40.136,34.843,38.721
<b>Crest factor:</b>	1:1

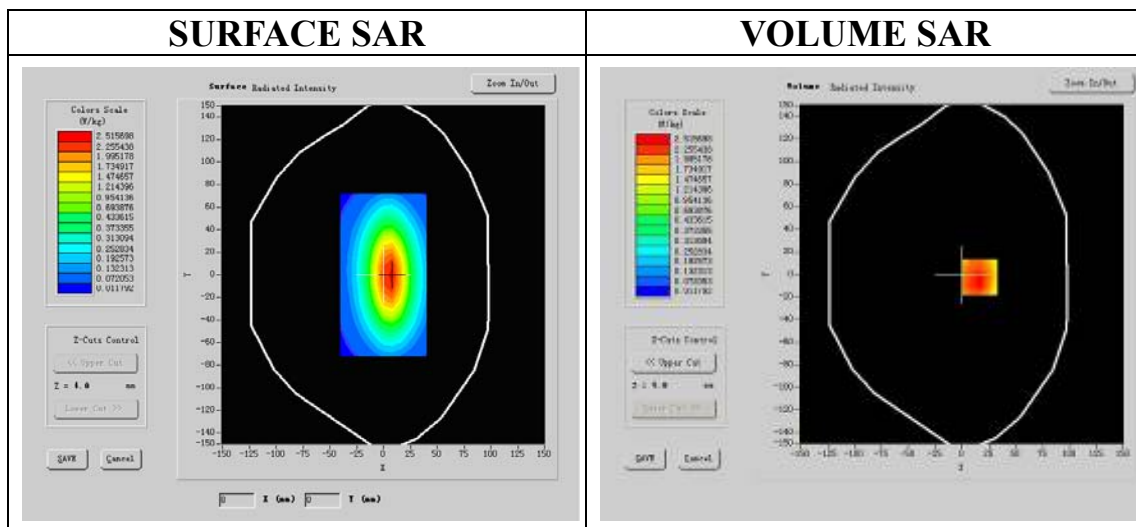


**Maximum location: X=-1.00, Y=-50.00**

<b>SAR 10g (W/Kg)</b>	4.884149
<b>SAR 1g (W/Kg)</b>	9.454628


**Z Axis Scan**

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>9.4148</b>	<b>7.3955</b>	<b>6.3646</b>	<b>4.3955</b>


**SAR, Z Axis Scan (X = -1, Y = -50)**

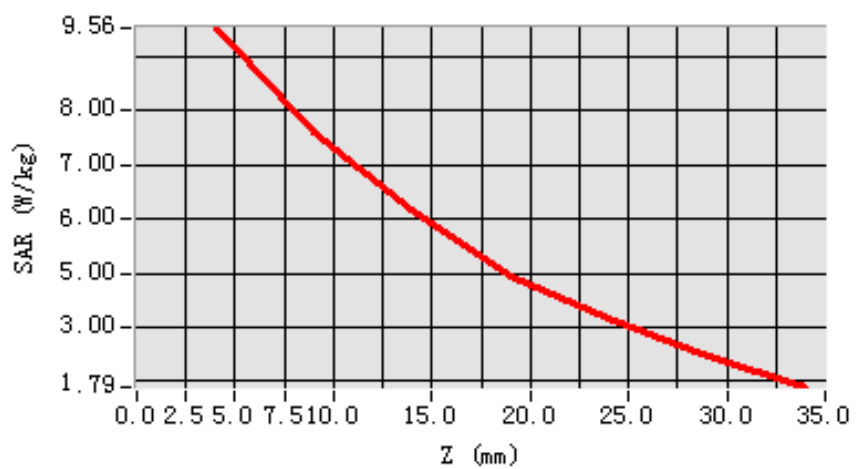

**3D scen shot**

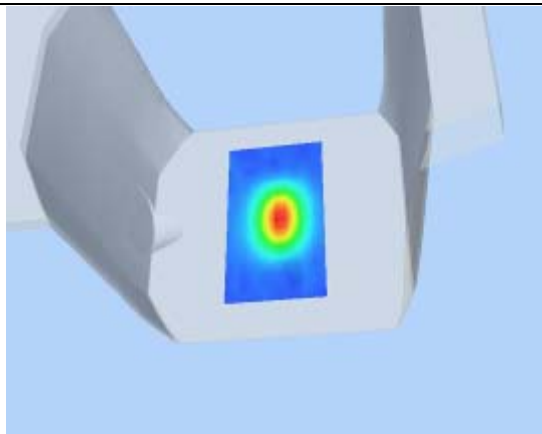

**Hot spot position**

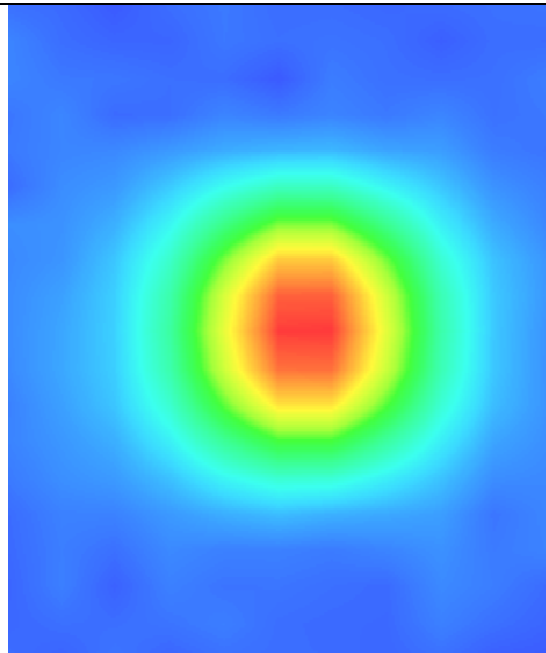

## System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 13 minutes 26 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	
<b>Band</b>	1900MHz
<b>Channels</b>	
<b>Signal</b>	CW

### B. SAR Measurement Results


#### Band SAR

<b>Frequency (MHz)</b>	1900.000000
<b>Relative permittivity (real part)</b>	52.548876
<b>Relative permittivity</b>	14.070000
<b>Conductivity (S/m)</b>	1.553978
<b>Power drift (%)</b>	-0.030000
<b>Ambient Temperature:</b>	22.3°C
<b>Liquid Temperature:</b>	22.6°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:1

#### SURFACE SAR

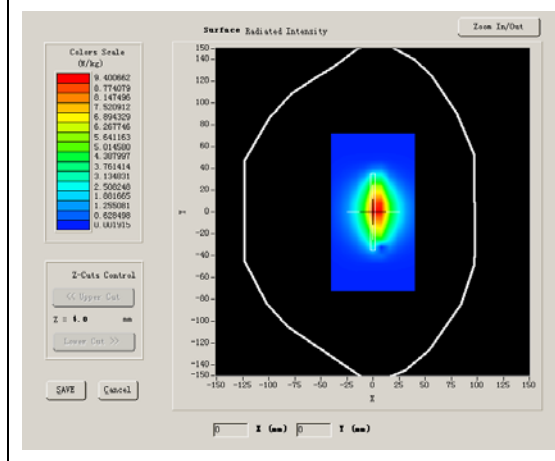

#### VOLUME SAR

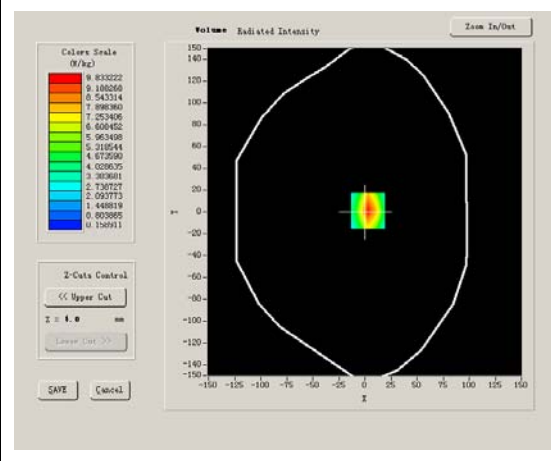


**Maximum location: X=3.00, Y=1.00**

<b>SAR 10g (W/Kg)</b>	4.981611
<b>SAR 1g (W/Kg)</b>	9.740177


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	10.0621	5.6445	3.6226	2.1642	1.4521	0.9078


**SAR, Z Axis Scan (X = 3, Y = 1)**

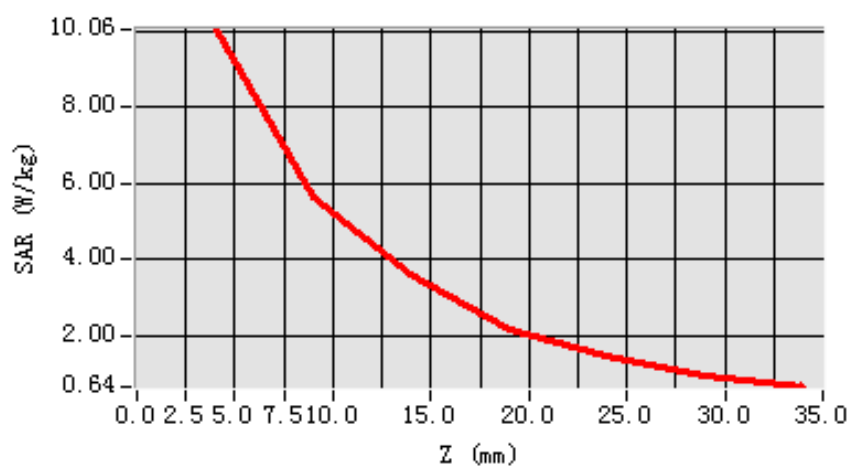

**3D scen shot**

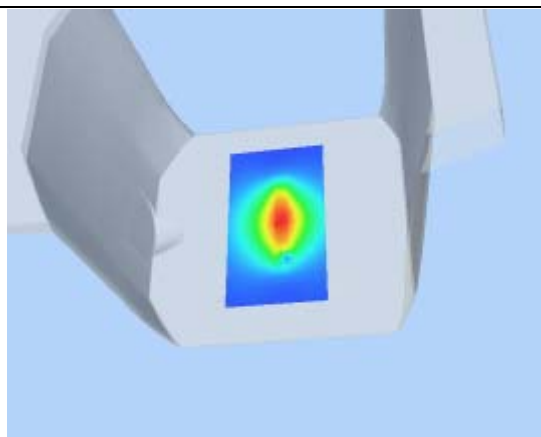

**Hot spot position**

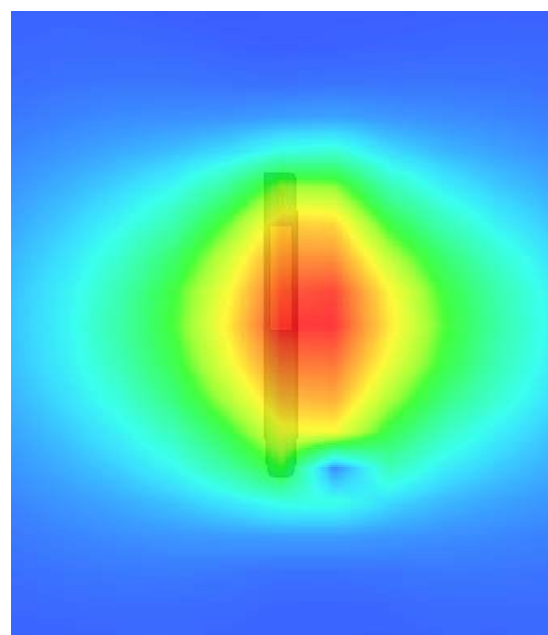

## System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 13 minutes 27 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	
<b>Band</b>	2450MHz
<b>Channels</b>	
<b>Signal</b>	CW

### B. SAR Measurement Results


#### Band SAR

<b>Frequency (MHz)</b>	2450.000000
<b>Relative permittivity (real part)</b>	39.622857
<b>Relative permittivity</b>	12.991650
<b>Conductivity (S/m)</b>	1.964313
<b>Power Drift (%)</b>	0.560000
<b>Ambient Temperature:</b>	22.0°C
<b>Liquid Temperature:</b>	21.8°C
<b>ConvF:</b>	39.563,33.614,37.677
<b>Crest factor:</b>	1:1

#### SURFACE SAR

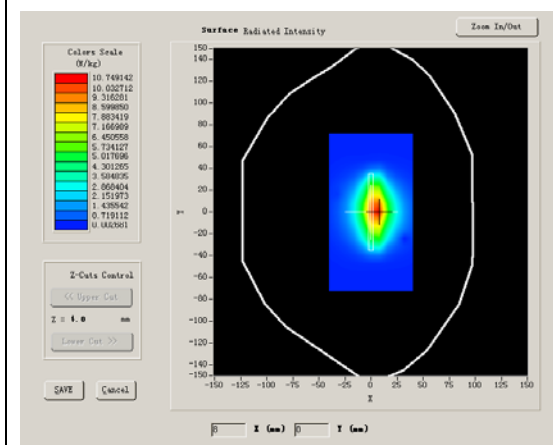

#### VOLUME SAR

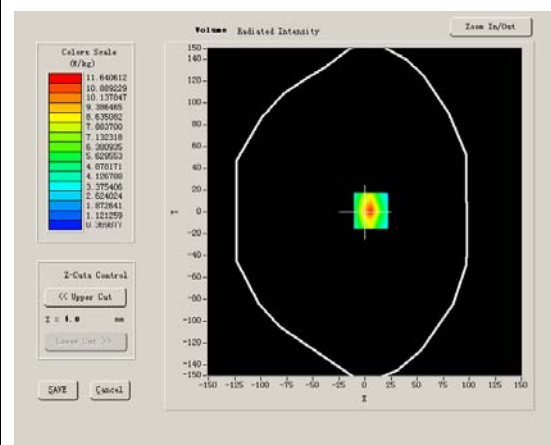


**Maximum location: X=6.00, Y=1.00**

<b>SAR 10g (W/Kg)</b>	5.938478
<b>SAR 1g (W/Kg)</b>	12.442675


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	12.7015	6.2096	3.8187	2.4504	1.5036	1.0219


**SAR, Z Axis Scan (X = 6, Y = 1)**

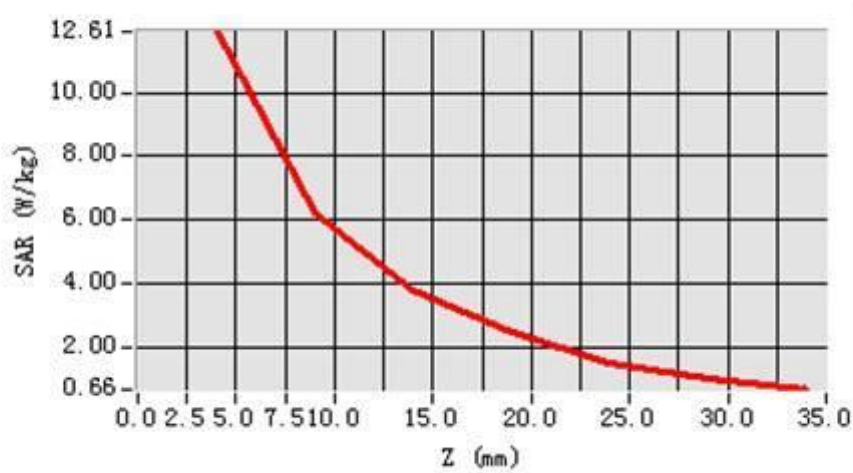

**3D scen shot**

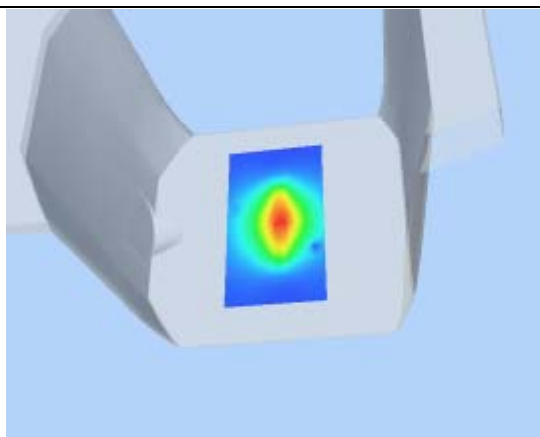

**Hot spot position**

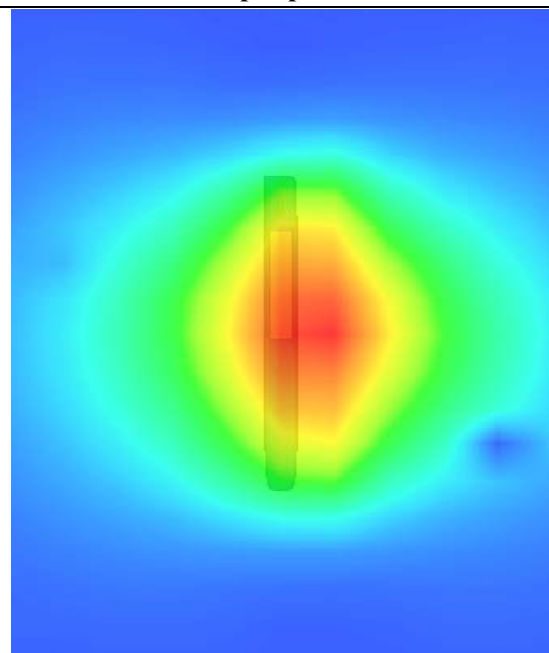

## System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 13 minutes 27 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	
<b>Band</b>	2450MHz
<b>Channels</b>	
<b>Signal</b>	CW

### B. SAR Measurement Results


#### Band SAR

<b>Frequency (MHz)</b>	2450.000000
<b>Relative permittivity (real part)</b>	52.548876
<b>Relative permittivity</b>	12.991650
<b>Conductivity (S/m)</b>	1.974257
<b>Power Drift (%)</b>	1.080000
<b>Ambient Temperature:</b>	22.0°C
<b>Liquid Temperature:</b>	21.8°C
<b>ConvF:</b>	39.772,33.946,37.835
<b>Crest factor:</b>	1:1

#### SURFACE SAR

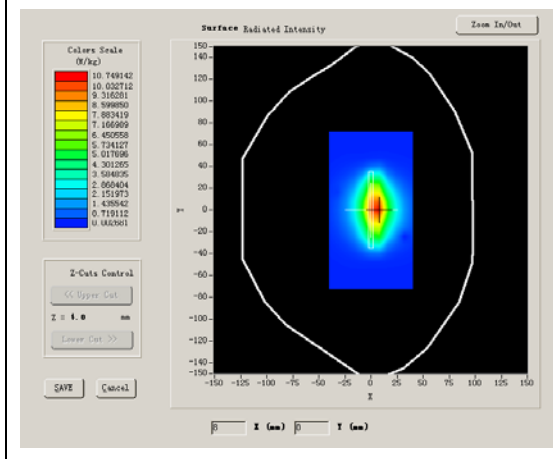

#### VOLUME SAR

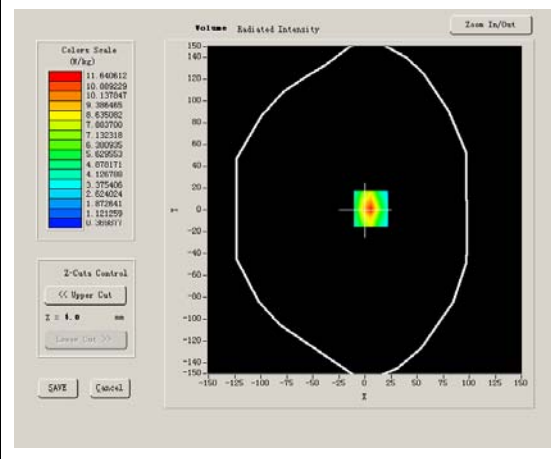


**Maximum location: X=-1.00, Y=-50.00**

<b>SAR 10g (W/Kg)</b>	6.256773
<b>SAR 1g (W/Kg)</b>	12.789110


**Z Axis Scan**

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.0000</b>	<b>13.1279</b>	<b>6.8312</b>	<b>3.5991</b>	<b>1.3473</b>


**SAR, Z Axis Scan (X = -1, Y = -50)**

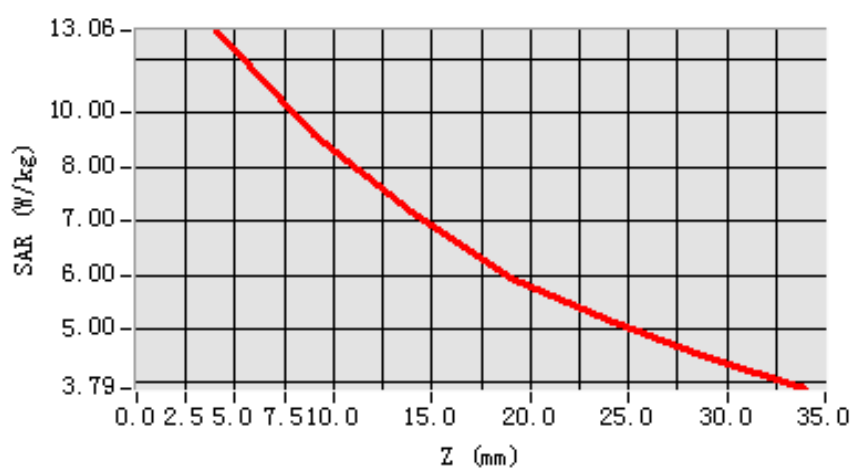

**3D scen shot**

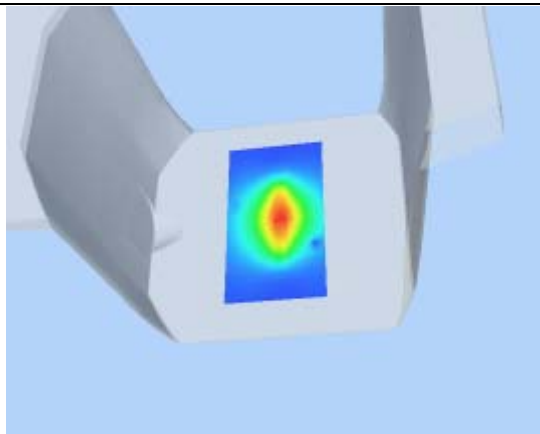

**Hot spot position**

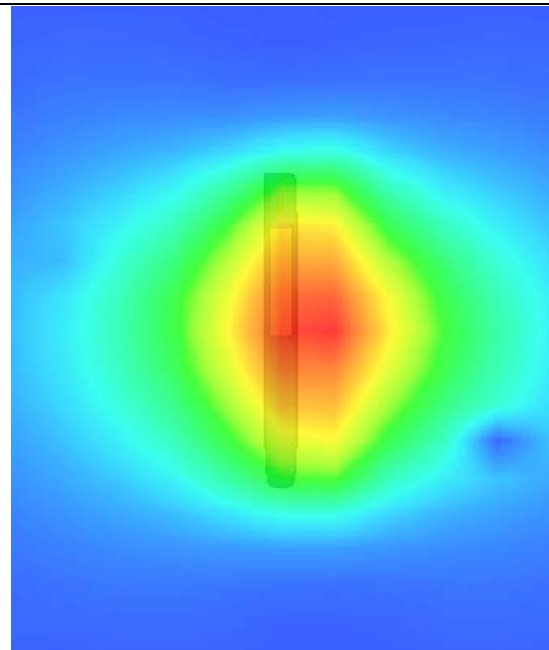



## System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 12/4/2012

Measurement duration: 13 minutes 27 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	
<b>Band</b>	1900MHz
<b>Channels</b>	
<b>Signal</b>	CW

### B. SAR Measurement Results


#### Band SAR

<b>Frequency (MHz)</b>	1900.000000
<b>Relative permittivity (real part)</b>	39.278972
<b>Relative permittivity</b>	15.070000
<b>Conductivity (S/m)</b>	1.453621
<b>Power drift (%)</b>	-0.140000
<b>Ambient Temperature:</b>	22.3°C
<b>Liquid Temperature:</b>	22.6°C
<b>ConvF:</b>	40.136,34.843,38.721
<b>Crest factor:</b>	1:1

#### SURFACE SAR

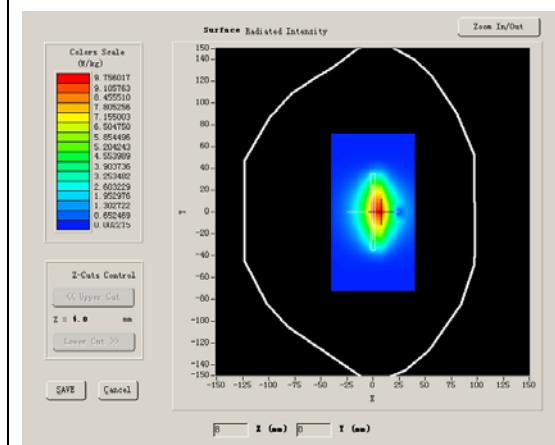

#### VOLUME SAR

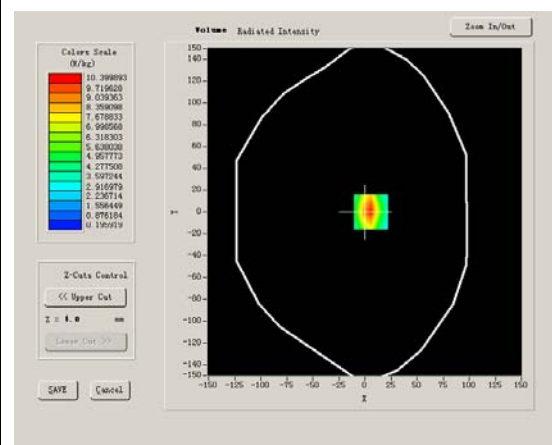


**Maximum location: X=6.00, Y=0.00**

<b>SAR 10g (W/Kg)</b>	5.385210
<b>SAR 1g (W/Kg)</b>	10.410243


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
<b>SAR (W/Kg)</b>	0.0000	10.6419	6.0043	3.7297	2.2606	1.5119	0.9792


**SAR, Z Axis Scan (X = 6, Y = 0)**

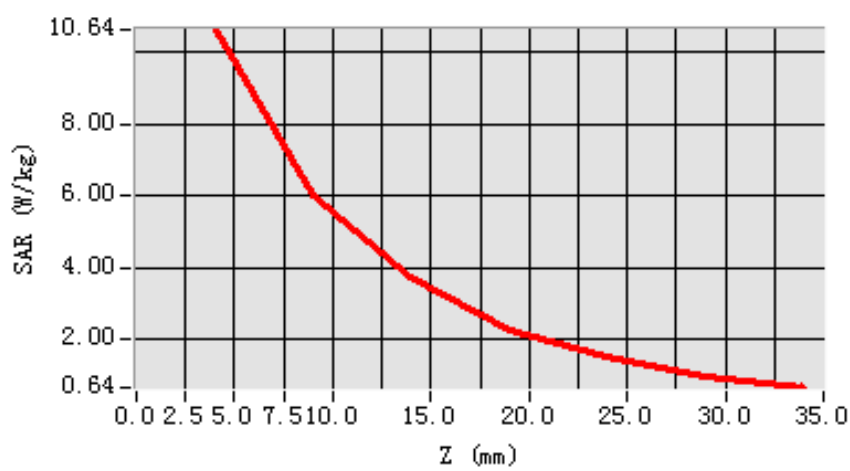

**3D scen shot**

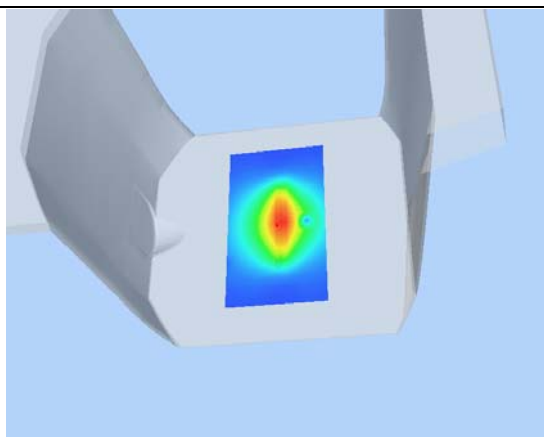

**Hot spot position**

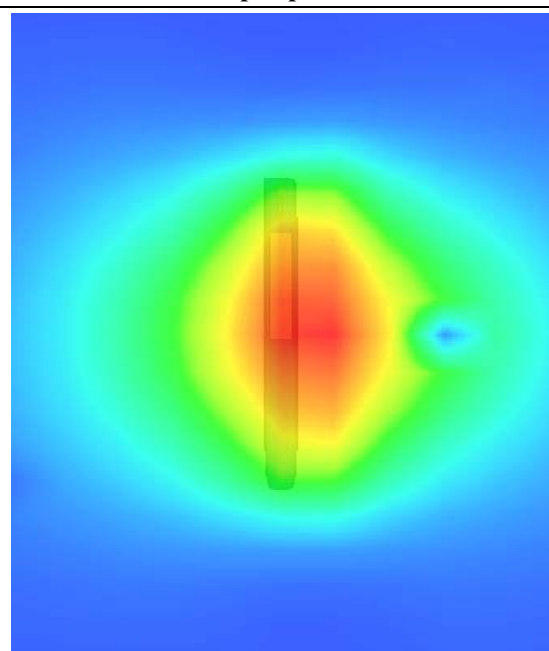

## System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 12/4/2012

Measurement duration: 13 minutes 26 seconds

### A. Experimental conditions.


<b>Phantom File</b>	surf_sam_plan.txt
<b>Phantom</b>	Validation plane
<b>Device Position</b>	
<b>Band</b>	1900MHz
<b>Channels</b>	
<b>Signal</b>	CW

### B. SAR Measurement Results


#### Band SAR

<b>Frequency (MHz)</b>	1900.000000
<b>Relative permittivity (real part)</b>	52.427771
<b>Relative permittivity</b>	14.070000
<b>Conductivity (S/m)</b>	1.516882
<b>Power drift (%)</b>	-0.030000
<b>Ambient Temperature:</b>	22.3°C
<b>Liquid Temperature:</b>	22.6°C
<b>ConvF:</b>	40.625,34.773,38.535
<b>Crest factor:</b>	1:1

#### SURFACE SAR

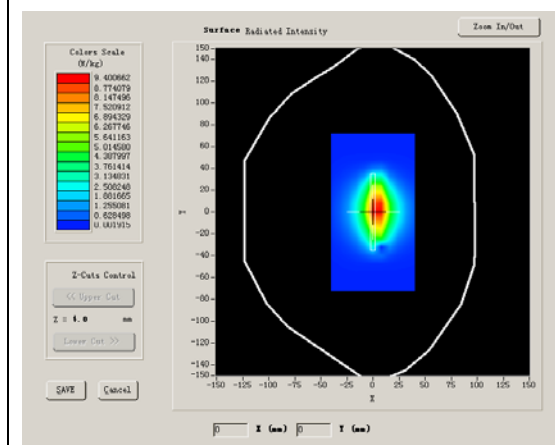

#### VOLUME SAR

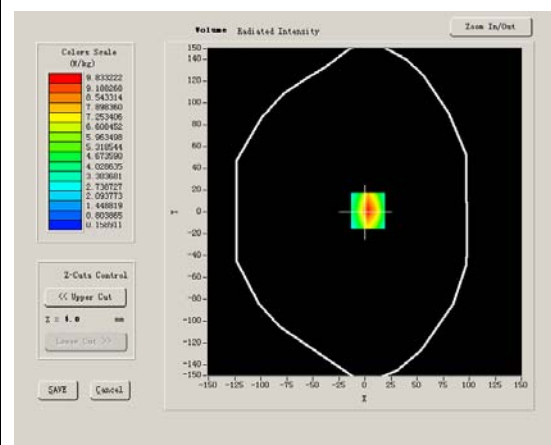


**Maximum location: X=3.00, Y=1.00**

<b>SAR 10g (W/Kg)</b>	4.981611
<b>SAR 1g (W/Kg)</b>	9.835148


**Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.0621	5.6445	3.6226	2.1642	1.4521	0.9078

**SAR, Z Axis Scan (X = 3, Y = 1)**

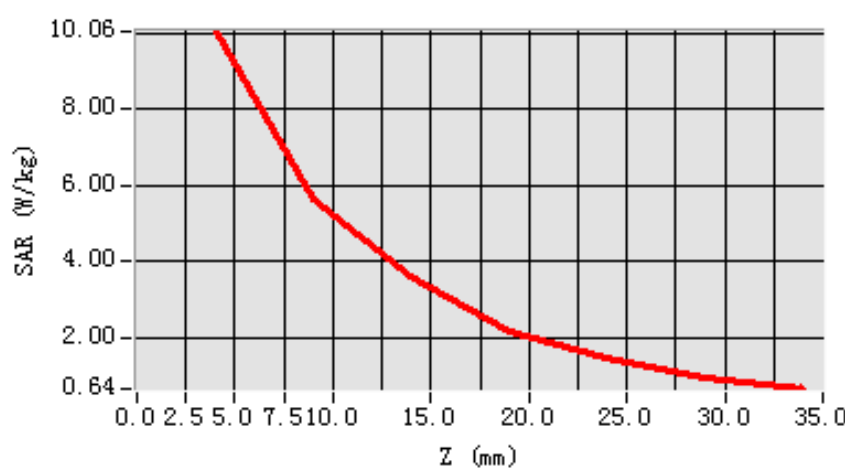

**3D scen shot**

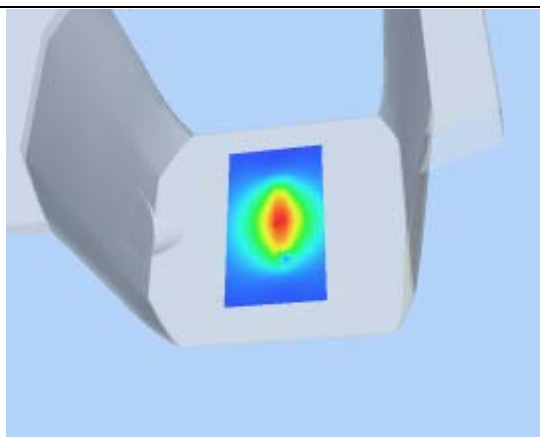

**Hot spot position**

