

The Photos of SAR test

No. I15Z41871-SEM01

For

Haier Telecom (Qingdao) Co., Ltd LTE Mobile phone Model name: L51 With Hardware Version: MP Software Version: HL-L51-H01-S01 FCC ID: SG71507L51

Issued Date: 2015-09-16



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.


Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191 Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504 Email:<u>cttl_terminals@catr.cn</u>, website:<u>www.chinattl.com</u>


©Copyright. All rights reserved by CTTL.




Picture 1: Constituents of the sample

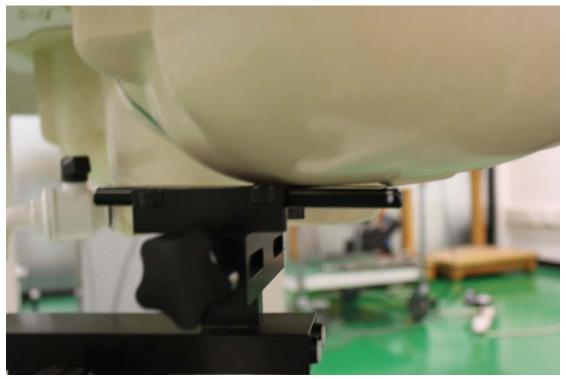


Picture 2: Left Hand Touch Cheek Position

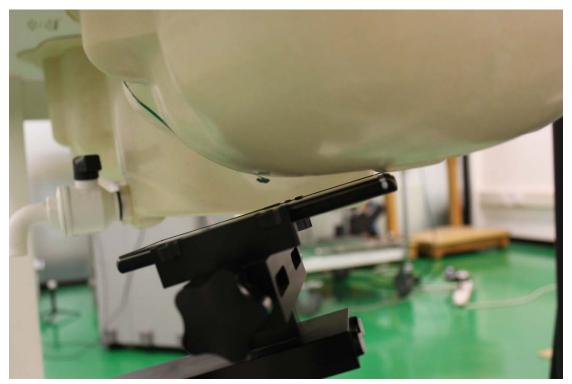

Picture 3: Left Hand Tilt 15° Position

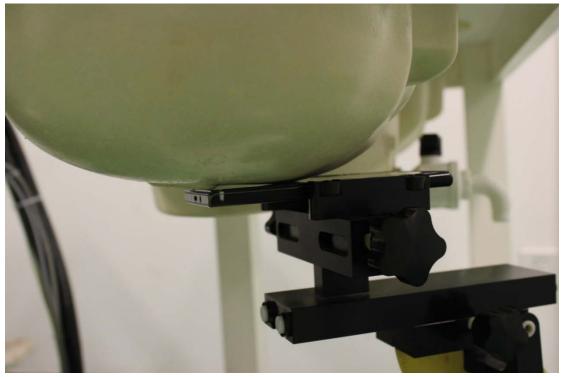


Picture 4: Right Hand Touch Cheek Position

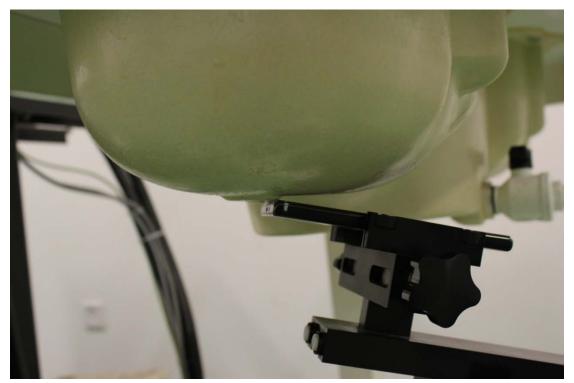

Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 5 test positions all with the distance =10mm between the EUT and the phantom bottom:

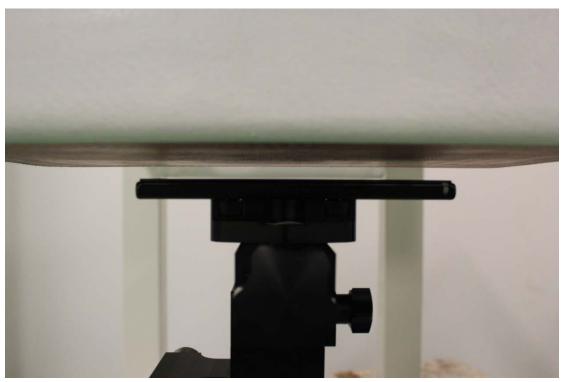


Picture 6: Front




Picture 7: Rear

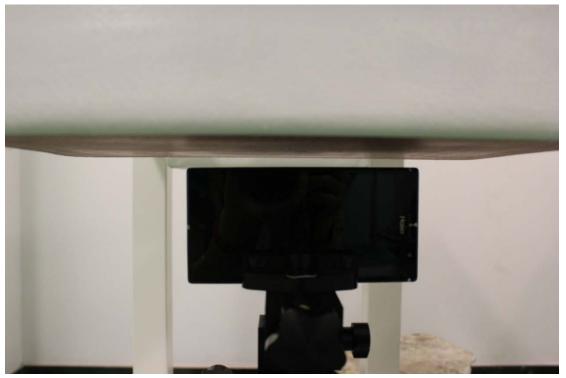

Picture 8: Left Edge

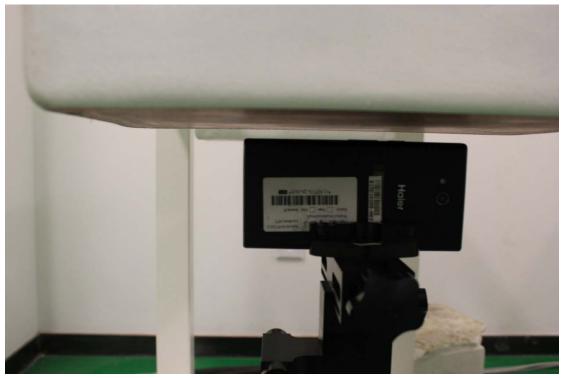

Picture 9: Right Edge

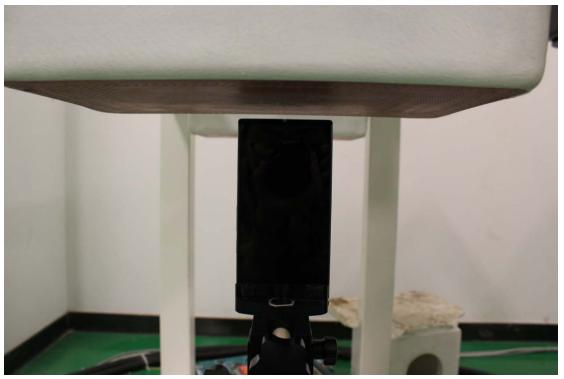

Picture 10: Bottom Edge