



EMC TEST REPORT

Report No.: SET2015-13970

Product Name: Mobile phone

FCC ID: SG720151015G31

Model No. : G31

Applicant: Haier Telecom (Qingdao) Co.,Ltd.

Address: No.1 Haier Road, Hi-tech Zone, Qingdao, China

Received Date: 2015-09-15

Tested Date: 2015-09-16—2015-09-25

Issued by: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **22** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 20 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name : Mobile phone

Model No. : G31

Applicant..... : Haier Telecom (Qingdao) Co.,Ltd.

Applicant Address..... : No.1 Haier Road, Hi-tech Zone, Qingdao, China

Manufacturer..... : Haier Telecom (Qingdao) Co.,Ltd.

Manufacturer Address : No.1 Haier Road, Hi-tech Zone, Qingdao, China

Test Standards..... : 47 CFR Part 15 Subpart B: Radio Frequency Devices

Test Result : PASS

Tested by : Xiaolong Zhang 2015.09.27
Xiaolong Zhang, Test Engineer

Reviewed by..... : Shuangwen Zhang 2015.09.27
Shuangwen Zhang, Senior Engineer

Approved by : Wu Li'an 2015.09.27
Wu Li'an, Manager



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Test Standards and Results5**
- 1.3 Facilities and Accreditations6**
 - 1.3.1 Facilities6
 - 1.3.2 Test Environment Conditions6
 - 1.3.3 Measurement Uncertainty6
- 2. TEST CONDITIONS SETTING.....7**
- 2.1 Test Peripherals7**
- 2.2 Test Mode7**
- 2.3 Test Setup and Equipments List.....8**
 - 2.3.1 Conducted Emission.....8
 - 2.3.2 Radiated Emission.....8
- 3. 47 CFR PART 15B REQUIREMENTS 11**
- 3.1 Conducted Emission 11**
 - 3.1.1 Requirement 11
 - 3.1.2 Test Description 11
 - 3.1.3 Test Result 11
- 3.2 Radiated Emission14**
 - 3.2.1 Requirement14
 - 3.2.2 Test Description 15
 - 3.2.3 Test Result 15
- 4. PHOTOGRAPHS OF THE EUT20**
- 5. PHOTOGRAPHS OF THE TEST SET-UP21**

| Change History | | |
|----------------|------------|-------------------|
| Issue | Date | Reason for change |
| 1.0 | 2015.09.27 | First edition |
| | | |
| | | |



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : Mobile phone
FCC ID : SG720151015G31
Trade Name : Haier
Brand Name : Haier
Hardware Version : H01
Software Version : V17_S72B_H01_S001
Power Supply : Battery
 Brand Name: Haier
 Model No.: H15370
 Capacitance: 2000 mAh
 Rated Voltage: 3.8V
 Charge Limit: 4.35V
Ancillary Equipment 1 : AC Adapter (Charger for Battery)
 Brand Name: Haier
 Model No.: YSN05100CE76
 Rated Input: 100-240V, 50/60Hz ,0.2A
 Rated Output: 5V=1000mA

Note 1: The EUT is a Mobile phone, it supports the following operating frequency band: GSM850/1900, WCDMA850/1900, GPS(only receiver), 802.11b, 802.11g, 802.11n20, 802.11n40, Bluetooth4.0.

Note 2: The EUT is equipped with a T-Flash card slot; equipped with a USB port which can be connected to the ancillary equipments.

Note 3: For a more detailed description, please refer to Specification or User’s Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

| No. | Identity | Document Title |
|-----|----------------------------------|-------------------------|
| 1 | 47 CFR Part 15 Subpart B 2014 | Radio Frequency Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section | Description | Result |
|-----|---------|--------------------|--------|
| 1 | 15.107 | Conducted Emission | PASS |
| 2 | 15.109 | Radiated Emission | PASS |

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2009.



1.3 Facilities and Accreditations

1.3.1 Facilities

CNAS-Lab Code: L1659

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

FCC-Registration No.: 406086

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, valid time is until October 28, 2017.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

| | |
|-----------------------------|--------------|
| Temperature (°C): | 15°C - 35°C |
| Relative Humidity (%): | 25% -75% |
| Atmospheric Pressure (kPa): | 86kPa-106kPa |

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

| | |
|------------------------------------|-------------------|
| Uncertainty of Conducted Emission: | Uc = 3.6 dB (k=2) |
| Uncertainty of Radiated Emission: | Uc = 4.5 dB (k=2) |



2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

| Description | Manufacturer | Model | Serial No. | FCCID /DOC |
|---------------|--------------|-------|------------|------------|
| Notebook | ThinkPad | E430C | A131101550 | / |
| Micro SD card | SanDisk | / | / | / |
| Mouse | deiog | / | / | DOC |

2.2 Test Mode

- (1) The first test mode


The EUT configuration of the emission tests is TransFlash Card + EUT + Battery + PC.

In this test mode, the EUT with a TransFlash Card embedded is connected with a PC via a USB cable supplied by applicant. During the measurement, the data is transmitting between the PC and the TransFlash Card of the EUT.

2.3 Test Setup and Equipments List

2.3.1 Conducted Emission

A. Test Setup:

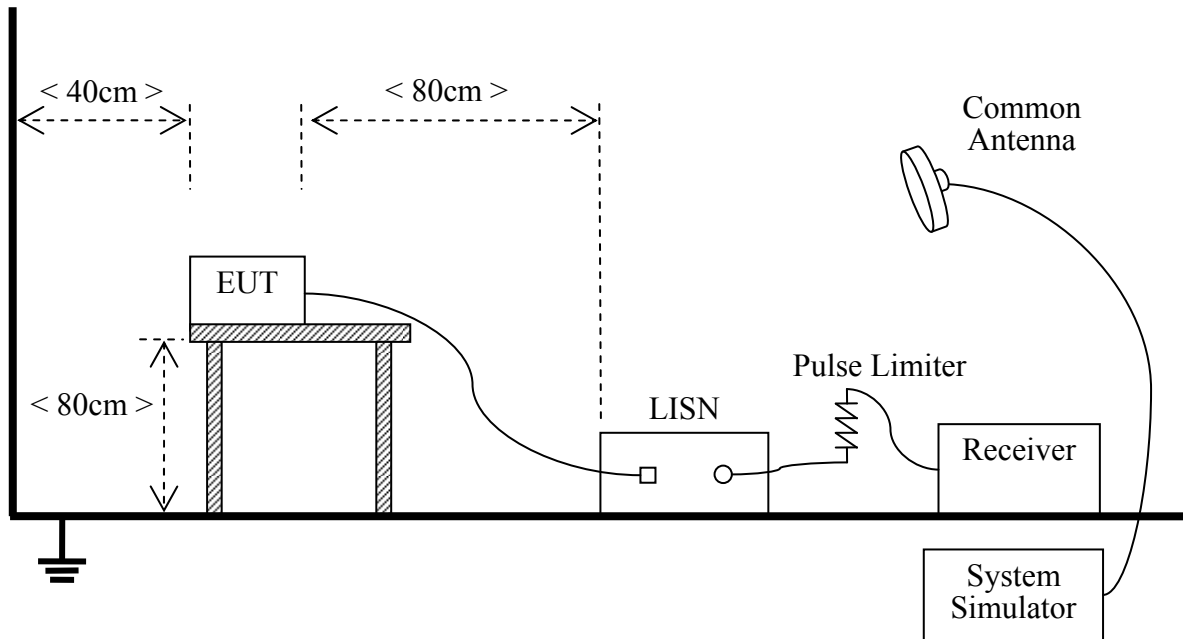

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

| Description | Manufacturer | Model | Serial No. | Calibration Date | Calibration Due. Date |
|---------------|---------------|--------|------------|------------------|-----------------------|
| Test Receiver | ROHDE&SCHWARZ | ESCI | A130901475 | 2015.09.09 | 2016.09.08 |
| LISN | ROHDE&SCHWARZ | ENV216 | / | 2015.04.28 | 2016.04.27 |
| Cable | MATCHING PAD | W7 | / | 2015.06.05 | 2016.06.04 |


2.3.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

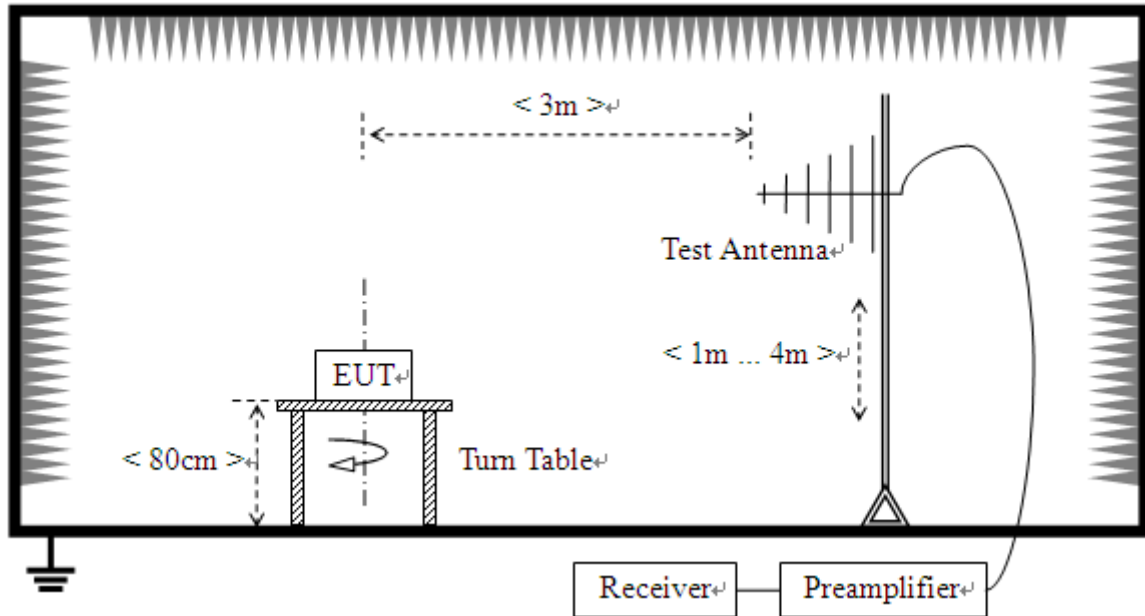

- 2) For radiated emissions above 1GHz

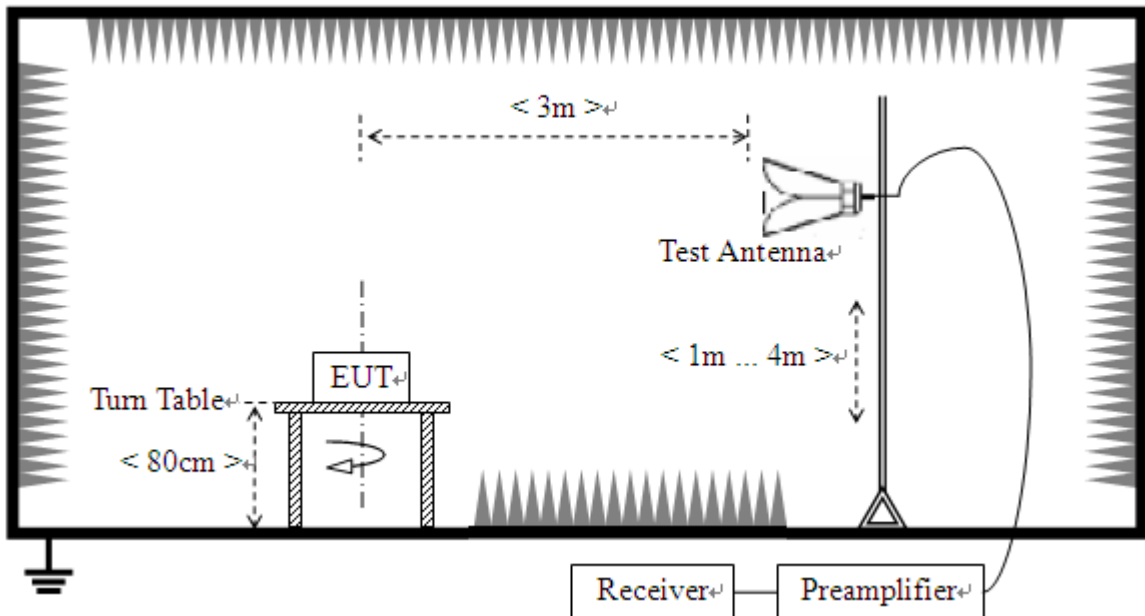

B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a



variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

| Description | Manufacturer | Model | Serial No. | Calibration Date | Calibration Due. Date |
|-----------------------|--------------------------------|-----------------------------|------------|------------------|-----------------------|
| Test Receiver | ROHDE&SCHWARZ | ESIB7 | A0501375 | 2015.06.10 | 2016.06.09 |
| Test Receiver | ROHDE&SCHWARZ | ESIB26 | A0304218 | 2015.06.10 | 2016.06.09 |
| Semi-Anechoic Chamber | Albatross | 9m*6m*6m | A0412372 | 2015.03.22 | 2016.03.21 |
| Test Antenna - Bi-Log | HP | CBL6111A | A9704202 | 2015.06.10 | 2016.06.09 |
| Test Antenna – Horn | ROHDE&SCHWARZ | HF906 | A0304225 | 2015.06.10 | 2016.06.09 |
| Anechoic Chamber | Albatross | SAC-5MAC 12.8x6.8x6.4m | A0304210 | 2015.03.22 | 2016.03.21 |
| Amplifier 1G~18GHz | ROHDE&SCHWARZ | MITEQ AFS42-001018 00 | A0509366 | 2015.06.10 | 2016.06.09 |
| Amplifier 20M~3GHz | Compliance Direction System | PAP-0203H | A0509377 | 2015.06.10 | 2016.06.09 |
| Cable | SUNHNER | SUCOFLEX 100 | / | 2015.06.10 | 2016.06.09 |
| Cable | SUNHNER | SUCOFLEX 104 | MY1758/4 | 2015.06.10 | 2016.06.09 |



3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

| Frequency range (MHz) | Conducted Limit (dB μ V) | |
|-----------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15 - 0.50 | 66 to 56 | 56 to 46 |
| 0.50 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

NOTE:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.


3.1.2 Test Description

See section 2.3.1 of this report.

3.1.3 Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

A. Test Plot and Suspicious Points:

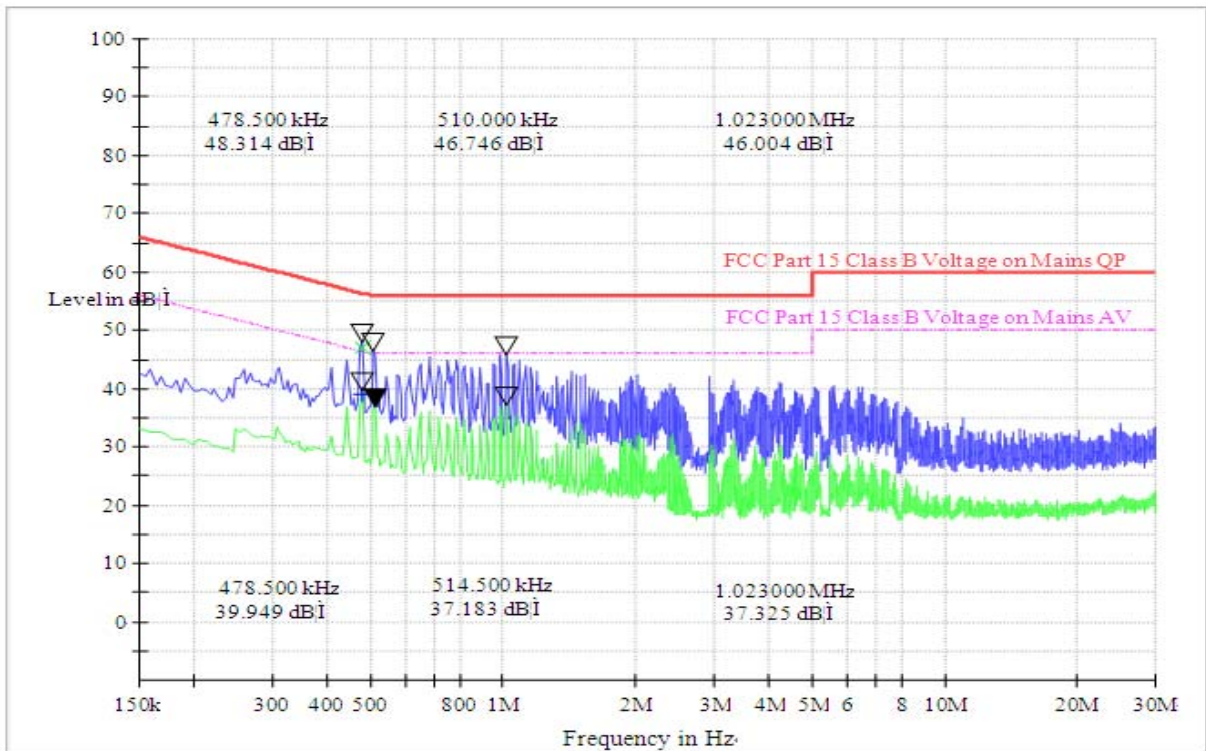

(Plot A: L Phase)

| Conducted Disturbance at Mains Terminals | | | | | | | |
|--|---------------|--------------------------|-------------|-----------------|---------------|--------------------------|-------------|
| L Test Data | | | | | | | |
| QP | | | | AV | | | |
| Frequency (MHz) | Limits (dBµV) | Measurement Value (dBµV) | Margin (dB) | Frequency (MHz) | Limits (dBµV) | Measurement Value (dBµV) | Margin (dB) |
| 0.4785 | 56.40 | 47.16 | 9.24 | 0.4785 | 46.40 | 38.26 | 8.14 |
| 0.5100 | 56.00 | 45.35 | 10.65 | 0.5100 | 46.00 | 36.34 | 9.66 |
| 1.0230 | 56.00 | 45.26 | 10.74 | 1.0230 | 46.00 | 36.12 | 9.88 |

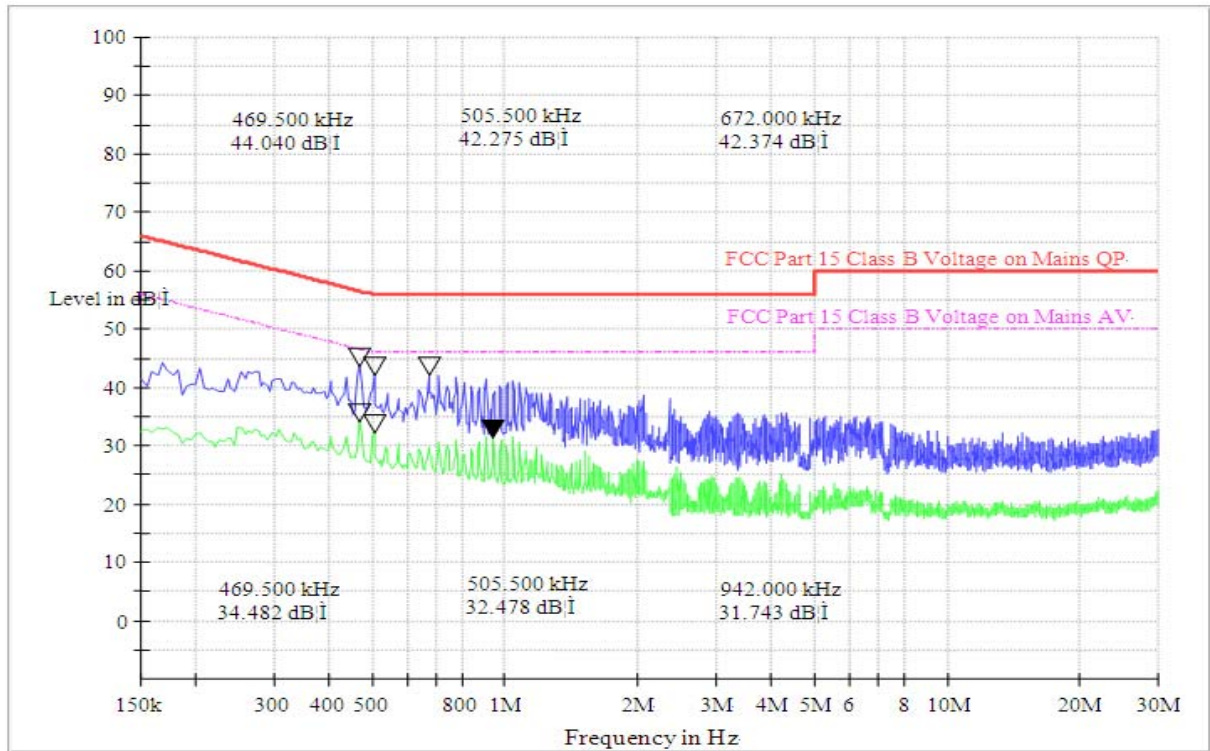

(Plot B: N Phase)

| Conducted Disturbance at Mains Terminals | | | | | | | |
|--|---------------|--------------------------|-------------|-----------------|---------------|--------------------------|-------------|
| N Test Data | | | | | | | |
| QP | | | | AV | | | |
| Frequency (MHz) | Limits (dBµV) | Measurement Value (dBµV) | Margin (dB) | Frequency (MHz) | Limits (dBµV) | Measurement Value (dBµV) | Margin (dB) |
| 0.4695 | 56.50 | 43.69 | 12.81 | 0.4695 | 46.50 | 33.64 | 12.86 |
| 0.5050 | 56.00 | 41.61 | 14.39 | 0.5050 | 46.00 | 31.67 | 14.33 |
| 0.6720 | 56.00 | 41.64 | 14.36 | 0.9420 | 46.00 | 30.29 | 15.71 |

Test Result: PASS



3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency range (MHz) | Field Strength | | Field Strength Limitation at 3m Measurement Dist | |
|-----------------------|----------------------|------|--|----------------------------------|
| | $\mu\text{V/m}$ | Dist | (uV/m) | (dBuV/m) |
| 0.009 - 0.490 | $2400/F(\text{kHz})$ | 300m | $10000 * 2400/F(\text{kHz})$ | $20\log 2400/F(\text{kHz}) + 80$ |
| 0.490 - 1.705 | $2400/F(\text{kHz})$ | 30m | $100 * 2400/F(\text{kHz})$ | $20\log 2400/F(\text{kHz}) + 40$ |
| 1.705 - 30.00 | 30 | 30m | $100 * 30$ | $20\log 30 + 40$ |
| 30.0 - 88.0 | 100 | 3m | 100 | $20\log 100$ |
| 88.0 - 216.0 | 150 | 3m | 150 | $20\log 150$ |
| 216.0 - 960.0 | 200 | 3m | 200 | $20\log 200$ |
| Above 960.0 | 500 | 3m | 500 | $20\log 500$ |

- a) As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- b) Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- c) For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- d) For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;PK detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by $20\log$ Emission Level(uV/m).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is 30uV/m , then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\text{uV/m} * (10)^2 = 100 * 30\text{uV/m}.$$



3.2.2 Test Description

See section 2.3.2 of this report.

3.2.3 Test Result


The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.


B. Test Plots and Suspicious Points:

Test result of radiated emission below 1GHz

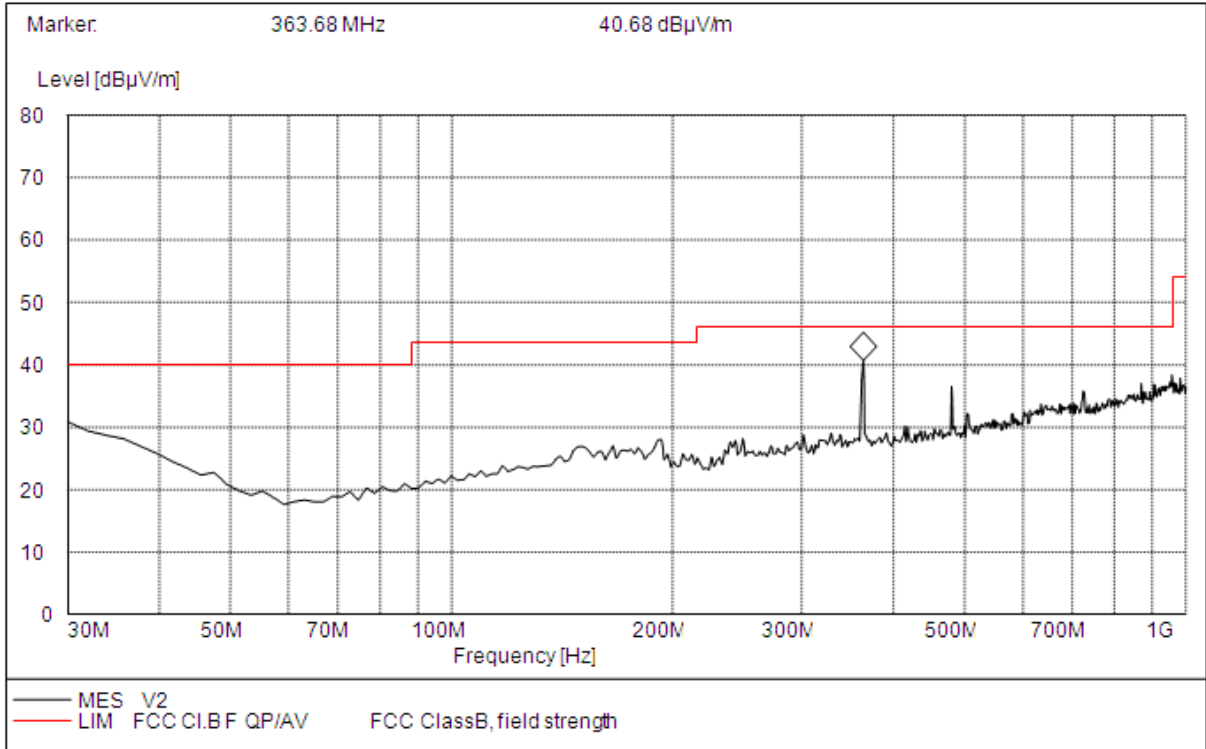

(Plot C: Test Antenna Vertical 30M - 1G)

| Frequency (MHz) | QuasiPeak (dB µ V/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dB µ V/m) | Margin (dB) | Antenna | Verdict |
|-----------------|----------------------|-----------------|---------------------|------------------|-------------|----------|---------|
| 30.59000 | 27.68 | 120.000 | 210.0 | 40.00 | 12.32 | Vertical | Pass |
| 362.58000 | 39.49 | 120.000 | 187.0 | 46.00 | 6.51 | Vertical | Pass |
| 480.69000 | 35.37 | 120.000 | 230.0 | 46.00 | 10.63 | Vertical | Pass |

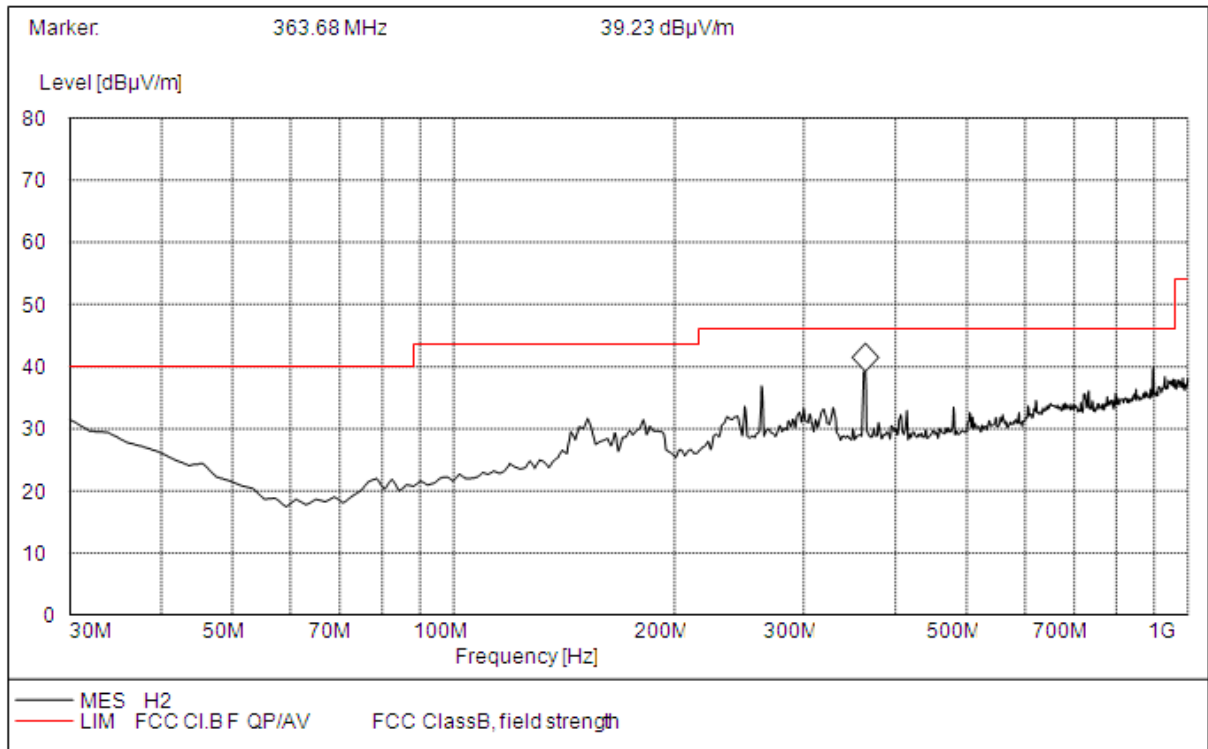


(Plot D:Test Antenna Horizontal 30M - 1G)


| Frequency (MHz) | QuasiPeak (dBµV/m) | Bandwidth (kHz) | Antenna height (cm) | Limit (dBµV/m) | Margin (dB) | Antenna | Verdict |
|-----------------|--------------------|-----------------|---------------------|----------------|-------------|------------|---------|
| 30.36000 | 28.58 | 120.000 | 272.0 | 40.00 | 11.42 | Horizontal | Pass |
| 182.34000 | 29.41 | 120.000 | 158.0 | 43.50 | 14.09 | Horizontal | Pass |
| 362.45000 | 38.16 | 120.000 | 194.0 | 46.00 | 7.84 | Horizontal | Pass |



Test result of radiated emission above 1GHz

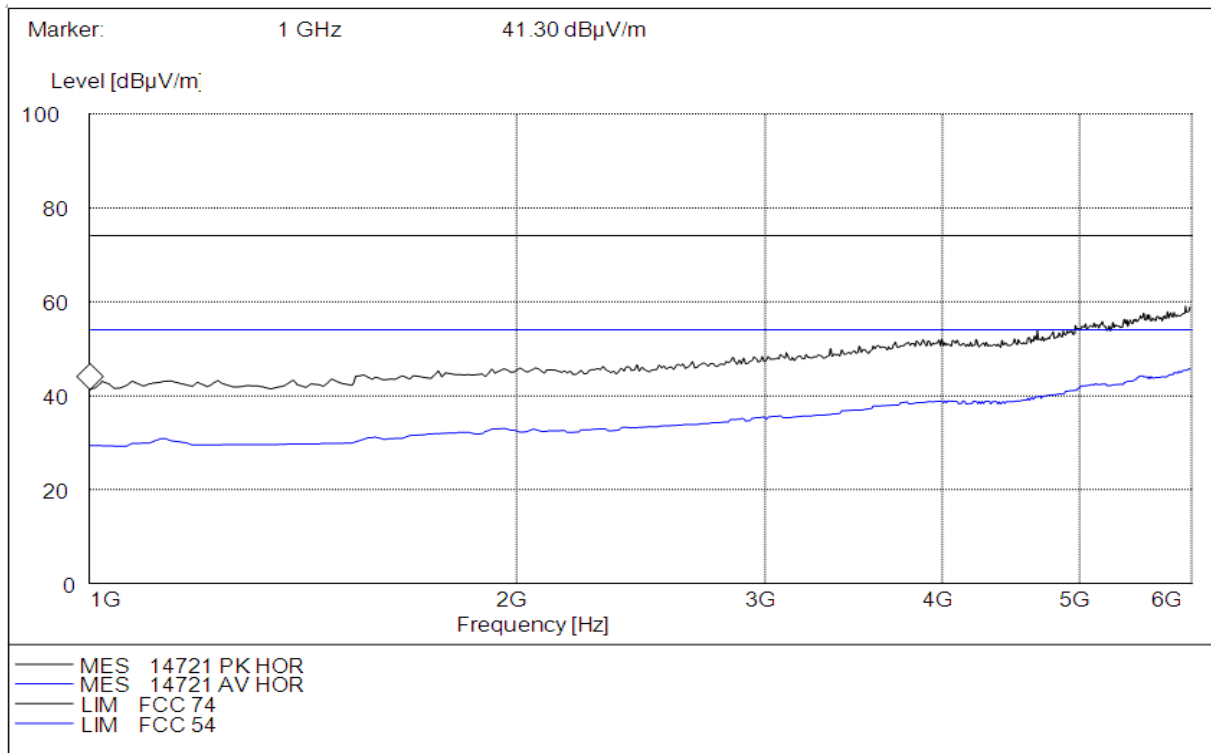

(Plot E: Test Antenna Horizontal 1G – 6G)

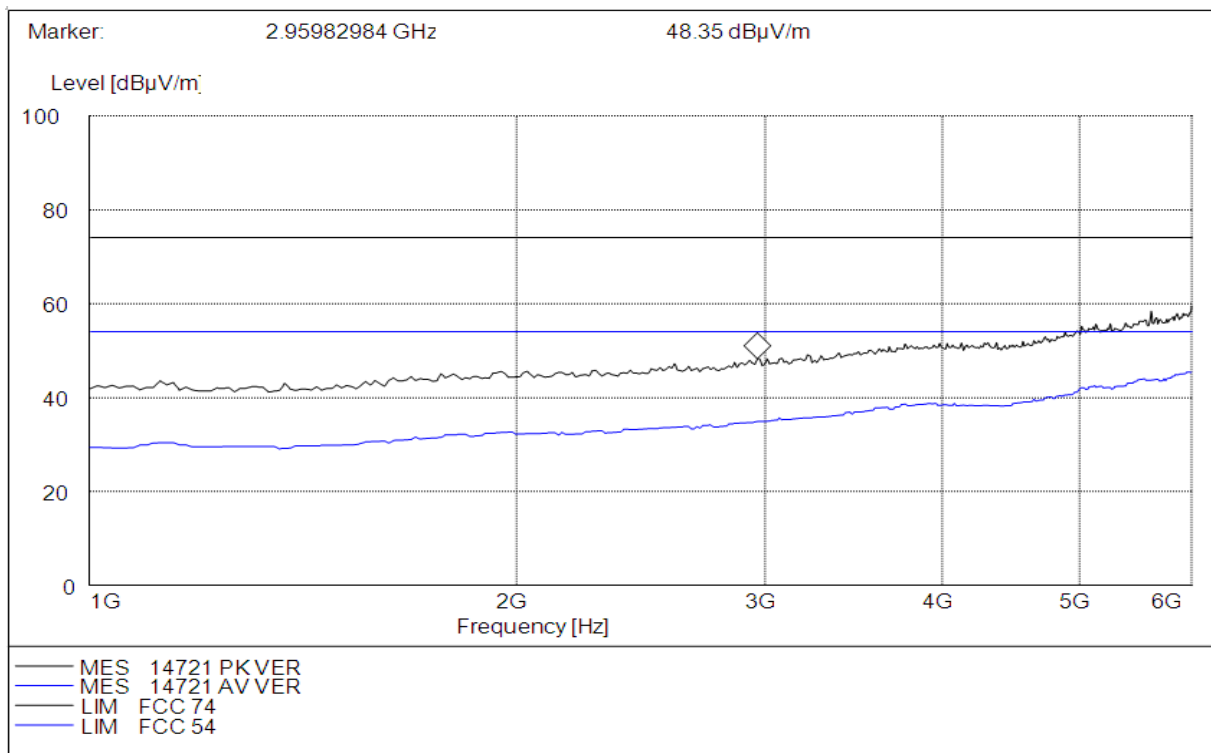

(Plot F: Test Antenna Vertical 1G – 6G)



Note: The test result margin of radiated emission above 1GHz is more than 20dB.

Test Result: PASS

4. PHOTOGRAPHS OF THE EUT




5. PHOTOGRAPHS OF THE TEST SET-UP



Conducted Emission



Radiated Emission of 30M-1G

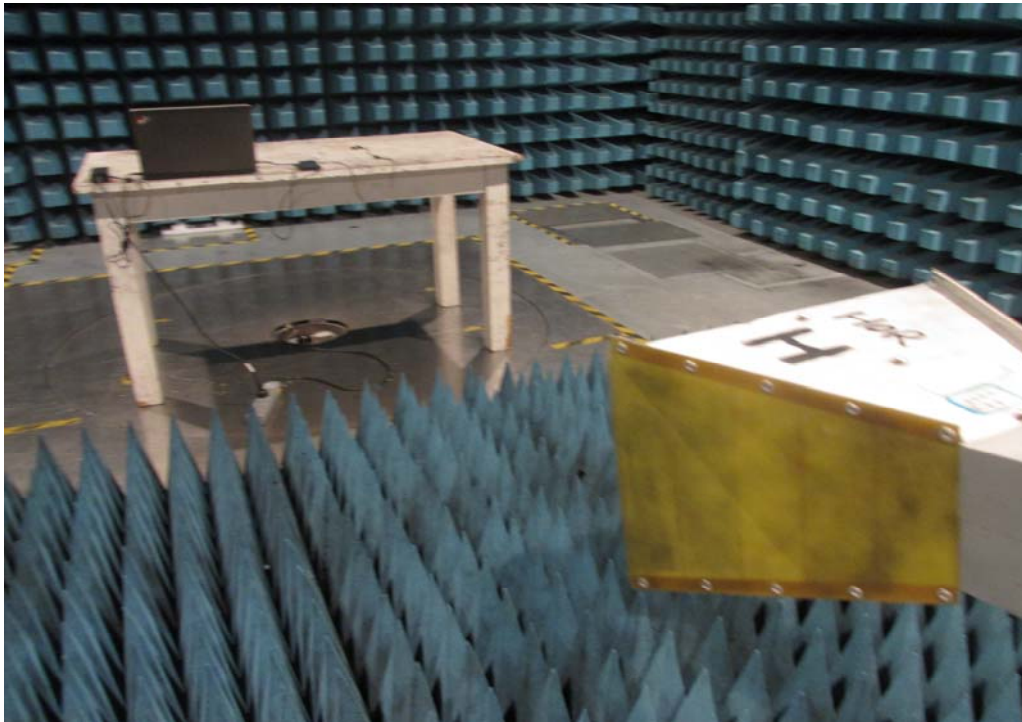

Radiated Emission of 1-6G

** END OF REPORT **