

Report No.: SZEM160300168005

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 104

FCC REPORT

Application No: SZEM1603001680RG

Applicant:Haier Telecom (Qingdao) Co., Ltd.Manufacturer:Haier Telecom (Qingdao) Co., Ltd.Factory:Haier Telecom (Qingdao) Co., Ltd.

Product Name: Mobilephone

Model No.(EUT): V4
Trade Mark: Haier

FCC ID: SG7201603V4

Standards: 47 CFR Part 15, Subpart C (2015)

Date of Receipt: 2016-04-05

Date of Test: 2016-04-20 to 2016-05-05

Date of Issue: 2016-06-01

Test Result: PASS *

. * In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM160300168005

Page: 2 of 104

2 Version

Revision Record								
Version Chapter Date Modifier Remark								
00		2016-06-01		Original				

Authorized for issue by:		
Tested By	Hank yan.	2016-05-05
	(Hank Yan) /Project Engineer	Date
Prepared By	Joyce Shi	2016-06-01
	(Joyce Shi) /Clerk	Date
Checked By	Eric Fu	2016-06-01
	(Eric Fu) /Reviewer	Date



Report No.: SZEM160300168005

Page: 3 of 104

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS



Report No.: SZEM160300168005

Page: 4 of 104

4 Contents

			Page
1	COV	ER PAGE	1
2	VER	SION	2
_	V L I I		······································
3	TES	T SUMMARY	3
4	CON	TENTS	4
5	GEN	ERAL INFORMATION	5
•	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT AND MODE	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER.	
	5.10	EQUIPMENT LIST	
6		T RESULTS AND MEASUREMENT DATA	
U	ILS		
	6.1	Antenna Requirement	
	6.2	CONDUCTED EMISSIONS	
	6.3	CONDUCTED PEAK OUTPUT POWER	
	6.4	6DB OCCUPY BANDWIDTH	
	6.5	Power Spectral Density	
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.7	RF CONDUCTED SPURIOUS EMISSIONS	
	6.8	RADIATED SPURIOUS EMISSIONS	
	6.8.		
	6.8.2		
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PHC	TOGRAPHS - EUT TEST SETUP	103
	7.1	CONDUCTED EMISSION	103
	7.2	RADIATED EMISSION	103
	7.3	RADIATED SPURIOUS EMISSION	104
8	PHC	TOGRAPHS - EUT CONSTRUCTIONAL DETAILS	104



Report No.: SZEM160300168005

Page: 5 of 104

5 General Information

5.1 Client Information

Applicant:	Haier Telecom (Qingdao) Co., Ltd.		
Address of Applicant:	No.1 Haier Road, Hi-tech Zone, Qingdao, 266101 P.R. China		
Manufacturer:	Haier Telecom (Qingdao) Co., Ltd.		
Address of Manufacturer:	No.1 Haier Road, Hi-tech Zone, Qingdao, 266101 P.R. China		
Factory:	Haier Telecom (Qingdao) Co., Ltd.		
Address of Factory:	No.1 Haier Road, Hi-tech Zone, Qingdao, 266101 P.R. China		

5.2 General Description of EUT

Product Name:	Mobilephone
Model No.:	V4
Trade Mark:	Haier
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
	IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
	IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK)
	IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK)
	IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM,
	QPSK,BPSK)
Antenna Type:	Monopole
Antenna Gain:	-6.97dBi
Power Supply:	Adapter:
	Model: LSD-D05I150
	InputL AC 100-240V, 50/60Hz, 0.35A
	Output: DC 5.0V, 1500mA
	Or
	DC 3.8V Li-ion Battery



Report No.: SZEM160300168005

Page: 6 of 104

Operation Frequency each of channel(802.11b/g/n HT20)										
Channel	Fr	equency	Channe	I Frequency	Channel	Fre	quency Char		nnel	Frequency
1	24	112MHz	4	2427MHz	7	2442MHz		12MHz 10		2457MHz
2	24	417MHz	5	2432MHz	8	244	17MHz 11		1	2462MHz
3	24	122MHz	6	2437MHz	9	2452MHz				
Operation F	requ	ency each	of channe	el(802.11n HT40)					
Channe		Freque	ency	Channel	Frequen	су	Chan	nel	F	Frequency
3 2422MHz		6	2437MF	2437MHz		9		2452MHz		
4 2427MHz		MHz	7	2442MHz						
5 2432		2432	ИНz	8	2447MH	lz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

, ,	
Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz



Report No.: SZEM160300168005

Page: 7 of 104

5.3 Test Environment and Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	55 % RH
Atmospheric Pressure:	1015mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all
	kind of data rate.

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM160300168005

Page: 8 of 104

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

· CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM160300168005

Page: 9 of 104

5.10Equipment List

	Conducted Emission								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)			
1	Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13			
2	LISN	Rohde & Schwarz	ENV216	SEM007-01	2015-10-09	2016-10-09			
3	LISN	ETS- LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25			
4	8 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T8- 02	EMC0120	2015-08-30	2016-08-30			
5	4 Line ISN	Fischer Custom Communication s Inc.		EMC0121	2015-08-30	2016-08-30			
6	2 Line ISN	Fischer Custom Communication s Inc.		EMC0122	2015-08-30	2016-08-30			
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2016-04-25	2017-04-25			
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09			



Report No.: SZEM160300168005

Page: 10 of 104

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS- LINDGREN	N/A	SEM001-01	2016-05-13	2017-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2015-09-16	2016-09-16
3	BiConiLog Antenna (26-3000MHz)	ETS- LINDGREN	3142C	SEM003-01	2014-11-01	2017-11-01
4	Double-ridged horn (1-18GHz)	ETS- LINDGREN	3117	SEM003-11	2015-10-17	2018-10-17
5	Horn Antenna (18-26GHz)	ETS- LINDGREN	3160	SEM003-12	2014-11-24	2017-11-24
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2016-04-25	2017-04-25
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09
9	Loop Antenna	Beijing Daze	ZN30401	SEM003-09	2015-05-13	2018-05-13

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEM004-04	2016-04-25	2017-04-25
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2015-10-09	2016-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Low Noise Amplifier	Black Diamond Series	BDLNA- 0118- 352810	SEM005-05	2015-10-09	2016-10-09
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A



Report No.: SZEM160300168005

Page: 11 of 104

	RF connected test							
Item	Test Equipment	Test Equipment Manufacturer Model No. Inventory No.			Cal.Due date			
				-	(yyyy-mm-dd)	(yyyy-mm-dd)		
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2015-10-09	2016-10-09		
2	Cnootrum Anglyzor	Rohde &	FSP	SEM004-06	2015-10-17	2016-10-17		
2	Spectrum Analyzer	Schwarz	F3F		2015-10-17	2010-10-17		
0	Cianal Cananatan	Rohde &	ON II OO	OEM000 00	0010 04 05	0017.04.05		
3	Signal Generator	Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25		
	Dower Mater	Rohde &	NDVC	CEM014.00	0015 10 00	0010 10 00		
4	Power Meter	Schwarz	NRVS	SEM014-02	2015-10-09	2016-10-09		



Report No.: SZEM160300168005

Page: 12 of 104

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

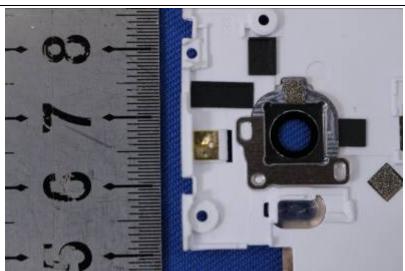

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -6.97dBi.



Report No.: SZEM160300168005

Page: 13 of 104


6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	150kHz to 30MHz				
Limit:	Francisco (MIII-)	Limit (d	BuV)		
	Frequency range (MHz)	Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*		
	0.5-5	56	46		
	5-30	60	50		
	* Decreases with the logarithm	n of the frequency.			
Test Procedure:	Test Procedure: 1) The mains terminal disturbance voltage test was conducted in a shi room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the greference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cab a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above ground reference plane. And for floor-standing arrangement, the was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The of the EUT shall be 0.4 m from the vertical ground reference plane. Vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units the EUT and associated equipment was at least 0.8 m from the LISN 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according ANSI C63.10: 2013 on conducted measurement.			5Ω bund es to	
				he the of 2.	



Report No.: SZEM160300168005

Page: 14 of 104

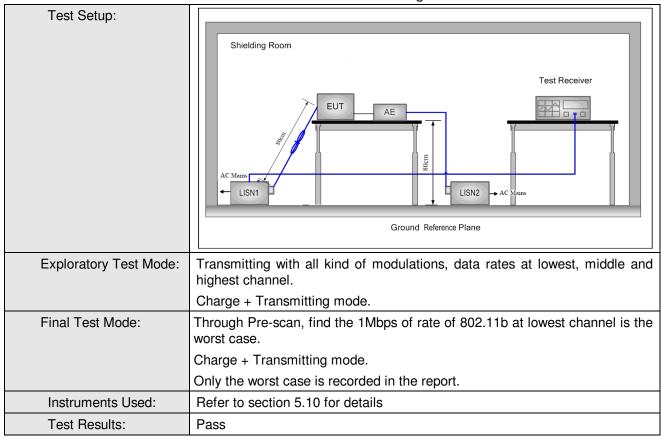



Report No.: SZEM160300168005


Page: 15 of 104

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

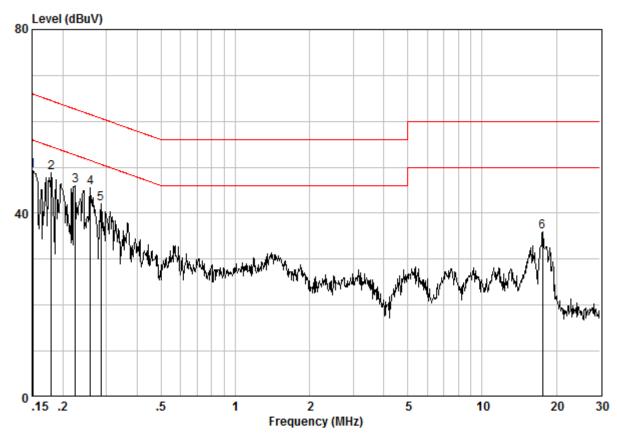

Site : Shielding Room
Condition : FCC DOC LINE
Job No. : 1680RG
Test Mode : charge+TX


	Freq	Cable Loss	LISN Factor			Limit Line		Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15080	0.10	0.11	49.12	49.33	55.96	-6.63	Peak
2	0.17961	0.10	0.10	48.60	48.80	54.50	-5.70	Peak
3	0.22437	0.10	0.09	45.78	45.96	52.66	-6.69	Peak
4	0.25888	0.10	0.08	45.46	45.64	51.47	-5.83	Peak
5	0.28478	0.10	0.07	41.99	42.16	50.68	-8.52	Peak
6	17.568	0.20	0.48	35.23	35.92	50.00	-14.08	Peak



Report No.: SZEM160300168005

Page: 16 of 104

Neutral Line:

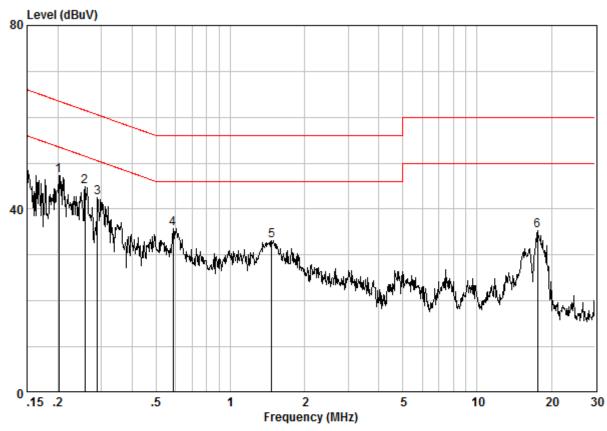

Site : Shielding Room Condition : FCC DOC NEUTRAL

Job No. : 1680RG Test Mode : charge+TX

	Freq		LISN Factor					Remark	
	MHz	dB	dB	dBuV	dBuV	dBuV	dB		
1	0.20181	0.10	0.06	47.19	47.35	53.54	-6.19	Peak	
2	0.25751	0.10	0.01	44.89	45.00	51.51	-6.51	Peak	
3	0.28935	0.10	-0.01	42.42	42.52	50.54	-8.02	Peak	
4	0.58540	0.10	0.01	35.59	35.70	46.00	-10.30	Peak	
5	1.472	0.10	0.06	33.07	33.23	46.00	-12.77	Peak	
6	17.568	0.20	0.29	34.80	35.28	50.00	-14.72	Peak	

Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM160300168005

Page: 17 of 104

6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)	
Test Method:	ANSI C63.10 2013	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
	Remark:	
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Test Instruments:	Refer to section 5.10 for details	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates	
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;	
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)	
Limit:	30dBm	
Test Results:	Pass	



Report No.: SZEM160300168005

Page: 18 of 104

Pre-scan und	Pre-scan under all rate at lowest channel 1							
Mode		802	.11b					
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power (dBm)	19.71	19.70	19.66	19.59				
Mode				802	2.11g			
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power (dBm)	20.40	20.38	20.34	20.29	20.23	20.22	20.20	20.13
Mode				802.11	n(HT20)			
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power (dBm)	20.50	20.47	20.41	20.36	20.35	20.31	20.26	20.23
Mode	802.11n(HT40)							
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
Power (dBm)	18.73	18.70	18.66	18.62	18.56	18.51	18.47	18.44

Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).



Report No.: SZEM160300168005

Page: 19 of 104

Measurement Data

	802.11b mo	de	
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	19.71	30.00	Pass
Middle	19.71	30.00	Pass
Highest	19.31	30.00	Pass
	802.11g mo	de	
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	20.40	30.00	Pass
Middle	21.96	30.00	Pass
Highest	20.43	30.00	Pass
	802.11n(HT20)	mode	
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	20.50	30.00	Pass
Middle	22.01	30.00	Pass
Highest	20.29	30.00	Pass
	802.11n(HT40)	mode	
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	18.73	30.00	Pass
Middle	21.80	30.00	Pass
Highest	18.80	30.00	Pass



Report No.: SZEM160300168005


Page: 20 of 104

Test plot as follows:

Test mode: 802.11b Test channel: Lowest





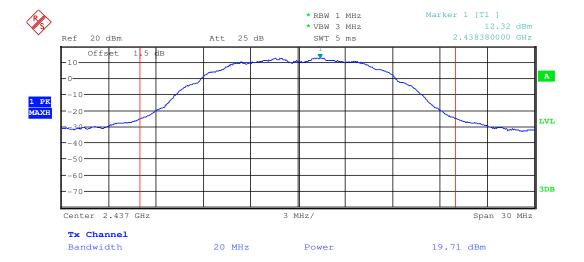




Report No.: SZEM160300168005

Page: 21 of 104






Test mode: 802.11g Test channel: Lowest

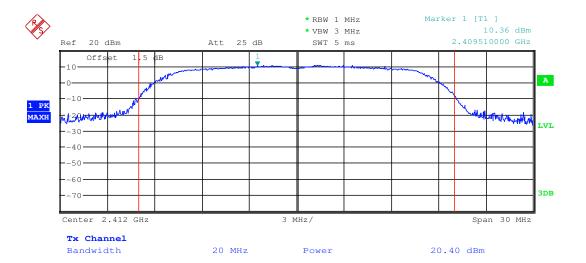



Report No.: SZEM160300168005

Page: 22 of 104





Test mode:	802.11g	Test channel:	Highest







Report No.: SZEM160300168005

Page: 23 of 104

Test mode: 802.11n(HT20) Test channel: Lowest

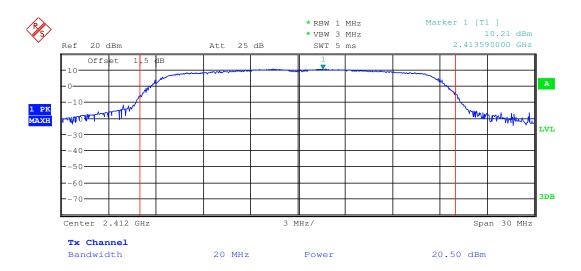



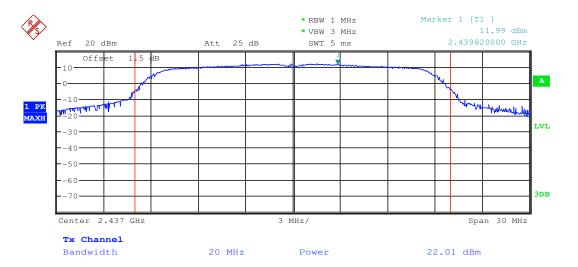



Report No.: SZEM160300168005

Page: 24 of 104

Test mode: 802.11n(HT20) Test channel: Highest



Test mode: 802.11n(HT40) Test channel: Lowest







Report No.: SZEM160300168005

Page: 25 of 104



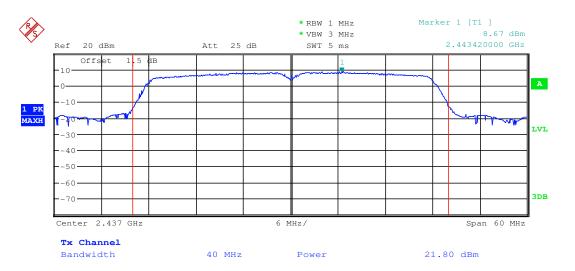



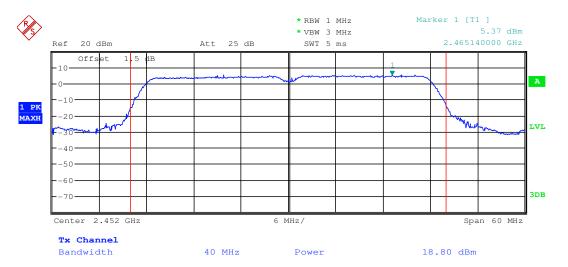




Report No.: SZEM160300168005

Page: 26 of 104

6.4 6dB Occupy Bandwidth

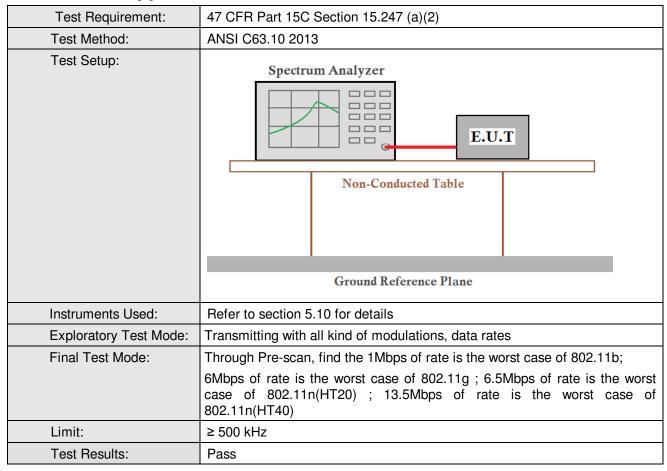



Report No.: SZEM160300168005

Page: 27 of 104

Measurement Data

WCasarcincii Data			
	802.11b mode		
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	9.60	≥500	Pass
Middle	9.60	≥500	Pass
Highest	9.60	≥500	Pass
	802.11g mode		
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	15.36	≥500	Pass
Middle	15.51	≥500	Pass
Highest	15.48	≥500	Pass
	802.11n(HT20) mode		
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	15.21	≥500	Pass
Middle	16.02	≥500	Pass
Highest	16.02	≥500	Pass
	802.11n(HT40)mode		
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	36.18	≥500	Pass
Middle	35.28	≥500	Pass
Highest	36.18	≥500	Pass




Report No.: SZEM160300168005


Page: 28 of 104

Test plot as follows:

Test mode: 802.11b	Test channel:	Lowest
--------------------	---------------	--------

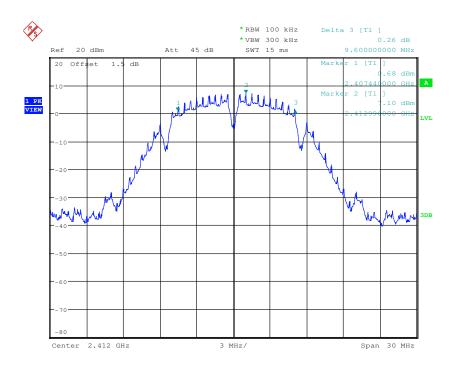



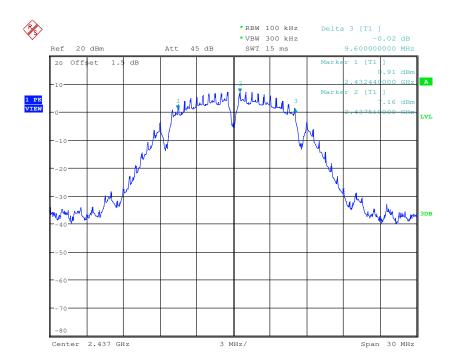





Report No.: SZEM160300168005

Page: 29 of 104

Test mode: 802.11b Test channel: Highest

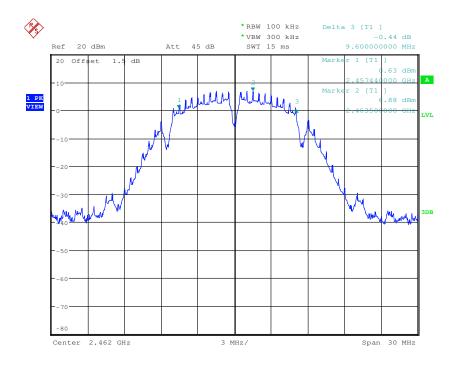



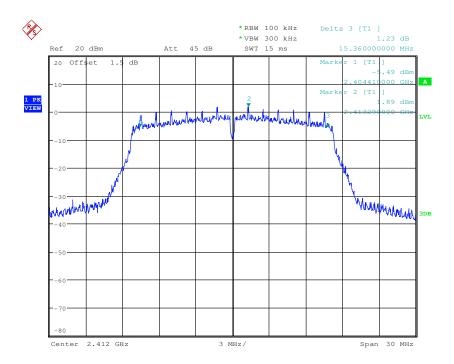





Report No.: SZEM160300168005

Page: 30 of 104

Test mode: 802.11g Test channel: Middle

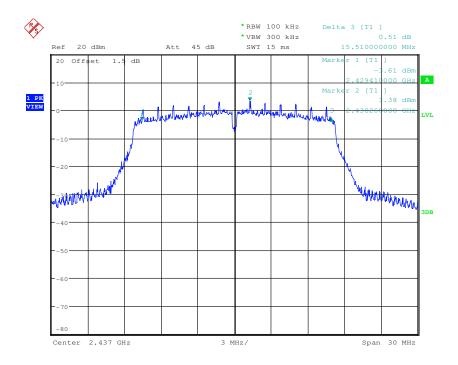



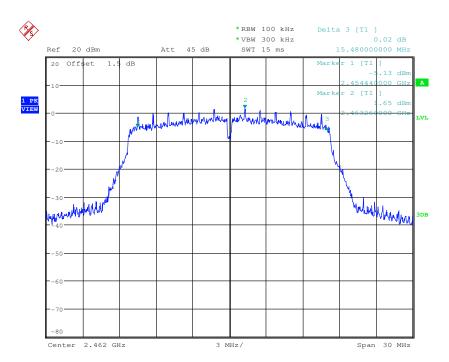





Report No.: SZEM160300168005

Page: 31 of 104

Test mode: 802.11n(HT20) Test channel: Lowest

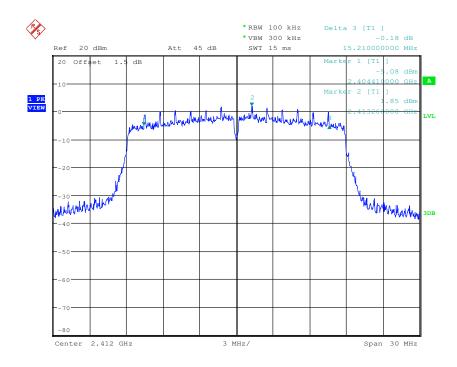



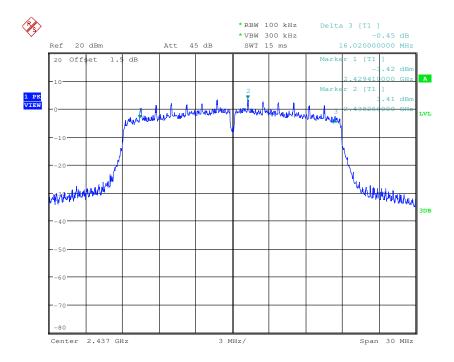





Report No.: SZEM160300168005

Page: 32 of 104

Test mode: 802.11n(HT20) Test channel: Highest

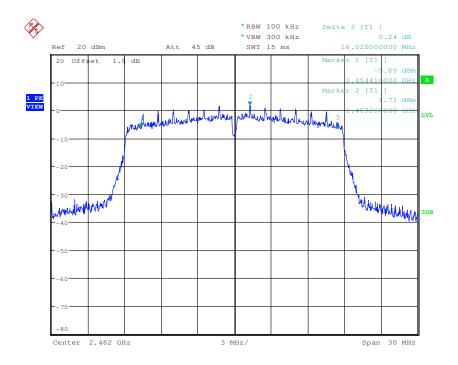



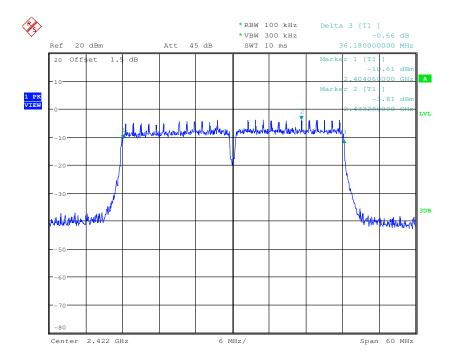





Report No.: SZEM160300168005

Page: 33 of 104

Test mode: 802.11n(HT40) Test channel: Middle

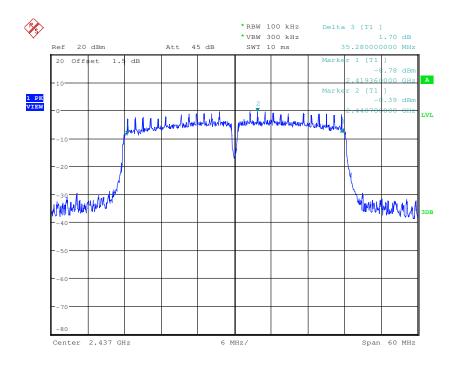



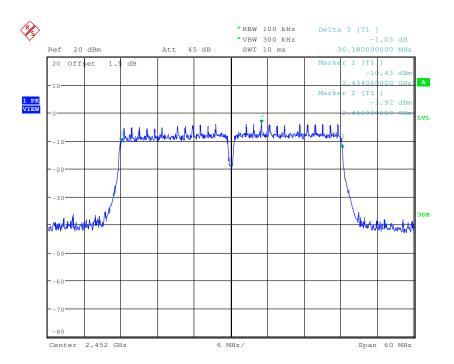



Report No.: SZEM160300168005

Page: 34 of 104

6.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)	
Test Method:	ANSI C63.10 2013	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:	
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Test Instruments:	Refer to section 5.10 for details	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates	
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;	
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)	
Limit:	≤8.00dBm/3kHz	
Test Results:	Pass	



Report No.: SZEM160300168005

Page: 35 of 104

Measurement Data

802.11b mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-7.09	≤8.00	Pass
Middle	-6.97	≤8.00	Pass
Highest	-6.66	≤8.00	Pass
802.11g mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-12.15	≤8.00	Pass
Middle	-10.96	≤8.00	Pass
Highest	-13.13	≤8.00	Pass
802.11n(HT20) mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-13.14	≤8.00	Pass
Middle	-11.58	≤8.00	Pass
Highest	-13.13	≤8.00	Pass
802.11n(HT40) mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-18.44	≤8.00	Pass
Middle	-14.80	≤8.00	Pass
Highest	-17.18	≤8.00	Pass




Report No.: SZEM160300168005


Page: 36 of 104

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

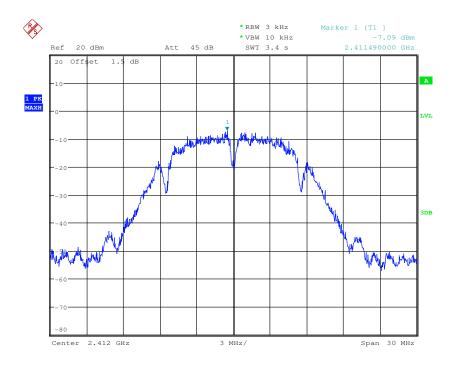

Test mode: 802.11b Test channel: Middle

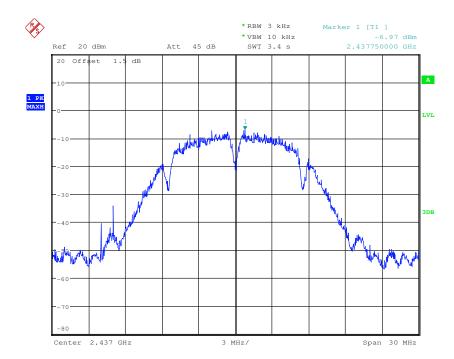






Report No.: SZEM160300168005

Page: 37 of 104

Test mode: 802.11b Test channel: Highest

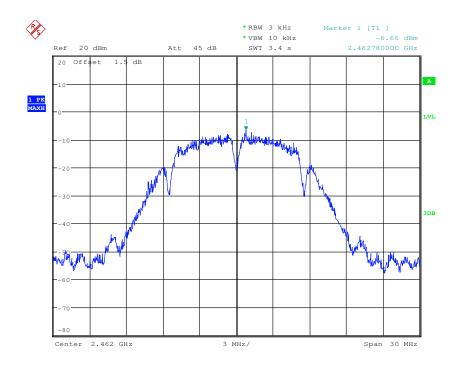



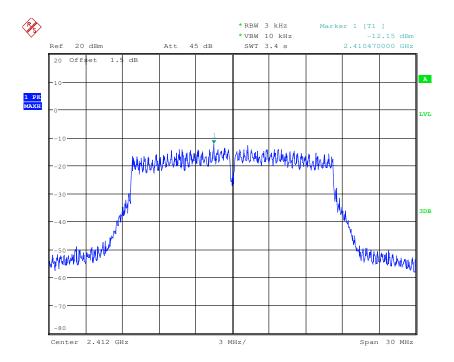





Report No.: SZEM160300168005

Page: 38 of 104

Test mode: 802.11g Test channel: Middle

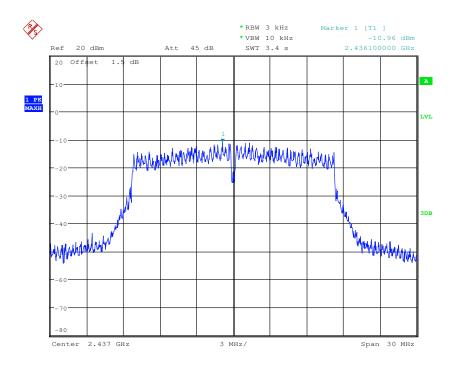



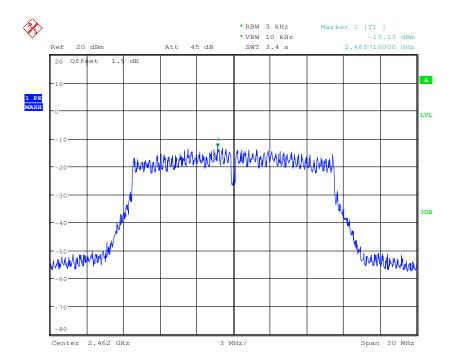





Report No.: SZEM160300168005

Page: 39 of 104

Test mode: 802.11n(HT20) Test channel: Lowest

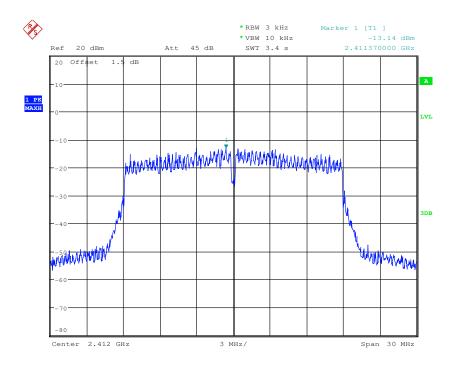



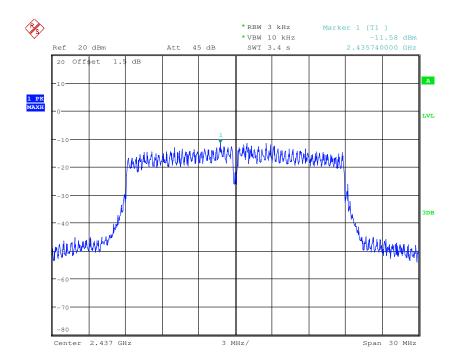





Report No.: SZEM160300168005

Page: 40 of 104

Test mode: 802.11n(HT20) Test channel: Highest

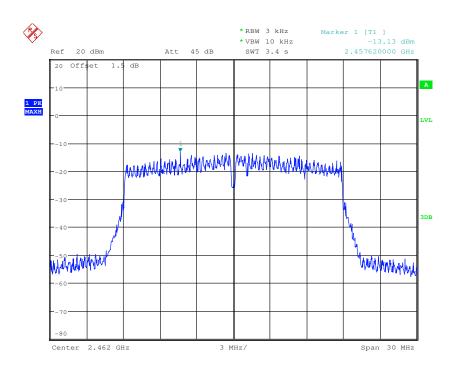



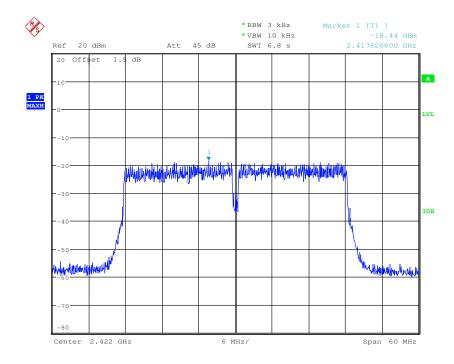





Report No.: SZEM160300168005

Page: 41 of 104

Test mode: 802.11n(HT40) Test channel: Middle

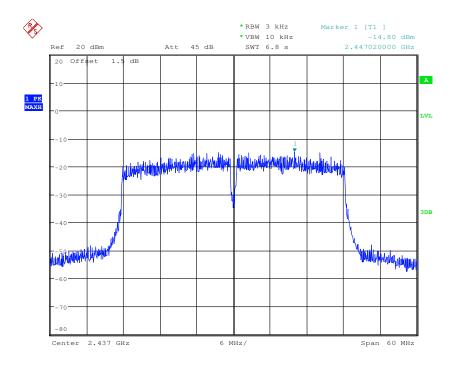



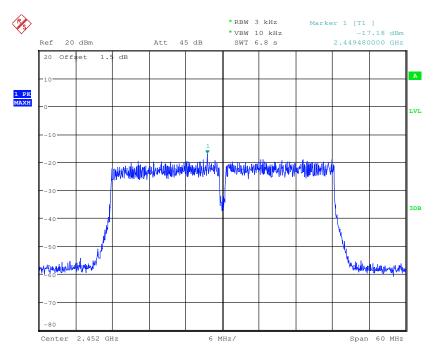



Report No.: SZEM160300168005

Page: 42 of 104

6.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM160300168005


Page: 43 of 104

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

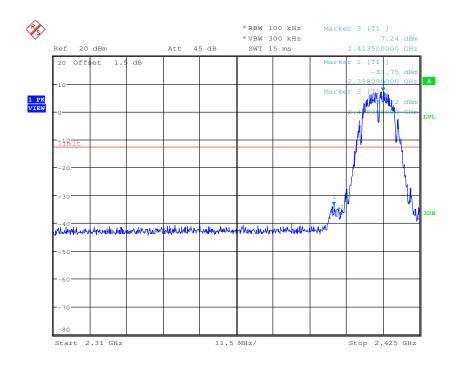



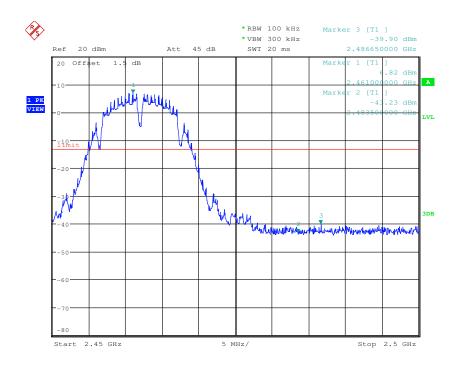





Report No.: SZEM160300168005

Page: 44 of 104

Test mode: 802.11g Test channel: Lowest

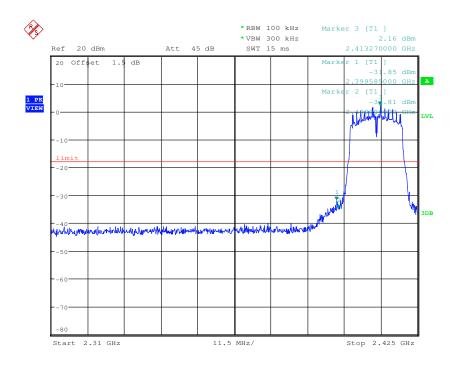



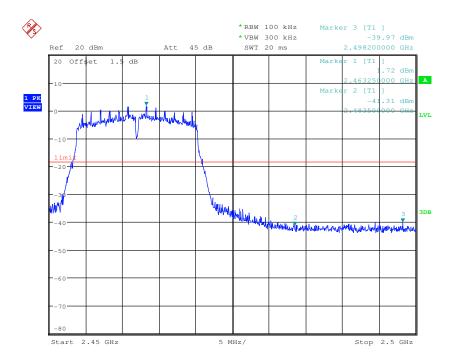





Report No.: SZEM160300168005

Page: 45 of 104

Test mode: 802.11n(HT20) Test channel: Lowest

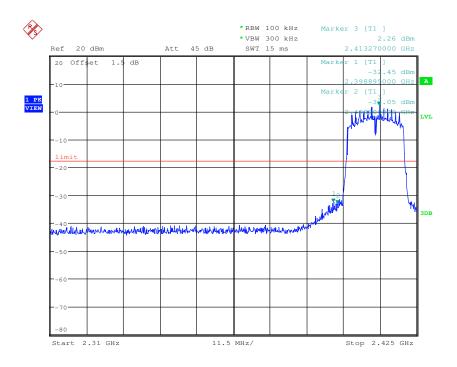



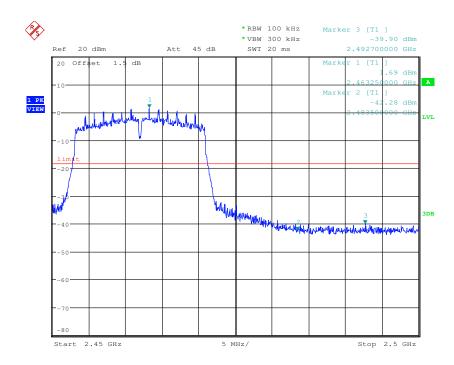






Report No.: SZEM160300168005

Page: 46 of 104

Test mode: 802.11n(HT40) Test channel: Lowest

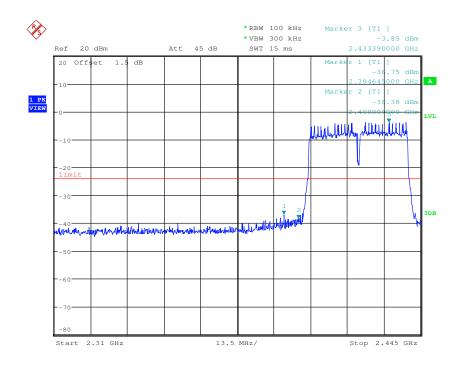



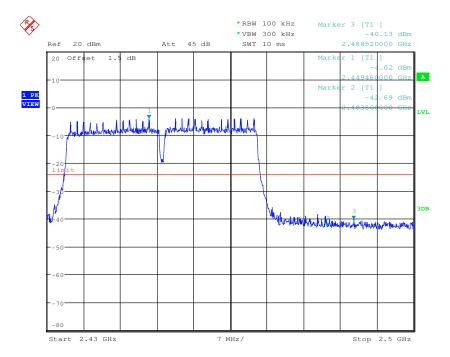



Report No.: SZEM160300168005

Page: 47 of 104

6.7 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	Spectrum Analyzer Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread
	spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass





Report No.: SZEM160300168005

Page: 48 of 104

Test plot as follows:


Test mode: 802.11b Test channel: Lowest

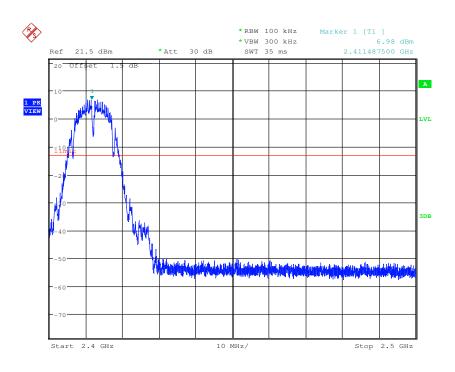

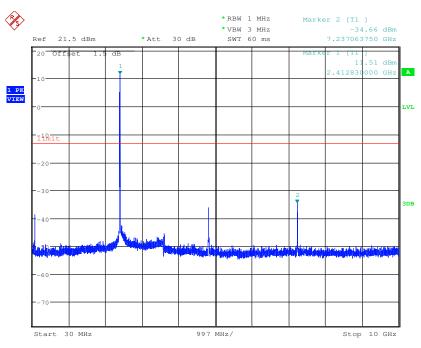




Report No.: SZEM160300168005

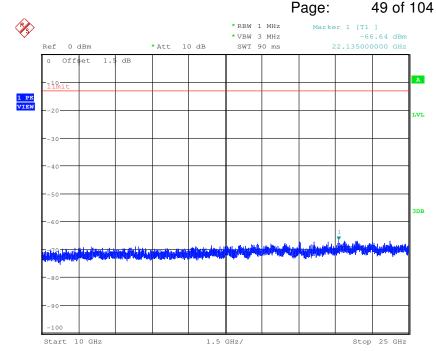





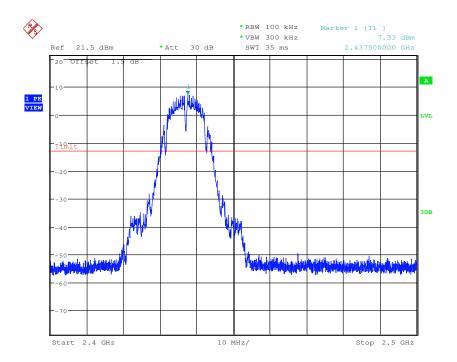



Report No.: SZEM160300168005

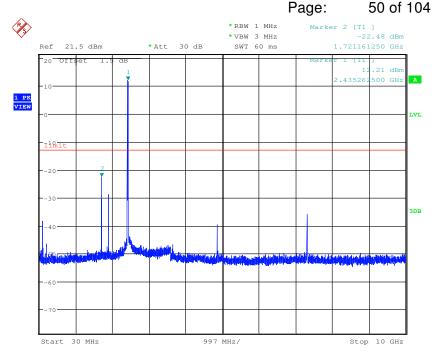

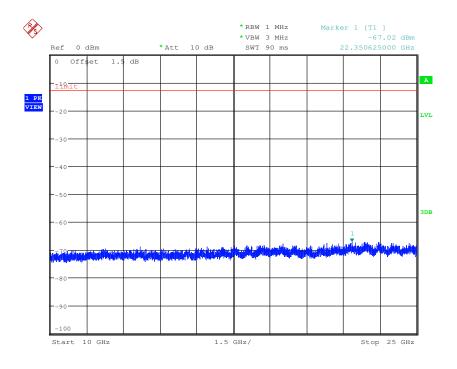





Report No.: SZEM160300168005

Page: 51 of 104

Test mode: 802.11b Test channel: Highest

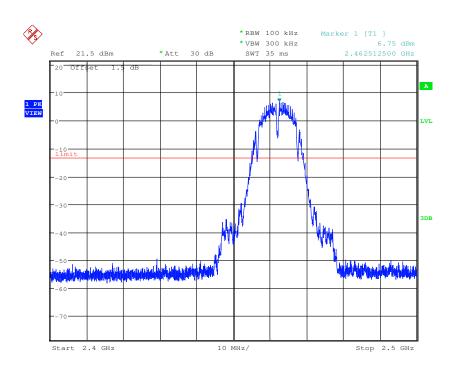


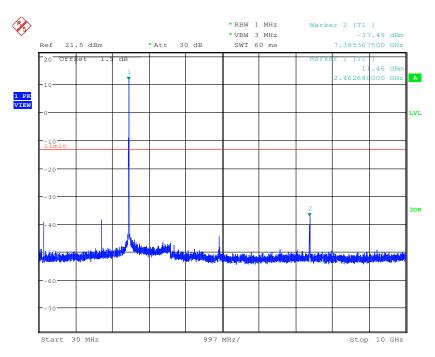




Report No.: SZEM160300168005

Page: 52 of 104

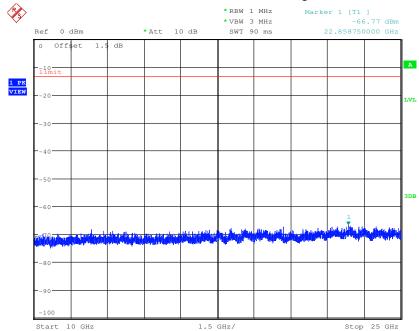





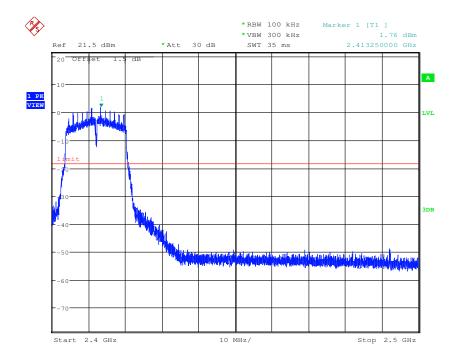



Report No.: SZEM160300168005

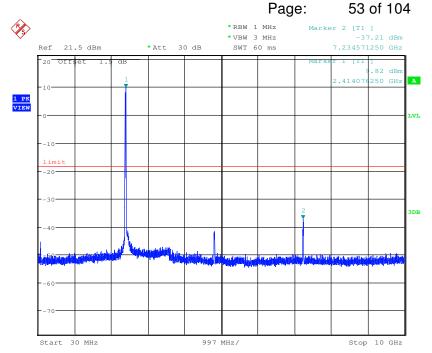

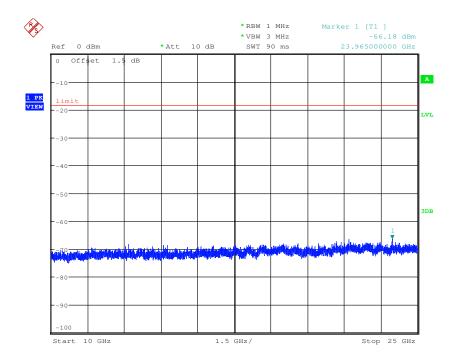





Report No.: SZEM160300168005

Page: 54 of 104

Test mode: 802.11g Test channel: Middle

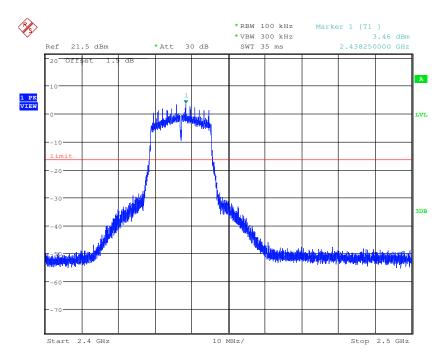


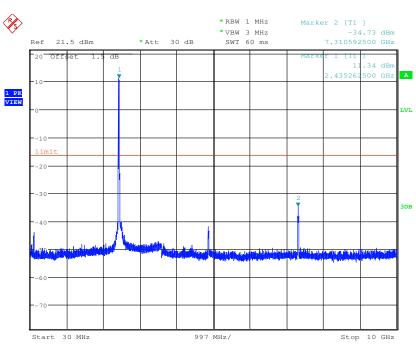



Report No.: SZEM160300168005


Stop 25 GHz

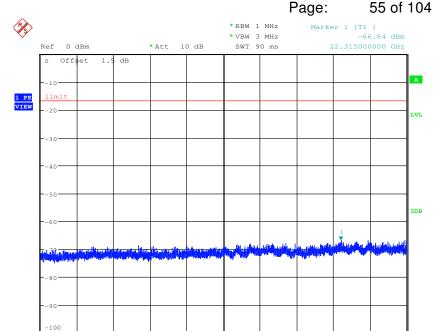




1.5 GHz/


Start 10 GHz

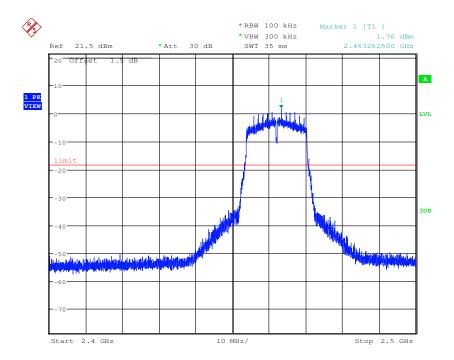



Report No.: SZEM160300168005

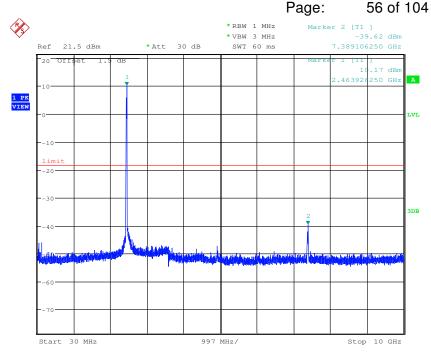

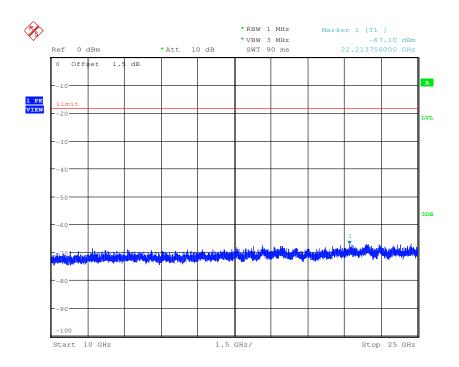





Report No.: SZEM160300168005

Page: 57 of 104


Test mode: 802.11n(HT20) Test channel: Lowest

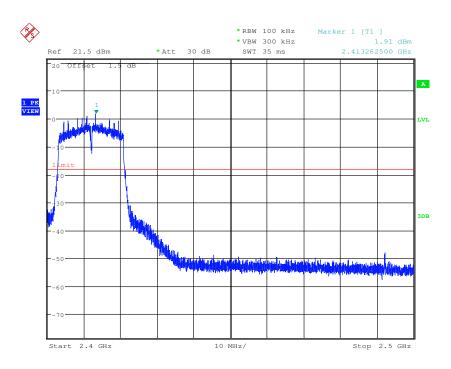

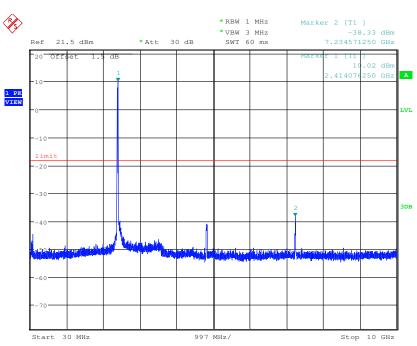




Report No.: SZEM160300168005

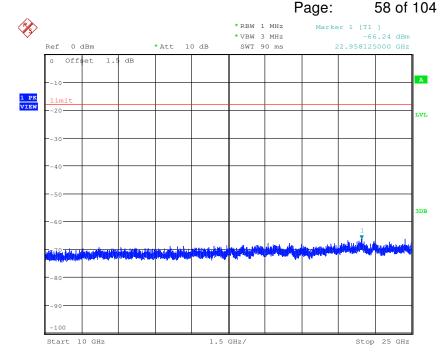




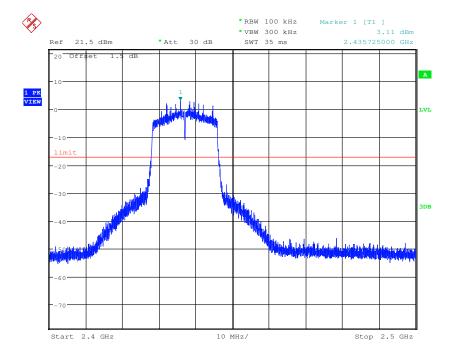




Report No.: SZEM160300168005

Page: 59 of 104

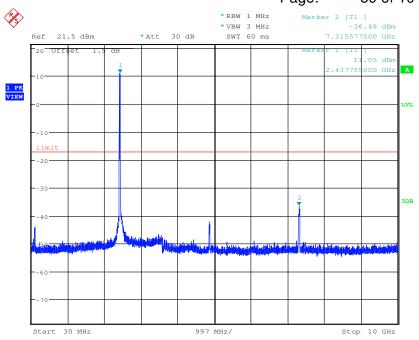

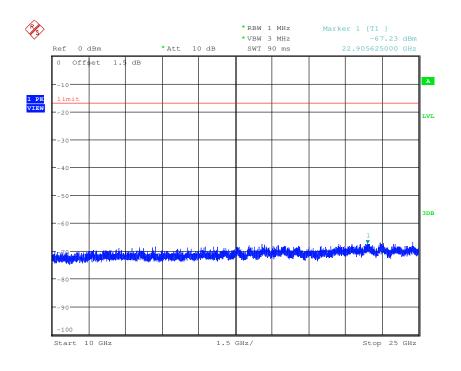





Report No.: SZEM160300168005

Page: 60 of 104


Test mode: 802.11n(HT20) Test channel: Highest

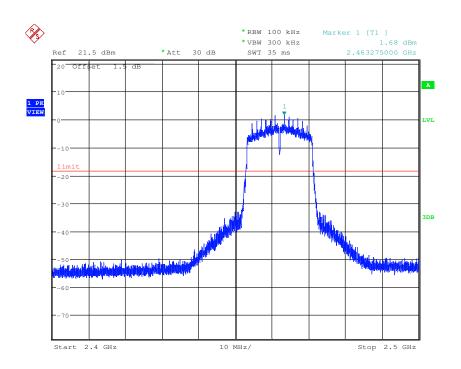

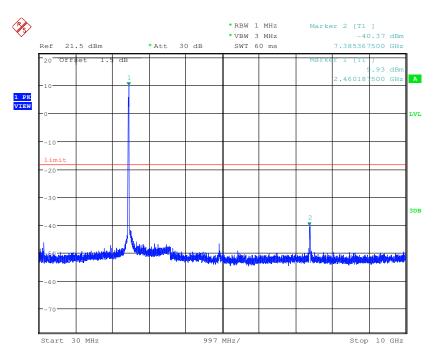




Report No.: SZEM160300168005

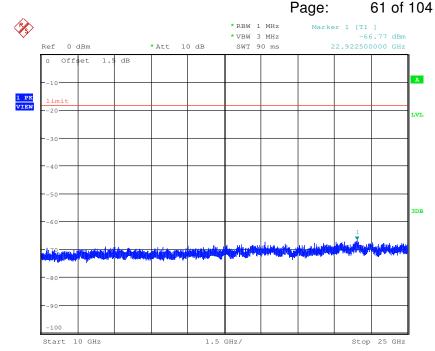





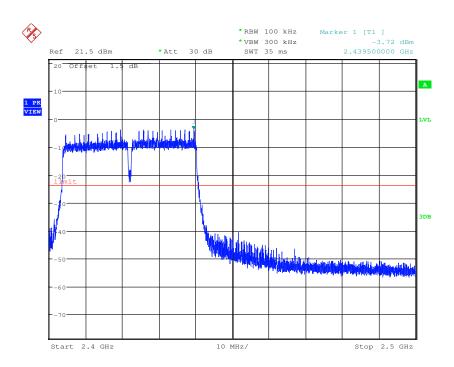



Report No.: SZEM160300168005

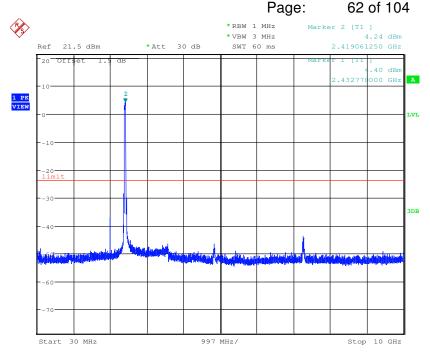

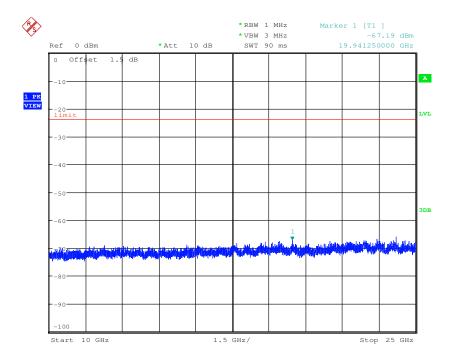





Report No.: SZEM160300168005

Page: 63 of 104


Test mode: 802.11n(HT40) Test channel: Middle

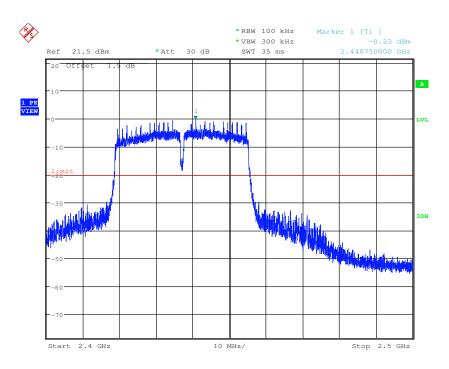

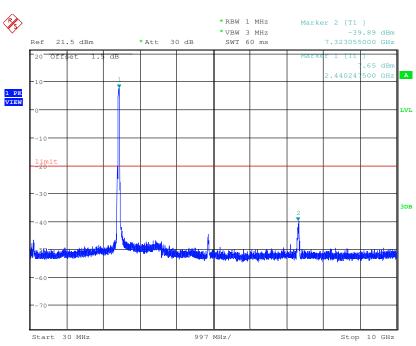





Report No.: SZEM160300168005

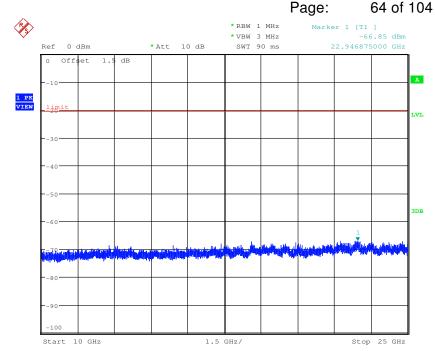


Test mode:	802.11n(HT40)	Test channel:	Highest
. oot modo.	00=:::(::::0)	1 000 01141111011	1goct

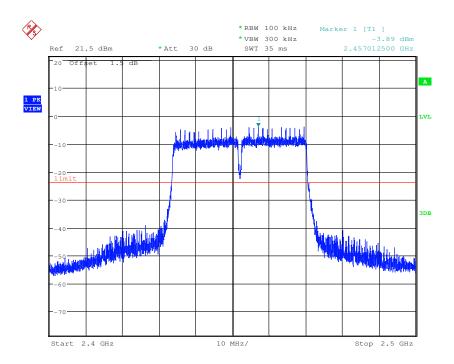





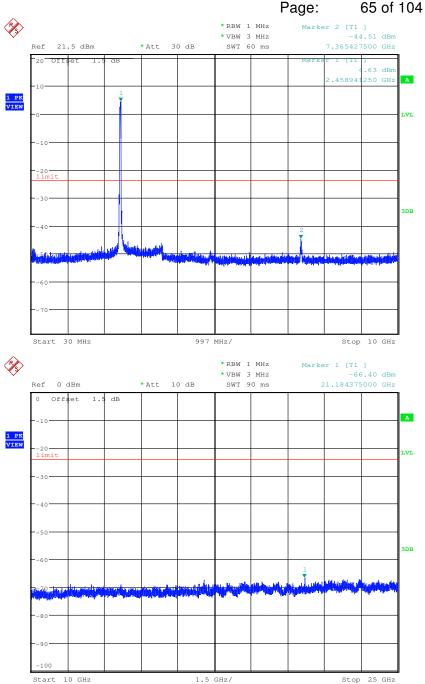

Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.



Report No.: SZEM160300168005

Page: 66 of 104

6.8 Radiated Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10 2013							
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark			
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak			
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average			
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak			
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average			
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak			
	Above 1GHz	Peak	1MHz	3MHz	Peak			
	Above IGHZ	Peak	1MHz	10Hz	Average			
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)			
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30			
	1.705MHz-30MHz	30	-	-	30			
	30MHz-88MHz	100	40.0	Quasi-peak	3			
	88MHz-216MHz	150	43.5	Quasi-peak	3			
	216MHz-960MHz	200	46.0	Quasi-peak	3			
	960MHz-1GHz	500	54.0	Quasi-peak	3			
	Above 1GHz	500	54.0	Average	3			
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency							
	emissions is 20dB above the maximum permitted average emission limit							
	applicable to the peak		·	eak limit app	olies to the total			
	emission level rad	iated by the device	е.					



Report No.: SZEM160300168005

Page: 67 of 104

Test Setup:

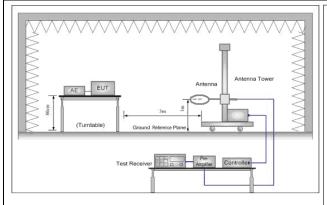

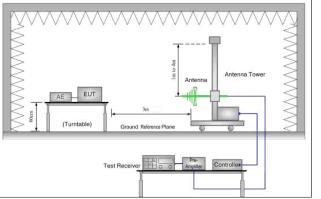


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

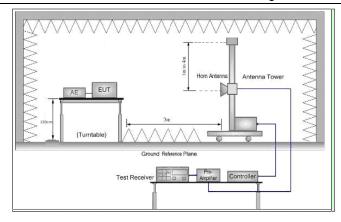


Figure 3. Above 1 GHz

Test Procedure:

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



Report No.: SZEM160300168005

Page: 68 of 104

limit specified, then testing could be stopped and the peak values EUT would be reported. Otherwise the emissions that did not have margin would be re-tested one by one using peak, quasi-peak or aw method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel ,the middle channel ,the H channel i. The radiation measurements are performed in X, Y, Z axis positioning Transmitting mode, And found the Y axis positioning which it is case. j. Repeat above procedures until all frequencies measured was complementary Test Mode: Exploratory Test Mode: Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Pretest the EUT at Transmitting mode and Charge +Transmitting found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.1 lowest channel is the worst case. Only the worst case is recorded in the report.							
channel i. The radiation measurements are performed in X, Y, Z axis positioning Transmitting mode, And found the Y axis positioning which it is case. j. Repeat above procedures until all frequencies measured was completed as a complete to the procedure of the Y axis positioning which it is case. Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting found the Charge +Transmitting mode which it is worse case. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.1 lowest channel is the worst case. Only the worst case is recorded in the report.		g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Transmitting mode, And found the Y axis positioning which it is case. j. Repeat above procedures until all frequencies measured was completed by the second of the procedure of							
Exploratory Test Mode: Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Pretest the EUT at Transmitting mode and Charge +Transmitting found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.1 lowest channel is the worst case. Only the worst case is recorded in the report.		Transmitting mode, And found the Y axis positioning which it is wor case.					
Transmitting mode, Charge + Transmitting mode. Pretest the EUT at Transmitting mode and Charge +Transmitting found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.1 lowest channel is the worst case. Only the worst case is recorded in the report.		j. Repeat above procedures until all frequencies measured was complete.					
Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.1 lowest channel is the worst case. Only the worst case is recorded in the report.	Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.					
found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.1 lowest channel is the worst case. Only the worst case is recorded in the report.		Transmitting mode, Charge + Transmitting mode.					
6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.1 lowest channel is the worst case. Only the worst case is recorded in the report.	Final Test Mode:	Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case					
of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.1 lowest channel is the worst case. Only the worst case is recorded in the report.		Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;					
For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.1 lowest channel is the worst case. Only the worst case is recorded in the report.		6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case					
lowest channel is the worst case. Only the worst case is recorded in the report.		of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)					
		For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case.					
		Only the worst case is recorded in the report.					
Instruments Used: Refer to section 5.10 for details	Instruments Used:	Refer to section 5.10 for details					
Test Results: Pass	Test Results:	Pass					




Report No.: SZEM160300168005

Page: 69 of 104

6.8.1 Radiated emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Charge + Transmitting	Vertical

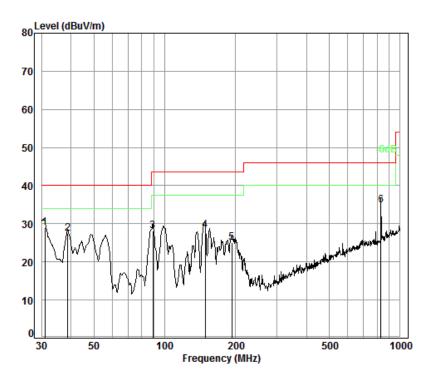

Condition: 3m Vertical Job No. : 1680RG

Test mode: Charge + TX mode


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	30.96	0.60	18.36	26.00	36.05	29.01	40.00	-10.99
2	38.75	0.60	13.84	25.98	39.04	27.50	40.00	-12.50
3	89.28	1.10	8.73	25.91	44.19	28.11	43.50	-15.39
4	148.44	1.31	9.16	25.83	43.72	28.36	43.50	-15.14
5	193.09	1.39	10.13	25.78	39.35	25.09	43.50	-18.41
6	830.40	3.33	22.22	25.57	34.86	34.84	46.00	-11.16



Report No.: SZEM160300168005

Page: 70 of 104

Test mode: Charge + Transmitting Horizontal

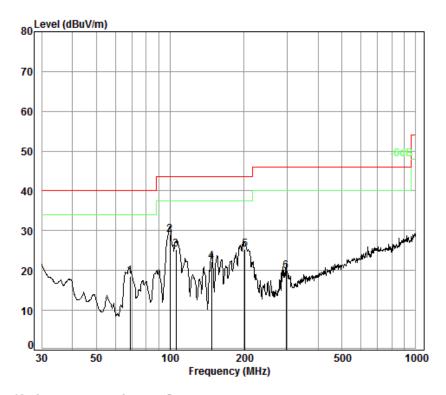

Condition: 3m Horizontal

Job No. : 1680RG

Test mode: Charge + TX mode

	Freq			Preamp Factor				
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	68.87	0.80	6.93	25.93	36.72	18.52	40.00	-21.48
2 pp	99.88	1.20	9.10	25.90	44.67	29.07	43.50	-14.43
3	105.64	1.22	8.87	25.89	41.16	25.36	43.50	-18.14
4	147.40	1.31	9.07	25.83	37.77	22.32	43.50	-21.18
5	201.39	1.41	10.27	25.77	39.44	25.35	43.50	-18.15
6	297.22	1.89	13.50	25.70	30.17	19.86	46.00	-26.14



Report No.: SZEM160300168005

Page: 71 of 104

6.8.2 Transmitter emission above 1GHz

Test mode: 802.	2.11b Test channel:	Lowest	Remark:	Peak
-----------------	---------------------	--------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
3892.52	32.99	7.77	38.52	45.49	47.73	74.00	-26.27	Vertical
4824.00	34.12	8.90	38.75	58.30	62.57	74.00	-11.43	Vertical
6140.08	34.77	10.38	38.78	45.34	51.71	74.00	-22.29	Vertical
7236.00	35.58	10.69	37.63	50.58	59.22	74.00	-14.78	Vertical
9436.38	37.26	12.36	36.58	36.08	49.12	74.00	-24.88	Vertical
3825.52	32.93	7.75	38.49	45.47	47.66	74.00	-26.34	Vertical
4824.00	34.12	8.90	38.75	56.91	61.18	74.00	-12.82	Horizontal
6265.72	34.80	10.22	38.61	45.49	51.90	74.00	-22.10	Horizontal
7236.00	35.58	10.69	37.63	51.26	59.90	74.00	-14.10	Horizontal
9648.00	37.10	12.52	36.29	33.37	46.70	74.00	-27.30	Horizontal
10686.78	37.14	13.23	36.07	38.76	53.06	74.00	-20.94	Horizontal
3892.52	32.99	7.77	38.52	45.49	47.73	74.00	-26.27	Horizontal

Test mode: 802.11b Test channel: Lowest Rem	mark: Average
---	---------------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
4824.00	34.13	8.90	38.75	48.30	52.58	54.00	-1.42	Vertical
7236.00	35.58	10.69	37.62	42.05	50.70	54.00	-3.30	Vertical
4824.00	34.13	8.90	38.75	47.62	51.90	54.00	-2.10	Horizontal
7236.00	35.58	10.69	37.62	41.96	50.61	54.00	-3.39	Horizontal



Report No.: SZEM160300168005

Page: 72 of 104

Test mode: 802.11b Test channel: Middle Remark: Peak

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4376.54	33.78	8.28	38.65	45.32	48.73	74.00	-25.27	Vertical
4874.00	34.17	8.97	38.76	56.16	60.54	74.00	-13.46	Vertical
6431.06	34.86	10.01	38.41	45.42	51.88	74.00	-22.12	Vertical
7311.00	35.54	10.72	37.59	51.14	59.81	74.00	-14.19	Vertical
9436.38	37.26	12.36	36.58	35.40	48.44	74.00	-25.56	Vertical
9748.00	37.10	12.58	36.16	39.11	52.63	74.00	-21.37	Vertical
4160.42	33.50	8.01	38.60	46.42	49.33	74.00	-24.67	Horizontal
4874.00	34.17	8.97	38.76	57.29	61.67	74.00	-12.33	Horizontal
5999.56	34.70	10.56	38.96	46.21	52.51	74.00	-21.49	Horizontal
7311.00	35.54	10.72	37.59	50.70	59.37	74.00	-14.63	Horizontal
9518.66	37.18	12.45	36.47	35.91	49.07	74.00	-24.93	Horizontal
9748.00	37.10	12.58	36.16	40.15	53.67	74.00	-20.33	Horizontal

	Test mode:	802.11b	Test channel:	Middle	Remark:	Average
--	------------	---------	---------------	--------	---------	---------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)	Polarization
4874.00	34.17	8.97	38.76	45.33	49.71	54.00	-4.29	Vertical
7311.00	35.54	10.72	37.59	40.12	48.79	54.00	-5.21	Vertical
4874.00	34.17	8.97	38.76	48.36	52.74	54.00	-1.26	Horizontal
7311.00	35.54	10.72	37.59	41.45	50.12	54.00	-3.88	Horizontal



Report No.: SZEM160300168005

Page: 73 of 104

Test mode: 802.11b Test channel: Highest Remark: Peak

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4196.70	33.59	8.06	38.61	45.80	48.84	74.00	-25.16	Vertical
4924.00	34.22	9.04	38.77	55.03	59.52	74.00	-14.48	Vertical
6619.88	35.19	10.10	38.18	45.12	52.23	74.00	-21.77	Vertical
7386.00	35.51	10.75	37.56	45.38	54.08	74.00	-19.92	Vertical
9518.66	37.18	12.45	36.47	35.77	48.93	74.00	-25.07	Vertical
9848.00	37.15	12.63	36.03	38.85	52.60	74.00	-21.40	Vertical
4376.54	33.78	8.28	38.65	45.35	48.76	74.00	-25.24	Horizontal
4924.00	34.22	9.04	38.77	57.75	62.24	74.00	-11.76	Horizontal
6658.30	35.17	10.15	38.13	45.30	52.49	74.00	-21.51	Horizontal
7386.00	35.51	10.75	37.56	46.46	55.16	74.00	-18.84	Horizontal
9518.66	37.18	12.45	36.47	35.67	48.83	74.00	-25.17	Horizontal
9848.00	37.15	12.63	36.03	38.89	52.64	74.00	-21.36	Horizontal

Test mode: 802.11b		.11b	Test ch	annel:	Highest	Remark	< :	Average	
Frequency (MHz)	lo	ble ss B)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
4924.00	34.	.22	9.04	38.77	45.92	50.41	54.00	-3.59	Vertical
7386.00	35.	.51	10.75	37.56	38.85	47.55	54.00	-6.45	Vertical
4924.00	34.	.22	9.04	38.77	47.87	52.36	54.00	-1.64	Horizontal
7386.00	35.	.51	10.75	37.56	40.43	49.13	54.00	-4.87	Horizontal



Report No.: SZEM160300168005

Page: 74 of 104

Test mode:	802.11g	Test channel:	Lowest	Remark:	Peak
	009				

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4338.71	33.74	8.23	38.64	45.28	48.61	74.00	-25.39	Vertical
4824.00	34.12	8.90	38.75	49.40	53.67	74.00	-20.33	Vertical
5879.25	34.40	10.22	38.94	46.76	52.44	74.00	-21.56	Vertical
7236.00	35.58	10.69	37.63	43.94	52.58	74.00	-21.42	Vertical
9518.66	37.18	12.45	36.47	36.26	49.42	74.00	-24.58	Vertical
9648.00	37.10	12.52	36.29	32.60	45.93	74.00	-28.07	Vertical
4376.54	33.78	8.28	38.65	45.66	49.07	74.00	-24.93	Horizontal
4824.00	34.12	8.90	38.75	54.80	59.07	74.00	-14.93	Horizontal
6913.56	35.27	10.49	37.83	44.91	52.84	74.00	-21.16	Horizontal
7236.00	35.58	10.69	37.63	49.35	57.99	74.00	-16.01	Horizontal
8957.43	36.98	11.79	37.19	34.85	46.43	74.00	-27.57	Horizontal
9648.00	37.10	12.52	36.29	32.44	45.77	74.00	-28.23	Horizontal

Test mode: 802.1	g Test channel:	Lowest	Remark:	Average
------------------	-----------------	--------	---------	---------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)	Polarization
4824.00	34.12	8.90	38.75	42.80	47.07	54.00	-6.93	Horizontal
7236.00	35.58	10.69	37.63	39.21	47.85	54.00	-6.15	Horizontal



Report No.: SZEM160300168005

Page: 75 of 104

Test mode: 802.11g Test channel: Middle Remark: Peak

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4326.17	33.73	8.22	38.64	45.34	48.65	74.00	-25.35	Vertical
4874.00	34.17	8.97	38.76	52.74	57.12	74.00	-16.88	Vertical
6087.00	34.74	10.45	38.85	45.88	52.22	74.00	-21.78	Vertical
7311.00	35.54	10.72	37.59	51.07	59.74	74.00	-14.26	Vertical
9463.72	37.24	12.39	36.54	35.64	48.73	74.00	-25.27	Vertical
9748.00	37.10	12.58	36.16	38.70	52.22	74.00	-21.78	Vertical
4363.89	33.76	8.26	38.65	45.24	48.61	74.00	-25.39	Horizontal
4874.00	34.17	8.97	38.76	56.47	60.85	74.00	-13.15	Horizontal
6658.30	35.17	10.15	38.13	45.37	52.56	74.00	-21.44	Horizontal
7311.00	35.54	10.72	37.59	52.09	60.76	74.00	-13.24	Horizontal
9518.66	37.18	12.45	36.47	35.84	49.00	74.00	-25.00	Horizontal
9748.00	37.10	12.58	36.16	39.82	53.34	74.00	-20.66	Horizontal

Tes	t mode:	802.11g	Test channel:	Middle	Remark:	Average
-----	---------	---------	---------------	--------	---------	---------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)	Polarization
4874.00	34.17	8.97	38.76	40.50	44.88	54.00	-9.12	Vertical
7311.00	35.54	10.72	37.59	38.10	46.77	54.00	-7.23	Vertical
4874.00	34.17	8.96	38.76	45.00	49.37	54.00	-4.63	Horizontal
7311.00	35.54	10.72	37.59	40.00	48.67	54.00	-5.33	Horizontal



Report No.: SZEM160300168005

Page: 76 of 104

Test mode: 802.11g Test channel: Highest Remark: Peak

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4376.54	33.78	8.28	38.65	45.74	49.15	74.00	-24.85	Vertical
4924.00	34.22	9.04	38.77	48.05	52.54	74.00	-21.46	Vertical
6619.88	35.19	10.10	38.18	45.30	52.41	74.00	-21.59	Vertical
7386.00	35.51	10.75	37.56	41.71	50.41	74.00	-23.59	Vertical
9436.38	37.26	12.36	36.58	35.68	48.72	74.00	-25.28	Vertical
9848.00	37.15	12.63	36.03	39.25	53.00	74.00	-21.00	Vertical
4221.06	33.62	8.09	38.62	45.09	48.18	74.00	-25.82	Horizontal
4924.00	34.22	9.04	38.77	53.89	58.38	74.00	-15.62	Horizontal
6933.60	35.30	10.51	37.81	45.12	53.12	74.00	-20.88	Horizontal
7386.00	35.51	10.75	37.56	43.89	52.59	74.00	-21.41	Horizontal
9463.72	37.24	12.39	36.54	35.83	48.92	74.00	-25.08	Horizontal
9848.00	37.15	12.63	36.03	38.40	52.15	74.00	-21.85	Horizontal
Test mode:	802	.11g	Test ch	annel:	Highest	Remark	:	Average

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)	Polarization
4924.00	34.23	9.04	38.78	40.87	45.36	54.00	-8.64	Horizontal



Report No.: SZEM160300168005

Page: 77 of 104

Test mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Peak

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4376.54	33.78	8.28	38.65	44.66	48.07	74.00	-25.93	Vertical
4824.00	34.12	8.90	38.75	54.21	58.48	74.00	-15.52	Vertical
6069.41	34.74	10.47	38.87	46.33	52.67	74.00	-21.33	Vertical
7236.00	35.58	10.69	37.63	49.09	57.73	74.00	-16.27	Vertical
8931.54	36.97	11.80	37.20	36.30	47.87	74.00	-26.13	Vertical
9648.00	37.10	12.52	36.29	32.72	46.05	74.00	-27.95	Vertical
4376.54	33.78	8.28	38.65	45.11	48.52	74.00	-25.48	Horizontal
4824.00	34.12	8.90	38.75	55.65	59.92	74.00	-14.08	Horizontal
6016.95	34.71	10.54	38.94	45.83	52.14	74.00	-21.86	Horizontal
7236.00	35.58	10.69	37.63	50.42	59.06	74.00	-14.94	Horizontal
8905.73	36.95	11.80	37.20	36.53	48.08	74.00	-25.92	Horizontal
9648.00	37.10	12.52	36.29	32.73	46.06	74.00	-27.94	Horizontal

Test mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Average
------------	---------------	---------------	--------	---------	---------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)	Polarization
4824.00	34.12	8.90	38.75	41.00	45.27	54.00	-8.73	Vertical
7236.00	35.58	10.69	37.63	38.01	46.65	54.00	-7.35	Vertical
4824.00	34.12	8.90	38.75	43.00	47.27	54.00	-6.73	Horizontal
7236.00	35.58	10.69	37.63	39.51	48.15	54.00	-5.85	Horizontal



Report No.: SZEM160300168005

Page: 78 of 104

Test mode:	802.11n(HT20)	Test channel:	Middle	Remark:	Peak

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4505.04	33.64	8.43	38.68	45.63	49.02	74.00	-24.98	Vertical
4874.00	34.17	8.97	38.76	52.73	57.11	74.00	-16.89	Vertical
6338.67	34.80	10.13	38.52	45.97	52.38	74.00	-21.62	Vertical
7311.00	35.54	10.72	37.59	50.94	59.61	74.00	-14.39	Vertical
8867.16	36.93	11.81	37.21	35.40	46.93	74.00	-27.07	Vertical
9748.00	37.10	12.58	36.16	38.64	52.16	74.00	-21.84	Vertical
4650.75	33.65	8.65	38.72	45.75	49.33	74.00	-24.67	Horizontal
4874.00	34.17	8.97	38.76	55.50	59.88	74.00	-14.12	Horizontal
6994.05	35.39	10.59	37.74	44.99	53.23	74.00	-20.77	Horizontal
7311.00	35.54	10.72	37.59	50.57	59.24	74.00	-14.76	Horizontal
9518.66	37.18	12.45	36.47	35.84	49.00	74.00	-25.00	Horizontal
9748.00	37.10	12.58	36.16	39.18	52.70	74.00	-21.30	Horizontal

Test mode:	802.11n(HT20)	Test channel:	Middle	Remark:	Average
------------	---------------	---------------	--------	---------	---------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)	Polarization
4874.00	34.17	8.97	38.76	40.30	44.68	54.00	-9.32	Vertical
7311.00	35.54	10.72	37.59	37.50	46.17	54.00	-7.83	Vertical
4874.00	34.17	8.97	38.76	43.50	47.88	54.00	-6.12	Horizontal
7311.00	35.54	10.72	37.59	38.50	47.17	54.00	-6.83	Horizontal



Report No.: SZEM160300168005

Page: 79 of 104

Test mode: 802.11n(HT20) Test channel: Highest Remark: I	Remark: Peak
--	--------------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4389.22	33.79	8.29	38.66	45.26	48.68	74.00	-25.32	Vertical
4924.00	34.22	9.04	38.77	49.46	53.95	74.00	-20.05	Vertical
6973.84	35.36	10.57	37.76	44.71	52.88	74.00	-21.12	Vertical
7386.00	35.51	10.75	37.56	40.85	49.55	74.00	-24.45	Vertical
9463.72	37.24	12.39	36.54	35.65	48.74	74.00	-25.26	Vertical
9848.00	37.15	12.63	36.03	37.51	51.26	74.00	-22.74	Vertical
4492.02	33.66	8.41	38.68	45.95	49.34	74.00	-24.66	Horizontal
4924.00	34.22	9.04	38.77	53.42	57.91	74.00	-16.09	Horizontal
4924.00	34.22	9.04	38.77	40.00	44.49	54.00	-9.51	Horizontal
6034.39	34.72	10.52	38.91	45.82	52.15	74.00	-21.85	Horizontal
7386.00	35.51	10.75	37.56	42.52	51.22	74.00	-22.78	Horizontal
9463.72	37.24	12.39	36.54	36.04	49.13	74.00	-24.87	Horizontal
Test mode:	802	2.11n(HT20)	Test ch	annel:	Highest	Remark	:	Average

Frequen (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)	Polarization
4924.00	34.22	9.04	38.77	40.00	44.49	54.00	-9.51	Vertical



Report No.: SZEM160300168005

Page: 80 of 104

Test mode: 802.11n(HT40) Test channel: Lowest Remark: Peak

	0.11		Б.	Б.				<u> </u>
Frequency	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Polarizatio
(MHz)	(dB)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	n
4518.10	33.62	8.45	38.69	46.02	49.40	74.00	-24.60	Vertical
4844.00	34.14	8.92	38.76	46.44	50.74	74.00	-23.26	Vertical
6853.80	35.18	10.41	37.90	44.50	52.19	74.00	-21.81	Vertical
7266.00	35.57	10.70	37.61	42.53	51.19	74.00	-22.81	Vertical
9518.66	37.18	12.45	36.47	35.94	49.10	74.00	-24.90	Vertical
9688.00	37.10	12.54	36.24	33.81	47.21	74.00	-26.79	Vertical
4401.94	33.80	8.31	38.66	45.16	48.61	74.00	-25.39	Horizontal
4844.00	34.14	8.92	38.76	48.28	52.58	74.00	-21.42	Horizontal
6696.95	35.15	10.20	38.08	45.82	53.09	74.00	-20.91	Horizontal
7266.00	35.57	10.70	37.61	42.25	50.91	74.00	-23.09	Horizontal
9491.15	37.21	12.43	36.50	36.71	49.85	74.00	-24.15	Horizontal
9688.00	37.10	12.54	36.24	33.24	46.64	74.00	-27.36	Horizontal



Report No.: SZEM160300168005

Page: 81 of 104

Test mode:	802.11n(HT40)	Test channel:	Middle	Remark:	Peak
	00=::::(:::::0)	1 001 0114111011	· · · · · · · · · · · · · · · · · · ·	i tomanti	· oait

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4376.54	33.78	8.28	38.65	44.78	48.19	74.00	-25.81	Vertical
4874.00	34.17	8.97	38.76	47.18	51.56	74.00	-22.44	Vertical
6953.69	35.33	10.54	37.78	44.40	52.49	74.00	-21.51	Vertical
7311.00	35.54	10.72	37.59	44.09	52.76	74.00	-21.24	Vertical
9546.24	37.15	12.47	36.43	36.24	49.43	74.00	-24.57	Vertical
9748.00	37.10	12.58	36.16	39.74	53.26	74.00	-20.74	Vertical
4363.89	33.76	8.26	38.65	44.85	48.22	74.00	-25.78	Horizontal
4874.00	34.17	8.97	38.76	53.43	57.81	74.00	-16.19	Horizontal
6619.88	35.19	10.10	38.18	44.93	52.04	74.00	-21.96	Horizontal
7311.00	35.54	10.72	37.59	49.99	58.66	74.00	-15.34	Horizontal
9518.66	37.18	12.45	36.47	36.70	49.86	74.00	-24.14	Horizontal
9748.00	37.10	12.58	36.16	39.11	52.63	74.00	-21.37	Horizontal

Test	mode:	802.11n(HT40)	Test channel:	Middle	Remark:	Average
------	-------	---------------	---------------	--------	---------	---------

Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)	Polarization
4874.00	34.17	8.97	38.76	40.00	44.38	54.00	-9.62	Horizontal
7311.00	35.54	10.72	37.59	35.80	44.47	54.00	-9.53	Horizontal



Report No.: SZEM160300168005

Page: 82 of 104

Test mode: 802.1	1n(HT40) Test channel:	Highest	Remark:	Peak
------------------	------------------------	---------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4363.89	33.76	8.26	38.65	44.89	48.26	74.00	-25.74	Vertical
4904.00	34.21	9.01	38.77	44.98	49.43	74.00	-24.57	Vertical
6994.05	35.39	10.59	37.74	43.77	52.01	74.00	-21.99	Vertical
7356.00	35.52	10.74	37.57	38.54	47.23	74.00	-26.77	Vertical
9491.15	37.21	12.43	36.50	36.24	49.38	74.00	-24.62	Vertical
9808.00	37.11	12.61	36.08	37.43	51.07	74.00	-22.93	Vertical
4338.71	33.74	8.23	38.64	44.95	48.28	74.00	-25.72	Horizontal
4904.00	34.21	9.01	38.77	46.42	50.87	74.00	-23.13	Horizontal
6016.95	34.71	10.54	38.94	45.71	52.02	74.00	-21.98	Horizontal
7356.00	35.52	10.74	37.57	39.01	47.70	74.00	-26.30	Horizontal
9518.66	37.18	12.45	36.47	35.74	48.90	74.00	-25.10	Horizontal
9808.00	37.11	12.61	36.08	37.20	50.84	74.00	-23.16	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




Report No.: SZEM160300168005

Page: 83 of 104

6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section	7 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2013									
Test Site:	Measurement Distance: 3r	n (Semi-Anechoic Chambe	er)							
Limit:	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value							
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Abovo 1CHz	54.0	Average Value							
	Above IGHZ	Above 1GHz 74.0 P								
Test Setup:										

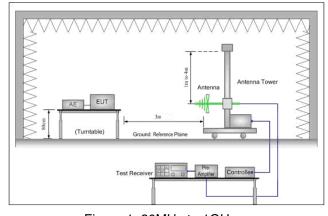

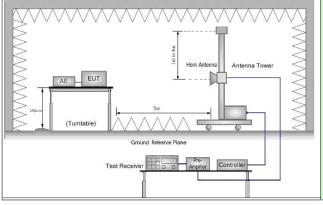


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM160300168005

Page: 84 of 104

Test Procedure: a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and then the antenna was tuned to heights from 1 meter to 4 meters and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel, the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode. And found the Y axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete. Exploratory Test Mode: Final Test Mode: Final Test Mode: Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode and Charge +Transmitti		
1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel h. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the Y axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete. Exploratory Test Mode: Frinal Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n (HT40) Only the worst case is recorded in the report.	Test Procedure:	meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest
antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the Y axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete. Exploratory Test Mode: Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11n (HT20); 13.5Mbps of rate is the worst case of 802.11n (HT40) Only the worst case is recorded in the report.		1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest
ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the Y axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete. Exploratory Test Mode: Final Test Mode: Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) Only the worst case is recorded in the report.		antenna, which was mounted on the top of a variable-height antenna
and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the Y axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete. Exploratory Test Mode: Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) Only the worst case is recorded in the report.		ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make
Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel, the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the Y axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete. Exploratory Test Mode: Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to
transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel, the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the Y axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete. Exploratory Test Mode: Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the Y axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete. Exploratory Test Mode: Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the Y axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete. Exploratory Test Mode: Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		h. Test the EUT in the lowest channel, the Highest channel
complete. Exploratory Test Mode: Transmitting with all kind of modulations, data rates. Transmitting mode, Charge + Transmitting mode. Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the Y axis positioning which it is
Transmitting mode, Charge + Transmitting mode. Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		
Final Test Mode: Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details	Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		Transmitting mode, Charge + Transmitting mode.
6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details	Final Test Mode:	
case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40) Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details		
Instruments Used: Refer to section 5.10 for details		of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)
		Only the worst case is recorded in the report.
Test Results: Pass	Instruments Used:	Refer to section 5.10 for details
	Test Results:	Pass




Report No.: SZEM160300168005

Page: 85 of 104

Test plot as follows:

Worse case mode: 802.11b Test channel: Lowest Remark: Peak Vertical

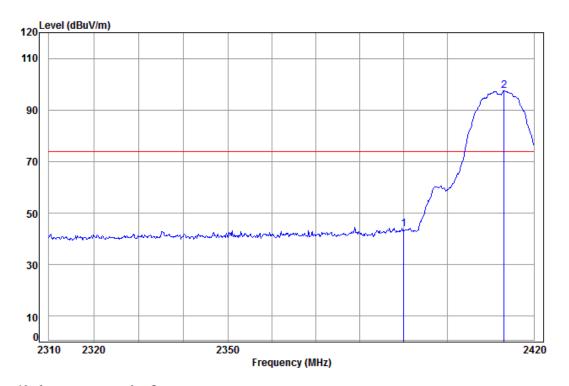

Condition: 3m Vertical

Job No: : 1680RG

Mode: : 2412 Band edge

: B


	Freq							Over Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2390.00 2413.14							



Report No.: SZEM160300168005

Page: 86 of 104

Worse case mode: 802.11b Test channel: Lowest Remark: Peak Horizontal

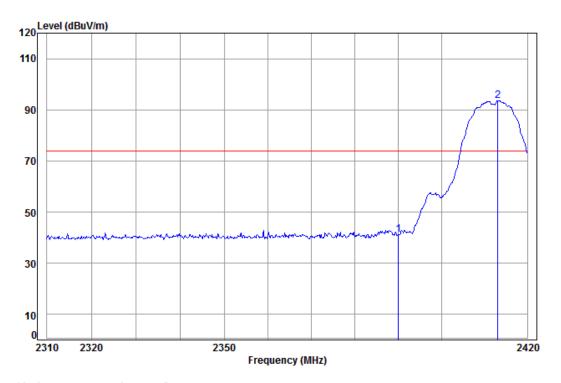

Condition: 3m Horizontal

Job No: : 1680RG

Mode: : 2412 Band edge

: B


Ant Preamp Read 0ver Cable 1 Limit Freq Limit Loss Factor Factor Level Level Line dB dBuV dBuV/m dBuV/m MHz dB/m 2390.00 5.34 28.57 38.11 45.42 41.22 74.00 -32.78 28.66 5.36 38.11 97.60 93.51 74.00 19.51 2413.14



Report No.: SZEM160300168005

Page: 87 of 104

Worse case mode: 802.11b Test channel: Highest Remark: Peak Vertical

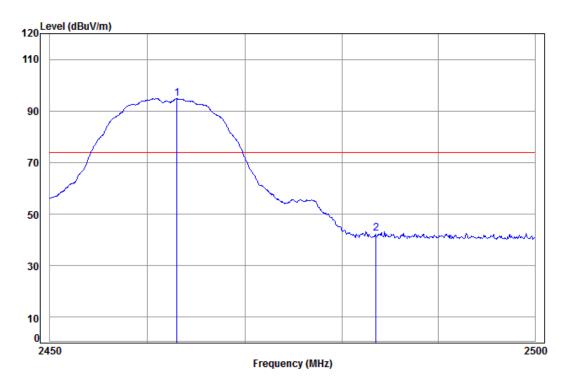

Condition: 3m Vertical

Job No: : 1680RG

Mode: : 2462 Band edge

: B


	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2463.00 2483.50							



Report No.: SZEM160300168005

Page: 88 of 104

Worse case mode: 802.11b Test channel: Highest Remark: Peak Horizontal

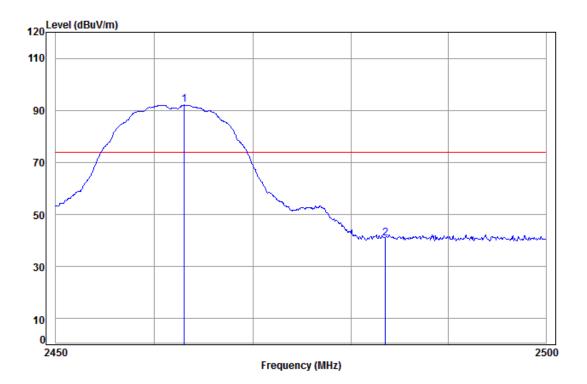

Condition: 3m Horizontal

Job No: : 1680RG

Mode: : 2462 Band edge

: B


	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2463.00 2483.50							



Report No.: SZEM160300168005

Page: 89 of 104

Worse case mode: 802.11g Test channel: Lowest Remark: Peak Vertical

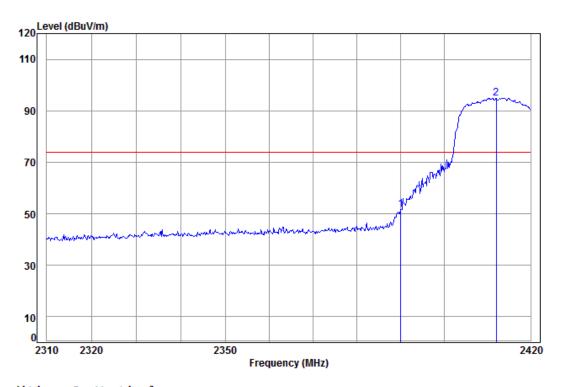

Condition: 3m Vertical

Job No: : 1680RG

1

Mode: : 2412 Band edge

: G


				Preamp Factor			Freq	
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	dB	MHz	-
							2390.00	l) nn



Report No.: SZEM160300168005

Page: 90 of 104

Worse case mode: 802.11g Test channel: Lowest Remark: Peak Horizontal

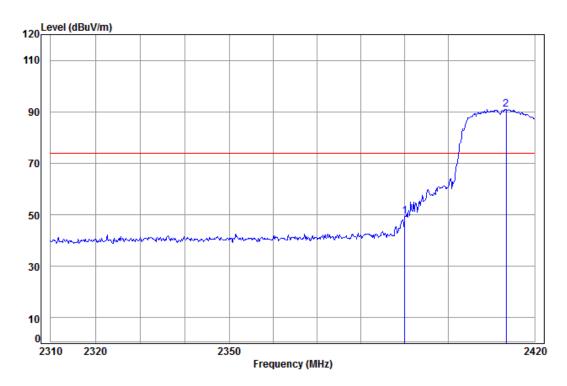

Condition: 3m Horizontal

Job No: : 1680RG

Mode: : 2412 Band edge

: G


	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 pp	2390.00 2413.37							



Report No.: SZEM160300168005

Page: 91 of 104

Worse case mode: 802.11g Test channel: Highest Remark: Peak Vertical

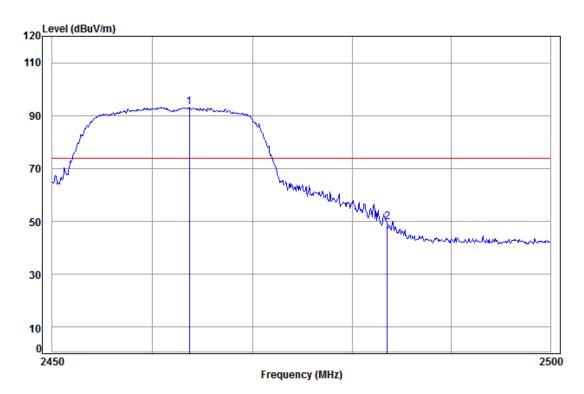

Condition: 3m Vertical

Job No: : 1680RG

Mode: : 2462 Band edge

: G


	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2463.65 2483.50							



Report No.: SZEM160300168005

Page: 92 of 104

Worse case mode: 802.11g Test channel: Highest Remark: Peak Horizontal

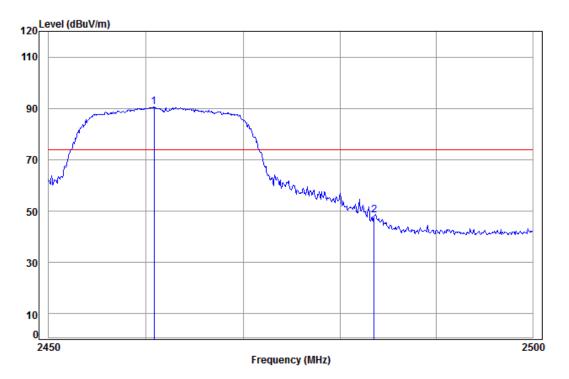

Condition: 3m Horizontal

Job No: : 1680RG

Mode: : 2462 Band edge

: G


				Preamp Factor			Freq	
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	dB	MHz	_
							2460.81 2483.50	1 pp



Report No.: SZEM160300168005

Page: 93 of 104

802.11n(HT20) Test channel: Remark: Peak Vertical Worse case mode: Lowest

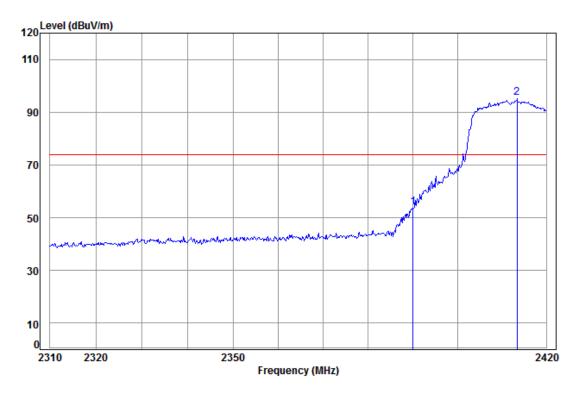

Condition: 3m Vertical

Job No: : 1680RG

Mode: : 2412 Band edge

: N20


	Fred			Preamp Factor				
_								
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.00	5.34	28.57	38.11	58.04	53.84	74.00	-20.16
2 pp	2413.37	5.36	28.66	38.11	99.66	95.57	74.00	21.57



Report No.: SZEM160300168005

Page: 94 of 104

Worse case mode: 802.11n(HT20) Test channel: Lowest Remark: Peak Horizontal

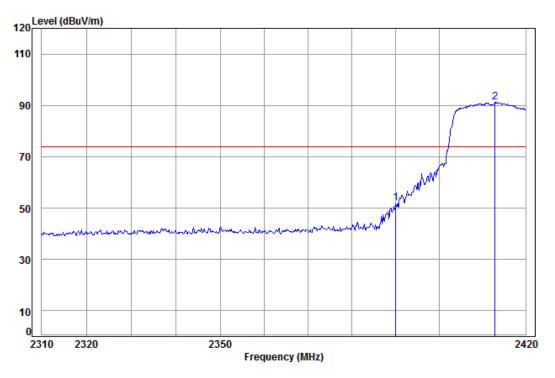

Condition: 3m Horizontal

Job No: : 1680RG

Mode: : 2412 Band edge

: N20


	Freq		Preamp Factor		
-	MHz		dB		
	2390.00 2412.92				



Report No.: SZEM160300168005

Page: 95 of 104

Worse case mode: | 802.11n(HT20) | Test channel: | Highest | Remark: | Peak | Vertical

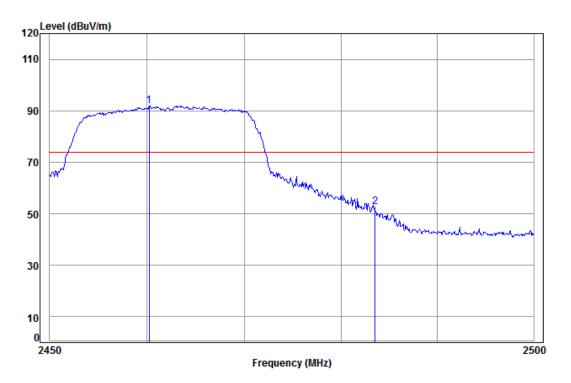

Condition: 3m Vertical

Job No: : 1680RG

Mode: : 2462 Band edge

: N20


				Preamp Factor			Freq	
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	dB	MHz	_
							2460.22 2483.50	1 pp



Report No.: SZEM160300168005

Page: 96 of 104

Worse case mode: 802.11n(HT20) Test channel: Highest Remark: Peak Horizontal

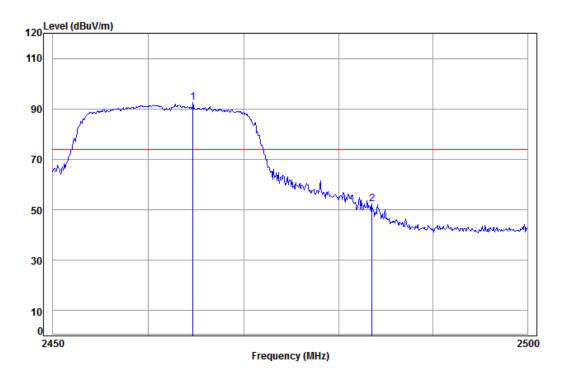

Condition: 3m Horizontal

Job No: : 1680RG

1 2

Mode: : 2462 Band edge

: N20


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
pp	2464.65	5.39	28.90	38.12	96.20	92.37	74.00	18.37
	2483.50	5.41	28.98	38.12	56.15	52.42	74.00	-21.58



Report No.: SZEM160300168005

Page: 97 of 104

Worse case mode: | 802.11n(HT40) | Test channel: | Lowest | Remark: | Peak | Vertical

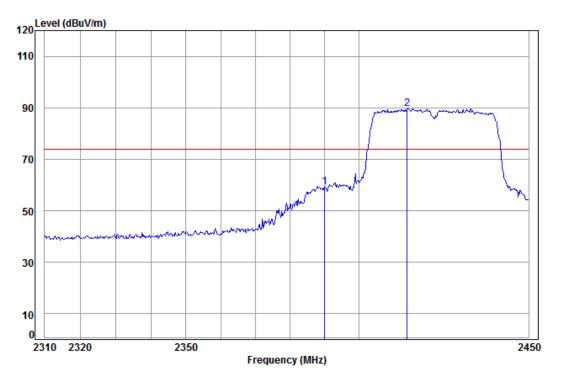

Condition: 3m Vertical

Job No: : 1680RG

Mode: : 2422 Band edge

: N40


	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 pp	2390.00 2414.08							



Report No.: SZEM160300168005

Page: 98 of 104

802.11n(HT40) Test channel: Remark: Peak Horizontal Worse case mode: Lowest

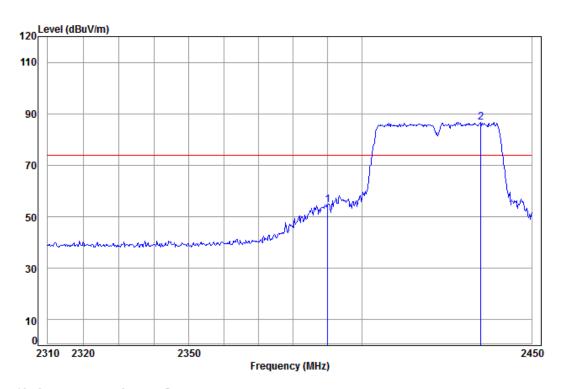

Condition: 3m Horizontal

Job No: : 1680RG

Mode: : 2422 Band edge

: N40


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
			•			•	•	
1	2390.00	5.34	28.57	38.11	58.94	54.74	74.00	-19.26
2 pp	2434.91	5.37	28.76	38.11	90.61	86.63	74.00	12.63



Report No.: SZEM160300168005

Page: 99 of 104

Worse case mode: | 802.11n(HT40) | Test channel: | Highest | Remark: | Average | Vertical

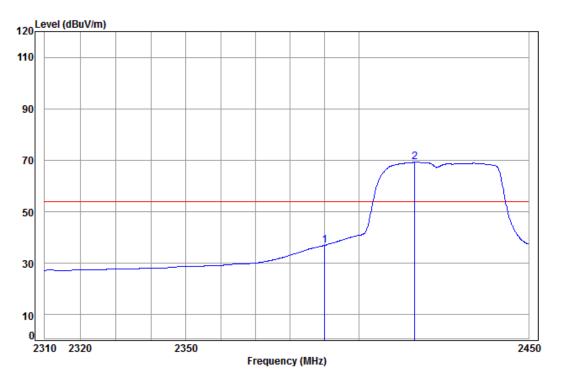

Condition: 3m Vertical

Job No: : 1680RG

Mode: : 2422 Band edge

: N40


Limit Cable 1 Ant Preamp Over Read Freq Loss Factor Factor Level Limit Level Line dBuV dBuV/m dBuV/m MHz dB dB/m dΒ 2390.00 5.34 28.57 38.11 41.21 37.01 54.00 -16.99 2416.36 5.36 28.68 38.11 73.28 69.21 54.00 15.21



Report No.: SZEM160300168005

Page: 100 of 104

Worse case mode: 802.11n(HT40) Test channel: Highest Remark: Average Horizontal

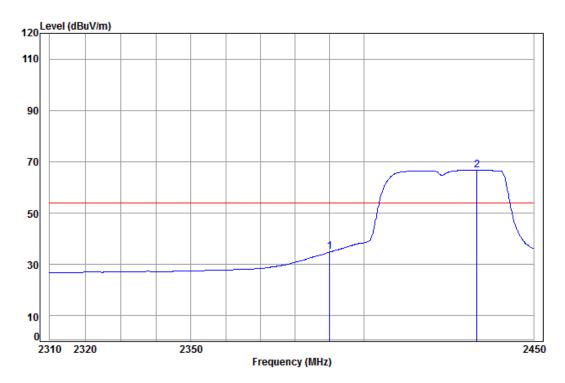

Condition: 3m Horizontal

Job No: : 1680RG

Mode: : 2422 Band edge

: N40


Cable Ant Preamp Limit 0ver Read Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dBuV dBuV/m dBuV/m 2390.00 5.34 28.57 38.11 39.06 34.86 54.00 -19.14 2 pp 2433.19 5.37 28.75 38.11 70.82 66.83 54.00 12.83



Report No.: SZEM160300168005

Page: 101 of 104

Worse case mode: 802.11n(HT40) Test channel: Highest Remark: Peak Vertical

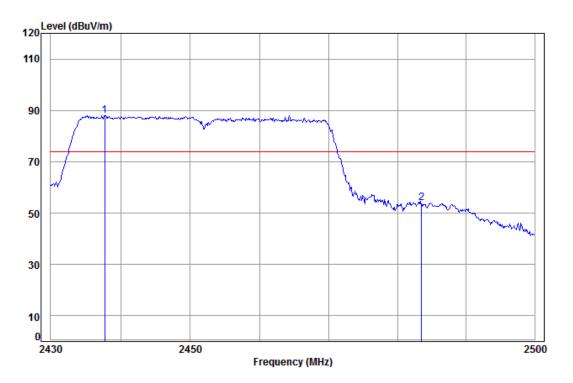

Condition: 3m Vertical

Job No: : 1680RG

Mode: : 2452 Band edge

: N40


Cable Ant Preamp Limit 0ver Read Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dBuV dBuV/m dBuV/m 2437.74 5.37 28.78 38.11 91.96 88.00 74.00 14.00 1 pp 2483.50 5.41 28.98 38.12 57.53 53.80 74.00 -20.20



Report No.: SZEM160300168005

Page: 102 of 104

Worse case mode: 802.11n(HT40) Test channel: Highest Remark: Peak Horizontal

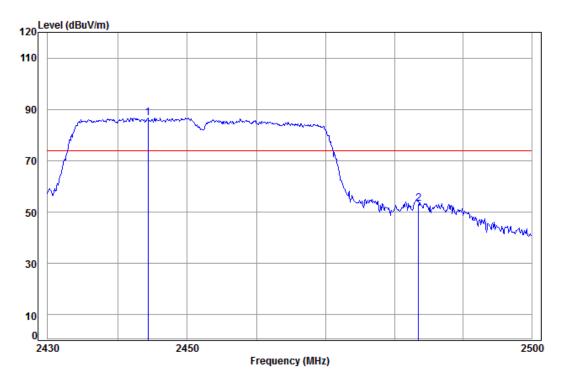

Condition: 3m Horizontal

Job No: : 1680RG

Mode: : 2452 Band edge

: N40

	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2444.33							

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM160300168005

Page: 103 of 104

7 Photographs - EUT Test Setup

Test model No.: V4

7.1 Conducted Emission



7.2 Radiated Emission






Report No.: SZEM160300168005

Page: 104 of 104

7.3 Radiated Spurious Emission

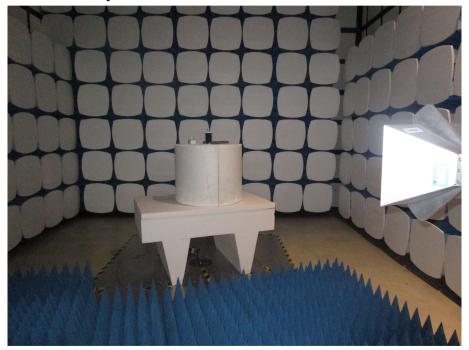

8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1603001680RG.