



America

**Choose certainty.
Add value.**

Report On

Application for Grant of Equipment Authorization of the
IPS Group Inc.

VDS-030 Dome Sensor Radio

FCC Part 15 Subpart C §15.231

Report No. SC1410654A

November 2014



REPORT ON

Radio Testing of the
IPS Group Inc.
Dome Sensor Radio

TEST REPORT NUMBER

SC1410654A


PREPARED FOR

IPS Group Inc.
5601 Oberlin Drive
San Diego, CA 92121

CONTACT PERSON


Gary Thomas
Sr. RF Design Engineer
(858) 768-2401 ext. 211
gary.thomas@ipsgroupinc.com

PREPARED BY



Kathy MacKenzie
Name
Authorized Signatory
Title: EMC/Wireless Test Technician

APPROVED BY



Juan M. Gonzalez
Name
Authorized Signatory
Title: Commercial/Wireless EMC Lab Manager

DATED

November 18, 2014



Revision History

SC1410654A IPS Group Inc. VDS-030 Dome Sensor Radio					
DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
11/18/2014	Initial Release				Juan M. Gonzalez



CONTENTS

Section	Page No
1	REPORT SUMMARY5
1.1	Introduction.....6
1.2	Brief Summary Of Results 7
1.3	Product Information8
1.4	EUT Test Configuration10
1.5	Deviations From The Standard.....11
1.6	Modification Record11
1.7	Test Methodology11
1.8	Test Facility Location11
1.9	Test Facility Registration.....11
2	TEST DETAILS.....12
2.1	Conducted Emissions13
2.2	Transmission Verification For Transmitter Activated Automatically.....14
2.3	Polling Or Supervision Transmissions, Including Data, To Determine System Integrity Of Transmitters Used In Security Or Safety Applications15
2.4	Field Strength Of Emissions18
2.5	Bandwidth Requirement.....26
3	TEST EQUIPMENT USED29
3.1	Test Equipment Used.....30
3.2	Measurement Uncertainty31
4	DIAGRAM OF TEST SETUP32
4.1	Test Setup Diagram33
5	ACCREDITATION, DISCLAIMERS AND COPYRIGHT35
5.1	Accreditation, Disclaimers and Copyright36



SECTION 1

REPORT SUMMARY

Radio Testing of the
IPS Group Inc.
Dome Sensor Radio



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the IPS Group Inc. VDS-030 Dome Sensor Radio to the requirements of FCC Part 15 Subpart C §15.231

Objective	To perform Radio Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	IPS Group Inc.
Model Number(s)	VDS-030
FCC ID Number	SGWIPS2014VDS
Serial Number(s)	Engineering Sample
Number of Samples Tested	1
Test Specification/Issue/Date	FCC Part 15 Subpart C §15.231 (October 1, 2013)
Start of Test	November 7, 2014
Finish of Test	November 17, 2014
Name of Engineer(s)	Kathy Mackenzie
Related Document(s)	None. Supporting documents for EUT certification are separate exhibits.



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC Part 15 Subpart C §15.231 standard is shown below.

Section	§15.231 Spec Clause	Test Description	Result	Comments/Base Standard
2.1	§15.207 (a)	Conducted Emissions	N/A *	
2.2	§15.231(a)(2)	Transmission Verification For Transmitter Activated Automatically	N/A **	
2.3	§15.231(a)(3)	Polling Or Supervision Transmissions, Including Data, To Determine System Integrity Of Transmitters Used In Security Or Safety Applications	Compliant***	
2.4	§15.231(b)	Field Strength Of Emissions	Compliant	
2.5	§15.231(c)	Bandwidth Requirement	Compliant	
—	—	Receiver Spurious Emissions	N/A	Applies to IC RSS Specification Only

* Not applicable. EUT is battery operated device.

** EUT is a transmitter that activates automatically, however provisions of §15.231(a)(3) applies.

*** Results presented from test report SC1406410A . Per customer declaration the TX sequence is exactly the same between the 2 products and measurements from test report SC1406410 remain valid for this product (representative model).



1.3 PRODUCT INFORMATION

1.3.1 EUT General Description

The Equipment Under Test (EUT) was an IPS Group Inc. VDS-030 (Dome Sensor Radio). The EUT provides a reliable and secure detection system which detects the presence and absence of a vehicle in a public or garage parking space. The sensor uniquely directs all sensing information via the IPS single or multispace parking meter cellular communications backbone.

The parking locations, whether they are located on a city street or in a parking structure, will detect whatever is parked in a designated parking location and operates using the doppler principle. This builds in an added measure of security, it not only detects when a vehicle is located at a parking location, it will also detect when it is vacant so if a vehicle is abandoned, stolen or has been left on the street somewhere it can be immediately located and it will time date stamp the actual event. It will also tell the city workers that have shut down specific parking locations due to either road work or an event if someone has inadvertently left their vehicle on the street in a restricted area.

The sensor, because it is integrated into the actual parking meter dome, can be easily replaced if necessary and builds in an added measure of security. It has a battery life of a minimum of 1yr depending on detection activity and the sun light it collects. To maximize and conserve battery life the sensor remains dormant until it actually senses a vehicle at which time it will wake up to detect whenever a vehicle comes within its target area and relays the information or data to the meter and then returns to dormant state until the next event which is when the vehicle leaves. The sensor uses multiple sensing technologies combining RF as well as radar to detect vehicles. Its unique design provides the most accurate data on the sensor market and allows for quick installation and servicing.



1.3.2 EUT General Description

EUT Description Dome Sensor Radio

Model Number(s) VDS-030

Rated Voltage Internal batteries are 3.6VDC hybrid layer capacitor lithium ion

Mode Verified 400 MHz Transmit Mode

Capability

Item	Description
ISM/SRD Band Transceiver	400 MHz

Primary Unit (EUT)

- ☐ Production
- ☐ Pre-Production
- ☒ Engineering

Antenna Detail Specification

Manufacturer	LINX Tech
Model	ANT-433-HETH (helical, through-hole)
Type	Helical, through-hole
Frequency	418-458 MHz
Gain	1.9dBi
Length	38.1 mm
Wire Diameter	1.3mm
Wire Inside/outside Diameter	6.4mm / 8.89mm

1.3.3 Maximum Radiated Output Power

Transmitter Frequency (MHz)	Field Strength (dB μ V/m @ 3 meters)	Part 15.231(e) limits in dB μ V/m
	FSK modulation	
410	77.5 (Quasi Peak)	79.53
420	71.4 (Quasi Peak)	79.94
430	61.3 (Quasi Peak)	80.36

1.4 EUT TEST CONFIGURATION

1.4.1 Test Configuration Description

Test Configuration	Description
Default	Radiated emission test configuration. Measurement was performed while EUT configured in continuously transmission mode.

1.4.2 EUT Exercise Software


None. No special software was used to exercise the EUT.

1.4.3 Support Equipment and I/O cables

Manufacturer	Equipment/Cable	Description
—	—	—

1.4.4 Simplified Test Configuration Diagram

Radiated Emission Test Configuration

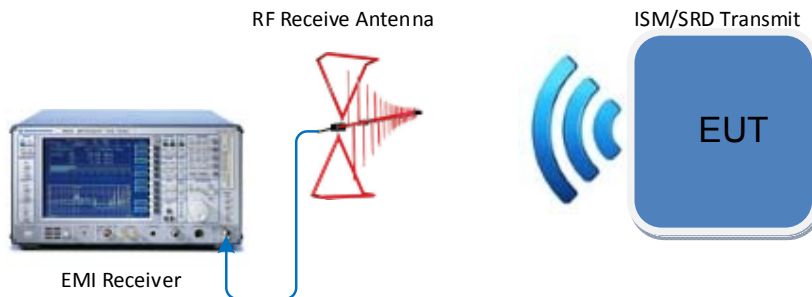

Not To Scale – Illustration Purpose Only
Objects may not represent actual image of original equipment/s or set-up.



1.5 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.6 MODIFICATION RECORD

Description of Modification	Modification Fitted By	Date Modification Fitted
Serial Number: Engineering Sample		
N/A		

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

1.7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

For conducted and radiated emissions the equipment under test (EUT) was configured to measure its highest possible emission level. This level was based on the maximized cable configuration from exploratory testing per ANSI C63.4-2009. The test modes were adapted according to the Operating Instructions provided by the manufacturer/client.

1.8 TEST FACILITY LOCATION

1.8.1 TÜV SÜD America Inc. (Mira Mesa)

10040 Mesa Rim Road, San Diego, CA 92121-2912 (32.901268,-117.177681). Phone: 858 678 1400 Fax: 858 546 0364.

1.8.2 TÜV SÜD America Inc. (Rancho Bernardo)

Sony Electronics Inc., Building #8, 16530 Via Esprillo, San Diego, CA 92127-1708 (33.018644,-117.092409). Phone: 858 942 5542 Fax: 858 546 0364.

1.9 TEST FACILITY REGISTRATION

1.9.1 FCC – Registration No.: US1146

TUV SUD America Inc. (San Diego), is an accredited test facility with the site description report on file and has met all the requirements specified in §2.498 of the FCC rules. The acceptance letter from the FCC is maintained in our files and the Registration is US1146.



SECTION 2

TEST DETAILS

Radio Testing of the
IPS Group Inc.
Dome Sensor Radio

2.1 CONDUCTED EMISSIONS

2.1.1 Specification Reference

Part 15 Subpart C §15.207(a)

2.1.2 Standard Applicable

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

**Decreases with the logarithm of the frequency.*

2.1.3 Equipment Under Test and Modification State

Not applicable. EUT is a battery operated device.



2.2 TRANSMISSION VERIFICATION FOR TRANSMITTER ACTIVATED AUTOMATICALLY

2.2.1 Specification Reference

Part 15 Subpart C §15.231(a)(2)

2.2.2 Standard Applicable

(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

2.2.3 Equipment Under Test and Modification State

- Test not applicable. When activated, the EUT transmits short burst (641 μ S) every time the sensor detects an event (vehicle entrance or departure), then returns to dormant state until the next EUT (sensor) event.
- The manufacturer declares that the EUT based from its intended application falls under the Security or Safety Application category. Therefore Part 15 Subpart C § 15.231(a) (3) applies. Please refer to Section 2.3 of this test report for details.



2.3 POLLING OR SUPERVISION TRANSMISSIONS, INCLUDING DATA, TO DETERMINE SYSTEM INTEGRITY OF TRANSMITTERS USED IN SECURITY OR SAFETY APPLICATIONS

2.3.1 Specification Reference

Part 15 Subpart C §15.231(a)(3)

2.3.2 Standard Applicable

(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

2.3.3 Equipment Under Test and Modification State

Serial No: Engineering Sample / Default Test Configuration, results presented from test report SC1406410A since per customer declaration the TX sequence is exactly the same between the 2 products.

2.3.4 Date of Test/Initial of test personnel who performed the test

June 23, 2014/JMG (results from test report SC1406410A)

2.3.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.6 Environmental Conditions/Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

Ambient Temperature	24.3°C
Relative Humidity	28.9%
ATM Pressure	99.7 kPa

2.3.7 Calculations

EUT in normal operation does not transmit continuously, it transmits short burst (641.02µS) every time the sensor detects an event (vehicle entrance or departure). Calculation presented is based on worst case and considers the numbers of cars needed to meet the spec of < 2secs/hr:


Total transmission necessary to meet the 2 seconds (limit is less than 2 seconds per hour):
Pulse Width: 641.02 µS

1 car = Pulse Width x 2 events = 1282 µS = 1.282 mS = 0.001282 Sec
2 Seconds = 0.001282 S x # of Cars to reach the 2 Sec/hr
Cars needed in an hr to reach the 2 Sec = 1560 cars *




*in a real case scenario the same parking space would never achieve 1560 cars in a time frame of one hour.--> **Compliant**

2.3.8 Test Result Plot

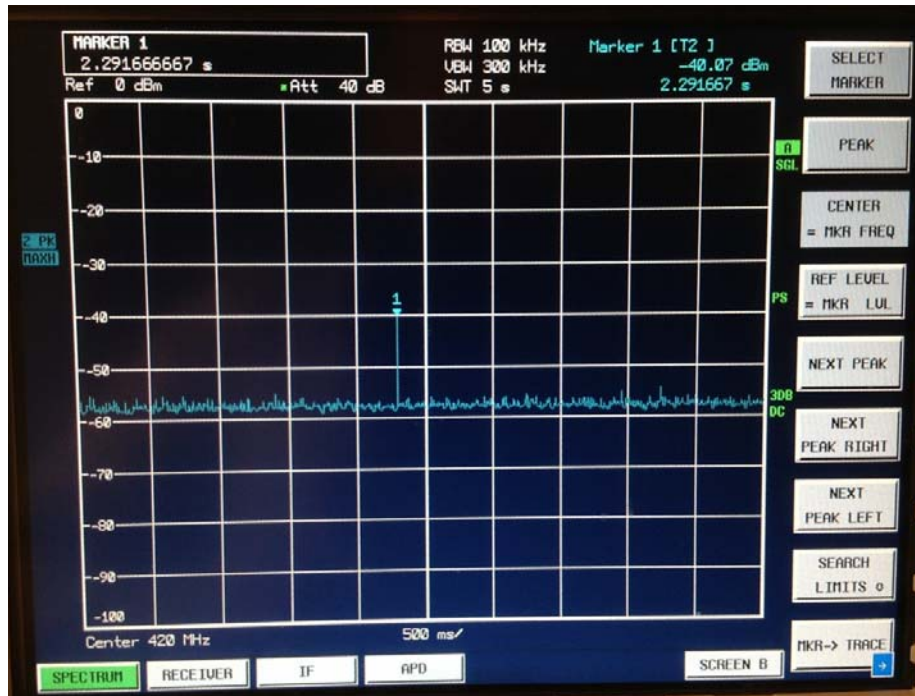

Simulated operation of the EUT showing a single burst.

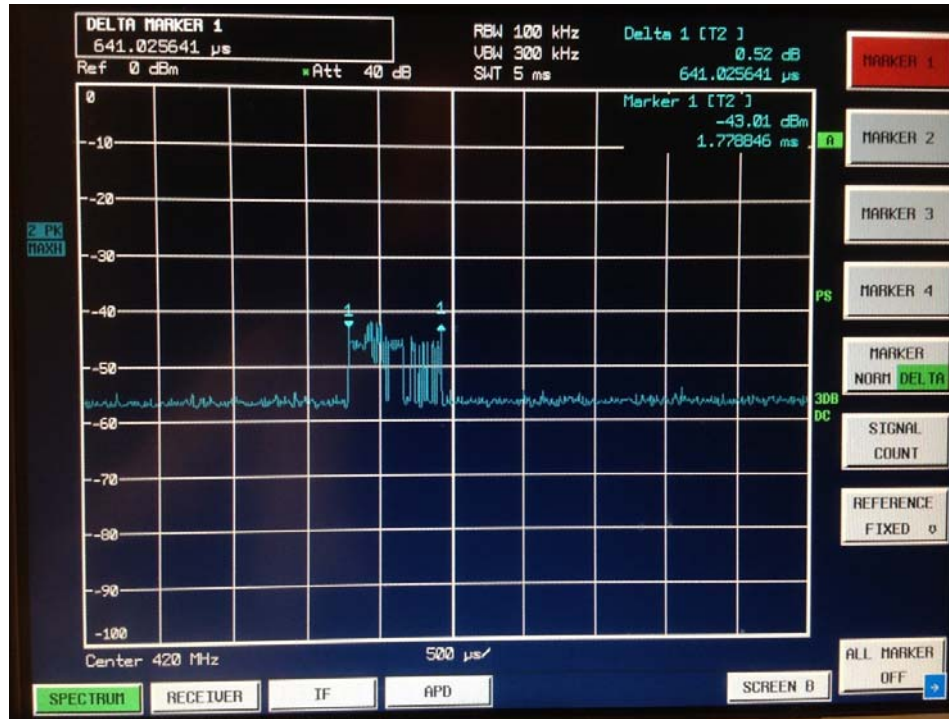

Single transmission "Short burst" =641μs)

2.4 FIELD STRENGTH OF EMISSIONS

2.4.1 Specification Reference

Part 15 Subpart C §15.231(b)

2.4.2 Standard Applicable

(b) In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750	¹ 125 to 375
174-260	3,750	375
260-470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

¹Linear Interpolations

2.4.3 Equipment Under Test and Modification State

Serial No: Engineering Sample / Default Test Configuration

2.4.4 Date of Test/Initial of test personnel who performed the test

November 7 and 11, 2014/KAM

2.4.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.6 Environmental Conditions/Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

Ambient Temperature	24.6°C
Relative Humidity	31.9%
ATM Pressure	99.6 kPa

2.4.7 Additional Observations

- This is a radiated test. The spectrum was searched from 30MHz to the 10th harmonic (5GHz), up to 18GHz presented.



- There are no emissions found that do not comply with the restricted bands defined in FCC Part 15 Subpart C, 15.205.
- Measurement was done using EMC32 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.3.8 for sample computation.


2.4.8 Sample Computation (Radiated Emission)

Measuring equipment raw measurement (db μ V) @ 30 MHz			24.4
Correction Factor (dB)	Asset# 1066 (cable)	0.3	-12.6
	Asset# 1172 (cable)	0.3	
	Asset# 1016 (preamplifier)	-30.7	
	Asset# 1175(cable)	0.3	
	Asset# 1002 (antenna)	17.2	
Reported QuasiPeak Final Measurement (db μ V/m) @ 30MHz			11.8

2.4.9 Test Results

See attached plots.

2.4.10 Test Results Below 1GHz (Low Channel 410 MHz)

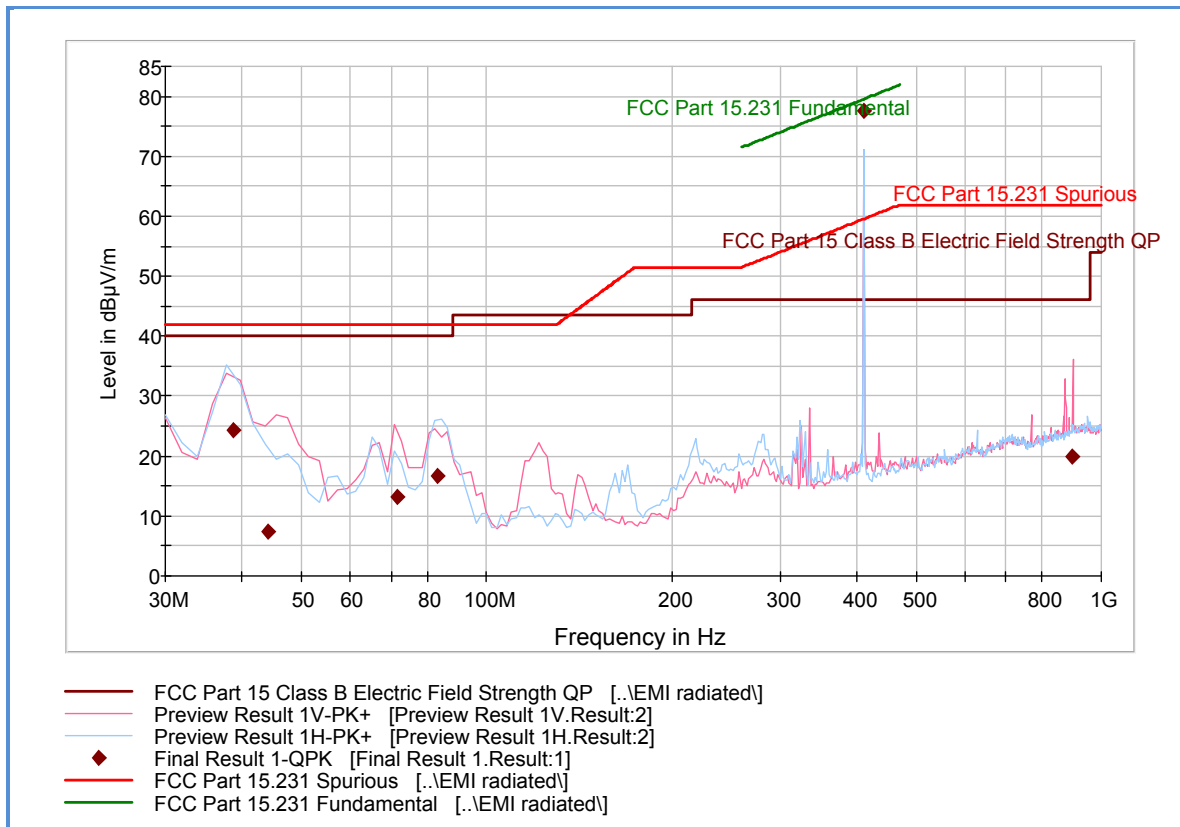


Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
38.615551	24.4	1000.0	120.000	350.0	H	15.0	-15.1	15.6	40.0	
44.111102	7.5	1000.0	120.000	110.0	V	302.0	-17.1	32.5	40.0	
71.501643	13.1	1000.0	120.000	100.0	V	139.0	-21.4	26.9	40.0	
83.188858	16.7	1000.0	120.000	105.0	H	344.0	-20.8	23.3	40.0	
410.682004	77.5	1000.0	120.000	100.0	V	110.0	-8.2	2.03	79.53	fundamenta
898.797836	19.8	1000.0	120.000	350.0	V	314.0	2.1	26.2	46.0	

Test Notes: There are no emissions found that do not comply with the restricted bands defined in FCC Part 15 Subpart C, 15.205.

2.4.11 Test Results Below 1GHz (Mid Channel 420 MHz)

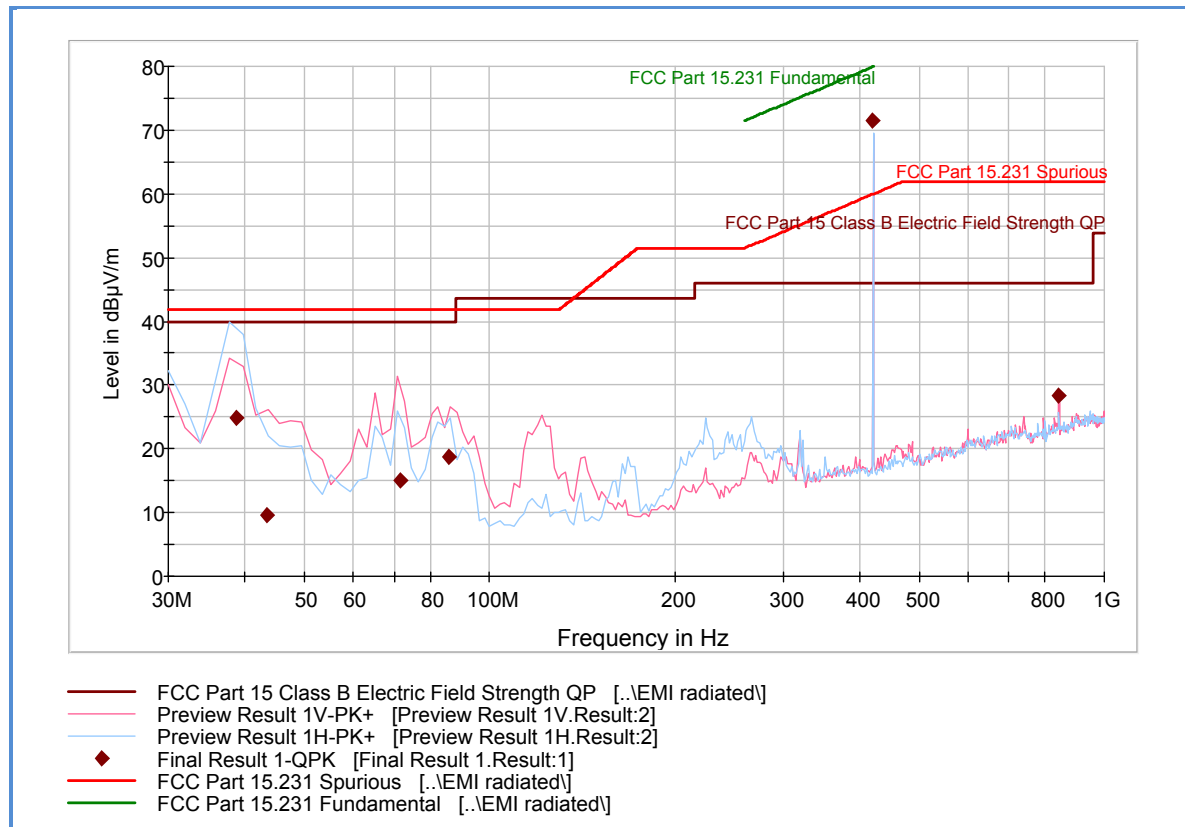


Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
38.695551	24.8	1000.0	120.000	394.0	H	15.0	-15.1	15.2	40.0	
43.327214	9.5	1000.0	120.000	100.0	V	305.0	-16.9	30.5	40.0	
71.661643	15.1	1000.0	120.000	100.0	V	18.0	-21.4	24.9	40.0	
85.892745	18.8	1000.0	120.000	109.0	V	-12.0	-20.6	21.2	40.0	
420.481443	71.4	1000.0	120.000	186.0	H	131.0	-8.1	8.54	79.94	Fundamental
841.465090	28.3	1000.0	120.000	100.0	V	106.0	0.8	17.7	46.0	

Test Notes: There are no emissions found that do not comply with the restricted bands defined in FCC Part 15 Subpart C, 15.205.

2.4.12 Test Results Below 1GHz (High Channel 430 MHz)

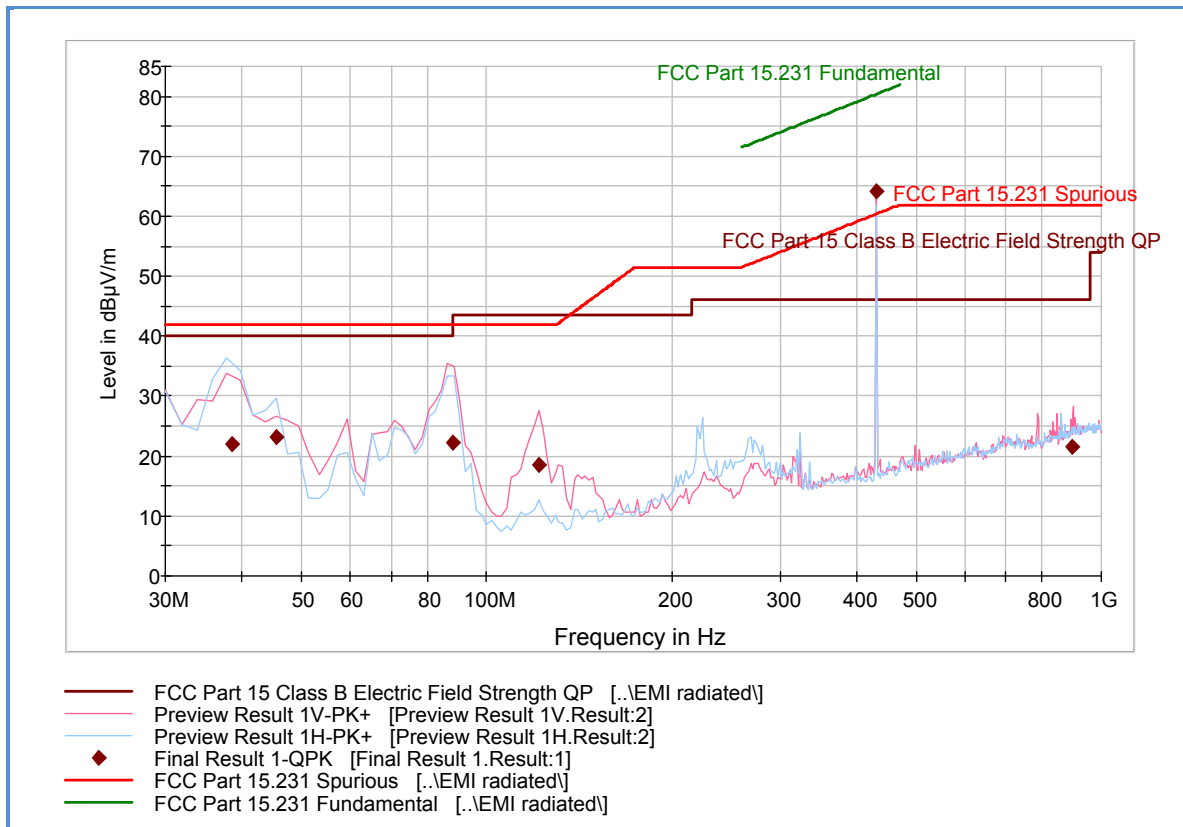


Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)	Comment
38.495551	22.1	1000.0	120.000	400.0	H	18.0	-15.0	17.9	40.0	
45.511102	23.1	1000.0	120.000	150.0	H	195.0	-17.5	16.9	40.0	
87.852745	22.3	1000.0	120.000	200.0	V	342.0	-20.3	17.7	40.0	
121.562725	18.4	1000.0	120.000	100.0	V	-12.0	-19.6	25.1	43.5	
430.520882	64.3	1000.0	120.000	100.0	V	134.0	-7.8	-18.3	46.0	Fundamental
898.237836	21.5	1000.0	120.000	100.0	V	116.0	2.1	24.5	46.0	

Test Notes: There are no emissions found that do not comply with the restricted bands defined in FCC Part 15 Subpart C, 15.205.

2.4.13 Test Results Above 1GHz (Low Channel)

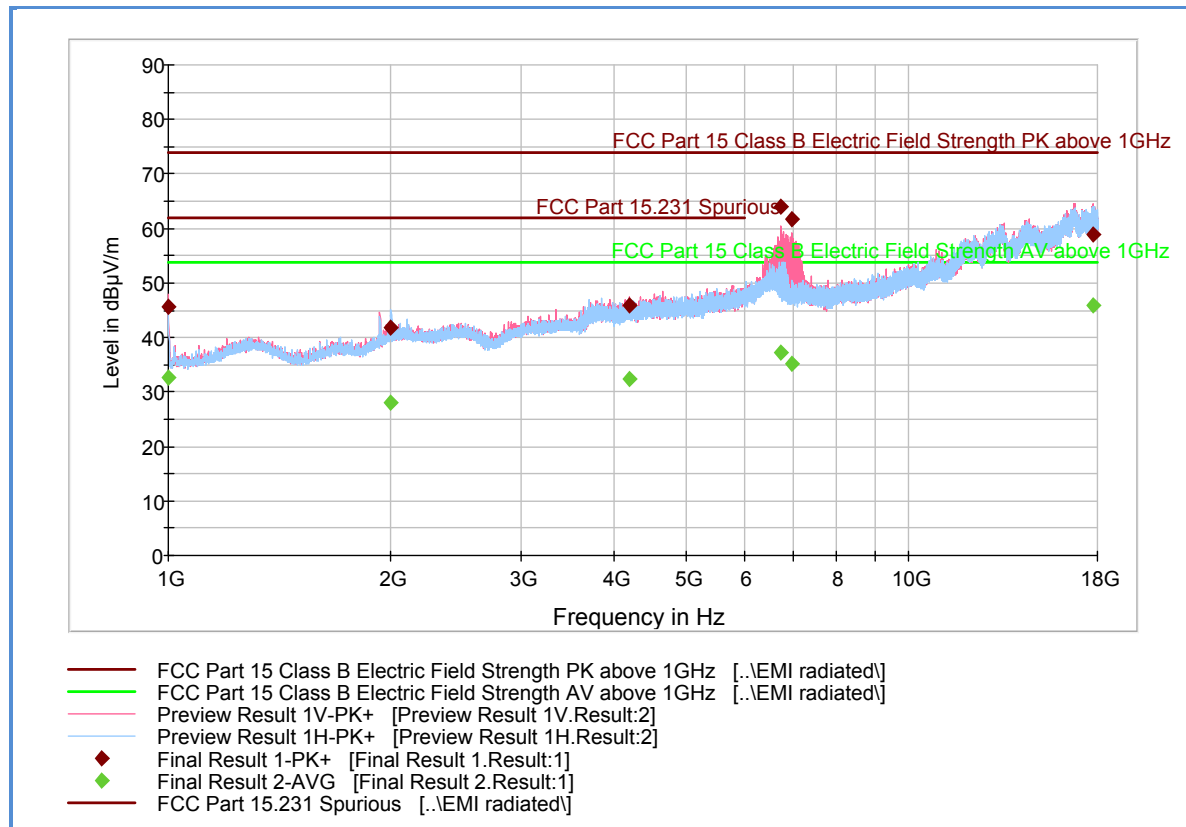

Peak Data


Frequency (MHz)	Max Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1000.000000	45.5	1000.0	1000.000	138.7	V	181.0	-7.0	28.4	73.9
1999.966667	41.8	1000.0	1000.000	375.1	H	271.0	-1.0	32.1	73.9
4194.333333	46.0	1000.0	1000.000	406.7	V	-20.0	6.1	27.9	73.9
6721.866667	63.9	1000.0	1000.000	164.6	V	228.0	11.9	10.0	73.9
6961.200000	61.7	1000.0	1000.000	116.7	V	208.0	10.7	12.2	73.9
17787.866667	58.8	1000.0	1000.000	406.7	V	255.0	25.8	15.1	73.9

Average Data

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1000.000000	32.6	1000.0	1000.000	138.7	V	181.0	-7.0	21.3	53.9
1999.966667	28.1	1000.0	1000.000	375.1	H	271.0	-1.0	25.8	53.9
4194.333333	32.4	1000.0	1000.000	406.7	V	-20.0	6.1	21.5	53.9
6721.866667	37.3	1000.0	1000.000	164.6	V	228.0	11.9	16.6	53.9
6961.200000	35.2	1000.0	1000.000	116.7	V	208.0	10.7	18.7	53.9
17787.866667	45.9	1000.0	1000.000	406.7	V	255.0	25.8	8.0	53.9

Test Notes:

2.4.14 Test Results Above 1GHz (Mid Channel)

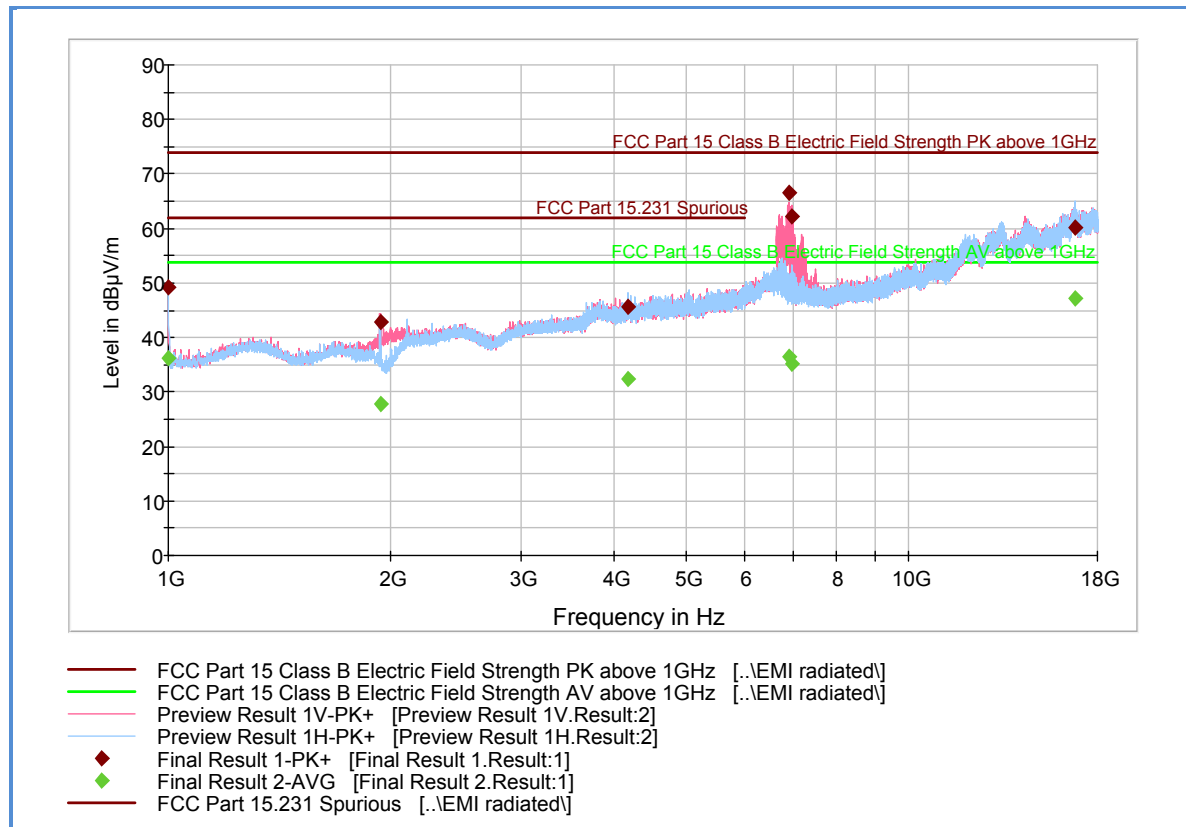

Peak Data


Frequency (MHz)	Max Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1000.000000	49.1	1000.0	1000.000	299.3	H	278.0	-7.0	24.8	73.9
1932.766667	42.8	1000.0	1000.000	257.3	V	206.0	-1.4	31.1	73.9
4178.466667	45.7	1000.0	1000.000	355.1	H	359.0	6.2	28.2	73.9
6888.666667	66.5	1000.0	1000.000	202.5	V	204.0	11.0	7.4	73.9
6967.000000	62.3	1000.0	1000.000	207.5	V	198.0	10.7	11.6	73.9
16798.100000	60.1	1000.0	1000.000	266.3	H	151.0	25.9	13.8	73.9

Average Data

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1000.000000	36.2	1000.0	1000.000	299.3	H	278.0	-7.0	17.7	53.9
1932.766667	27.7	1000.0	1000.000	257.3	V	206.0	-1.4	26.2	53.9
4178.466667	32.3	1000.0	1000.000	355.1	H	359.0	6.2	21.6	53.9
6888.666667	36.5	1000.0	1000.000	202.5	V	204.0	11.0	17.4	53.9
6967.000000	35.3	1000.0	1000.000	207.5	V	198.0	10.7	18.6	53.9
16798.100000	47.1	1000.0	1000.000	266.3	H	151.0	25.9	6.8	53.9

Test Notes:

2.4.15 Test Results Above 1GHz (High Channel)

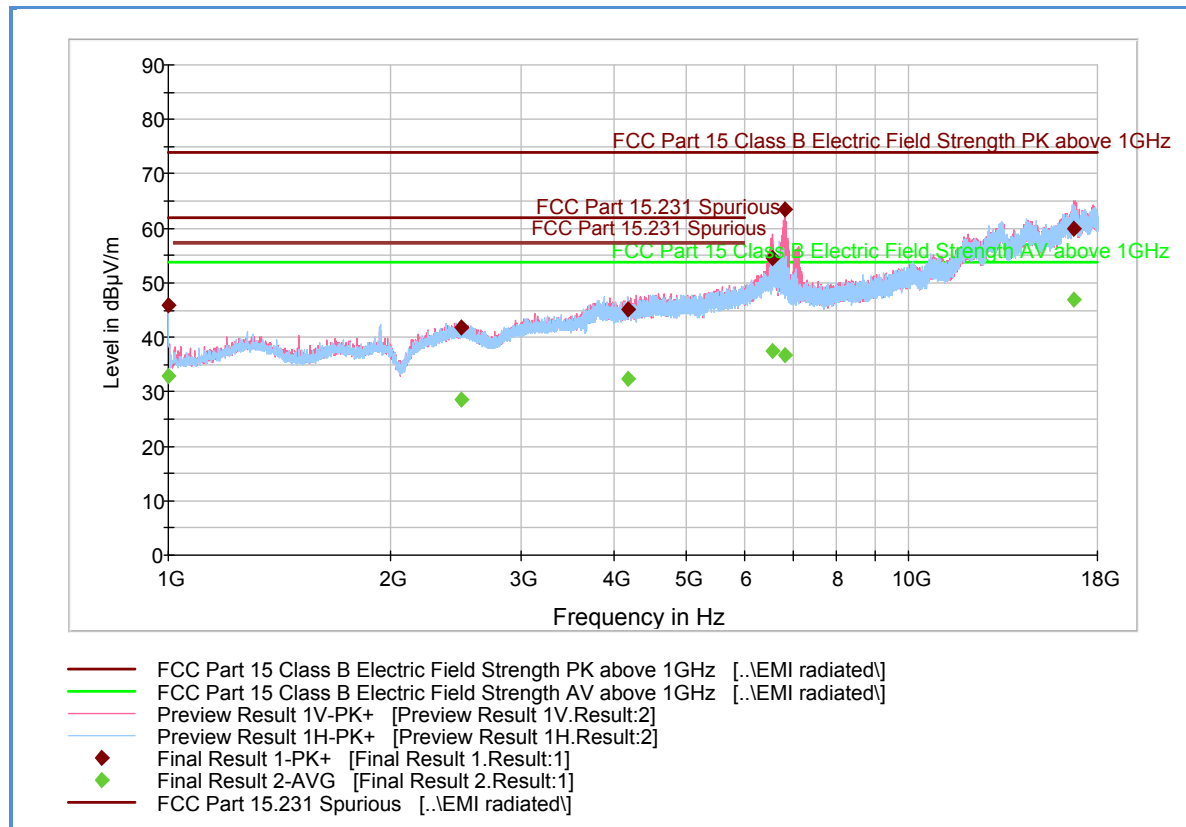

Peak Data

Frequency (MHz)	Max Peak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1000.000000	46.0	1000.0	1000.000	216.4	H	88.0	-7.0	27.9	73.9
2490.566667	41.7	1000.0	1000.000	278.3	V	-16.0	0.2	32.2	73.9
4182.233333	45.1	1000.0	1000.000	139.7	H	331.0	6.1	28.8	73.9
6539.533333	54.6	1000.0	1000.000	154.6	V	216.0	12.8	19.3	73.9
6814.200000	63.5	1000.0	1000.000	145.7	V	205.0	11.5	10.4	73.9
16736.133333	60.0	1000.0	1000.000	302.2	V	212.0	25.9	13.9	73.9

Average Data

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1000.000000	33.0	1000.0	1000.000	216.4	H	88.0	-7.0	20.9	53.9
2490.566667	28.6	1000.0	1000.000	278.3	V	-16.0	0.2	25.3	53.9
4182.233333	32.3	1000.0	1000.000	139.7	H	331.0	6.1	21.6	53.9
6539.533333	37.5	1000.0	1000.000	154.6	V	216.0	12.8	16.4	53.9
6814.200000	36.7	1000.0	1000.000	145.7	V	205.0	11.5	17.2	53.9
16736.133333	47.0	1000.0	1000.000	302.2	V	212.0	25.9	6.9	53.9

Test Notes:



2.5 BANDWIDTH REQUIREMENT

2.5.1 Specification Reference

Part 15 Subpart C §15.231(c)

2.5.2 Standard Applicable

(c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

2.5.3 Equipment Under Test and Modification State

Serial No: Engineering Sample / Default Test Configuration

2.5.4 Date of Test/Initial of test personnel who performed the test

November 7 and 11, 2014/KAM

2.5.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.6 Environmental Conditions/Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility.

Ambient Temperature	24.6°C
Relative Humidity	42.8%
ATM Pressure	99.3 kPa


2.5.7 Additional Observations

- This is a radiated test.
- Span is set to encompass the whole emission
- RBW is 1% of the span while VBW is greater than 3X RBW.
- Sweep is auto.
- Detector is peak.
- Max hold function activated.

2.5.8 Test Results



Transmitter Frequency (MHz)	Modulation	0.25% of the center frequency requirement	Measured 20dB Bandwidth (MHz)
410	FSK	<1.026 MHz	591.18 kHz
420	FSK	<1.051 MHz	581.16 kHz
430	FSK	<1.075 MHz	581.16 kHz

2.5.9 Test Results Plots

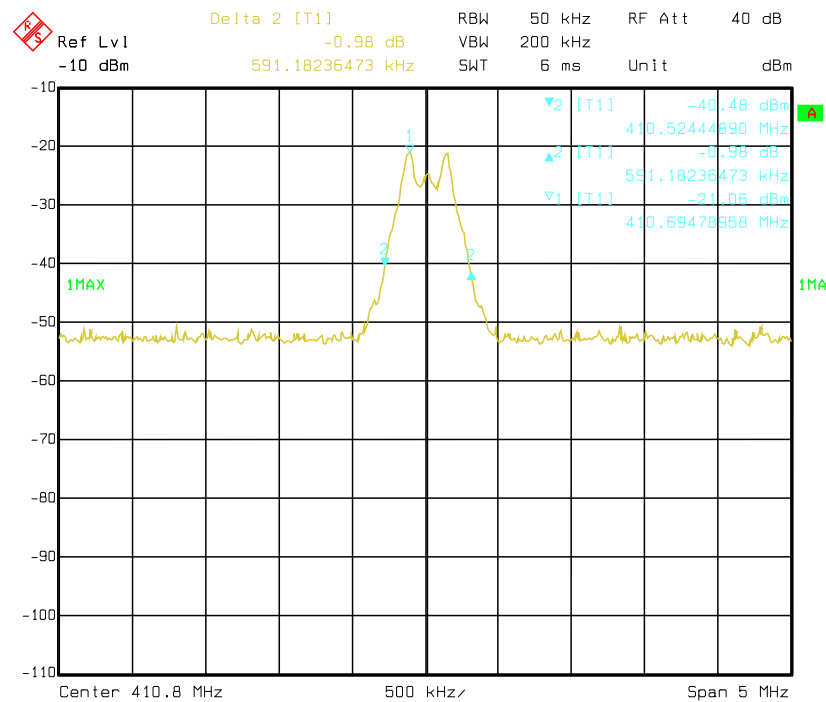

Date: 07.NOV.2014 16:50:53

20dB BW – Low Channel 410 MHz

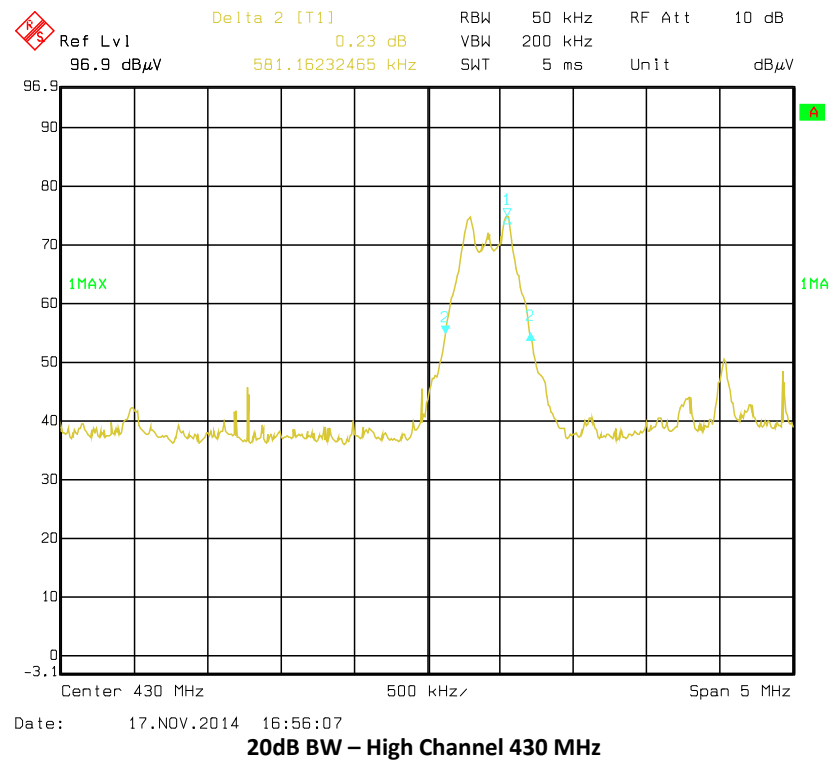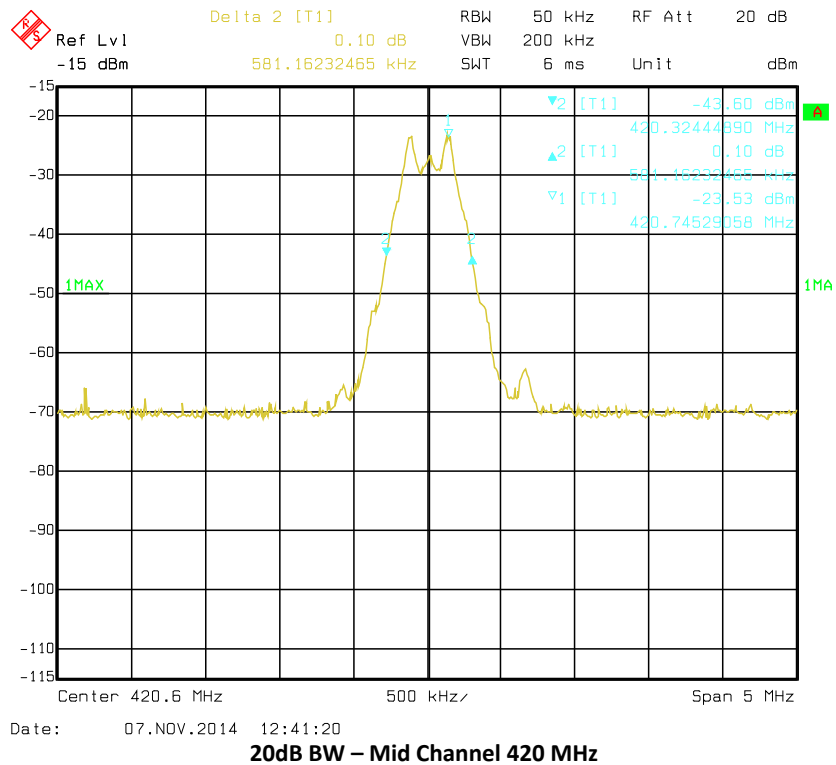



SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
Radiated Emissions						
1040	EMI Test Receiver	ESIB40	100292	Rhode & Schwarz	08/29/14	08/29/15
1016	Pre-amplifier	PAM-0202	187	PAM	05/05/14	05/05/15
1002	Bilog Antenna	3142C	00058717	ETS-Lindgren	01/30/14	01/30/16
1049	EMI Test Receiver	ESU	100133	Rhode & Schwarz	03/17/14	03/17/15
8628	Pre-amplifier	QLJ 01182835-JO	8986002	QuinStar Technologies Inc.	04/03/14	04/03/15
7575	Double-ridged waveguide horn antenna	3117	00155511	EMCO	04/08/14	04/08/15
Miscellaneous						
7560	Barometer/Temperature/Humidity Transmitter	iBTHX-W	1240476	Omega	01/30/14	01/30/15
	EMC 32	Software	N/A	R&S	N/A	N/A

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

3.2.1 Radiated Emission Measurements (Below 1GHz)

	Contribution	Probability Distribution Type	Probability Distribution x_i	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1	Receiver/Spectrum Analyzer	Rectangular	0.45	0.26	0.07
2	Cables	Rectangular	0.50	0.29	0.08
3	Preamp	Rectangular	0.50	0.29	0.08
4	Antenna	Rectangular	0.75	0.43	0.19
5	Site	Rectangular	3.89	2.25	5.04
6	EUT Setup	Rectangular	1.00	0.58	0.33
Combined Uncertainty (u_c):					2.41
Coverage Factor (k):					2
Expanded Uncertainty:					4.82

3.2.2 Radiated Emission Measurements (Above 1GHz)


	Contribution	Probability Distribution Type	Probability Distribution x_i	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1	Receiver/Spectrum Analyzer	Rectangular	0.57	0.33	0.11
2	Cables	Rectangular	0.70	0.40	0.16
3	Preamp	Rectangular	0.50	0.29	0.08
4	Antenna	Rectangular	0.37	0.21	0.05
5	Site	Rectangular	3.89	2.25	5.04
6	EUT Setup	Rectangular	1.00	0.58	0.33
Combined Uncertainty (u_c):					2.40
Coverage Factor (k):					2
Expanded Uncertainty:					4.81




SECTION 4

DIAGRAM OF TEST SETUP

4.1 TEST SETUP DIAGRAM

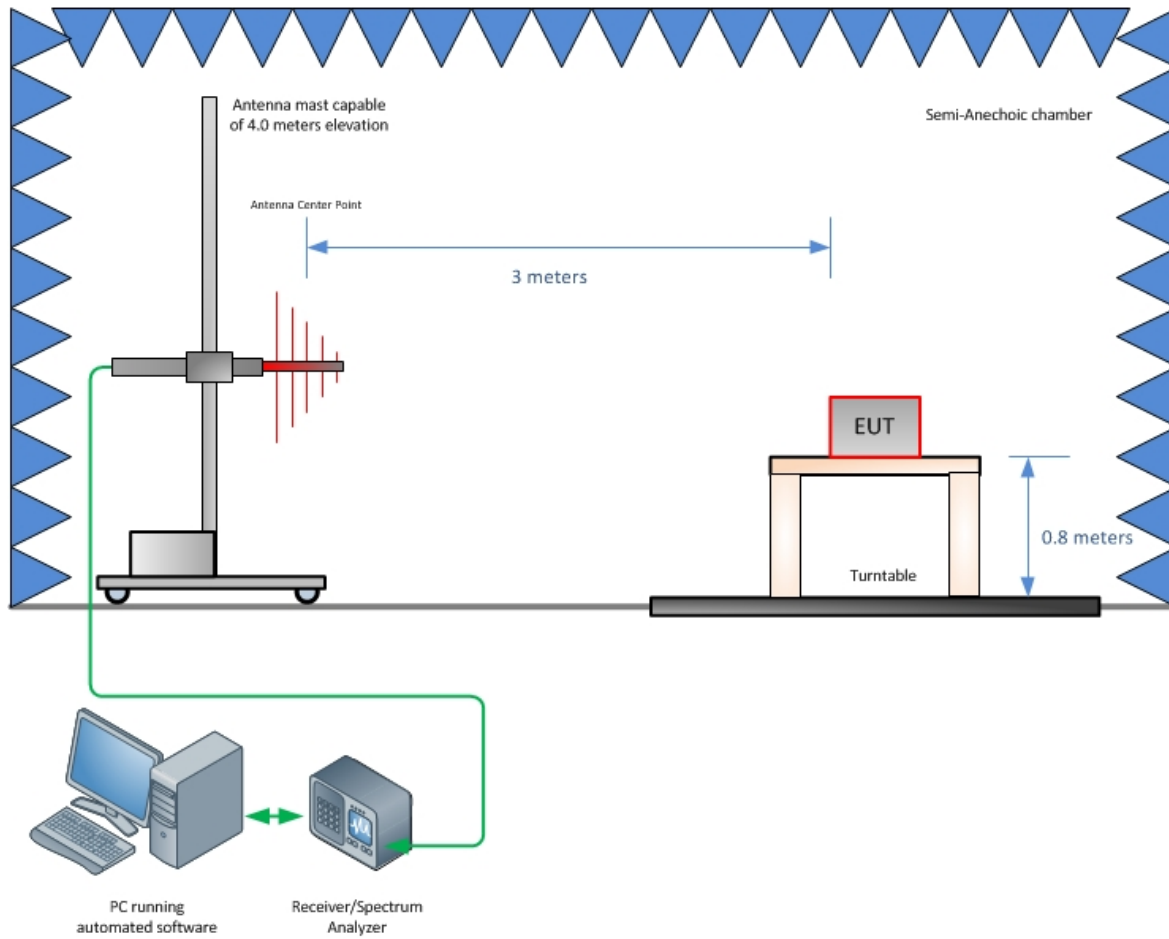

Radiated Emission Test Setup (Below 1GHz)

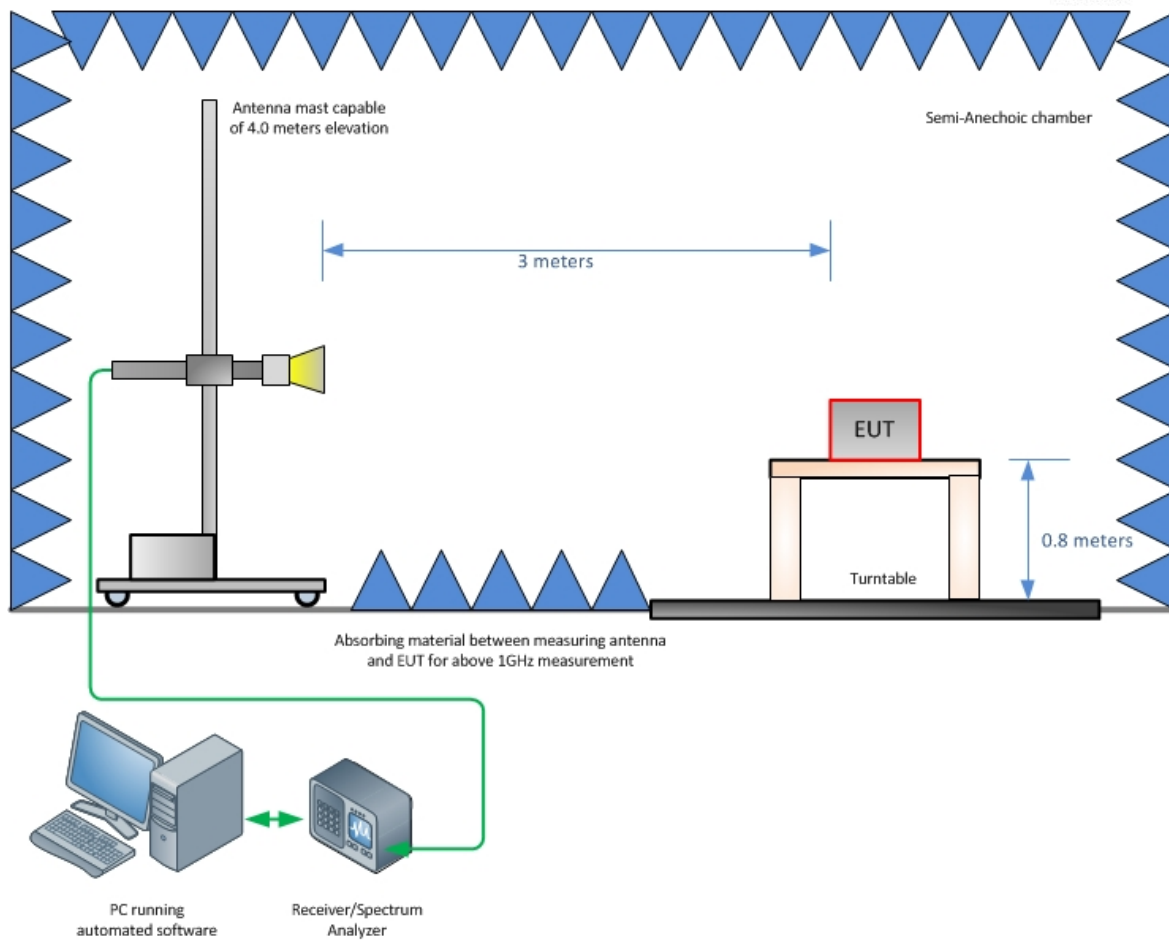

Radiated Emission Test Setup (Above 1GHz)



SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, A2LA, NIST and VCCI.



A2LA Cert. No. 2955.13

