



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0069991(1) Date : 13 Dec 2013

Application No. : LR045392(1)

Applicant : Raytac Corporation
5F., No.3, Jiankang Road, Zhonghe District,
Taipei City, 23586, Taiwan

Sample Description : One(1) item of submitted sample stated to be Wireless Presenter
of Model No. 2603766
Sample registration No. : RR049933-001
Radio Frequency : 2403MHz – 2474 MHz Transmitter
Rating : 2 x 1.5V AA size batteries
No. of submitted sample : One (2) piece (s)

Date Received : 09 Dec 2013

Test Period : 09 Dec 2013 to 16 Dec 2013.

Test Requested : FCC Part 15 Certificate

Test Method : 47 CFR Part 15 (10-1-12 Edition), ANSI C63. 4 – 2009


Test Engineer : Mr. LEUNG Shu-kan, Ken

Test Result : See attached sheet(s) from page 2 to 29.

Conclusion : The submitted sample was found to comply with requirement of FCC Part 15
Subpart C.

For and on behalf of
CMA Industrial Development Foundation Limited

Authorized Signature : _____


Mr. WONG Lap-pong, Andrew
Assistant Manager
Electrical Division

Page 1 of 29

FCC ID: SH6MP01



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0069991(1)

Date : 13 Dec 2013

Table of Contents

1	General Information.....	3
1.1	General Description.....	3
1.2	Location of the test site.....	4
1.3	List of measuring equipment.....	5
1.4	Measurement Uncertainty.....	6
2	Description of the radiated emission test.....	7
2.1	Test Procedure.....	7
2.2	Test Result.....	8
2.3	Radiated Emission Measurement Data.....	9
3	Description of the Line-conducted Test.....	11
3.1	Test Procedure.....	12
3.2	Test Result.....	12
3.3	Graph and Table of Conducted Emission Measurement Data.....	12
4	Photograph.....	13
4.1	Photographs of the Test Setup for Radiated Emission and Conducted Emission.....	13
4.2	Photographs of the External and Internal Configurations of the EUT.....	13
5	Supplementary document.....	14
5.1	Bandwidth.....	14
5.2	Duty cycle.....	14
5.3	Transmission time.....	14
5.4	Power Spectral Density.....	14
5.5	Average on time.....	14
6	Appendices.....	15



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0069991(1)

Date : 13 Dec 2013

1 General Information

1.1 General Description

The equipment under test (EUT) is a transmitter for presenter. The EUT is power by 2 x 1.5V AAA size batteries. It operates at 2403MHz – 2474 MHz. There are buttons on the EUT. When the buttons are pressed, the EUT will transmit radio signal to receiver. There is a display for down count timing. When timing finish, the motor will vibrate. The EUT also has a laser pointer for pointing.

The brief circuit description is listed as follows:

- U1 and its associated circuit act as RF circuit
- X1 and its associated circuit act as Oscillator
- U2 and its associated circuit act as MCU
- LCD1 and its associated circuit act as Display
- MG1 and its associated circuit act as Motor
- U4 and its associated circuit act as Power control
- Q2, Q3, Q4, LD1 and its associated circuit act as Laser module



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0069991(1)

Date : 13 Dec 2013

1.2 Location of the test site

FCC Registered Test Site Number: 552221

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2009. A shielded room is located at :

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.



CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT

Report No. : AR0069991(1)

Date : 13 Dec 2013

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	R&S	ESCI	100152	08 Jul 2014	1 Year
Spectrum Analyzer	R&S	FSP30	100628	15 Aug 2014	1 Year
Broadband Antenna	Schaffner	CBL6112B	2718	06 Jan 2015	1 Year
Loop Antenna	EMCO	6502	00056620	28 Oct 2015	1 Year
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-531	04 Oct 2014	1 Year
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170442	18 Jun 2015	2 Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	09 Oct 2014	1 Year
Broadband Pre-Amplifier	Schwarzbeck	BBV 9719	9719-010	17 Jun 2015	2 Years
Coaxial Cable	Schaffner	RG 213/U	N/A	06 Jan 2015	1 Year
Coaxial Cable	Suhner	RG 214/U	N/A	06 Jan 2015	1 Year
Coaxial Cable	Suhner	Sucoflex_102	N/A	09 Oct 2014	1 Year



CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT

Report No. : AR0069991(1)

Date : 13 Dec 2013

1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U_{lab})
30MHz ~ 200MHz (Horizontal)	4.83dB
30MHz ~ 200MHz (Vertical)	4.84dB
200MHz ~1000MHz (Horizontal)	4.66dB
200MHz ~1000MHz (Vertical)	4.65dB

Conducted emissions

Frequency	Uncertainty (U_{lab})
150kHz~30MHz	3.02dB



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0069991(1)

Date : 13 Dec 2013

2 Description of the radiated emission test

2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

For 30MHz to 1GHz, broadband antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. And the reference point of antenna shall be 1 m above the ground.

For above 1GHz, horn antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. Preamplifier and High Pass filter was used for measurements. The reference point of antenna shall be 1 m above the ground.

The device was rotated through three orthogonal to determine which attitude and configuration produce the highest emission during measurement for Radiated Emission measurement.



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0069991(1)

Date : 13 Dec 2013

2.2 Test Result

Peak Detector data were measured unless otherwise stated.

“#” means emissions appear within the restricted bands shall follow the requirement of section 15.205.

The frequencies from fundamental up to that tenth harmonics were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next page (section 2.3).

It was found that the EUT meet the FCC requirement.



CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT

Report No. : AR0069991(1)

Date : 13 Dec 2013

2.3 Radiated Emission Measurement Data

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart C

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	23	° C
Relative humidity:	52	%

Detector: Quasi-peak

RBW: 120kHz

VBW: 300kHz

Testing frequency range: 9kHz to 25GHz

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
136.045	H	7.0	14.4	21.4	43.5	- 22.1
174.836	H	6.4	11.9	18.3	43.5	- 25.2
269.907	H	7.4	15.4	22.8	46.0	- 23.2
359.147	H	9.7	16.8	26.5	46.0	- 19.5
417.349	H	8.3	20.6	28.9	46.0	- 17.1
473.601	H	8.6	20.6	29.2	46.0	- 16.8
545.384	H	7.5	22.2	29.7	46.0	- 16.3

Remark: Other emissions more than 20dB below the limit are not reported.



CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT

Report No. : AR0069991(1)

Date : 13 Dec 2013

2.3 Radiated Emission Measurement Data

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart C

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	23	° C
Relative humidity:	52	%

Detector: Peak RBW: 1MHz VBW: 3MHz

Testing frequency range: 9kHz to 25GHz

Channel	Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
Lowest	2403.460	H	76.0	- 6.3	69.7	114.0	- 44.3
	#4805.880	V	49.6	2.4	52.0	74.0	- 22.0
	#4806.000	H	49.7	2.4	52.1	74.0	- 21.9
	#7208.960	V	43.4	10.8	54.2	74.0	- 19.8
Middle	2435.020	H	76.6	- 6.3	70.3	114.0	- 43.7
	#4870.000	H	50.1	2.4	52.5	74.0	- 21.5
	#4870.000	V	51.2	2.4	53.6	74.0	- 20.4
	#7305.080	V	44.8	10.8	55.6	74.0	- 18.4
Highest	2474.000	H	77.7	- 6.3	71.4	114.0	- 42.6
	#4947.840	H	51.9	2.4	54.3	74.0	- 19.7
	#4948.040	V	53.4	2.4	55.8	74.0	- 18.2
	#7421.920	V	42.5	10.8	53.3	74.0	- 20.7

Remark: Other emissions more than 20dB below the limit are not reported.



CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT

Report No. : AR0069991(1)

Date : 13 Dec 2013

2.3 Radiated Emission Measurement Data

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart C

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	23	° C
Relative humidity:	52	%

Detector: Average RBW: 1MHz VBW: 10Hz

Testing frequency range: 9kHz to 25GHz

Channel	Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
Lowest	2403.006	H	49.9	- 6.3	43.6	94.0	- 50.4
	#4805.960	V	28.3	2.4	30.7	54.0	- 23.3
	#4806.000	H	28.5	2.4	30.9	54.0	- 23.1
	#7209.280	V	23.6	10.8	34.4	54.0	- 19.6
Middle	2435.000	H	50.7	- 6.3	44.4	94.0	- 49.6
	#4870.000	H	28.6	2.4	31.0	54.0	- 23.0
	#4869.960	V	29.0	2.4	31.4	54.0	- 22.6
	#7305.320	V	23.9	10.8	34.7	54.0	- 19.3
Highest	2473.980	H	51.7	- 6.3	45.4	94.0	- 48.6
	#4948.040	H	29.4	2.4	31.8	54.0	- 22.2
	#4948.120	V	30.1	2.4	32.5	54.0	- 21.5
	#7422.360	V	23.7	10.8	34.5	54.0	- 19.5

Remark: Other emissions more than 20dB below the limit are not reported.



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0069991(1)

Date : 13 Dec 2013

3 Description of the Line-conducted Test

3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2009. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

No measurement is required as the EUT is a battery-operated product.

3.3 Graph and Table of Conducted Emission Measurement Data

Not Applicable



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0069991(1)

Date : 13 Dec 2013

4 Photograph

4.1 Photographs of the Test Setup for Radiated Emission and Conducted Emission

For electronic filing, the photos are saved with filename TSup1.jpg to TSup6.jpg.

4.2 Photographs of the External and Internal Configurations of the EUT

For electronic filing, the photos are saved with filename ExPho1.jpg to ExPho2.jpg and InPho1.jpg to InPho3.jpg.



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0069991(1)

Date : 13 Dec 2013

5 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename
ID Label/Location	LabelSmp.jpg
Block Diagram	BlkDia.pdf
Schematic Diagram	Schem.pdf
Users Manual	UserMan.pdf
Operational Description	OpDes.pdf

5.1 Bandwidth

The plot saved in TestRpt2.pdf shows the fundamental emission is confined in the specified band. It shows the 20dB bandwidth met the 15.215 requirement for frequency band 2400 to 2483.5 MHz.

5.2 Duty cycle

Not Applicable

5.3 Transmission time

Not Applicable

5.4 Power Spectral Density

Not Applicable

5.5 Average on time

Not Applicable



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0069991(1)

Date : 13 Dec 2013

6 Appendices

A1	Photos of the set-up of Radiated Emissions	3	pages
A2	Photos of External Configurations	1	page
A3	Photos of Internal Configurations	2	pages
A4	ID Label/Location	2	pages
A5	Band Edge	3	pages
A6	User Manual	3	pages




CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT


Report No. : AR0069991(1)

Date : 13 Dec 2013

A1. Photos of the set-up of Radiated Emissions

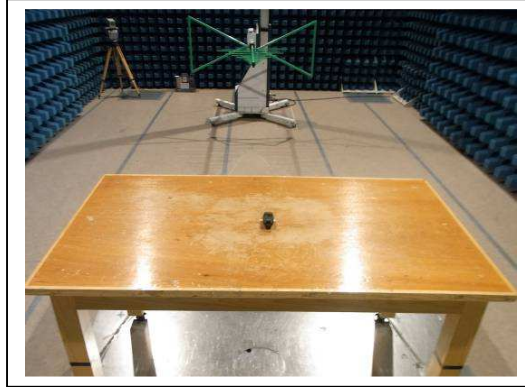

(Front view, 30MHz – 1GHz)

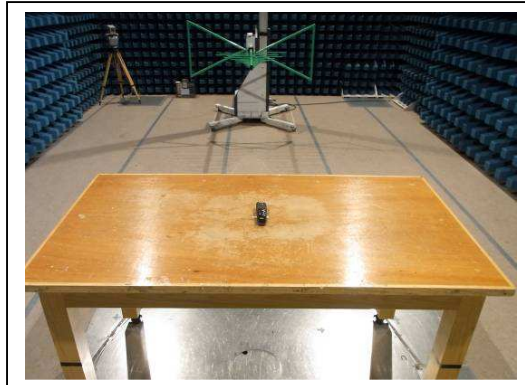

(Back view, 30MHz – 1GHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew




CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT


Report No. : AR0069991(1)

Date : 13 Dec 2013

A1. Photos of the set-up of Radiated Emissions

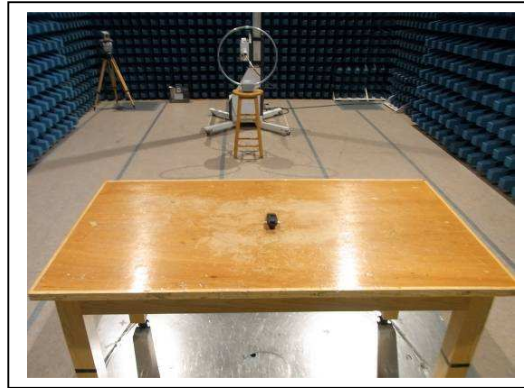

(Front view, 9KHz – 30MHz)

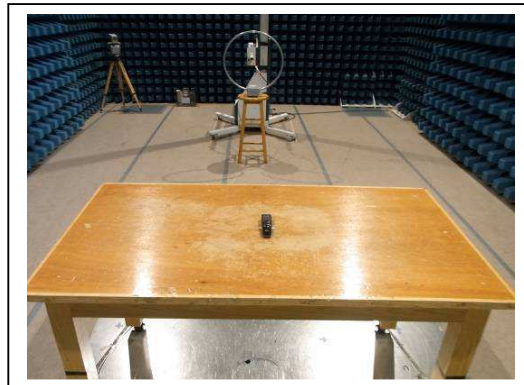

(Back view, 9KHz – 30MHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew




CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**


Report No. : AR0069991(1)

Date : 13 Dec 2013

A1. Photos of the set-up of Radiated Emissions

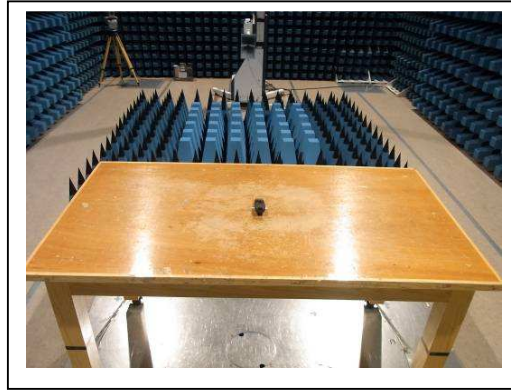

(front view, 1GHz – 25GHz)

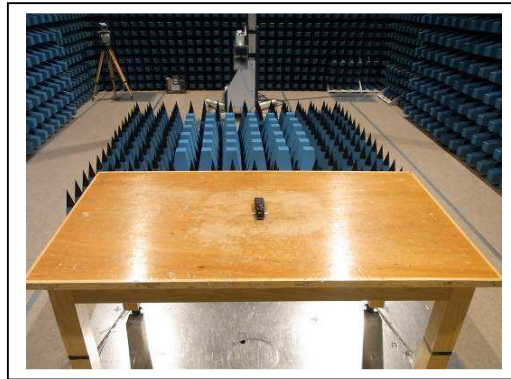

(rear view, 1GHz – 25GHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT

Report No. : AR0069991(1)

Date : 13 Dec 2013

A2 Photos of External Configurations




(External Configuration 1)



(External Configuration 2)

Tested by: 
Mr. LEUNG Shu-kan, Ken

Reviewed by: 
Mr. WONG Lap-pong, Andrew




CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT


Report No. : AR0069991(1)

Date : 13 Dec 2013

A3. Photos of Internal Configurations

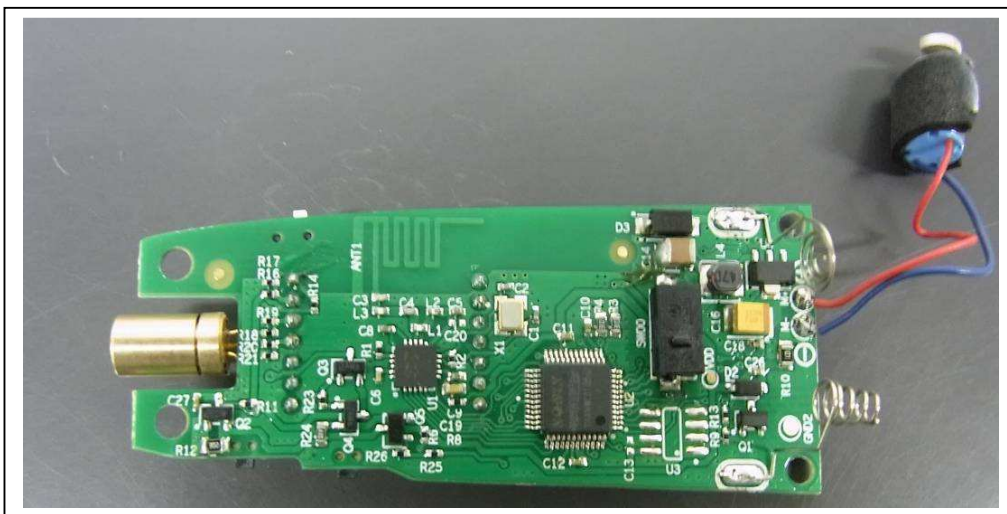

Internal Configuration 1

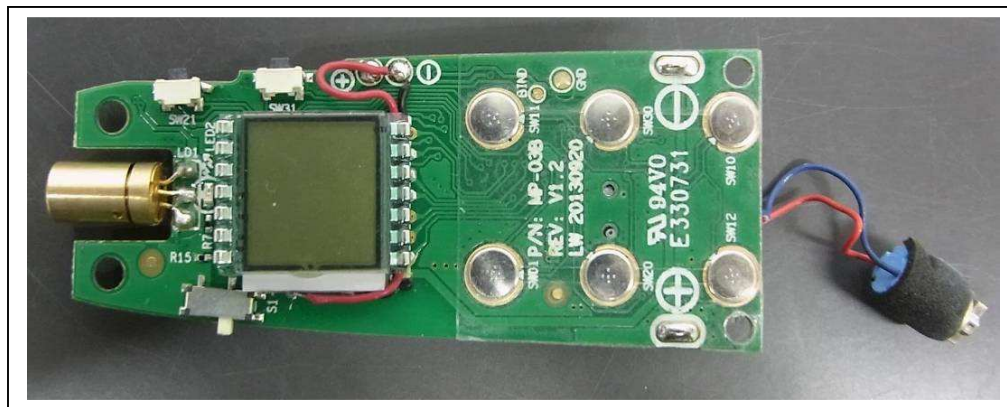

Internal Configuration 2

Tested by: 
Mr. LEUNG Shu-kan, Ken

Reviewed by: 
Mr. WONG Lap-pong, Andrew




CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT

Report No. : AR0069991(1)

Date : 13 Dec 2013

A3. Photos of Internal Configurations

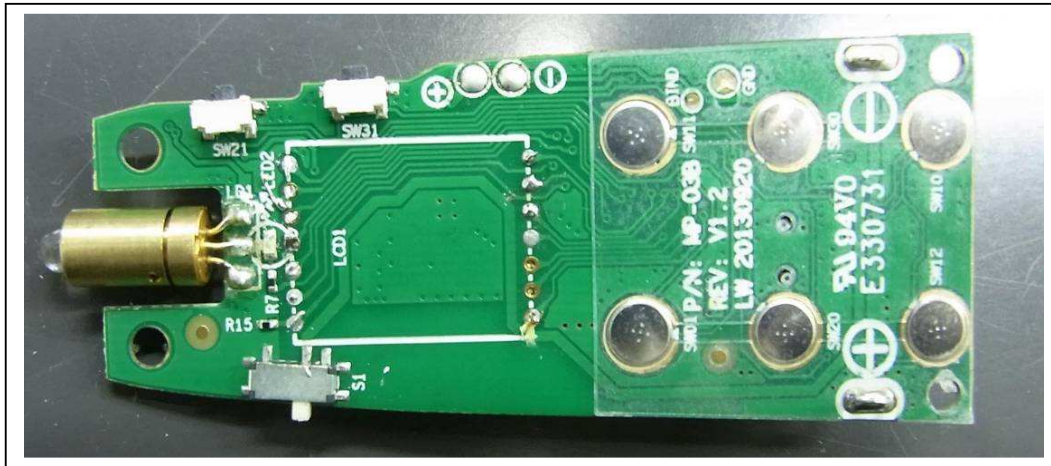

Internal Configuration 3

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew




CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0069991(1)

Date : 13 Dec 2013

A4. ID Label / Location

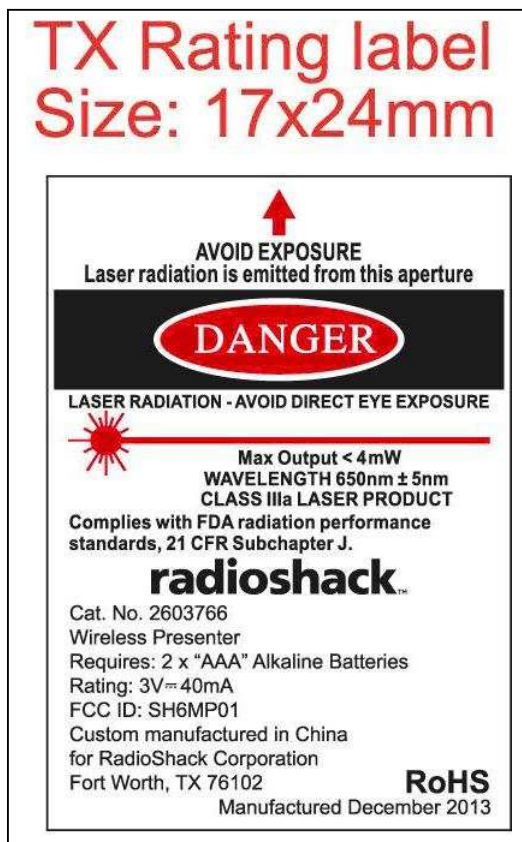

ID Label 1

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

FCC ID: SH6MP01



CMA Testing and Certification Laboratories

廠商會檢定中心 **TEST REPORT**

Report No. : AR0069991(1)

Date : 13 Dec 2013

A4. ID Label / Location



ID Label 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew




CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT


Report No. : AR0069991(1)

Date : 13 Dec 2013

A5. Band Edge

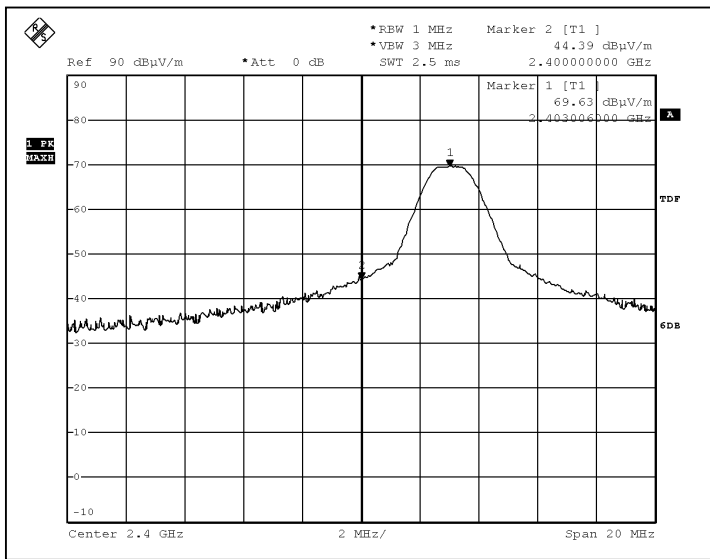

Lower Band (Peak measurement)

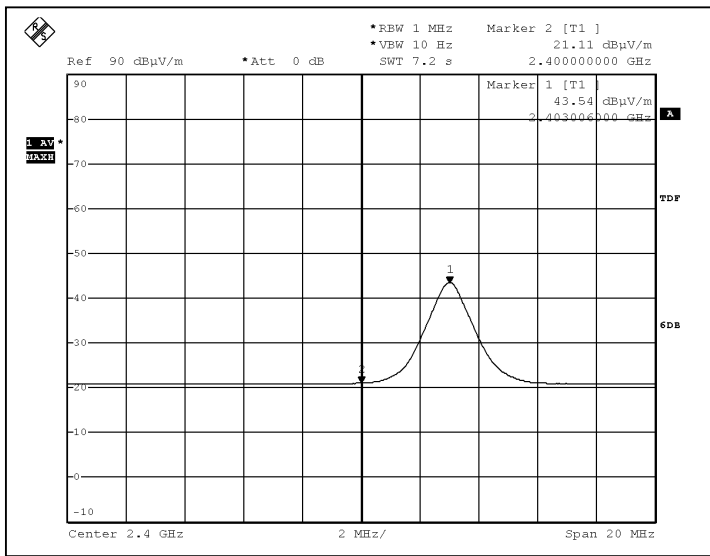

Lower Band (Average measurement)

Tested by: *Ken*
Mr. LEUNG Shu-kan, Ken

Reviewed by: *PR*
Mr. WONG Lap-pong, Andrew




CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT


Report No. : AR0069991(1)

Date : 13 Dec 2013

A5. Band Edge

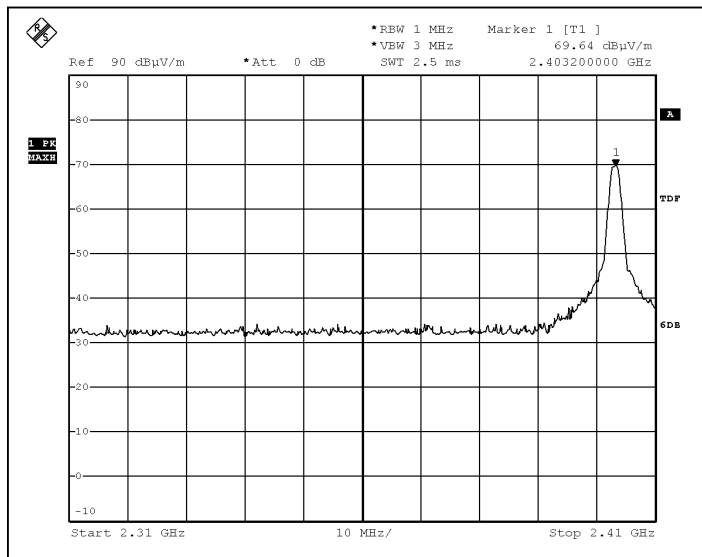

Lower Band (Peak measurement)

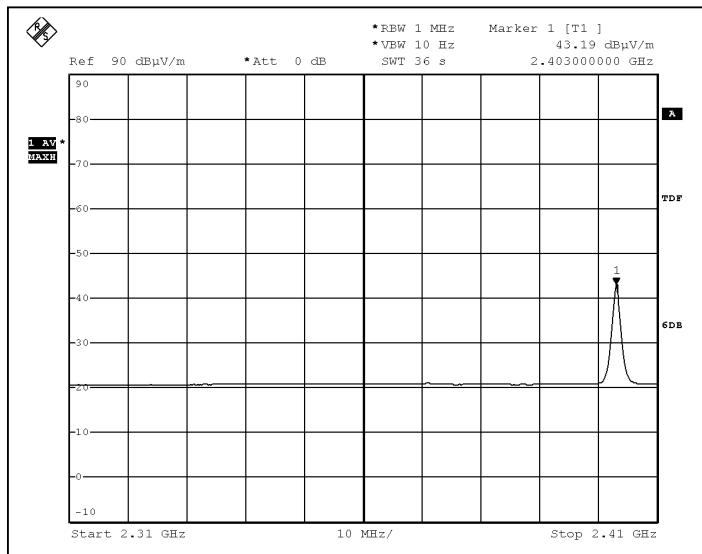

Lower Band (Average measurement)

Tested by: *Ken*
Mr. LEUNG Shu-kan, Ken

Reviewed by: *PP*
Mr. WONG Lap-pong, Andrew




CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT


Report No. : AR0069991(1)

Date : 13 Dec 2013

A5. Band Edge

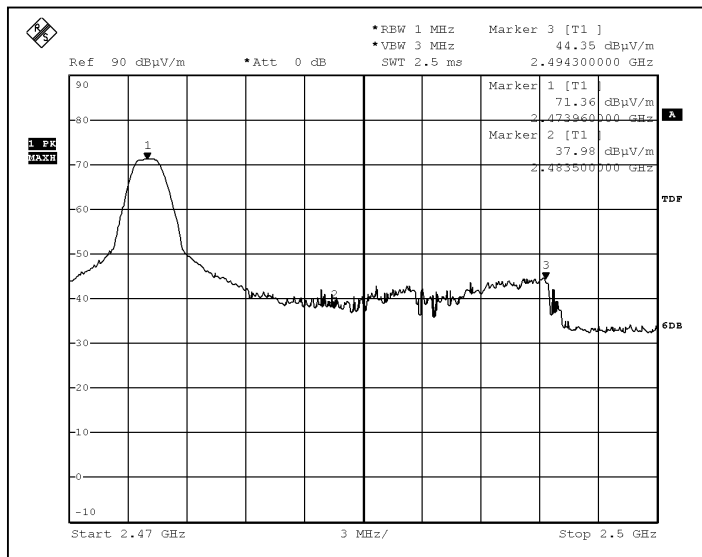

Higher Band (Peak measurement)

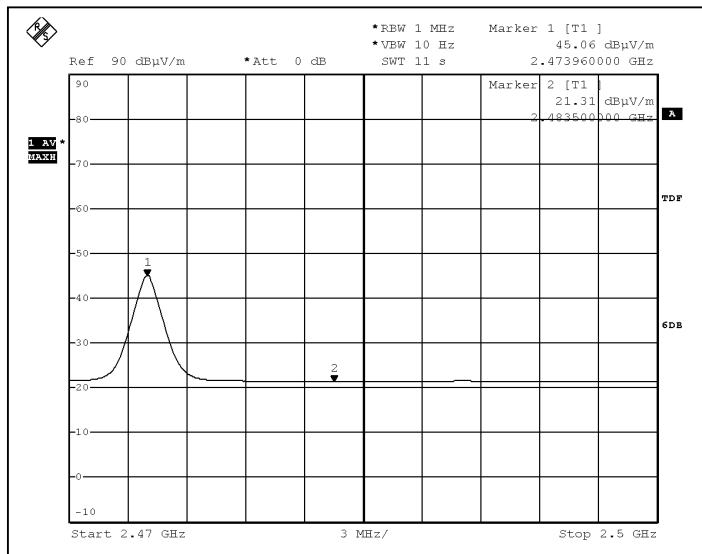

Higher Band (Average measurement)

Tested by: *Ken*
Mr. LEUNG Shu-kan, Ken

Reviewed by: *PP*
Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT

Report No. : AR0069991(1)

Date : 13 Dec 2013

A6. User Manual



2603766
User's Guide

Wireless Presenter

We hope you enjoy your Wireless Presenter from RadioShack. Please read this user's guide before using your new presenter.

Package Contents

- Wireless Presenter
- USB Receiver
- Carrying Case
- User's Guide

Features

- 2.4GHz wireless connection allows you to move freely while presenting
- Red laser pointer works up to 65 feet (20m) away
- The multifunction LCD screen includes a timer vibration feature and low-battery indicator

System Compatibility

- Windows® 8/ Windows 7
- Windows Vista®
- Windows XP

2

Install Batteries

Slide to open the battery cover, and insert two AAA batteries (not included) in the battery compartment matching the polarity symbols (+ and -) marked inside.

Battery Notes:

- Make sure the **ON/OFF** switch is at the **OFF** position before installing or replacing batteries.
- If the battery indicator is not full and the laser indicator flashes under normal operation, replace the batteries.
- Dispose of batteries promptly and properly. Do not burn or bury them.
- Use only fresh batteries of the required size and type.
- Do not mix old and new batteries, different types of batteries (alkaline or rechargeable), or rechargeable batteries of different capacities.
- If you do not plan to use the presenter for a long time, remove the batteries. Batteries can leak chemicals that can damage electronic parts.

ON/OFF
Timer

Timer Set

Page Up

- Turn to the previous page.
- Raise the volume quickly if the computer's volume control is already opened.

Full Screen

Laser Indicator
Lights red when the **Laser** button is pressed.

VOL +/-

Battery Indicator

Laser Button

Page Down

- Turn to the next page.
- Lower the volume quickly if the computer's volume control is already opened.


ESC
Stop playing slides.

USB Receiver

3

4

Tested by: 
Mr. LEUNG Shu-kan, Ken

Reviewed by: 
Mr. WONG Lap-pong, Andrew




CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT

Report No. : AR0069991(1)


Date : 13 Dec 2013

A6. User Manual



Point laser aperture at target.

Press to turn on the laser beam. Release to turn off.



Note:

- Insert the receiver back into the presenter's receiver slot when not in use.
- If you do not plan to use your presenter for several minutes, slide **ON/OFF** to **OFF** to save battery power.

Plug in the Receiver

- Turn on your computer.
- Take out the USB receiver, and plug the receiver into your computer's USB port.
- Slide the **ON/OFF** switch to **ON**. Your presenter and receiver automatically pair.

5

Set the Timer

- Press and hold **TIMER** for 3 seconds until the LCD screen lights blue. The minute digit flashes.
- Press **VOL+** or **VOL-** to set the minute.

6

- Press **«** or **»** to move between the hour or minute digit. Press **VOL+** or **VOL-** to set the hour.
- Press **TIMER** to confirm and exit the timer setting.

Note:

- The presenter vibrates to let you know when you have 5 minutes, 1 minute, and no time remaining. The LCD screen turns off when you have no time remaining.
- Press and hold **TIMER** for 3 seconds to enter the timer setting again to reset the timer.

Troubleshooting

If you have difficulty pairing your presenter with your computer:

- Make sure you have properly installed fresh batteries.
- Pair the presenter and receiver again:
 - Place the presenter within 12 inches (30.5cm) of the receiver.
 - Slide the **ON/OFF** switch to **ON**.

7

- Simultaneously press **ESC** and **VOL+** for 3 seconds until the laser indicator flashes. When pairing is successful, the indicator turns off.
- If pairing fails, switch the **ON/OFF** switch to **OFF**, then repeat pairing steps.

Care and Maintenance

- Use and store the presenter only in room temperature environments.
- Keep the presenter dry; if it gets wet, wipe it dry immediately.
- Keep the presenter away from dust and dirt, and wipe it with a damp cloth occasionally to keep it looking new.
- Handle the presenter carefully; do not disassemble or drop it.


Specifications

RF Frequency..... 2.4 GHz
 RF Distance..... 65 ft. (20 m)
 Wavelength..... 650nm ± 5nm
 (Class IIIa Laser Product)
 Power Output..... < 4mW

Specifications are subject to change and improvement without notice. Actual product may vary from the images found in this document.

8

Tested by: 
Mr. LEUNG Shu-kan, Ken

Reviewed by: 
Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心 TEST REPORT

Report No. : AR0069991(1)

Date : 13 Dec 2013

A6. User Manual

FCC Information

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult your local RadioShack store or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

9

Product:	Wireless Presenter
Model:	2603766
Responsible Party:	RadioShack 300 RadioShack Circle, Fort Worth, TX 76102
Phone:	827-415-5200

FC

Limited Warranty

RadioShack warrants this product against defects in materials and workmanship under normal use by the original purchaser for **ninety (90) days** after the date of purchase from a RadioShack-owned store or an authorized RadioShack franchisee or dealer. **RADIOSHACK MAKES NO OTHER EXPRESS WARRANTIES.**

This warranty does not cover: (a) damage or failure caused by or attributable to abuse, misuse, failure to follow instructions, improper installation or maintenance, alteration, accident, Acts of God (such as floods or lightning), or excess voltage or current; (b) improper or incorrectly performed repairs by persons who are not a RadioShack Authorized Service Facility; (c) consumables such as fuses or batteries; (d) ordinary wear and tear or cosmetic damage; (e) transportation, shipping or insurance costs; (f) costs of product removal, installation, set-up service, adjustment or reinstallation; and (g) claims by persons other than the original purchaser.

Should a problem occur that is covered by this warranty, take the product and the RadioShack sales receipt as proof of purchase date to any RadioShack store in the

10

U.S. RadioShack will, at its option, unless otherwise provided by law: (a) repair the product without charge for parts and labor; (b) replace the product with the same or a comparable product; or (c) refund the purchase price. All replaced parts and products, and products on which a refund is made, become the property of RadioShack. New or reconditioned parts and products may be used in the performance of warranty service. Repaired or replaced parts and products are warranted for the remainder of the original warranty period. You will be charged for repair or replacement of the product made after the expiration of the warranty period.

RADIOSHACK EXPRESSLY DISCLAIMS ALL WARRANTIES AND CONDITIONS NOT STATED IN THIS LIMITED WARRANTY. ANY IMPLIED WARRANTIES THAT MAY BE IMPOSED BY LAW, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND, IF APPLICABLE, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, SHALL EXPIRE ON THE EXPIRATION OF THE STATED WARRANTY PERIOD.

EXCEPT AS DESCRIBED ABOVE, RADIOSHACK SHALL HAVE NO LIABILITY OR RESPONSIBILITY TO THE PURCHASER OF THE PRODUCT OR ANY OTHER PERSON OR ENTITY WITH RESPECT TO ANY LIABILITY, LOSS OR DAMAGE CAUSED DIRECTLY OR INDIRECTLY BY USE OR PERFORMANCE OF THE PRODUCT OR ARISING OUT OF ANY BREACH OF THIS WARRANTY, INCLUDING, BUT NOT LIMITED TO, ANY DAMAGES RESULTING FROM INCONVENIENCE AND ANY LOSS OF TIME, DATA, PROPERTY, REVENUE, OR PROFIT AND ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, EVEN IF RADIOSHACK HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

11

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. You may contact RadioShack at:

RadioShack Customer Relations
300 RadioShack Circle
Fort Worth, TX 76102 04/08
www.RadioShack.com

Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and for other countries.


RoHS Complies with the European Union's Restriction of Hazardous Substances Directive, which protects the environment by restricting specific hazardous materials and products.

©2013 RadioShack Corporation. All rights reserved. RadioShack is a registered trademark used by RadioShack Corporation. Printed in China 12A13 2603766

12

***** End of Report *****

Tested by: 
Mr. LEUNG Shu-kan, Ken

Reviewed by: 
Mr. WONG Lap-pong, Andrew