



FCC TEST REPORT

CATEGORY : Portable
PRODUCT NAME : Mini Wireless Presenter
FCC ID. : SH6PP2400
FILING TYPE : Certification
BRAND NAME : Raytac
MODEL NAME : PP2400
APPLICANT : **Raytac Corp.**
5F-3, No. 755, Chung Rd., Chung Ho Taipei Hsien, Taiwan
235, R.O.C.
MANUFACTURER : **Taicom Data Systems Co., Ltd.**
No. 45, Wu-Kung 5 Rd., Wu-Ku Industrial Park, Taipei Hsien,
Taiwan, R.O.C.
ISSUED BY : **SPORTON INTERNATIONAL INC.**
6F, No. 106, Sec. 1, Hsin Tai Wu Rd., His Chih, Taipei Hsien,
Taiwan, R.O.C.

Statements:

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by CNLA and any agency of U.S. government.

The test equipments used to perform the test are calibrated and traceable to NML/ROC or NIST/USA.

Dr. Alan Lane
Vice General Manager
SPORTON International Inc.



1190
ILAC MRA



Table of Contents

HISTORY OF THIS TEST REPORT	II
CERTIFICATE OF COMPLIANCE.....	III
1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST.....	1
1.1. Applicant	1
1.2. Manufacturer	1
1.3. Basic Description of Equipment under Test.....	1
1.4. Features of Equipment under Test	1
1.5. Table for Carrier Frequencies	2
2. TEST CONFIGURATION OF THE EQUIPMENT UNDER TEST	3
2.1. Connection Diagram of Test System	3
2.2. The Test Mode Description	3
2.3. Description of Test Supporting Units	3
3. GENERAL INFORMATION OF TEST	4
3.1. Test Facility	4
3.2. Test Conditions	4
3.3. Standards for Methods of Measurement.....	4
3.4. DoC Statement	4
3.5. Frequency Range Investigated	4
3.6. Test Distance	4
3.7. Test Software.....	4
4. LIST OF MEASUREMENTS	5
4.1. Summary of the Test Results.....	5
5. TEST RESULT	6
5.1. Test of Maximum Field Strength of Fundamental	6
5.2. Test of AC Power Line Conducted Emission	8
5.3. Test of Spurious Radiated Emission	9
5.4. Antenna Requirements	16
6. LIST OF MEASURING EQUIPMENTS USED.....	17
7. COMPANY PROFILE.....	18
7.1. Certificate of Accreditation	18
7.2. Test Location	18
8. CNLA CERTIFICATE OF ACCREDITATION.....	19
APPENDIX A. PHOTOGRAPHS OF EUT	A1 ~ A7



CERTIFICATE OF COMPLIANCE

with

47 CFR FCC Part 15 Subpart C

PRODUCT NAME : Mini Wireless Presenter

BRAND NAME : Raytac

MODEL NAME : PP2400

APPLICANT : **Raytac Corp.**

5F-3, No. 755, Chung Rd., Chung Ho Taipei Hsien, Taiwan
235, R.O.C.

MANUFACTURER : **Taicom Data Systems Co., Ltd.**

No. 45, Wu-Kung 5 Rd., Wu-Ku Industrial Park, Taipei Hsien,
Taiwan, R.O.C.

I **HEREBY** CERTIFY THAT:

The measurements shown in this test report were made in accordance with the procedures given in ANSI C63.4-2003 and all test are performed according to 47 CFR FCC Part 15 Subpart C. Testing was carried out on Dec. 31 at SPORTON International Inc. LAB.

A handwritten signature in blue ink, appearing to read 'Alan Lane', is written over a horizontal line.

Dr. Alan Lane

Vice General Manager
SPORTON International Inc.



1. General Description of Equipment under Test

1.1. Applicant

Raytac Corp.

5F-3, No. 755, Chung Rd., Chung Ho Taipei Hsien, Taiwan 235, R.O.C.

1.2. Manufacturer

Taicom Data Systems Co., Ltd.

No. 45, Wu-Kung 5 Rd., Wu-Ku Industrial Park, Taipei Hsien, Taiwan, R.O.C.

1.3. Basic Description of Equipment under Test

This product is a directional wireless presenter and its receiver with GFSK modulation solution. The receiver is used to be plugged on the USB port of the computer. Please refer to "Features of Equipment under Test." This report is for the transmitter part.

1.4. Features of Equipment under Test

Items	Description
Type of Modulation	GFSK
Number of Channels	16
Frequency Band	2400MHz ~ 2480MHz
Carrier Frequency	See section 1.5 for details
Channel Bandwidth	1MHz
Antenna Type	Printed
Testing Duty Cycle	100.00%
Power Rating (DC/AC, Voltage)	3.0 VDC from battery
Test Power Source	110.00V AC
Temperature Range (Operating)	0 ~ 55 °C




1.5. Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2405 MHz	07	2435 MHz	13	2465 MHz
02	2410 MHz	08	2440 MHz	14	2470 MHz
03	2415 MHz	09	2445 MHz	15	2475 MHz
04	2420 MHz	10	2450 MHz	16	2480 MHz
05	2425 MHz	11	2455 MHz		
06	2430 MHz	12	2460 MHz		

2. Test Configuration of the Equipment under Test

2.1. Connection Diagram of Test System

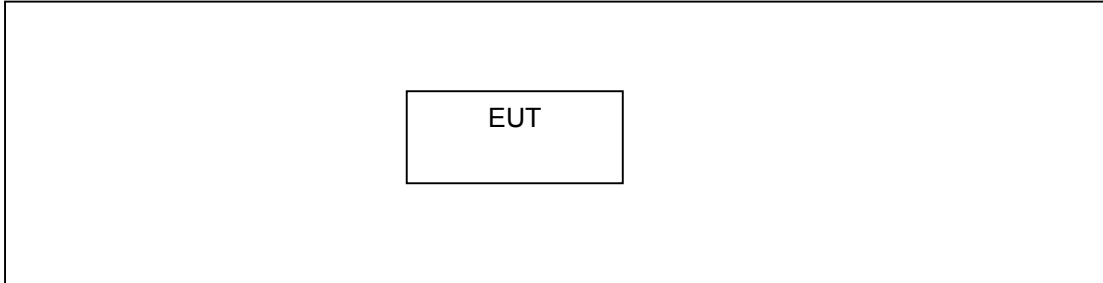

2.2. The Test Mode Description

1. According to ANSI C63.4-2003: If the frequency range of EUT is more than 10 MHz, we have to test the lowest, middle and highest channels of EUT.
2. Spurious emission below 1GHz is independent of channel selection. So only channel 16 with GFSK modulation was tested.
3. AC conduction emission is independent of channel selection that is connected to any types of antennas. So only channel 16 with GFSK modulation was tested.

2.3. Description of Test Supporting Units

Support unit	Brand	Model No.	Serial No.	FCC ID	Data cable (m)
Notebook	COMPAQ	Presario 1500	SP0004	DoC	-
Printer	EPSON	STYLUS COLOR 680	SP0016	DoC	1
Modem	ACEEX	OM141	-	IFAXDM141	-



3. General Information of Test

3.1. Test Facility

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
: TEL 886-3-327-3456
: FAX 886-3-318-0055
Test Site No : 03CH03-HY / CO04-HY

3.2. Test Conditions

Normal Voltage : 3.0 VDC (battery)
Normal Temperature : 20°C

3.3. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

ANSI C63.4-2003
47 CFR FCC Part 15 Subpart C

3.4. DoC Statement

This EUT is also classified as a device of computer peripheral Class B which DoC has to be followed. It has been verified according to the rule of 47 CFR part 15 Subpart B, and found that all the requirements has been fulfilled.

3.5. Frequency Range Investigated

Radiated emission test: from 30 MHz to 10th carrier harmonic

3.6. Test Distance

The test distance of radiated emission (30MHz~1GHz) test from antenna to EUT is 3 M.
The test distance of radiated emission (1GHz~10th carrier harmonic) test from antenna to EUT is 3 M.

3.7. Test Software

There is no test software for the test.



4. List of Measurements

4.1. Summary of the Test Results

Applied Standard: 47 CFR FCC Part 15 Subpart C			
Paragraph	FCC Rule	Description of Test	Result
5.1	15.249(a)	Maximum Field Strength of Fundamental	Pass
5.2	15.207	AC Power Line Conducted Emission	Pass
5.3	15.249(d)	Spurious Radiated Emission	Pass
5.4	15.203	Antenna Requirement	Pass



5. Test Result

5.1. Test of Maximum Field Strength of Fundamental

5.1.1. Applicable Standard

Section 15.249(a): The field strength of emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table. The peak field strength of any emission shall not exceed the maximum permitted average limits specified in the table by more than 20 dB under any condition of modulation

Fundamental Frequency (MHz)	Field Strength of Fundamental (millivolts/meter)	Unwanted Emission (microvolts/meter)
2400-2483.5	50	500
5725-5875	50	500

5.1.2. Measuring Instruments

Item 6~17 of the table is on section 6.


5.1.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40 (Radiated Measurement)
 - Attenuation : Auto
 - Center Frequency : Carrier Frequency
 - Span Frequency : Suitable for observe
 - RB : 1 MHz for PK value / 1 MHz for AV value
 - VB : 1 MHz for PK value / 10 Hz for AV value
 - Detector : Peak
 - Trace : Max Hold
 - Sweep Time : Auto

5.1.4. Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For carrier field strength emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For carrier field strength emission, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.

5.1.5. Test Setup Layout

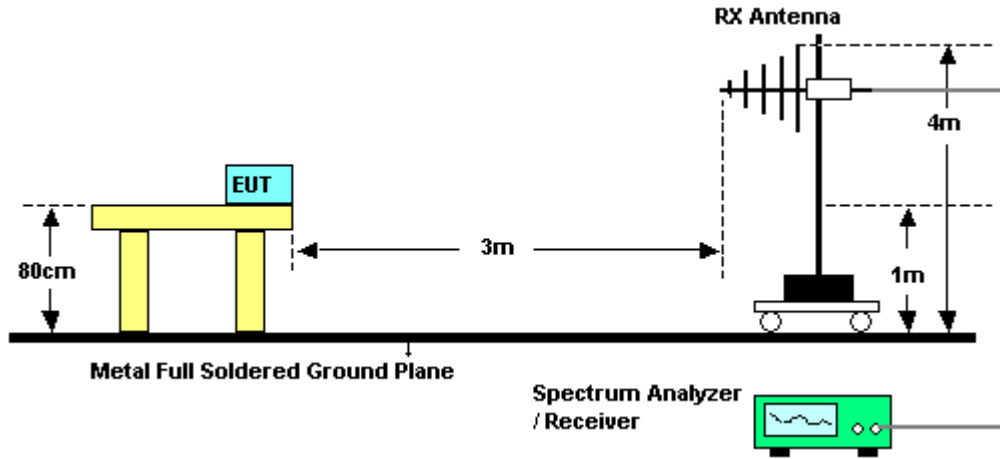

5.1.6. Test Criteria

All test results complied with Section 15.249(a) requirements. Measurement Uncertainty is 2.26dB.

5.1.7. Test Result

- Temperature: 27°C
- Relative Humidity: 50%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Sun Chen

Channel No.	Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV/m)	Detector
01	2405 MHz	70.28	-23.72	94.00	40.04	Average
01	2405 MHz	95.12	-18.88	114.00	64.88	Peak
08	2440 MHz	67.69	-26.31	94.00	37.35	Average
08	2440 MHz	93.44	-20.56	114.00	63.10	Peak
16	2480 MHz	66.13	-27.87	94.00	35.69	Average
16	2480 MHz	91.47	-22.53	114.00	61.03	Peak

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



5.2. Test of AC Power Line Conducted Emission

The EUT is battery powered, so it is not required to test this item.



5.3. Test of Spurious Radiated Emission

5.3.1. Applicable Standard

Section 15.249(d): Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

5.3.2. Measuring Instruments

Please reference item 1~17 in chapter 6 for the instruments used for testing.

5.3.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
 - Attenuation : Auto
 - Start Frequency : 1000 MHz
 - Stop Frequency : 10th carrier harmonic
 - RB / VB : 1 MHz / 1MHz for Peak
 - RB / VB : 1 MHz / 10Hz for Average

- Test Receiver : R&S ESCS 30
 - Attenuation : Auto
 - Start Frequency : 30 MHz
 - Stop Frequency : 1000 MHz
 - RB : 120 KHz for QP or PK


5.3.4. Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT was placed on the top of the turn table 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turn table.
4. Power on the EUT and all the supporting units.
5. The turn table was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
10. If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB

margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.

11. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.3.5. Test Setup Layout

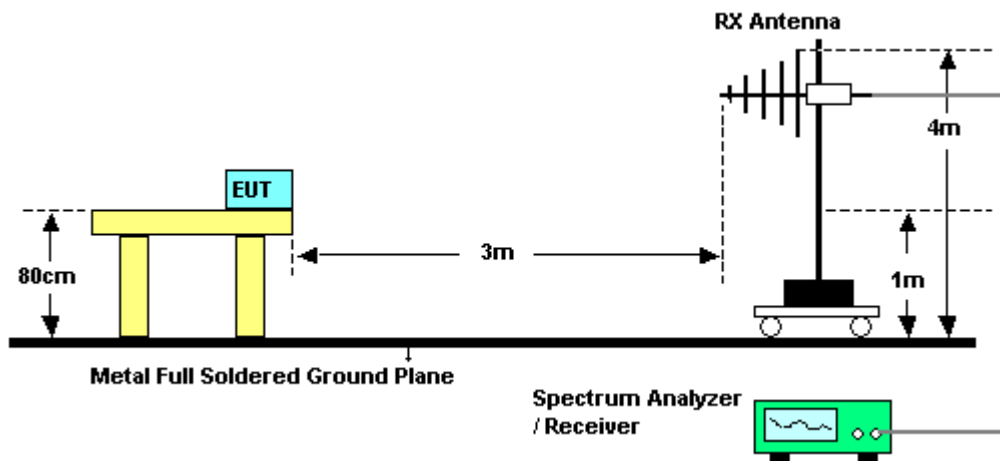

5.3.6. Test Criteria

All test results complied with Section 15.249(d) requirements. Measurement Uncertainty is 2.26dB.



5.3.7. Test Results for CH 16 / 2480 MHz (for emission below 1GHz)

- Temperature: 27°C
- Relative Humidity: 50%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Sun Chen

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	62.300	17.00	-23.00	40.00	32.84	10.34	1.32	27.50	Peak	---	---
2	88.140	12.63	-30.87	43.50	29.64	8.68	1.60	27.29	Peak	---	---
3	184.190	19.90	-23.60	43.50	29.95	14.53	2.45	27.03	Peak	---	---
1	441.600	20.69	-25.31	46.00	28.43	16.47	3.65	27.86	Peak	---	---
2	662.400	24.65	-21.35	46.00	27.60	20.59	4.67	28.21	Peak	---	---
3	935.200	28.06	-17.94	46.00	27.41	22.48	5.44	27.27	Peak	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	66.380	26.60	-13.40	40.00	42.64	10.06	1.37	27.47	Peak	---	---
2	70.460	19.67	-20.33	40.00	35.91	9.78	1.42	27.44	Peak	---	---
3	91.030	13.94	-29.56	43.50	31.03	8.55	1.63	27.27	Peak	---	---
1	656.800	25.69	-20.31	46.00	28.71	20.57	4.64	28.23	Peak	---	---
2	774.400	27.83	-18.17	46.00	29.11	21.60	4.92	27.80	Peak	---	---
3	985.600	29.86	-24.14	54.00	28.00	23.58	5.65	27.37	Peak	---	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



5.3.8. Test Results for CH 01 / 2405 MHz (for emission above 1GHz)

- Temperature: 27°C
- Relative Humidity: 50%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Sun Chen

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2344.000	55.82	-18.18	74.00	65.39	28.16	1.88	39.61	Peak	---	---
2	2344.000	26.10	-27.90	54.00	35.67	28.16	1.88	39.61	Average	---	---
3	4812.000	49.51	-24.49	74.00	53.85	32.96	2.84	40.14	Peak	---	---
4	7212.000	49.91	-24.09	74.00	50.00	35.77	3.62	39.48	Peak	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2724.000	55.73	-18.27	74.00	63.91	29.25	2.07	39.50	Peak	---	---
2	2724.000	28.32	-25.68	54.00	36.50	29.25	2.07	39.50	Average	---	---
3	4812.000	46.98	-27.02	74.00	51.32	32.96	2.84	40.14	Peak	---	---
4	7212.000	42.80	-11.20	54.00	42.89	35.77	3.62	39.48	Average	---	---
5	7212.000	53.09	-20.91	74.00	53.18	35.77	3.62	39.48	Peak	---	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



5.3.9. Test Results for CH 08 / 2440 MHz (for emission above 1GHz)

- Temperature: 27°C
- Relative Humidity: 50%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Sun Chen

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2344.000	62.14	-11.86	74.00	71.71	28.16	1.88	39.61	Peak	---	---
2	2344.000	26.16	-27.84	54.00	35.73	28.16	1.88	39.61	Average	---	---
3	4884.000	50.37	-23.63	74.00	54.53	33.11	2.87	40.14	Peak	---	---
4	7324.000	52.40	-21.60	74.00	52.06	36.13	3.66	39.45	Peak	---	---
5	7324.000	41.92	-12.08	54.00	41.58	36.13	3.66	39.45	Average	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2724.000	56.66	-17.34	74.00	64.84	29.25	2.07	39.50	Peak	---	---
2	2724.000	28.24	-25.76	54.00	36.42	29.25	2.07	39.50	Average	---	---
3	4884.000	51.00	-23.00	74.00	55.16	33.11	2.87	40.14	Peak	---	---
4	7324.000	54.21	-19.79	74.00	53.87	36.13	3.66	39.45	Peak	---	---
5	7324.000	38.06	-15.94	54.00	37.72	36.13	3.66	39.45	Average	---	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



5.3.10. Test Results for CH 16 / 2480 MHz (for emission above 1GHz)

- Temperature: 27°C
- Relative Humidity: 50%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Sun Chen

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2512.000	57.96	-16.04	74.00	67.02	28.55	1.97	39.58	Peak	---	---
2	2512.000	26.44	-27.56	54.00	35.50	28.55	1.97	39.58	Average	---	---
3	4964.000	47.64	-26.36	74.00	51.64	33.24	2.91	40.15	Peak	---	---
4	7440.000	51.62	-22.38	74.00	50.96	36.39	3.69	39.42	Peak	---	---
5	7440.000	42.66	-11.34	54.00	42.00	36.39	3.69	39.42	Average	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2724.000	56.97	-17.03	74.00	65.15	29.25	2.07	39.50	Peak	---	---
2	2724.000	28.45	-25.55	54.00	36.63	29.25	2.07	39.50	Average	---	---
3	4960.000	56.20	-17.80	74.00	60.20	33.24	2.91	40.15	Peak	---	---
4	4960.000	43.16	-10.84	54.00	47.16	33.24	2.91	40.15	Average	---	---
5	7440.000	54.54	-19.46	74.00	53.88	36.39	3.69	39.42	Peak	---	---
6	7440.000	43.78	-10.22	54.00	43.12	36.39	3.69	39.42	Average	---	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.3.11. Photographs of Radiated Emission Test Configuration

FRONT VIEW



REAR VIEW

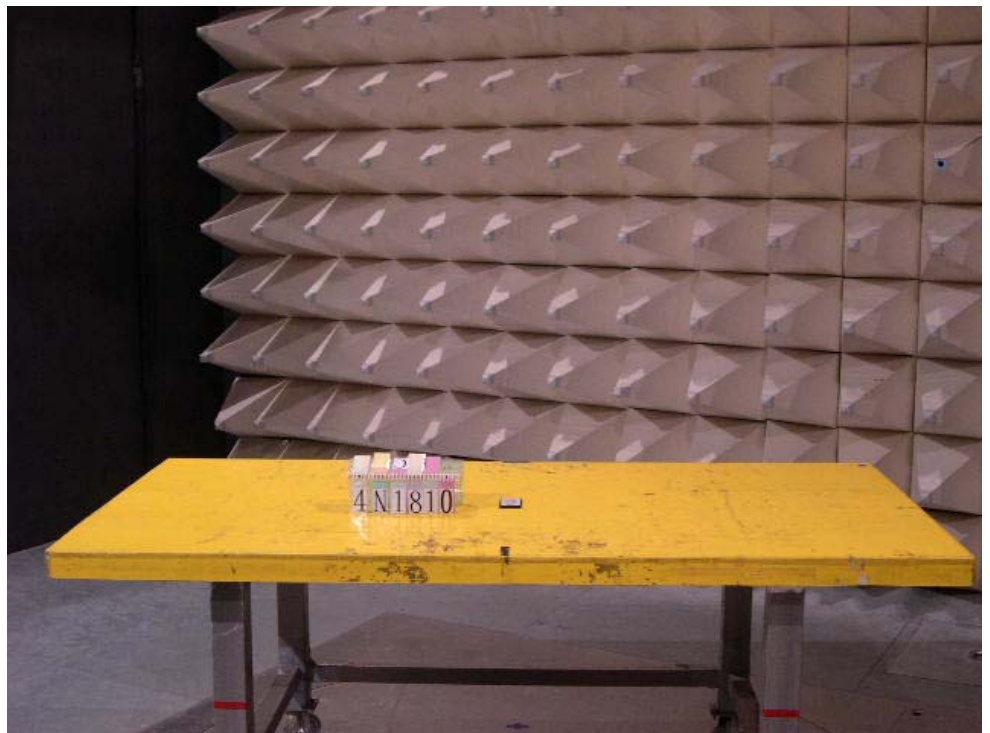



5.4. Antenna Requirements

5.4.1. Standard Applicable

Section 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.4.2. Antenna Connected Construction

There is no antenna connector for printed antenna.

5.4.3. Test Criteria

All test results complied with section 15.203 requirements.



6. List of Measuring Equipments Used

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
1	EMC Receiver	R&S	ESCS 30	100174	9 KHz – 2.75 GHz	Feb. 16, 2004	Conduction (CO04-HY)
2	LISN	MessTec	NNB-2/16Z	2001/004	9 KHz – 30 MHz	Jun. 09, 2004	Conduction (CO04-HY)
3	LISN (Support Unit)	MessTec	NNB-2/16Z	99041	9 KHz – 30 MHz	Apr. 27, 2004	Conduction (CO04-HY)
4	EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
5	RF Cable-CON	UTIFLEX	3102-26886-4	CB044	9KHz~30MHz	Apr. 21, 2004	Conduction (CO04-HY)
6	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2004	Radiation (03CH03-HY)
7	Spectrum analyzer	R&S	FSP40	100004	9KHZ~40GHz	Aug. 31, 2004	Radiation (03CH03-HY)
8	Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Nov. 04, 2004	Radiation (03CH03-HY)
9	Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz – 200MHz	Jul. 28, 2004	Radiation (03CH03-HY)
10	Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz -1GHz	Jul. 28, 2004	Radiation (03CH03-HY)
11	RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Dec. 02, 2004	Radiation (03CH03-HY)
12	Amplifier	MITEQ	AFS44	849984	100MHz~26.5GHz	Mar. 26, 2004	Radiation (03CH03-HY)
13	Horn Antenna	EMCO	3115	6741	1GHz – 18GHz	Apr. 07, 2004	Radiation (03CH03-HY)
14	Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
15	Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
16	Horn Antenna	Schwarzbeck	BBHA9170	154	18GHz~40GHz	Jun. 09, 2004	Radiation (03CH03-HY)
17	RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Dec. 04, 2004	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year.



7. Company Profile

SPORTON Lab. was established in 1986 with one shielded room: the first private EMI test facility, offering local manufacturers an alternative EMI test facility apart from ERSO. In 1988, one 3M and 10M/3M open area test site were setup and also obtained official accreditation from FCC, VCCI and NEMKO. In 1993, a Safety laboratory was founded and obtained accreditation from UL of USA, CSA of Canada and TUV (Rhineland & PS) of Germany. In 1995, one EMC lab, including EMI and EMS test facilities was setup. In 1997, SPORTON Group has provided financial expense to relocate the headquarter to Orient Scientific Park in Taipei Hsien to offer more comprehensive, more qualified and better service to local suppliers and manufactures. In 1999, Safety Group and Component Group were setup. In 2001, SPORTON has established 3M/10M chamber in Hwa Ya Technology Park.

7.1. Certificate of Accreditation

Taiwan	BSMI, CNLA, DGT
USA	FCC, NVLAP, UL
EU	Nemko, TUV
Japan	VCCI
Canada	Industry Canada

7.2. Test Location

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 02-2696-2468 FAX : 02-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 03-327-3456 FAX : 03-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 02-2601-1640 FAX : 02-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 02-2631-4739 FAX : 02-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 02-8227-2020 FAX : 02-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 02-2794-8886 FAX : 02-2794-9777

8. CNLA Certificate of Accreditation

Test Lab. : Sporton International Inc.
Accreditation Number : 1190
Originally Accredited : 2003/12/15
Effective Period : 2003/12/15~2006/12/14
Accredited Scope : 47 CFR FCC Part 15 Subpart C (9kHz~40GHz)



Taiwan Accreditation Foundation
Chinese National Laboratory Accreditation
Certificate of Accreditation


Accreditation Criteria: ISO 17025
Accreditation Number: 1190
Organization/Laboratory: EMC & Wireless Communications Laboratory, Sporton International Inc.
Originally Accredited: December 15, 2003
Effective Period: December 15, 2003 To December 14, 2006
Accredited Scope: Electrical Testing Field, 7 items, details shown in the following pages.
Specific Accreditation Program: Recognition and Approval of Designated Laboratory for Commodities Inspection



President, Taiwan Accreditation Foundation
Date: July 19, 2004

(This document is invalid unless accompanied by all 4 pages)

CNLA-ZL03191E Page 1 of 4


APPENDIX A. Photographs of EUT

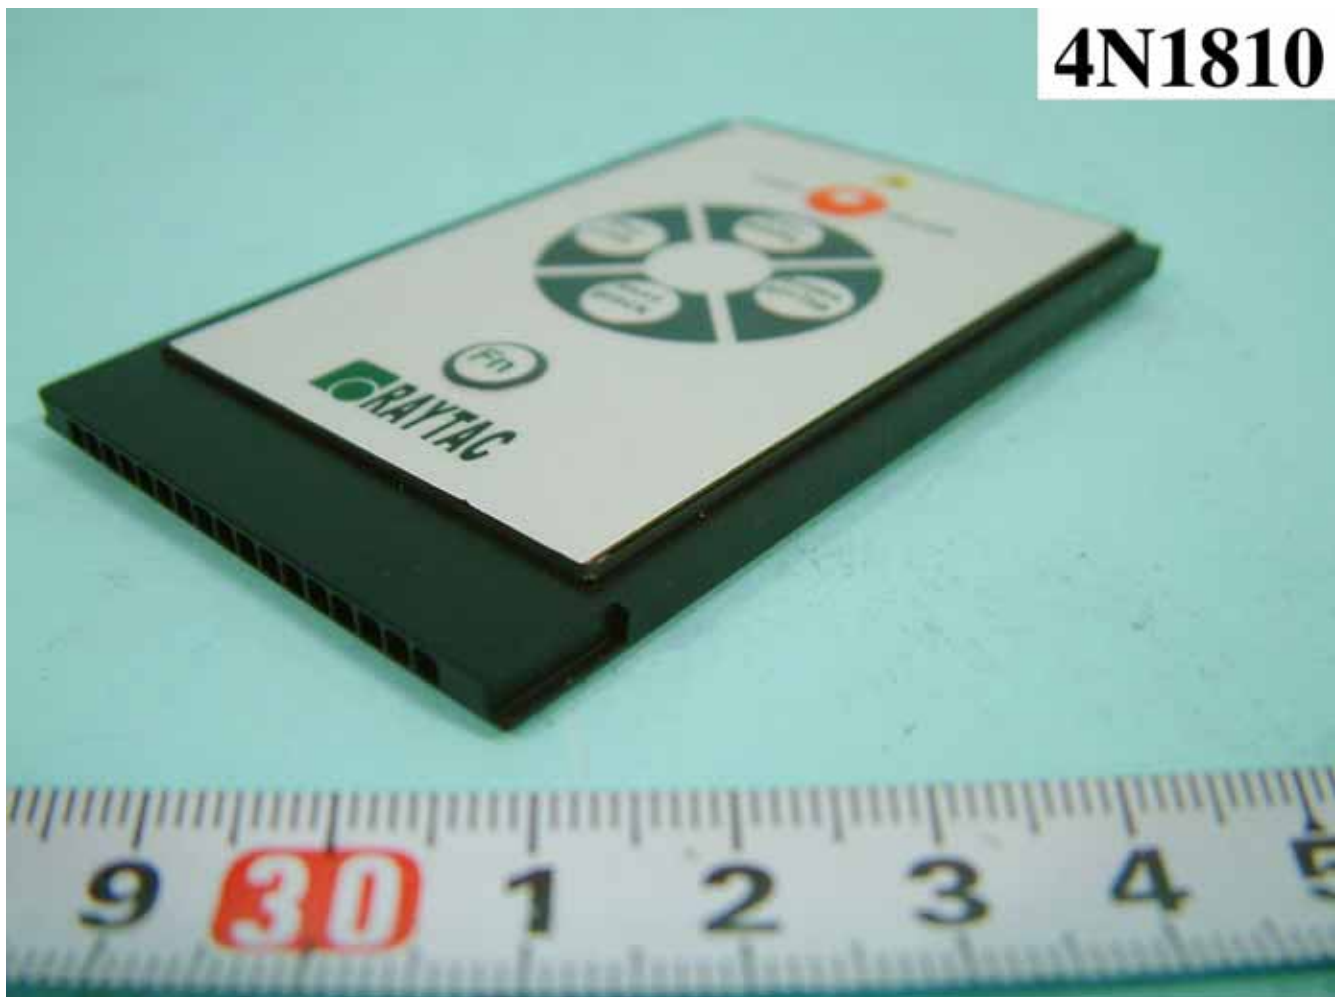

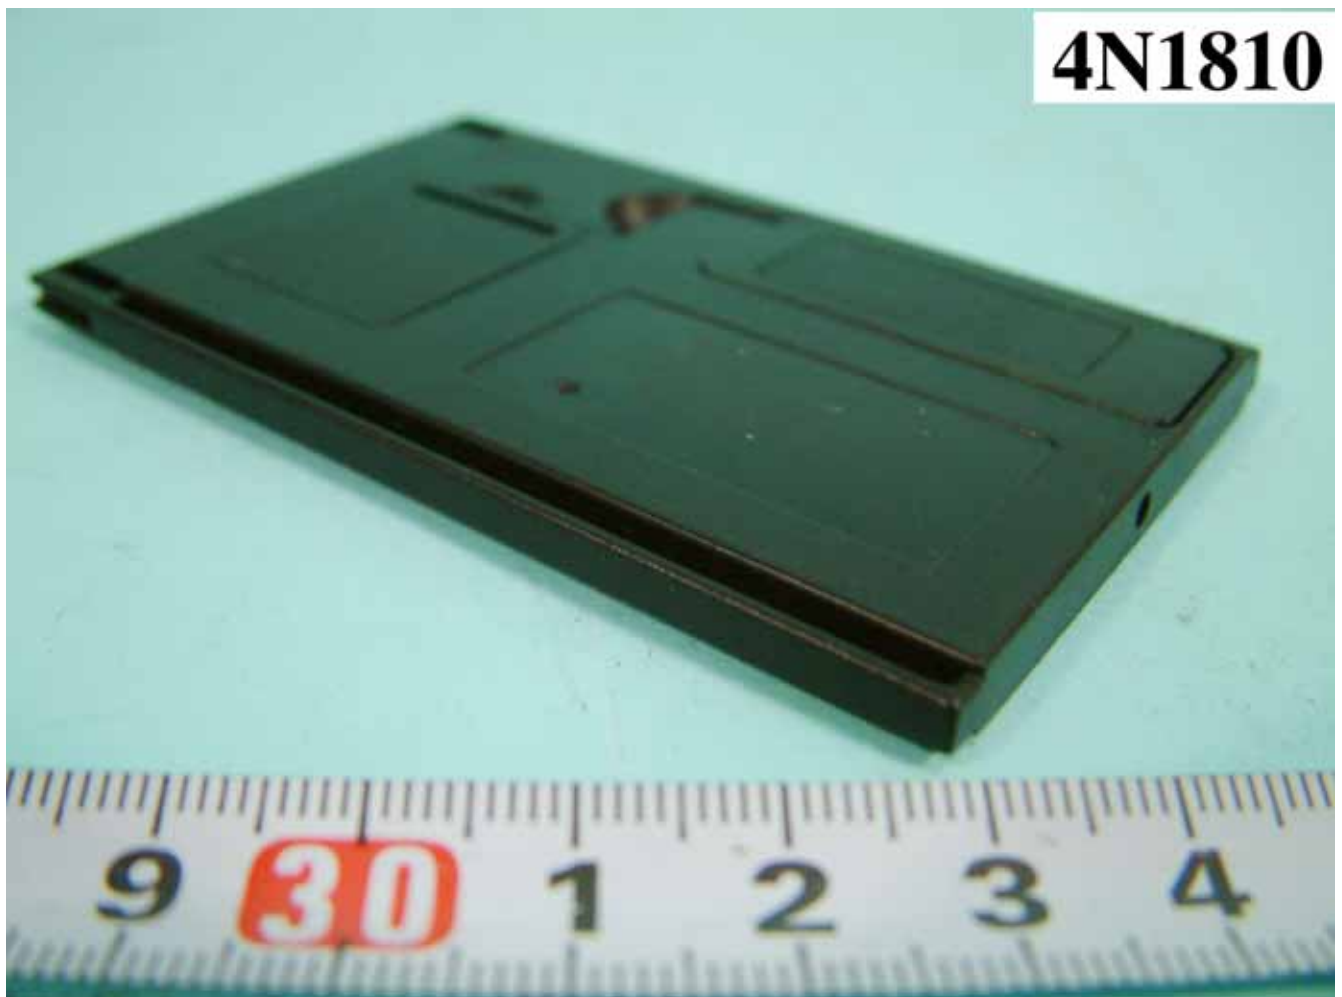





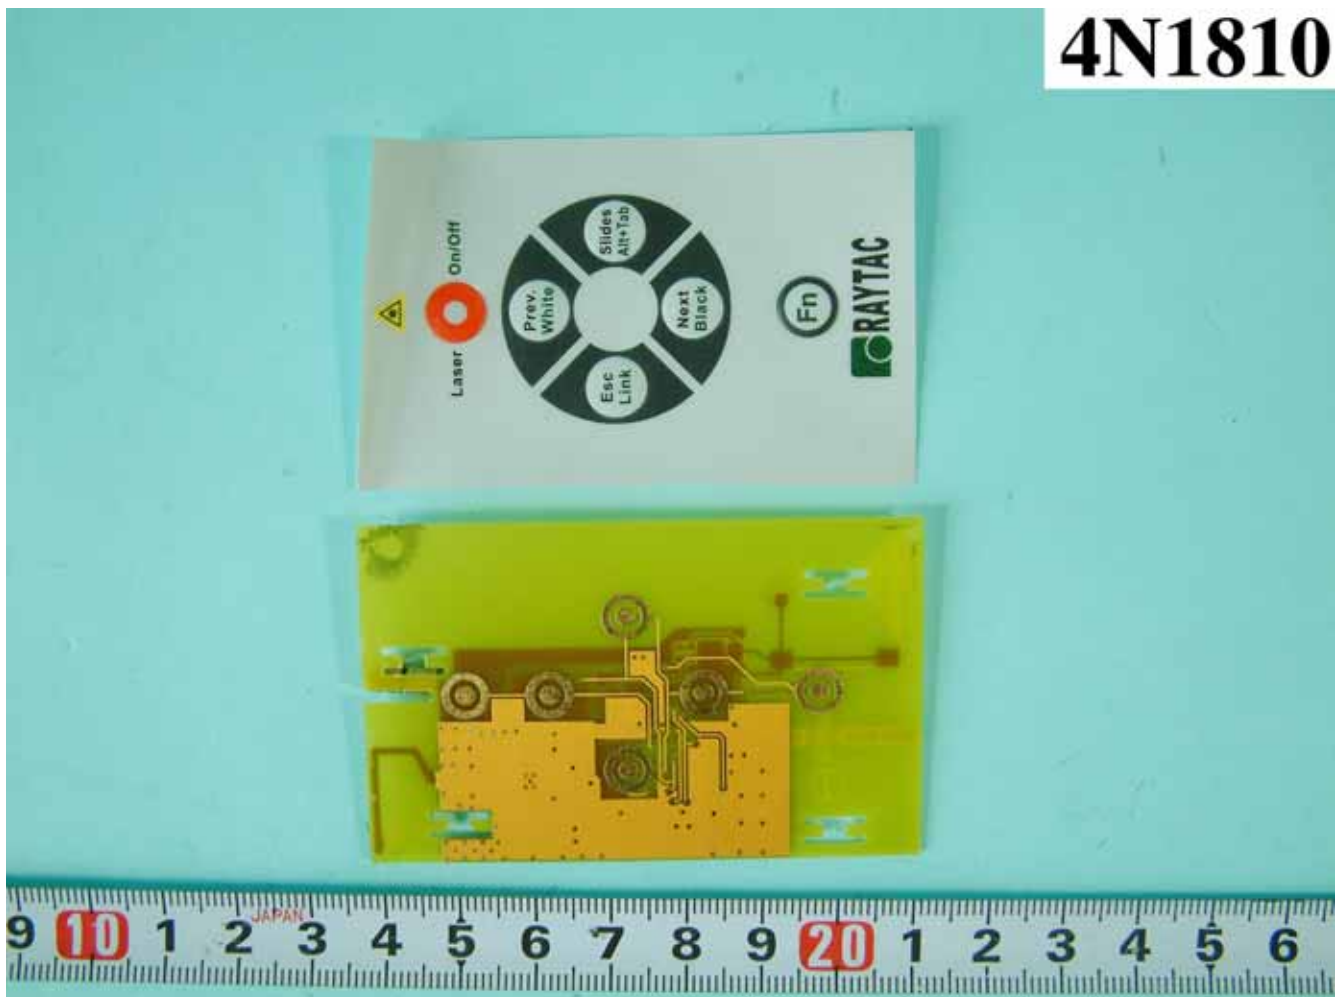

4N1810

