



<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	10/21/2004 12:10:00 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	0106
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Elliott	<b>Relative Permittivity:</b>	50.96
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.861
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	6.00 mm
<b>DUT Position:</b>	antenna A against phantom	<b>Max SAR Z-axis Location:</b>	-132.40 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	8.68 V/m
<b>Test Frequency:</b>	2412MHz	<b>SAR 1g:</b>	0.088 W/kg
<b>Air Factors:</b>	415 / 805 / 371	<b>SAR 10g:</b>	0.041 W/kg
<b>Conversion Factors:</b>	0.585 / 0.585 / 0.585	<b>SAR Start:</b>	0.022 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.022 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.01dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	9/10/2004
<b>Input Power Level:</b>	maximum	<b>Extrapolation:</b>	poly4

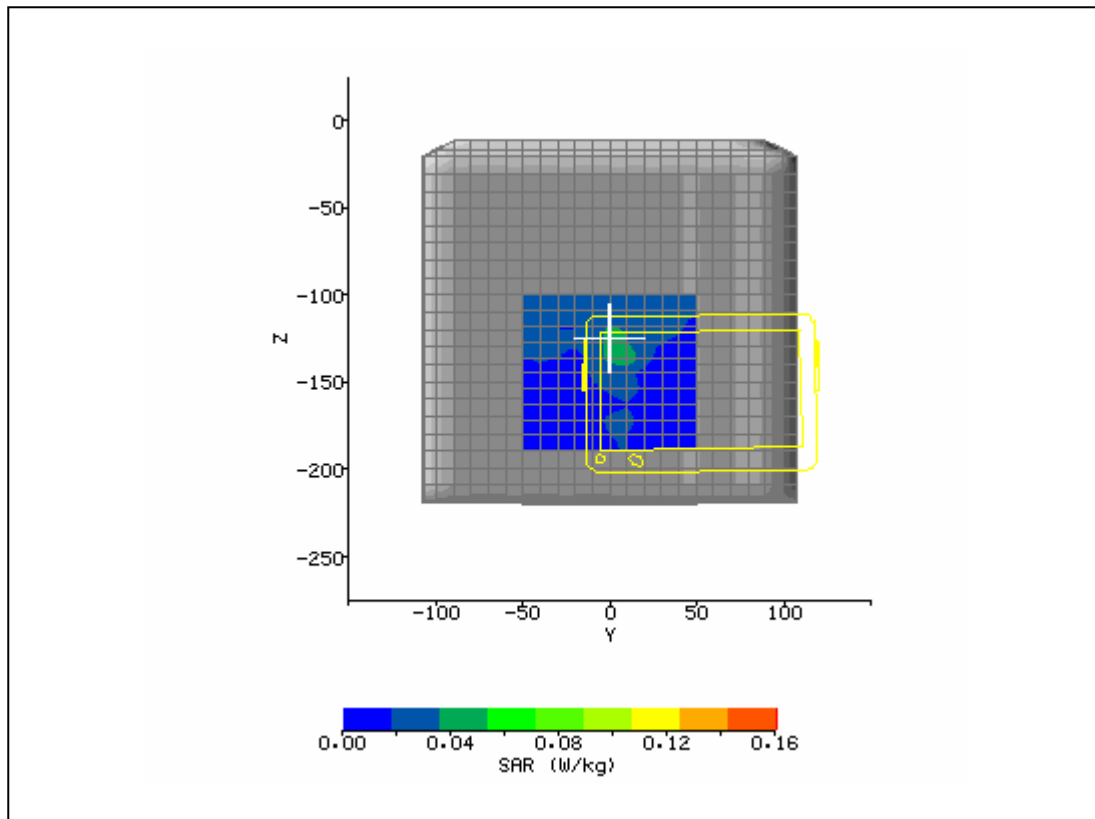

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	10/21/2004 12:47:40 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	anta2437_3d.txt	<b>Probe Serial Number:</b>	0106
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Elliott	<b>Relative Permittivity:</b>	50.99
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.909
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-26.00 mm
<b>DUT Position:</b>	antenna B against phantom	<b>Max SAR Z-axis Location:</b>	-100.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	10.29 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.164 W/kg
<b>Air Factors:</b>	415 / 805 / 371	<b>SAR 10g:</b>	0.125 W/kg
<b>Conversion Factors:</b>	0.585 / 0.585 / 0.585	<b>SAR Start:</b>	0.066 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.066 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.002 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	9/10/2004
<b>Input Power Level:</b>	maximum	<b>Extrapolation:</b>	poly4

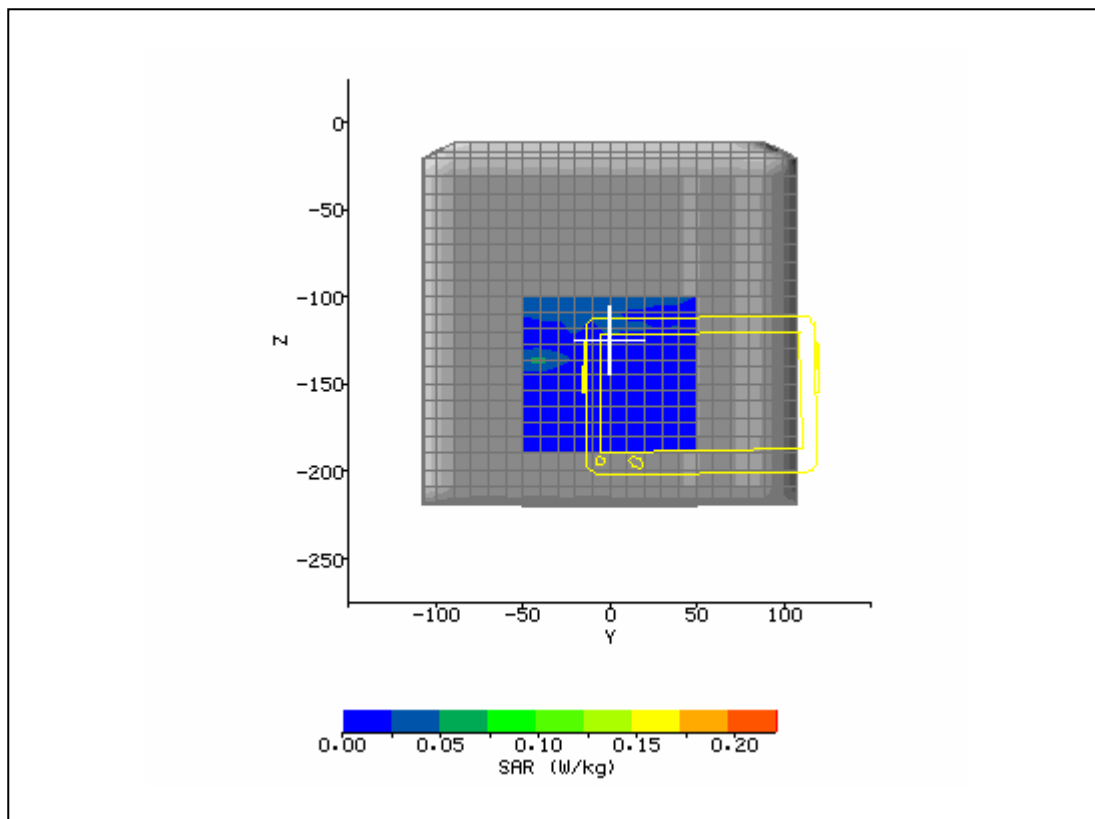

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	10/22/2004 3:52:28 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	0106
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	Elliott	<b>Relative Permittivity:</b>	50.82
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.938
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	antenna B against phantom	<b>Max SAR Z-axis Location:</b>	-140.30 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	6.24 V/m
<b>Test Frequency:</b>	2612MHz	<b>SAR 1g:</b>	0.056 W/kg
<b>Air Factors:</b>	415 / 805 / 371	<b>SAR 10g:</b>	0.032 W/kg
<b>Conversion Factors:</b>	0.585 / 0.585 / 0.585	<b>SAR Start:</b>	0.022 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.022 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.01 dB
<b>Diode Compression Factors (V*200):</b>	19 / 19 / 19	<b>Probe battery last changed:</b>	9/10/2004
<b>Input Power Level:</b>	maximum	<b>Extrapolation:</b>	poly4

