

Prüfbericht-Nr.: <i>Test report no.:</i>	CN21VLZ8 001	Auftrags-Nr.: <i>Order no.:</i>	168333613	Seite 1 von 32 Page 1 of 32
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2021-08-12	
Auftraggeber: <i>Client:</i>	AfterShokz LLC 3200 Gracie Kiltz Lane, Suite 400, Austin, TX 78758 United States			
Prüfgegenstand: <i>Test item:</i>	OpenMove			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	S661			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 March 2019			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2021-09-07	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003118481-001~010			
Prüfzeitraum: <i>Testing period:</i>	2021-09-15 – 2021-09-17			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	<u>X Bell Hu</u>		genehmigt von: <i>authorized by:</i>	<u>X Lin Lin</u>
Datum: <i>Date:</i> 2021-09-22	<small>Signed by: Bell Hu</small>		Ausstellungsdatum: <i>Issue date:</i> 2021-09-22	<small>Signed by: Lin Lin</small>
Stellung / Position:	Project Manager	Stellung / Position:	Reviewer	
Sonstiges / Other:	FCC ID: SHKASCEHB8, IC: 10978A-ASCEHB8, HVIN: S661 This report is for C2PC. Only radiated spurious emissions reported in this report, and please refer to original report 60394152 001 for other test items.			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

V05

Prüfbericht - Nr.: CN21VLZ8 001
Test Report No.

Seite 2 von 32
Page 2 of 32

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 RADIATED SPURIOUS EMISSION

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS.....	10
4	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	11
4.5	TEST SETUP DIAGRAM	12
5	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Radiated Spurious Emission</i>	<i>15</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	32
7	LIST OF TABLES.....	32

Prüfbericht - Nr.: CN21VLZ8 001
Test Report No.

Seite 4 von 32
Page 4 of 32

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Wireless Connectivity Tester	R&S	CMW270	101375	2022-08-09
Signal Analyzer	R&S	FSV 40	101441	2022-08-09
Vector Signal Generator	R&S	SMBV100A	263301	2022-08-09
Signal Generator	R&S	SMB100A	115186	2022-08-09
OSP	R&S	OSP 150	101017	2021-12-10
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	2021-12-10
Wideband Power Sensor	R&S	NRP-Z81	105677	2022-08-09
Humid & Temp Programmable Tester	BOST	NTH090-60	19040801	2022-04-02
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2024-06-22
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2022-08-10
Signal Analyzer	R&S	FSV 40	101439	2022-08-09
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2022-08-09
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2022-08-09
Amplifier	R&S	SCU-18F	180070	2022-08-09
Amplifier	R&S	SCU40A	100475	2022-08-09
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-08

Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2022-08-08
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-08
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-09-13
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	± 2.5 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB
Temperature	± 1 °C
Humidity	± 5 %
Voltage (DC)	± 1 %
Voltage (AC, <10kHz)	± 2 %

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

Prüfbericht - Nr.: CN21VLZ8 001
Test Report No.

Seite 7 von 32
Page 7 of 32

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a Bluetooth headset, which supports Bluetooth BR&EDR wireless technology. This report is for C2PC, only radiated spurious emissions reported. Bluetooth function will be disabled while in charging mode. For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	OpenMove
Type Designation:	S661
FCC ID:	SHKASCEHB8
IC:	10978A-ASCEHB8
PMN:	OpenMove
HVIN:	S661
Testing Voltage:	Internal battery operated (3.8Vdc) or USB operated (adapter input voltage 5Vdc)
Antenna Type:	Integral Antenna
Antenna Gain:	1.5 dBi
Technical Specification of BR/EDR	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK(BR), $\pi/4$ -DQPSK(EDR), 8DPSK(EDR)
Channel Number:	79 channels
Channel Separation:	1MHz

Table 3: RF Channel and Frequency of BR/EDR

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00
5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	2480.00
19	2421.00	39	2441.00	59	2461.00		

Test frequencies are lowest channel: 2402 MHz, middle channel: 2441 MHz and highest channel: 2480 MHz for General 2.4GHz

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth transmitting mode (BR & EDR mode)
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Transmitting on Hopping channel
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- User Manual
- Rating Label

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, tests were performed on model S661 in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N
Laptop	Lenovo	T480	PF-16A6N8

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

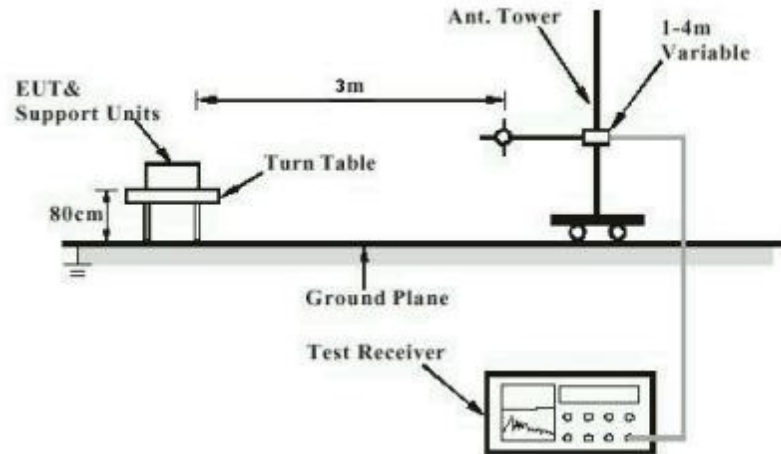


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

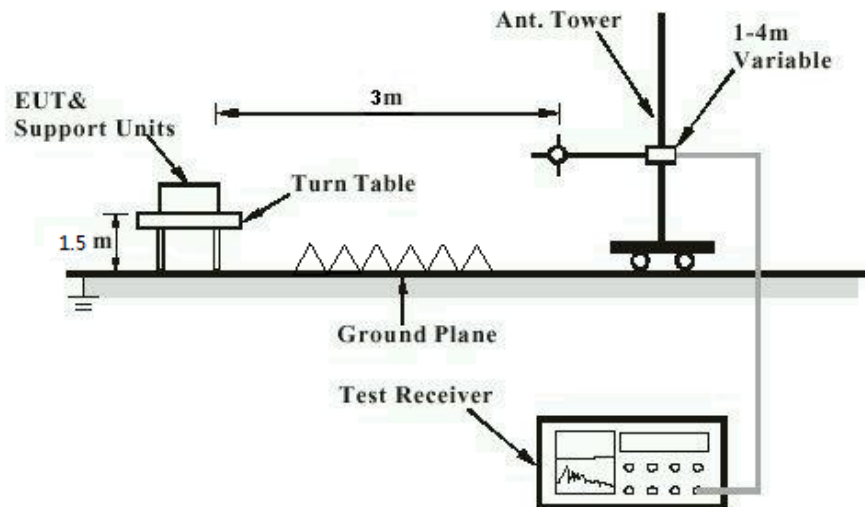


Diagram of Measurement Configuration for Mains Conduction Measurement


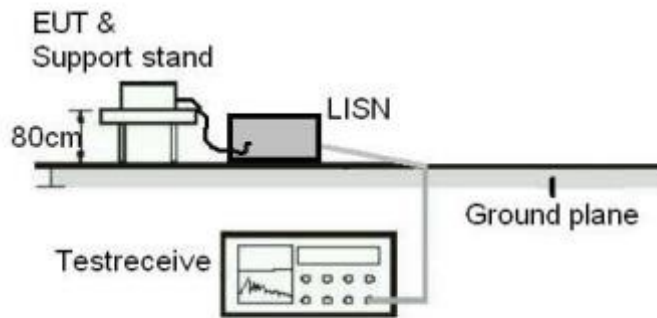


Diagram of Measurement Configuration for Conducted Transmitter Measurement

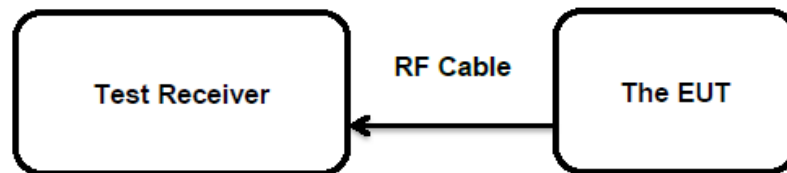

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 6.8

According to the manufacturer declared, the EUT has a Integral antenna, the directional gain of antenna is 1.5 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Clause 3.3
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Section 8.9 & 8.10
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2021-09-15
Input voltage	: USB operated (adapter input voltage 5Vdc)
Operation mode	: A
Test channel	: Refer to test result Error! Reference source not found.
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result

Remark:


Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case (BDR) spurious emissions were reported.

The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_Low channel
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

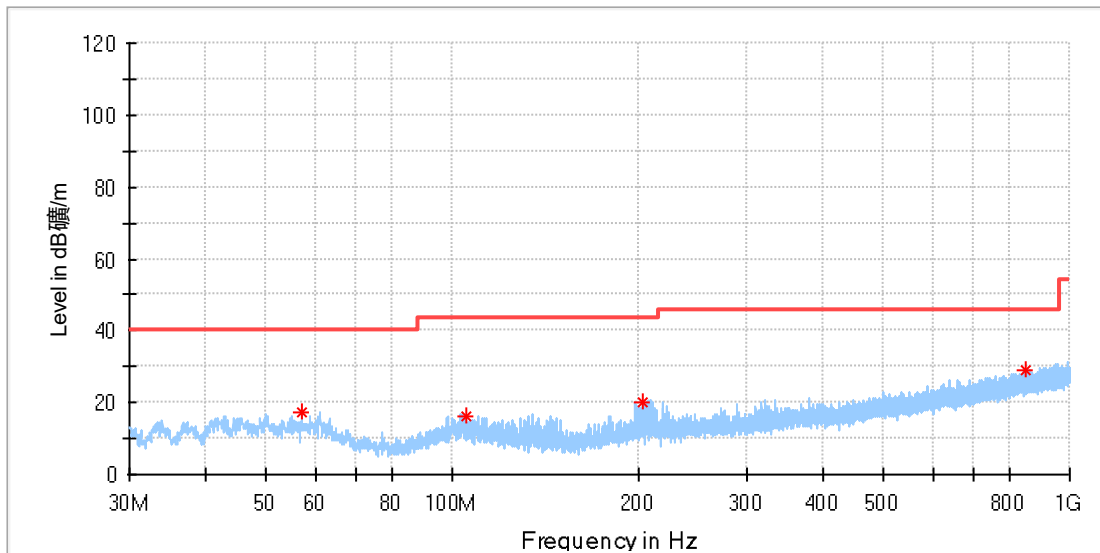


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
57.160000	17.13	40.00	22.87	100.0	H	28.0	-18.7
105.029500	16.29	43.50	27.21	100.0	H	134.0	-18.7
203.727000	20.29	43.50	23.21	100.0	H	307.0	-18.9
848.777000	29.22	46.00	16.78	100.0	H	197.0	-5.5

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_Low channel
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

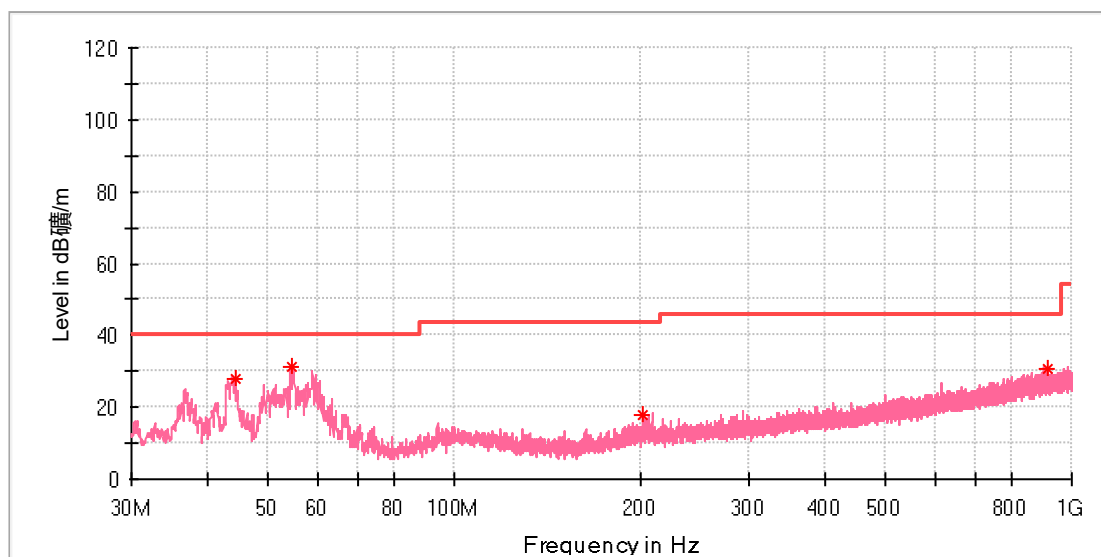


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.113500	28.17	40.00	11.83	100.0	V	126.0	-19.0
54.395500	31.35	40.00	8.65	100.0	V	142.0	-18.4
201.641500	18.10	43.50	25.40	100.0	V	0.0	-18.9
916.289000	30.46	46.00	15.54	100.0	V	246.0	-4.9

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_High channel
Test Voltage:::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

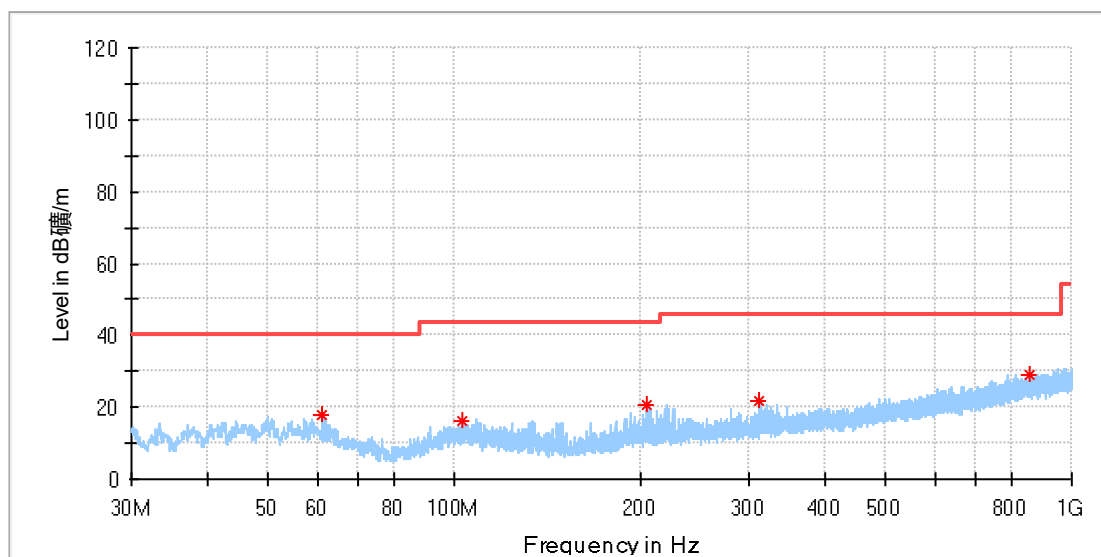


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
61.185500	17.84	40.00	22.16	100.0	H	354.0	-19.2
103.235000	16.29	43.50	27.21	100.0	H	153.0	-18.8
205.085000	20.76	43.50	22.74	100.0	H	181.0	-18.9
312.658000	21.88	46.00	24.12	100.0	H	32.0	-15.9
854.015000	28.93	46.00	17.07	100.0	H	314.0	-5.4

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_High channel
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

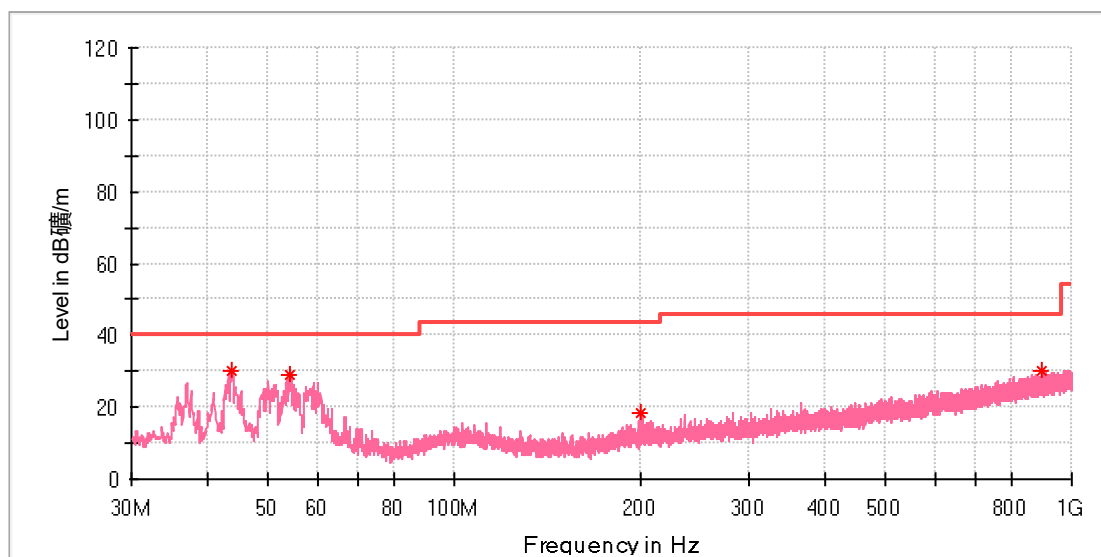

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
43.725500	30.10	40.00	9.90	100.0	V	202.0	-19.1
54.347000	29.17	40.00	10.83	100.0	V	0.0	-18.4
200.671500	18.38	43.50	25.12	100.0	V	11.0	-18.9
892.233000	29.87	46.00	16.13	100.0	V	82.0	-5.0

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_Low channel
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

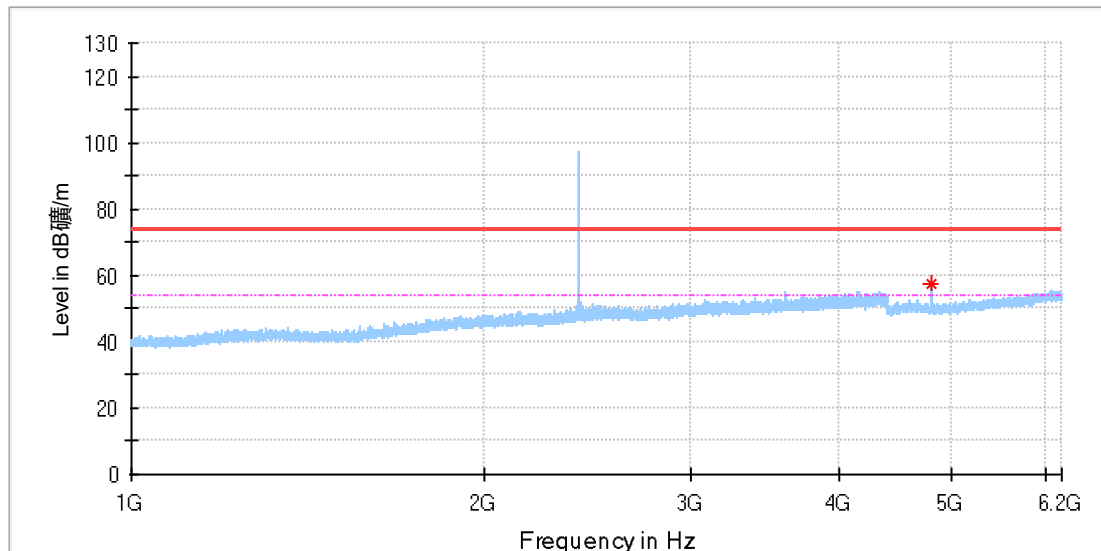


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.500000	57.17	---	74.00	16.83	100.0	H	255.0	11.8
4803.500000	--	33.65	54.00	20.35	100.0	H	255.0	11.8

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_Low channel
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

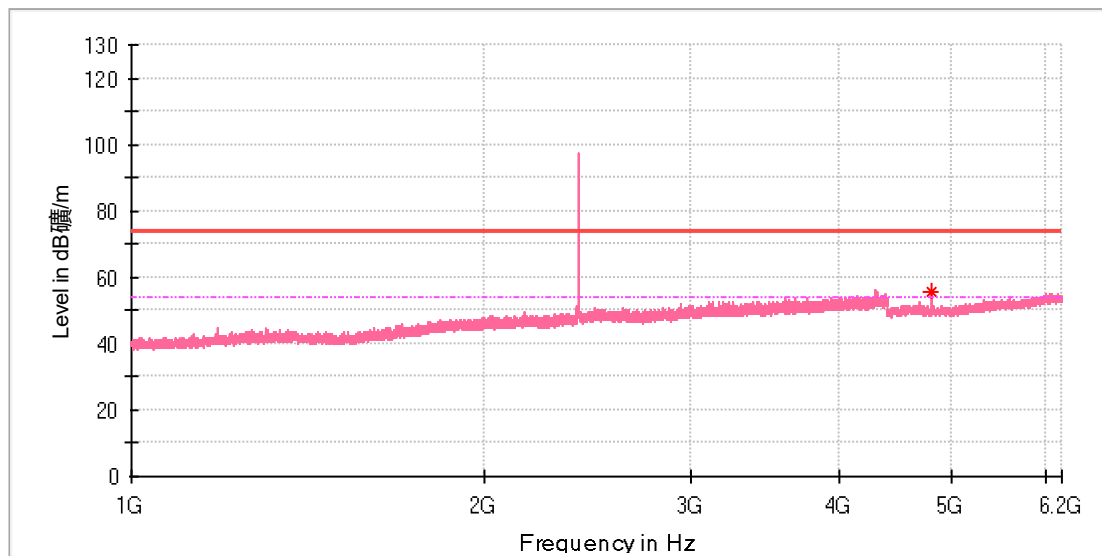


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	55.72	---	74.00	18.28	100.0	V	265.0	11.8
4804.000000	--	32.20	54.00	21.80	100.0	V	265.0	11.8

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_Low channel
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

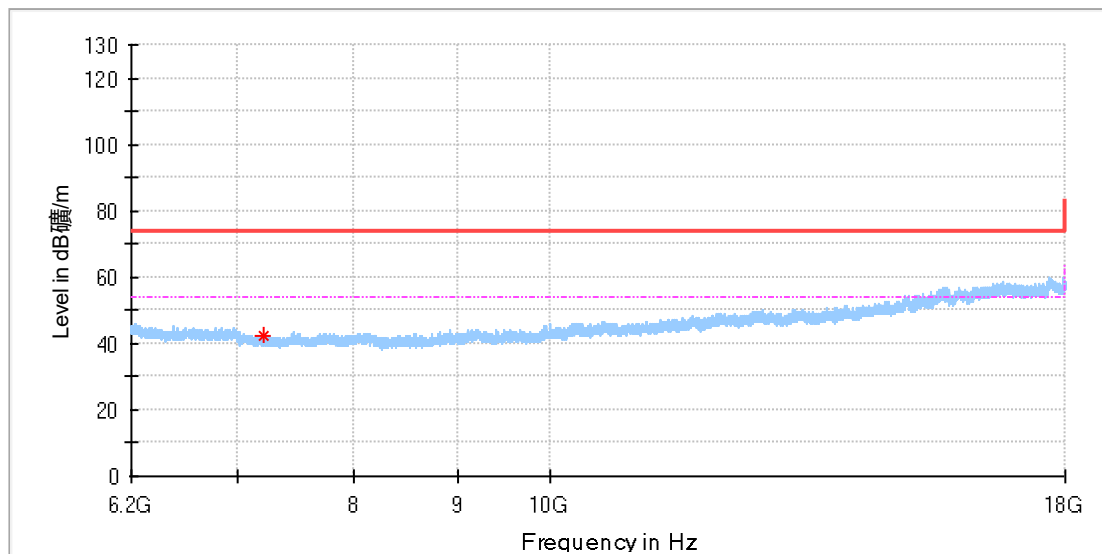


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	42.22	---	74.00	31.78	100.0	H	333.0	8.8

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_Low channel
Test Voltage:::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

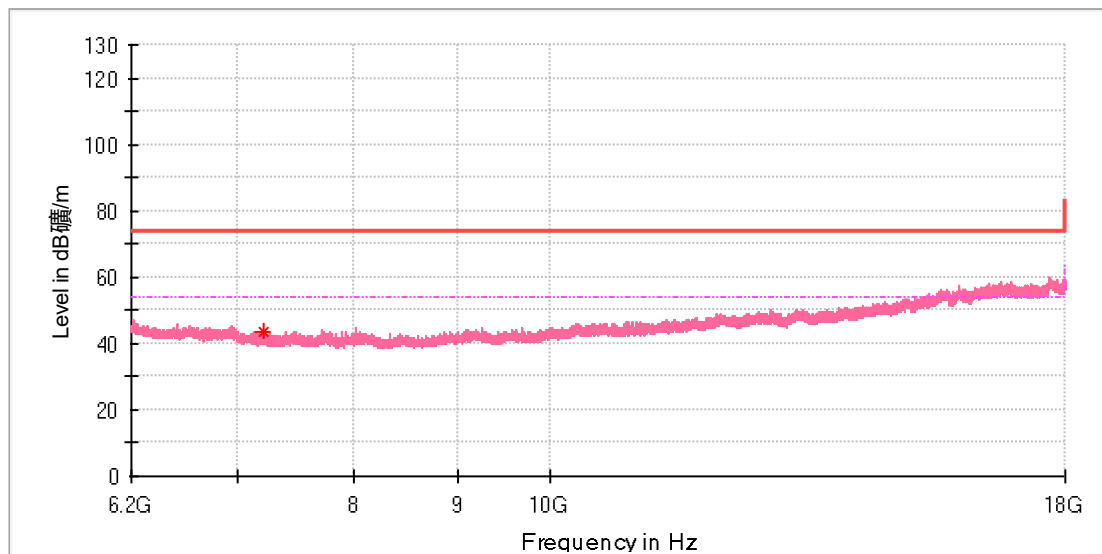


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.950000	43.44	---	74.00	30.56	100.0	V	346.0	8.8

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_Low channel
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

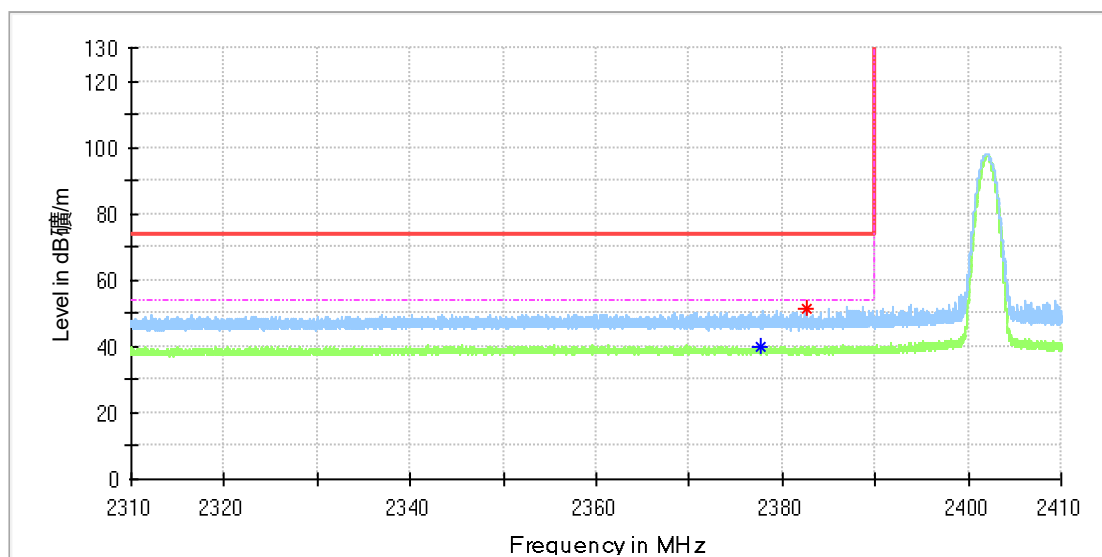


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2377.720000	---	39.71	54.00	14.29	100.0	H	10.0	6.9
2382.705000	51.44	---	74.00	22.56	100.0	H	249.0	7.0

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_Low channel
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

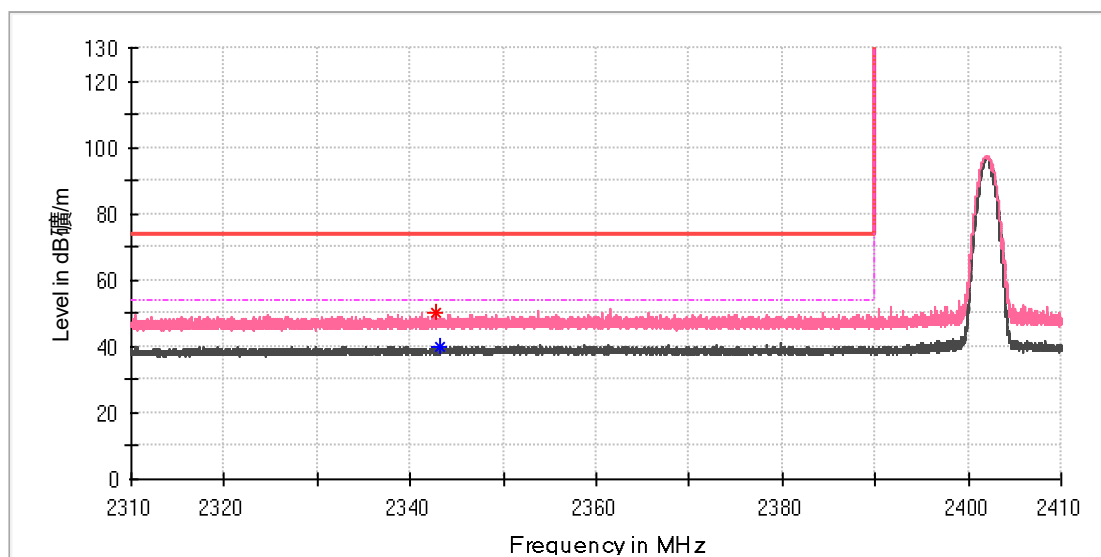


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2342.755000	50.33	---	74.00	23.67	100.0	V	196.0	6.8
2343.145000	---	40.19	54.00	13.81	100.0	V	330.0	6.8

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_Mid channel
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

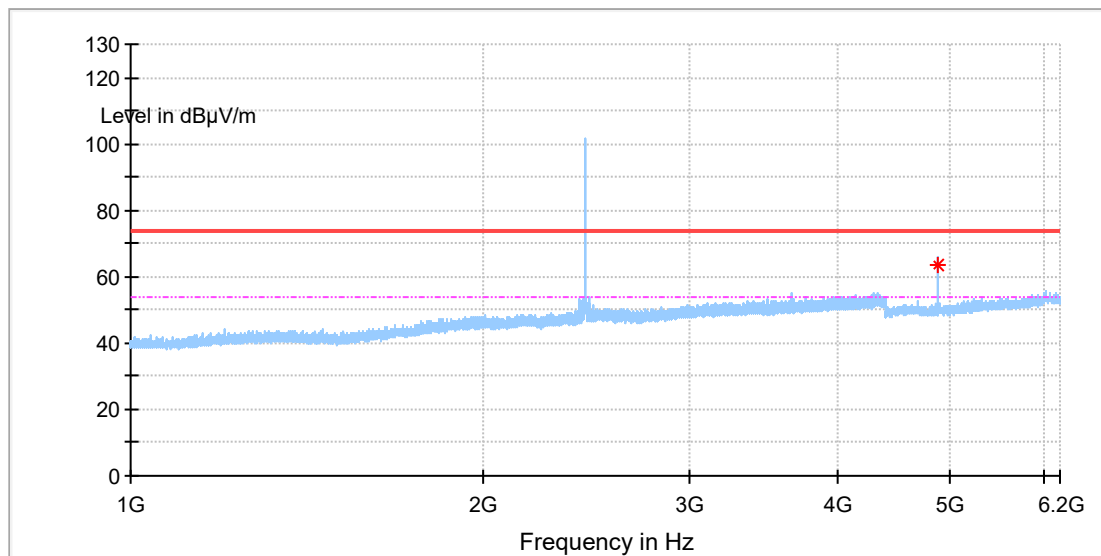


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4882.000000	63.70	---	74.00	10.30	100.0	H	70.0	11.8
4882.000000	---	40.18	54.00	13.82	100.0	H	70.0	11.8

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_Mid channel
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

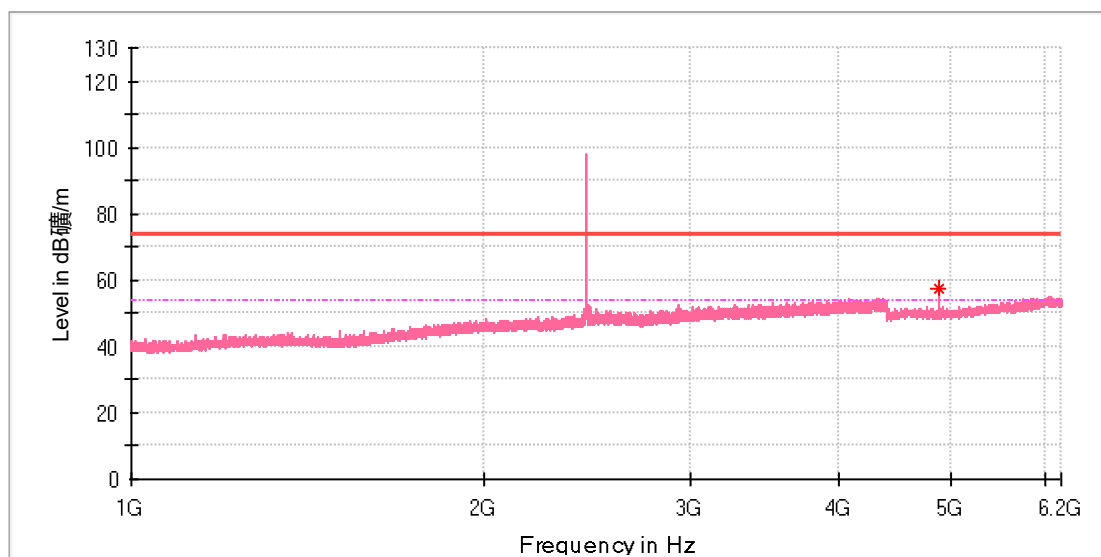


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4882.000000	57.24	---	74.00	16.76	100.0	V	73.0	11.8
4882.000000	---	33.72	54.00	20.28	100.0	V	73.0	11.8

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_High channel
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

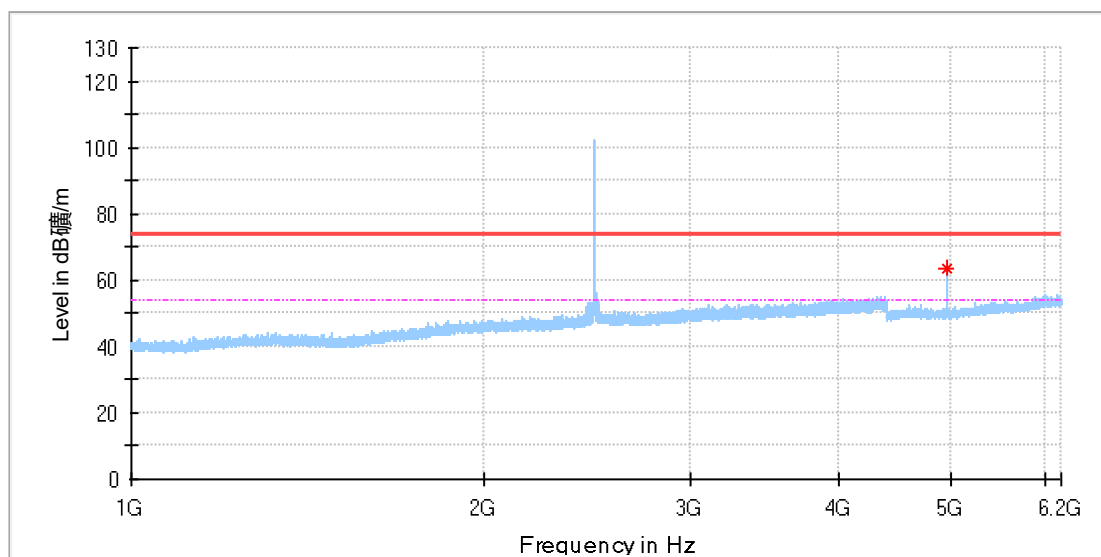


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.000000	63.66	---	74.00	10.34	100.0	H	132.0	11.8
4960.000000	---	40.14	54.00	13.86	100.0	H	132.0	11.8

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_High channel
Test Voltage::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

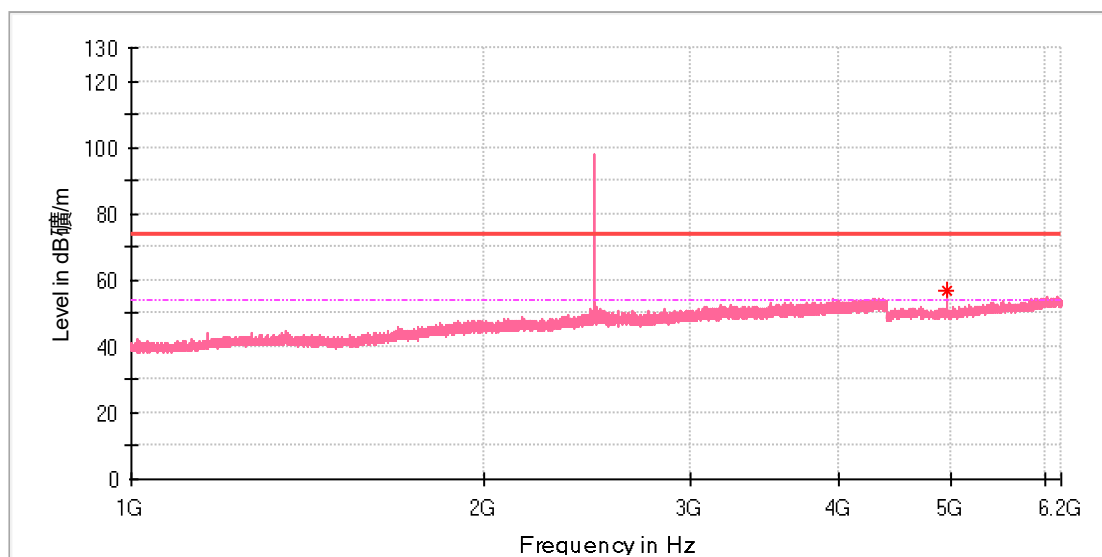


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.500000	56.87	---	74.00	17.13	100.0	V	140.0	11.8
4959.500000	---	33.32	54.00	20.68	100.0	V	140.0	11.8

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_High channel
Test Voltage:::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

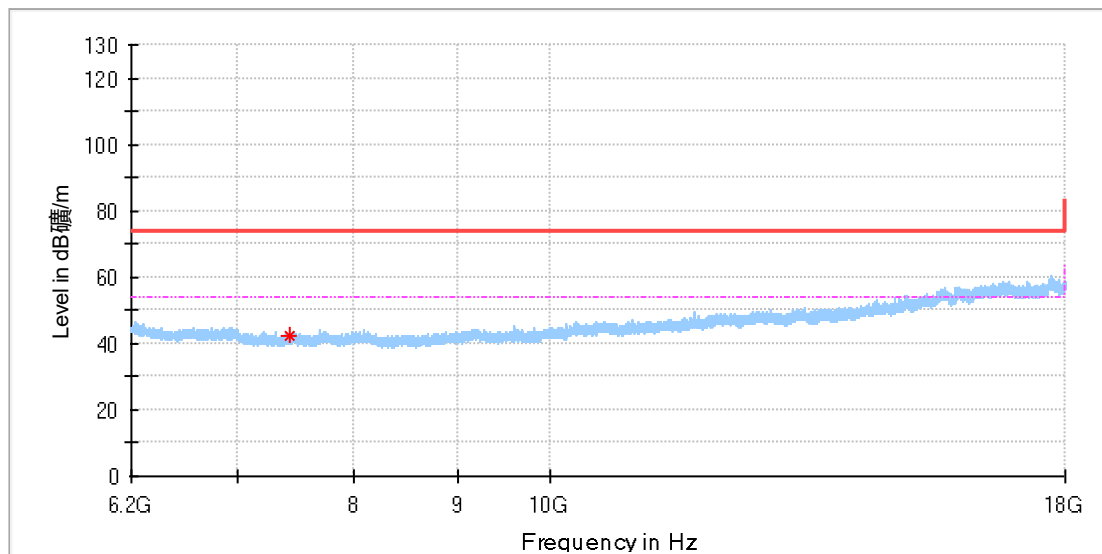


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7432.608333	42.18	---	74.00	31.82	100.0	H	0.0	8.4

EUT Information

EUT Name:	Bluetooth Earphone
Model:	S661
Test Mode:	BDR_DH5_High channel
Test Voltage:::	120V/60Hz
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

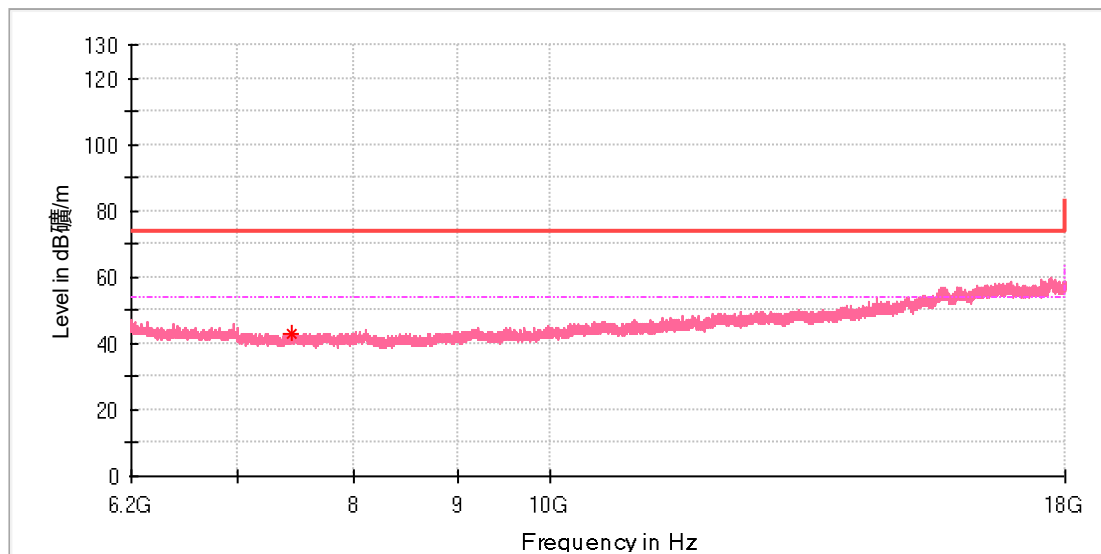

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.491667	42.70	---	74.00	31.30	100.0	V	253.0	8.4

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT	8
Table 3: RF Channel and Frequency of BR/EDR.....	9
Table 4: Auxiliary Equipment Used during Test	11