



# FCC TEST REPORT

**REPORT NO.:** RF960531L08

**MODEL NO.:** WUB-370L

**RECEIVED:** May 31, 2007

**TESTED:** Jun. 04 ~ Jun. 12, 2007

**ISSUED:** Jun. 20, 2007

**APPLICANT:** U-MEDIA Communications, Inc.

**ADDRESS:** 9F, No.1, Jin-shan 7th St., Hsinchu 300, Taiwan,  
R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB ADDRESS:** 47 14<sup>th</sup> Lin, Chiapau Tsun, Linko, Taipei, Taiwan,  
R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2<sup>nd</sup> Rd., Kueishan, Taoyuan,  
Taiwan, R.O.C.

This test report consists of 108 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.





## TABLE OF CONTENTS

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY .....	5
3.	GENERAL INFORMATION .....	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST .....	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	11
3.4	DESCRIPTION OF SUPPORT UNITS .....	11
4.	TEST TYPES AND RESULTS.....	12
4.1	CONDUCTED EMISSION MEASUREMENT .....	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	12
4.1.2	TEST INSTRUMENTS .....	12
4.1.3	TEST PROCEDURES.....	13
4.1.4	DEVIATION FROM TEST STANDARD .....	13
4.1.5	TEST SETUP.....	14
4.1.6	EUT OPERATING CONDITIONS.....	14
4.1.7	TEST RESULTS .....	15
4.2	RADIATED EMISSION MEASUREMENT .....	33
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	33
4.2.2	TEST INSTRUMENTS .....	34
4.2.3	TEST PROCEDURES.....	35
4.2.4	DEVIATION FROM TEST STANDARD .....	35
4.2.5	TEST SETUP.....	36
4.2.6	EUT OPERATING CONDITIONS.....	36
4.2.7	TEST RESULTS .....	37
4.3	6dB BANDWIDTH MEASUREMENT .....	55
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	55
4.3.2	TEST INSTRUMENTS .....	55
4.3.3	TEST PROCEDURE.....	55
4.3.4	DEVIATION FROM TEST STANDARD .....	55
4.3.5	TEST SETUP.....	56
4.3.6	EUT OPERATING CONDITIONS.....	56
4.3.7	TEST RESULTS .....	57
4.4	MAXIMUM PEAK OUTPUT POWER .....	69



4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	69
4.4.2	INSTRUMENTS.....	69
4.4.3	TEST PROCEDURES.....	69
4.4.4	DEVIATION FROM TEST STANDARD .....	69
4.4.5	TEST SETUP.....	70
4.4.6	EUT OPERATING CONDITIONS.....	70
4.4.7	TEST RESULTS .....	71
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	73
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	73
4.5.2	TEST INSTRUMENTS.....	73
4.5.3	TEST PROCEDURE.....	73
4.5.4	DEVIATION FROM TEST STANDARD .....	73
4.5.5	TEST SETUP.....	74
4.5.6	EUT OPERATING CONDITION.....	74
4.5.7	TEST RESULTS .....	75
4.6	BAND EDGES MEASUREMENT.....	87
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	87
4.6.2	TEST INSTRUMENTS.....	87
4.6.3	TEST PROCEDURE.....	88
4.6.4	DEVIATION FROM TEST STANDARD .....	88
4.6.5	EUT OPERATING CONDITION.....	89
4.6.6	TEST RESULTS .....	89
4.7	ANTENNA REQUIREMENT.....	105
4.7.1	STANDARD APPLICABLE.....	105
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	105
5.	PHOTOGRAPHS OF THE TEST CONFIGURATIOn.....	106
6.	INFORMATION ON THE TESTING LABORATORIES.....	107
APPENDIX-A	.....	A-1



# 1. CERTIFICATION

**PRODUCT:** 802.11n/g/b Wireless USB Compact Adapter

**MODEL:** WUB-370L

**BRAND:** U-MEDIA


**APPLICANT:** U-MEDIA Communications, Inc.

**TESTED:** Jun. 04 ~ Jun. 12, 2007


**TEST SAMPLE:** ENGINEERING SAMPLE

**STANDARDS:** **FCC Part 15, Subpart C (Section 15.247)**  
ANSI C63.4-2003

The above equipment (model: WUB-370L) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** :  , **DATE:** Jun. 20, 2007  
Joana Wang / Specialist

**TECHNICAL ACCEPTANCE** :  , **DATE:** Jun. 20, 2007  
Responsible for RF Long Chen / Senior Engineer

**APPROVED BY** :  , **DATE:** Jun. 20, 2007  
Gary Chang / Supervisor

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -16.25dB at 0.228MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.07dB at 360.43MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	802.11n/g/b Wireless USB Compact Adapter
<b>MODEL NO.</b>	WUB-370L
<b>FCC ID</b>	SI5WUB370L
<b>POWER SUPPLY</b>	5Vdc from host equipment
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	802.11b: 11/ 5.5/ 2/ 1Mbps 802.11g: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6Mbps Draft 802.11n (20MHz): 144.444/ 130.000/ 115.556/ 86.667/ 57.778/ 43.333/ 28.889/ 14.444/ 72.2/ 65.0/ 57.8/ 43.3/ 28.9/ 21.7/ 14.4/ 7.2Mbps Draft 802.11n (40MHz): 300/ 270/ 240/ 180/ 120/ 90/ 60/ 30/ 150/ 135/ 120/ 90/ 60/ 45/ 30/ 15Mbps
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>NUMBER OF CHANNEL</b>	11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)
<b>MAXIMUM OUTPUT POWER</b>	64.863mW
<b>ANTENNA TYPE</b>	Printed antenna with 1.51dBi gain
<b>DATA CABLE</b>	1.5m shielded USB cable without core
<b>I/O PORTS</b>	USB
<b>ACCESSORY DEVICES</b>	NA

**NOTE:**

1. The brand of EUT's power amplifier (internal component) is SST or Rich Wave. The EUT has been pre-tested under SST and Rich Wave, and SST is the worst case for final test.
2. The EUT incorporates a MIMO function. Physically, the card provides two completed transmitters and two receivers.
3. The EUT is 2 \* 2 spatial MIMO (2Tx & 2Rx) without beam forming function that only operate dual chain configuration (both chain 0 and chain 1 transceivers are operational).
4. When the EUT operating in 802.11b and 802.11g, the software operation, which is defined by manufacturer, only set single Tx.
5. When the EUT operating in draft 802.11n, the software operation, which is defined by manufacturer, only set 0 ~ 15 of "MCS" (MCS: Modulation and Coding Schemes) for dual Tx.
6. The EUT complies with draft 802.11n standards and backwards compatible with 802.11b, 802.11g products.
7. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 300Mbps.
8. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g and draft 802.11n (20MHz):


CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):


CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

#### Test Mode A

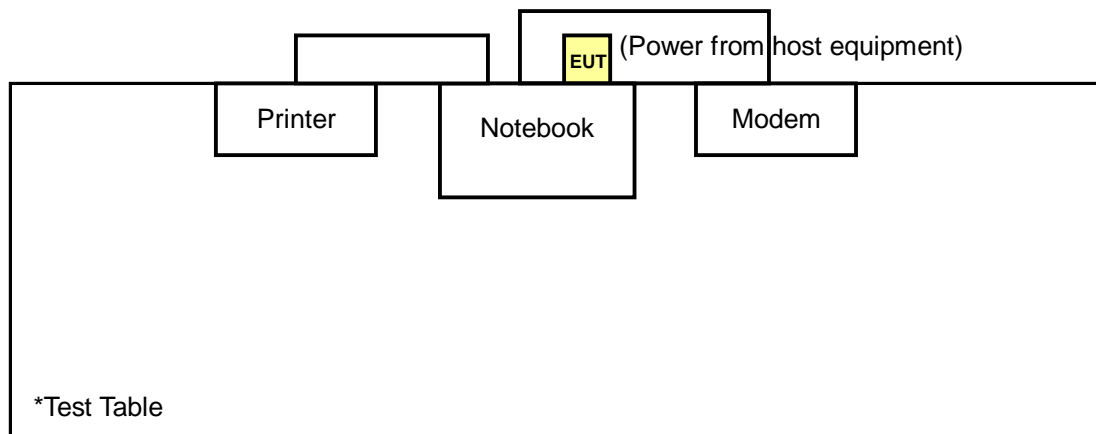

#### Test Mode B

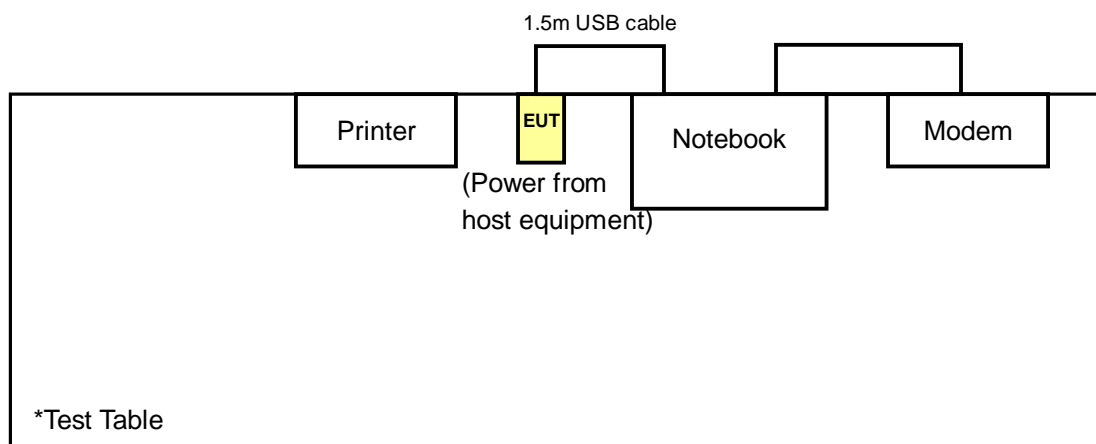





### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
A	-	√	-	-	Without USB cable
B	√	√	√	√	With USB cable

Where **PLC**: Power Line Conducted Emission      **RE < 1G**: Radiated Emission below 1GHz  
**RE ≥ 1G**: Radiated Emission above 1GHz      **APCM**: Antenna Port Conducted Measurement

**NOTE:** “-” means no effect

#### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	Single
B	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	Dual
B	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0	Dual

#### **RADIATED EMISSION TEST (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ Axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION	Axis
A, B	802.11g	1 to 11	1	OFDM	BPSK	6.0	Single	X
A, B	Draft 802.11n (20MHz)	1 to 11	1	OFDM	BPSK	7.2	Dual	
A, B	Draft 802.11n (40MHz)	1 to 7	1	OFDM	BPSK	15.0	Dual	



**RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ Axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION	Axis
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	Single	X
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	Single	
B	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	Dual	
B	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0	Dual	

**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION
B	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0	Single
B	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0	Single
B	Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2	Dual
B	Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	15.0	Dual

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	Single
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	Single
B	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	Dual
B	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0	Dual



### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### FCC Part 15, Subpart C. (15.247)

#### ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY054147	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008269	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.6m shielded cable
3	1.6m shielded cable

**NOTE:** All power cords of the above support units are non shielded (1.8m).



## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 25, 2007
RF signal cable Woken	5D-FB	Cable-HYCO3-0 1	Jan. 06, 2008
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 08, 2008
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 16, 2008
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Shielded Room 2.
  3. The VCCI Site Registration No. is C-2047.




#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

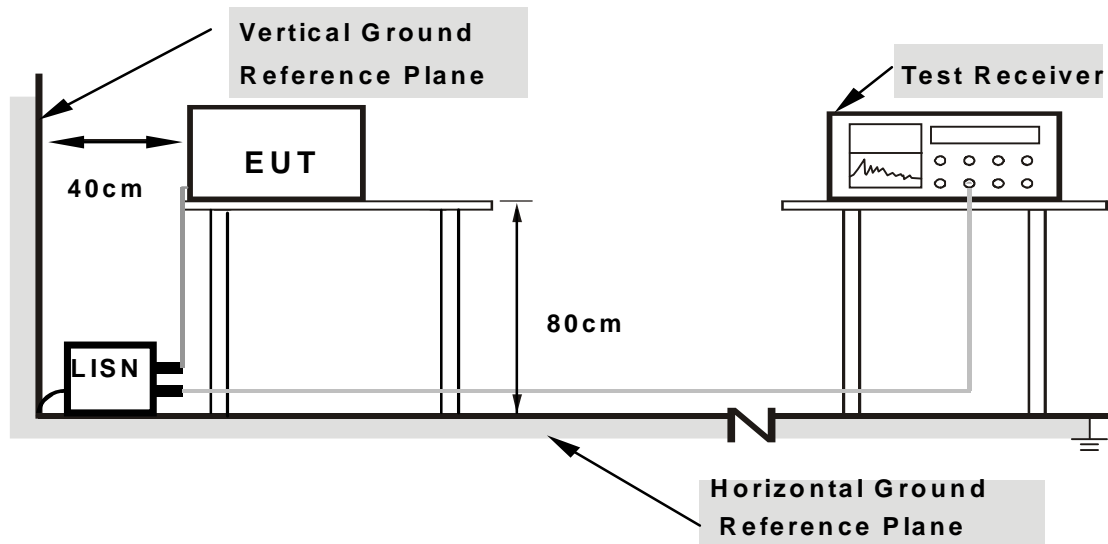

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- Connected the EUT to notebook via USB cable and placed on a testing table.
- The notebook ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- The necessary accessories enable the system in full functions.

#### 4.1.7 TEST RESULTS


##### CONDUCTED WORST-CASE DATA

##### 802.11g OFDM MODULATION: SINGLE TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	47.17	-	47.27	-	66.00	56.00	-18.73	-
2	0.248	0.10	40.45	-	40.55	-	61.84	51.84	-21.29	-
3	0.353	0.10	38.44	-	38.54	-	58.89	48.89	-20.35	-
4	0.963	0.11	33.23	-	33.34	-	56.00	46.00	-22.66	-
5	2.027	0.22	30.26	-	30.48	-	56.00	46.00	-25.52	-
6	10.902	0.36	35.76	-	36.12	-	60.00	50.00	-23.88	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

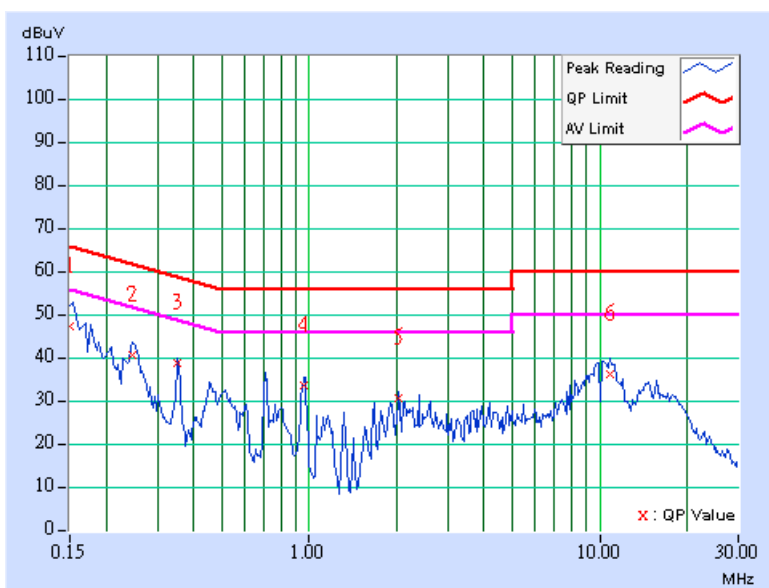

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	46.95	-	47.05	-	66.00	56.00	-18.95	-
2	0.252	0.10	39.67	-	39.77	-	61.71	51.71	-21.94	-
3	0.353	0.10	37.55	-	37.65	-	58.89	48.89	-21.24	-
4	0.955	0.20	31.49	-	31.69	-	56.00	46.00	-24.31	-
5	2.020	0.22	31.46	-	31.68	-	56.00	46.00	-24.32	-
6	10.566	0.44	36.47	-	36.91	-	60.00	50.00	-23.09	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

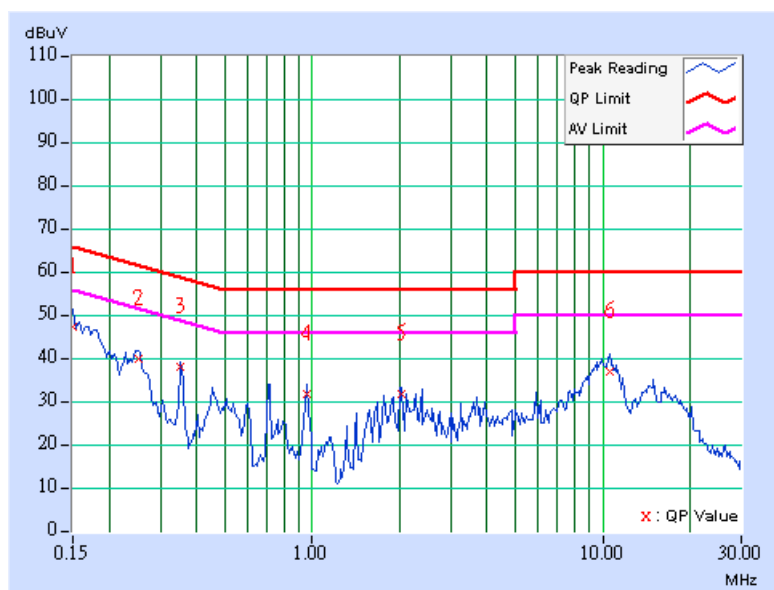




EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	48.36	-	48.46	-	66.00	56.00	-17.54	-
2	0.253	0.10	40.40	-	40.50	-	61.64	51.64	-21.14	-
3	0.353	0.10	38.06	-	38.16	-	58.89	48.89	-20.73	-
4	0.959	0.11	33.74	-	33.85	-	56.00	46.00	-22.15	-
5	2.368	0.23	30.52	-	30.75	-	56.00	46.00	-25.25	-
6	10.340	0.34	35.41	-	35.75	-	60.00	50.00	-24.25	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

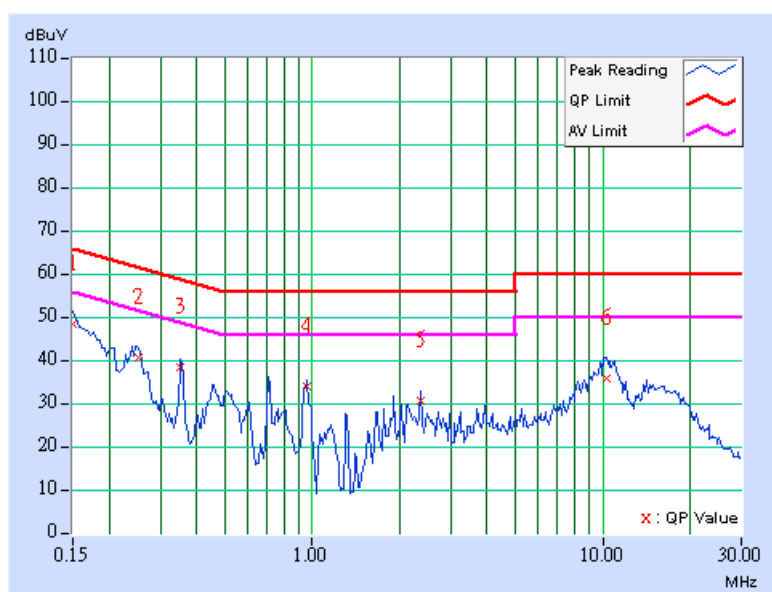

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.152	0.10	45.52	-	45.62	-	65.91	55.91	-20.29	-
2	0.249	0.10	40.02	-	40.12	-	61.80	51.80	-21.68	-
3	0.353	0.10	37.53	-	37.63	-	58.89	48.89	-21.26	-
4	0.956	0.20	31.39	-	31.59	-	56.00	46.00	-24.41	-
5	2.028	0.22	32.41	-	32.63	-	56.00	46.00	-23.37	-
6	10.263	0.43	36.46	-	36.89	-	60.00	50.00	-23.11	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

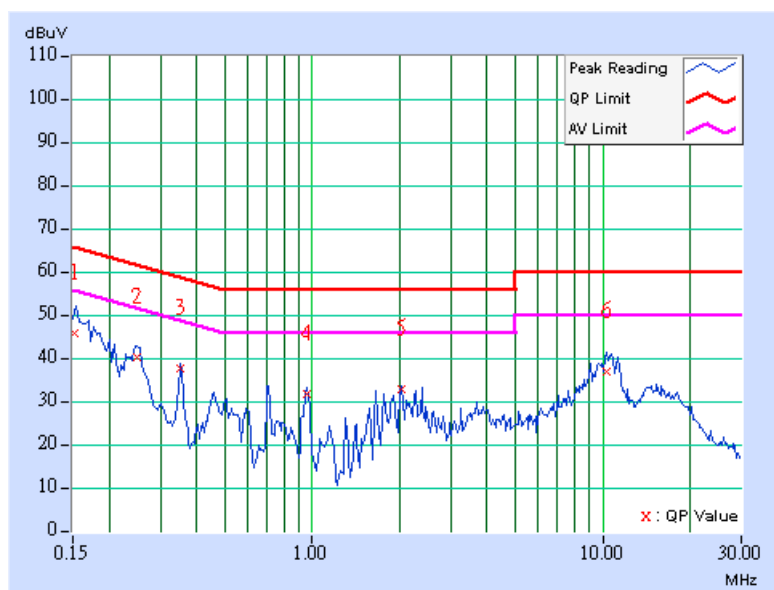

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	43.49	-	43.59	-	65.38	55.38	-21.79	-
2	0.252	0.10	40.50	-	40.60	-	61.71	51.71	-21.11	-
3	0.353	0.10	38.48	-	38.58	-	58.89	48.89	-20.31	-
4	0.709	0.11	34.60	-	34.71	-	56.00	46.00	-21.29	-
5	2.367	0.23	30.00	-	30.23	-	56.00	46.00	-25.77	-
6	10.285	0.34	36.28	-	36.62	-	60.00	50.00	-23.38	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

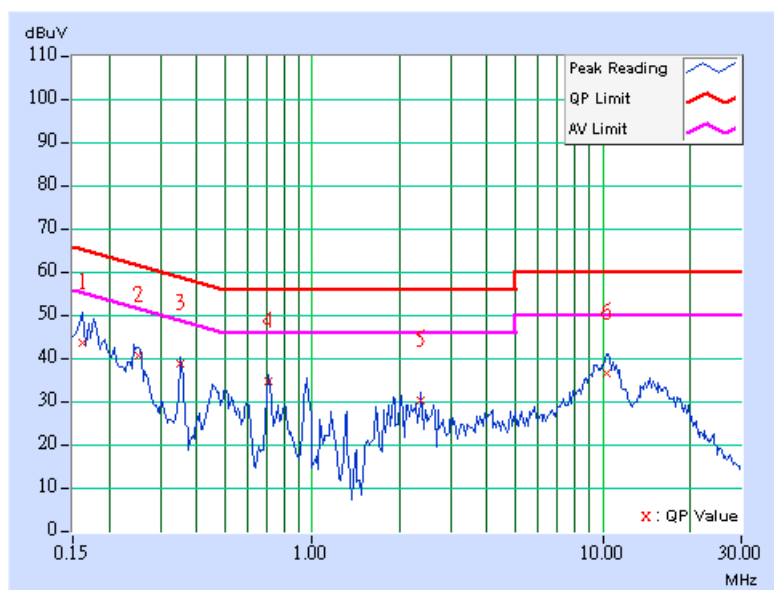

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	46.99	-	47.09	-	66.00	56.00	-18.91	-
2	0.248	0.10	39.74	-	39.84	-	61.84	51.84	-22.00	-
3	0.353	0.10	37.77	-	37.87	-	58.89	48.89	-21.02	-
4	0.955	0.20	31.37	-	31.57	-	56.00	46.00	-24.43	-
5	2.012	0.22	31.91	-	32.13	-	56.00	46.00	-23.87	-
6	10.871	0.44	35.86	-	36.30	-	60.00	50.00	-23.70	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

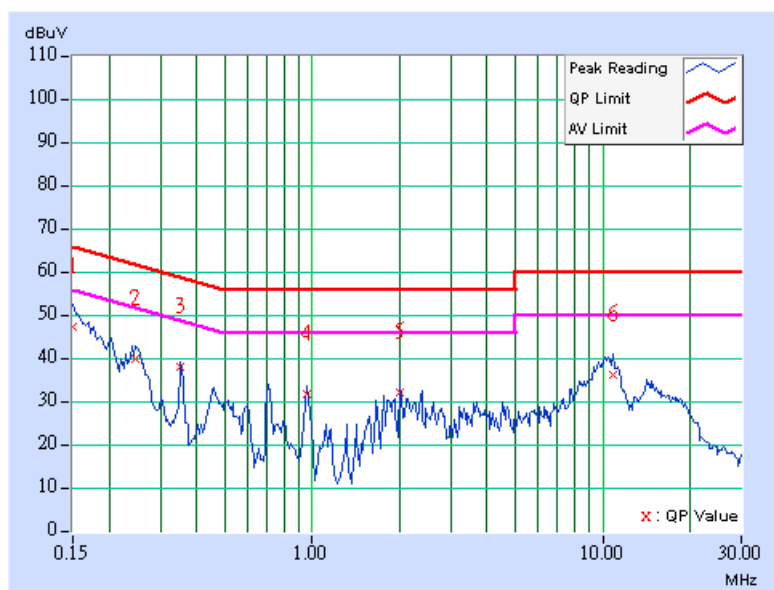


**DRAFT 802.11n (20MHz) OFDM MODULATION: DUAL TX**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.10	46.08	-	46.18	-	66.00
2	0.244	0.10	37.35	-	37.45	-	61.95	51.95	-24.50	-
3	0.353	0.10	38.85	-	38.95	-	58.89	48.89	-19.94	-
4	0.955	0.11	33.21	-	33.32	-	56.00	46.00	-22.68	-
5	2.364	0.23	30.30	-	30.53	-	56.00	46.00	-25.47	-
6	10.836	0.36	35.06	-	35.42	-	60.00	50.00	-24.58	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

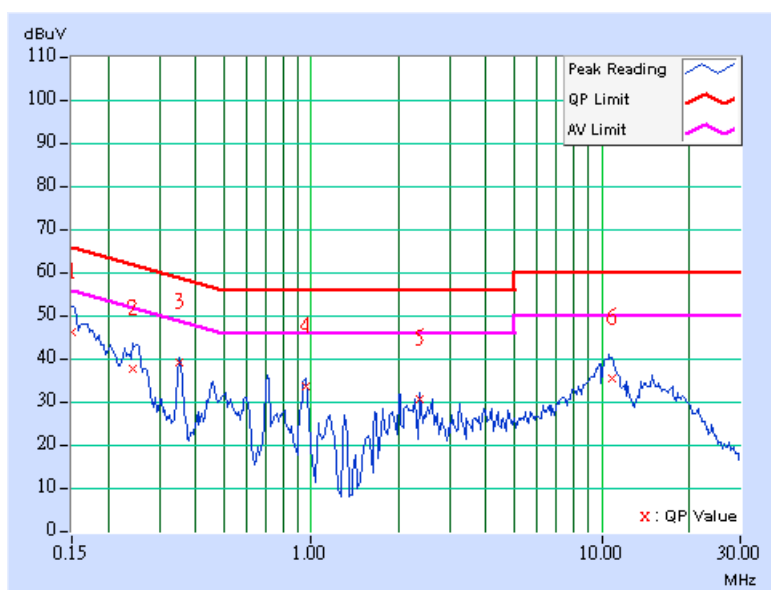

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.161	0.10	44.24	-	44.34	-	65.41	55.41	-21.07	-
2	0.228	0.10	46.16	-	46.26	-	62.52	52.52	-16.26	-
3	0.359	0.10	33.63	-	33.73	-	58.75	48.75	-25.02	-
4	0.709	0.16	32.89	-	33.05	-	56.00	46.00	-22.95	-
5	2.086	0.22	27.57	-	27.79	-	56.00	46.00	-28.21	-
6	10.747	0.44	34.78	-	35.22	-	60.00	50.00	-24.78	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

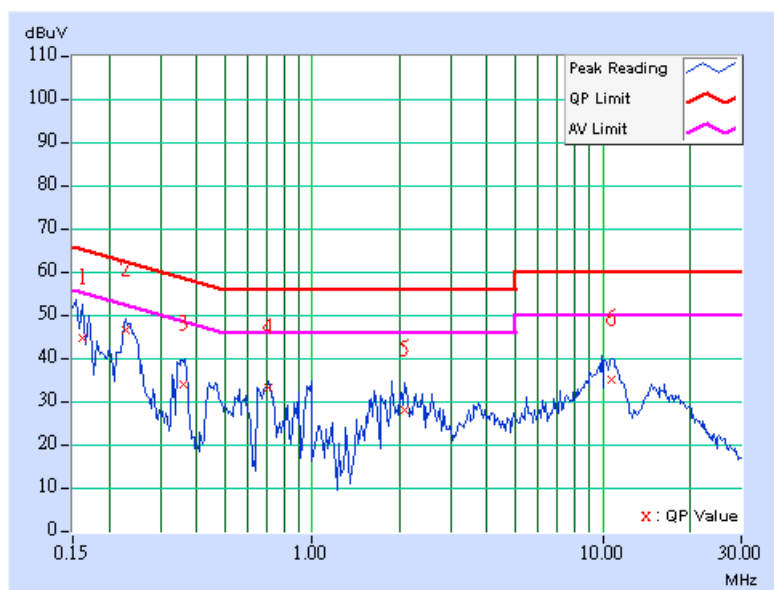

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	46.24	-	46.34	-	66.00	56.00	-19.66	-
2	0.298	0.10	39.56	-	39.66	-	60.29	50.29	-20.63	-
3	0.369	0.10	40.65	-	40.75	-	58.53	48.53	-17.78	-
4	1.031	0.11	30.63	-	30.74	-	56.00	46.00	-25.26	-
5	1.852	0.20	29.11	-	29.31	-	56.00	46.00	-26.69	-
6	10.477	0.34	31.55	-	31.89	-	60.00	50.00	-28.11	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

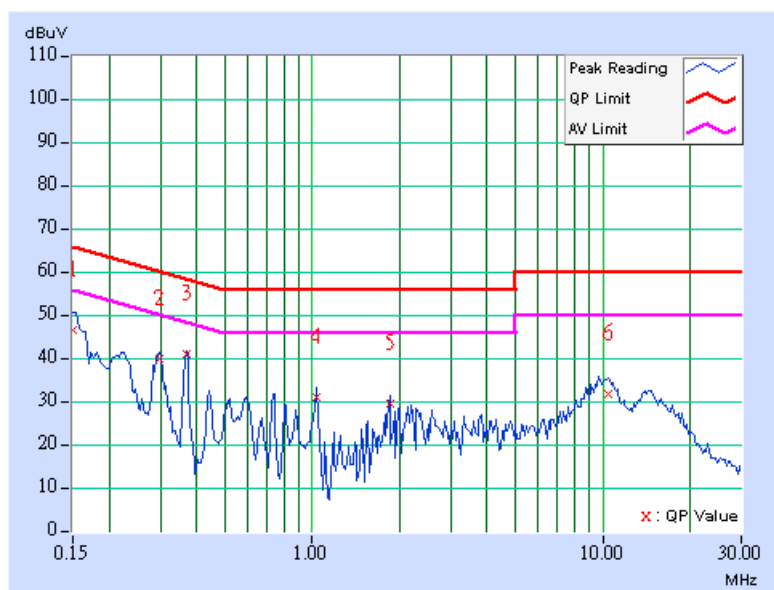

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	46.71	-	46.81	-	66.00	56.00	-19.19	-
2	0.252	0.10	39.55	-	39.65	-	61.70	51.70	-22.05	-
3	0.353	0.10	37.57	-	37.67	-	58.89	48.89	-21.22	-
4	0.739	0.16	27.81	-	27.97	-	56.00	46.00	-28.03	-
5	1.993	0.22	27.24	-	27.46	-	56.00	46.00	-28.54	-
6	10.223	0.43	31.31	-	31.74	-	60.00	50.00	-28.26	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

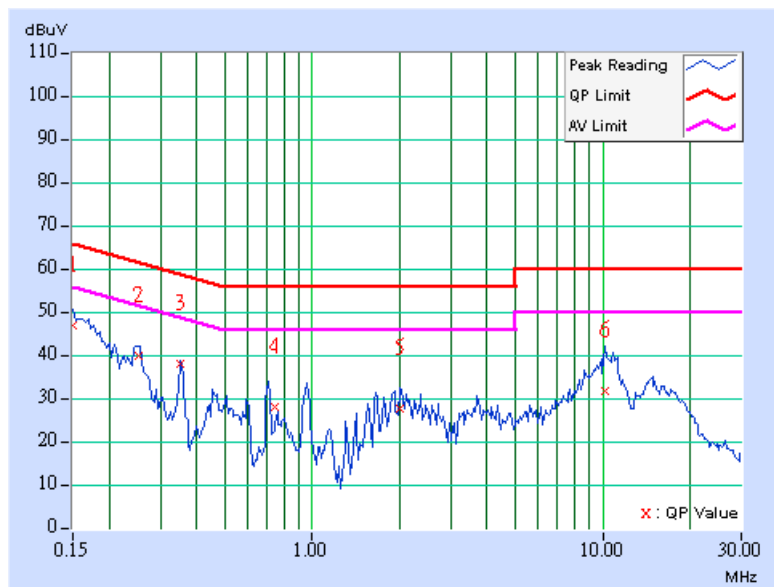




EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.161	0.10	44.03	-	44.13	-	65.41	55.41	-21.28	-
2	0.252	0.10	40.50	-	40.60	-	61.70	51.70	-21.10	-
3	0.353	0.10	38.56	-	38.66	-	58.89	48.89	-20.23	-
4	0.709	0.11	34.61	-	34.72	-	56.00	46.00	-21.28	-
5	2.368	0.23	30.01	-	30.24	-	56.00	46.00	-25.76	-
6	10.285	0.34	36.31	-	36.65	-	60.00	50.00	-23.35	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

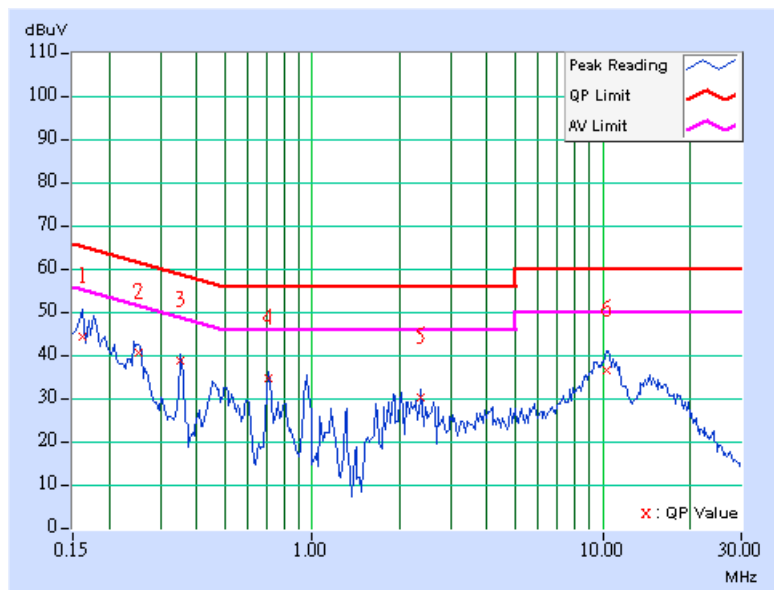

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	47.24	-	47.34	-	66.00	56.00	-18.66	-
2	0.252	0.10	39.67	-	39.77	-	61.69	51.69	-21.92	-
3	0.353	0.10	37.06	-	37.16	-	58.89	48.89	-21.73	-
4	0.955	0.20	31.08	-	31.28	-	56.00	46.00	-24.72	-
5	2.019	0.22	31.07	-	31.29	-	56.00	46.00	-24.71	-
6	10.566	0.44	36.74	-	37.18	-	60.00	50.00	-22.82	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

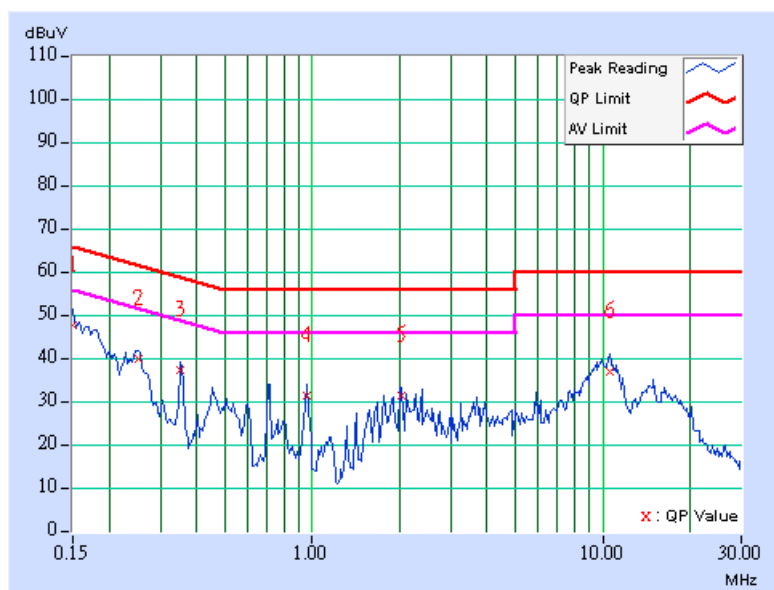


**DRAFT 802.11n (40MHz) OFDM MODULATION: DUAL TX**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	47.27	-	47.37	-	66.00	56.00	-18.63	-
2	0.247	0.10	40.45	-	40.55	-	61.86	51.86	-21.31	-
3	0.353	0.10	38.40	-	38.50	-	58.89	48.89	-20.39	-
4	0.963	0.11	33.85	-	33.96	-	56.00	46.00	-22.04	-
5	2.027	0.22	31.54	-	31.76	-	56.00	46.00	-24.24	-
6	10.902	0.36	36.47	-	36.83	-	60.00	50.00	-23.17	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

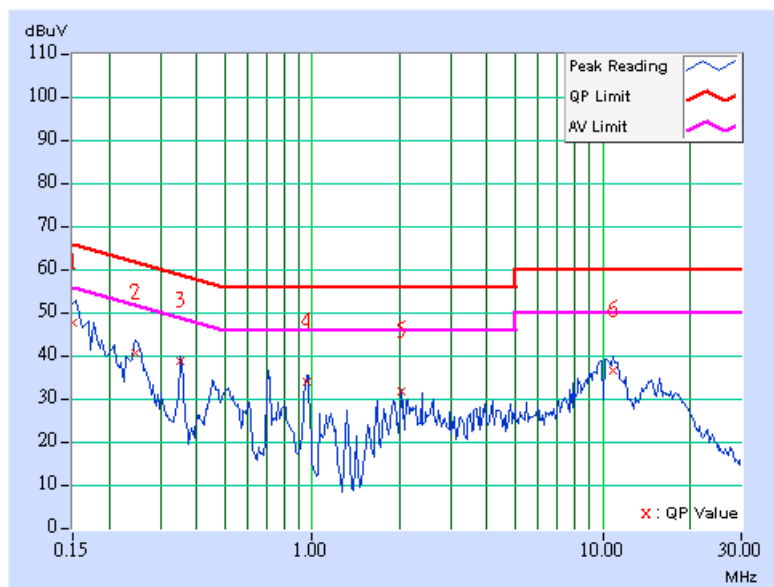

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.161	0.10	44.85	-	44.95	-	65.43	55.43	-20.48	-
2	<b>0.228</b>	<b>0.10</b>	<b>46.16</b>	-	<b>46.26</b>	-	<b>62.51</b>	<b>52.51</b>	<b>-16.25</b>	-
3	0.359	0.10	33.47	-	33.57	-	58.75	48.75	-25.18	-
4	0.709	0.16	33.21	-	33.37	-	56.00	46.00	-22.63	-
5	2.087	0.22	27.57	-	27.79	-	56.00	46.00	-28.21	-
6	10.748	0.44	35.36	-	35.80	-	60.00	50.00	-24.20	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

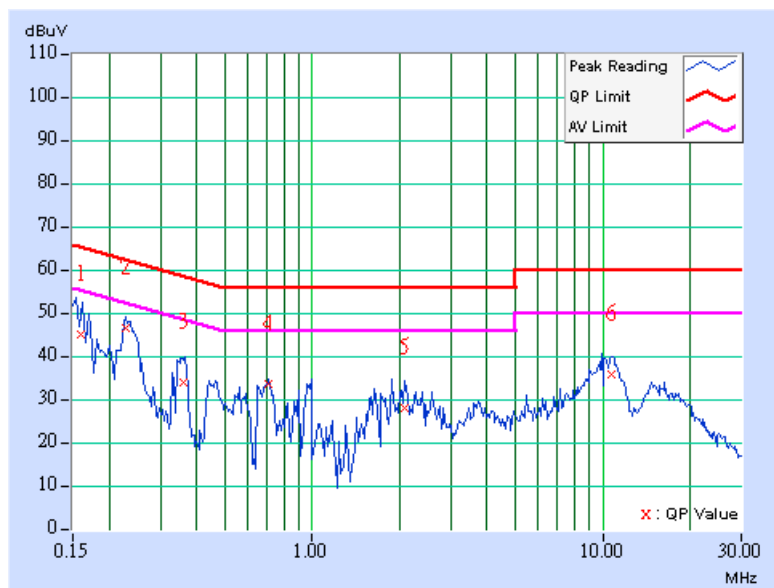

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	46.67	-	46.77	-	66.00	56.00	-19.23	-
2	0.252	0.10	40.70	-	40.80	-	61.71	51.71	-20.91	-
3	0.353	0.10	38.42	-	38.52	-	58.89	48.89	-20.37	-
4	0.951	0.11	33.06	-	33.17	-	56.00	46.00	-22.83	-
5	2.379	0.23	29.84	-	30.07	-	56.00	46.00	-25.93	-
6	10.570	0.35	36.13	-	36.48	-	60.00	50.00	-23.52	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

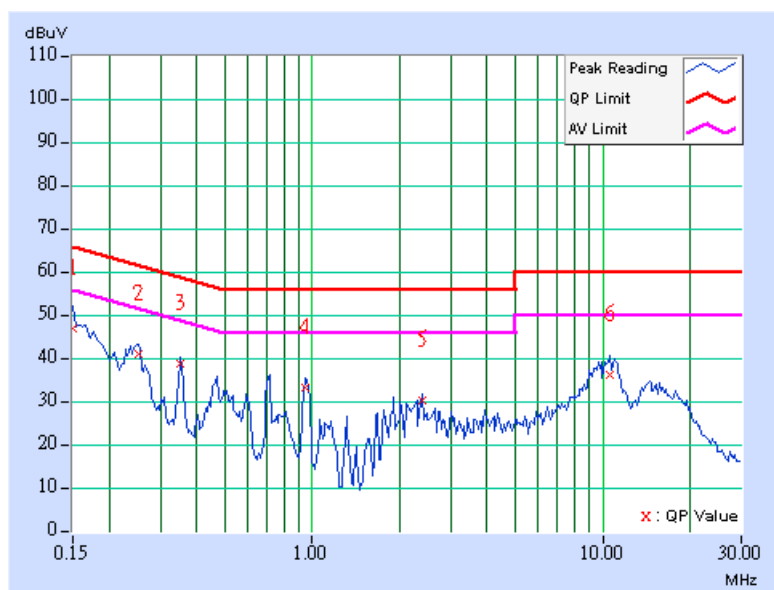

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	43.80	-	43.90	-	65.58	55.58	-21.68	-
2	0.252	0.10	39.97	-	40.07	-	61.71	51.71	-21.64	-
3	0.353	0.10	37.39	-	37.49	-	58.89	48.89	-21.40	-
4	0.955	0.20	31.15	-	31.35	-	56.00	46.00	-24.65	-
5	2.379	0.23	30.22	-	30.45	-	56.00	46.00	-25.55	-
6	10.211	0.43	35.92	-	36.35	-	60.00	50.00	-23.65	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

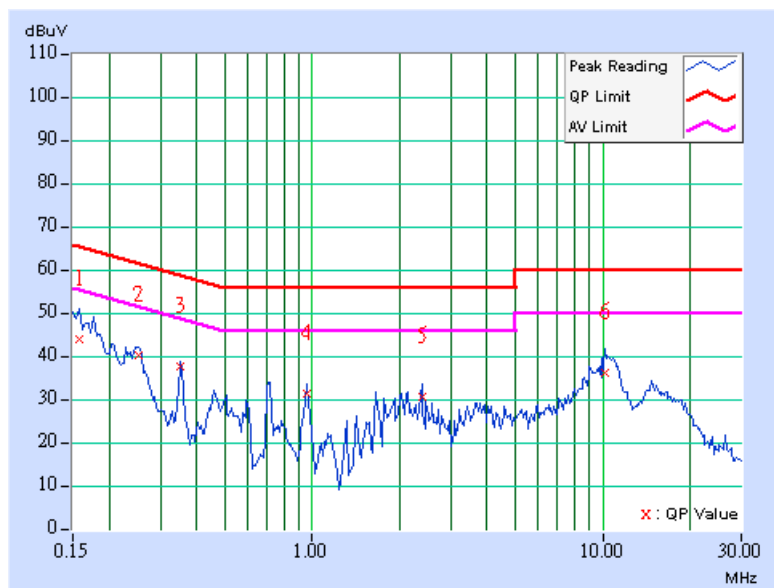

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	46.14	-	46.24	-	66.00	56.00	-19.76	-
2	0.244	0.10	37.35	-	37.45	-	61.96	51.96	-24.51	-
3	0.352	0.10	39.77	-	39.87	-	58.90	48.90	-19.03	-
4	0.955	0.11	33.07	-	33.18	-	56.00	46.00	-22.82	-
5	2.364	0.23	30.63	-	30.86	-	56.00	46.00	-25.14	-
6	10.835	0.36	35.06	-	35.42	-	60.00	50.00	-24.58	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

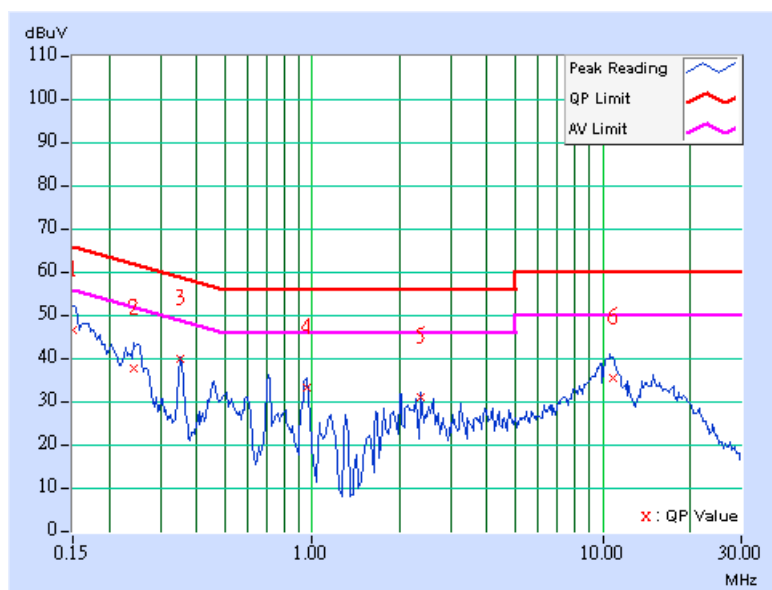

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1005 hPa	TESTED BY	Match Tsui

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	47.09	-	47.19	-	66.00	56.00	-18.81	-
2	0.247	0.10	39.52	-	39.62	-	61.86	51.86	-22.24	-
3	0.353	0.10	37.77	-	37.87	-	58.88	48.88	-21.01	-
4	0.955	0.20	31.47	-	31.67	-	56.00	46.00	-24.33	-
5	2.012	0.22	32.37	-	32.59	-	56.00	46.00	-23.41	-
6	10.871	0.44	35.80	-	36.24	-	60.00	50.00	-23.76	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

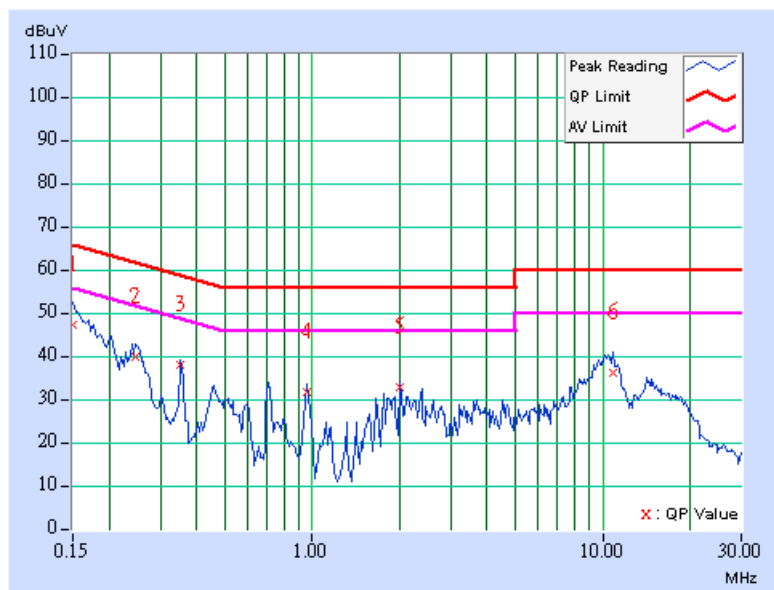





## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Aug. 04, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 07, 2007
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Jan. 04, 2008
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Jul. 26, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 16, 2008
Preamplifier Agilent	8449B	3008A01911	Sep. 13, 2007
Preamplifier Agilent	8447D	2944A10638	Dec. 20, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218188/218189	Nov. 14, 2007
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 16, 2007
Software	ADT_Radiated_V7.6	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA
Turn Table EMCO	2087-2.03	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 9.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The IC Site Registration No. is IC3789B-9.

#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

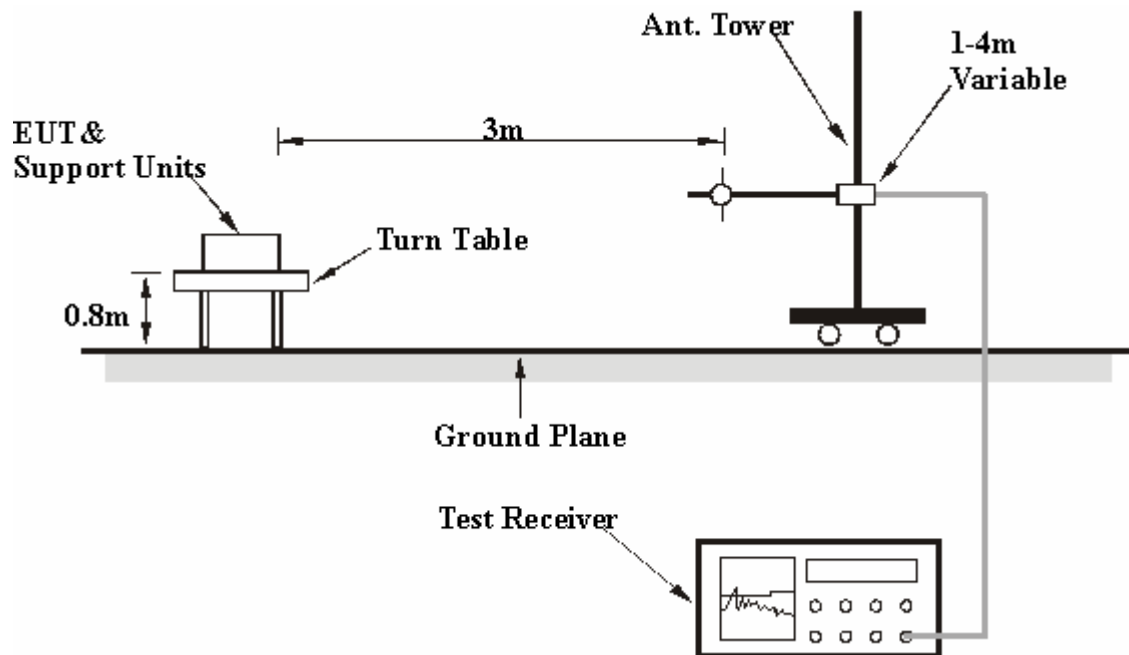

For the actual test configuration, please refer to the attached file (Test Setup Photo)

#### 4.2.6 EUT OPERATING CONDITIONS

##### Test Mode A

- Connected the EUT to notebook and placed on a testing table.
- The notebook ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- The necessary accessories enable the system in full functions.

##### Test Mode B

- Connected the EUT to notebook via USB cable and placed on a testing table.
- The notebook ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- The necessary accessories enable the system in full functions.



#### 4.2.7 TEST RESULTS

#### BELOW 1GHz TEST DATA FOR TEST MODE A (WITHOUT USB CABLE) 802.11g OFDM MODULATION: SINGLE TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK for 802.11g	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	113.50	27.47 QP	43.50	-16.03	1.50 H	337	16.69	10.78
2	166.00	29.10 QP	43.50	-14.40	1.50 H	97	16.07	13.03
3	199.05	28.94 QP	43.50	-14.56	2.00 H	205	18.54	10.40
4	467.36	29.96 QP	46.00	-16.04	2.00 H	271	12.21	17.75
5	599.58	31.62 QP	46.00	-14.38	1.50 H	112	10.53	21.09
6	665.68	33.97 QP	46.00	-12.03	1.50 H	148	12.28	21.69
7	700.68	33.78 QP	46.00	-12.22	2.00 H	295	11.77	22.01
8	739.57	30.13 QP	46.00	-15.87	1.00 H	208	7.18	22.94
9	760.95	31.97 QP	46.00	-14.03	1.00 H	58	8.52	23.45
10	799.84	31.99 QP	46.00	-14.01	1.00 H	64	7.63	24.36

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	68.79	28.77 QP	40.00	-11.23	1.00 V	151	17.16	11.61
2	115.45	33.21 QP	43.50	-10.29	1.00 V	349	22.19	11.02
3	486.81	31.01 QP	46.00	-14.99	1.00 V	223	12.67	18.35
4	500.42	30.28 QP	46.00	-15.72	1.00 V	232	11.52	18.76
5	700.68	31.66 QP	46.00	-14.34	2.50 V	199	9.65	22.01
6	739.57	30.77 QP	46.00	-15.23	2.50 V	175	7.83	22.94
7	776.51	30.02 QP	46.00	-15.98	1.50 V	343	6.21	23.81
8	947.60	32.27 QP	46.00	-13.73	1.00 V	322	6.56	25.71

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



**DRAFT 802.11n (20MHz) OFDM MODULATION: DUAL TX**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK for draft 802.11n (20MHz)	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	177.67	31.56 QP	43.50	-11.94	2.00 H	208	19.36	12.20
2	199.05	29.88 QP	43.50	-13.62	1.50 H	229	19.48	10.40
3	465.42	32.27 QP	46.00	-13.73	2.00 H	280	14.58	17.69
4	671.52	33.67 QP	46.00	-12.33	1.00 H	10	11.93	21.74
5	735.68	32.33 QP	46.00	-13.67	2.00 H	88	9.48	22.85
6	760.95	35.68 QP	46.00	-10.32	1.50 H	64	12.23	23.45
7	788.17	32.88 QP	46.00	-13.12	1.00 H	76	8.80	24.09
8	951.49	32.45 QP	46.00	-13.55	2.50 H	136	6.71	25.73

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	68.79	28.46 QP	40.00	-11.54	1.00 V	172	16.85	11.61
2	113.50	33.35 QP	43.50	-10.15	1.00 V	10	22.57	10.78
3	210.72	33.75 QP	43.50	-9.75	1.50 V	214	22.95	10.80
4	498.47	31.96 QP	46.00	-14.04	1.00 V	229	13.26	18.71
5	669.57	31.00 QP	46.00	-15.00	1.00 V	280	9.28	21.72
6	700.68	31.96 QP	46.00	-14.04	1.00 V	178	9.95	22.01
7	739.57	31.12 QP	46.00	-14.88	2.50 V	10	8.17	22.94
8	932.05	33.63 QP	46.00	-12.37	1.50 V	196	8.05	25.58
9	949.55	32.89 QP	46.00	-13.11	1.00 V	316	7.17	25.72

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



**DRAFT 802.11n (40MHz) OFDM MODULATION: DUAL TX**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK for draft 802.11n (40MHz)	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.34	29.16 QP	43.50	-14.34	1.00 H	235	17.68	11.49
2	167.94	29.77 QP	43.50	-13.73	1.50 H	94	16.88	12.89
3	199.05	29.58 QP	43.50	-13.92	1.50 H	214	19.18	10.40
4	467.36	31.27 QP	46.00	-14.73	2.00 H	289	13.52	17.75
5	531.53	31.16 QP	46.00	-14.84	1.50 H	217	11.66	19.49
6	599.58	31.33 QP	46.00	-14.67	1.00 H	121	10.24	21.09
7	665.68	32.19 QP	46.00	-13.81	1.00 H	232	10.50	21.69
8	702.62	33.54 QP	46.00	-12.46	2.50 H	205	11.48	22.06
9	739.57	34.00 QP	46.00	-12.00	1.00 H	82	11.05	22.94
10	759.01	31.32 QP	46.00	-14.68	1.50 H	82	7.91	23.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.40	24.70 QP	40.00	-15.30	1.50 V	10	11.72	12.99
2	68.79	28.46 QP	40.00	-11.54	1.00 V	187	16.85	11.61
3	113.50	33.83 QP	43.50	-9.67	1.00 V	343	23.05	10.78
4	531.53	30.17 QP	46.00	-15.83	1.00 V	280	10.68	19.49
5	665.68	31.11 QP	46.00	-14.89	1.00 V	151	9.42	21.69
6	700.68	30.78 QP	46.00	-15.22	1.00 V	154	8.78	22.01
7	739.57	31.06 QP	46.00	-14.94	1.50 V	334	8.12	22.94
8	759.01	30.56 QP	46.00	-15.44	1.50 V	334	7.16	23.40
9	788.17	30.93 QP	46.00	-15.07	1.50 V	343	6.84	24.09
10	955.38	31.56 QP	46.00	-14.44	1.50 V	187	5.81	25.75

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



**FOR TEST MODE B (WITH USB CABLE)**  
**802.11g OFDM MODULATION: SINGLE TX**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK for 802.11g	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	115.45	34.48 QP	43.50	-9.02	1.50 H	295	23.46	11.02
2	359.98	44.92 QP	46.00	-1.08	1.06 H	54	30.13	14.79
3	479.03	31.13 QP	46.00	-14.87	2.00 H	229	13.02	18.11
4	599.58	42.62 QP	46.00	-3.38	1.50 H	214	21.54	21.09
5	700.68	31.85 QP	46.00	-14.15	1.00 H	94	9.84	22.01
6	739.57	32.99 QP	46.00	-13.01	1.00 H	103	10.05	22.94
7	840.67	37.40 QP	46.00	-8.60	1.00 H	220	12.65	24.76

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	68.79	29.63 QP	40.00	-10.37	1.00 V	103	18.02	11.61
2	115.45	37.50 QP	43.50	-6.00	1.00 V	10	26.49	11.02
3	199.05	30.76 QP	43.50	-12.74	2.00 V	46	20.36	10.40
4	360.43	40.42 QP	46.00	-5.58	1.50 V	172	25.62	14.80
5	599.58	42.10 QP	46.00	-3.90	1.00 V	142	21.02	21.09
6	840.67	38.81 QP	46.00	-7.19	2.00 V	190	14.05	24.76
7	906.77	38.60 QP	46.00	-7.40	1.00 V	10	13.22	25.37

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.





**DRAFT 802.11n (20MHz) OFDM MODULATION: DUAL TX**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK for draft 802.11n (20MHz)	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	113.50	36.53 QP	43.50	-6.97	1.50 H	289	25.75	10.78
2	222.38	32.64 QP	46.00	-13.36	2.00 H	247	21.32	11.32
3	359.99	44.92 QP	46.00	-1.08	1.00 H	145	30.13	14.79
4	479.03	32.80 QP	46.00	-13.20	1.00 H	10	14.70	18.11
5	599.58	41.93 QP	46.00	-4.07	1.50 H	106	20.84	21.09
6	700.68	34.21 QP	46.00	-11.79	2.00 H	253	12.20	22.01
7	739.57	31.40 QP	46.00	-14.60	1.00 H	355	8.46	22.94
8	840.67	39.93 QP	46.00	-6.07	1.50 H	220	15.17	24.76
9	883.44	31.34 QP	46.00	-14.66	2.00 H	310	6.18	25.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	113.50	36.61 QP	43.50	-6.89	1.00 V	10	25.83	10.78
2	158.22	28.56 QP	43.50	-14.94	1.00 V	220	15.06	13.50
3	360.43	41.68 QP	46.00	-4.32	1.00 V	241	26.88	14.80
4	479.03	32.25 QP	46.00	-13.75	1.00 V	148	14.14	18.11
5	599.58	40.95 QP	46.00	-5.05	1.50 V	190	19.86	21.09
6	700.68	31.80 QP	46.00	-14.20	1.50 V	25	9.79	22.01
7	840.67	38.25 QP	46.00	-7.75	1.00 V	175	13.50	24.76
8	930.11	33.48 QP	46.00	-12.52	1.50 V	130	7.92	25.56

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



**DRAFT 802.11n (40MHz) OFDM MODULATION: DUAL TX**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK for draft 802.11n (40MHz)	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	113.50	35.38 QP	43.50	-8.12	1.50 H	280	24.60	10.78
2	218.50	33.11 QP	46.00	-12.89	1.00 H	232	21.96	11.14
<b>3</b>	<b>360.43</b>	<b>44.93 QP</b>	<b>46.00</b>	<b>-1.07</b>	<b>1.00 H</b>	<b>130</b>	<b>30.13</b>	<b>14.80</b>
4	599.58	43.65 QP	46.00	-2.35	1.50 H	160	22.57	21.09
5	700.68	32.20 QP	46.00	-13.80	2.00 H	238	10.19	22.01
6	840.67	37.07 QP	46.00	-8.93	1.50 H	205	12.32	24.76
7	893.16	32.55 QP	46.00	-13.45	1.00 H	58	7.30	25.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	115.45	35.28 QP	43.50	-8.22	1.00 V	10	24.27	11.02
2	164.06	30.76 QP	43.50	-12.74	1.00 V	220	17.59	13.17
3	199.05	30.70 QP	43.50	-12.80	1.00 V	193	20.30	10.40
4	360.43	40.82 QP	46.00	-5.18	1.50 V	169	26.02	14.80
5	599.58	40.40 QP	46.00	-5.60	1.00 V	130	19.32	21.09
6	665.68	32.32 QP	46.00	-13.68	1.50 V	265	10.64	21.69
7	840.67	37.39 QP	46.00	-8.61	2.00 V	181	12.64	24.76
8	902.89	34.55 QP	46.00	-11.45	2.00 V	193	9.21	25.34

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



**ABOVE 1GHz WORST-CASE DATA FOR TEST MODE B (WITH USB CABLE)**  
**802.11b DSSS MODULATION: SINGLE TX**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	52.03 PK	74.00	-21.97	1.22 H	115	24.28	27.75
2	1608.00	50.78 AV	54.00	-3.22	1.22 H	115	23.03	27.75
3	2390.00	62.89 PK	74.00	-11.11	1.31 H	135	31.67	31.22
4	2390.00	50.99 AV	54.00	-3.01	1.31 H	135	19.77	31.22
5	*2412.00	112.03 PK			1.30 H	135	80.82	31.21
6	*2412.00	107.60 AV			1.30 H	135	76.39	31.21
7	4824.00	47.29 PK	74.00	-26.71	1.31 H	251	10.81	36.48
8	4824.00	33.34 AV	54.00	-20.66	1.31 H	251	-3.14	36.48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	51.89 PK	74.00	-22.11	1.24 V	211	24.14	27.75
2	1608.00	50.56 AV	54.00	-3.44	1.24 V	211	22.81	27.75
3	2390.00	57.79 PK	74.00	-16.21	1.30 V	235	26.57	31.22
4	2390.00	47.34 AV	54.00	-6.66	1.30 V	235	16.12	31.22
5	*2412.00	104.72 PK			1.30 V	235	73.51	31.21
6	*2412.00	100.54 AV			1.30 V	235	69.33	31.21
7	4824.00	46.11 PK	74.00	-27.89	1.13 V	159	9.63	36.48
8	4824.00	32.59 AV	54.00	-21.41	1.13 V	159	-3.89	36.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247.
  6. “ \* “: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	49.20 PK	74.00	-24.80	1.27 H	148	21.46	27.74
2	1624.00	47.92 AV	54.00	-6.08	1.27 H	148	20.18	27.74
3	*2437.00	111.74 PK			1.25 H	134	80.52	31.22
4	*2437.00	107.51 AV			1.25 H	134	76.29	31.22
5	4874.00	45.62 PK	74.00	-28.38	1.00 H	243	9.04	36.58
6	4874.00	33.59 AV	54.00	-20.41	1.00 H	243	-2.99	36.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	48.74 PK	74.00	-25.26	1.11 V	163	21.00	27.74
2	1624.00	46.88 AV	54.00	-7.12	1.11 V	163	19.14	27.74
3	*2437.00	104.43 PK			1.19 V	210	73.21	31.22
4	*2437.00	100.58 AV			1.19 V	210	69.36	31.22
5	4874.00	44.92 PK	74.00	-29.08	1.07 V	166	8.34	36.58
6	4874.00	32.17 AV	54.00	-21.83	1.07 V	166	-4.41	36.58

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247.
  6. “ \* “: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	48.66 PK	74.00	-25.34	1.20 H	121	20.93	27.73
2	1641.00	46.61 AV	54.00	-7.39	1.20 H	121	18.88	27.73
3	*2462.00	111.38 PK			1.26 H	141	80.15	31.23
4	*2462.00	107.14 AV			1.26 H	141	75.91	31.23
5	2483.50	62.76 PK	74.00	-11.24	1.27 H	140	31.52	31.24
6	2483.50	51.92 AV	54.00	-2.08	1.27 H	140	20.68	31.24
7	4924.00	45.51 PK	74.00	-28.49	1.27 H	160	8.83	36.68
8	4924.00	33.74 AV	54.00	-20.26	1.27 H	160	-2.94	36.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	47.71 PK	74.00	-26.29	1.22 V	201	19.98	27.73
2	1641.00	45.72 AV	54.00	-8.28	1.22 V	201	17.99	27.73
3	*2462.00	104.25 PK			1.27 V	236	73.02	31.23
4	*2462.00	100.16 AV			1.27 V	236	68.93	31.23
5	2483.50	59.34 PK	74.00	-14.66	1.27 V	233	28.10	31.24
6	2483.50	48.48 AV	54.00	-5.52	1.27 V	233	17.24	31.24
7	4924.00	44.37 PK	74.00	-29.63	1.02 V	100	7.69	36.68
8	4924.00	32.89 AV	54.00	-21.11	1.02 V	100	-3.79	36.68

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247.
  6. “ \* “: Fundamental frequency.



**802.11g OFDM MODULATION: SINGLE TX**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.37 PK	74.00	-7.63	1.34 H	134	35.15	31.22
2	2390.00	48.77 AV	54.00	-5.23	1.34 H	134	17.55	31.22
3	*2412.00	109.13 PK			1.32 H	133	77.92	31.21
4	*2412.00	99.01 AV			1.32 H	133	67.80	31.21
5	4824.00	47.05 PK	74.00	-26.95	1.24 H	213	10.57	36.48
6	4824.00	33.69 AV	54.00	-20.31	1.24 H	213	-2.79	36.48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.16 PK	74.00	-16.84	1.41 V	233	25.94	31.22
2	2390.00	45.72 AV	54.00	-8.28	1.41 V	233	14.50	31.22
3	*2412.00	101.61 PK			1.41 V	233	70.40	31.21
4	*2412.00	91.60 AV			1.41 V	233	60.39	31.21
5	4824.00	46.52 PK	74.00	-27.48	1.05 V	167	10.04	36.48
6	4824.00	32.88 AV	54.00	-21.12	1.05 V	167	-3.60	36.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247.
  6. “ \* “: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.28 PK			1.30 H	138	78.06	31.22
2	*2437.00	99.14 AV			1.30 H	138	67.92	31.22
3	4874.00	47.24 PK	74.00	-26.76	1.16 H	158	10.66	36.58
4	4874.00	33.73 AV	54.00	-20.27	1.16 H	158	-2.85	36.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	101.80 PK			1.34 V	258	70.58	31.22
2	*2437.00	92.13 AV			1.34 V	258	60.91	31.22
3	4874.00	46.35 PK	74.00	-27.65	1.00 V	359	9.77	36.58
4	4874.00	32.66 AV	54.00	-21.34	1.00 V	359	-3.92	36.58

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247.
  6. “ \* “: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 70%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.25 PK			1.29 H	139	79.02	31.23
2	*2462.00	100.00 AV			1.29 H	139	68.77	31.23
3	2483.50	72.50 PK	74.00	-1.50	1.27 H	141	41.26	31.24
4	2483.50	52.81 AV	54.00	-1.19	1.27 H	141	21.57	31.24
5	4924.00	47.11 PK	74.00	-26.89	1.30 H	225	10.43	36.68
6	4924.00	33.75 AV	54.00	-20.25	1.30 H	225	-2.93	36.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.80 PK			1.39 V	220	71.57	31.23
2	*2462.00	92.94 AV			1.39 V	220	61.71	31.23
3	2483.50	57.79 PK	74.00	-16.21	1.40 V	219	26.55	31.24
4	2483.50	46.88 AV	54.00	-7.12	1.40 V	219	15.64	31.24
5	4924.00	46.79 PK	74.00	-27.21	1.18 V	310	10.11	36.68
6	4924.00	32.58 AV	54.00	-21.42	1.18 V	310	-4.10	36.68

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247.
  6. “ \* “: Fundamental frequency.





**DRAFT 802.11n (20MHz) OFDM MODULATION: DUAL TX:**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.00 PK	74.00	-3.00	1.34 H	142	39.78	31.22
2	2390.00	51.92 AV	54.00	-2.08	1.34 H	142	20.70	31.22
3	*2412.00	110.26 PK			1.34 H	142	79.05	31.21
4	*2412.00	98.91 AV			1.34 H	142	67.70	31.21
5	4824.00	46.88 PK	74.00	-27.12	1.23 H	41	10.40	36.48
6	4824.00	33.52 AV	54.00	-20.48	1.23 H	41	-2.96	36.48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.94 PK	74.00	-12.06	1.04 V	301	30.72	31.22
2	2390.00	46.61 AV	54.00	-7.39	1.04 V	301	15.39	31.22
3	*2412.00	103.14 PK			1.02 V	298	71.93	31.21
4	*2412.00	93.29 AV			1.02 V	298	62.08	31.21
5	4824.00	45.81 PK	74.00	-28.19	1.02 V	154	9.33	36.48
6	4824.00	32.75 AV	54.00	-21.25	1.02 V	154	-3.73	36.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247.
  6. “ \* “: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.33 PK			1.33 H	144	79.11	31.22
2	*2437.00	98.90 AV			1.33 H	144	67.68	31.22
3	4874.00	46.76 PK	74.00	-27.24	1.08 H	311	10.18	36.58
4	4874.00	33.59 AV	54.00	-20.41	1.08 H	311	-2.99	36.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.30 PK			1.07 V	342	72.08	31.22
2	*2437.00	93.52 AV			1.07 V	342	62.30	31.22
3	4874.00	46.20 PK	74.00	-27.80	1.00 V	105	9.62	36.58
4	4874.00	32.94 AV	54.00	-21.06	1.00 V	105	-3.64	36.58

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247.
  6. “ \* “: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.41 PK			1.28 H	136	79.18	31.23
2	*2462.00	98.88 AV			1.28 H	136	67.65	31.23
3	2483.50	69.80 PK	74.00	-4.20	1.28 H	139	38.56	31.24
4	2483.50	52.15 AV	54.00	-1.85	1.28 H	139	20.91	31.24
5	4924.00	46.92 PK	74.00	-27.08	1.10 H	258	10.24	36.68
6	4924.00	33.68 AV	54.00	-20.32	1.10 H	258	-3.00	36.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.50 PK			1.06 V	299	72.27	31.23
2	*2462.00	93.71 AV			1.06 V	299	62.48	31.23
3	2483.50	61.92 PK	74.00	-12.08	1.05 V	307	30.68	31.24
4	2483.50	46.83 AV	54.00	-7.17	1.05 V	307	15.59	31.24
5	4924.00	46.50 PK	74.00	-27.50	1.00 V	97	9.82	36.68
6	4924.00	32.61 AV	54.00	-21.39	1.00 V	97	-4.07	36.68

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247.
  6. “ \* “: Fundamental frequency.



**DRAFT 802.11n (40MHz) OFDM MODULATION: DUAL TX:**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 73%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.57 PK	74.00	-6.43	1.38 H	176	36.35	31.22
2	2390.00	52.27 AV	54.00	-1.73	1.38 H	176	21.05	31.22
3	*2422.00	105.67 PK			1.30 H	259	74.45	31.22
4	*2422.00	95.55 AV			1.30 H	259	64.33	31.22
5	4844.00	47.42 PK	74.00	-26.58	1.01 H	35	10.90	36.52
6	4844.00	34.57 AV	54.00	-19.43	1.01 H	35	-1.95	36.52

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.34 PK	74.00	-9.66	1.04 V	223	33.12	31.22
2	2390.00	49.51 AV	54.00	-4.49	1.04 V	223	18.29	31.22
3	*2422.00	100.82 PK			1.02 V	222	69.60	31.22
4	*2422.00	90.46 AV			1.02 V	222	59.24	31.22
5	4844.00	46.15 PK	74.00	-27.85	1.12 V	13	9.63	36.52
6	4844.00	33.49 AV	54.00	-20.51	1.12 V	13	-3.03	36.52

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247.
  6. “ \* “: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.90 PK	74.00	-18.10	1.00 H	173	24.68	31.22
2	2390.00	45.49 AV	54.00	-8.51	1.00 H	173	14.27	31.22
3	*2437.00	106.51 PK			1.00 H	173	75.29	31.22
4	*2437.00	96.28 AV			1.00 H	173	65.06	31.22
5	2483.50	67.00 PK	74.00	-7.00	1.00 H	175	35.76	31.24
6	2483.50	51.78 AV	54.00	-2.22	1.00 H	175	20.54	31.24
7	4874.00	48.74 PK	74.00	-25.26	1.05 H	348	12.16	36.58
8	4874.00	35.43 AV	54.00	-18.57	1.05 H	348	-1.15	36.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.02 PK	74.00	-18.98	1.02 V	228	23.80	31.22
2	2390.00	44.78 AV	54.00	-9.22	1.02 V	228	13.56	31.22
3	*2437.00	101.35 PK			1.03 V	227	70.13	31.22
4	*2437.00	91.22 AV			1.03 V	227	60.00	31.22
5	2483.50	65.52 PK	74.00	-8.48	1.03 V	227	34.28	31.24
6	2483.50	50.24 AV	54.00	-3.76	1.03 V	227	19.00	31.24
7	4874.00	47.90 PK	74.00	-26.10	1.00 V	94	11.32	36.58
8	4874.00	34.61 AV	54.00	-19.39	1.00 V	94	-1.97	36.58

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247.
  6. “ \* ”: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH, 1005hPa	TESTED BY	Lori Chiu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	105.08 PK			1.29 H	144	73.85	31.23
2	*2452.00	95.06 AV			1.29 H	144	63.83	31.23
3	2483.50	66.44 PK	74.00	-7.56	1.27 H	147	35.20	31.24
4	2483.50	52.76 AV	54.00	-1.24	1.27 H	147	21.52	31.24
5	4904.00	47.20 PK	74.00	-26.80	1.27 H	111	10.56	36.64
6	4904.00	33.61 AV	54.00	-20.39	1.27 H	111	-3.03	36.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	100.21 PK			1.00 V	222	68.98	31.23
2	*2452.00	90.05 AV			1.00 V	222	58.82	31.23
3	2483.50	66.09 PK	74.00	-7.91	1.00 V	225	34.85	31.24
4	2483.50	51.72 AV	54.00	-2.28	1.00 V	225	20.48	31.24
5	4904.00	47.00 PK	74.00	-27.00	1.00 V	220	10.36	36.64
6	4904.00	33.24 AV	54.00	-20.76	1.00 V	220	-3.40	36.64

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247.
  6. “ \* “: Fundamental frequency.



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP 40	100040	Apr. 11, 2008

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP

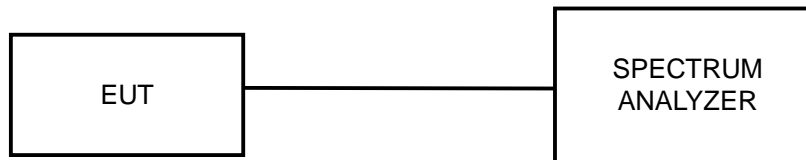

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




### 4.3.7 TEST RESULTS

#### 802.11b DSSS MODULATION: SINGLE TX

<b>MODULATION TYPE</b>	DBPSK	<b>TRANSFER RATE</b>	1.0Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 63%RH, 1005hPa
<b>TESTED BY</b>	Morgan Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	12.32	0.5	PASS
6	2437	12.28	0.5	PASS
11	2462	12.28	0.5	PASS

#### CH 1

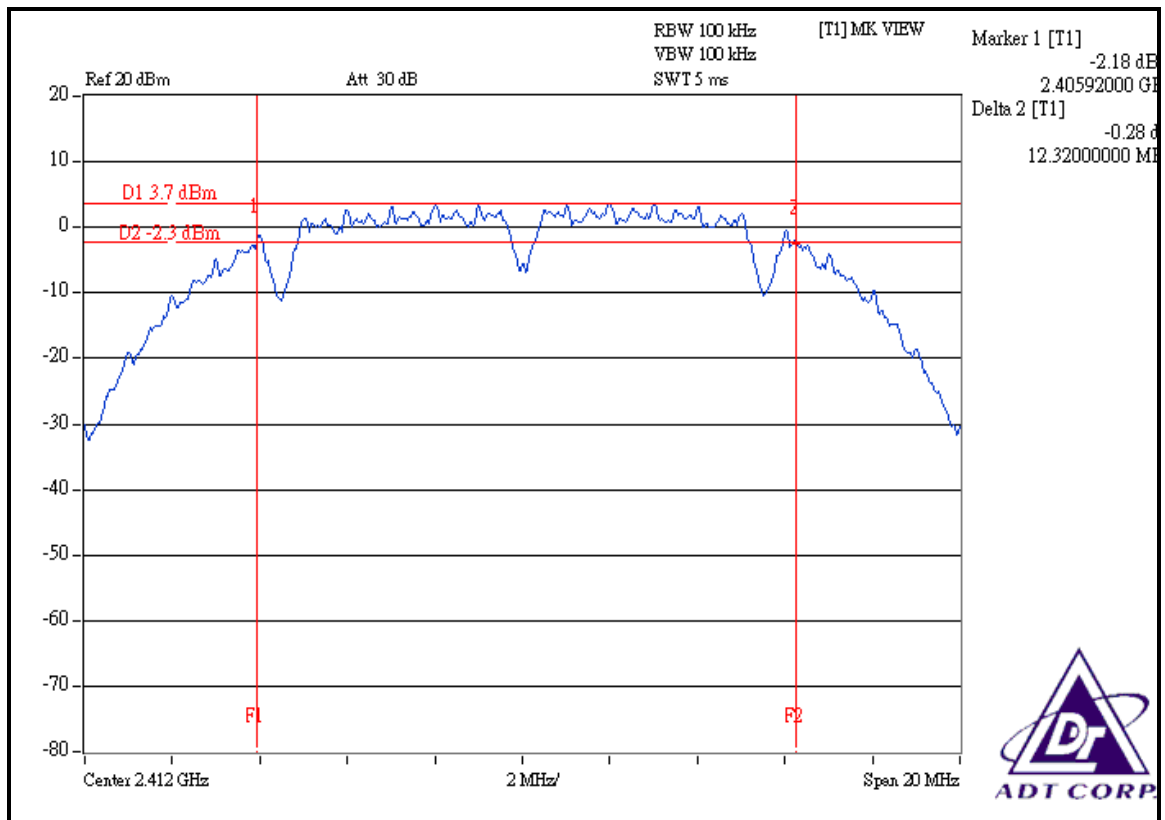




### CH 6

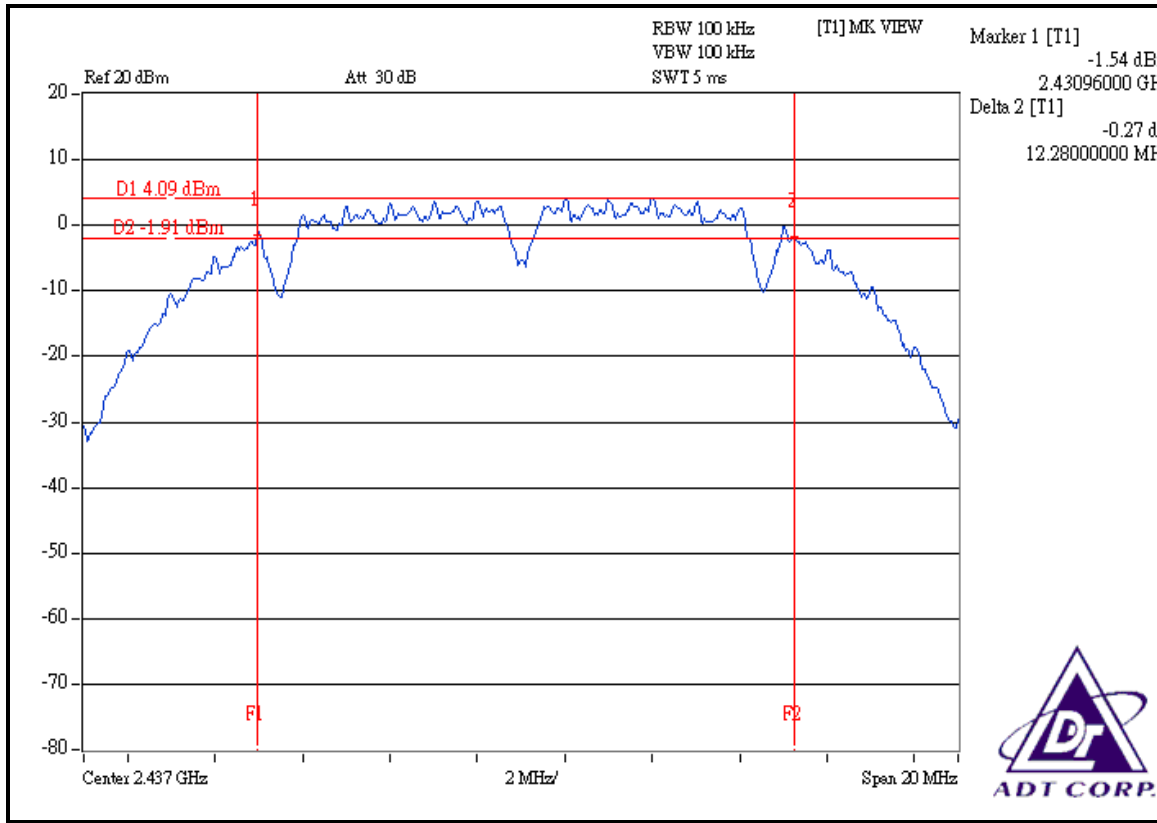

### CH 11

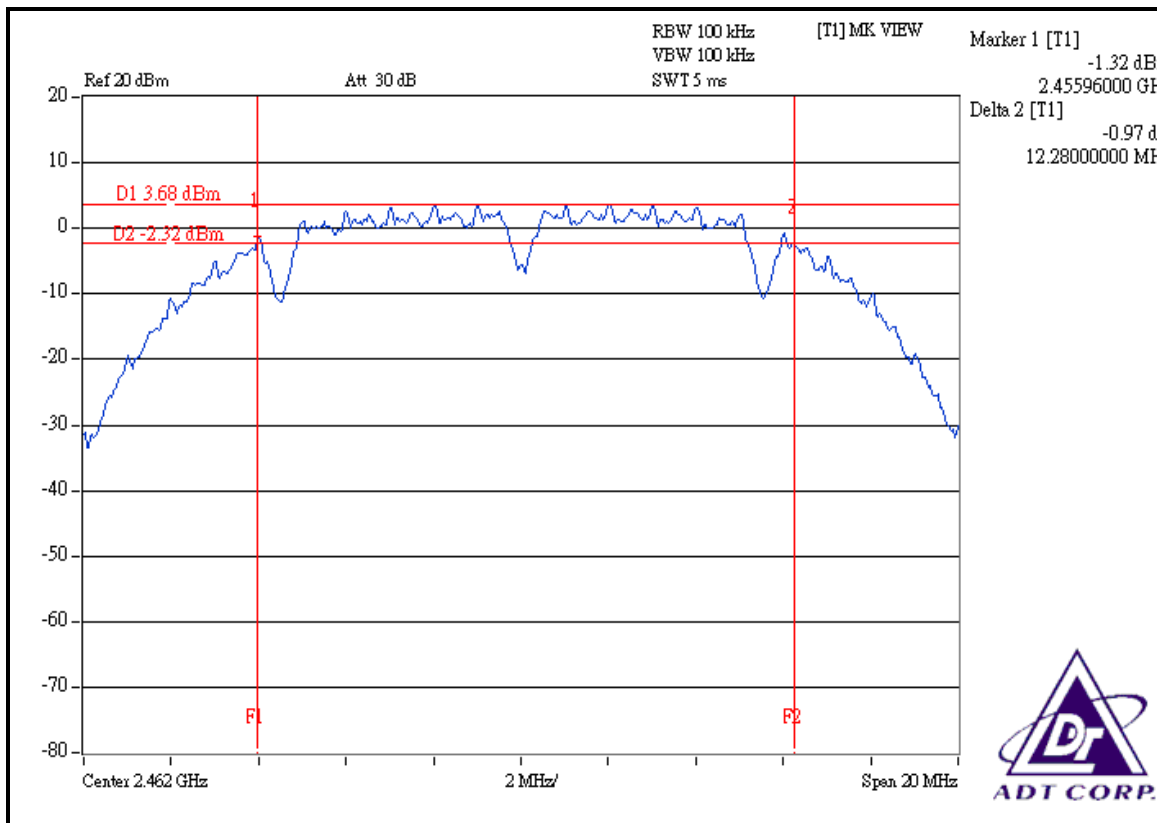




### 802.11g OFDM MODULATION: SINGLE TX


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6.0Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 63%RH, 1005hPa
<b>TESTED BY</b>	Morgan Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.56	0.5	PASS
6	2437	16.56	0.5	PASS
11	2462	16.56	0.5	PASS


### CH 1

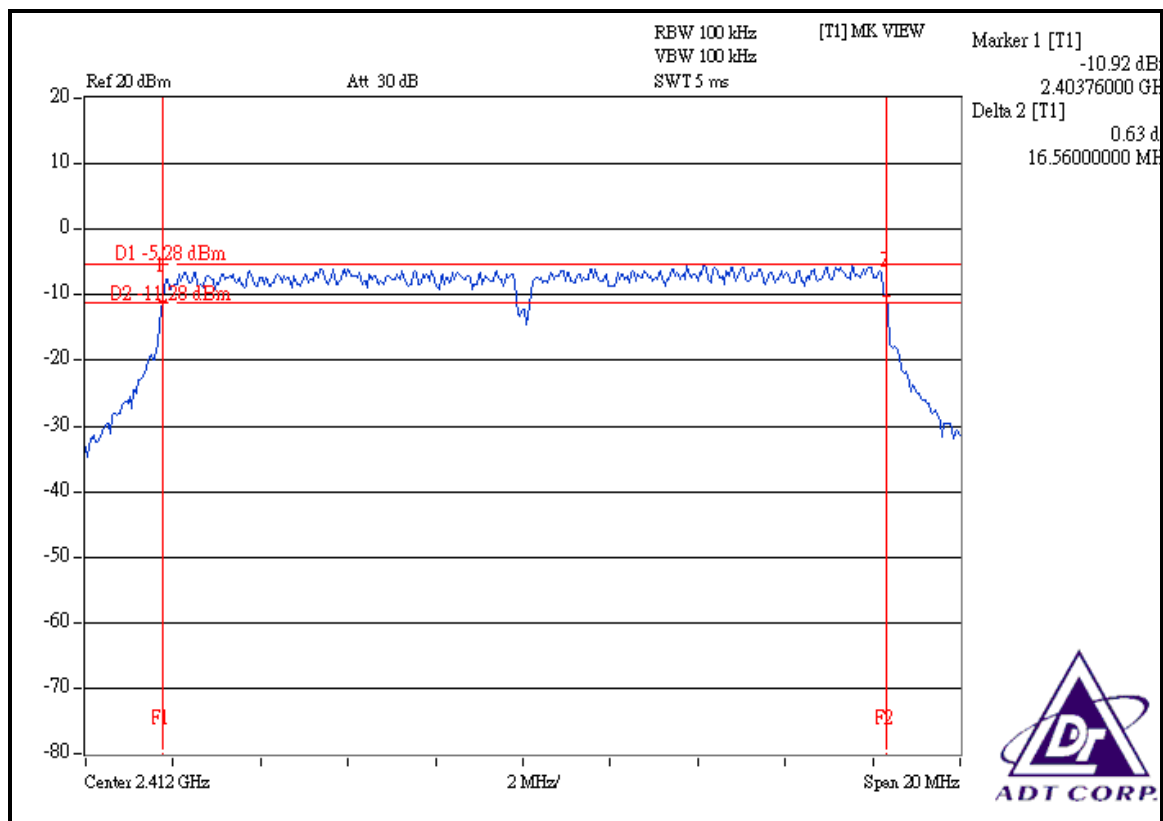

### CH 6

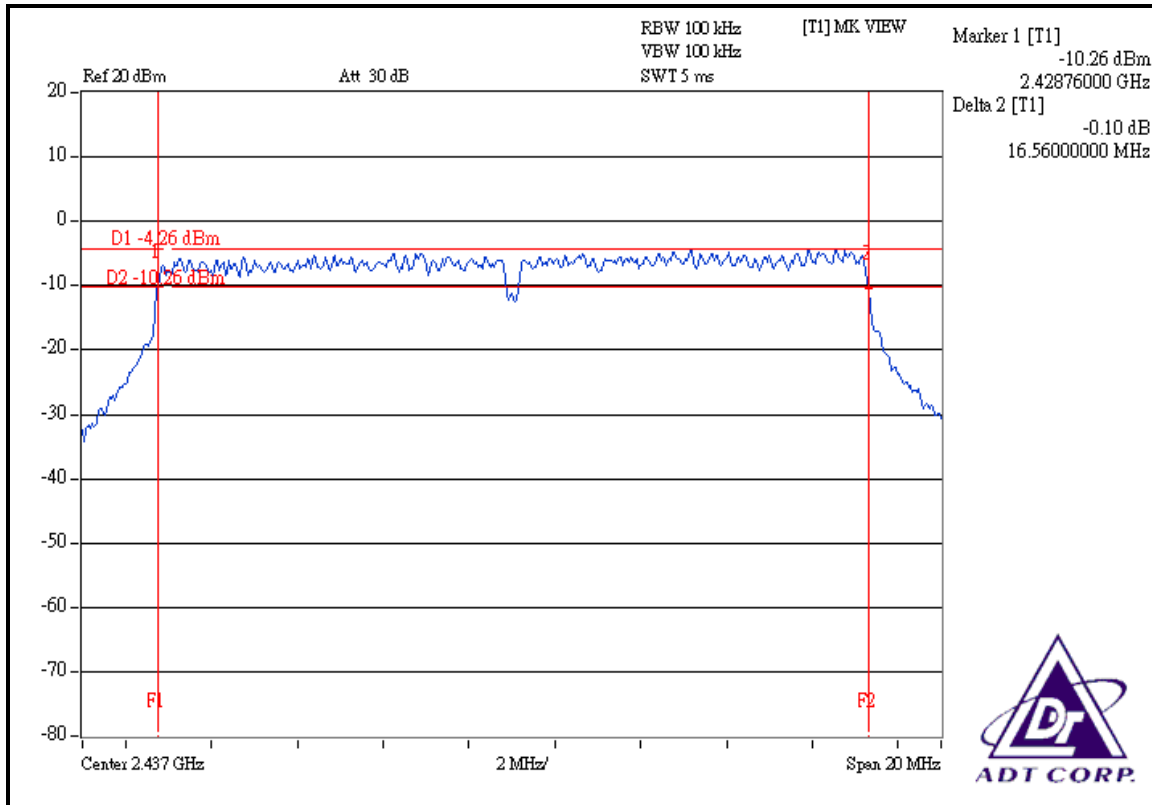

### CH 11

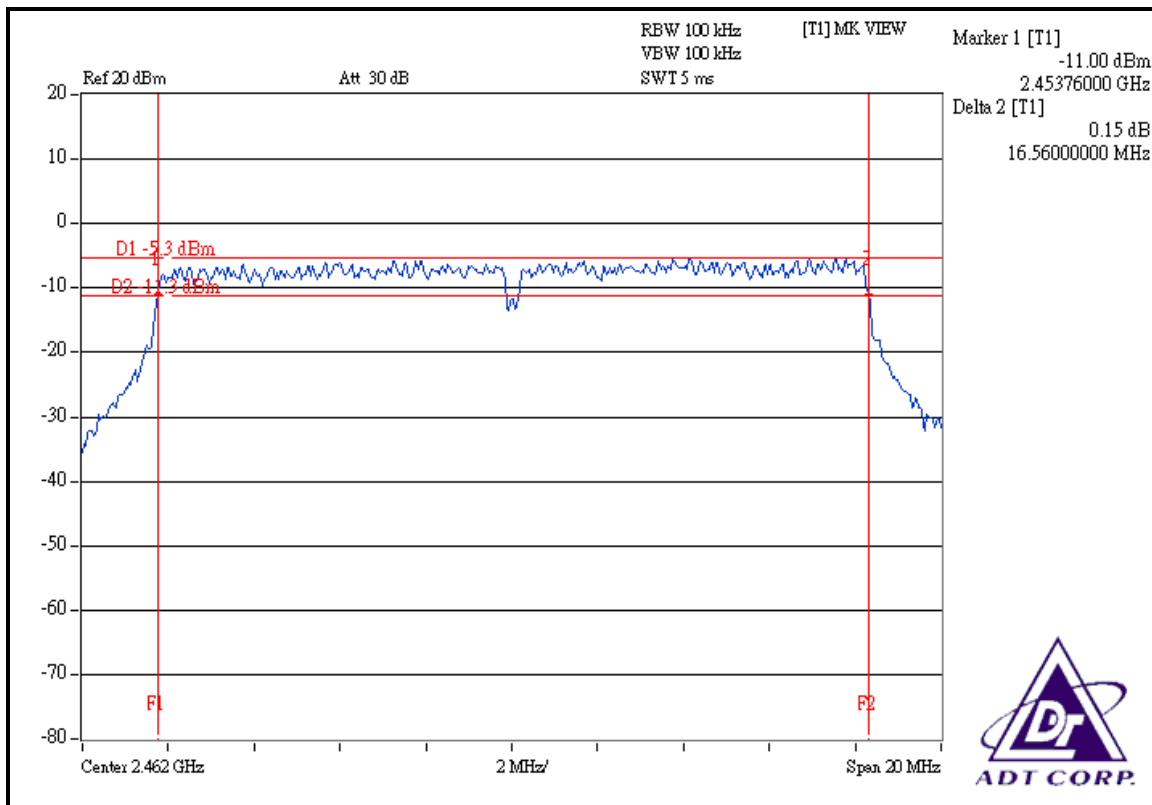




**DRAFT 802.11n (20MHz) OFDM MODULATION: DUAL TX:**


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	7.2Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 63%RH, 1005hPa
<b>TESTED BY</b>	Morgan Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.72	17.76	0.5	PASS
6	2437	17.68	17.68	0.5	PASS
11	2462	17.72	17.76	0.5	PASS


**FOR CHAIN 0: CH 1**

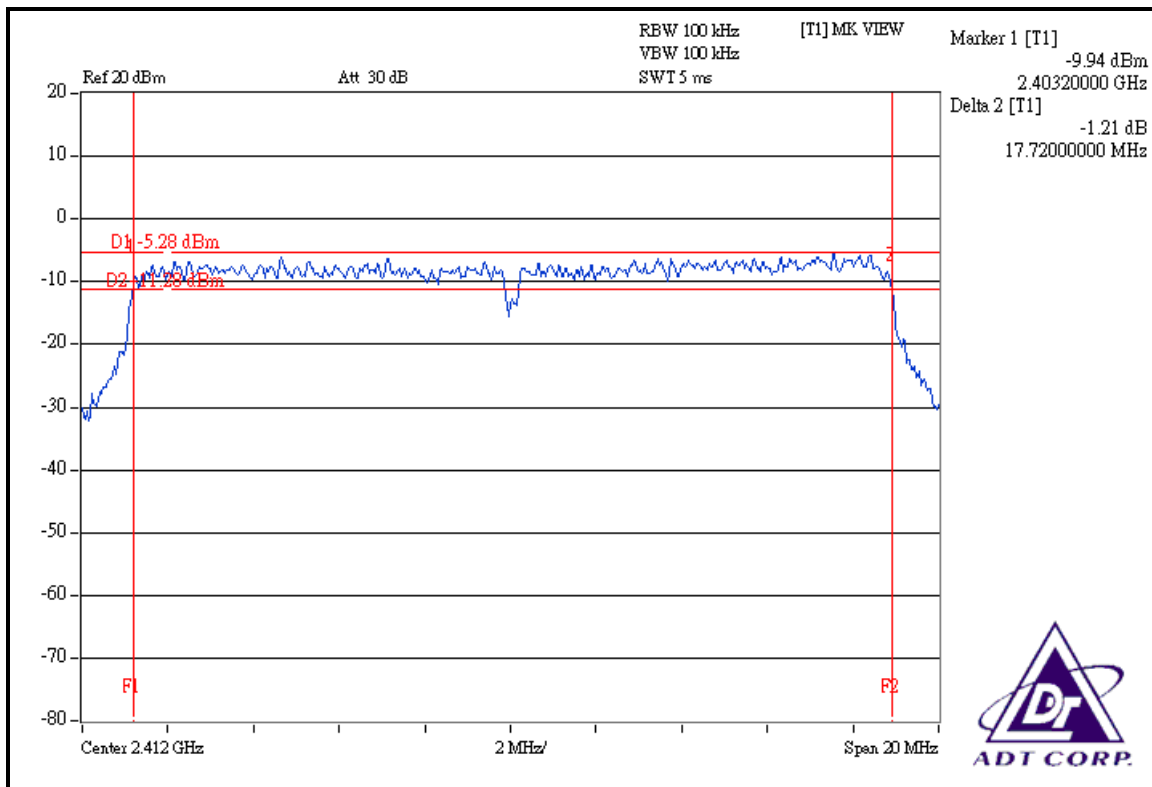


### CH 6

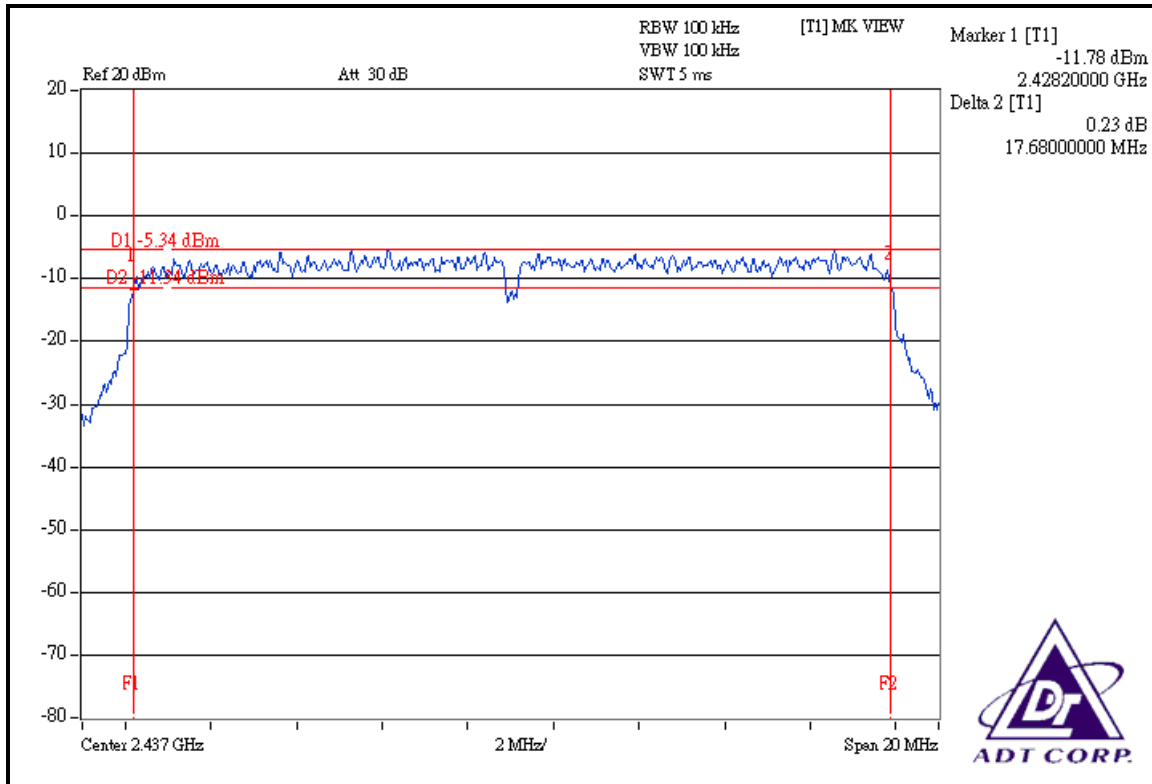


### CH 11

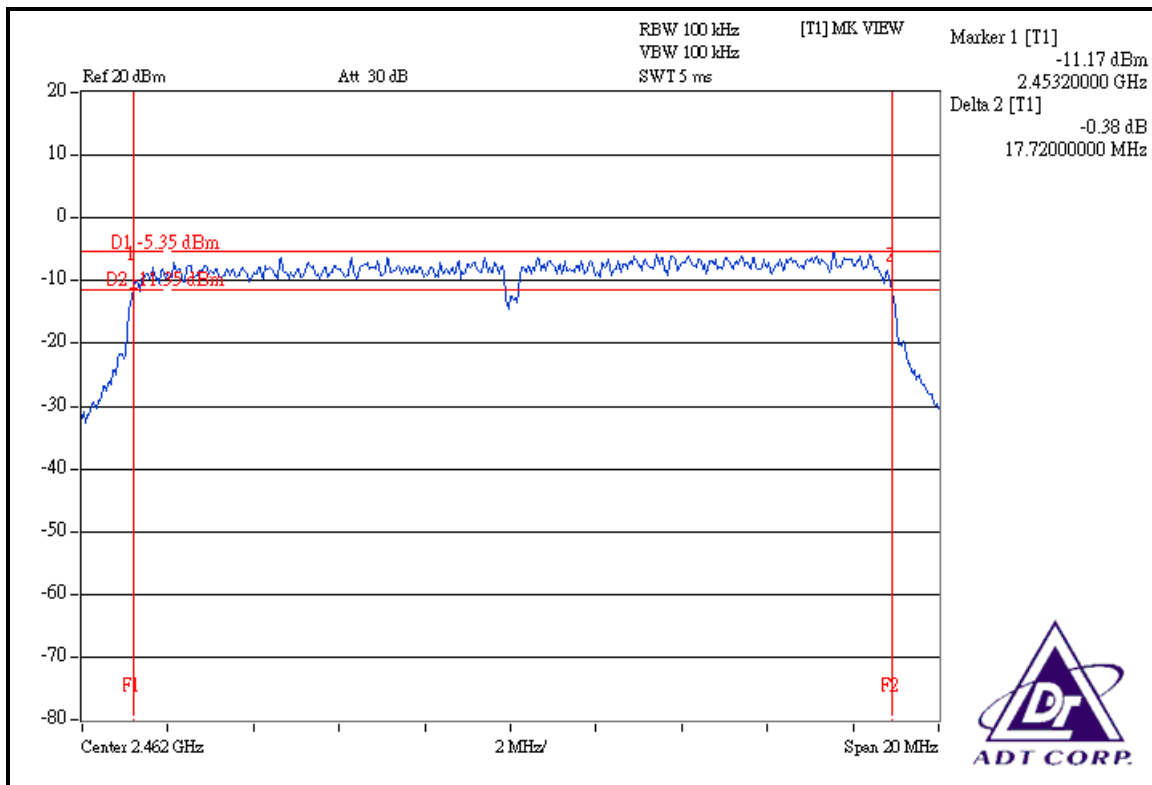


### FOR CHAIN 1: CH 1

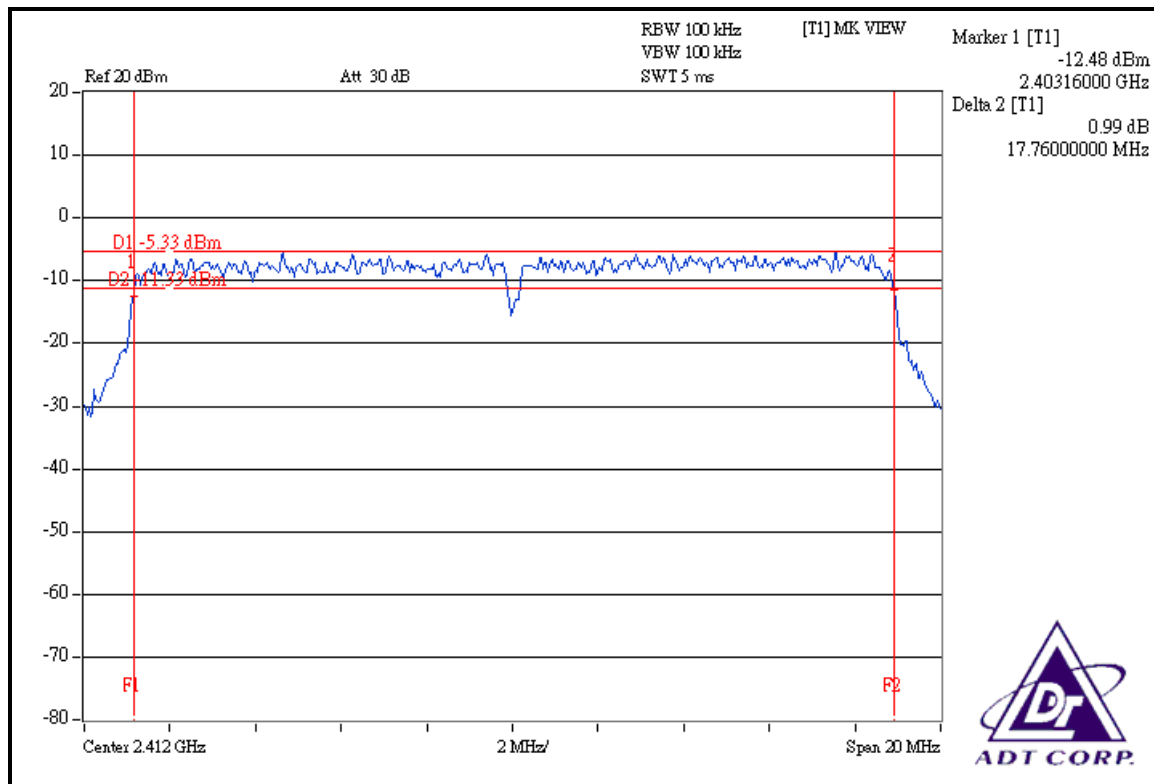

### CH 6

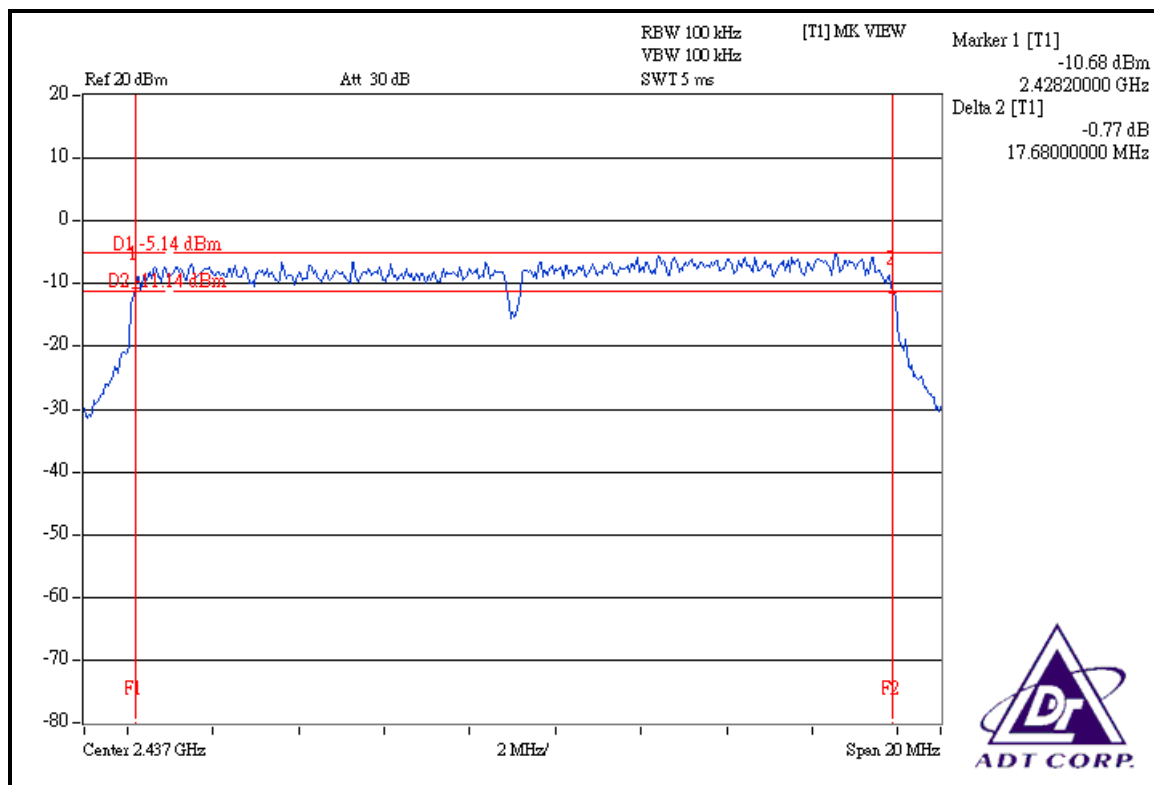

CH 11

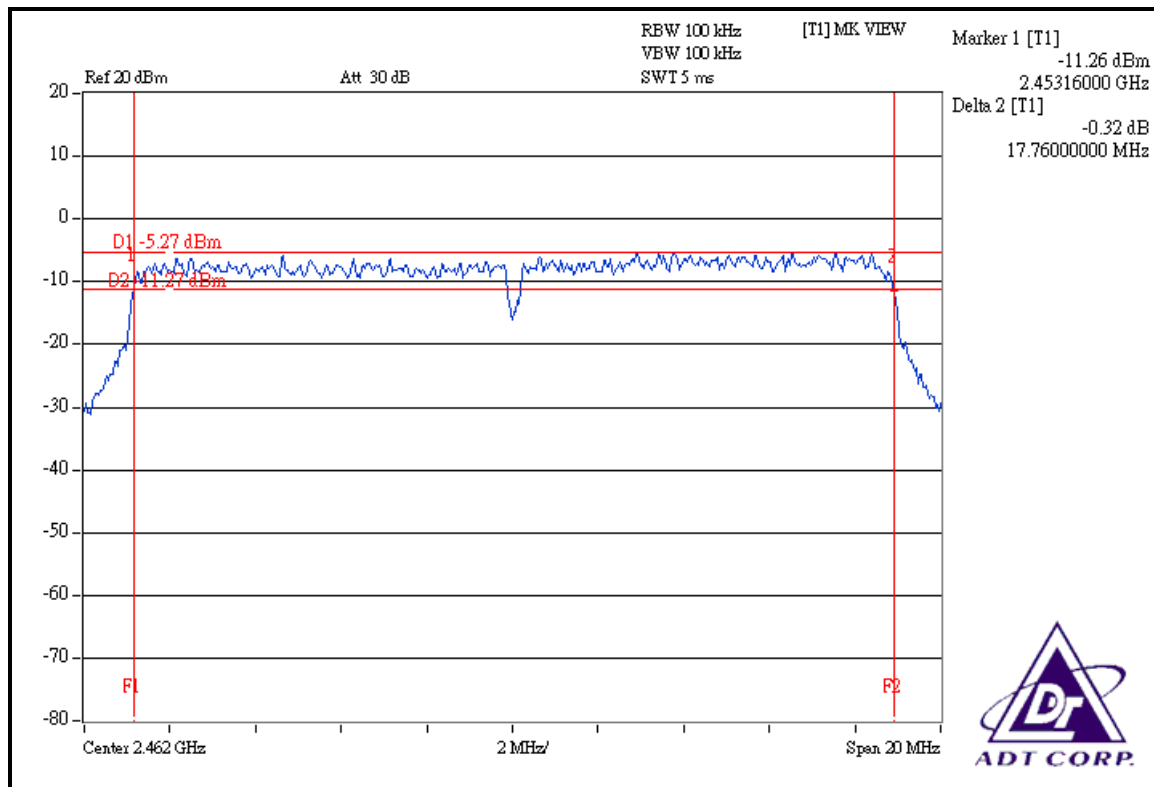






**DRAFT 802.11n (40MHz) OFDM MODULATION: DUAL TX:**


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	15.0Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 63%RH, 1005hPa
<b>TESTED BY</b>	Morgan Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2422	36.56	36.48	0.5	PASS
4	2437	36.16	36.56	0.5	PASS
7	2452	36.40	36.48	0.5	PASS


**FOR CHAIN 0: CH 1**

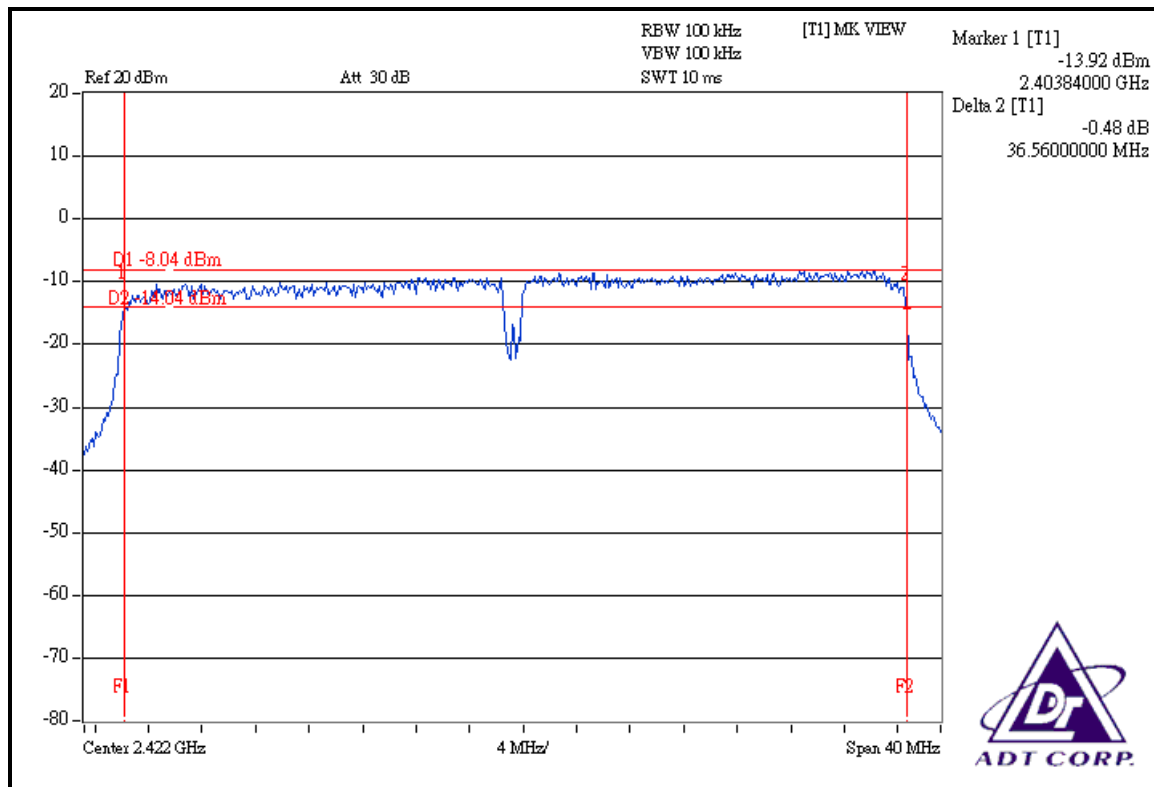

### CH 4

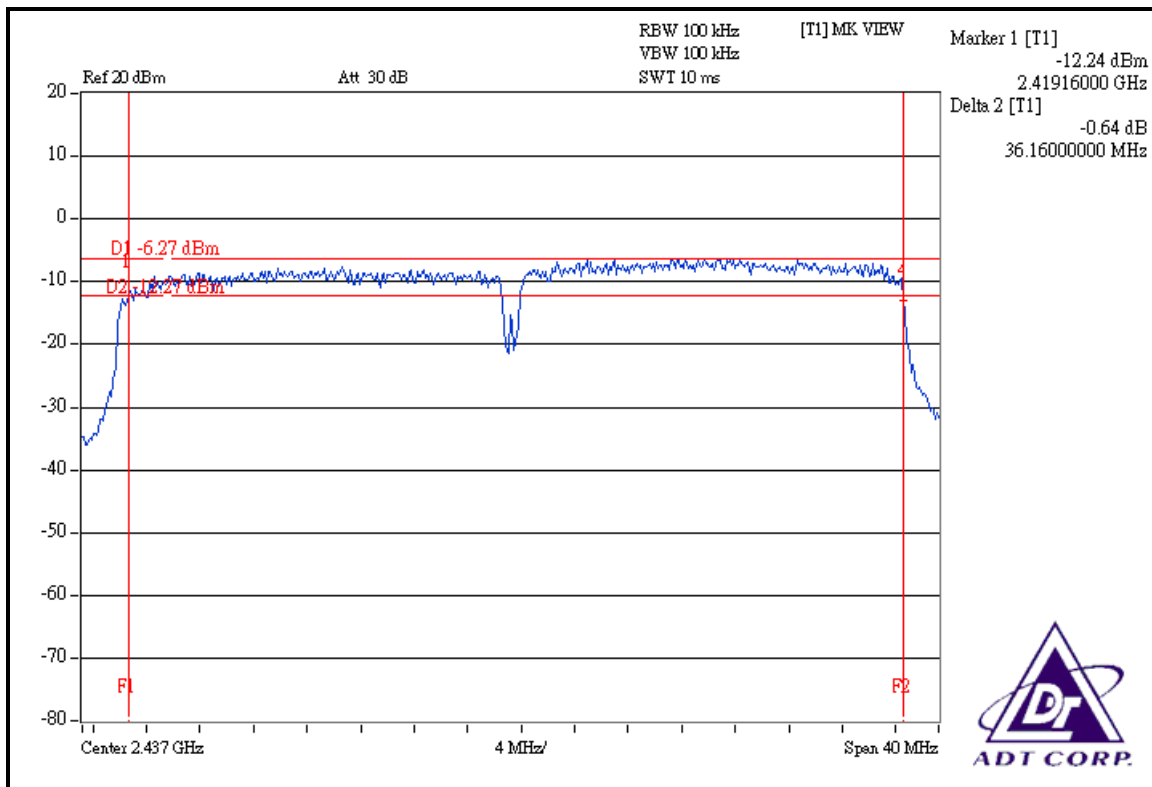


### CH 7

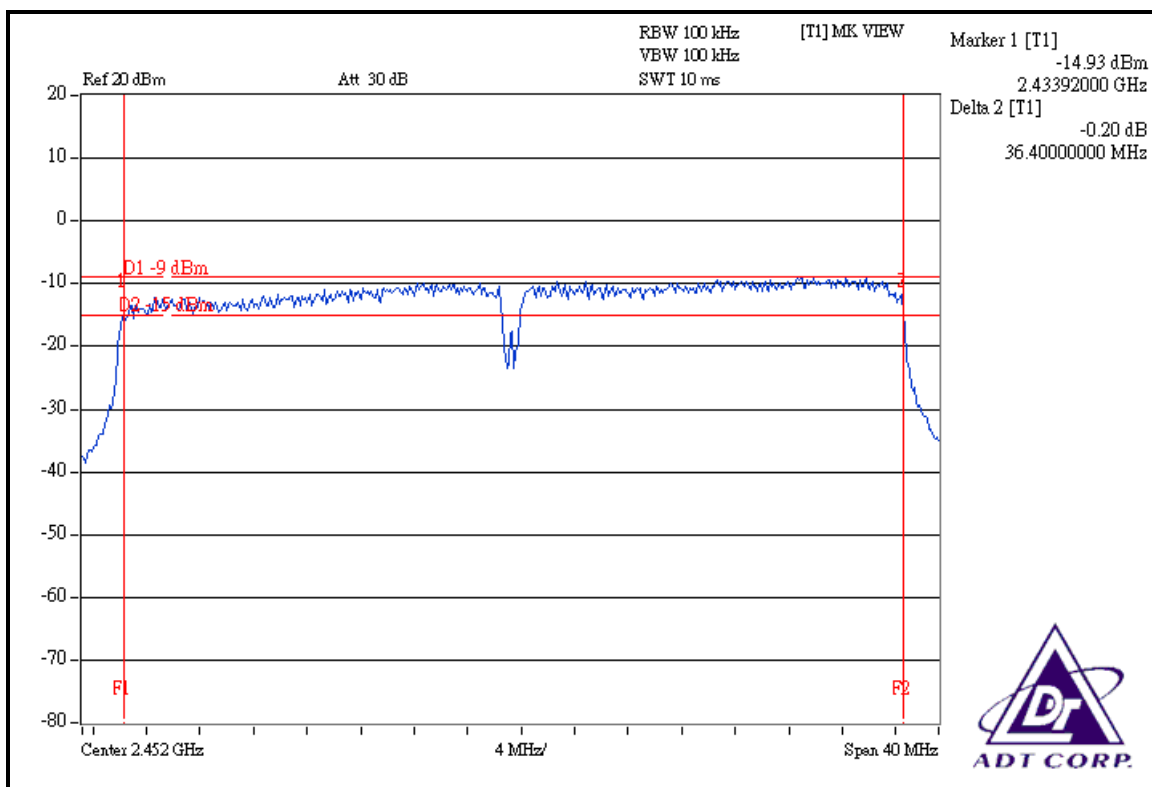





### FOR CHAIN 1: CH 1

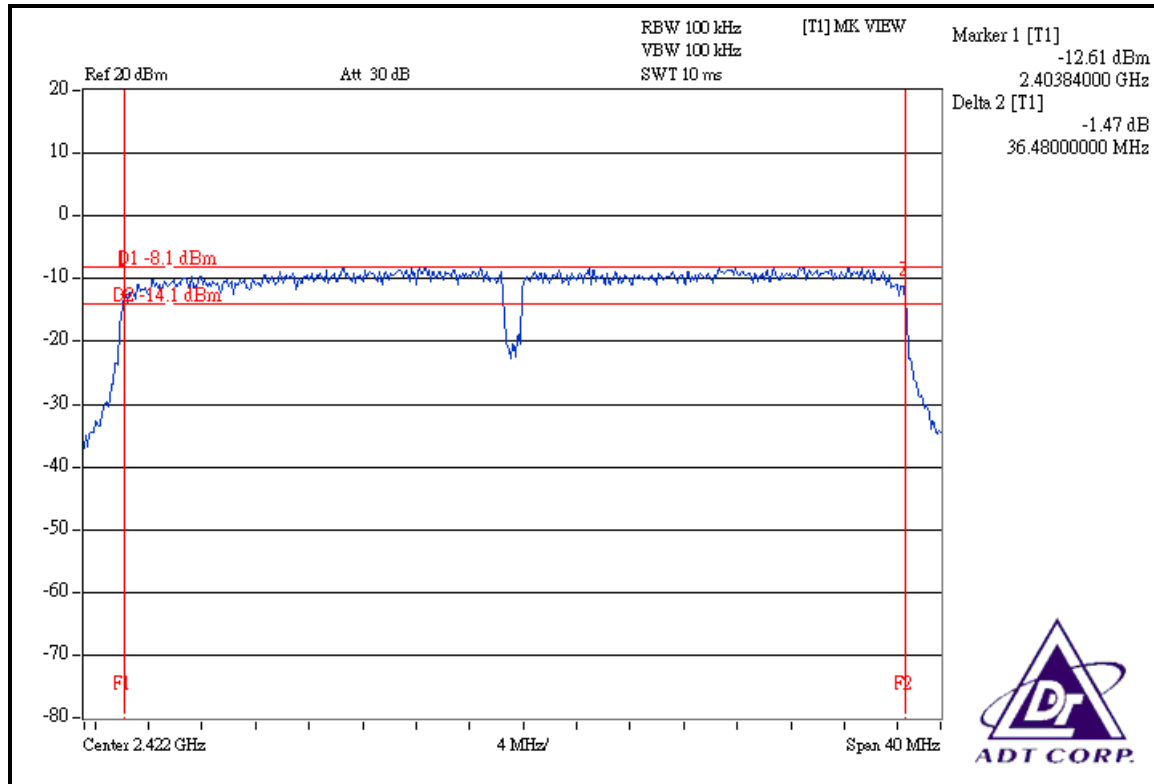

### CH 4

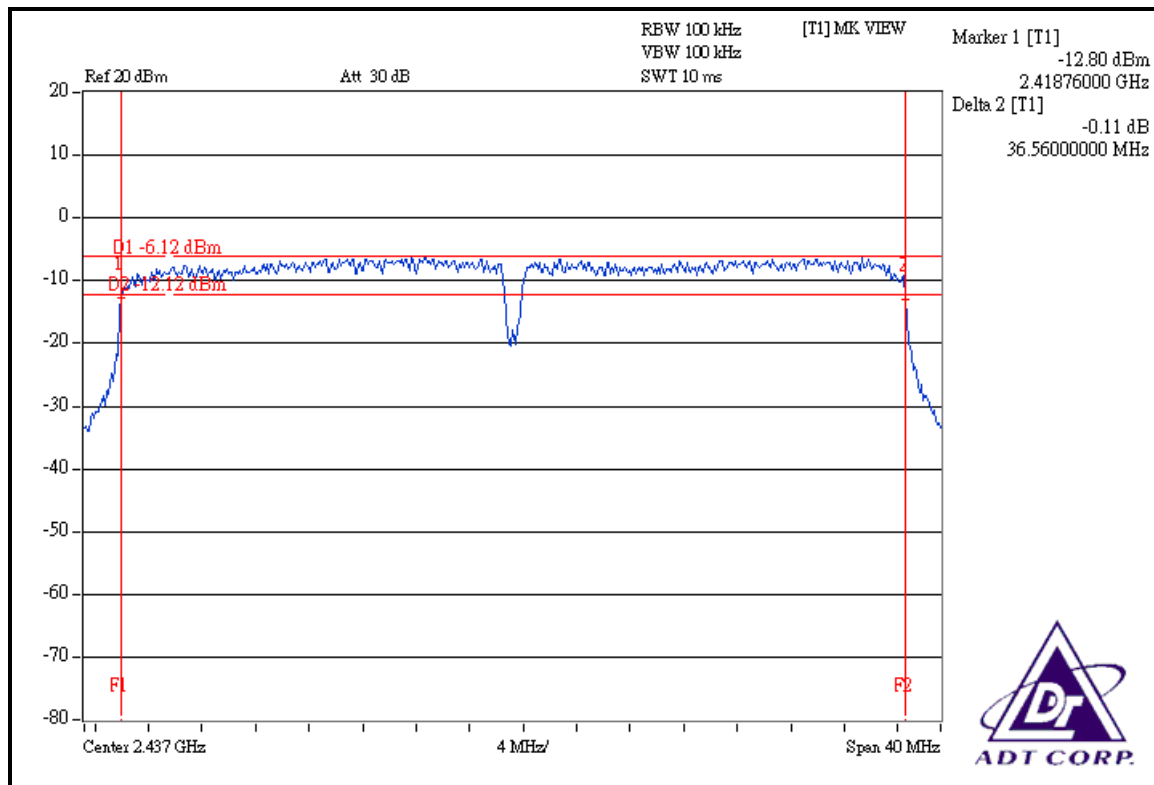

CH 7

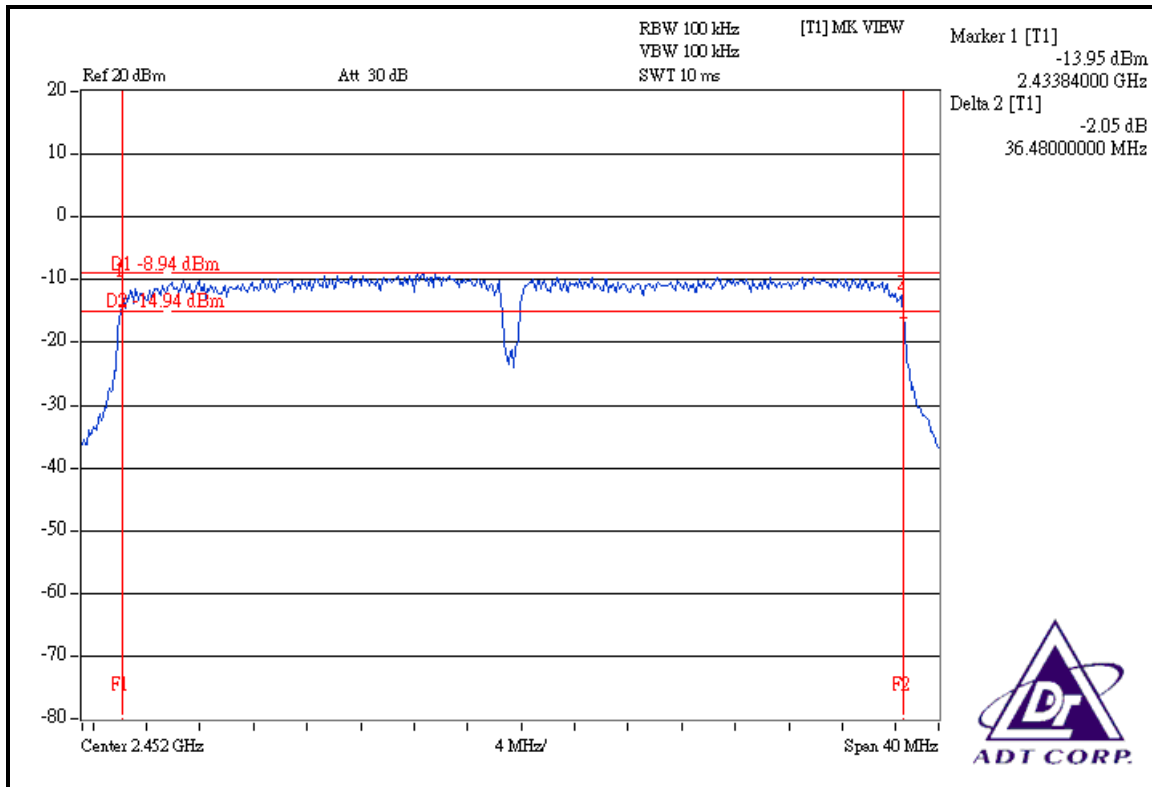



#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Apr. 11, 2008
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 28, 2007
TEKTRONIX OSCILLOSCOPE	TDS1012	C037299	Nov. 27, 2007
NARDA DETECTOR	4503A	FSCM99899	NA

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

##### 4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

##### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



#### 4.4.7 TEST RESULTS

##### 802.11b DSSS MODULATION: SINGLE TX

<b>MODULATION TYPE</b>	DBPSK	<b>TRANSFER RATE</b>	1.0Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 63%RH, 1005hPa
<b>TESTED BY</b>	Morgan Chen		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	64.417	18.09	30	PASS
6	2437	64.714	18.11	30	PASS
11	2462	64.863	18.12	30	PASS

##### 802.11g OFDM MODULATION: SINGLE TX

<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6.0Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 63%RH, 1005hPa
<b>TESTED BY</b>	Morgan Chen		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	32.211	15.08	30	PASS
6	2437	39.994	16.02	30	PASS
11	2462	31.842	15.03	30	PASS



**DRAFT 802.11n (20MHz) OFDM MODULATION: DUAL TX:**

<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	7.2Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 63%RH, 1005hPa
<b>TESTED BY</b>	Morgan Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	31.769	31.989	15.02	15.05	63.758	18.05	30	PASS
6	2437	32.211	32.137	15.08	15.07	64.347	18.09	30	PASS
11	2462	31.915	32.359	15.04	15.10	64.275	18.08	30	PASS

**DRAFT 802.11n (40MHz) OFDM MODULATION: DUAL TX:**

<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	15.0Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 63%RH, 1005hPa
<b>TESTED BY</b>	Morgan Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2422	19.953	20.417	13.00	13.10	40.370	16.06	30	PASS
4	2437	32.285	31.915	15.09	15.04	64.200	18.08	30	PASS
7	2452	16.218	16.181	12.10	12.09	32.399	15.11	30	PASS





## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP 40	100040	Apr. 11, 2008

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




## 4.5.7 TEST RESULTS

### 802.11b DSSS MODULATION: SINGLE TX

<b>MODULATION TYPE</b>	DBPSK	<b>TRANSFER RATE</b>	1.0Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 63%RH, 1005hPa
<b>TESTED BY</b>	Morgan Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.95	8	PASS
6	2437	-13.88	8	PASS
11	2462	-14.08	8	PASS

### CH 1

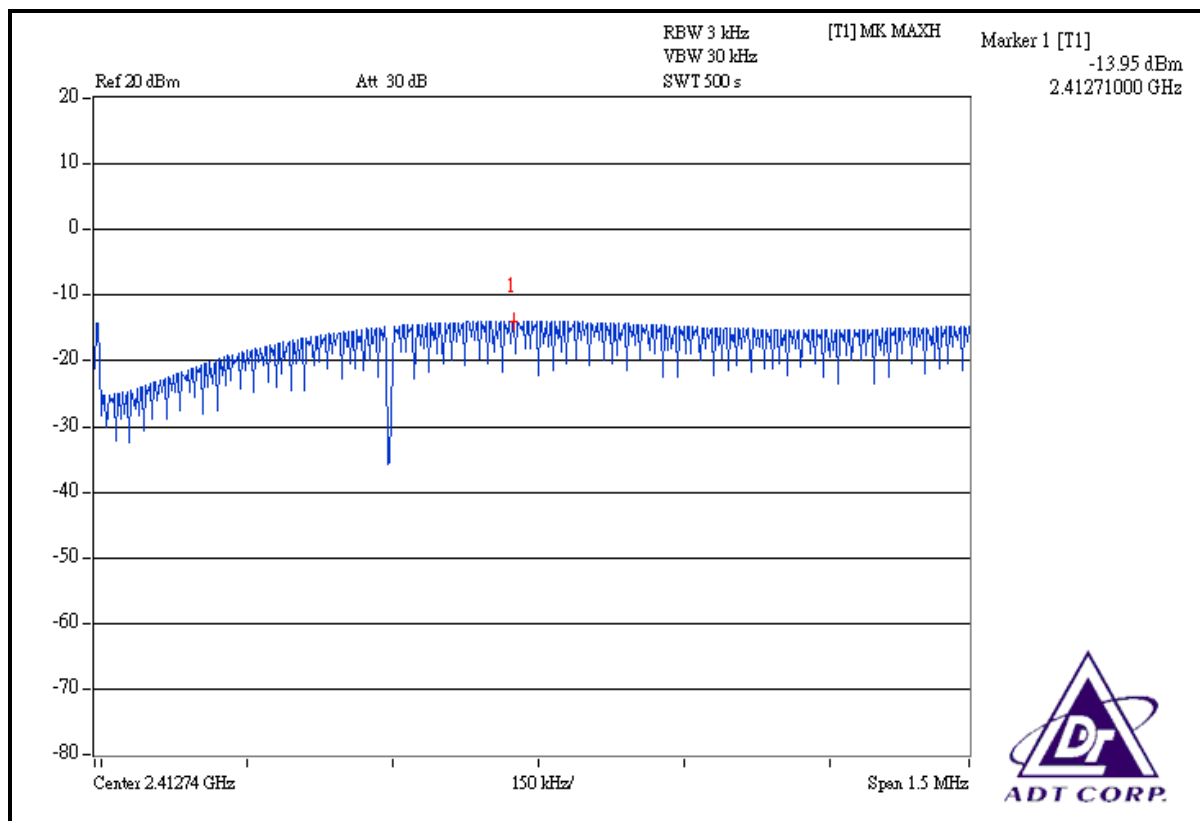




### CH 6

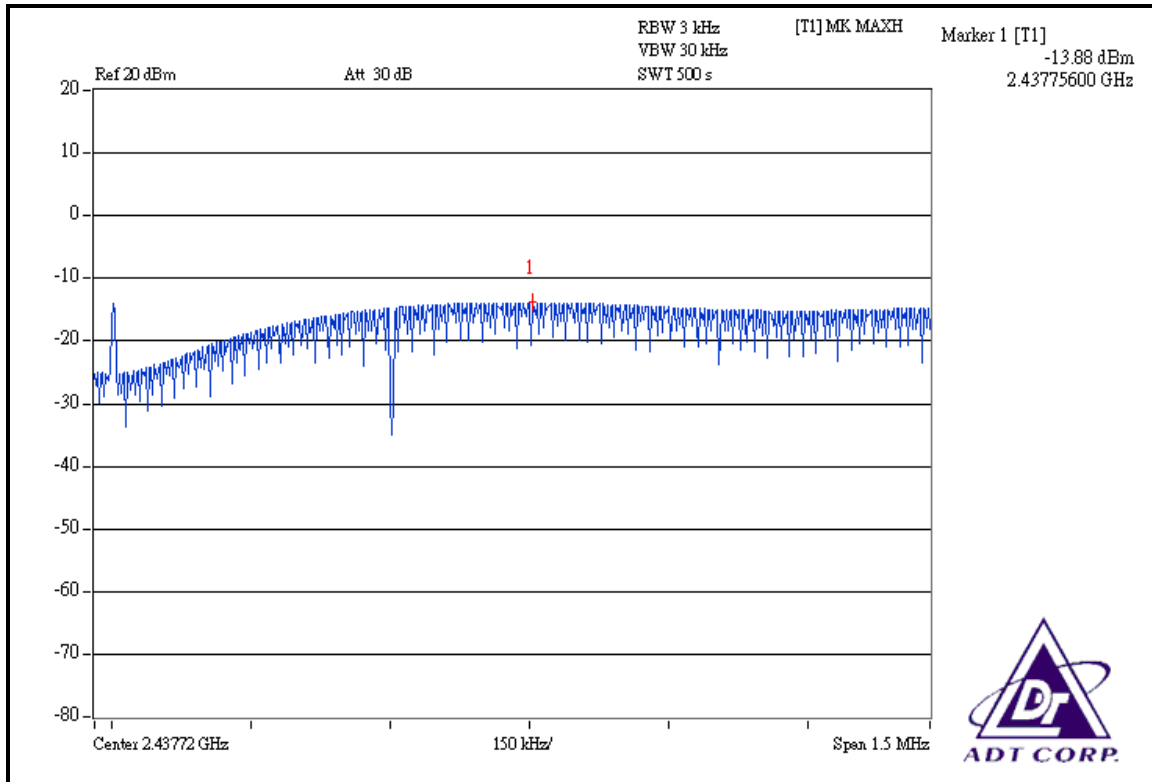

### CH 11

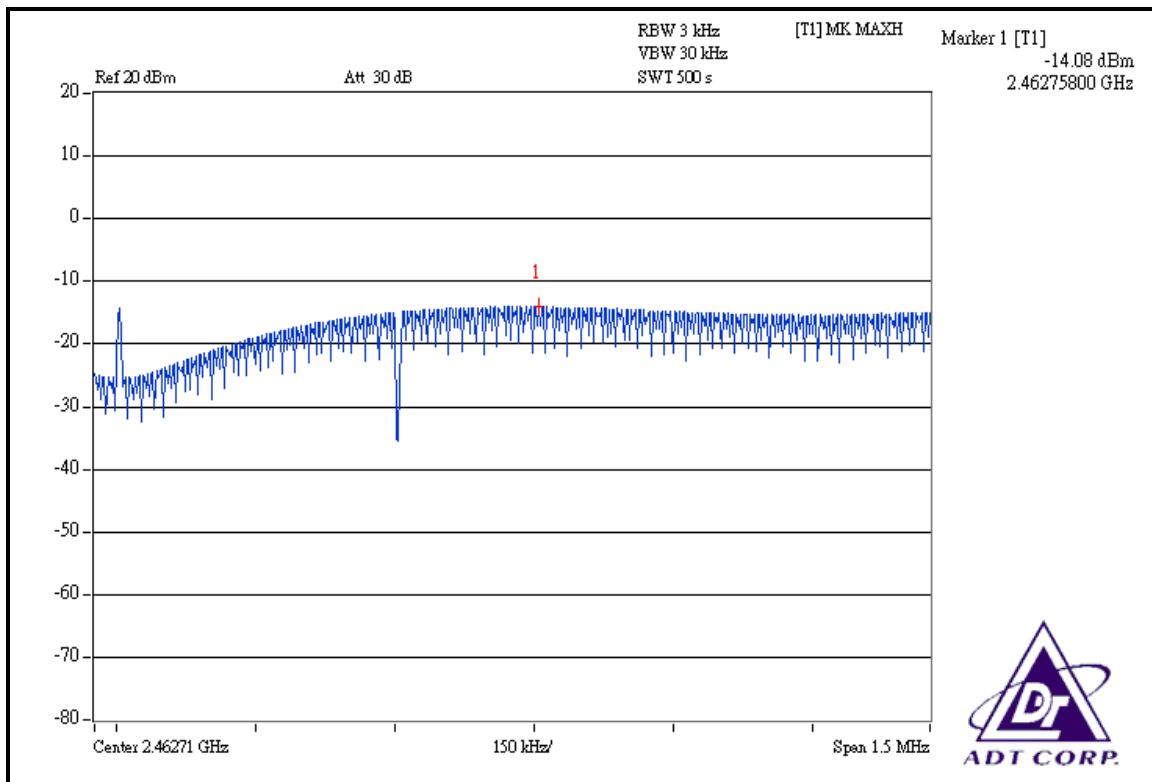




**802.11g OFDM MODULATION: SINGLE TX**

<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6.0Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 63%RH, 1005hPa
<b>TESTED BY</b>	Morgan Chen		


CHANNEL	CHANNEL FREQUENCY (MHz )	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-19.55	8	PASS
6	2437	-18.66	8	PASS
11	2462	-19.43	8	PASS

**CH 1**

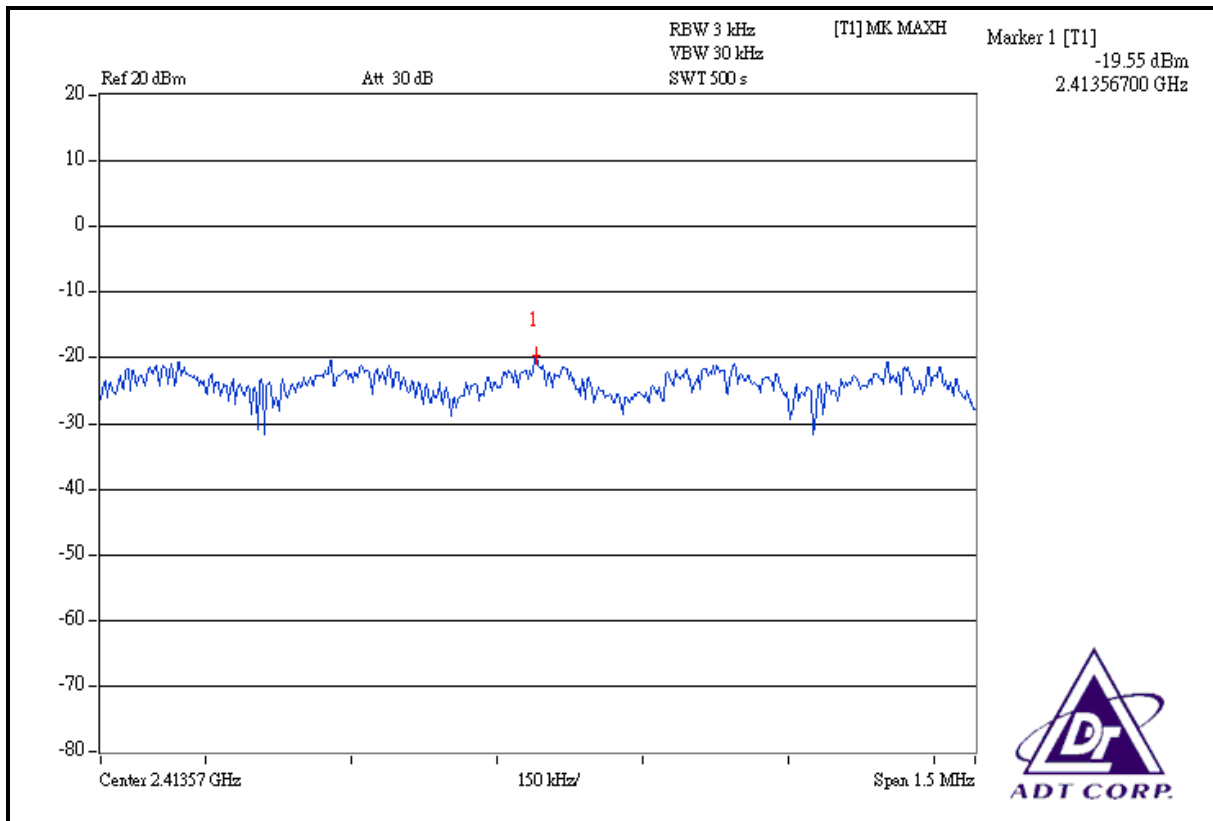




### CH 6

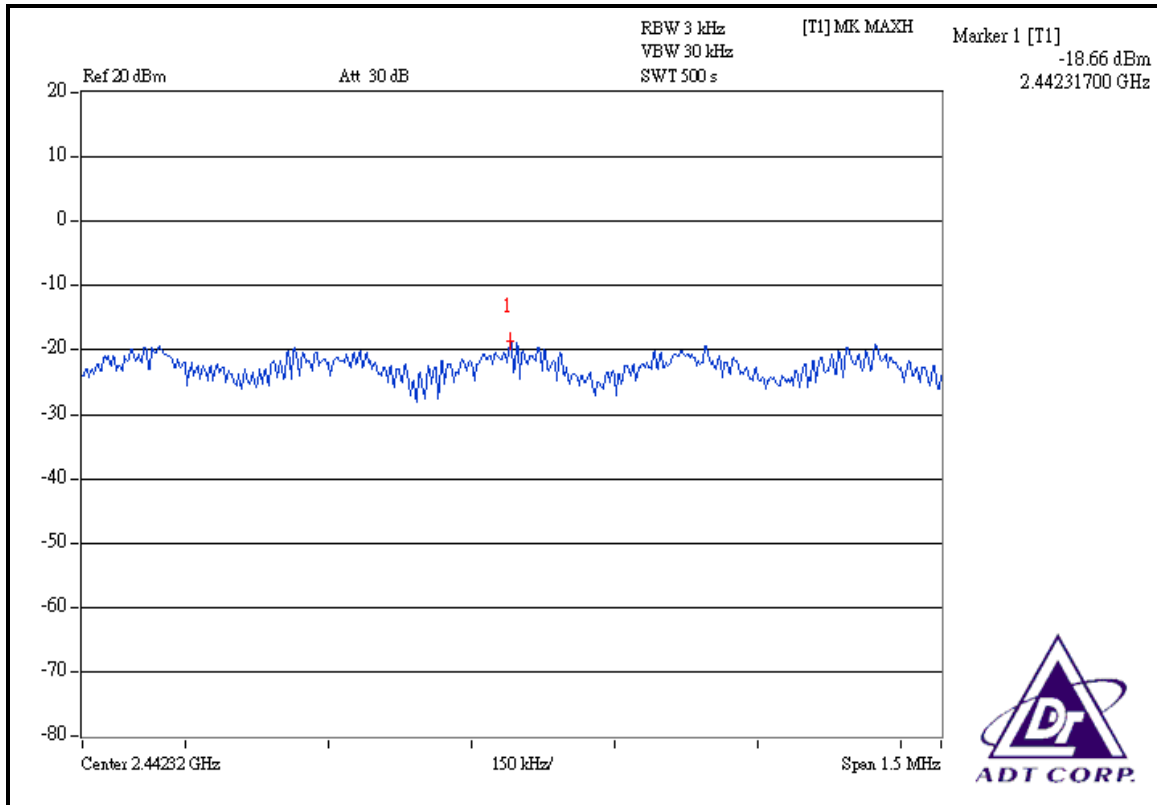

### CH 11

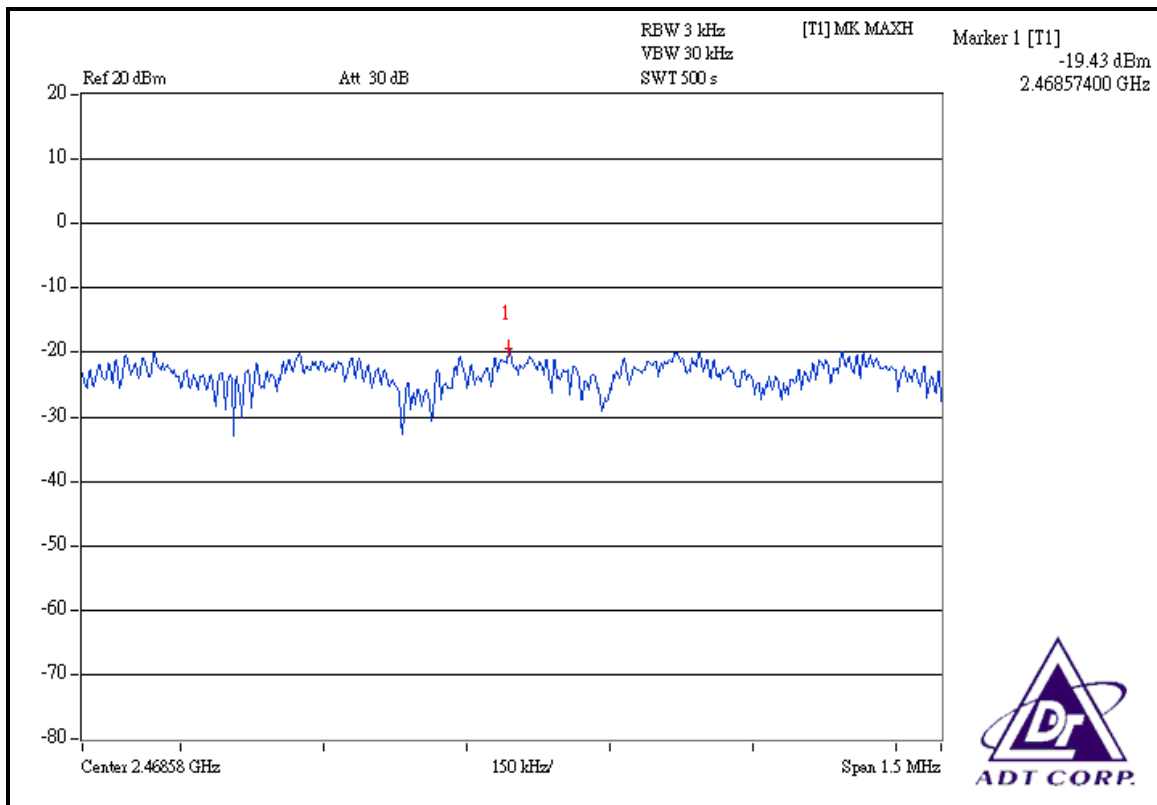




**DRAFT 802.11n (20MHz) OFDM MODULATION: DUAL TX:**

<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	7.2Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 63%RH, 1005hPa
<b>TESTED BY</b>	Morgan Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)		RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	0.015	0.015	-18.27	-18.19	0.030	-15.23	8	PASS
6	2437	0.014	0.015	-18.50	-18.13	0.029	-15.38	8	PASS
11	2462	0.015	0.016	-18.31	-18.08	0.031	-15.09	8	PASS

**FOR CHAIN 0: CH 1**

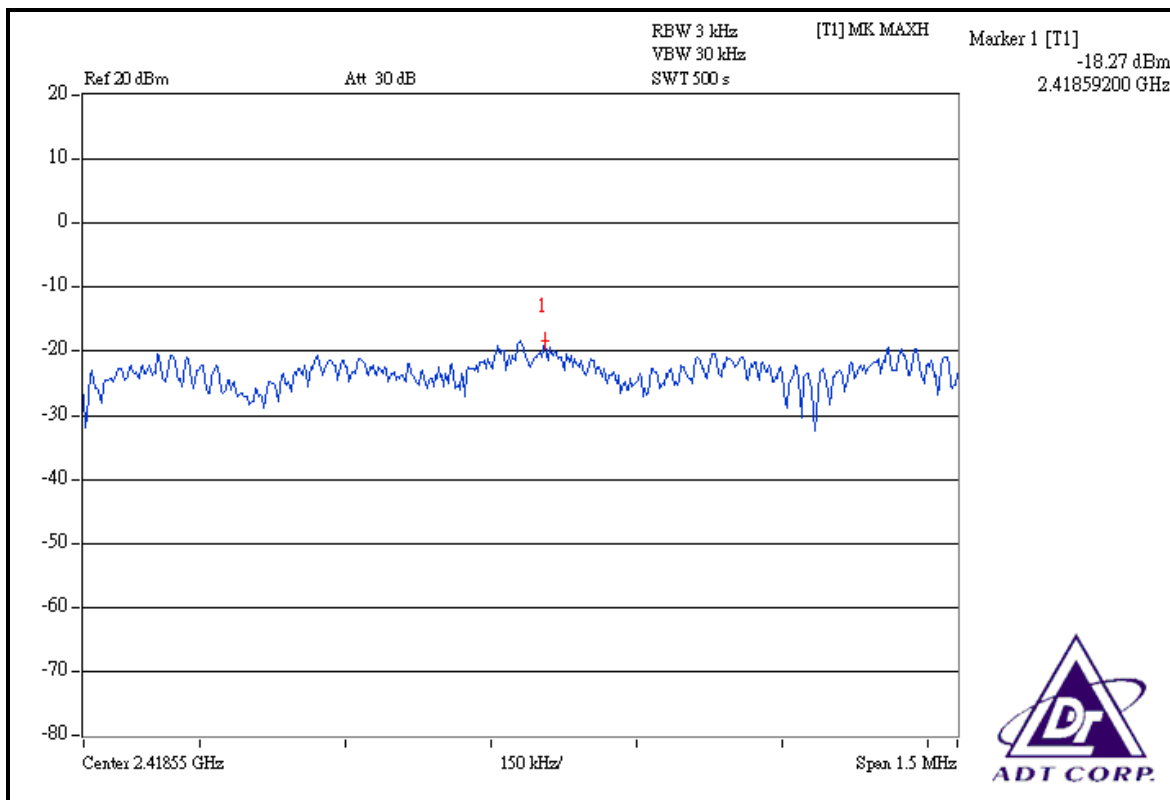




### CH 6

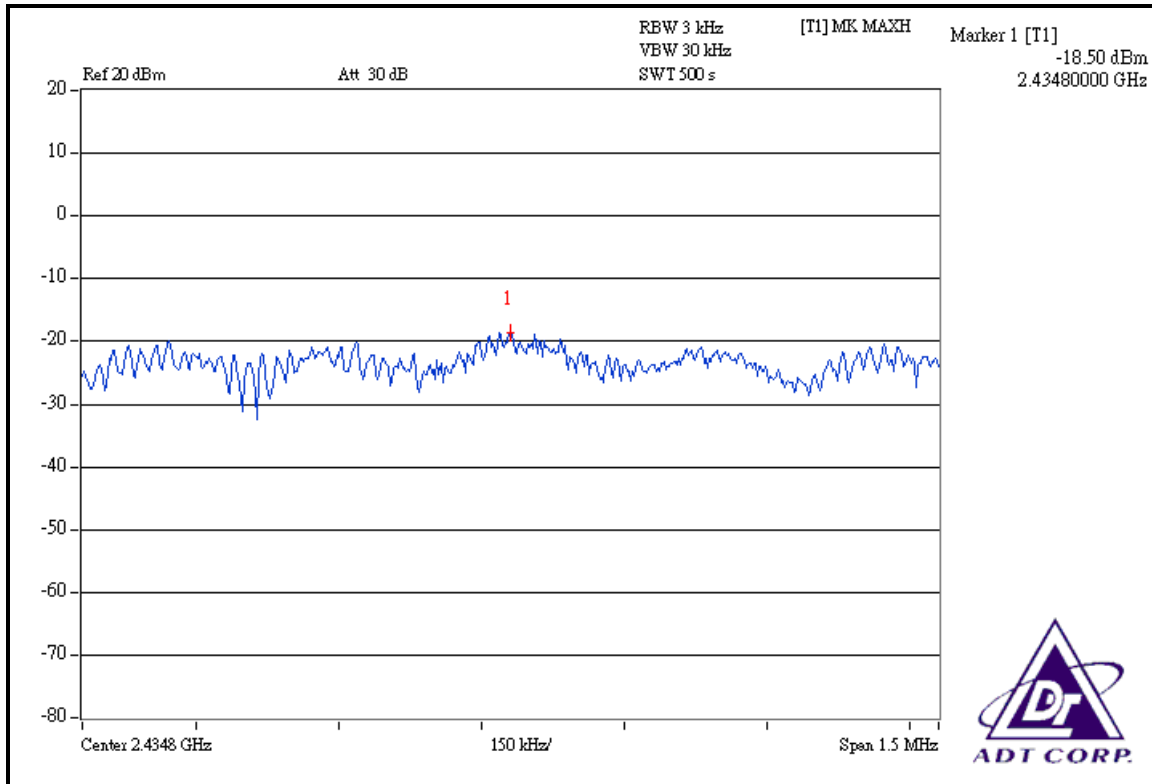


### CH 11

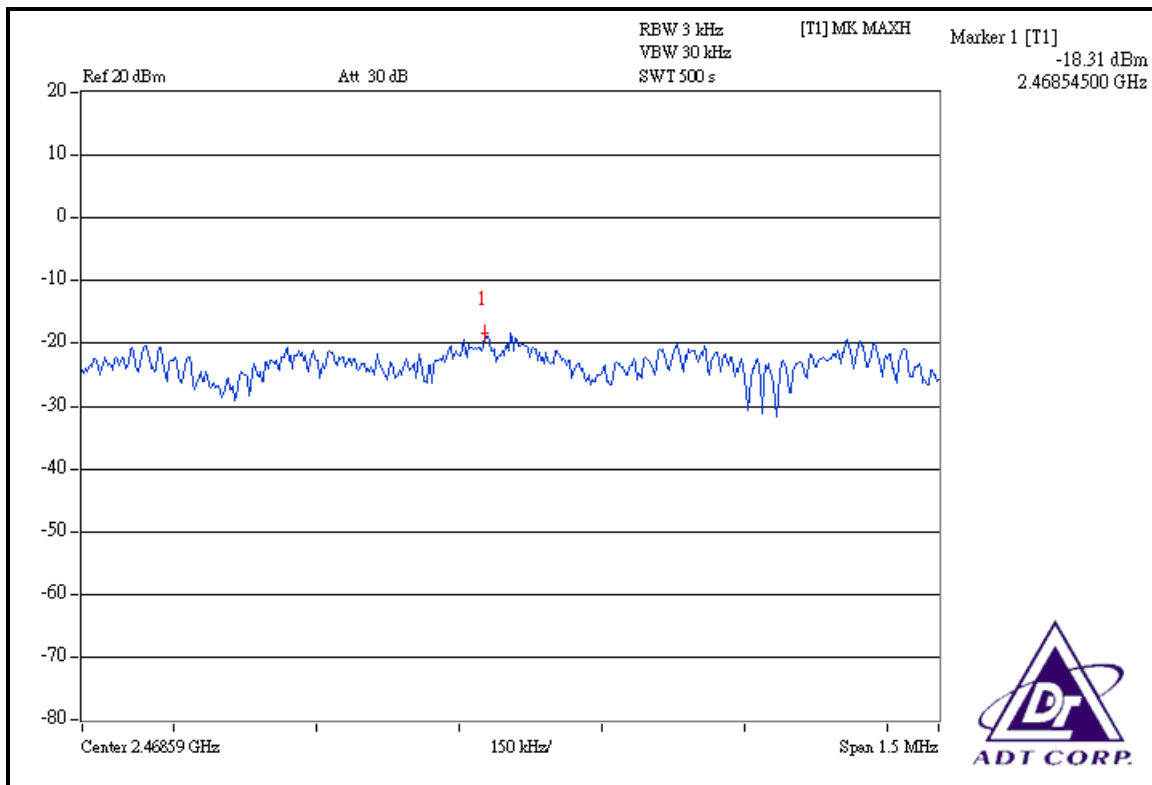






### FOR CHAIN 1: CH 1

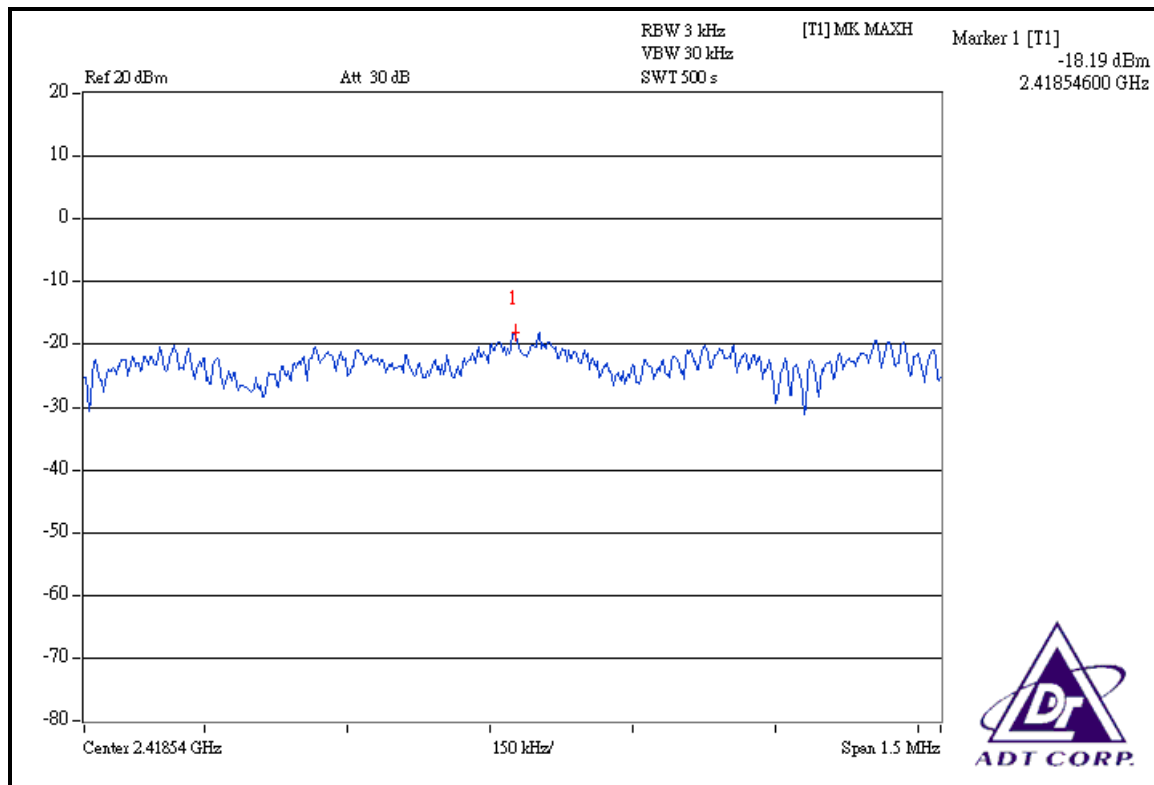


### CH 6

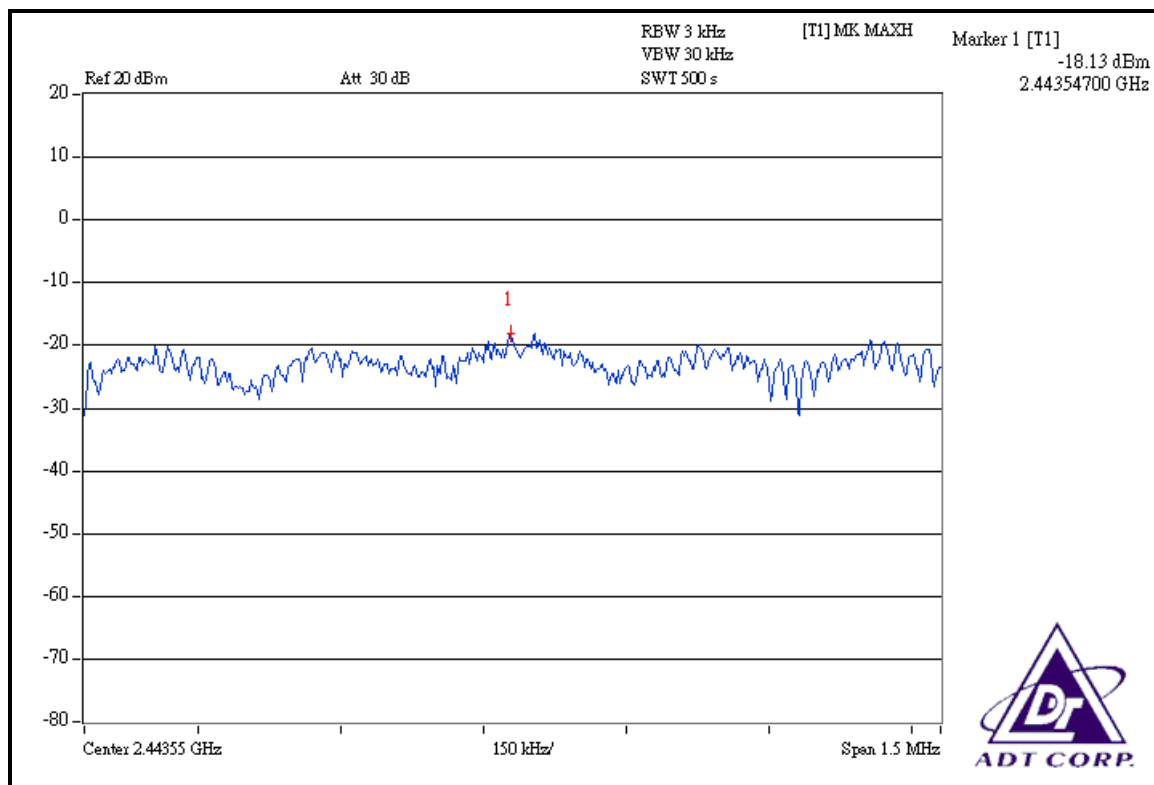



CH 11

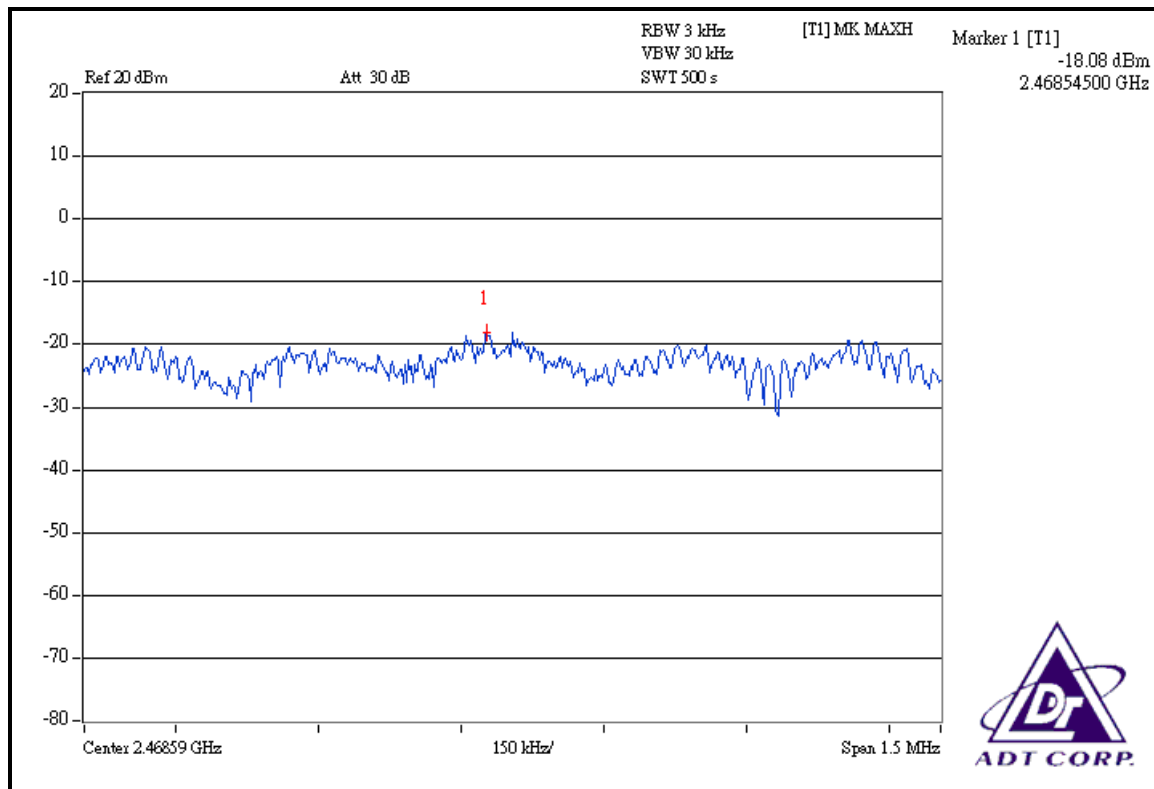




**DRAFT 802.11n (40MHz) OFDM MODULATION: DUAL TX:**

<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	15.0Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg.C, 63%RH, 1005hPa
<b>TESTED BY</b>	Morgan Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)		RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2422	0.008	0.008	-20.78	-20.90	0.016	-17.96	8	PASS
4	2437	0.013	0.014	-18.80	-18.64	0.023	-16.38	8	PASS
7	2452	0.006	0.007	-22.02	-21.73	0.013	-18.86	8	PASS

**FOR CHAIN 0: CH 1**

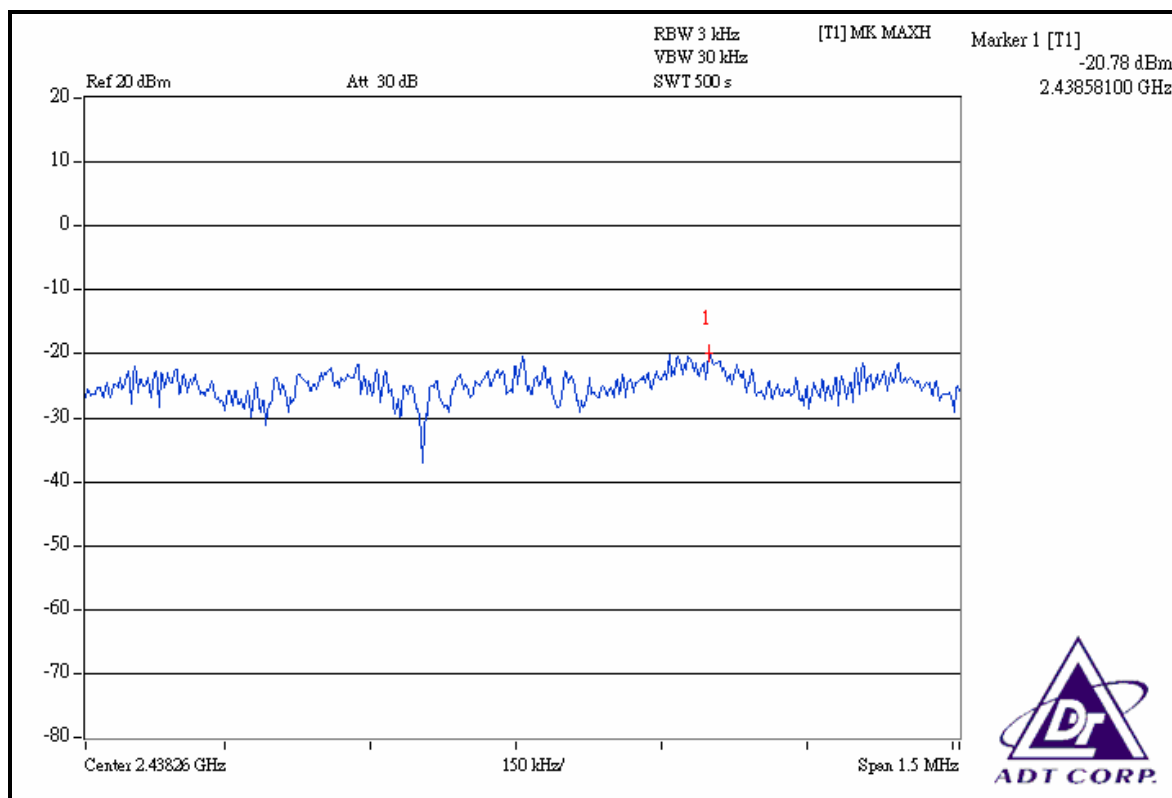




### CH 4

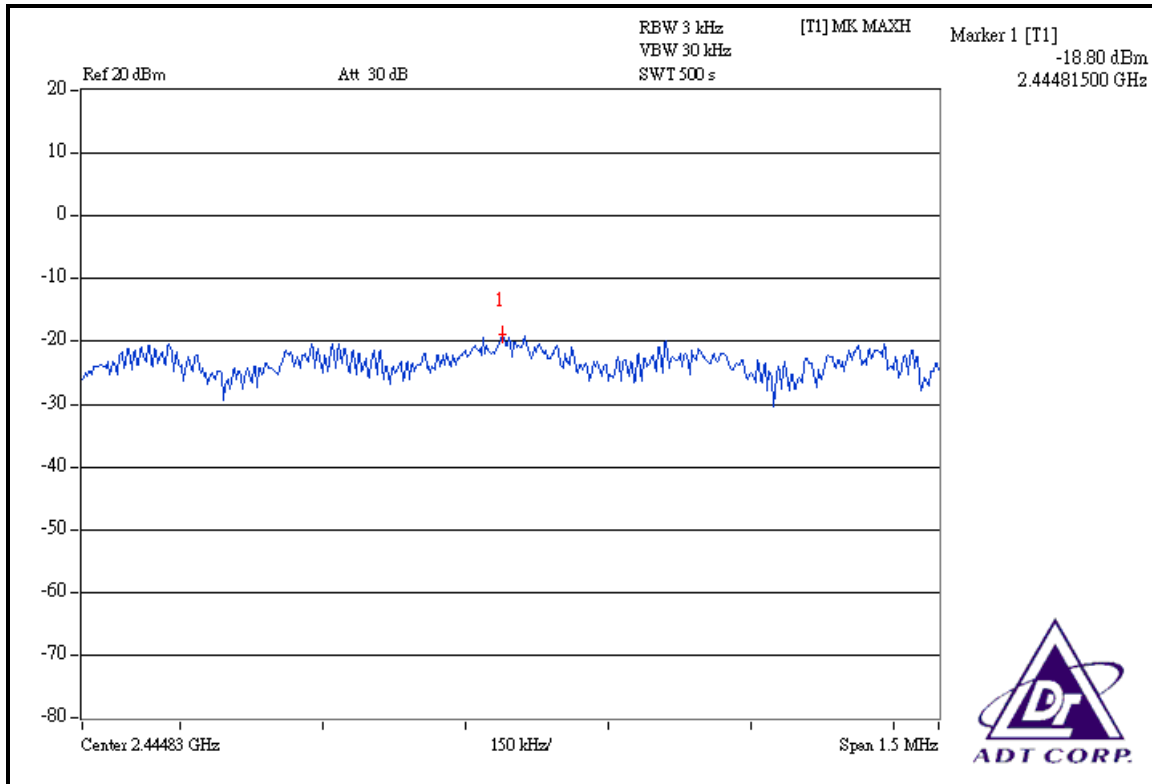


### CH 7

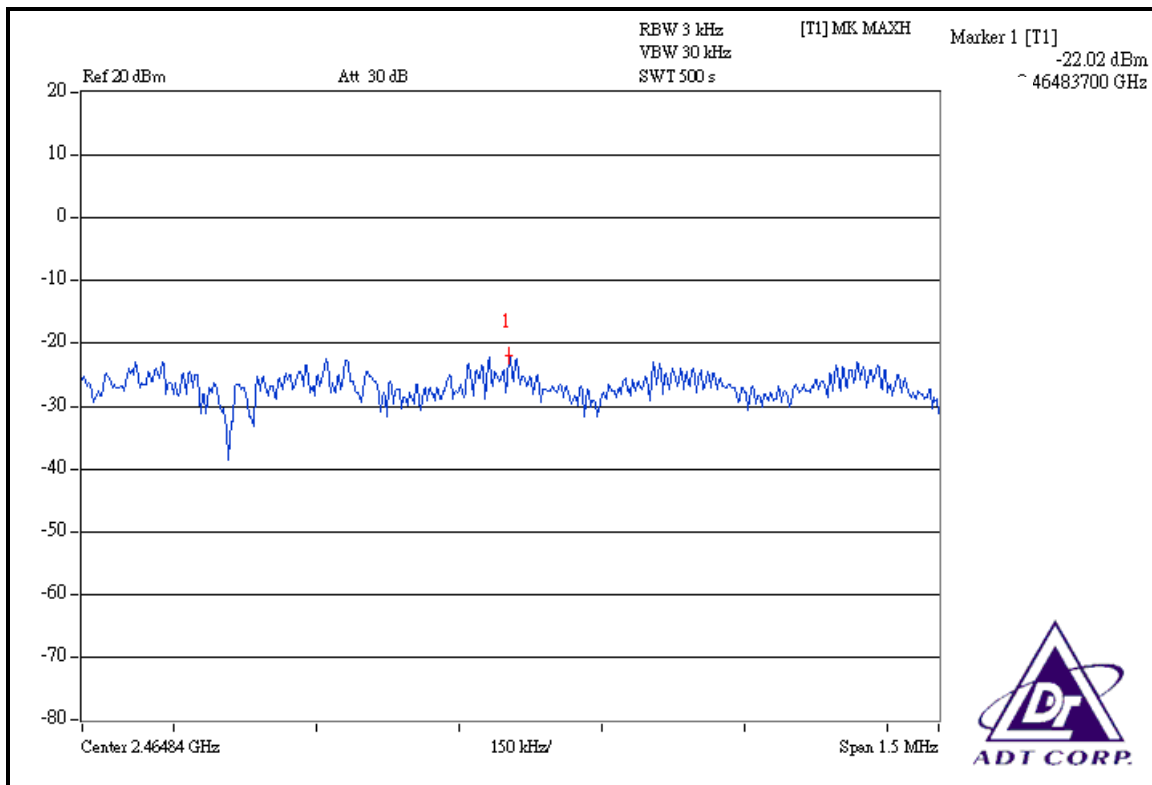




### FOR CHAIN 1: CH 1

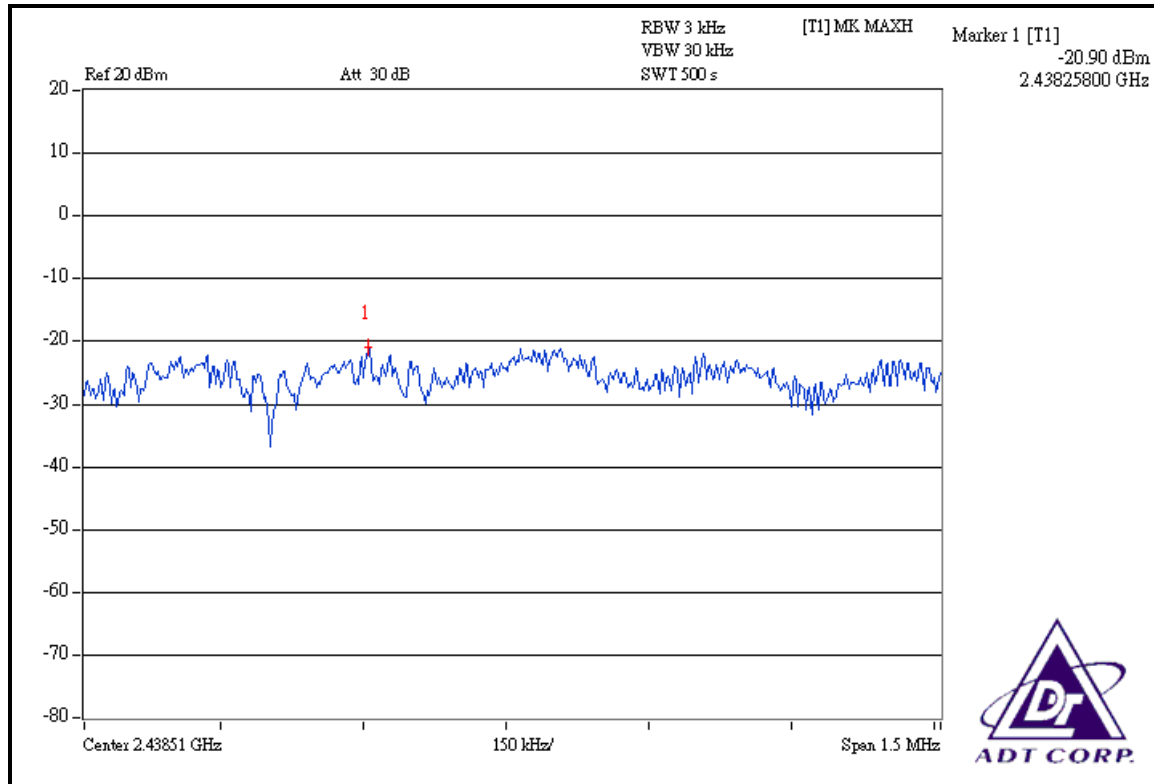


### CH 4

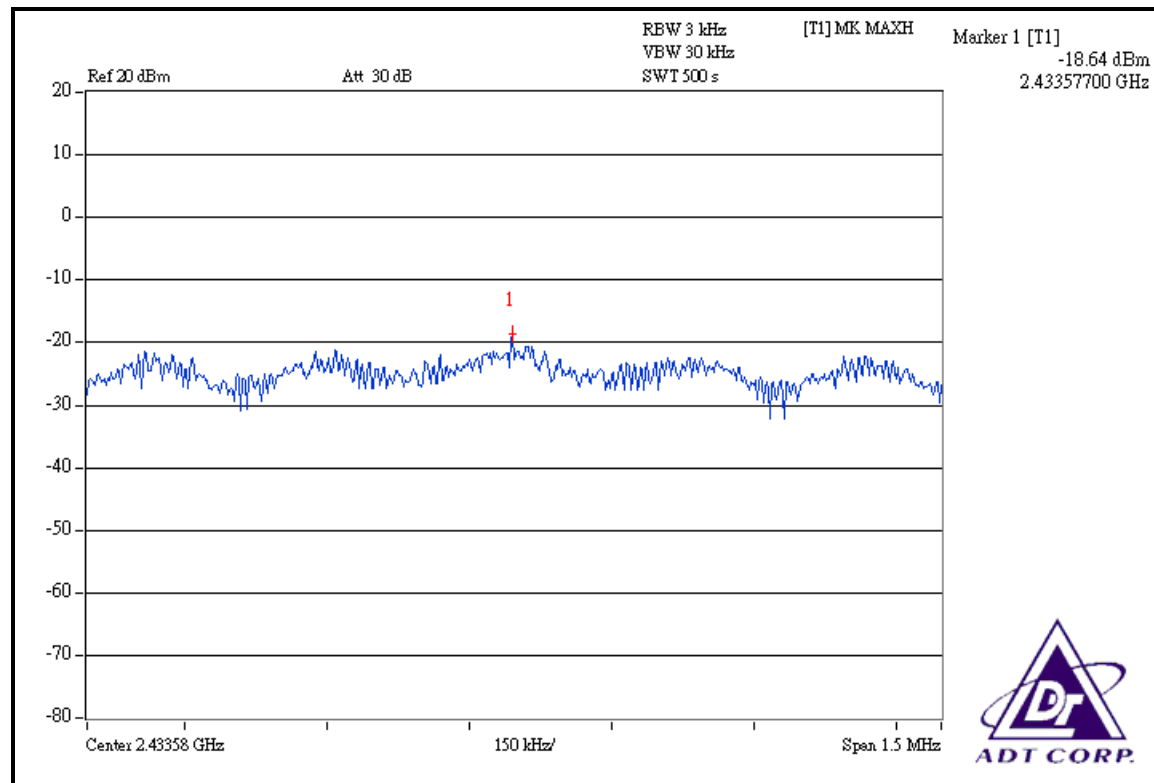



CH 7

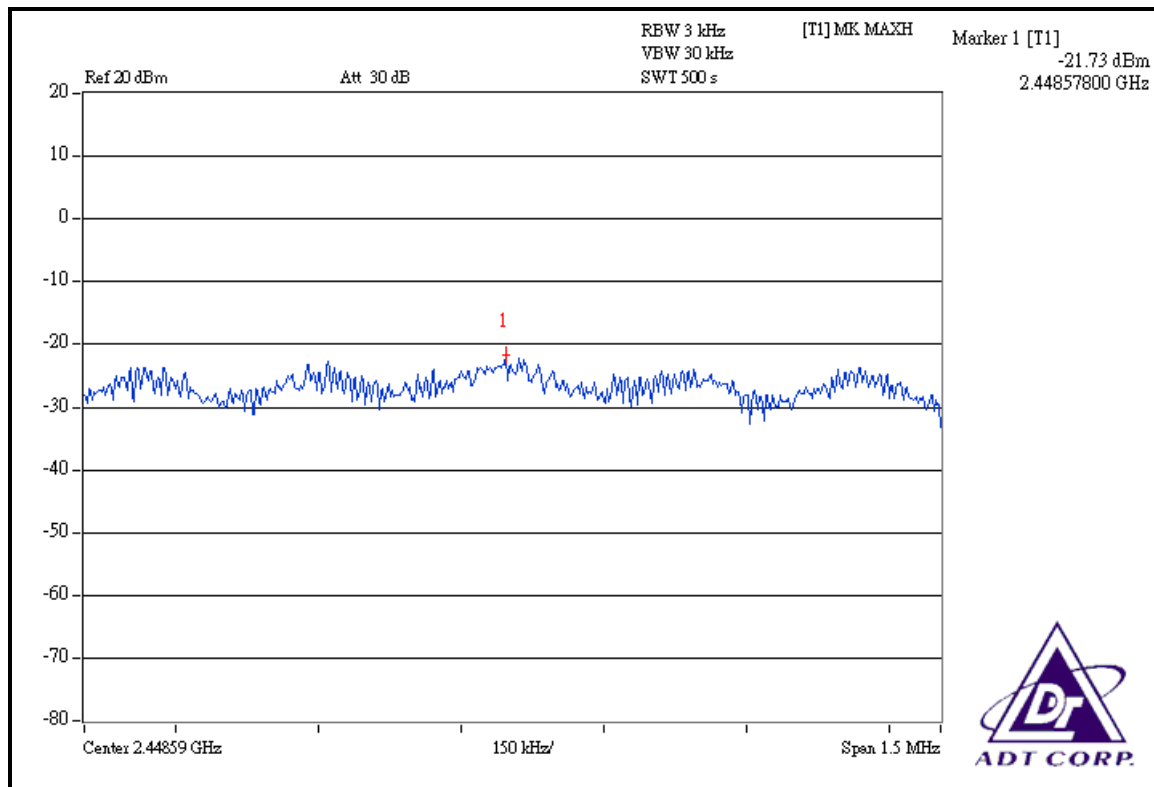



## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

#### For Single TX:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Apr. 11, 2008

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### For Dual TX:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Spectrum Analyzer	FSP40	100269	Aug. 07, 2007
HORN Antenna	BBHA 9120 D	9120D-563	Jul. 26, 2007
HORN Antenna	BBHA 9170	BBHA9170242	Jan. 16, 2008
RF signal cable	SUCOFLEX 104	218188/218189	Nov. 14, 2007
RF signal cable	8D-FB	Cable-HYCH9-01	Aug. 16, 2007
Software	ADT_Radiated_V7.6	NA	NA
Antenna Tower	2070/2080	512.835.4684	NA
Turn Table	2087-2.03	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

#### For Single TX:

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 10Hz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = VBW = 100kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

#### For Dual TX:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = VBW = 100kHz; Average RBW = 1MHz, VBW = 10Hz)

**NOTE:** The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation





#### 4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.

#### 4.6.6 TEST RESULTS

The spectrum plots are attached on the following 24 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



#### **802.11b DSSS MODULATION: SINGLE TX**



**NOTE 1:** The band edge emission plot on the next page shows 49.48dBc between carrier maximum power and local maximum emission in restrict band (2.38620GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 112.03dBuV/m (Peak), so the maximum field strength in restrict band is  $112.03 - 49.48 = 62.55$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on the next page shows 57.64dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 107.60dBuV/m (Average), so the maximum field strength in restrict band is  $107.60 - 57.64 = 49.96$ dBuV/m which is under 54dBuV/m limit.

**NOTE 2:** The band edge emission plot on the next second page shows 47.99dBc between carrier maximum power and local maximum emission in restrict band (2.48760GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 111.38dBuV/m (Peak), so the maximum field strength in restrict band is  $111.38 - 47.99 = 63.39$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 54.67dBc between carrier maximum power and local maximum emission in restrict band (2.48380GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 107.14dBuV/m (Average), so the maximum field strength in restrict band is  $107.14 - 54.67 = 52.47$ dBuV/m which is under 54dBuV/m limit.

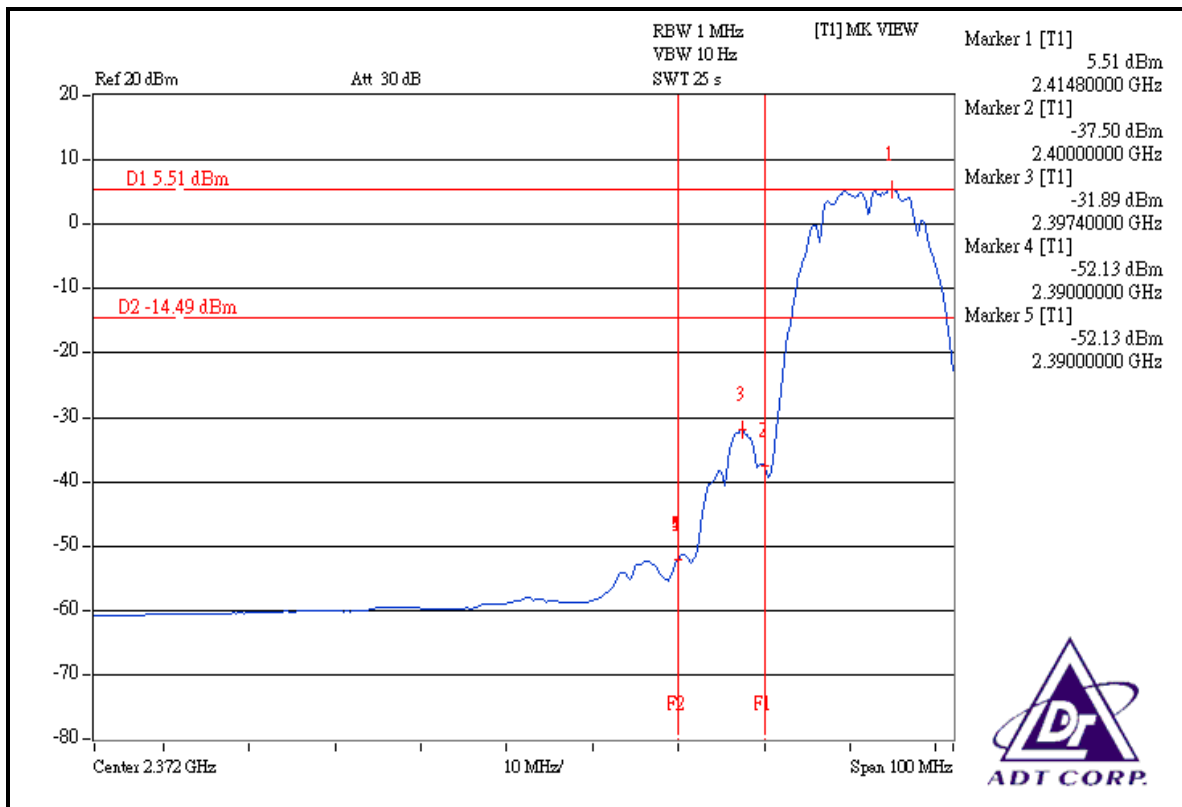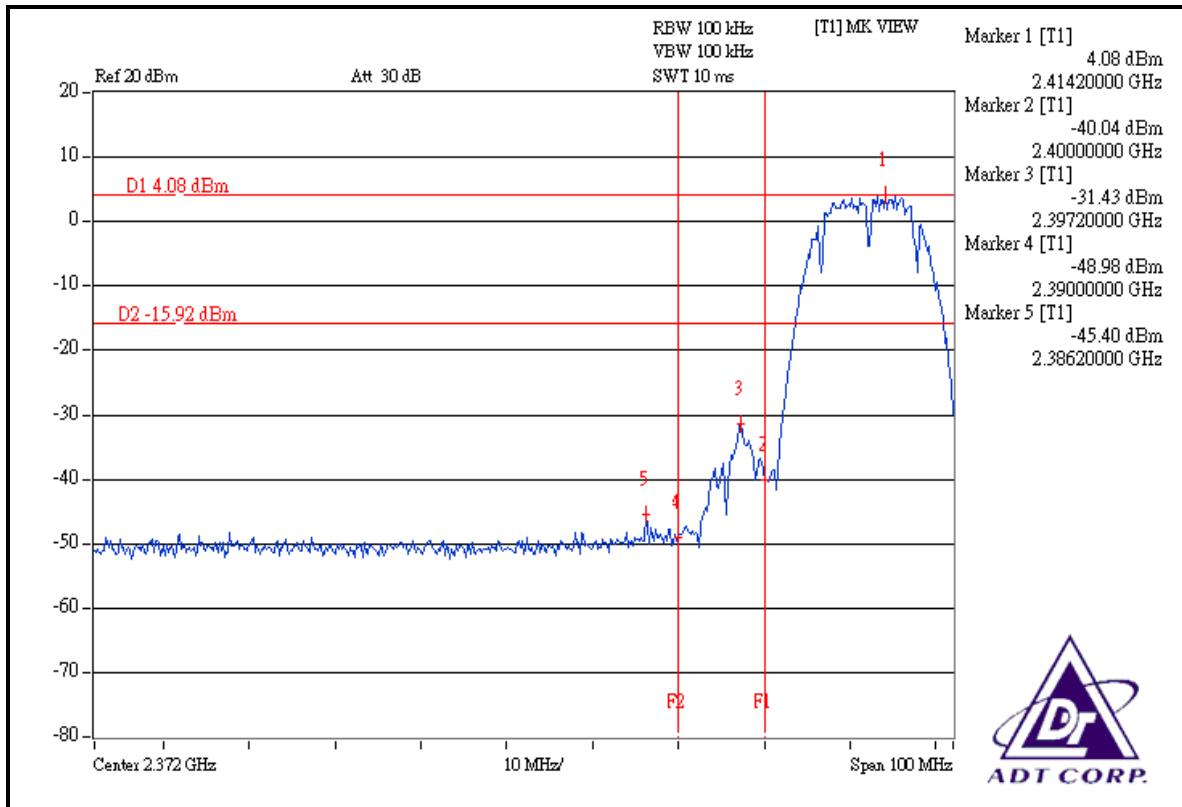

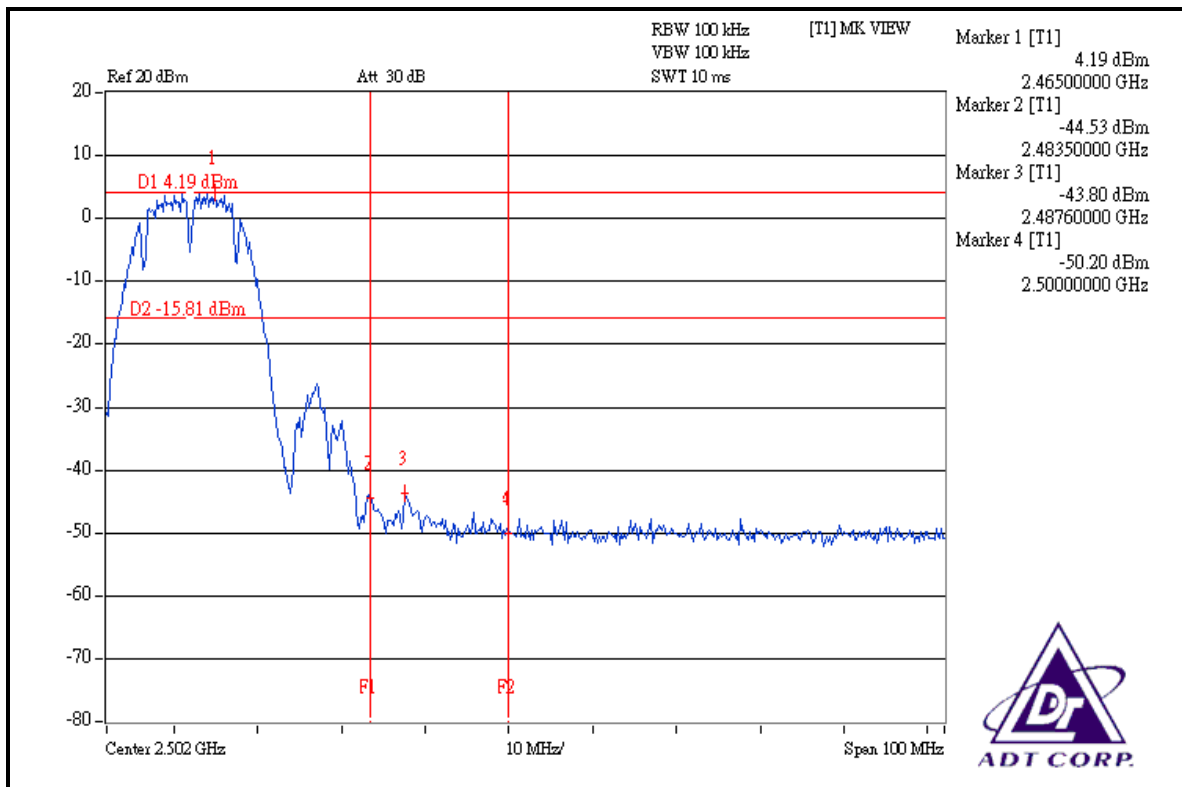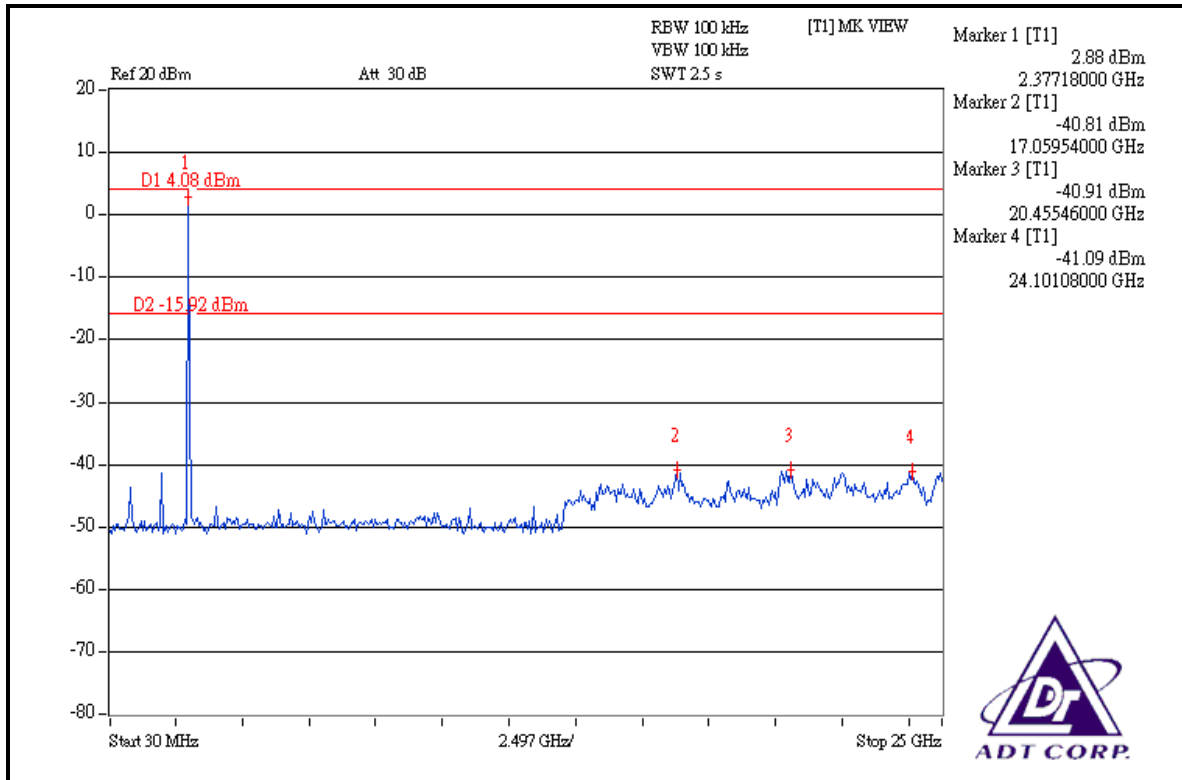

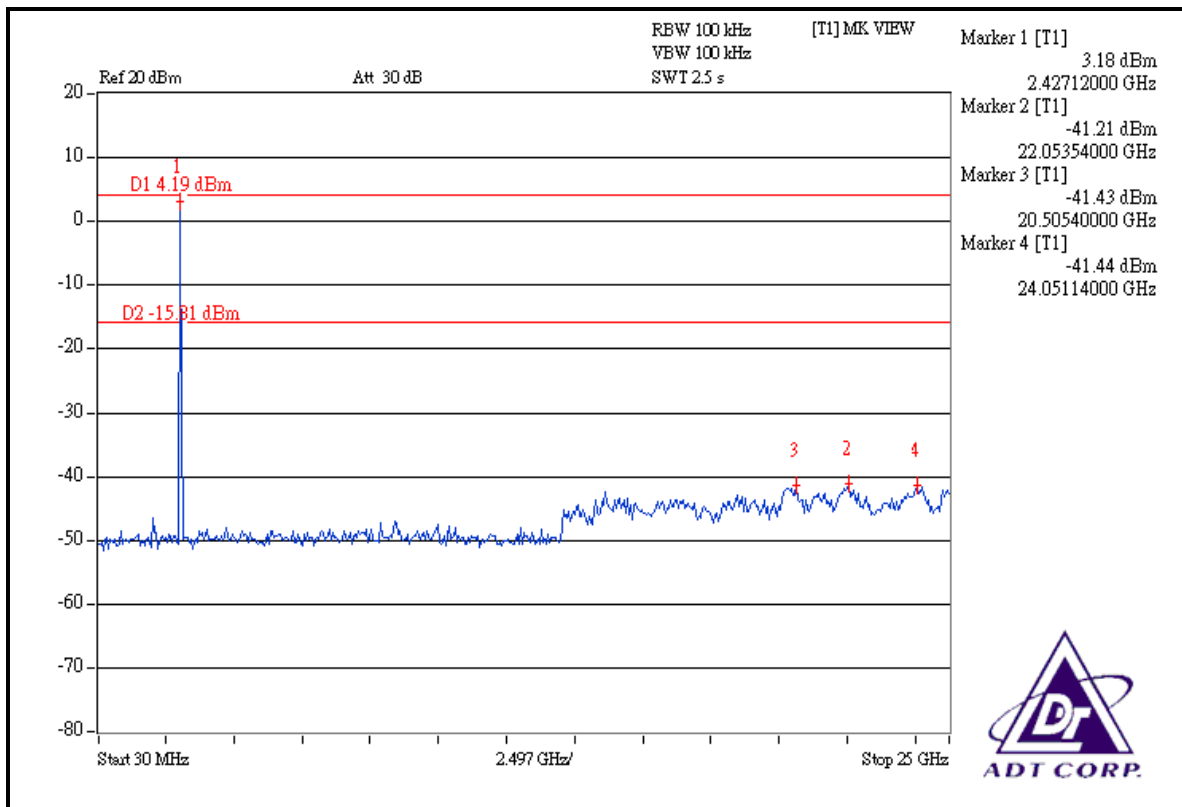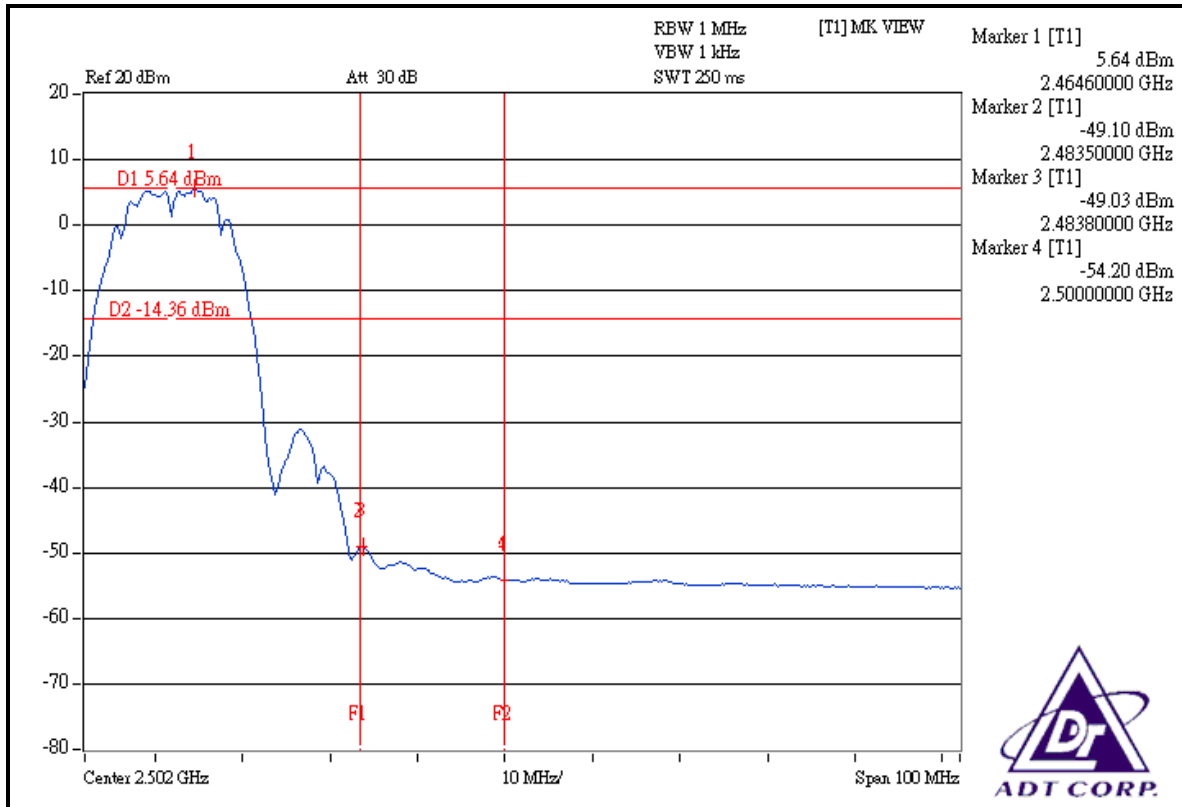





### 802.11g OFDM MODULATION: SINGLE TX



**NOTE 1:** The band edge emission plot on the next page shows 43.13dBc between carrier maximum power and local maximum emission in restrict band (2.35960GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 109.13dBuV/m (Peak), so the maximum field strength in restrict band is  $109.13 - 43.13 = 66.00$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on the next page shows 52.14dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 99.01dBuV/m (Average), so the maximum field strength in restrict band is  $99.01 - 52.14 = 46.87$ dBuV/m which is under 54dBuV/m limit.

**NOTE 2:** The band edge emission plot on the next second page shows 40.40dBc between carrier maximum power and local maximum emission in restrict band (2.48360GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 110.25dBuV/m (Peak), so the maximum field strength in restrict band is  $110.25 - 40.40 = 69.85$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 47.01dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 100.00dBuV/m (Average), so the maximum field strength in restrict band is  $100.00 - 47.01 = 52.99$ dBuV/m which is under 54dBuV/m limit.

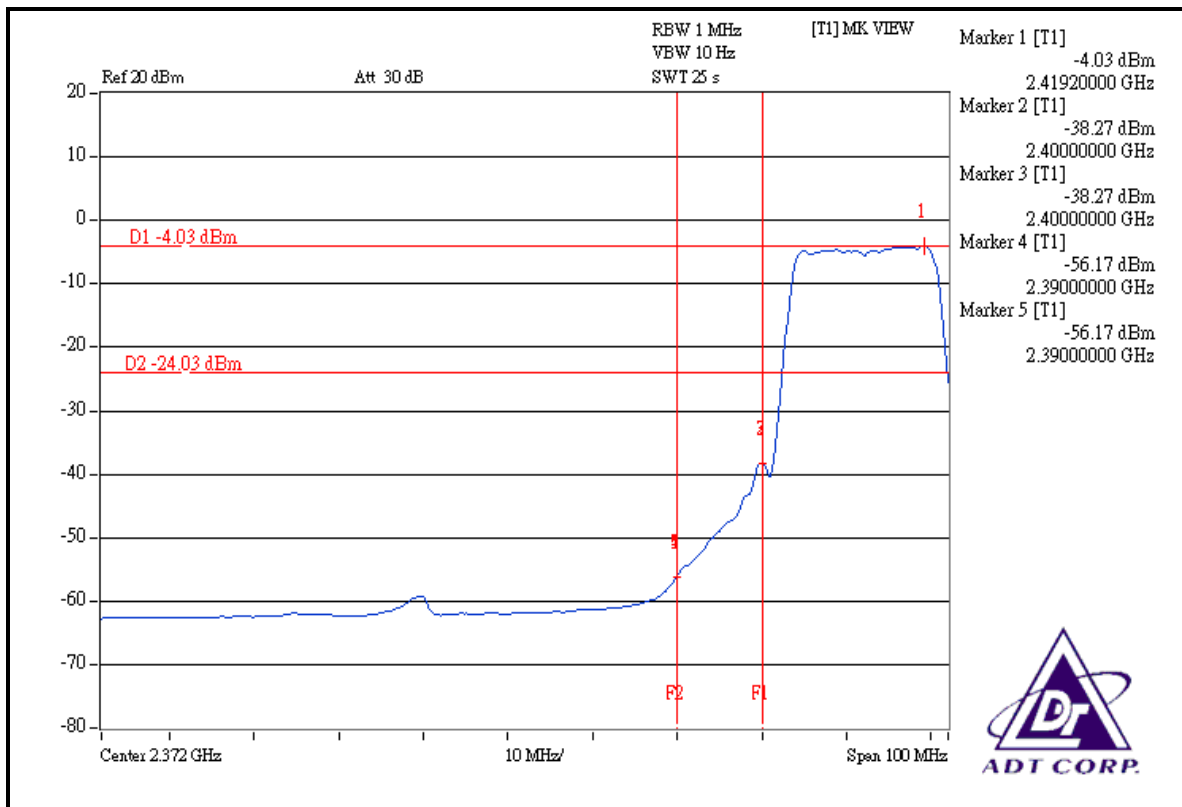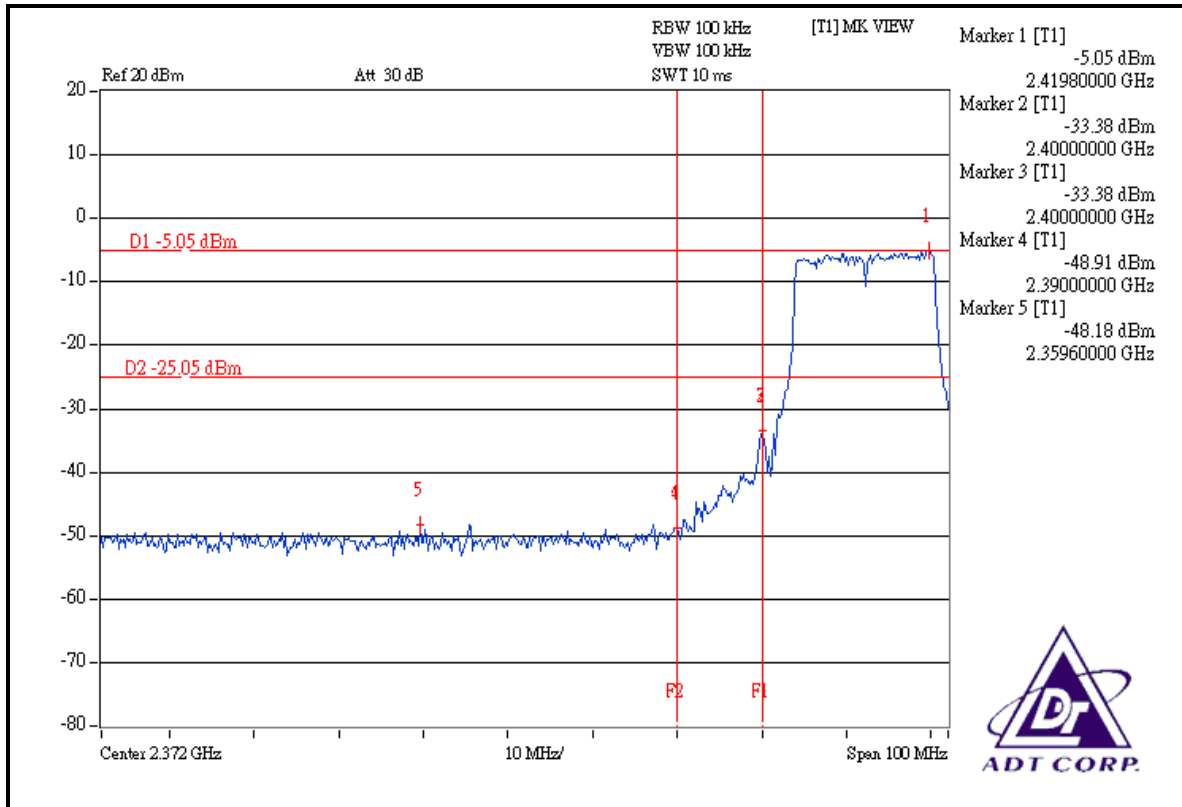

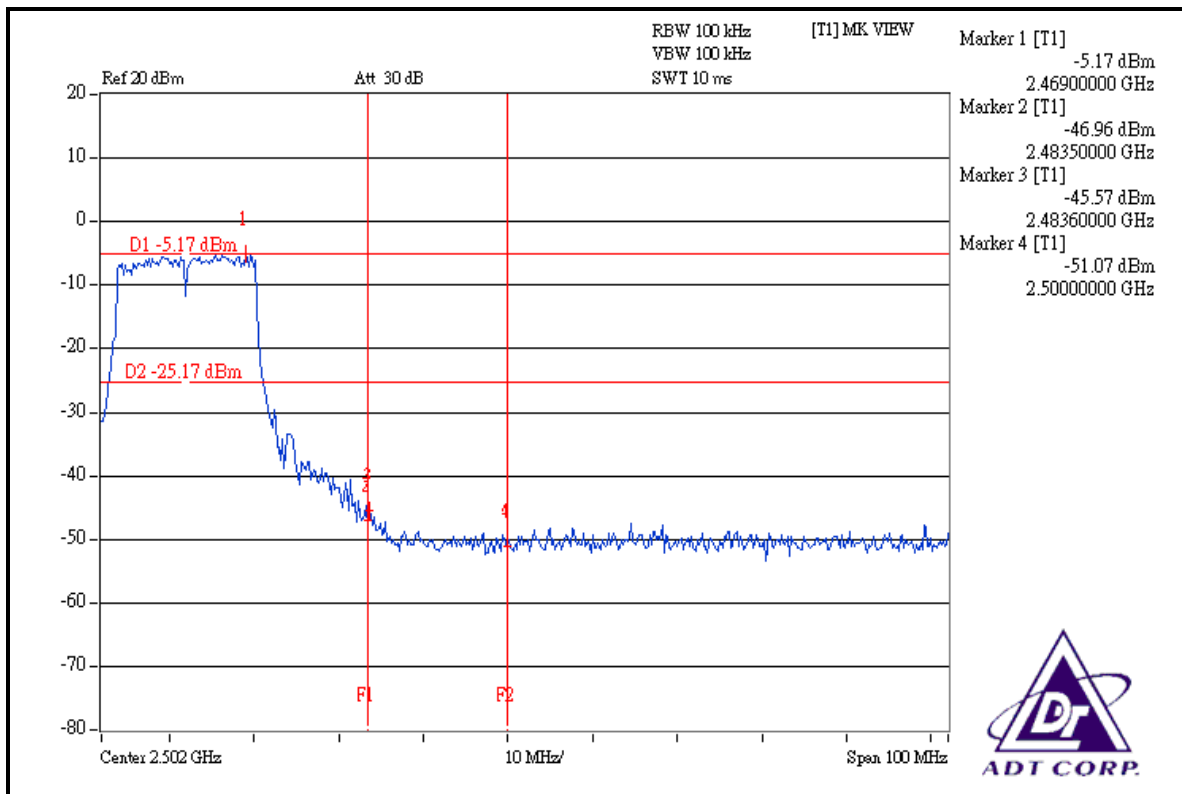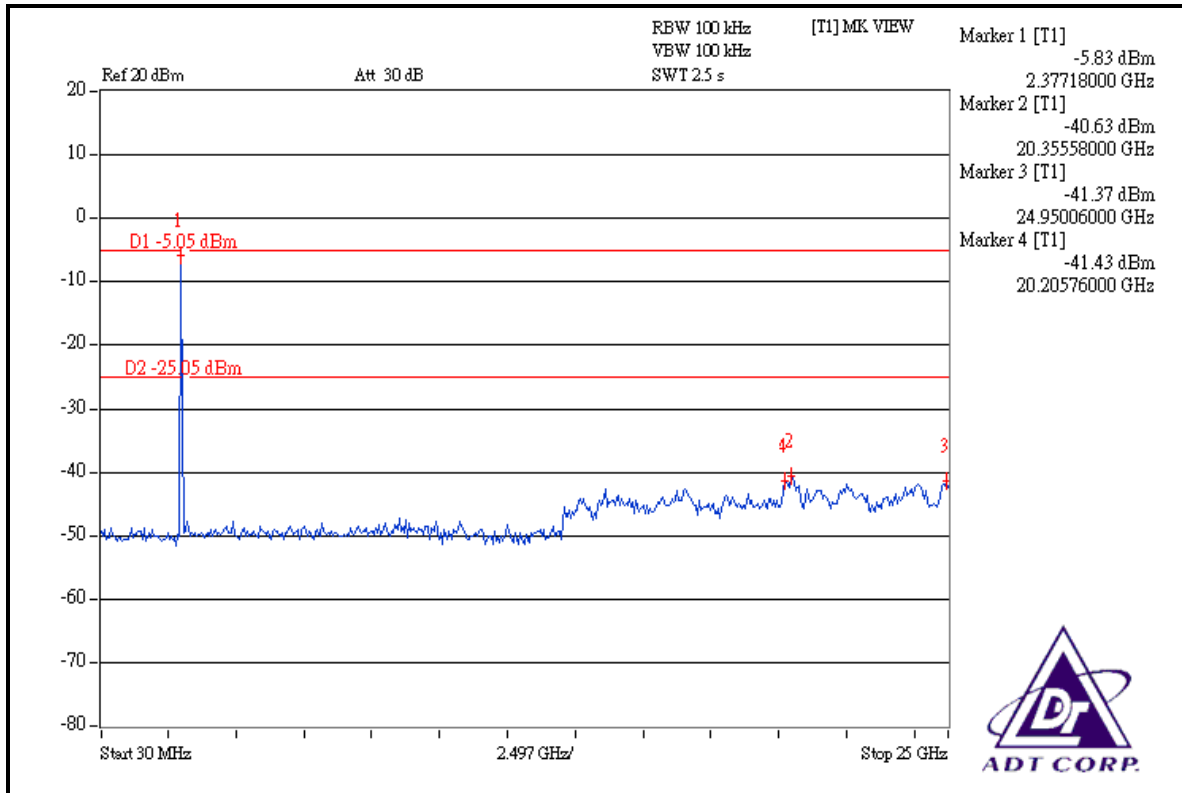

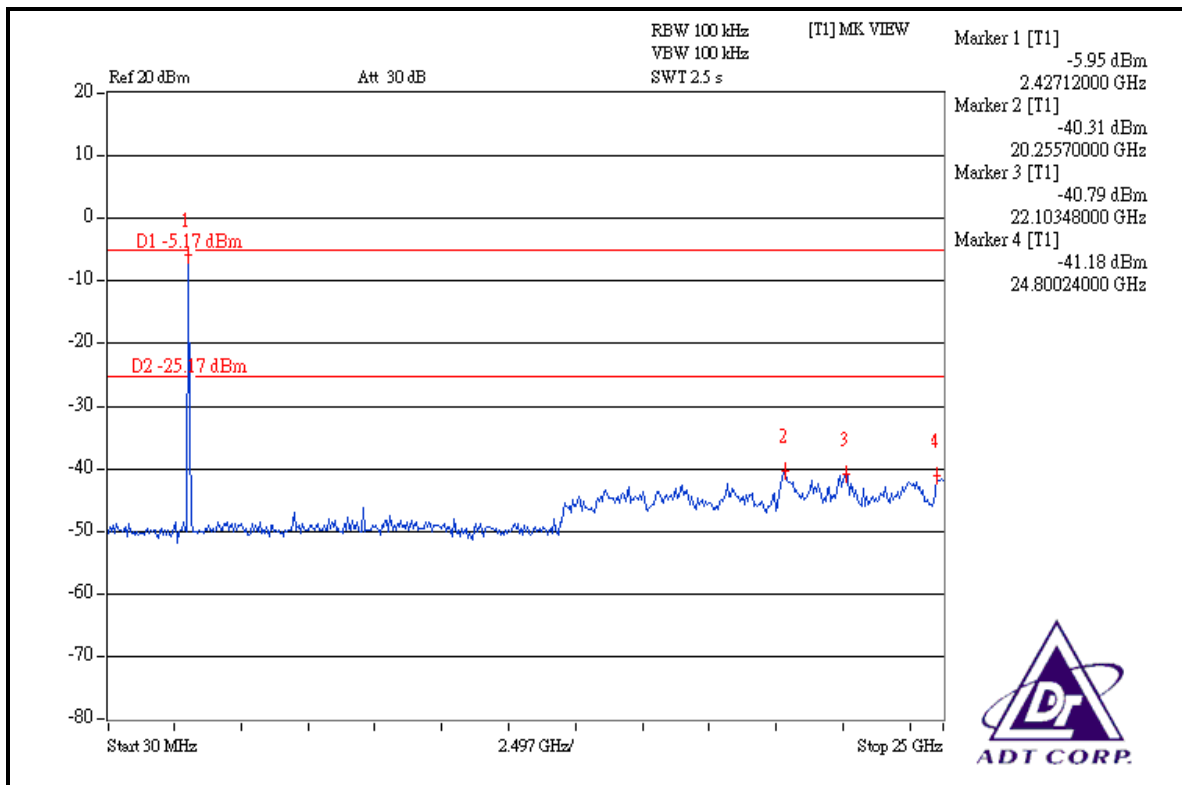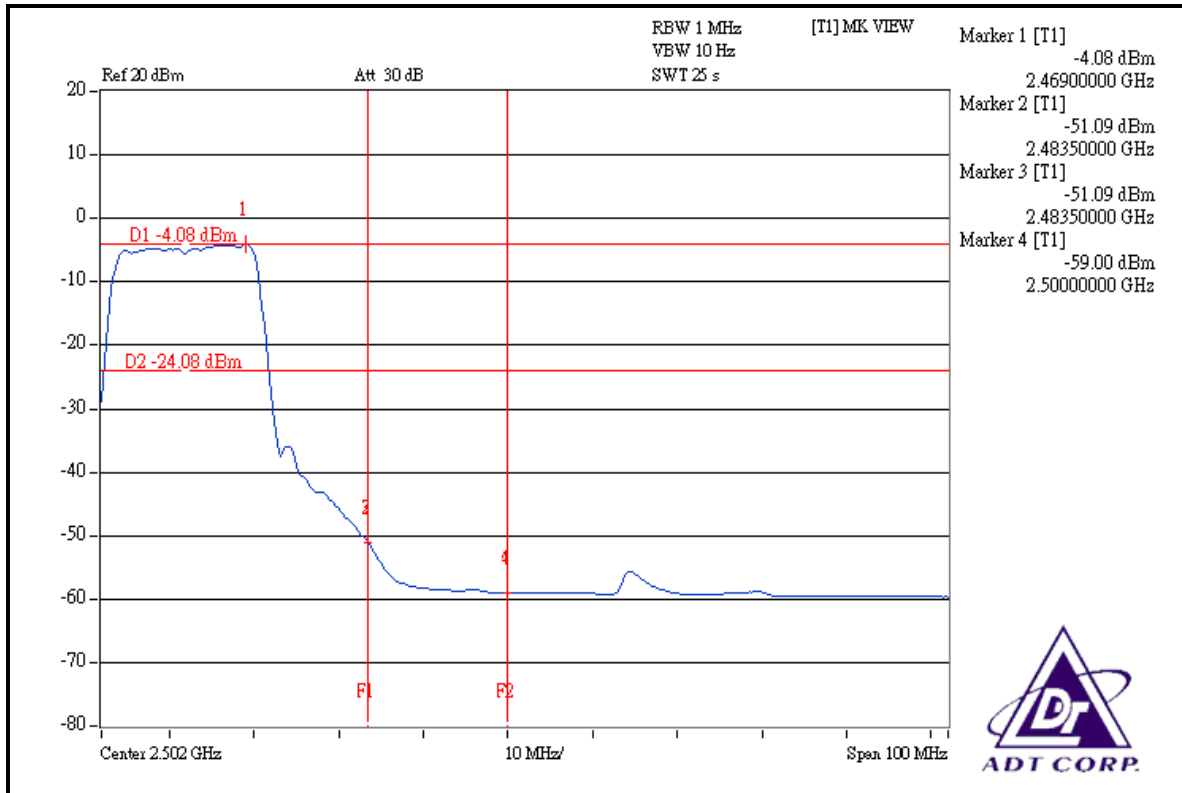







### **DRAFT 802.11n (20MHz) OFDM MODULATION: DUAL TX:**



**NOTE 1:** The band edge emission plot on the next page shows 48.84dBc between carrier maximum power and local maximum emission in restrict band (2.36100GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 110.26dBuV/m (Peak), so the maximum field strength in restrict band is  $110.26 - 48.84 = 61.42$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 53.26dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.91dBuV/m (Average), so the maximum field strength in restrict band is  $98.91 - 53.26 = 45.65$ dBuV/m which is under 54dBuV/m limit.

**NOTE 2:** The band edge emission plot on the next second page shows 45.89dBc between carrier maximum power and local maximum emission in restrict band (2.48360GHz) is 110.41dBuV/m (Peak), so the maximum field strength in restrict band is  $110.41 - 45.89 = 64.52$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 48.33dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 98.88dBuV/m (Average), so the maximum field strength in restrict band is  $98.88 - 48.33 = 50.55$ dBuV/m which is under 54dBuV/m limit.

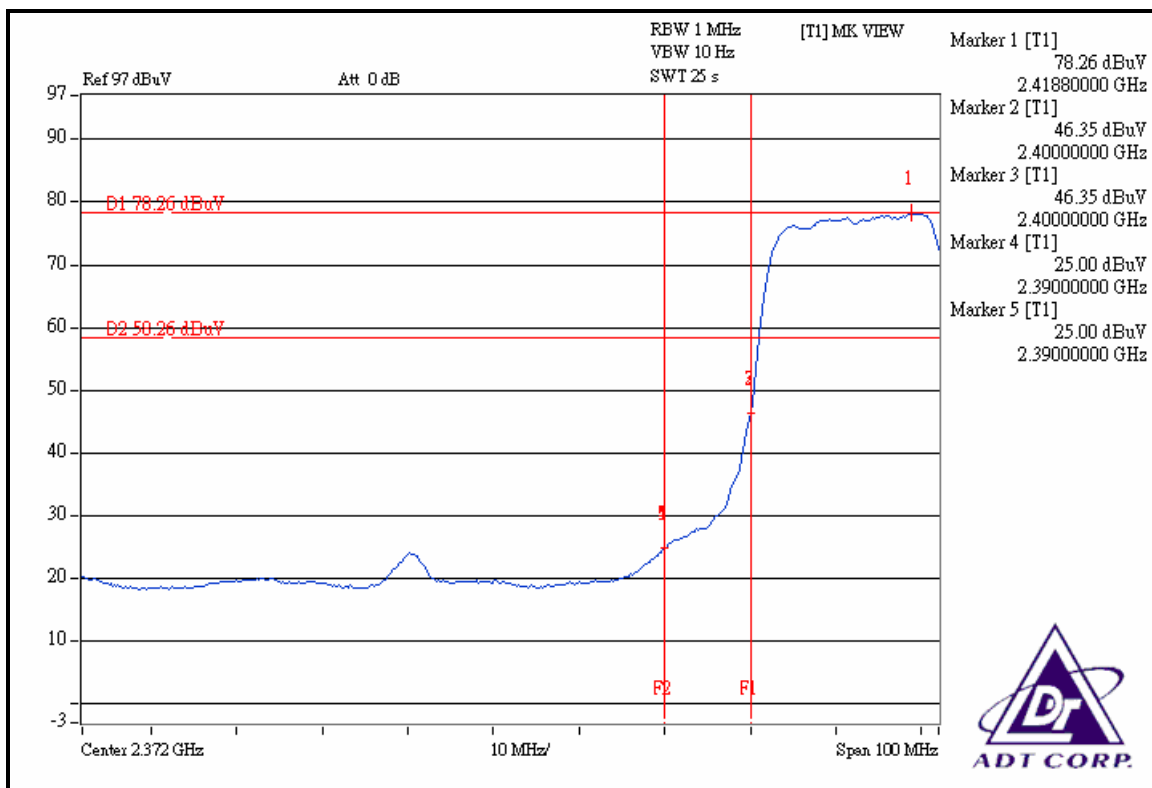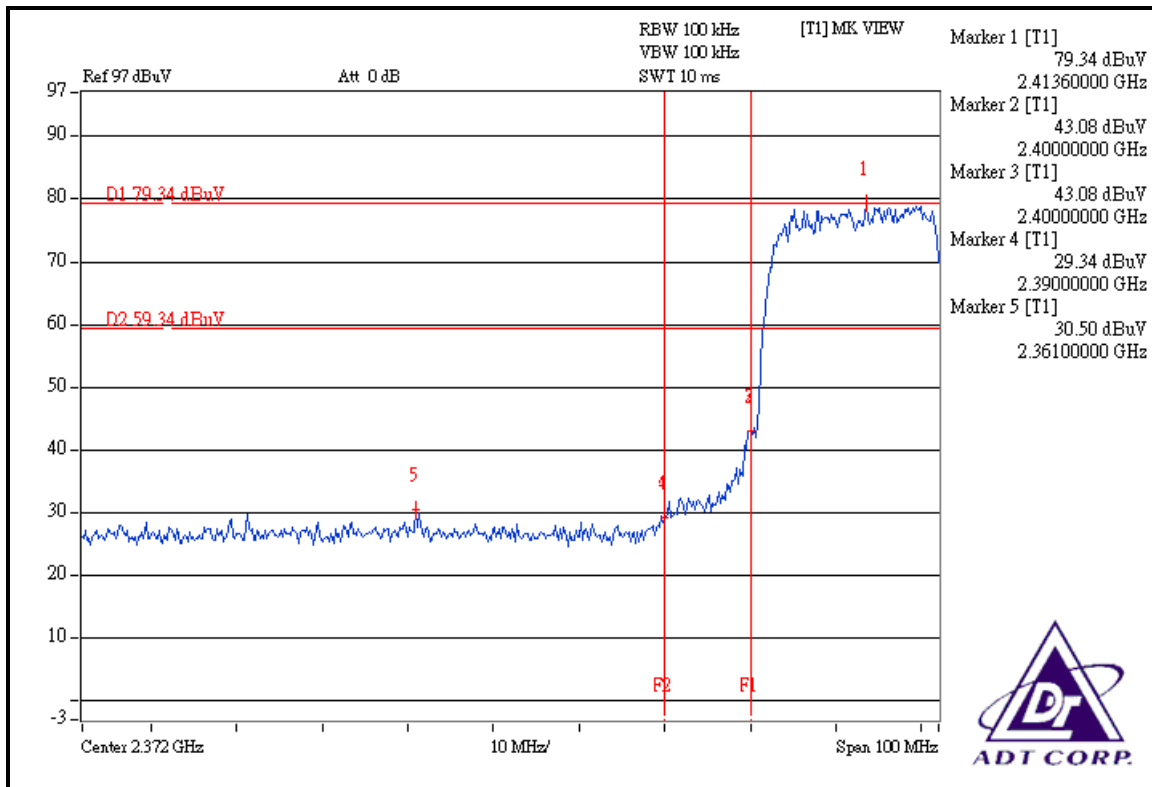

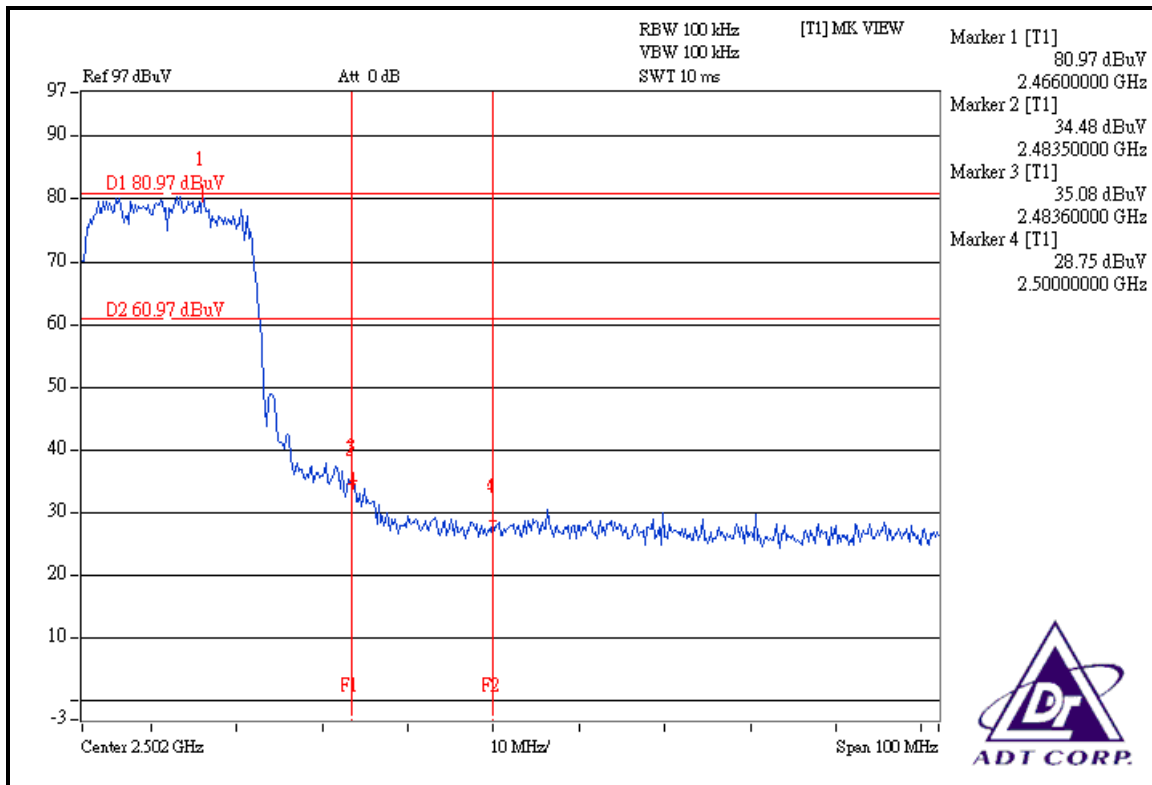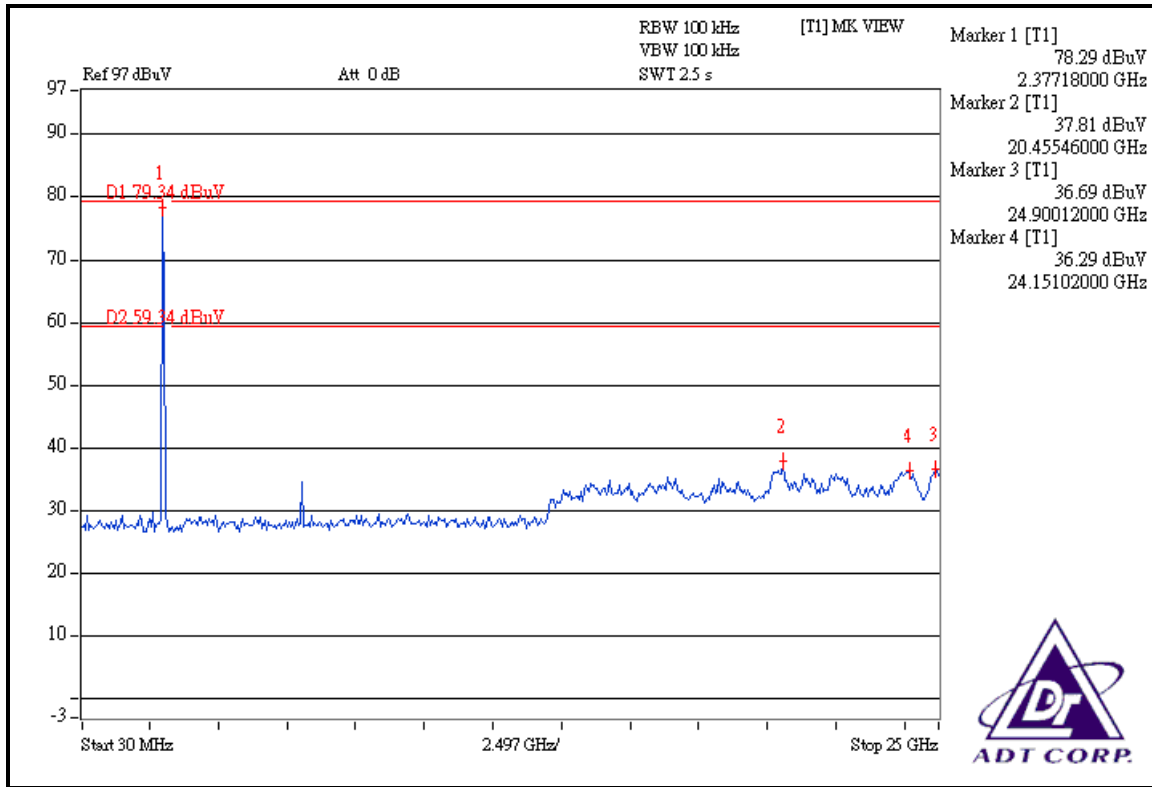

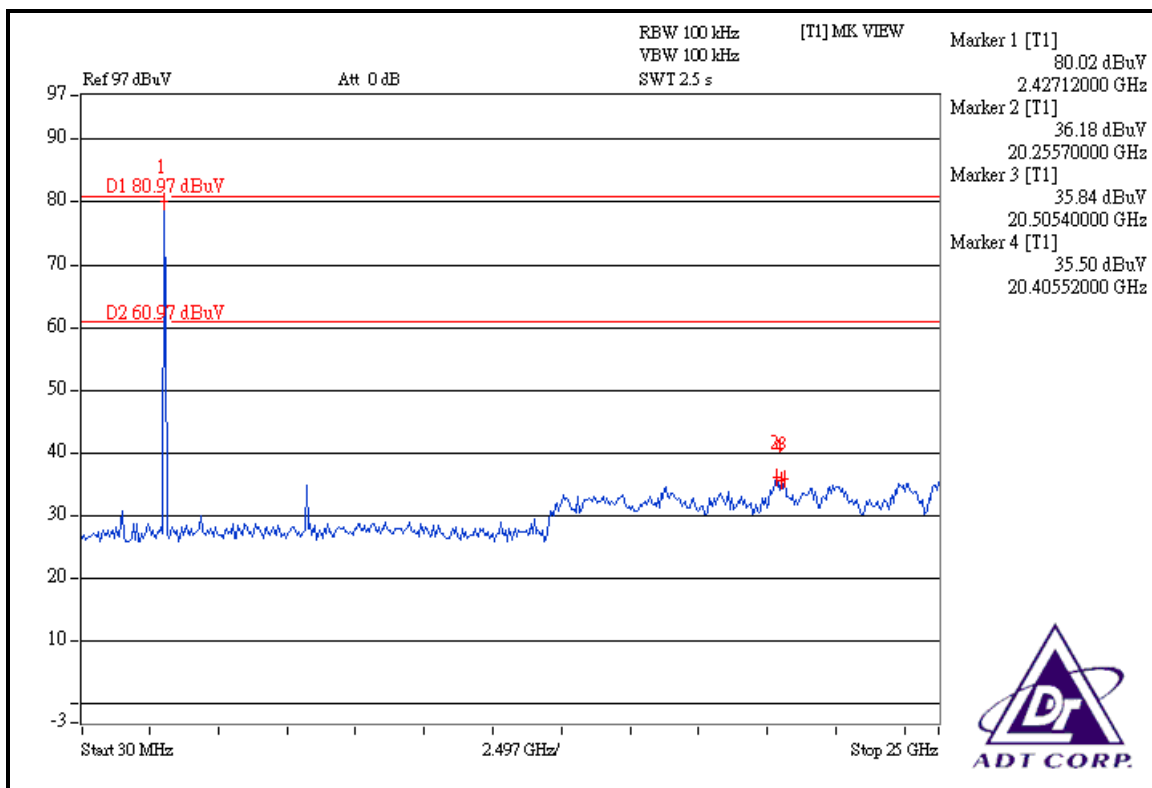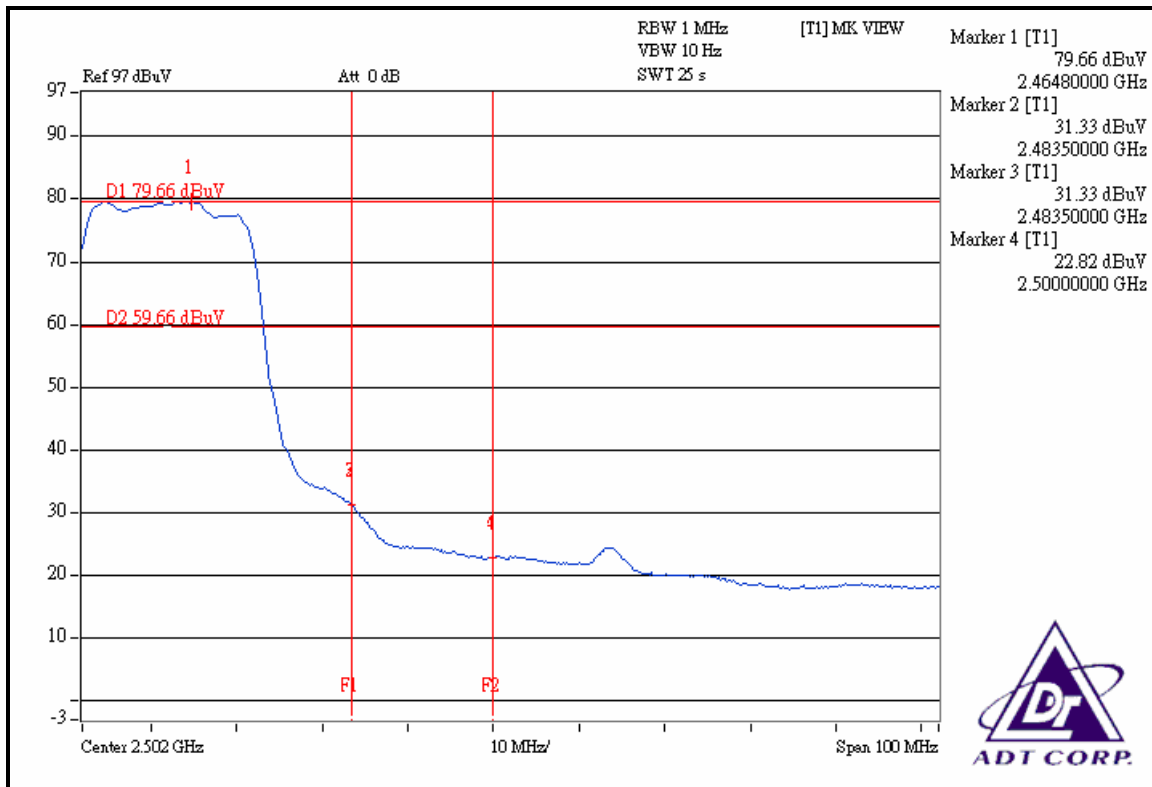





### **DRAFT 802.11n (40MHz) OFDM MODULATION: DUAL TX:**



**NOTE 1:** The band edge emission plot on the next page shows 40.49dBc between carrier maximum power and local maximum emission in restrict band (2.38640GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.67dBuV/m (Peak), so the maximum field strength in restrict band is  $105.67 - 40.49 = 65.18$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 46.01dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 95.55dBuV/m (Average), so the maximum field strength in restrict band is  $95.55 - 46.01 = 49.54$ dBuV/m which is under 54dBuV/m limit.

**NOTE 2:** The band edge emission plot on the next second page shows 36.75dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.2.7 is 105.08dBuV/m (Peak), so the maximum field strength in restrict band is  $105.08 - 36.75 = 68.33$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 44.73dBc between carrier maximum power and local maximum emission in restrict band (2.49000GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.2.7 is 95.06dBuV/m (Average), so the maximum field strength in restrict band is  $95.06 - 44.73 = 50.33$ dBuV/m which is under 54dBuV/m limit.

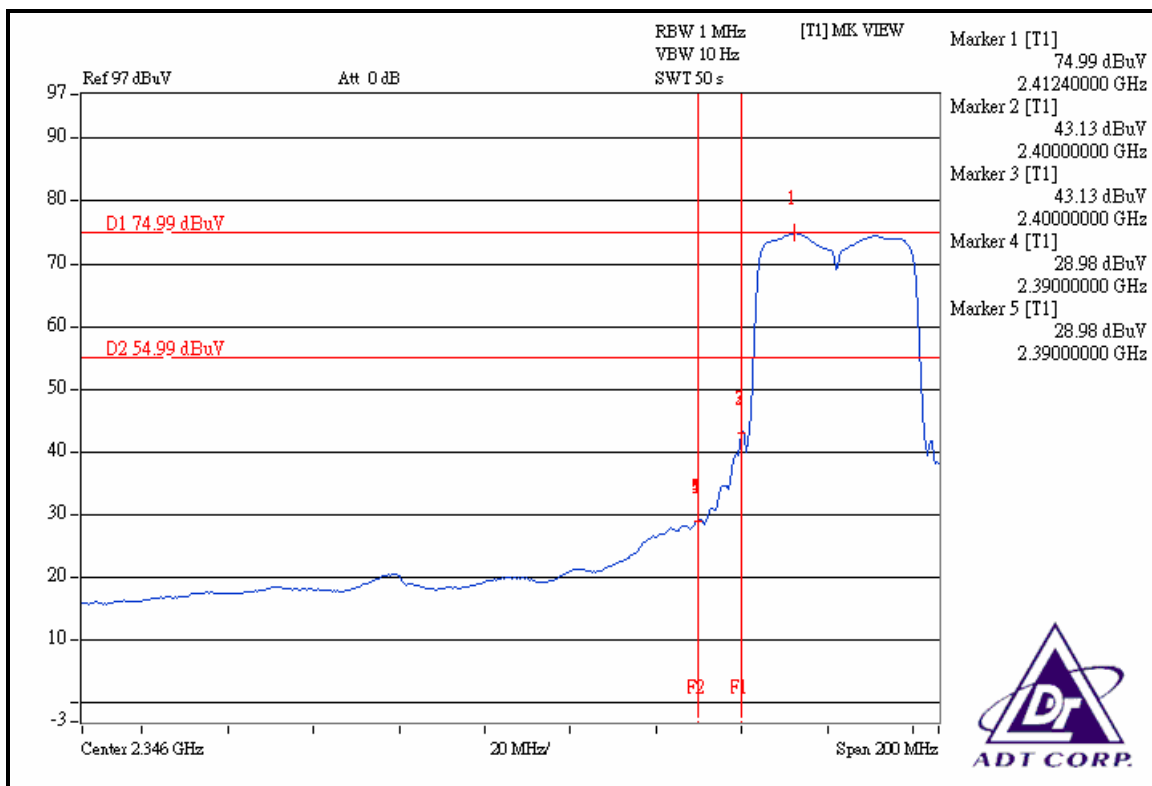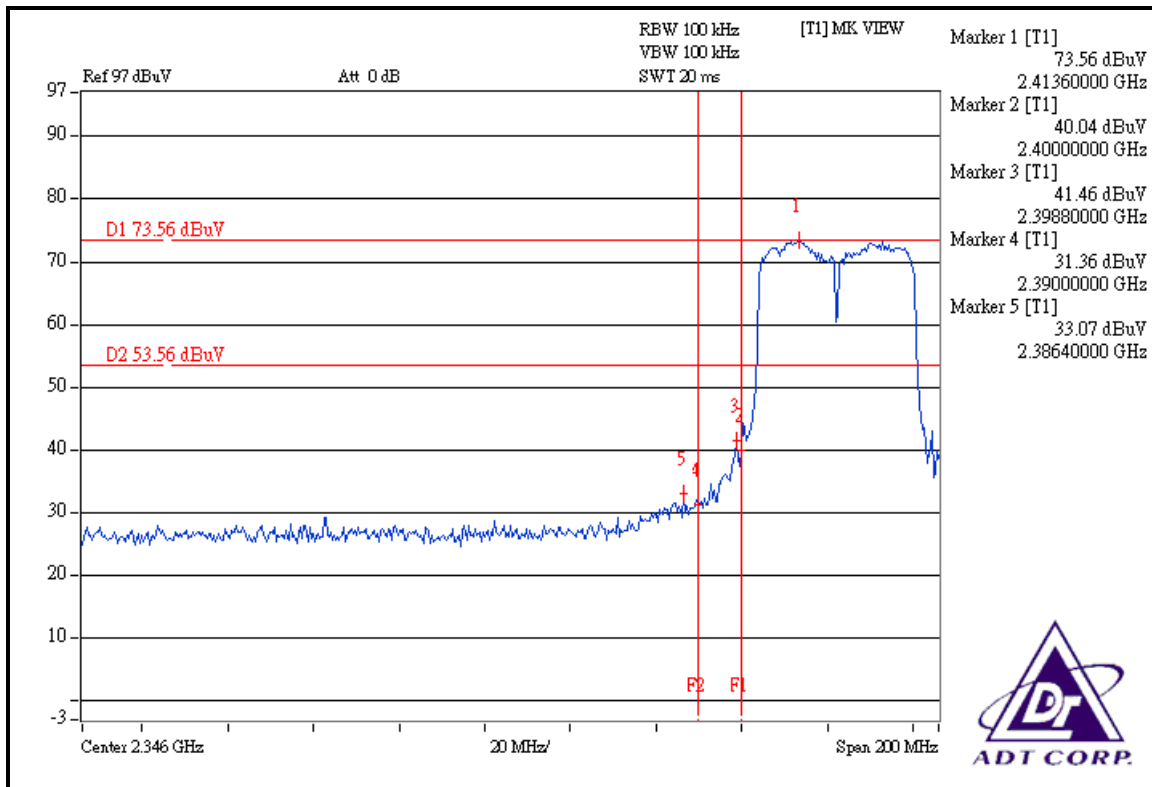

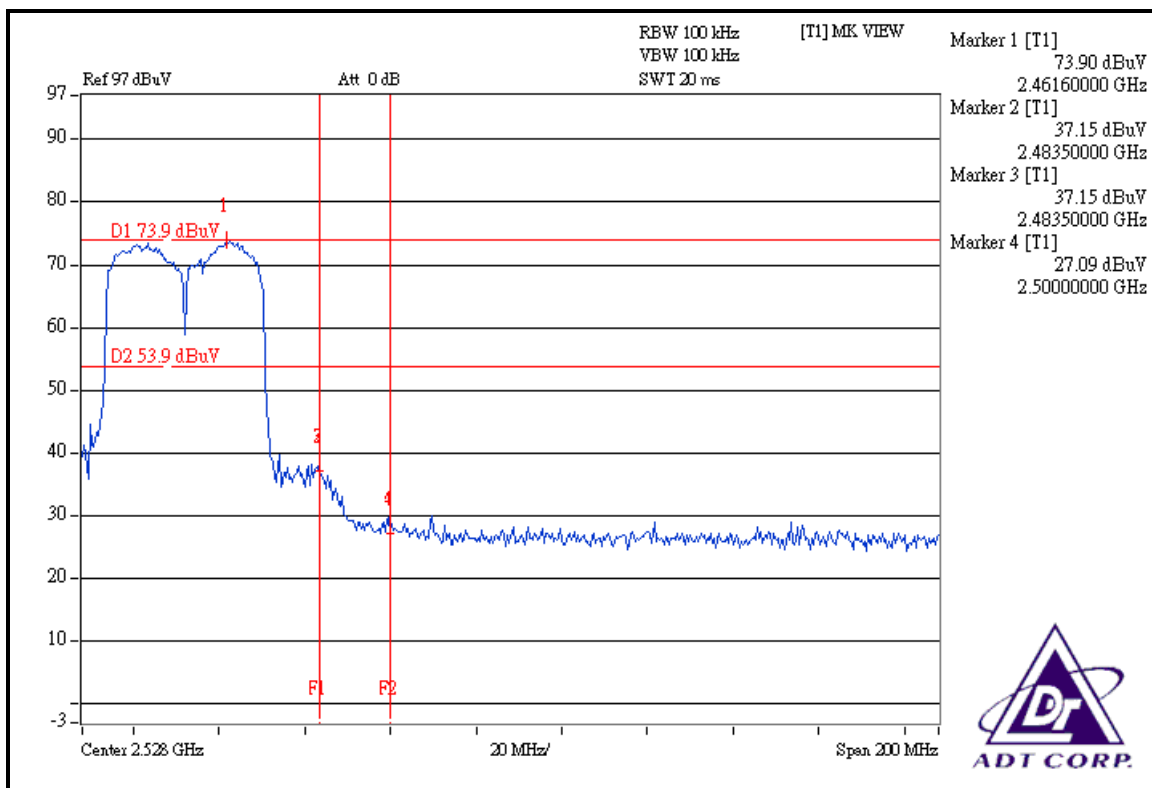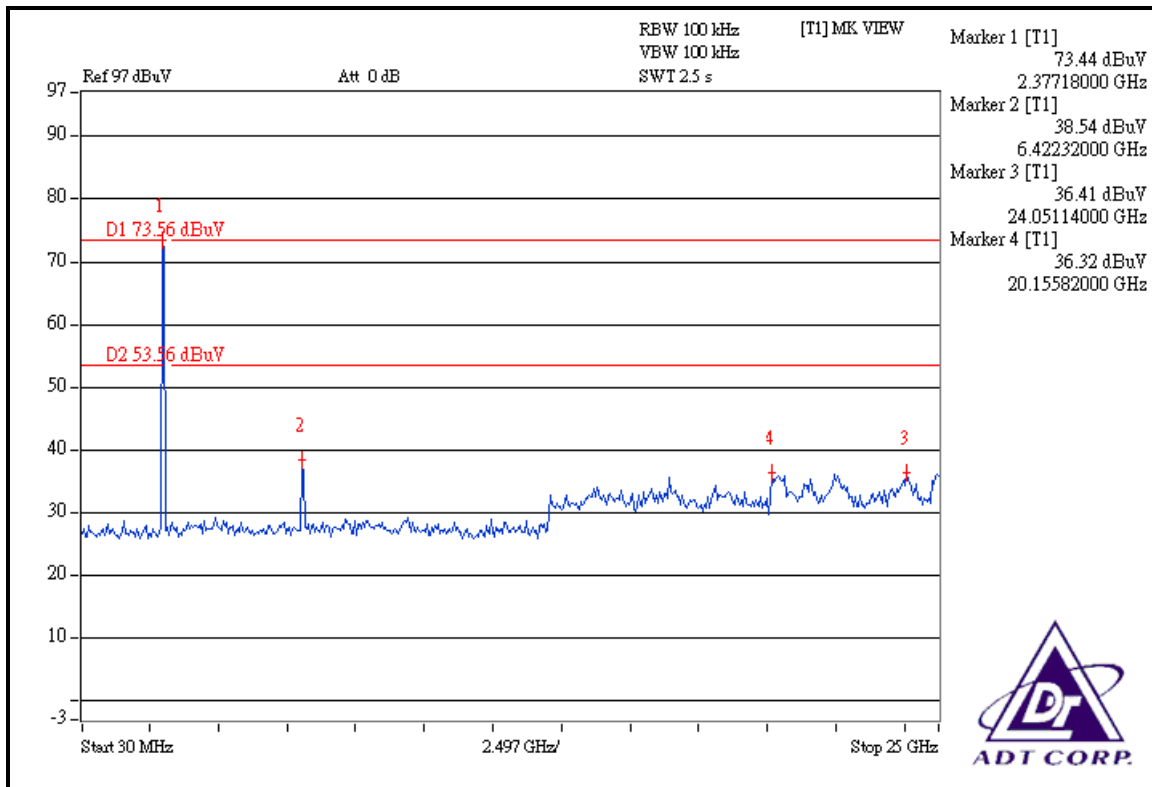

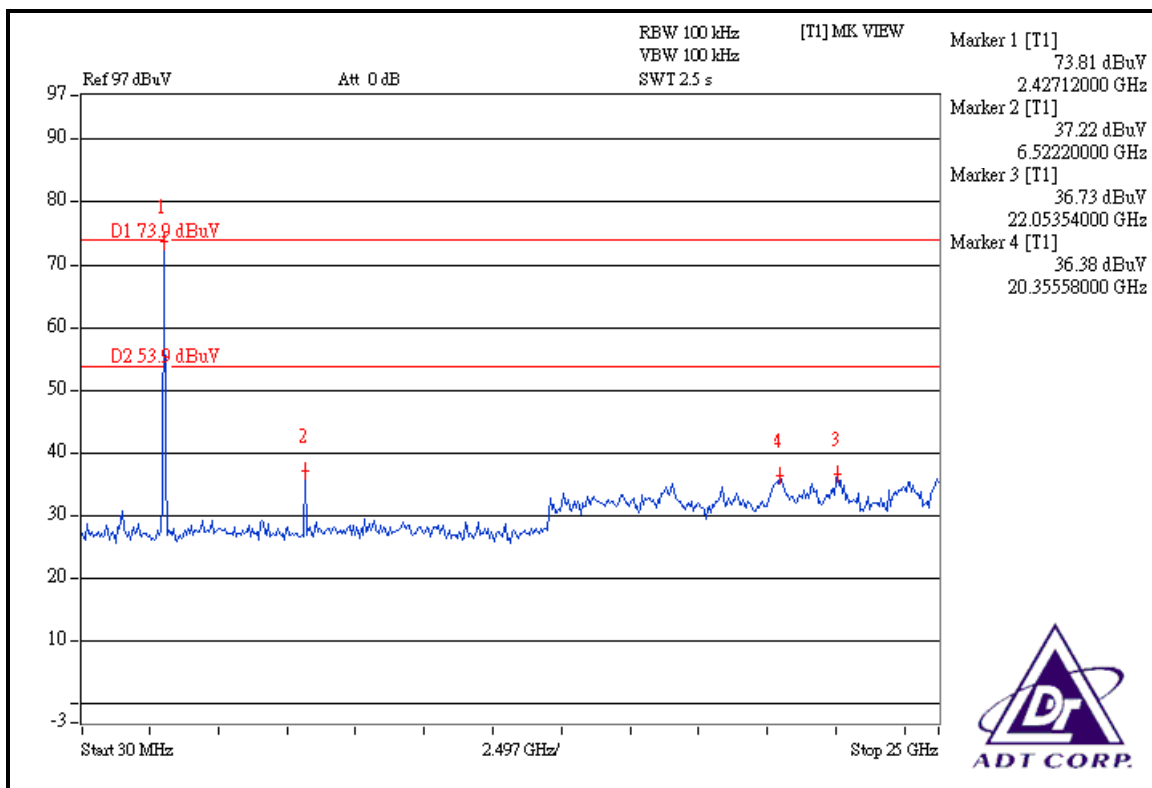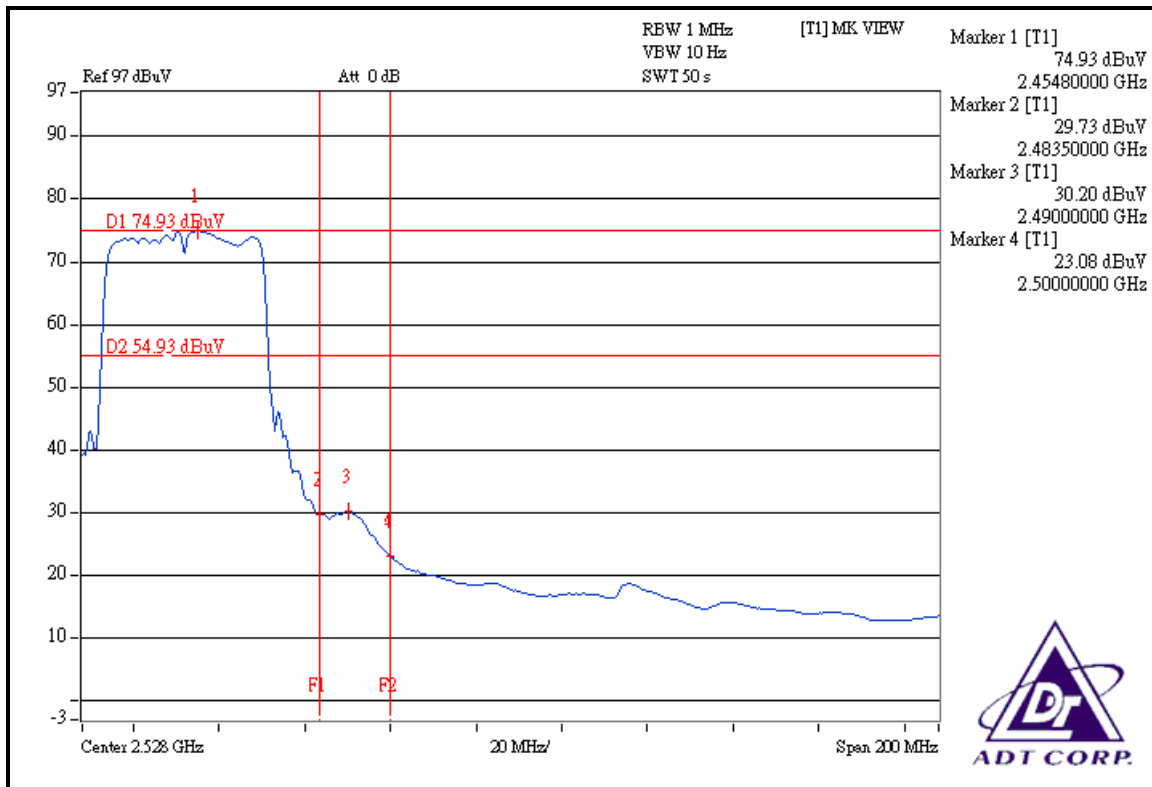





## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is Printed antenna without connector. The maximum Gain of the antenna is 1.51dBi.



## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, UL, A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA , CSA
<b>R.O.C.</b>	CNLA, BSMI, NCC
<b>Netherlands</b>	Telefication
<b>Singapore</b>	PSB , GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).  
If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



## **APPENDIX-A**

### **MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.