

FCC PART 15.247 TEST REPORT

For

Chongqing Jinou Science & Technology Development Co., Ltd.

D1-802, Overseas Students Pioneer Park No.71 Kecheng Rd, Jiulongpo District, Chongqing, China

Tested Model: BTS4004C2P
FCC ID: SI8BTS4004C2P

Report Type: Original Report	Equipment Name: 10m RS232 Bluetooth Serial Adapter
Report Number:	RSC191106001-0B
Date of Report Issue:	2019-12-03
Reviewed By:	Sula Huang
Prepared By:	Bay Area Compliance Laboratories Corp. (Chengdu) No.5040, Huilongwan Plaza, No. 1, Shawan Road, Jinniu District, Chengdu, Sichuan, China Tel: +86-28-65525123 Fax: +86-28-65525125 www.baclcorp.com

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk (*). Customer model name, addresses, names, trademarks etc. are not considered data. This report cannot be reproduced except in full, without prior written approval of the company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
MEASUREMENT UNCERTAINTY	4
TEST METHODOLOGY	5
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE.....	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
TEST EQUIPMENTS LIST.....	9
FCC §15.247 & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	11
APPLICABLE STANDARD.....	11
FCC §15.203 - ANTENNA REQUIREMENT	12
APPLICABLE STANDARD.....	12
ANTENNA CONNECTOR CONSTRUCTION.....	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD.....	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP	13
TEST PROCEDURE	13
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	14
TEST DATA.....	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	17
APPLICABLE STANDARD.....	17
EUT SETUP.....	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	18
TEST DATA.....	19
FCC §15.247(A) (1) - CHANNEL SEPARATION TEST.....	26
APPLICABLE STANDARD.....	26
TEST PROCEDURE	26
TEST DATA.....	26
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	32
APPLICABLE STANDARD.....	32
TEST PROCEDURE	32
TEST DATA.....	32
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	38
APPLICABLE STANDARD.....	38
TEST PROCEDURE	38
TEST DATA.....	38

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....42
APPLICABLE STANDARD.....42
TEST PROCEDURE42
TEST DATA.....42

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT58
APPLICABLE STANDARD.....58
TEST PROCEDURE58
TEST DATA.....58

FCC §15.247(d) - BAND EDGES TESTING64
APPLICABLE STANDARD.....64
TEST PROCEDURE64
TEST DATA.....64

F E M N A L

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Chongqing Jinou Science & Technology Development Co., Ltd.
Product	10m RS232 Bluetooth Serial Adapter
Tested Model	BTS4004C2P
FCC ID	SI8BTS4004C2P
Frequency Range	BT3.0: 2402MHz-2480MHz
Voltage Range	DC 6V
Measure approximately	99 mm (L) x 34 mm (W) x 17 mm (H)
Sample serial number	191106001/01 (assigned by the BACL, Chengdu)
Sample/EUT Status	The test sample was in good condition and received : 2019-11-06

Note: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Objective

This report is prepared on behalf of **Chongqing Jinou Science & Technology Development Co., Ltd.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

None

Measurement Uncertainty

Item		Measurement Uncertainty	U_{cispr}	
Radiated Emission	30MHz-200MHz	H	4.47 dB	6.3dB
		V	4.73 dB	6.3dB
	200MHz-1GHz	H	4.87 dB	6.3dB
		V	5.93 dB	6.3dB
	1GHz-6GHz		4.74 dB	5.2dB
	6GHz-18GHz		4.76 dB	5.5dB
18GHz-40GHz		5.48 dB	-	

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the corresponding inclusion factor K when the inclusion probability is about 95%.

Test Methodology

All measurements contained in this report were conducted with:

ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Chengdu) to collect test data is located No.5040, Huilongwan Plaza, No. 1, Shawan Road, Jinniu District, Chengdu, Sichuan, China.

Bay Area Compliance Laboratories Corp. (Chengdu) lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4324.01) and the FCC designation No. CN1186 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

FENVA

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

Equipment Modifications

No modification was made to the EUT.

EUT Exercise Software

Test software: "BlueSuite_2_6_2_632" installed in device was used during test, the setting was configured as below:

Test Software Version		BlueSuite_2_6_2_632		
Test Frequency		2402MHz	2441MHz	2480MHz
GFSK	Power Level	100	100	100
$\pi/4$ -DQPSK	Power Level	100	100	100
8DPSK	Power Level	100	100	100

Support Equipment List and Details


Manufacturer	Description	Model Number	Serial Number
Shantou Yuewei Co.,Ltd	Adapter 1	YW506	Unknown
Unknown	Test Board	Unknown	Unknown
DELL	Laptop	PP01L	3F438A01
DELL	Adapter 2	ADP-90FB REV.B	Unknown

External I/O Cable

Cable Description	Length (m)	From	To
Unshielded Power Cable	1.2	Adapter 1	EUT
Unshielded Control Cable	0.5	Test Board	Laptop
Unshielded Power Cable	1.8	Laptop	Adapter 2

Block Diagram of Test Setup

Conducted Emissions

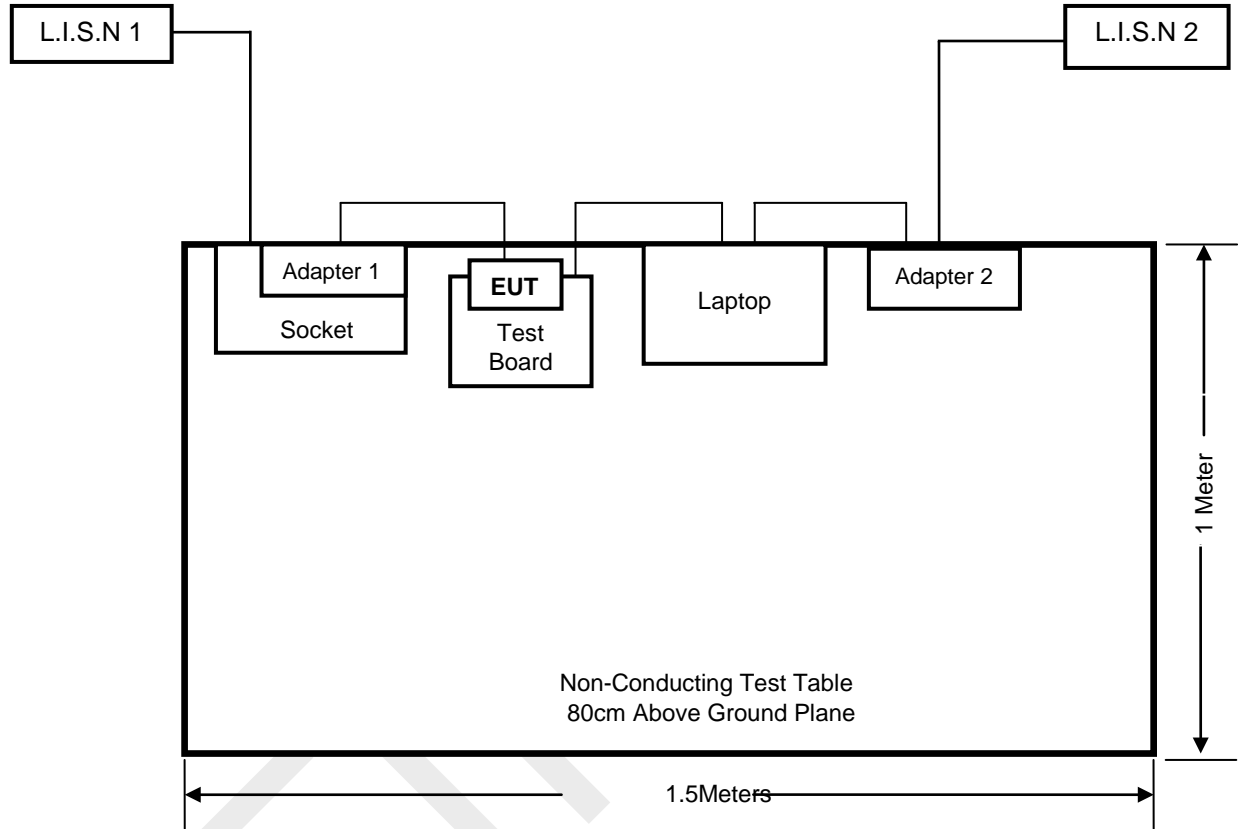

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

TEST EQUIPMENTS LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission					
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2019-04-15	2020-04-14
ROHDE&SCHWARZ	L.I.S.N.	ENV216	3560.6550.16	2019-02-25	2020-02-24
EMCO	L.I.S.N.	3810/2BR	9509-1102	NCR	NCR
HP	RF Limiter	11947A	3107A01270	2019-10-18	2020-10-17
Unknown	Conducted Cable	L-E003	000003	2019-08-05	2020-08-04
Rohde & Schwarz	EMC32	EMC32	V 8.52.0	NCR	NCR
Radiated Emission					
EMCT	Semi-Anechoic Chamber	966	001	2017-05-18	2020-05-17
SONOMA INSTRUMENT	Amplifier	310 N	186684	2019-09-06	2020-09-05
SUNOL SCIENCES	Broadband Antenna	JB3	A121808	2017-05-19	2020-05-18
INMET	Attenuator	18N-6dB	N/A	2019-10-17	2020-10-16
Rohde & Schwarz	EMI Test Receiver	ESR3	102456	2019-04-15	2020-04-14
Rohde & Schwarz	Spectrum Analyzer	FSU26	200835	2019-04-15	2020-04-14
EMCO	Horn Antenna	3115	2192	2019-09-25	2021-09-24
A.H. Systems, Inc	Amplifier	PAM-0118P	467	2019-08-30	2020-08-29
EM Electronics	RF Pre-Amplifier	EM18G40	060725	2019-07-24	2020-07-23
Rohde & Schwarz	EMI Test Receiver	ESIB 40	100215	2019-04-15	2020-04-14
A.H. Systems, Inc	Horn Antenna	SAS-574	510	2019-09-02	2021-09-01
Sinoscite.,Co Ltd	Reject Band Filter	BSF 2402-2480MN	0898-005	2019-11-10	2020-11-09
MICRO-TRONICS	High Pass Filter	HPM50111	G216	2019-11-10	2020-11-09
Unknown	RF Cable (Below 1GHz)	L-E005	000005	2019-09-06	2020-09-05
Unknown	RF Cable (Below 1GHz)	T-E128	000128	2019-10-17	2020-10-16
Unknown	RF Cable (Below 1GHz)	T-E129	000129	2018-11-27	2019-11-26
Unknown	RF Cable (Above 1GHz)	T-E069	000069	2019-07-24	2020-07-23
Micro-coax	RF Cable (Above 1GHz)	T-E209	MFR 64639 2310	2019-07-19	2020-07-18
Rohde & Schwarz	EMC32	EMC32	V9.10.00	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2019-04-15	2020-04-14
WEINSCHL ENGINEERING	Attenuator	1A 10dB	AB1165	2019-08-05	2020-08-04
E-Microwave	DC Block	EMDCB-00036	OE01304225	2019-08-05	2020-08-04
Unknown	RF Cable	Unknown	000007	Each Time	Each Time

FURNIVAL

FCC §15.247 & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3–1.34	614	1.63	※(100)	30
1.34–30	824/f	2.19/f	※(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; ※ = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Per 447498 D01 General RF Exposure Guidance v06, simultaneous transmission MPE test exclusion applies when the sum of the MPE for all simultaneous transmitting antennas incorporated in a host device, based on the calculated/estimated, numerically modeled or measured field strengths or power density, is ≤ 1.0.

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where:

S = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	0.5	1.12	4.50	2.82	20	0.0006	1.00

Note: The device meet FCC MPE at ≥20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT have one PCB antenna, which was permanently attached and the antenna gain is 0.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

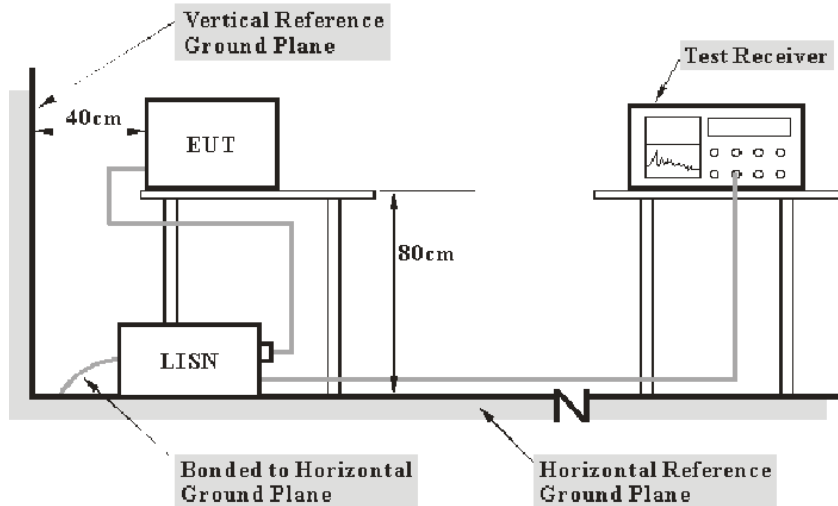

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to AC 120 V/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions


Temperature:	22 °C
Relative Humidity:	51 %
ATM Pressure:	95.5 kPa

The testing was performed by Tian Maofan on 2019-11-18.

Test Mode: Transmitting

Low channel of EDR (8DPSK) mode - Worst Case


AC120 V, 60 Hz, Line:

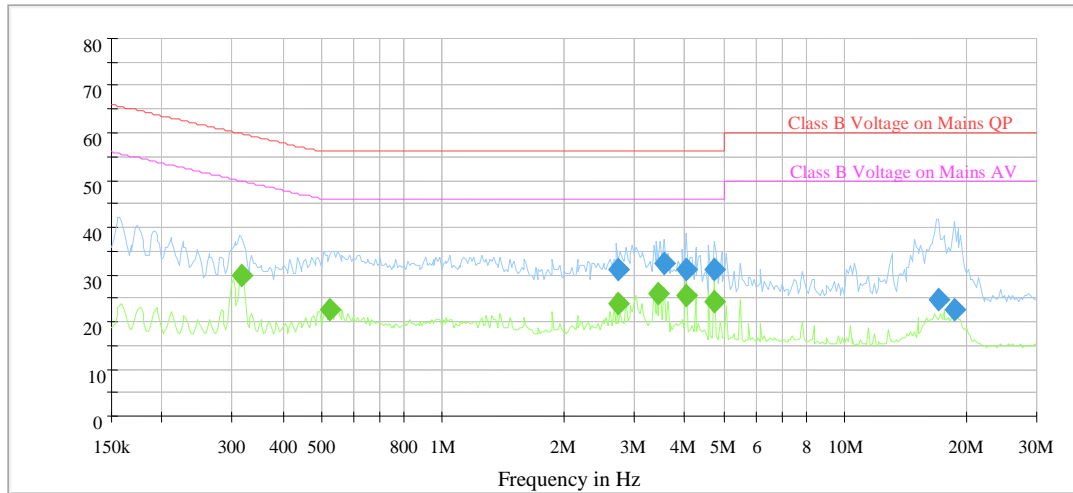

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.719009	31.0	200.0	9.000	L1	19.6	25.0	56.0
3.555491	32.4	200.0	9.000	L1	19.6	23.6	56.0
4.045790	31.3	200.0	9.000	L1	19.7	24.7	56.0
4.743144	31.1	200.0	9.000	L1	19.7	24.9	56.0
17.107731	24.7	200.0	9.000	L1	20.0	35.3	60.0
18.710005	22.6	200.0	9.000	L1	20.1	37.4	60.0

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.317628	29.7	200.0	9.000	L1	19.6	20.1	49.8
0.525770	22.5	200.0	9.000	L1	19.6	23.5	46.0
2.719009	24.0	200.0	9.000	L1	19.6	22.0	46.0
3.416952	25.8	200.0	9.000	L1	19.6	20.2	46.0
4.045790	25.7	200.0	9.000	L1	19.7	20.3	46.0
4.733144	24.1	200.0	9.000	L1	19.7	21.9	46.0

AC120 V, 60 Hz, Neutral:

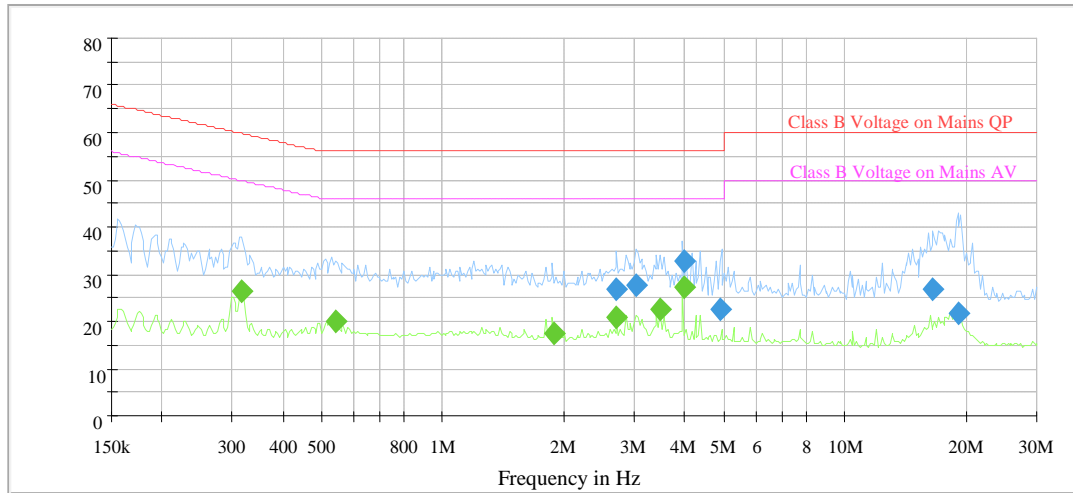

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.709009	26.6	200.0	9.000	N	19.7	29.4	56.0
3.022934	27.8	200.0	9.000	N	19.7	28.2	56.0
3.966170	32.7	200.0	9.000	N	19.7	23.3	56.0
4.925532	22.7	200.0	9.000	N	19.7	33.3	56.0
16.604742	26.7	200.0	9.000	N	20.1	33.3	60.0
19.075976	21.7	200.0	9.000	N	20.2	38.3	60.0

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.317628	26.6	200.0	9.000	N	19.6	23.2	49.8
0.541802	20.2	200.0	9.000	N	19.6	25.8	46.0
1.883108	17.3	200.0	9.000	N	19.6	28.7	46.0
2.709009	21.0	200.0	9.000	N	19.7	25.0	46.0
3.475532	22.6	200.0	9.000	N	19.7	23.4	46.0
3.966170	27.0	200.0	9.000	N	19.7	19.0	46.0

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter
- 3) Margin = Limit – Corrected Amplitude


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

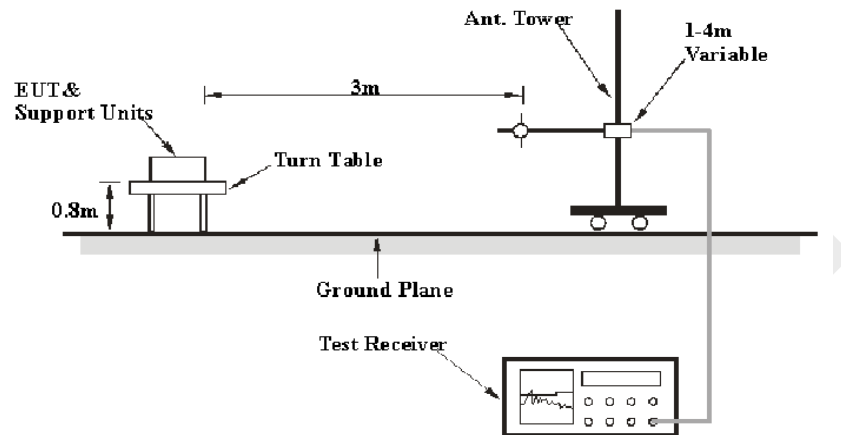

Above 1GHz:

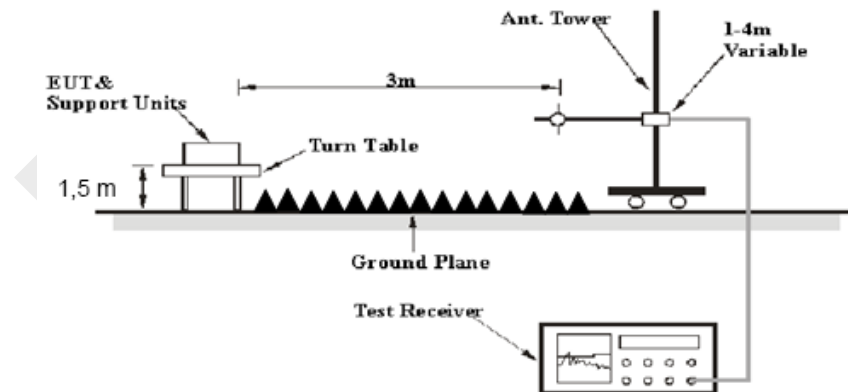

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz–1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data


Environmental Conditions

Temperature:	20 °C
Relative Humidity:	52 %
ATM Pressure:	95.4 kPa

The testing was performed by Tian Maofan on 2019-11-18.

Test Mode: Transmitting
 (Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode and the worst case is 8DPSK mode)

30 MHz to 1 GHz
 Low channel of EDR mode(8DPSK)—Worst Case

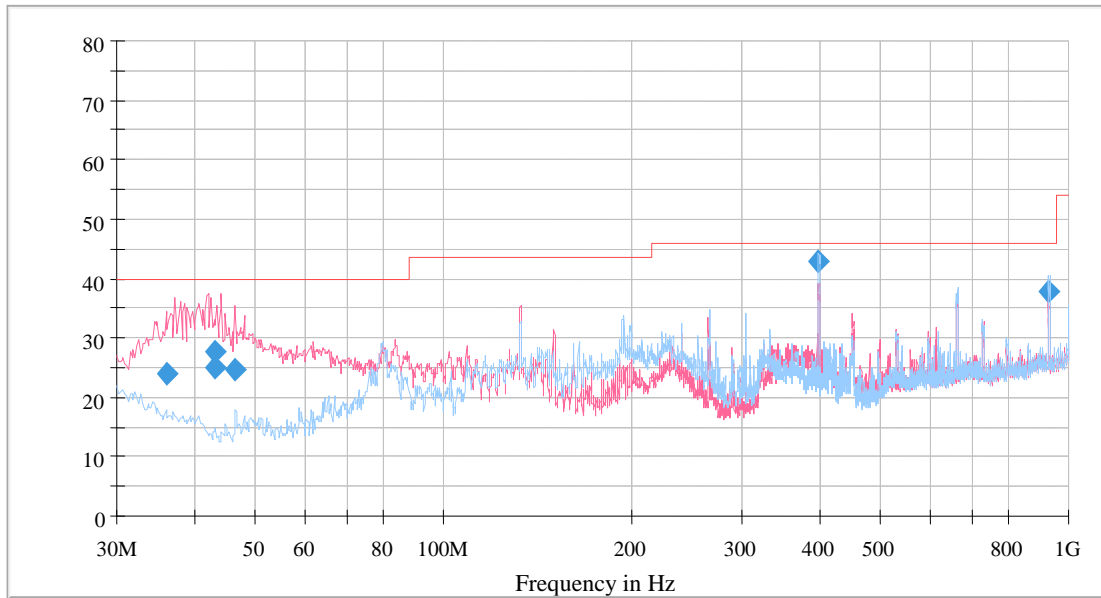

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.039200	23.88	40.00	16.12	200.0	120.000	124.0	V	30.0	-8.9
43.001900	24.95	40.00	15.05	200.0	120.000	113.0	V	171.0	-12.9
43.042000	27.76	40.00	12.24	200.0	120.000	124.0	V	37.0	-12.9
46.370700	24.54	40.00	15.46	200.0	120.000	104.0	V	29.0	-14.9
398.793100	42.80	46.00	3.20	200.0	120.000	106.0	H	21.0	-8.7
930.320600	37.80	46.00	8.20	200.0	120.000	103.0	H	113.0	-0.4

1GHz-25GHz:

EDR Mode (8DPSK)-Worst Case

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Limit	Margin
	Reading	Measurement	Polar	Factor					
MHz	dBµV	PK/AV	H/V	(dB/m)	dB	dB	dBµV/m	dBµV/m	dB
Frequency: 2402 MHz									
2381	28.08	PK	H	29.17	3.53	0.00	60.78	74.00	13.22
2381	14.46	AV	H	29.17	3.53	0.00	47.16	54.00	6.84
2320	28.75	PK	V	29.25	3.49	0.00	61.49	74.00	12.51
2320	14.28	AV	V	29.25	3.49	0.00	47.02	54.00	6.98
4804	58.57	PK	H	32.99	5.05	42.88	53.73	74.00	20.27
4804	41.33	AV	H	32.99	5.05	42.88	36.49	54.00	17.51
4804	57.57	PK	V	32.99	5.05	42.88	52.73	74.00	21.27
4804	39.17	AV	V	32.99	5.05	42.88	34.33	54.00	19.67
7206	45.78	PK	H	35.75	6.43	43.54	44.42	74.00	29.58
7206	30.66	AV	H	35.75	6.43	43.54	29.30	54.00	24.70
9608	45.77	PK	H	38.05	7.39	43.90	47.31	74.00	26.69
9608	30.74	AV	H	38.05	7.39	43.90	32.28	54.00	21.72
1602	65.68	PK	H	26.28	2.92	41.66	53.22	74.00	20.78
1602	65.35	AV	H	26.28	2.92	41.66	52.89	54.00	1.11
1602	60.55	PK	V	26.28	2.92	41.66	48.09	74.00	25.91
1602	59.80	AV	V	26.28	2.92	41.66	47.34	54.00	6.66
Frequency: 2441 MHz									
4882	56.87	PK	H	33.19	5.09	42.93	52.22	74.00	21.78
4882	34.84	AV	H	33.19	5.09	42.93	30.19	54.00	23.81
4882	57.91	PK	V	33.19	5.09	42.93	53.26	74.00	20.74
4882	35.59	AV	V	33.19	5.09	42.93	30.94	54.00	23.06
7323	45.74	PK	H	36.01	6.49	43.56	44.68	74.00	29.32
7323	32.36	AV	H	36.01	6.49	43.56	31.30	54.00	22.70
9764	45.98	PK	H	38.27	7.45	43.90	47.80	74.00	26.20
9764	30.71	AV	H	38.27	7.45	43.90	32.53	54.00	21.47
1628	66.19	PK	H	26.50	2.94	41.68	53.95	74.00	20.05
1628	64.79	AV	H	26.50	2.94	41.68	52.55	54.00	1.45
1628	62.83	PK	V	26.50	2.94	41.68	50.59	74.00	23.41
1628	62.39	AV	V	26.50	2.94	41.68	50.15	54.00	3.85

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Limit	Margin
	Reading	Measurement	Polar	Factor					
MHz	dBµV	PK/AV	H/V	(dB/m)	dB	dB	dBµV/m	dBµV/m	dB
Frequency: 2480 MHz									
2492.54	29.91	PK	H	29.01	3.61	0.00	62.53	74.00	11.47
2492.54	15.29	AV	H	29.01	3.61	0.00	47.91	54.00	6.09
2485.58	29.81	PK	V	29.02	3.61	0.00	62.44	74.00	11.56
2485.58	15.52	AV	V	29.02	3.61	0.00	48.15	54.00	5.85
4960	59.21	PK	H	33.40	5.14	42.98	54.77	74.00	19.23
4960	39.87	AV	H	33.40	5.14	42.98	35.43	54.00	18.57
4960	55.33	PK	V	33.40	5.14	42.98	50.89	74.00	23.11
4960	36.83	AV	V	33.40	5.14	42.98	32.39	54.00	21.61
7440	46.11	PK	H	36.27	6.55	43.59	45.34	74.00	28.66
7440	30.83	AV	H	36.27	6.55	43.59	30.06	54.00	23.94
9920	45.08	PK	H	38.49	7.51	43.90	47.18	74.00	26.82
9920	30.81	AV	H	38.49	7.51	43.90	32.91	54.00	21.09
1654	65.26	PK	H	26.72	2.96	41.69	53.25	74.00	20.75
1654	64.85	AV	H	26.72	2.96	41.69	52.84	54.00	1.16
1654	63.41	PK	V	26.72	2.96	41.69	51.4	74.00	22.60
1654	63.00	AV	V	26.72	2.96	41.69	50.99	54.00	3.01

Note:


Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor


Margin = Limit- Corr. Amplitude

Please refer to the below pre-scan plot of worst case:


EDR Mode (8DPSK): Low Channel_Horizontal_1GHz-2GHz

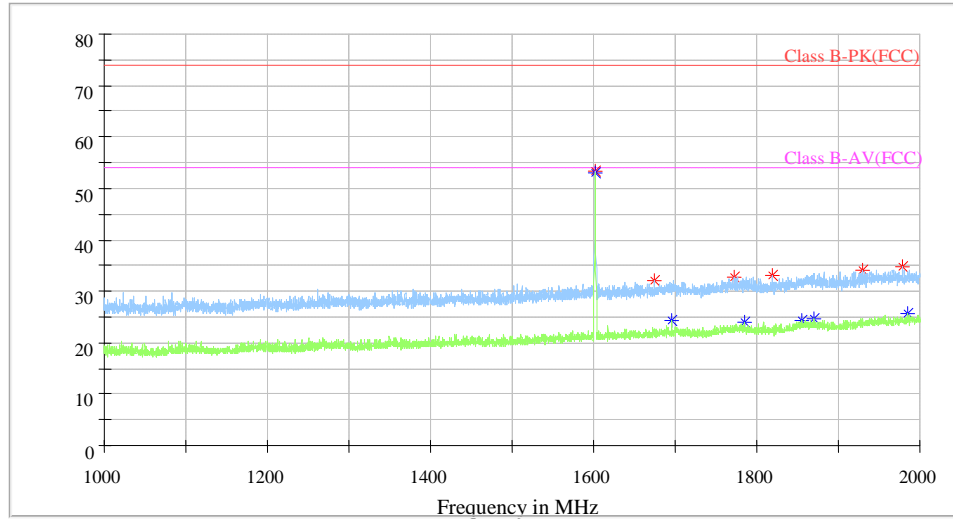


EDR Mode (8DPSK): Low Channel_Vertical_1GHz-2GHz

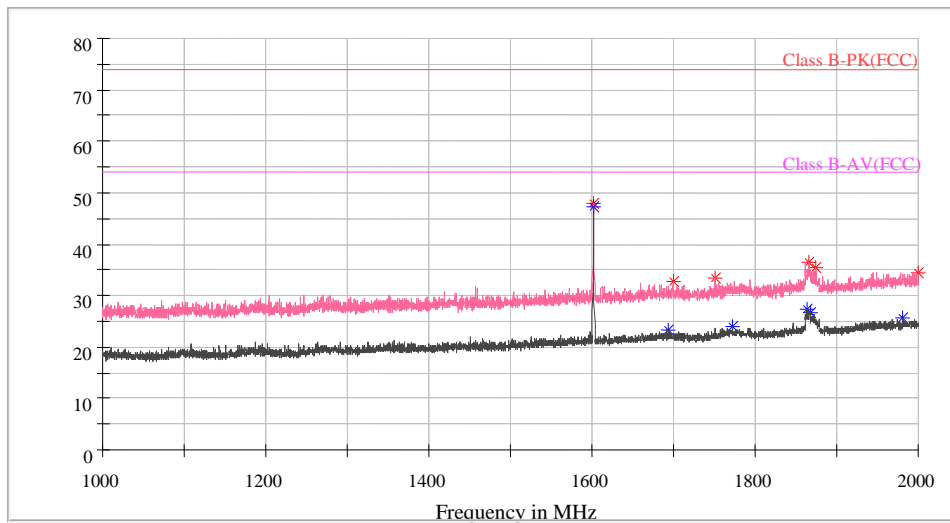


EDR Mode (8DPSK): Low Channel_Horizontal_2GHz-10GHz

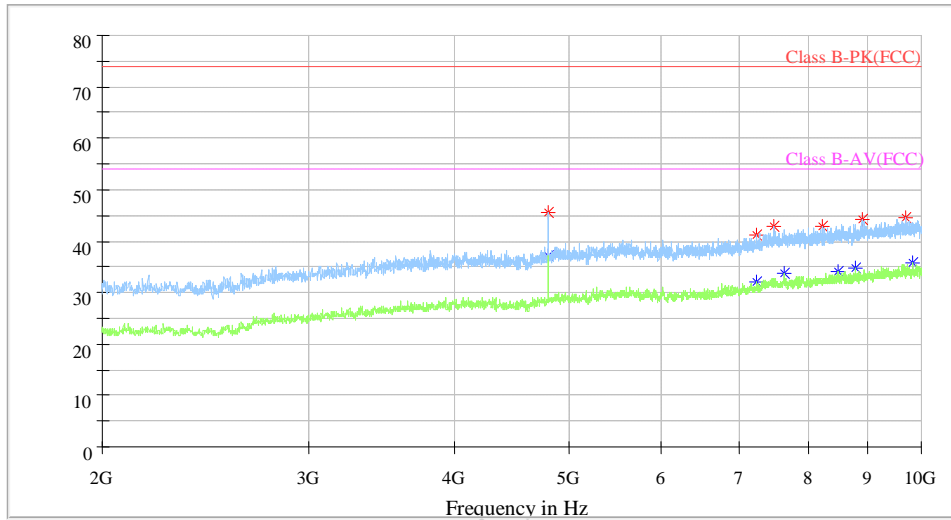


EDR Mode (8DPSK): Low Channel_Vertical_2GHz-10GHz

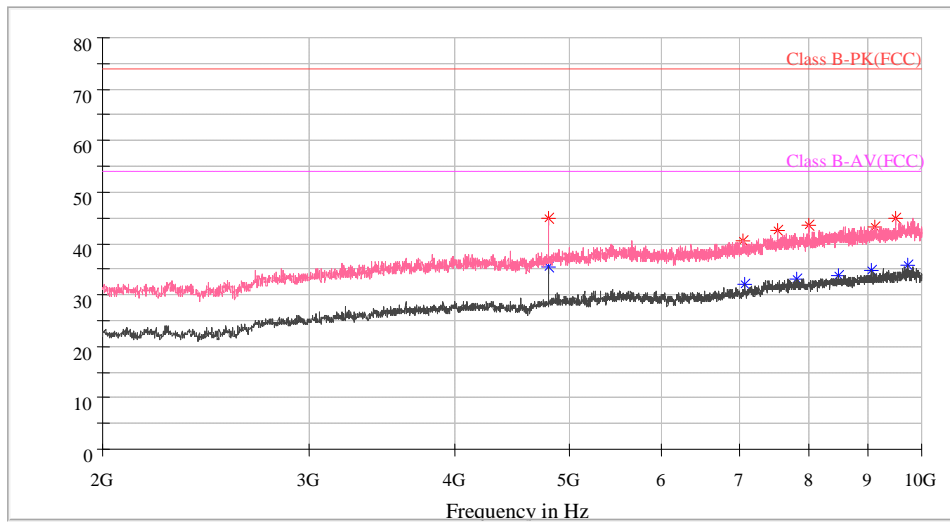


EDR Mode (8DPSK): Low Channel_Horizontal_10GHz-18GHz

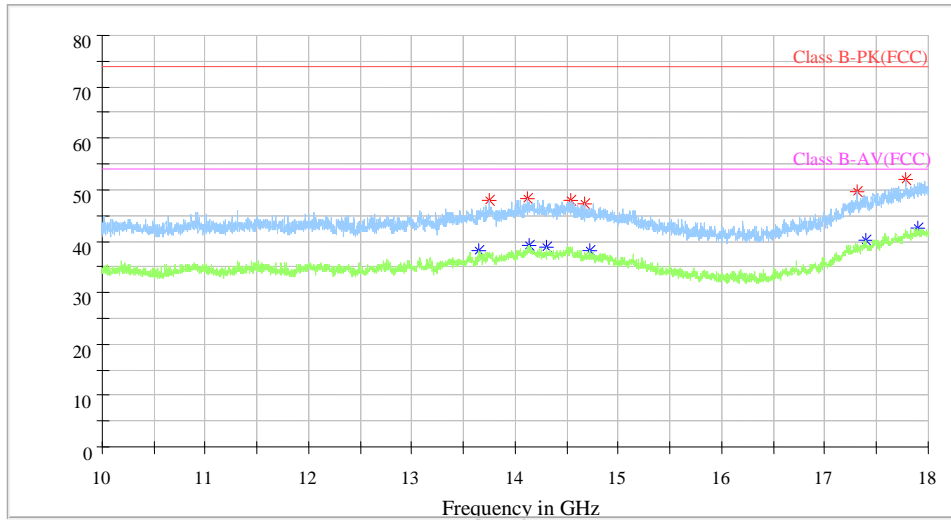


EDR Mode (8DPSK): Low Channel_Vertical_10GHz-18GHz

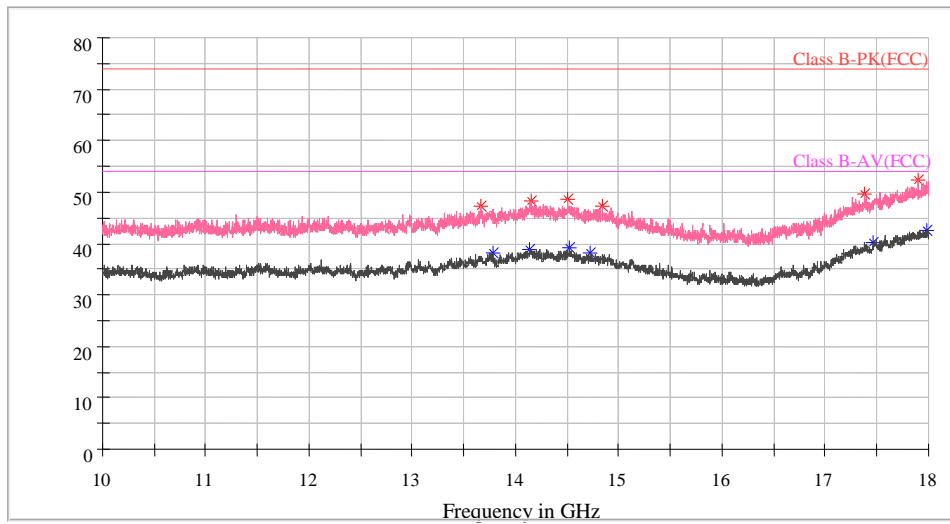

EDR Mode (8DPSK): Low Channel_Horizontal_18GHz-25GHz

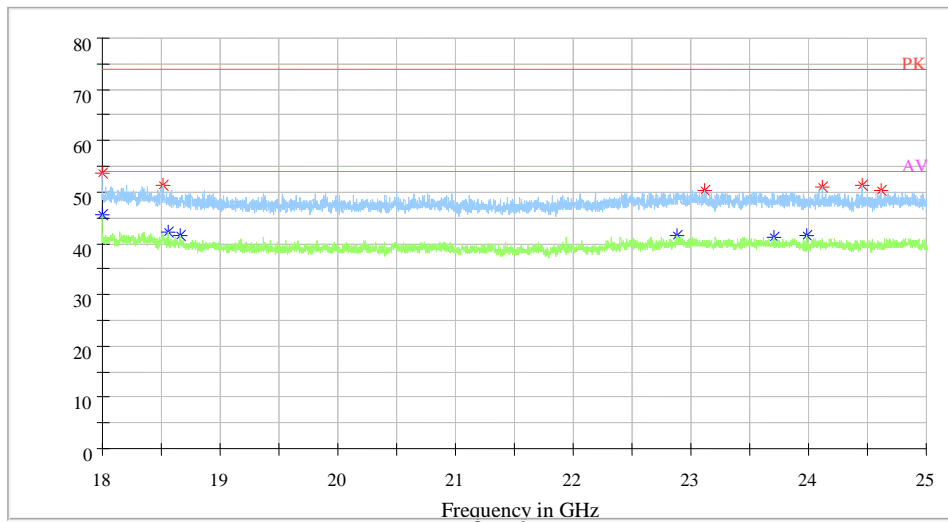

BDR Mode (GFSK): Low Channel_Vertical_18GHz-25GHz

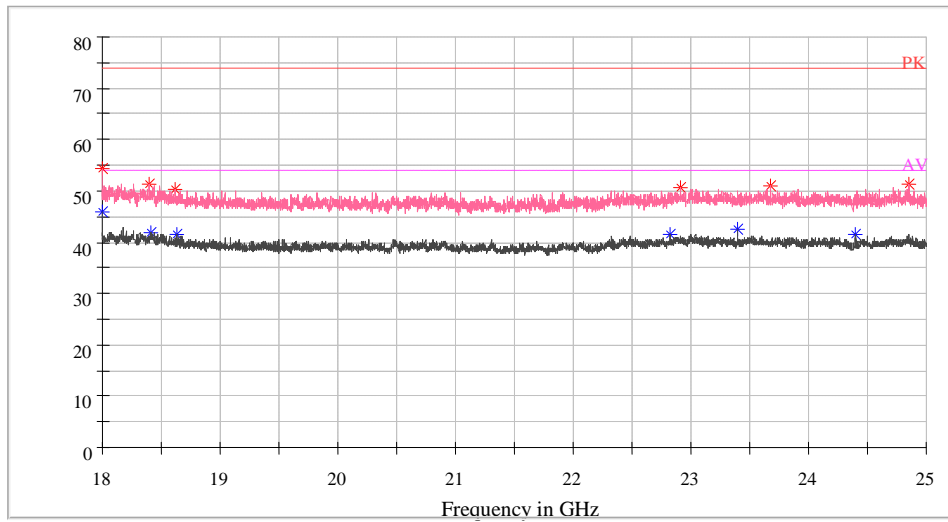

FCC §15.247(A) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	22 °C
Relative Humidity:	57 %
ATM Pressure:	95.1 kPa

The testing was performed by Tian Maofan on 2019-11-08.

Test Result: Compliance.


Please refer to following tables and plots.

Test Mode: Transmitting


Mode	Channel	Frequency	Channel Separation	Limit
		MHz	MHz	MHz
BDR (GFSK)	Low	2402	1.004	0.60
	Adjacent	2403		
	Middle	2441	1.004	0.60
	Adjacent	2442		
	High	2480	1.004	0.60
	Adjacent	2479		
EDR ($\pi/4$ -DQPSK)	Low	2402	1.004	0.82
	Adjacent	2403		
	Middle	2441	1.004	0.83
	Adjacent	2442		
	High	2480	1.004	0.83
	Adjacent	2479		
EDR (8DPSK)	Low	2402	1.004	0.84
	Adjacent	2403		
	Middle	2441	1.004	0.83
	Adjacent	2442		
	High	2480	1.004	0.84
	Adjacent	2479		

Note: Limit= (2/3) × 20dB bandwidth


BDR Mode (GFSK):

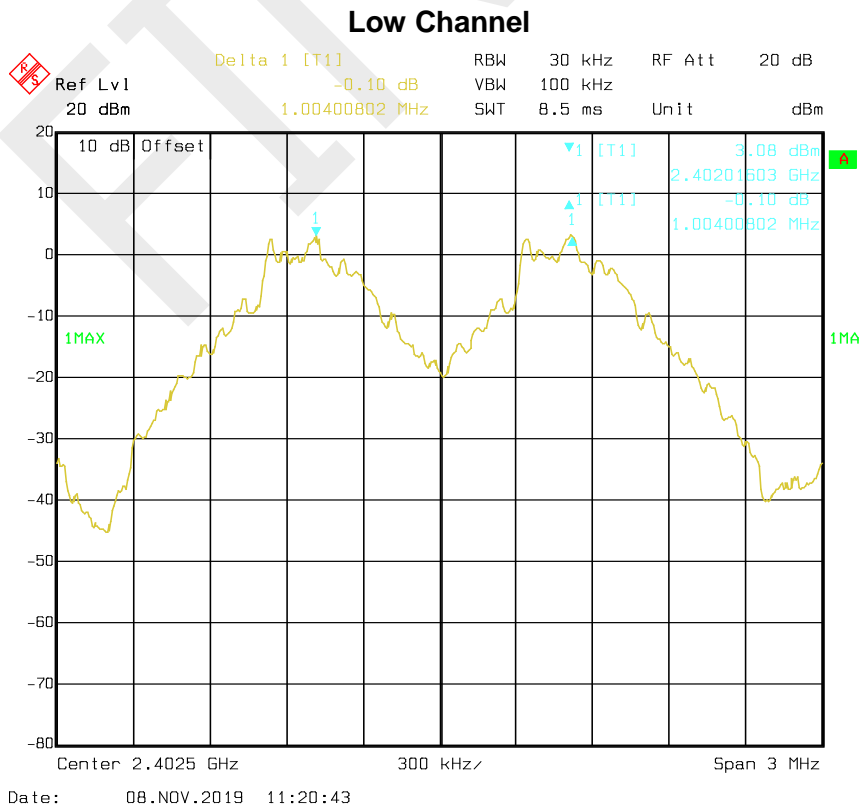

Middle Channel

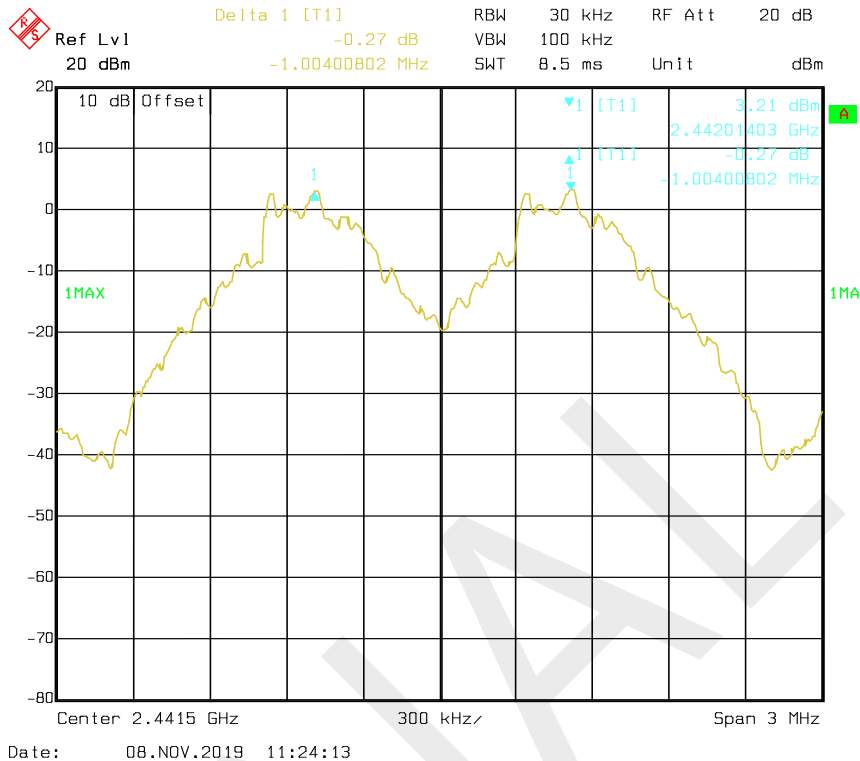


High Channel

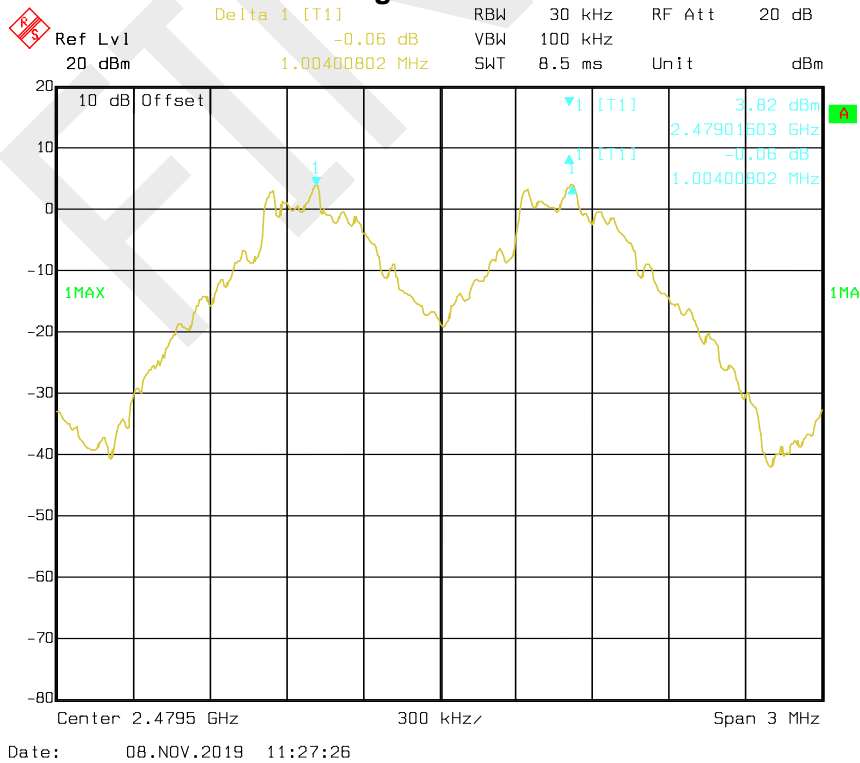


EDR Mode ($\pi/4$ -DQPSK):


Low Channel

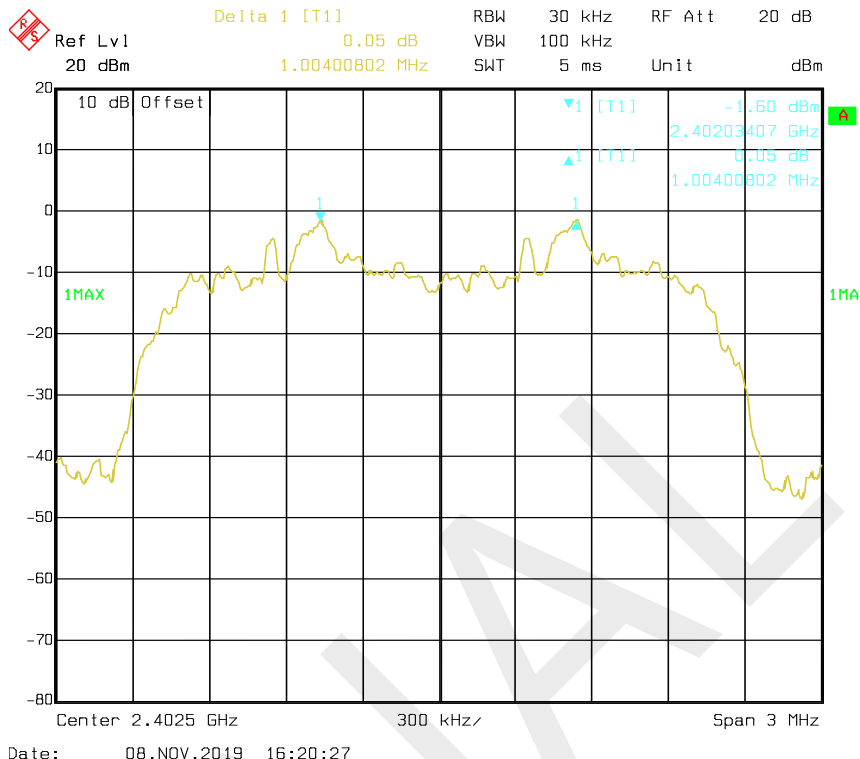

Middle Channel

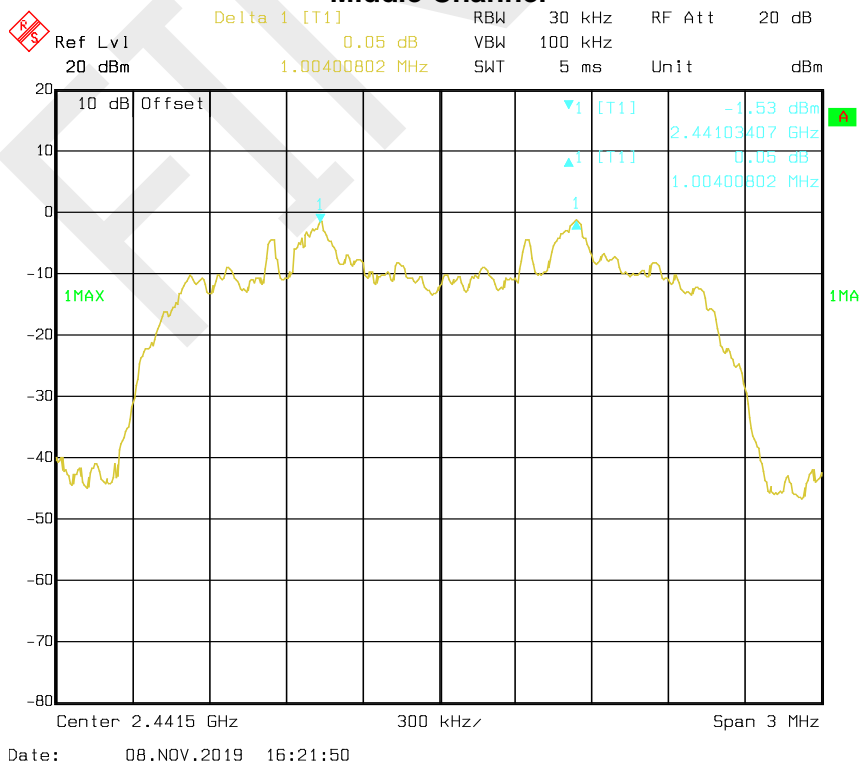


High Channel

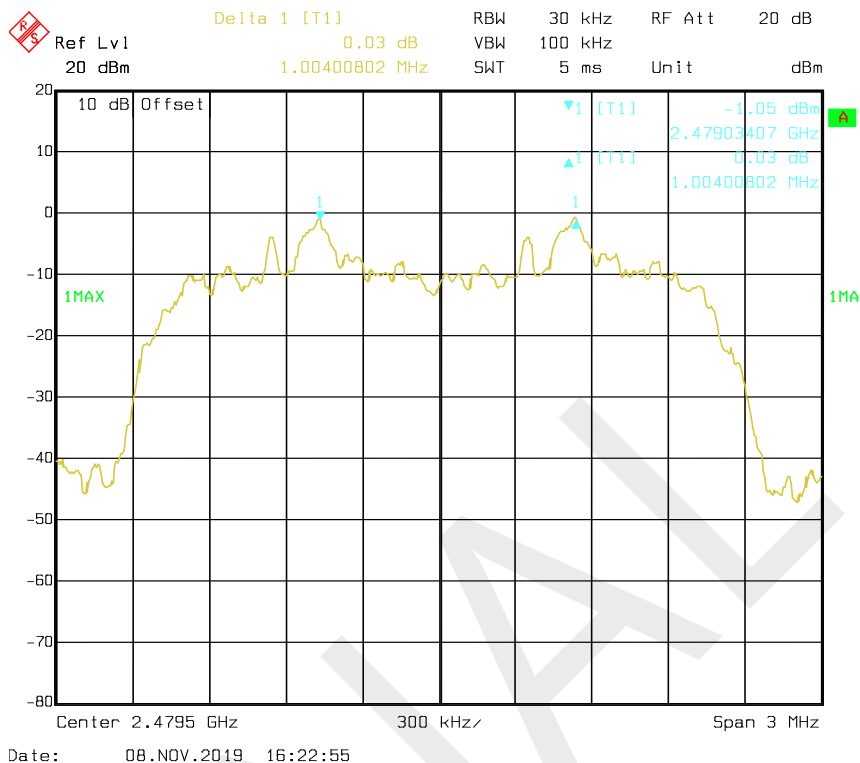


EDR Mode (8DPSK):


Low Channel

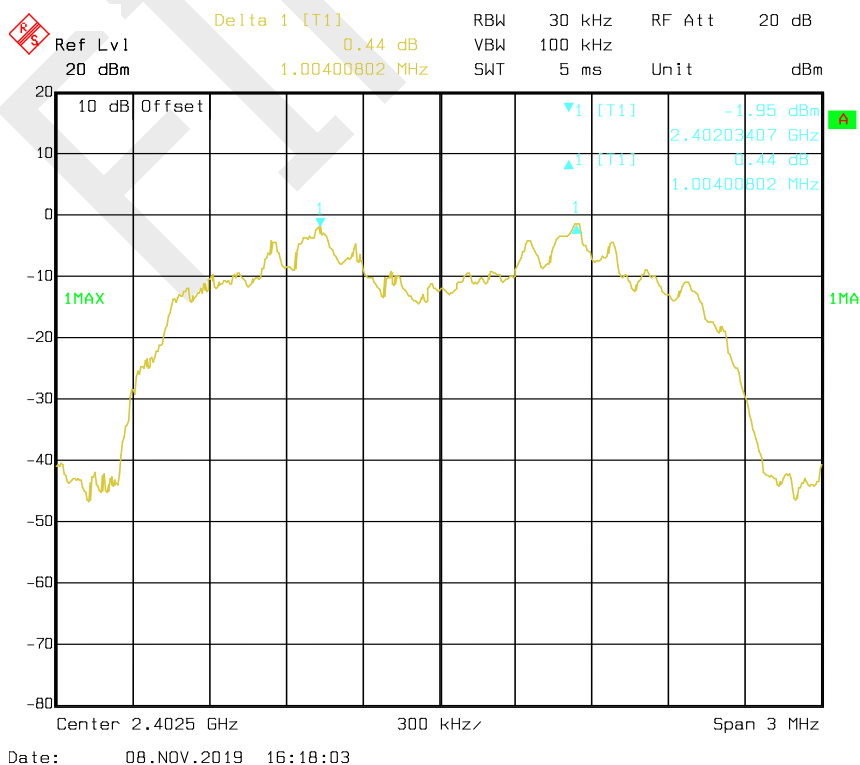

Middle Channel

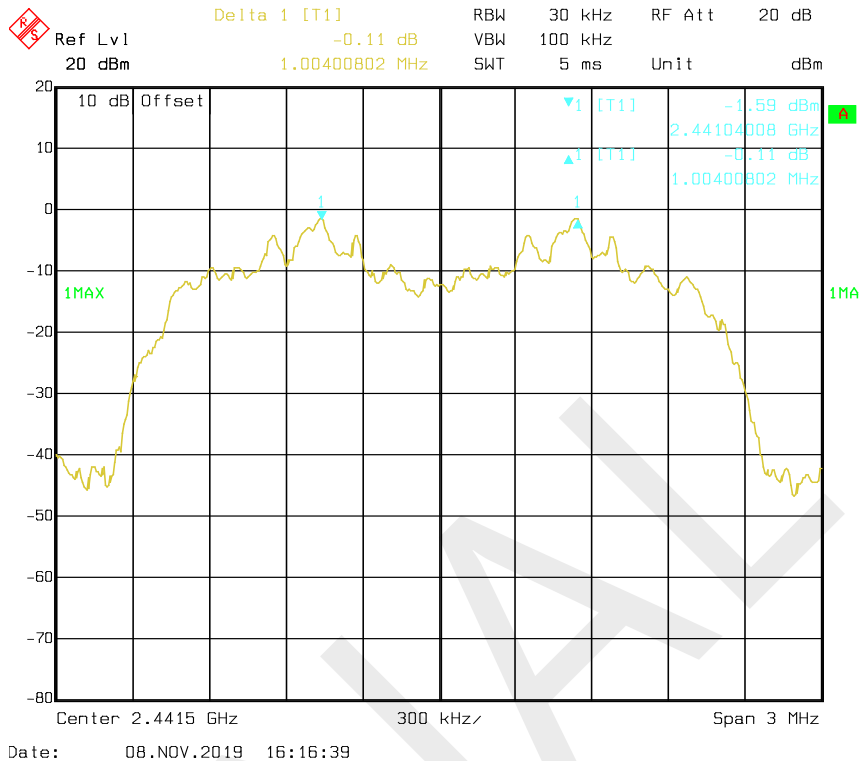

High Channel

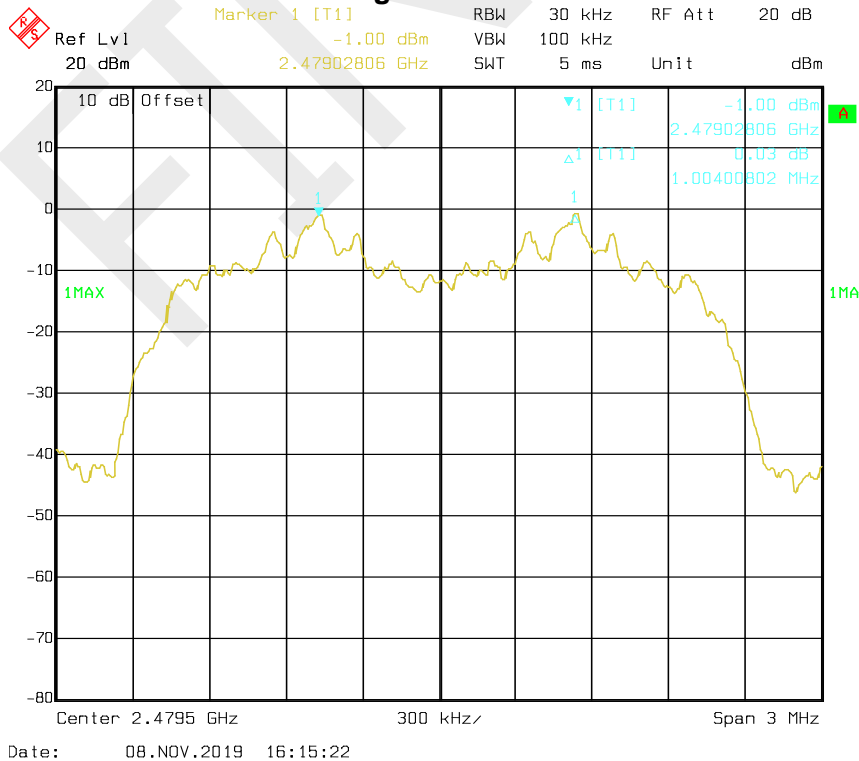

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	22 °C
Relative Humidity:	57 %
ATM Pressure:	95.1 kPa

The testing was performed by Tian Maofan on 2019-11-08.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.902
	Middle	2441	0.896
	High	2480	0.896
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.23
	Middle	2441	1.24
	High	2480	1.24
EDR Mode (8DPSK)	Low	2402	1.26
	Middle	2441	1.25
	High	2480	1.26

BDR Mode (GFSK):


Low Channel

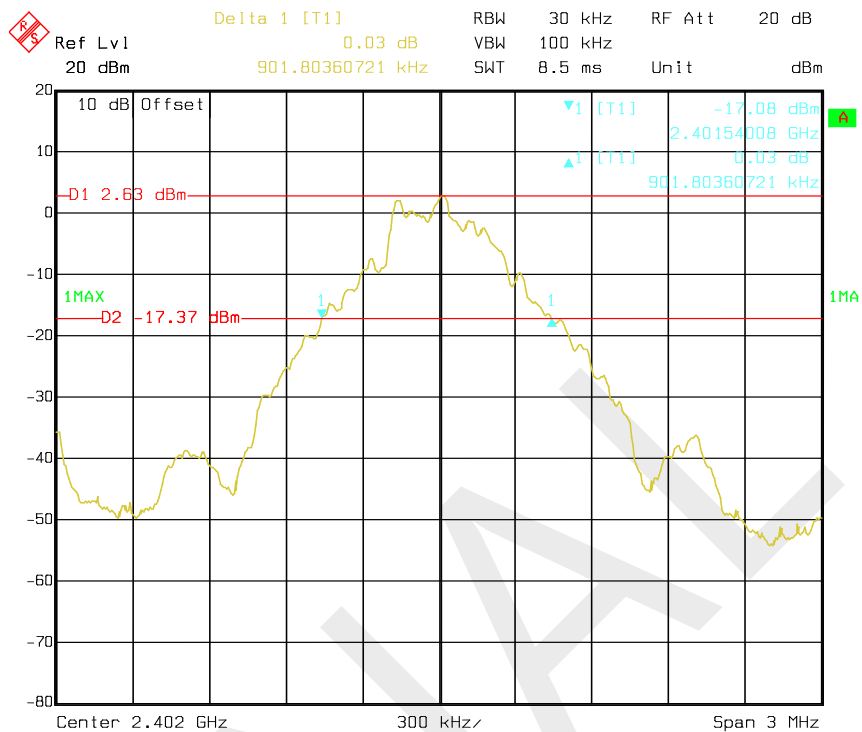

Middle Channel

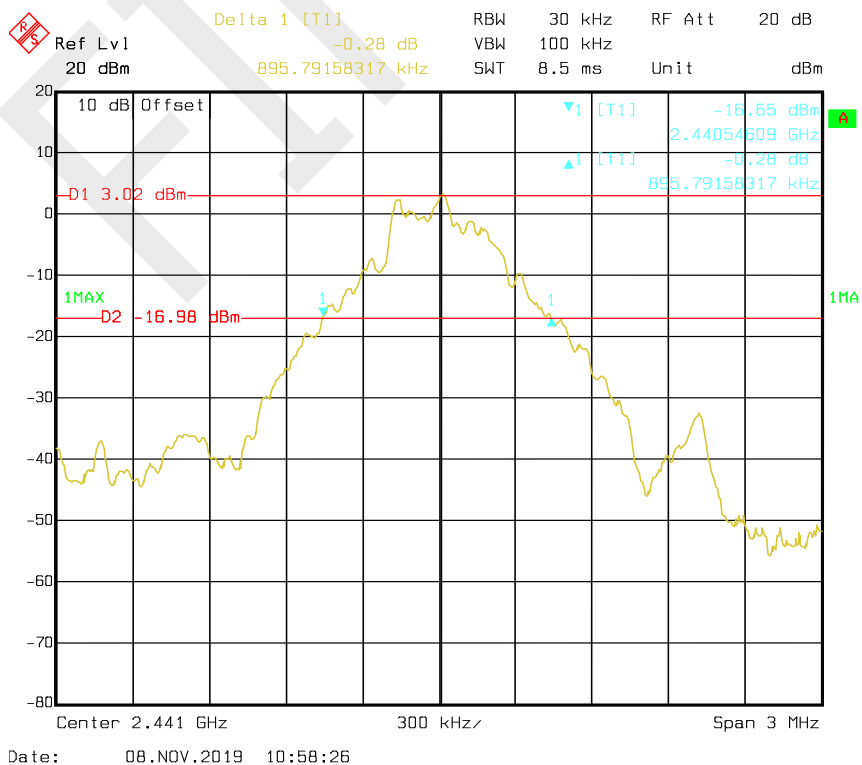


High Channel

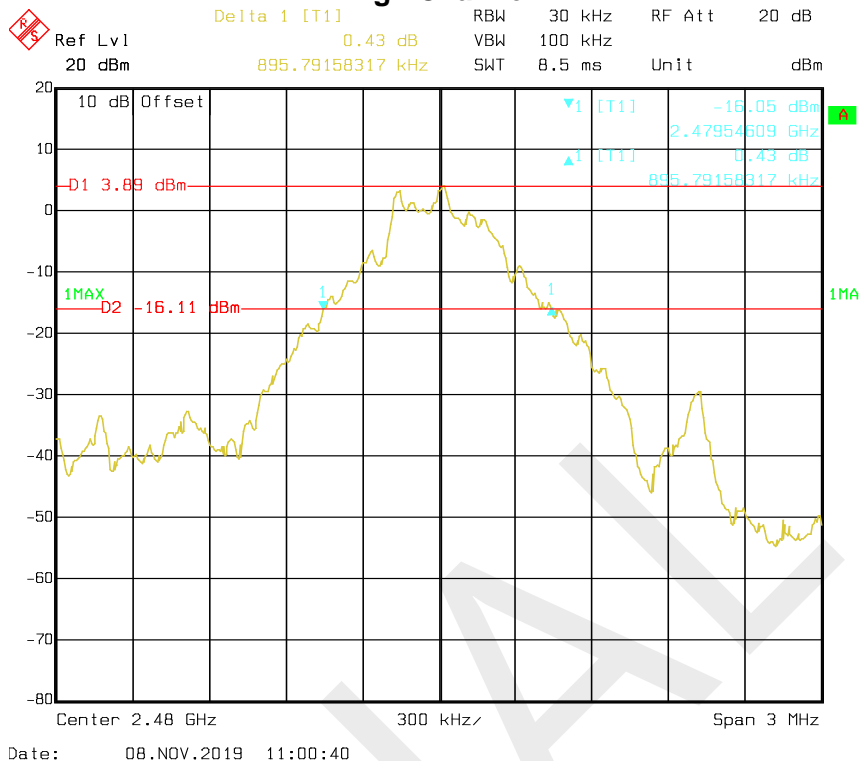


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

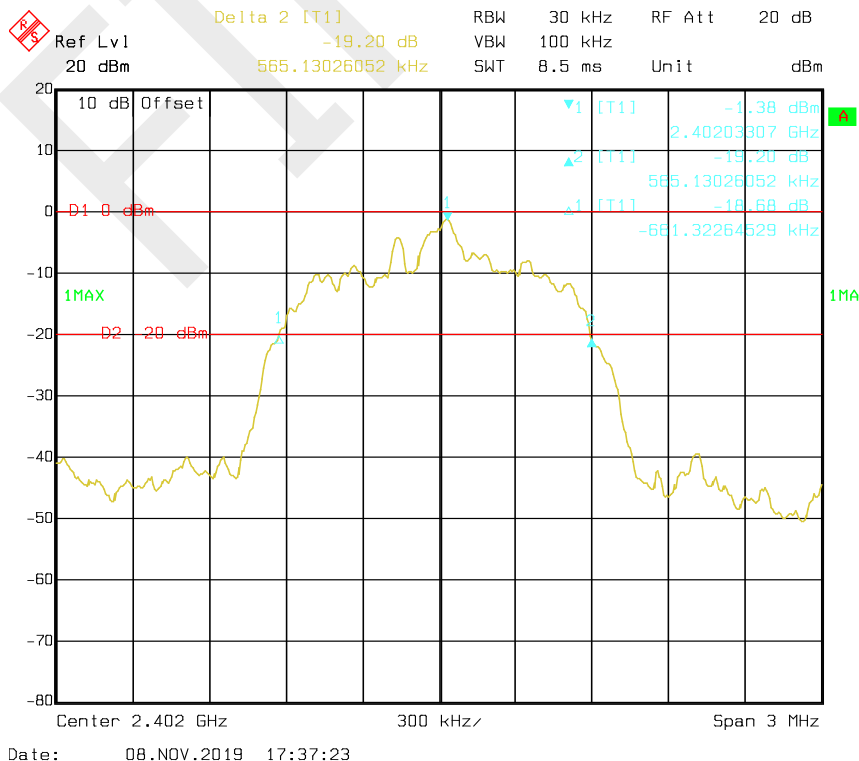

Middle Channel


⚠ Ref Lvl 20 dBm
 Delta 2 [T1] -20.19 dB
 571.14228457 kHz
 RBW 30 kHz RF Att 20 dB
 VBW 100 kHz
 SWT 8.5 ms Unit dBm

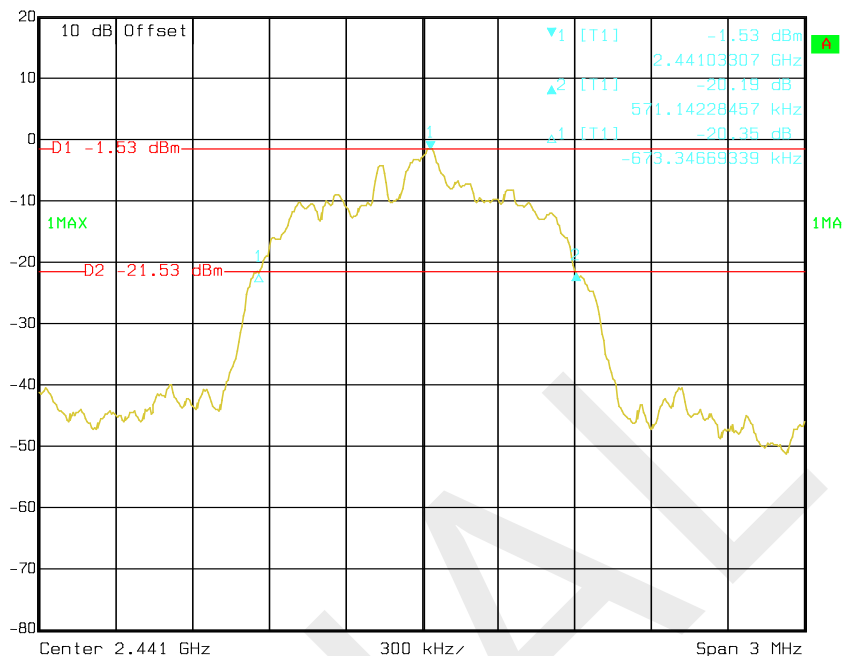

Date: 08.NOV.2019 17:39:16

High Channel


⚠ Ref Lvl 20 dBm
 Delta 1 [T1] -20.16 dB
 -667.33466934 kHz
 RBW 30 kHz RF Att 20 dB
 VBW 100 kHz
 SWT 8.5 ms Unit dBm

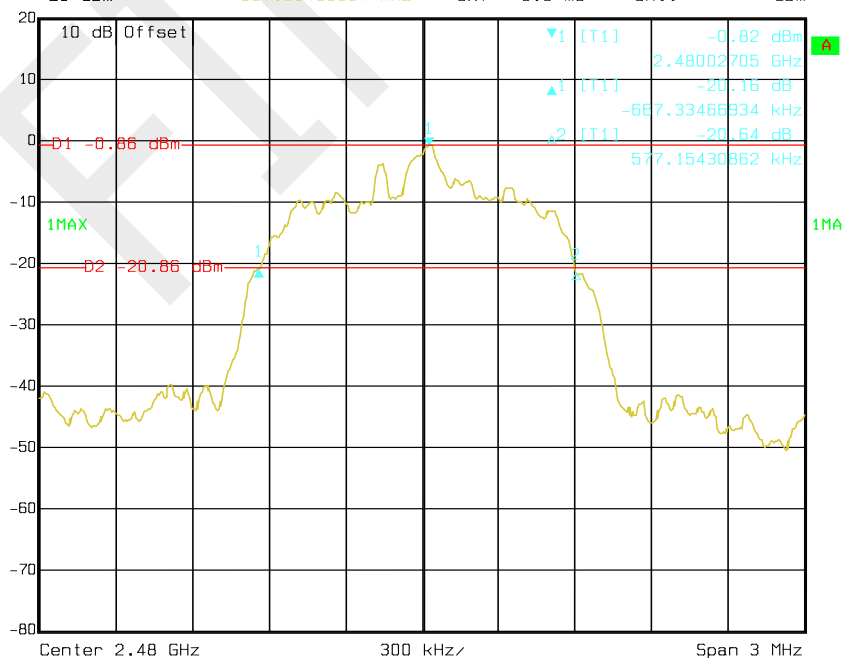


Date: 08.NOV.2019 17:42:18

EDR Mode (8DPSK):


Low Channel

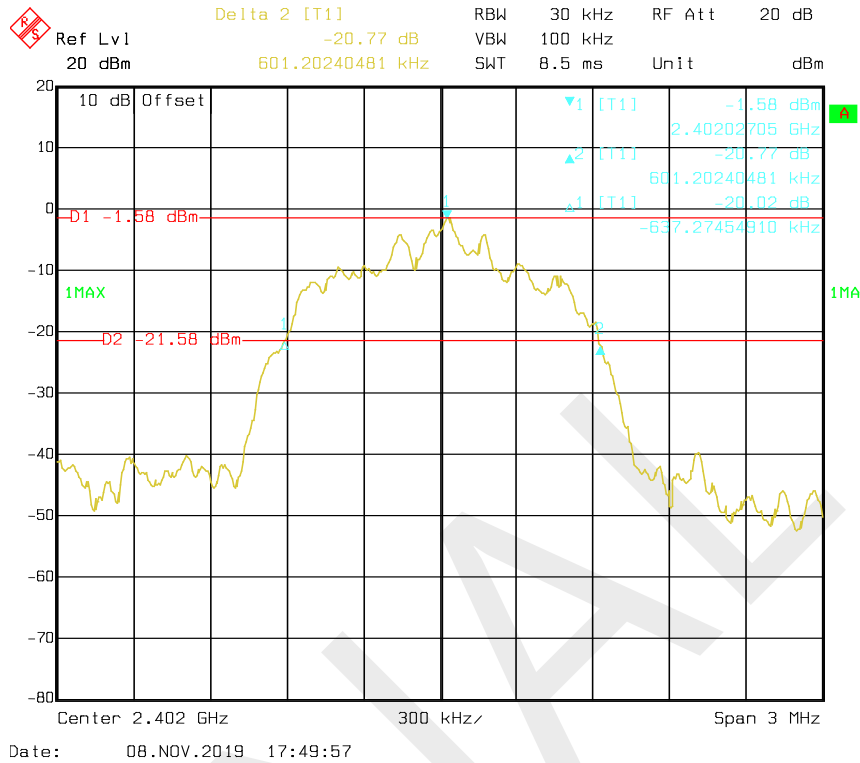

Middle Channel

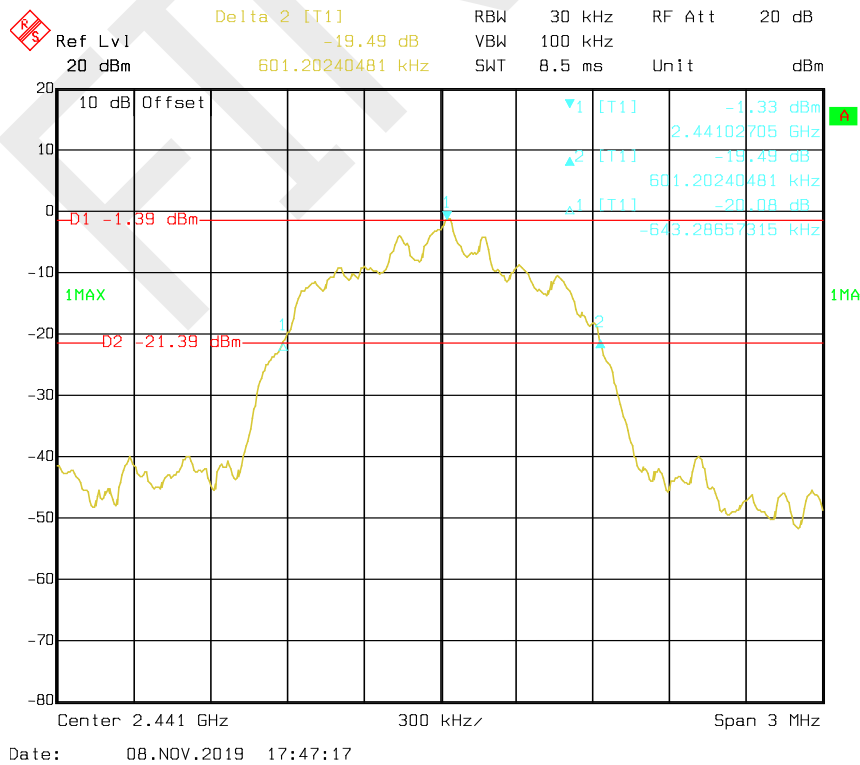

High Channel

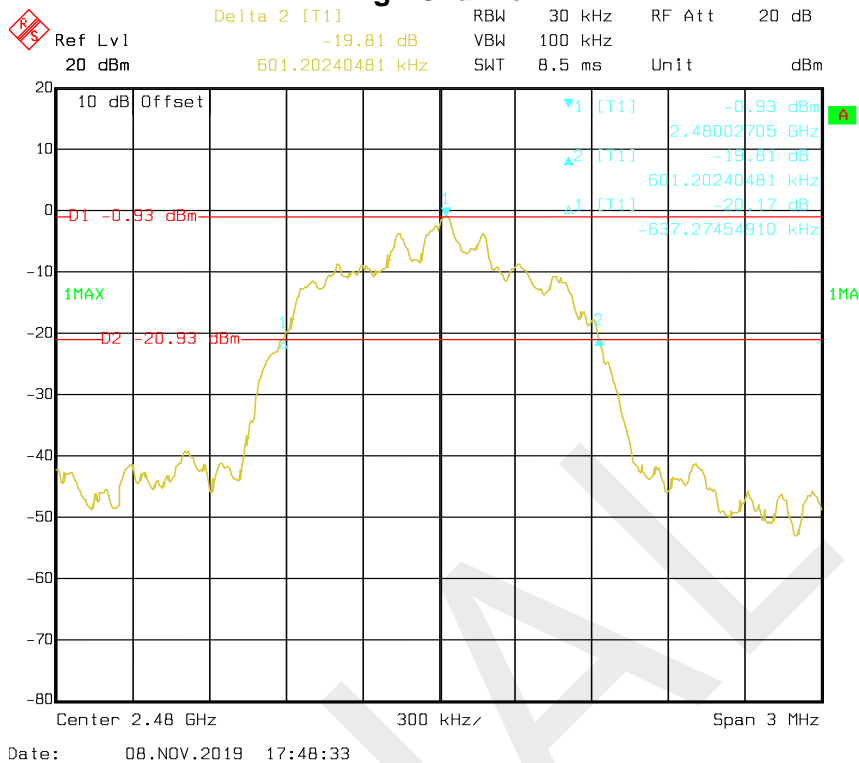

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data

Environmental Conditions

Temperature:	22 °C
Relative Humidity:	57 %
ATM Pressure:	95.1 kPa

The testing was performed by Tian Maofan on 2019-11-08.

Test Result: Compliance.


Please refer to following tables and plots.

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15


Number of Hopping Channels

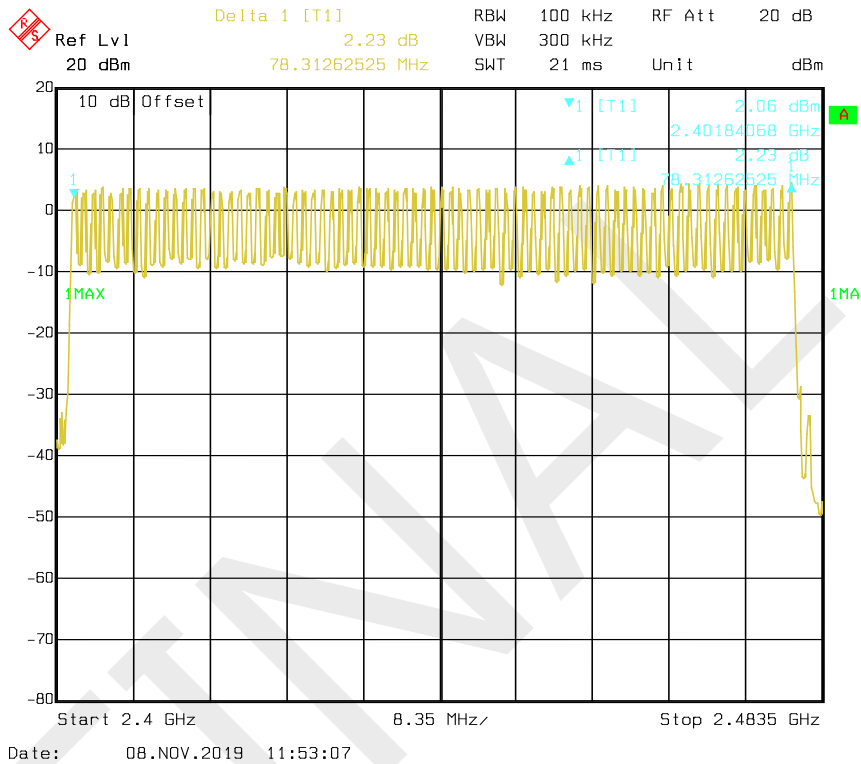

EDR Mode ($\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15


Number of Hopping Channels

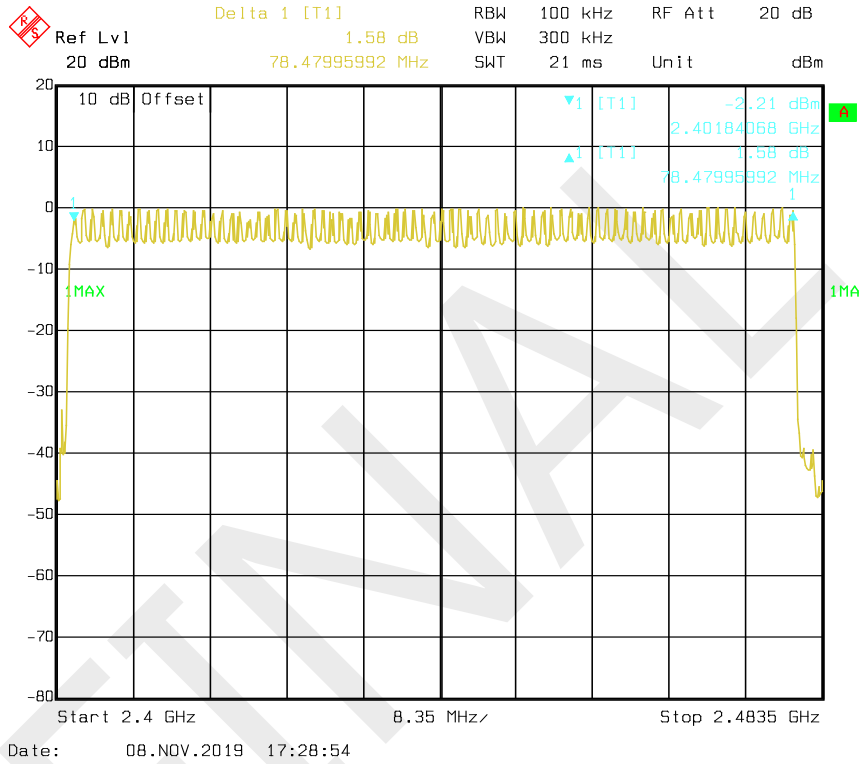

EDR Mode (8DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

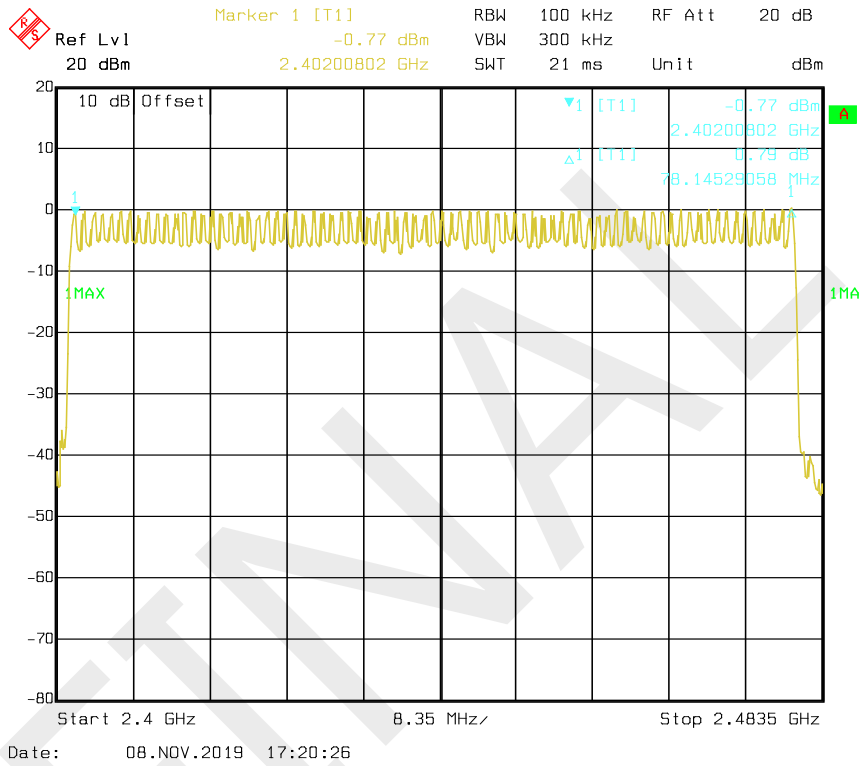

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in hopping mode, Spectrum Analyzer SPAN was set as 0, the time of single pulse was tested.

Test Data

Environmental Conditions

Temperature:	22 °C
Relative Humidity:	57 %
ATM Pressure:	95.1 kPa

The testing was performed by Tian Maofan on 2019-11-08.


Test Result: Compliance. Please refer to following tables and plots

Test Mode: Transmitting


BDR Mode (GFSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.431	0.138	0.4	Compliance
	Middle	0.455	0.146	0.4	Compliance
	High	0.455	0.146	0.4	Compliance
	Note: Dwell time=Pulse time (ms) x (1600/2/79) x31.6 s				
DH3	Low	1.695	0.271	0.4	Compliance
	Middle	1.695	0.271	0.4	Compliance
	High	1.695	0.271	0.4	Compliance
	Note: Dwell time=Pulse time (ms) x (1600/4/79) x31.6 s				
DH5	Low	2.956	0.315	0.4	Compliance
	Middle	2.956	0.315	0.4	Compliance
	High	2.956	0.315	0.4	Compliance
	Note: Dwell time=Pulse time (ms) x (1600/6/79) x31.6 s				


DH1: Low Channel

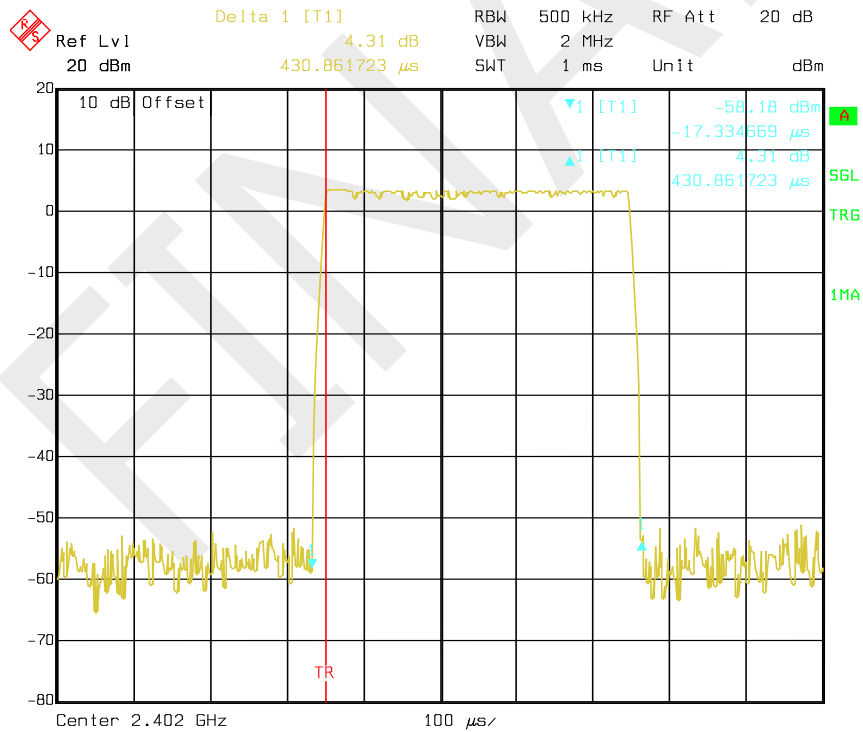


DH1: Middle Channel

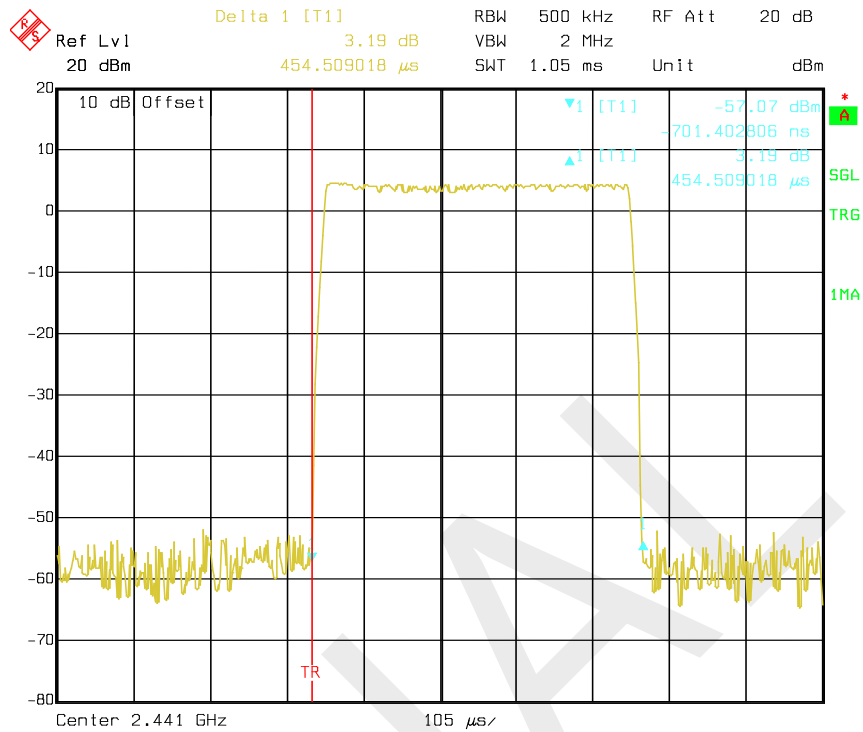

DH1: High Channel

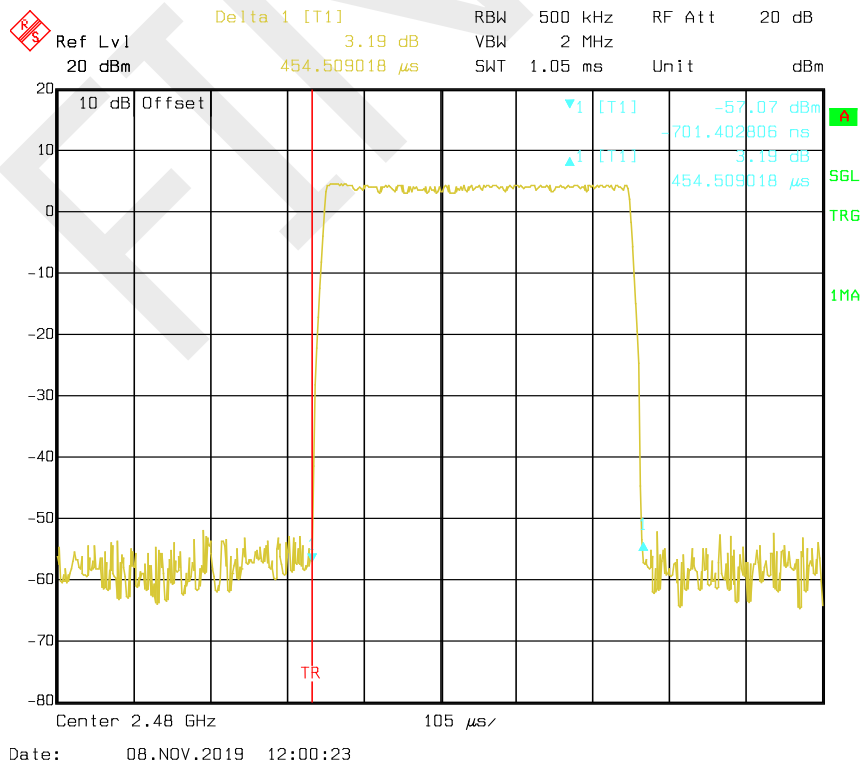


DH3: Low Channel

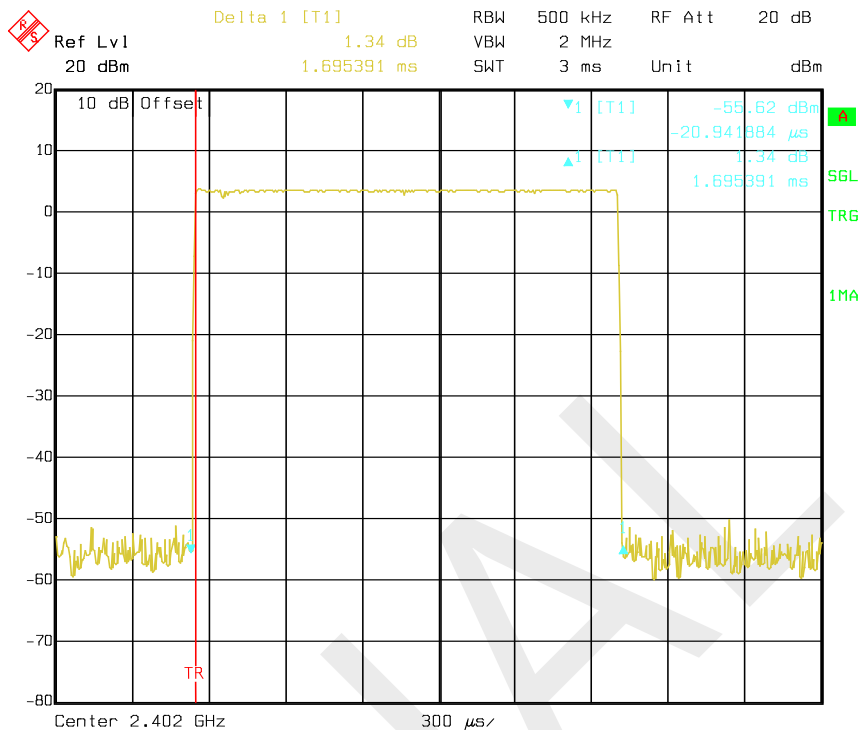


Date: 08.NOV.2019 12:07:26

DH3: Middle Channel

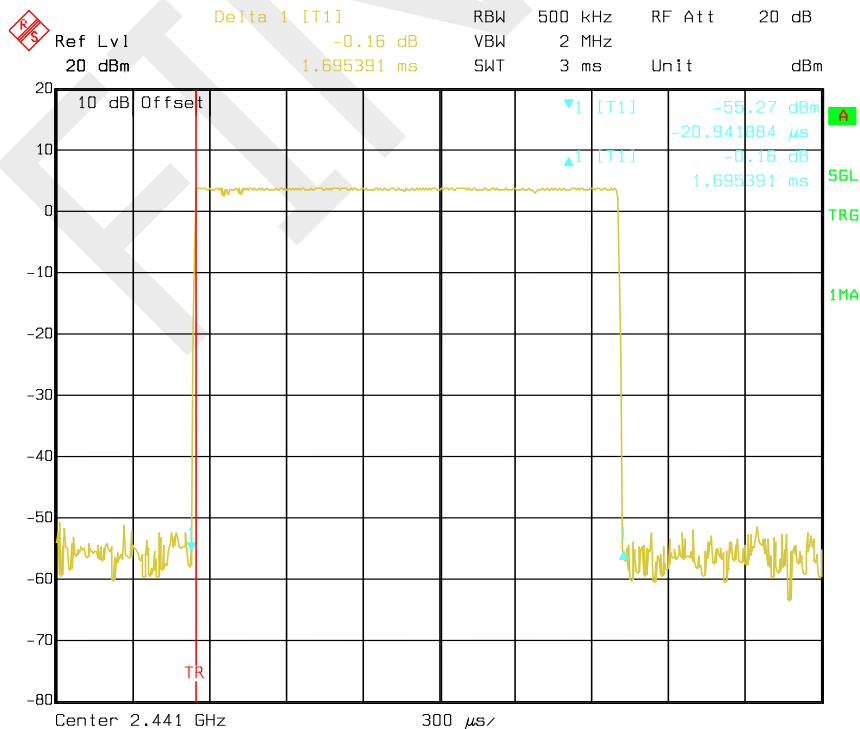


Date: 08.NOV.2019 12:08:27

DH3: High Channel

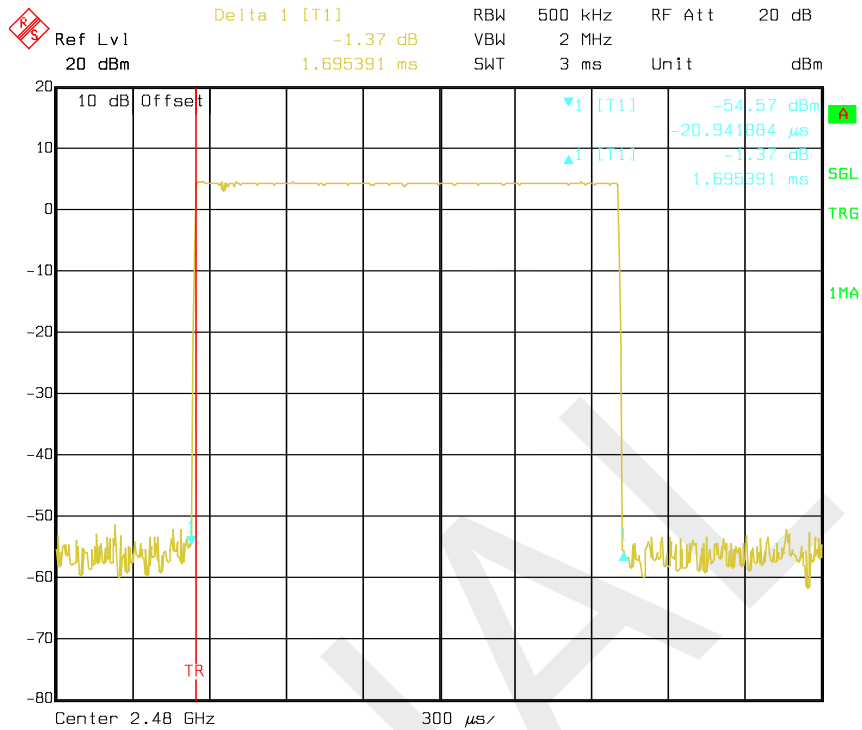


Date: 08.NOV.2019 12:09:18

DH5: Low Channel

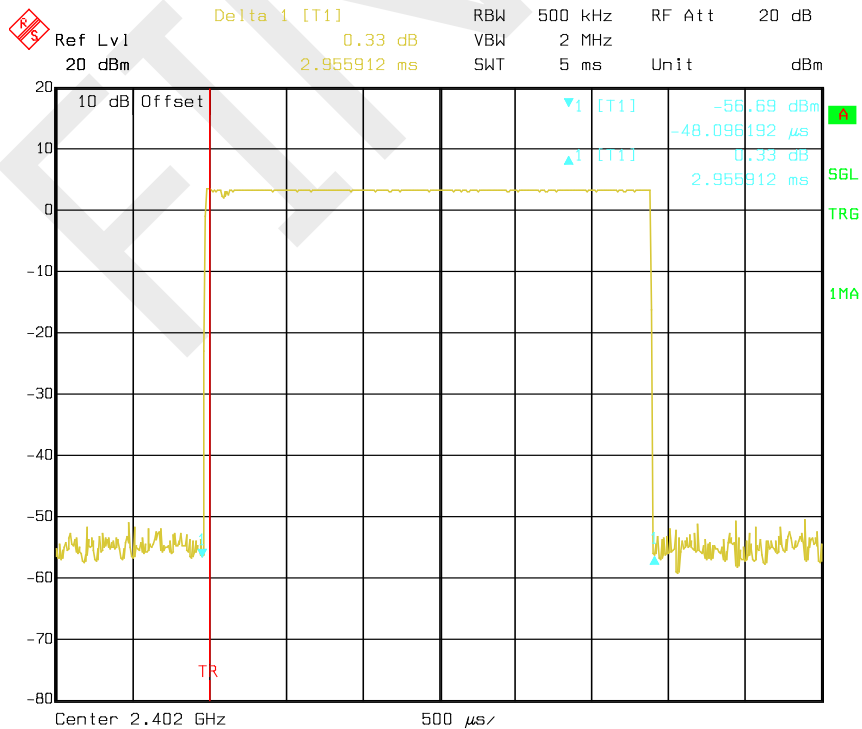


Date: 08.NOV.2019 12:15:07

DH5: Middle Channel

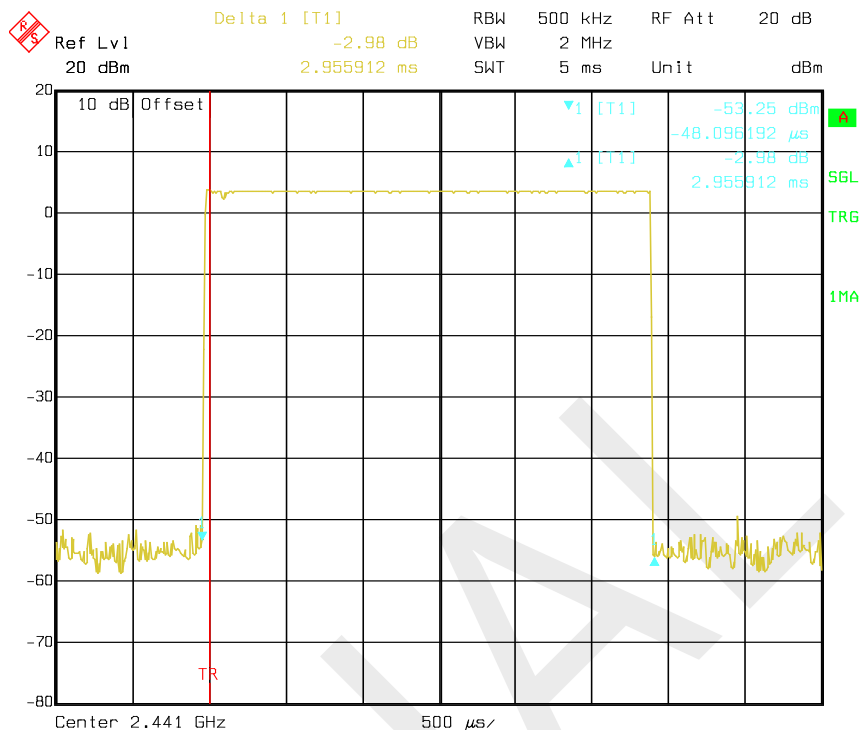


DH5: High Channel

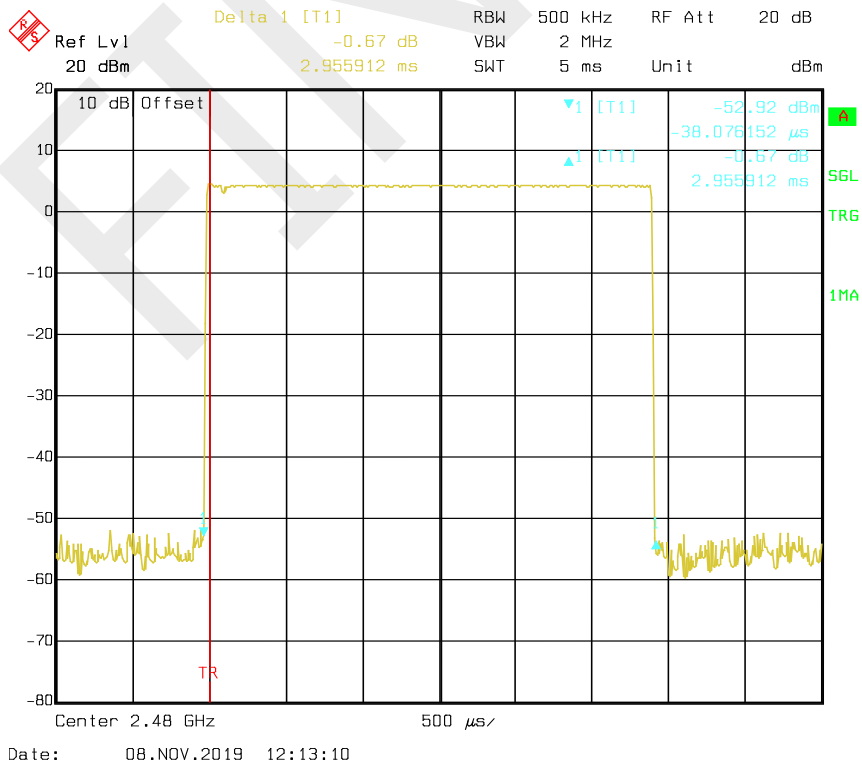


EDR Mode ($\pi/4$ -DQPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2DH1	Low	0.445	0.142	0.4	Compliance
	Middle	0.445	0.142	0.4	Compliance
	High	0.445	0.142	0.4	Compliance
	Note: Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s				
2DH3	Low	1.701	0.272	0.4	Compliance
	Middle	1.701	0.272	0.4	Compliance
	High	1.707	0.273	0.4	Compliance
	Note: Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s				
2DH5	Low	2.966	0.316	0.4	Compliance
	Middle	2.966	0.316	0.4	Compliance
	High	2.966	0.316	0.4	Compliance
	Note: Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s				


2DH1: Low Channel

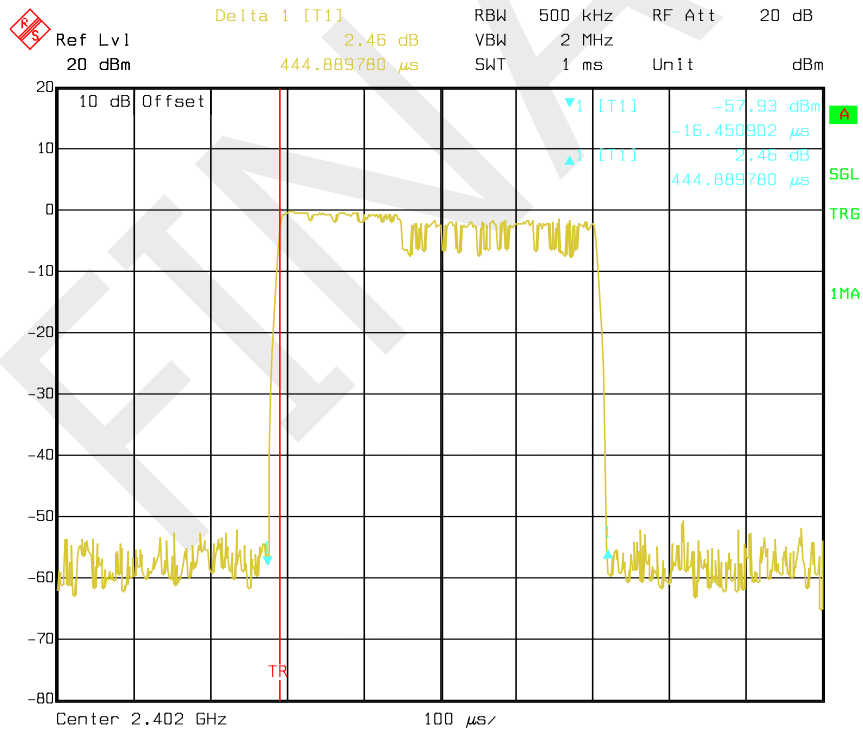


2DH1: Middle Channel

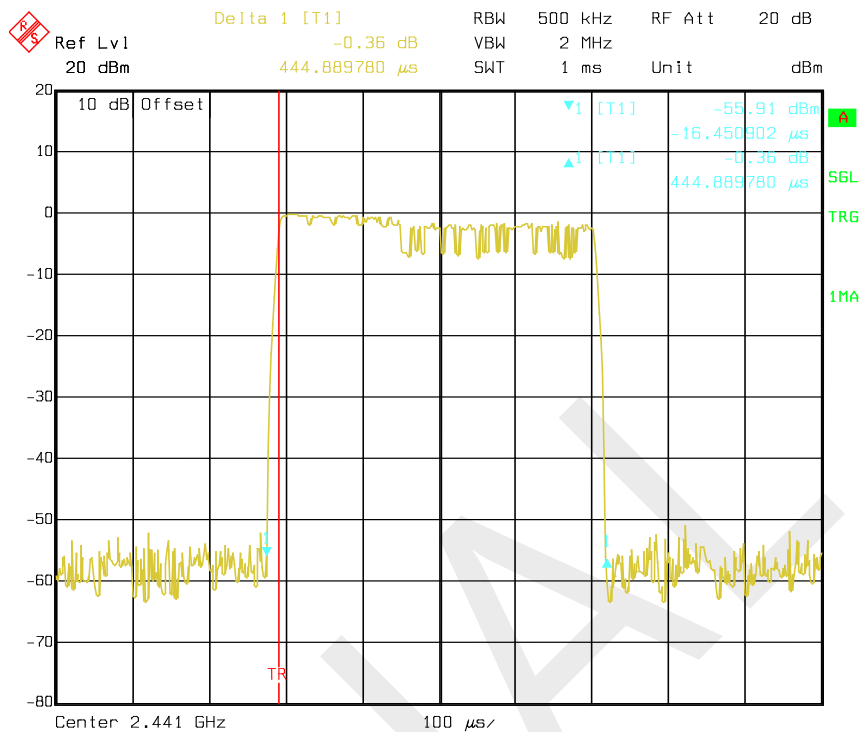

2DH1: High Channel

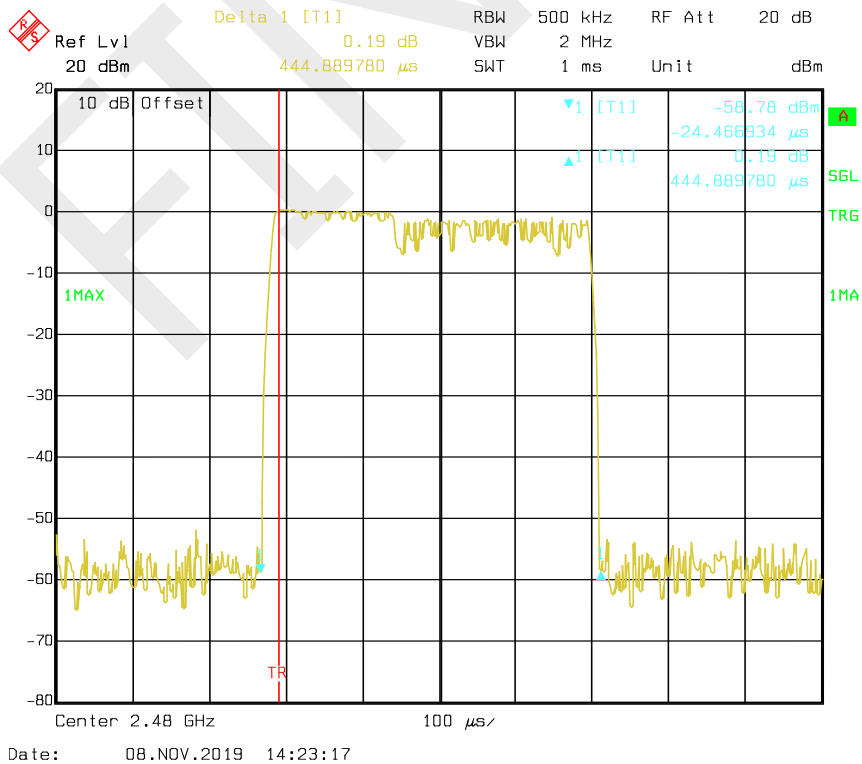


2DH3: Low Channel

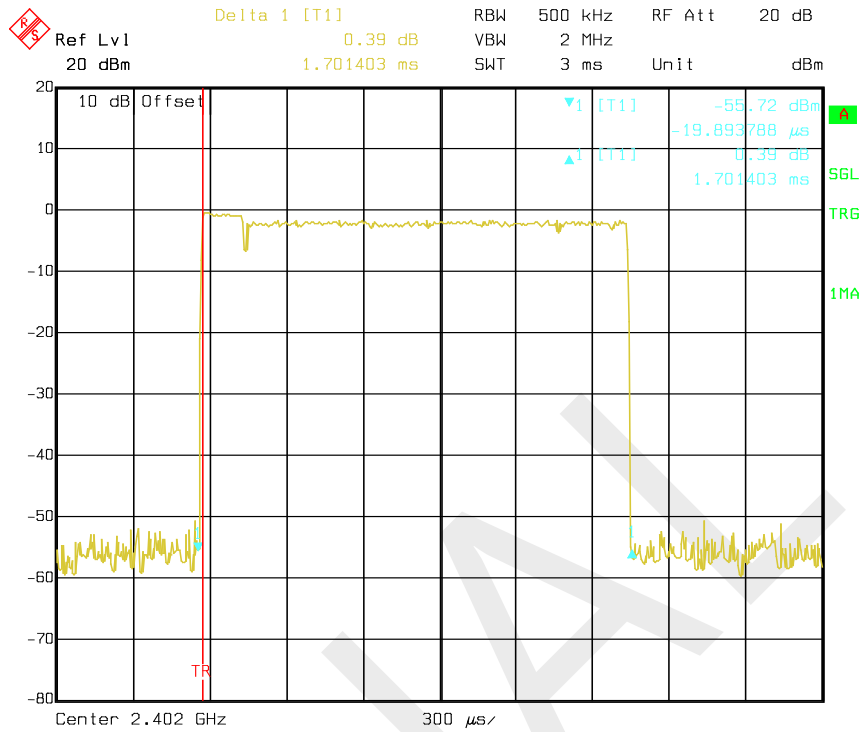


Date: 08.NOV.2019 14:38:28

2DH3: Middle Channel

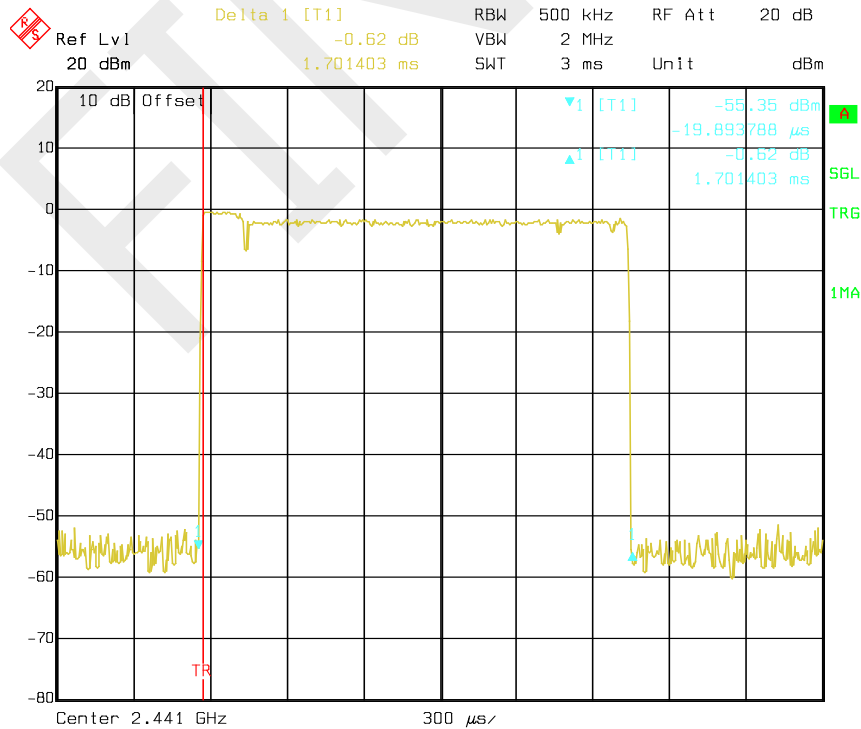


Date: 08.NOV.2019 14:37:15


2DH3: High Channel

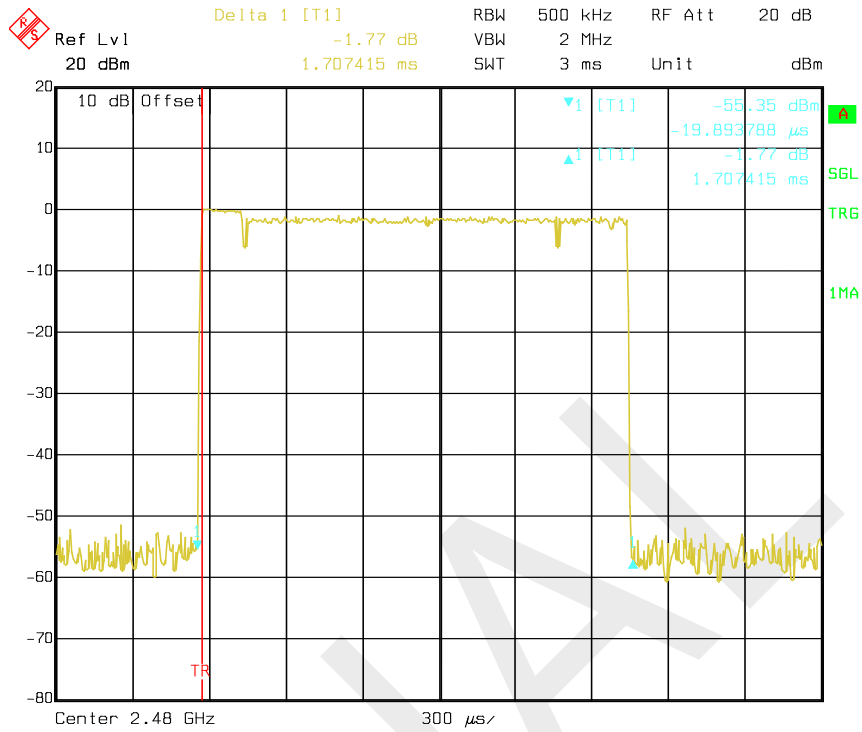


2DH5: Low Channel

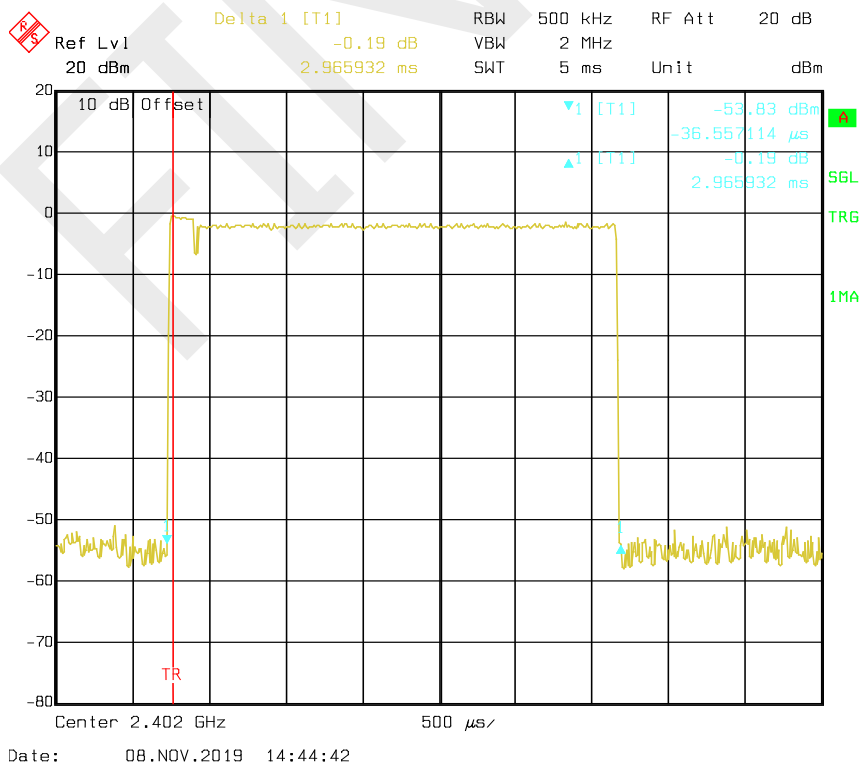

2DH5: Middle Channel

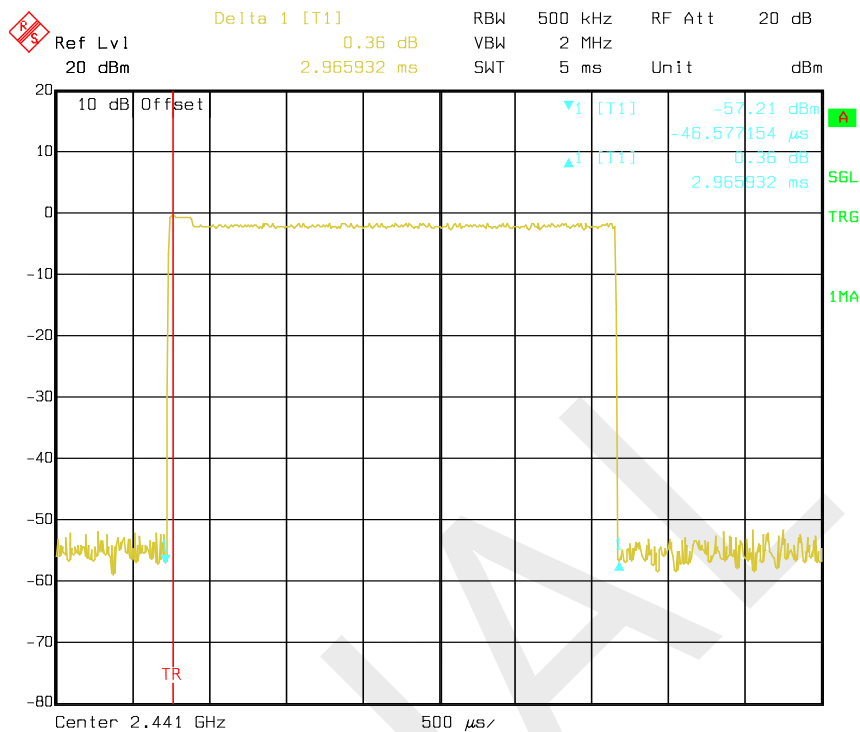


2DH5: High Channel

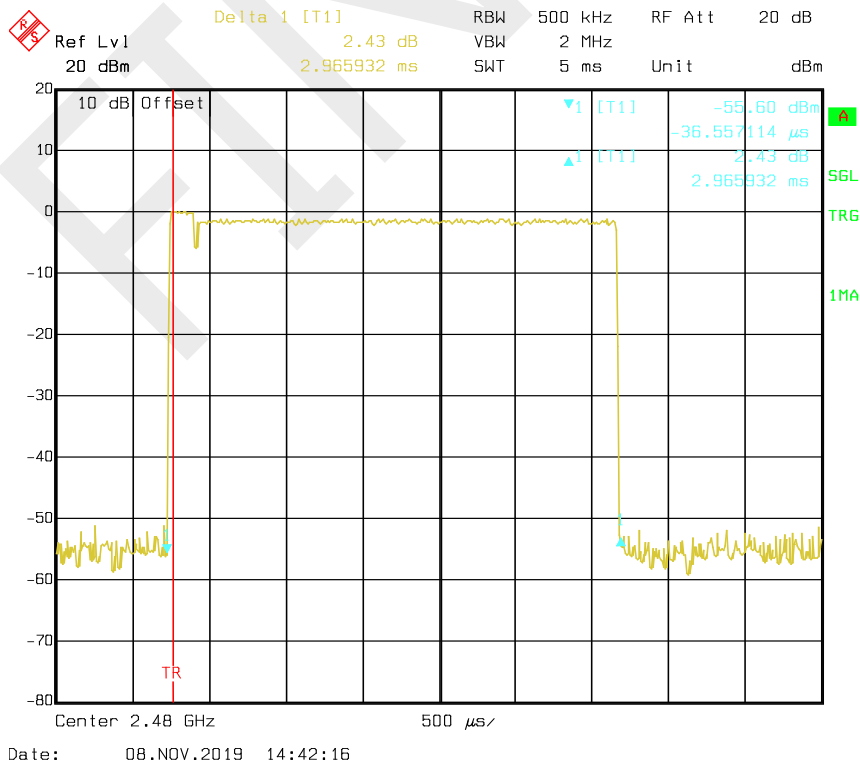


EDR Mode (8DPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
3DH1	Low	0.443	0.142	0.4	Compliance
	Middle	0.447	0.143	0.4	Compliance
	High	0.443	0.142	0.4	Compliance
	Note: Dwell time=Pulse time (ms) x (1600/2/79) x31.6 s				
3DH3	Low	1.711	0.274	0.4	Compliance
	Middle	1.711	0.274	0.4	Compliance
	High	1.711	0.274	0.4	Compliance
	Note: Dwell time=Pulse time (ms) x (1600/4/79) x31.6 s				
3DH5	Low	2.964	0.316	0.4	Compliance
	Middle	2.974	0.317	0.4	Compliance
	High	2.964	0.316	0.4	Compliance
	Note: Dwell time=Pulse time (ms) x (1600/6/79) x31.6 s				


3DH1: Low Channel

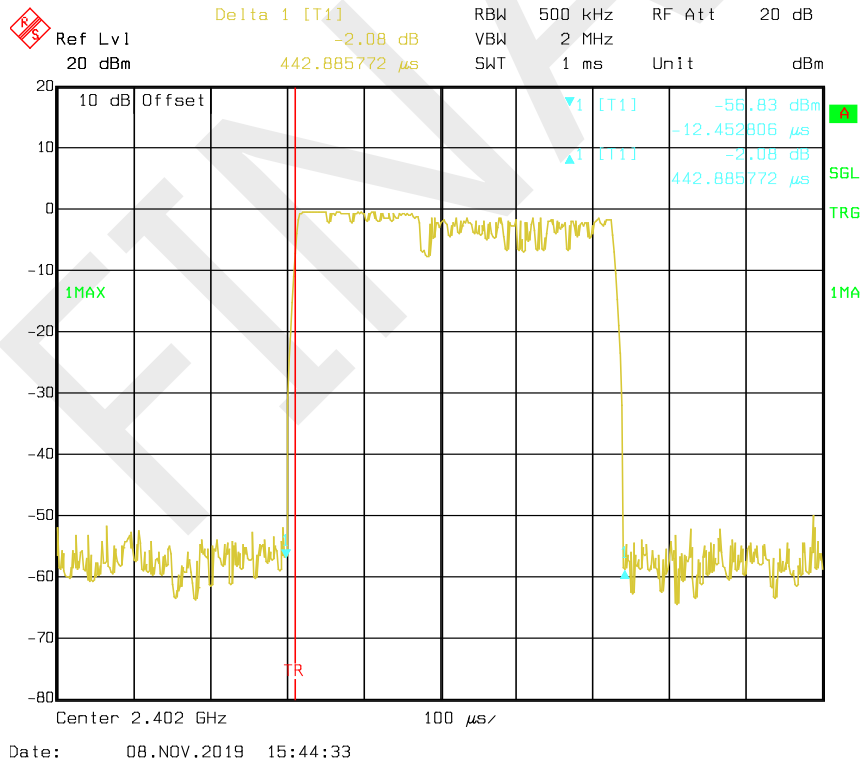


3DH1: Middle Channel

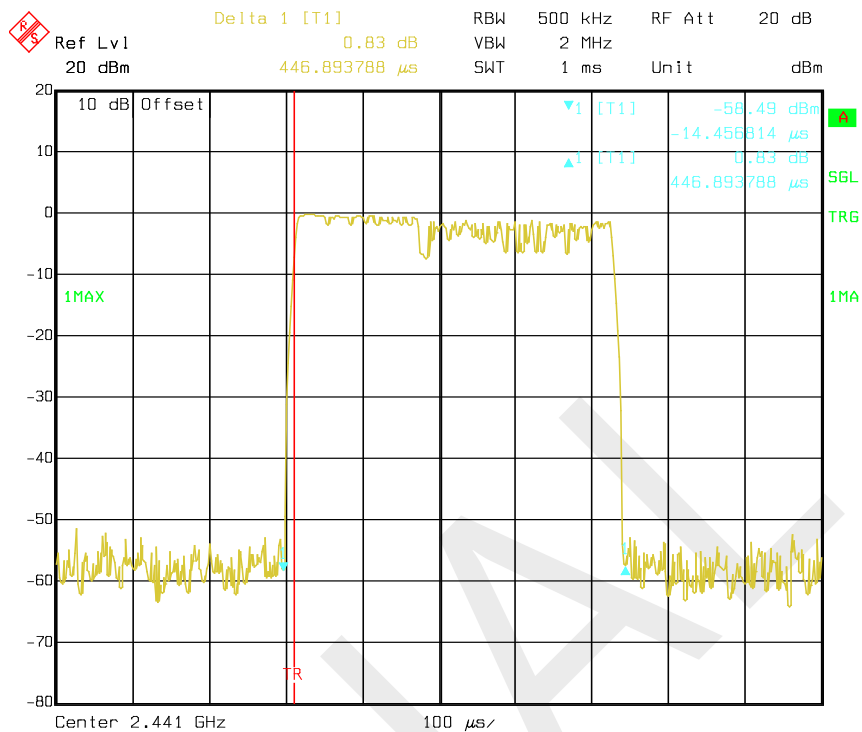

3DH1: High Channel

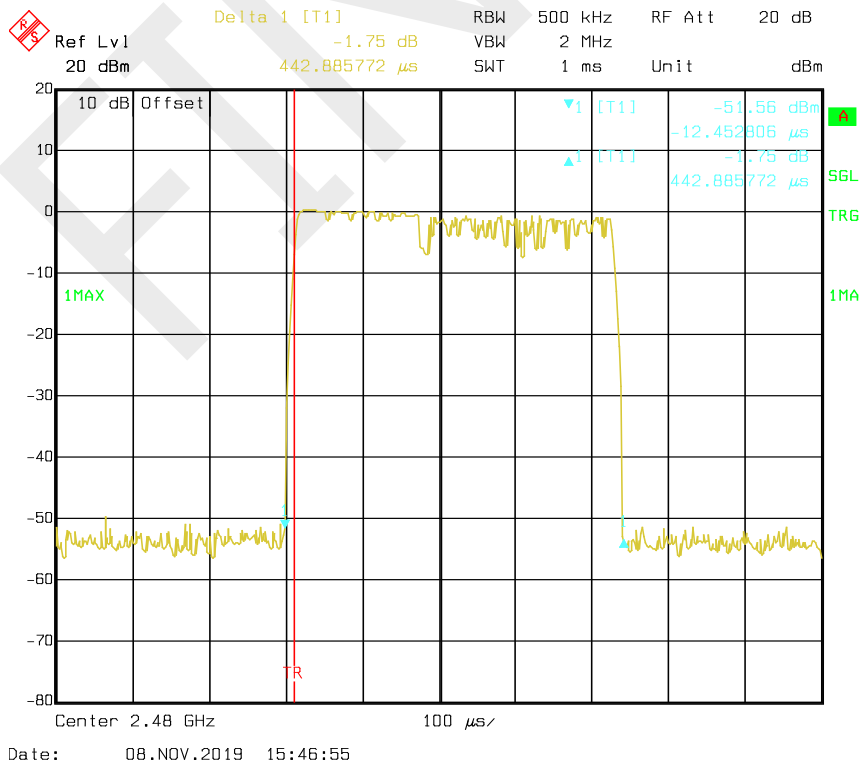


3DH3: Low Channel

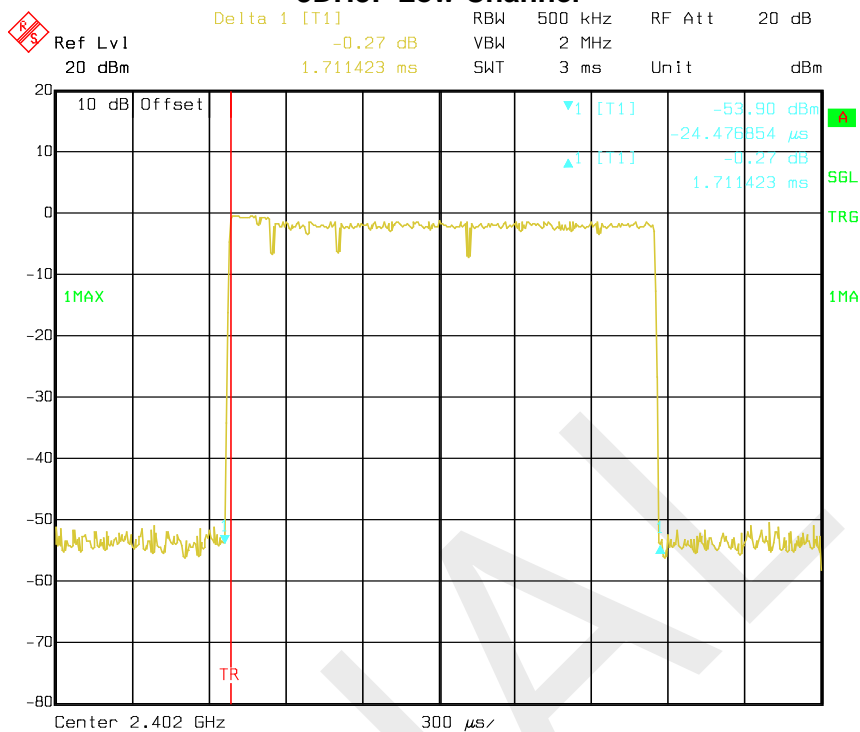

Date: 08.NOV.2019 16:05:39


3DH3: Middle Channel

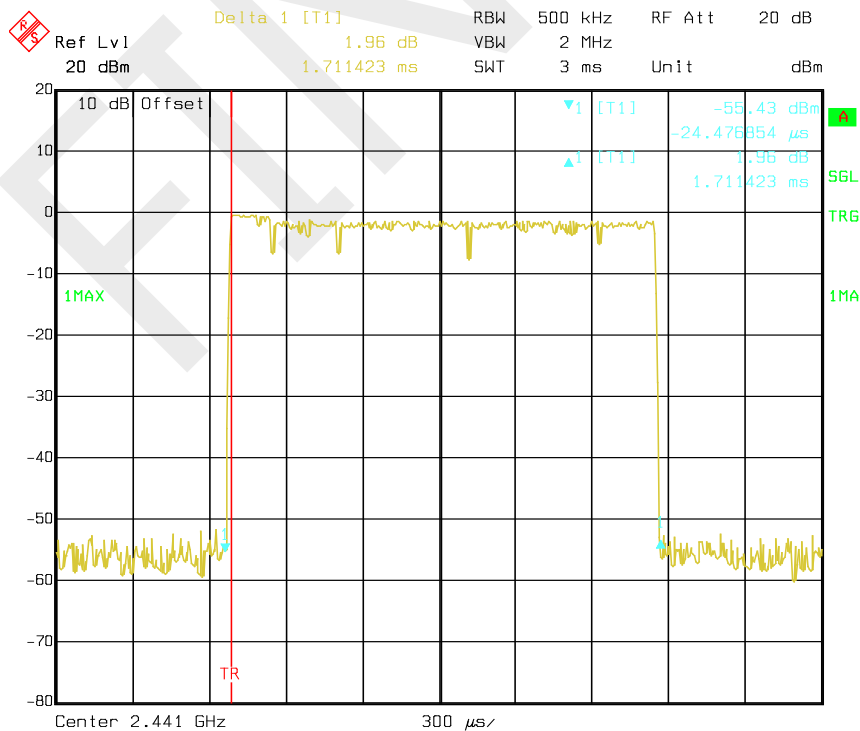

Date: 08.NOV.2019 15:49:47

3DH3: High Channel


◆ Ref Lvl 20 dBm
 Delta 1 [T1] -1.70 dB
 1.711423 ms
 RBW 500 kHz RF Att 20 dB
 VBW 2 MHz
 SWT 3 ms Unit dBm

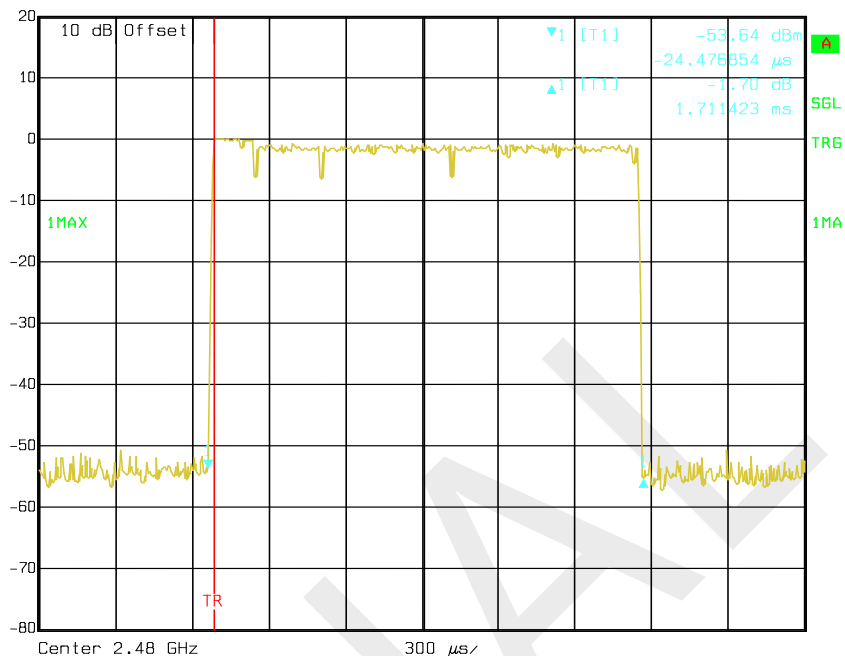

Date: 08.NOV.2019 15:48:55


3DH5: Low Channel

◆ Ref Lvl 20 dBm
 Delta 1 [T1] -0.10 dB
 2.963928 ms
 RBW 500 kHz RF Att 20 dB
 VBW 2 MHz
 SWT 5 ms Unit dBm

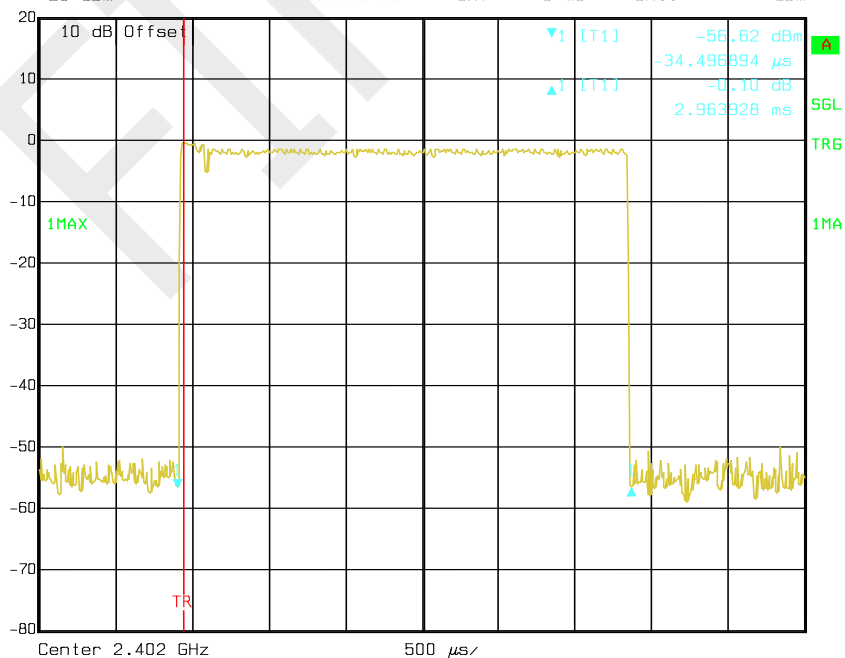


Date: 08.NOV.2019 16:07:41

3DH5: Middle Channel

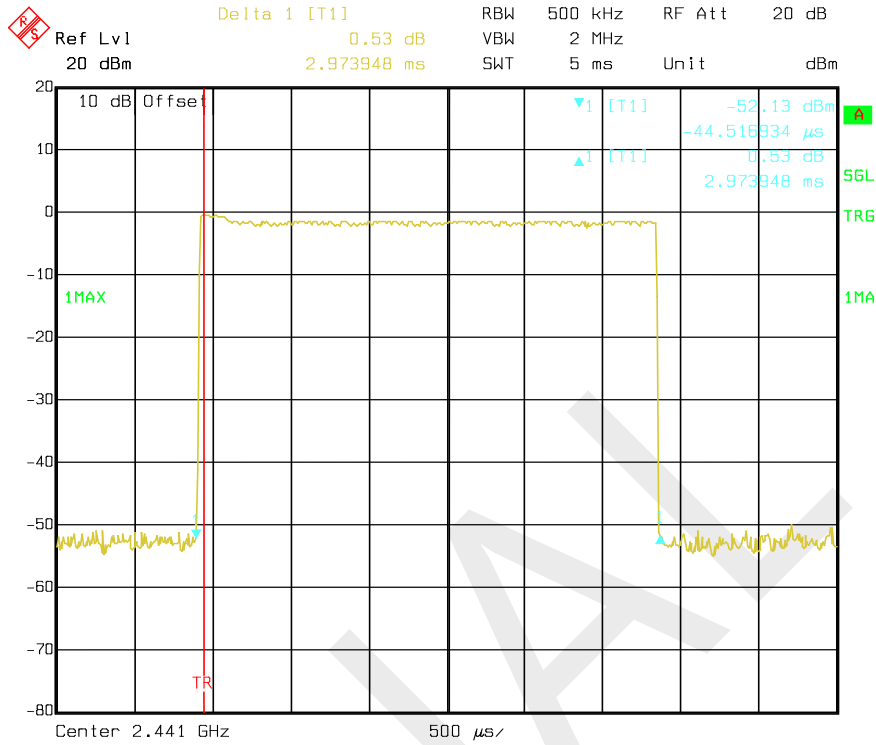

Date: 08.NOV.2019 16:08:42

3DH5: High Channel

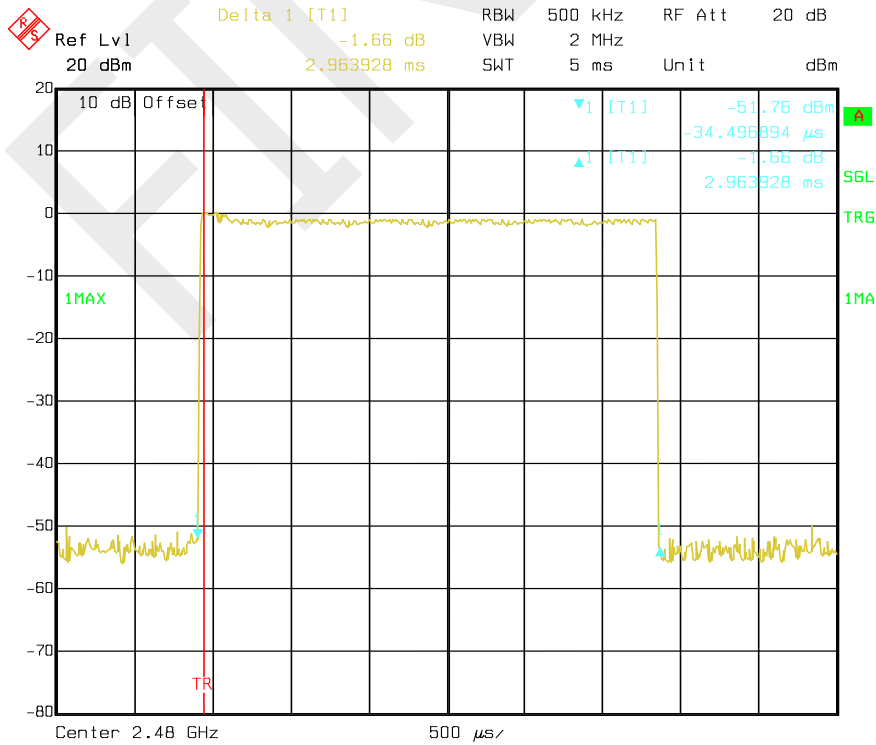

Date: 08.NOV.2019 16:09:53

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	22 °C
Relative Humidity:	57 %
ATM Pressure:	95.1 kPa

The testing was performed by Tian Maofan on 2019-11-08.

Test Result: Compliance. Please refer to following tables and plots

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	Peak Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	Low	2402	2.91	21
	Middle	2441	3.04	21
	High	2480	4.18	21
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	0.37	21
	Middle	2441	0.37	21
	High	2480	0.88	21
EDR Mode (8DPSK)	Low	2402	0.63	21
	Middle	2441	0.63	21
	High	2480	1.01	21

Note: The data above was tested in conducted mode.

BDR Mode (GFSK):

Low Channel


Ref Lvl 20 dBm
Marker 1 [T1] 2.91 dBm
2.40171443 GHz
RBW 3 MHz RF Att 30 dB
VBW 10 MHz
SWT 5 ms Unit dBm

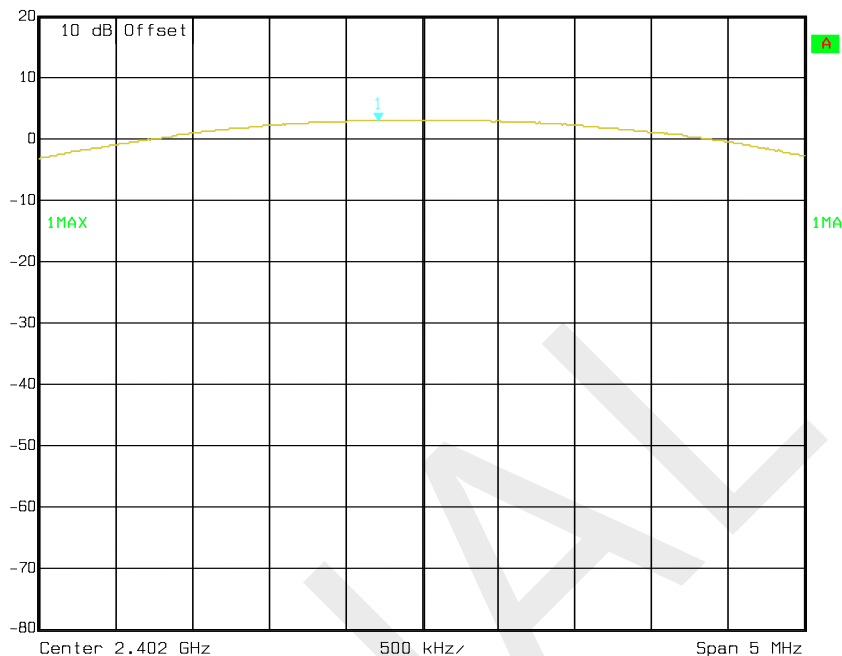

Date: 08.NOV.2019 10:26:41

Middle Channel


Ref Lvl 20 dBm
Marker 1 [T1] 3.04 dBm
2.44060421 GHz
RBW 3 MHz RF Att 30 dB
VBW 10 MHz
SWT 5 ms Unit dBm

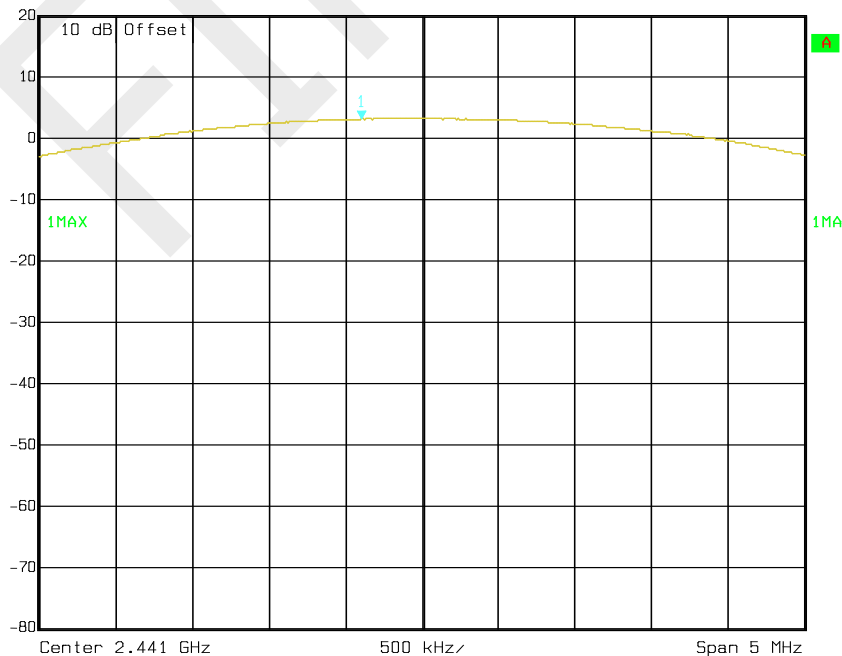

Date: 08.NOV.2019 10:28:51

High Channel

⚠ Ref Lvl 20 dBm
 Marker 1 [T1] 4.18 dBm
 RBW 3 MHz RF Att 30 dB
 VBW 10 MHz
 Unit dBm
 2.47966433 GHz
 SWT 5 ms

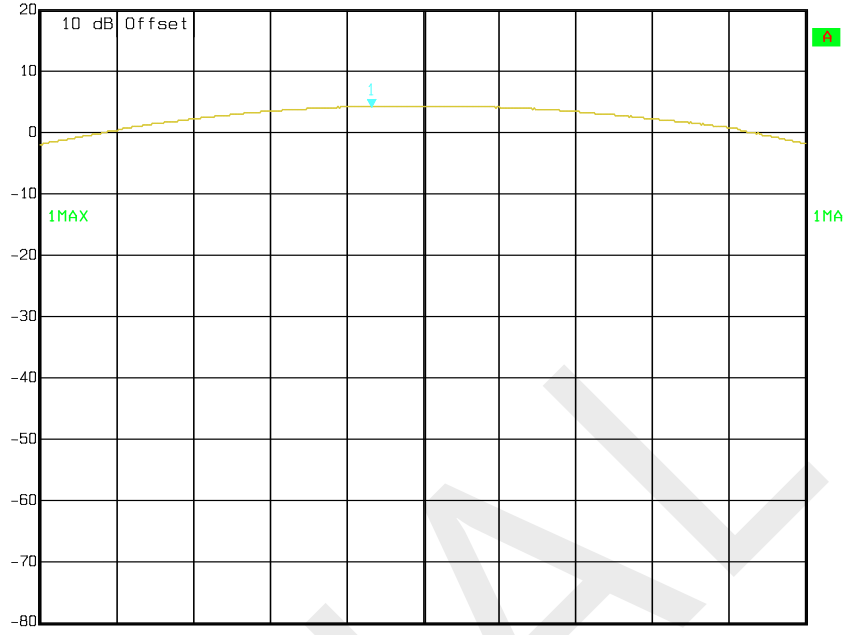


Date: 08.NOV.2019 10:29:28

EDR Mode ($\pi/4$ -DQPSK):

Low Channel


⚠ Ref Lvl 20 dBm
 Marker 1 [T1] 0.37 dBm
 RBW 3 MHz RF Att 20 dB
 VBW 10 MHz
 Unit dBm
 2.40166433 GHz
 SWT 5 ms

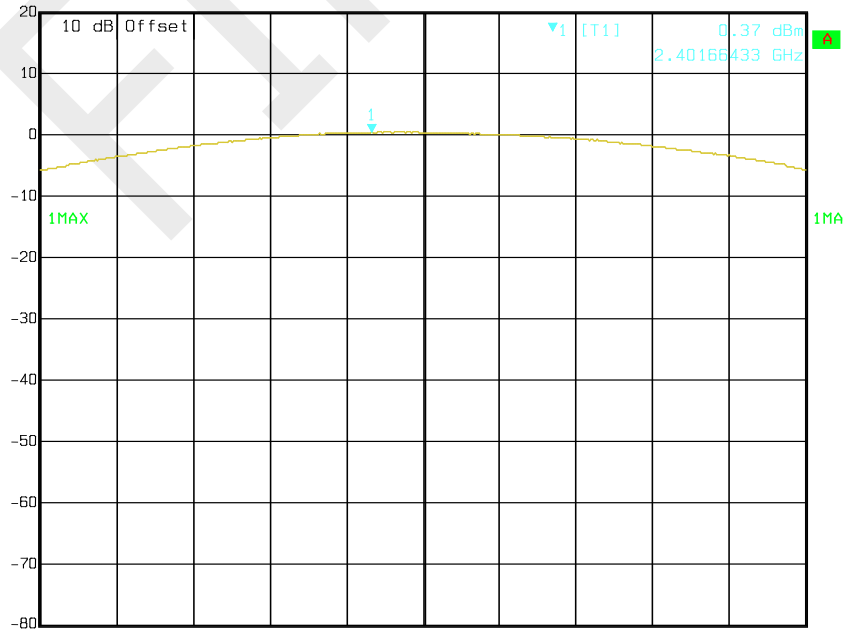

Date: 08.NOV.2019 18:10:34

Middle Channel


✖ Ref Lvl 20 dBm
M Marker 1 [T1] 0.37 dBm
 RBW 3 MHz RF Att 20 dB
 VBW 10 MHz
 Unit dBm
 2.44067435 GHz
 SWT 5 ms

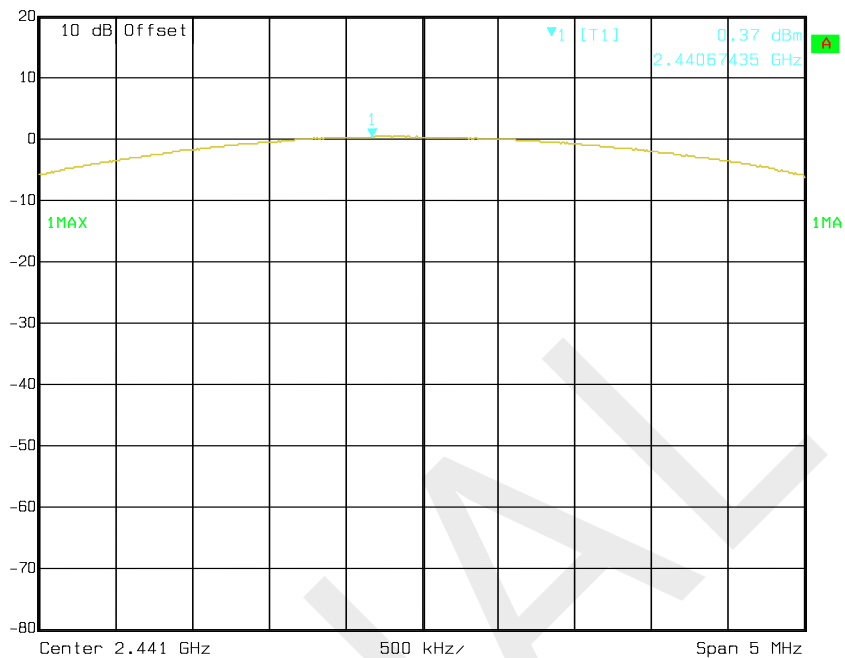

Date: 08.NOV.2019 18:12:03

High Channel


✖ Ref Lvl 20 dBm
M Marker 1 [T1] 0.88 dBm
 RBW 3 MHz RF Att 20 dB
 VBW 10 MHz
 Unit dBm
 2.47987475 GHz
 SWT 5 ms

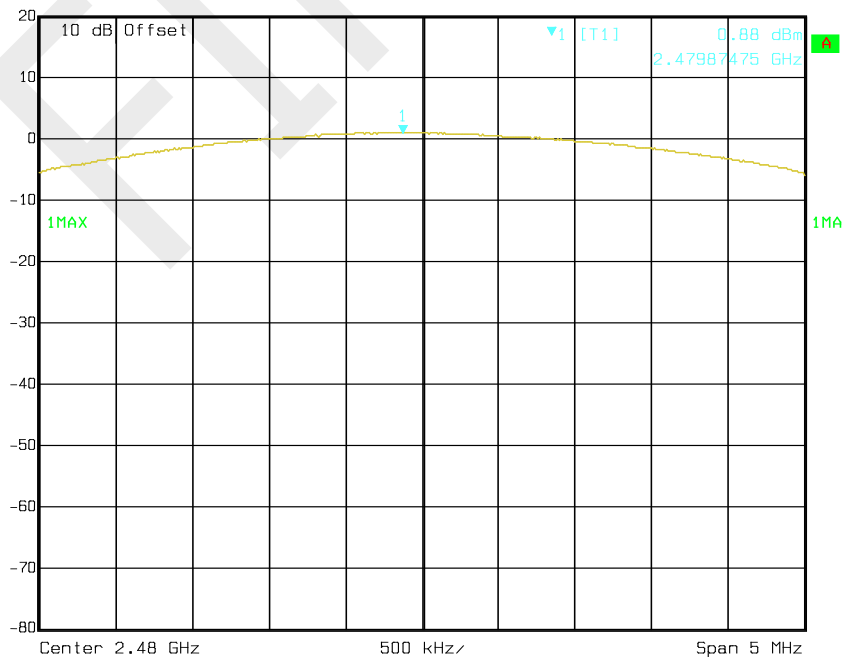


Date: 08.NOV.2019 18:13:34

EDR Mode (8DPSK):

Low Channel

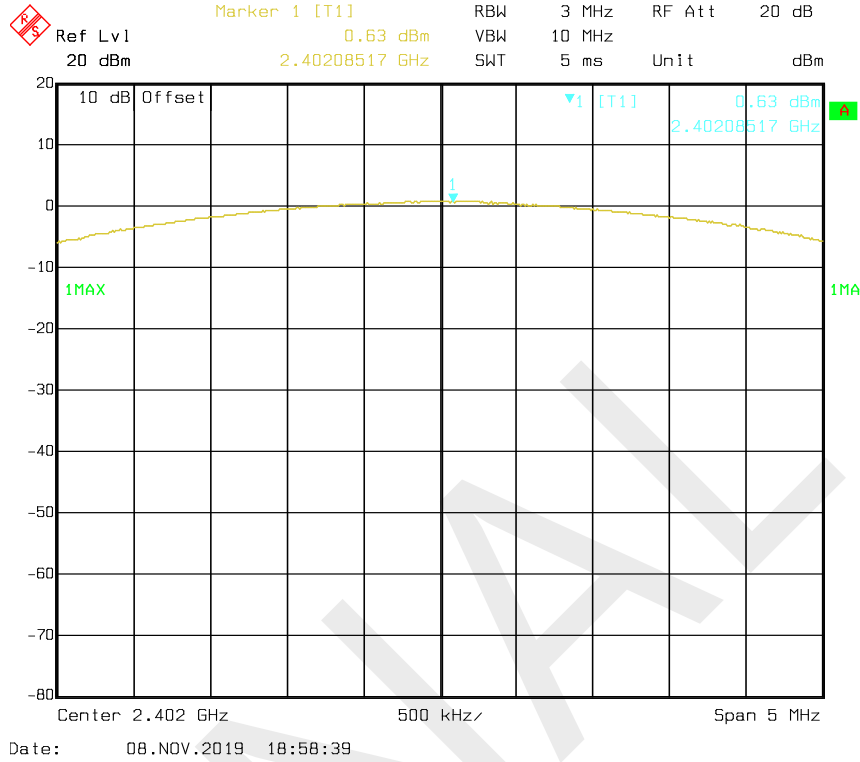


Middle Channel

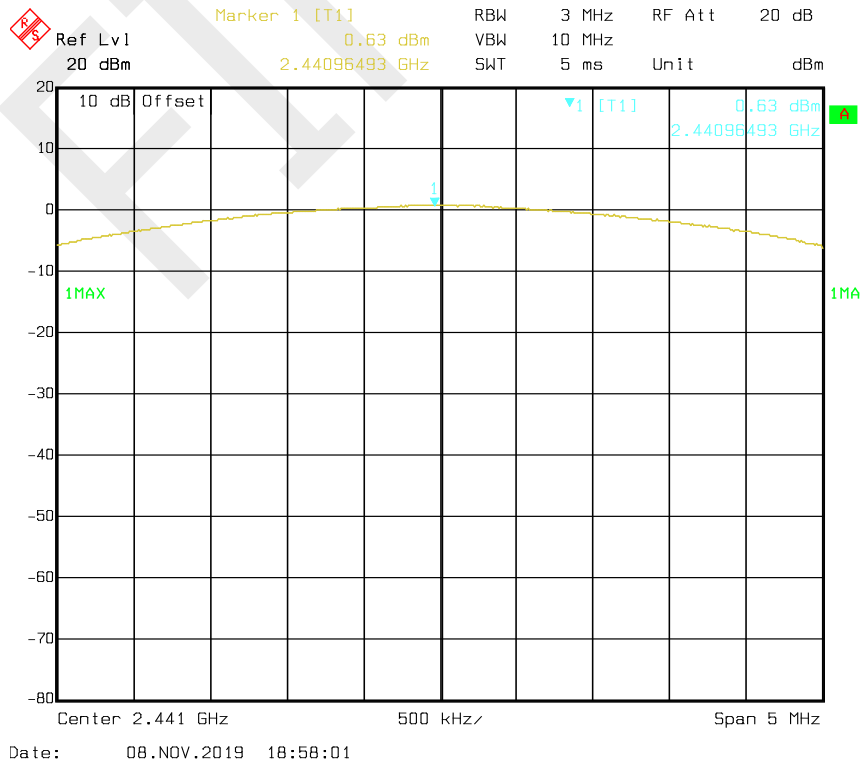

High Channel

Ref Lvl 20 dBm
Marker 1 [T1] 1.01 dBm
2.47993487 GHz
RBW 3 MHz RF Att 20 dB
VBW 10 MHz
SWT 5 ms Unit dBm

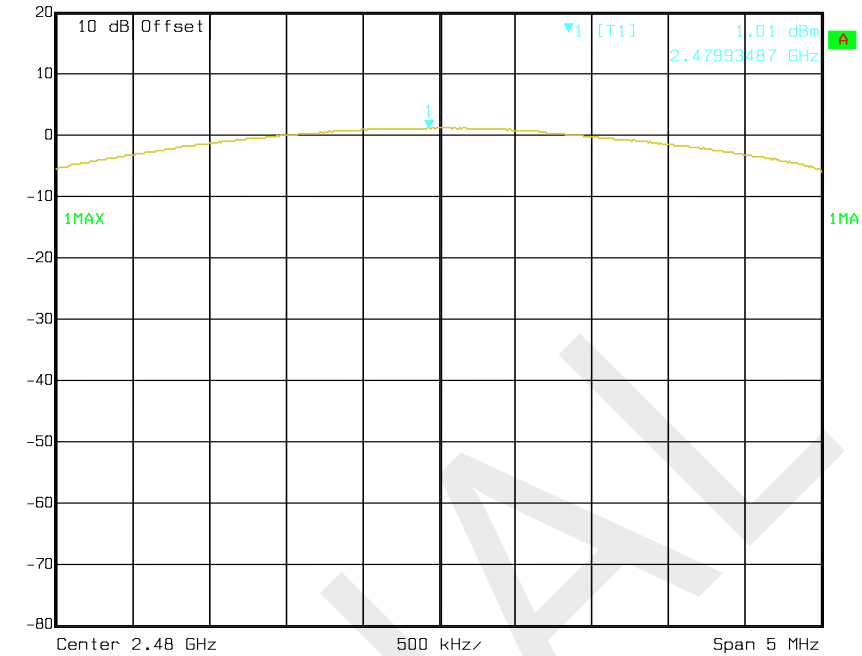

Date: 08.NOV.2019 18:57:23

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW=100 kHz; VBW=300 kHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	22 °C
Relative Humidity:	57 %
ATM Pressure:	95.1 kPa

The testing was performed by Tian Maofan on 2019-11-08.


Test Result: Compliance. Please refer to the below plots:

Single Channel
BDR Mode (GFSK):

Band Edge, Left Side

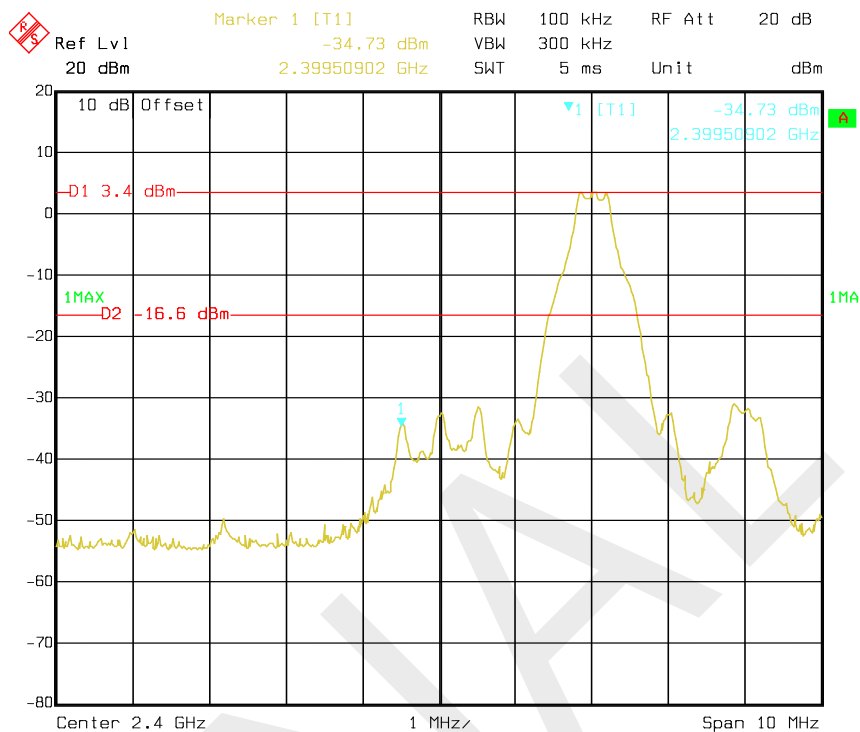


Band Edge, Right Side

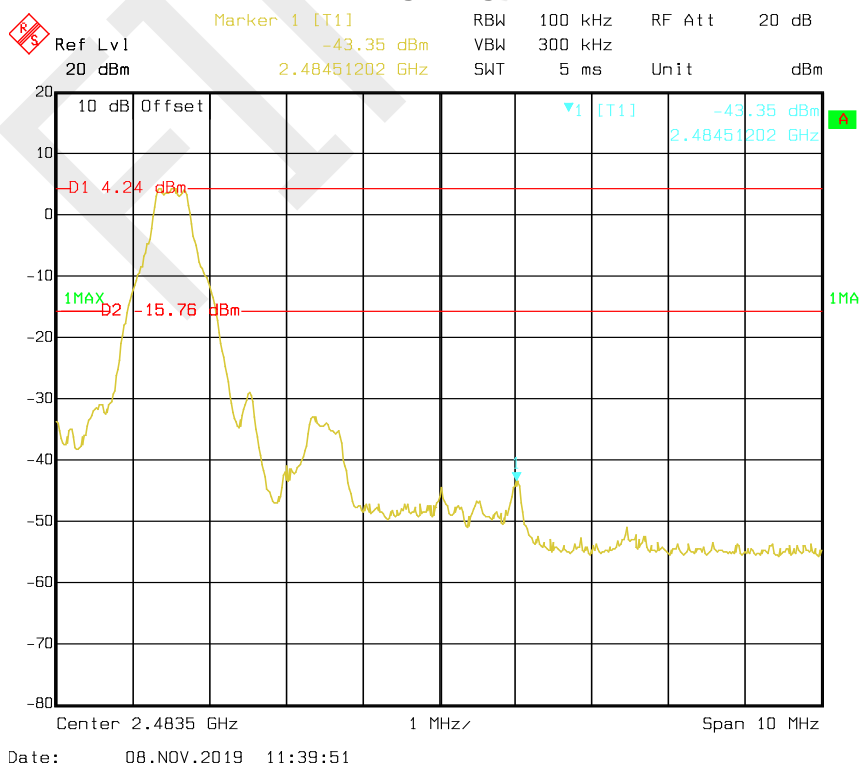


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

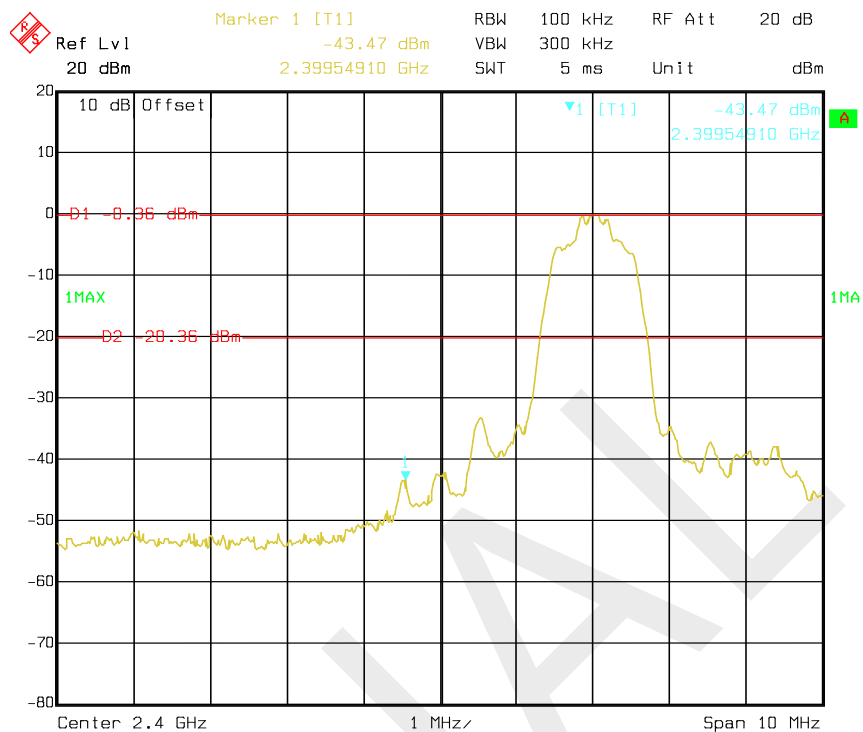

Date: 08.NOV.2019 16:43:45


Band Edge, Right Side

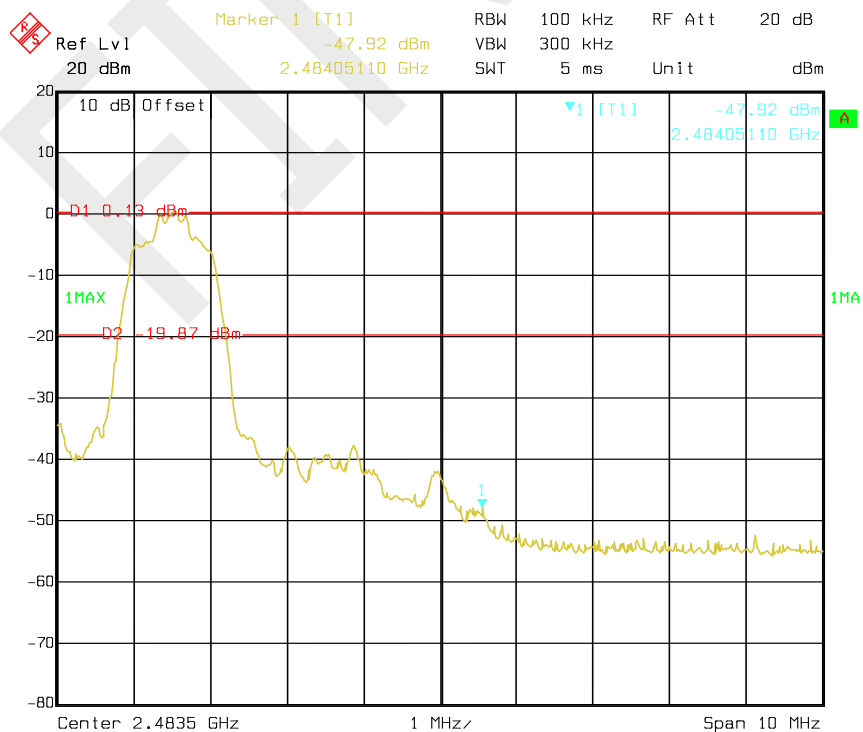

Date: 08.NOV.2019 16:47:13


EDR Mode (8DPSK):

Band Edge, Left Side

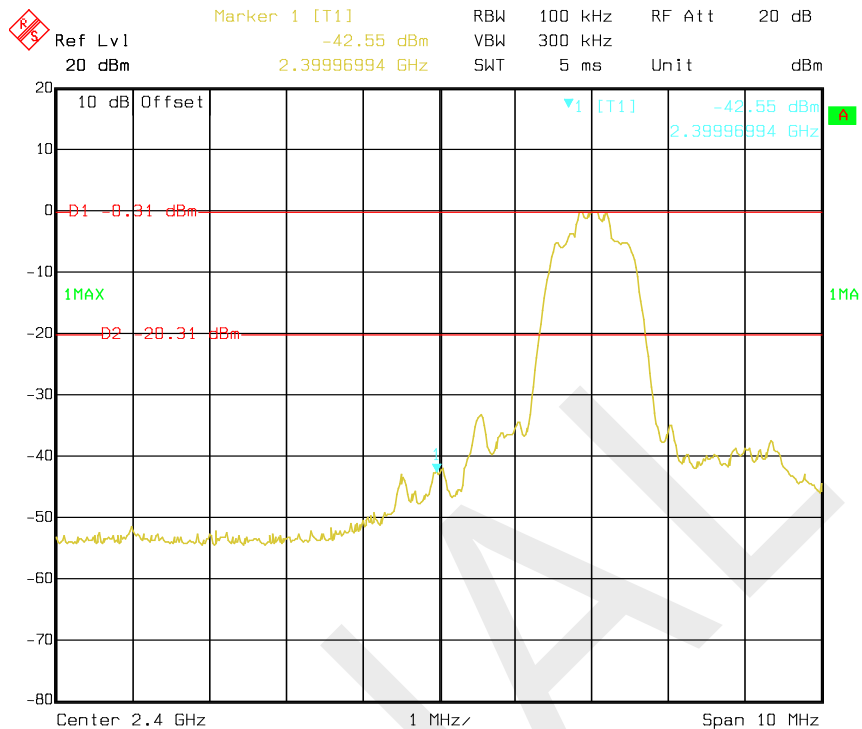

Date: 08.NOV.2019 17:09:38

Band Edge, Right Side

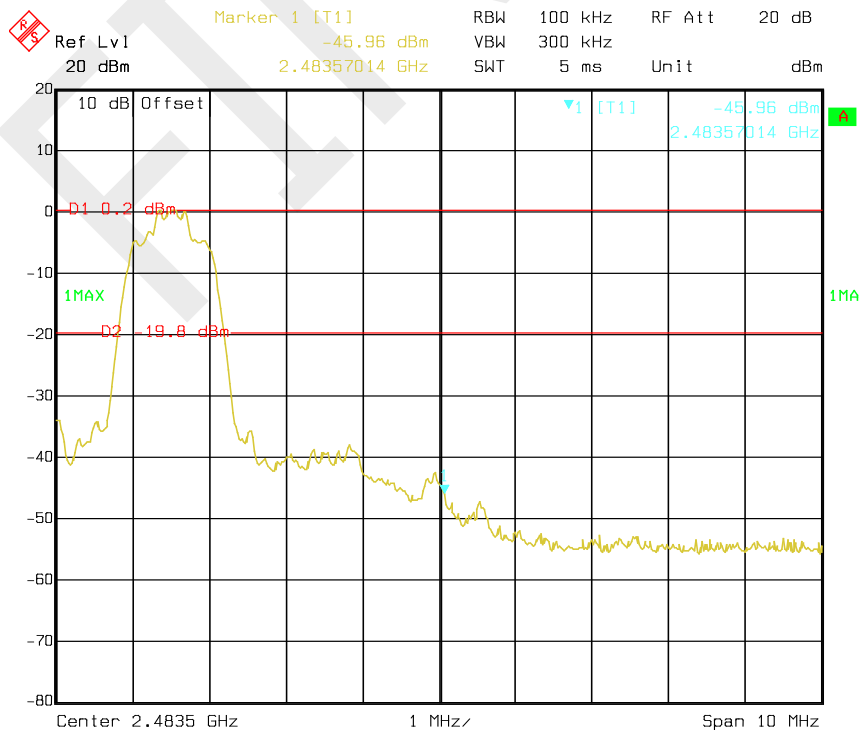


Date: 08.NOV.2019 17:05:47


Hopping:

BDR Mode (GFSK):

Band Edge, Left Side

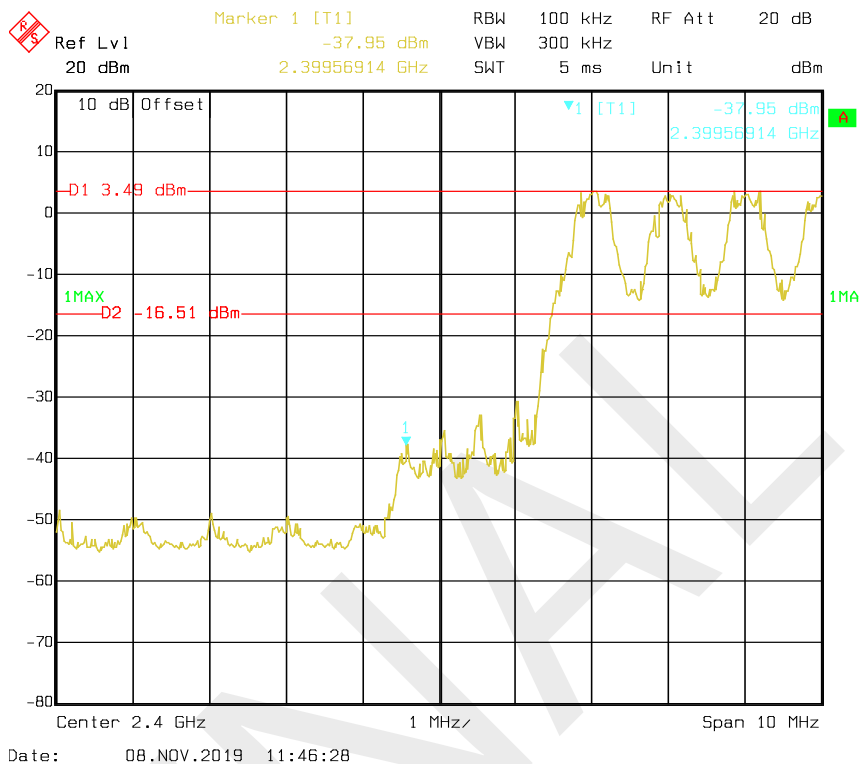


Band Edge, Right Side

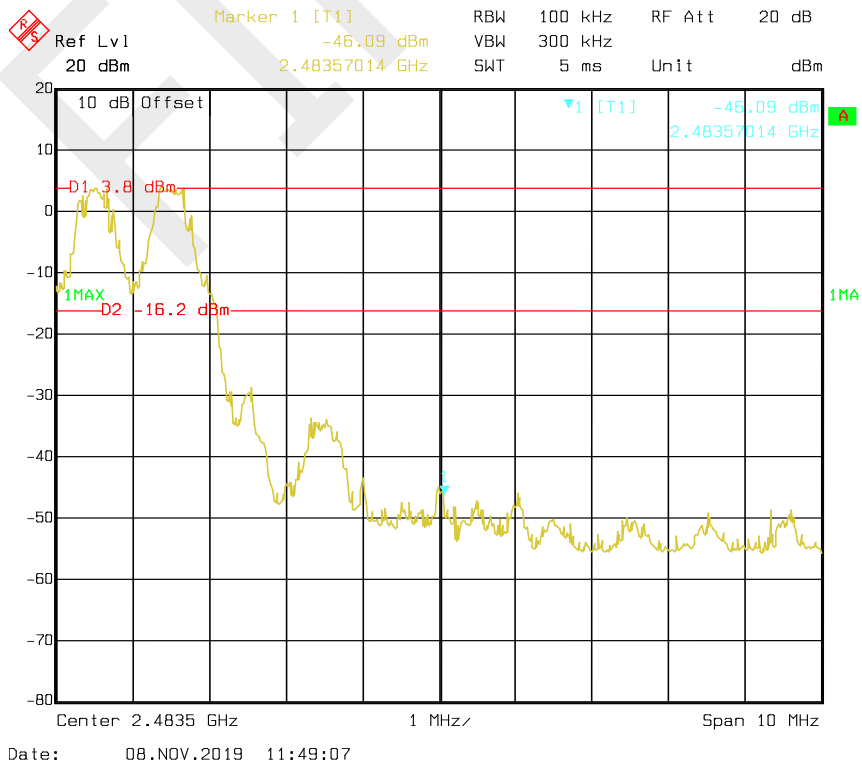


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

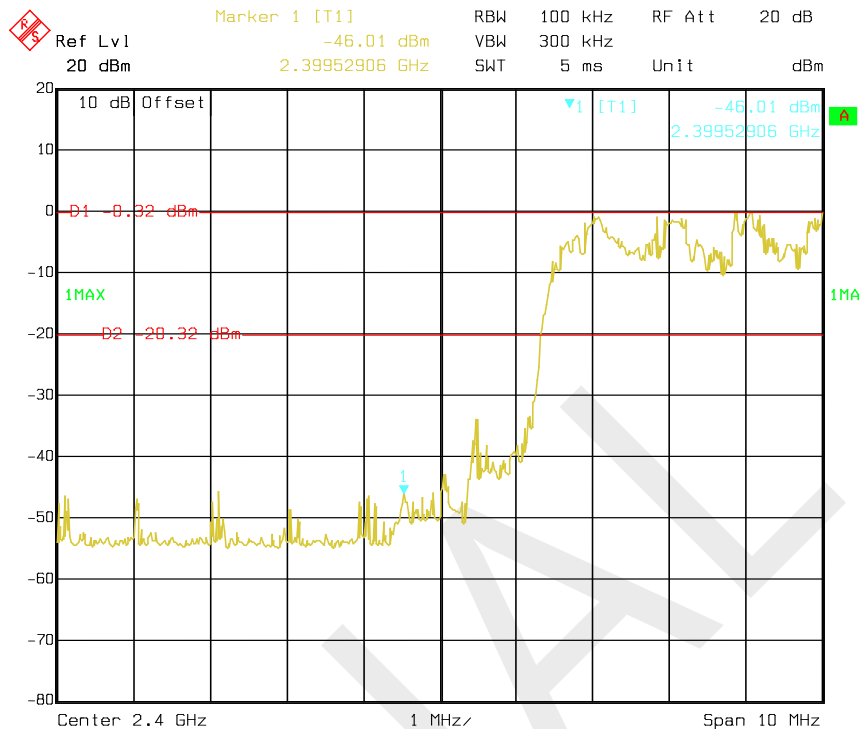

Date: 08.NOV.2019 16:57:10


Band Edge, Right Side

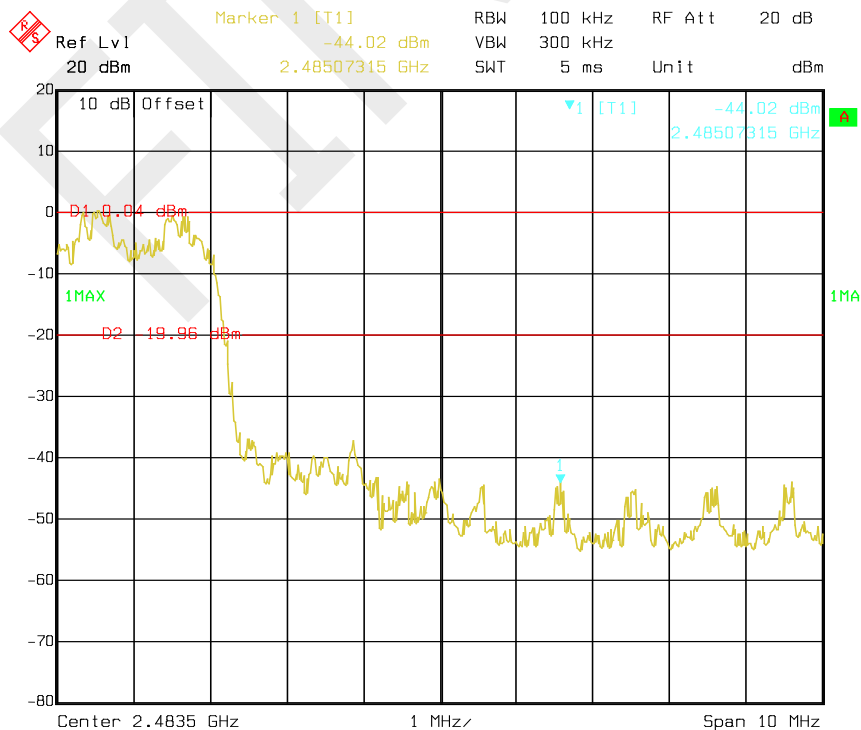


Date: 08.NOV.2019 16:53:54

EDR Mode (8DPSK):

Band Edge, Left Side

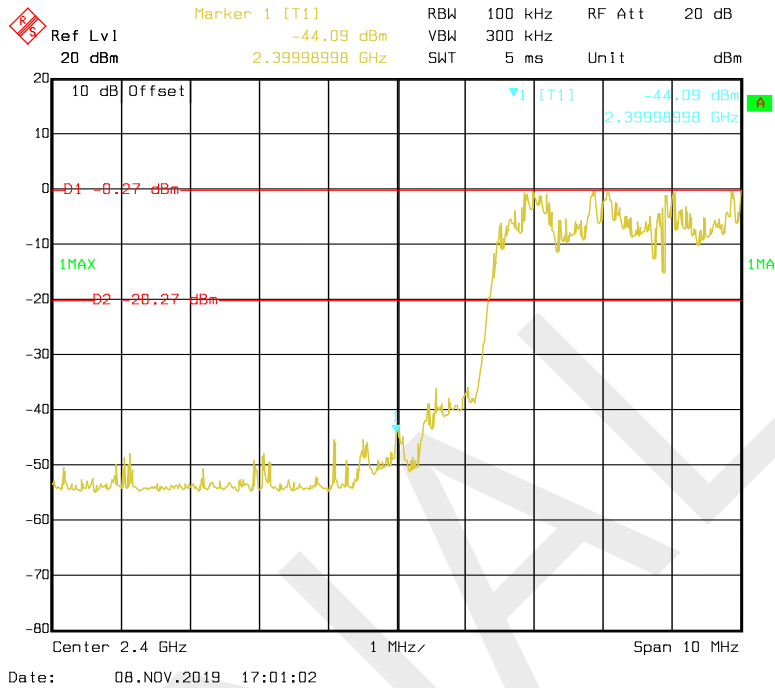

Band Edge, Right Side

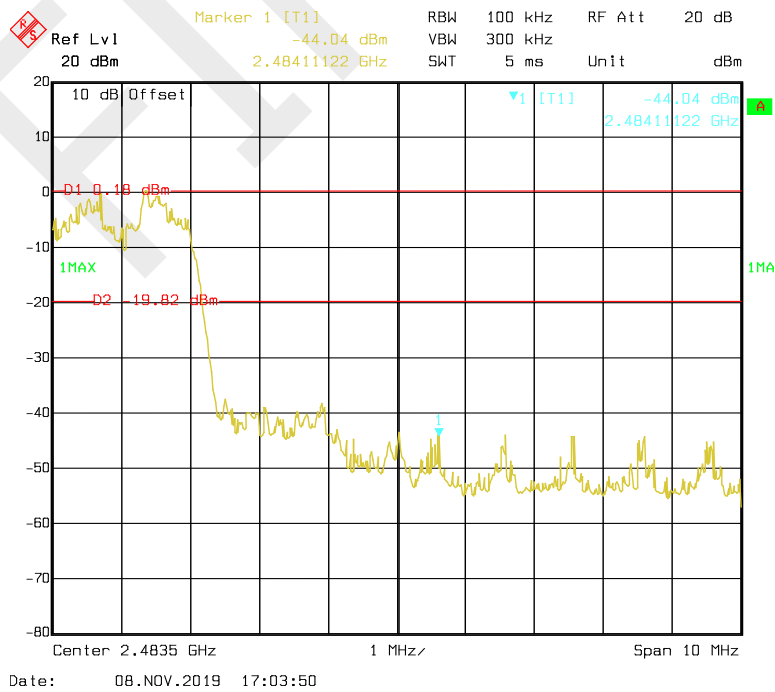

END OF REPORT