

FCC TEST REPORT  
FOR  
VISUAL LAND INC.  
11.6 inch TABLET  
Model No.: ME-11E  
Additional Model No.: ME-10E, ME-13E, ME-10SE

Prepared for : VISUAL LAND INC.  
Address : 17785 Center Court Dr. Suite 670, Cerritos, CA 90703,  
USA

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an  
Avenue, Bao'an District, Shenzhen, Guangdong, China  
Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : December 01, 2015  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : December 01, 2015 – December 24, 2015  
Date of Report : December 24, 2015

**FCC TEST REPORT****FCC CFR 47 PART 15 Subpart B: 2014****Report Reference No. .... : LCS1512252495E**

Date Of Issue..... : December 24, 2015

**Testing Laboratory Name ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**Address..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure..... : Full application of Harmonised standards ■  
Partial application of Harmonised standards □  
Other standard testing method □**Applicant's Name..... : VISUAL LAND INC.**

Address..... : 17785 Center Court Dr. Suite 670, Cerritos, CA 90703, USA

**Test Specification**

Standard..... : FCC CFR 47 PART 15 Subpart B: 2014, ANSI C63.4-2014

Test Report Form No. .... : LCSEMC-1.0

TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description..... : 11.6 inch TABLET**

Trade Mark ..... : VISUAL LAND

Model/Type Reference..... : ME-11E

Ratings..... : DC 3.7V by battery

**Result ..... : Positive****Compiled by:**

Jacky Li/ File administrators

**Supervised by:**

Glin Lu/ Technique principal

**Approved by:**

Gavin Liang/ Manager

## FCC -- TEST REPORT

**Test Report No. : LCS1512252495E**December 24, 2015

Date of issue

Type / Model..... : ME-11E

EUT..... : 11.6 inch TABLET

**Applicant..... : VISUAL LAND INC.**

Address..... : 17785 Center Court Dr. Suite 670, Cerritos, CA 90703, USA

Telephone..... : 562-860-2600

Fax..... : 562-860-2607

**Manufacturer..... : VISUAL LAND INC.**

Address..... : 17785 Center Court Dr. Suite 670, Cerritos, CA 90703, USA

Telephone..... : 562-860-2600

Fax..... : 562-860-2607

**Factory..... : VISUAL LAND INC.**

Address..... : 17785 Center Court Dr. Suite 670, Cerritos, CA 90703, USA

Telephone..... : 562-860-2600

Fax..... : 562-860-2607

**Test Result** according to the standards on page 5: **Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## TABLE OF CONTENTS

Test Report Description	Page
<b>1. SUMMARY OF STANDARDS AND RESULTS.....</b>	<b>5</b>
1.1. Description of Standards and Results .....	5
<b>2. GENERAL INFORMATION .....</b>	<b>6</b>
2.1. Description of Device (EUT).....	6
2.2. Description of Test Facility .....	6
2.3. Statement of the measurement uncertainty.....	7
2.4. Measurement Uncertainty .....	7
<b>3. RADIATED EMISSION MEASUREMENT.....</b>	<b>8</b>
3.1. Test Equipment .....	8
3.2. Block Diagram of Test Setup .....	8
3.3. Radiated Emission Limit (Class B) .....	9
3.4. EUT Configuration on Measurement.....	9
3.5. Operating Condition of EUT .....	9
3.6. Test Procedure .....	9
3.7. Radiated Emission Noise Measurement Result.....	10
<b>4. POWER LINE CONDUCTED EMISSIONS .....</b>	<b>12</b>
4.1. Standard Applicable.....	12
4.2. Test Equipment .....	12
4.3. Block Diagram of Test Setup .....	12
4.4. Test Results.....	13

# 1. SUMMARY OF STANDARDS AND RESULTS

## 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC CFR 47 PART 15 Subpart B: 2014	Class B	N/A
Radiated disturbance	FCC CFR 47 PART 15 Subpart B: 2014	Class B	PASS
N/A is an abbreviation for Not Applicable.			

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT	: 11.6 inch TABLET
Model No.	: ME-11E
Frequency Range	: 2.402-2.480GHz
Channel Number	: 79 channels for BT V3.0; 40 channels for BT V4.0
Channel frequency	: 2402.00-2480.00MHz (Channel Frequency=2402+1(K-1), K=1, 2, 3 .....79) for BT V3.0; 2402.00-2480.00MHz (Channel Frequency=2402+2(K-1), K=0, 2, 3 .....39) for BT V4.0;
Channel Spacing	: 1MHz for BT V3.0; 2MHz for BT V4.0
Modulation Type	: GFSK, $\pi$ /4-DQPSK, 8-DPSK
Bluetooth Version	: BT V3.0+ V4.0
Antenna Gain	: Integral antenna, 0.1 dBi(Max.)
Input Voltage	: DC 3.7V by battery

### 2.2. Description of Test Facility

EMC Lab.	: CNAS Registration Number. is L4595. FCC Registration Number. is 899208. Industry Canada Registration Number. is 9642A-1. VCCI Registration Number. is C-4260 and R-3804. ESMD Registration Number. is ARCB0108. UL Registration Number. is 100571-492. TUV SUD Registration Number. is SCN1081. TUV RH Registration Number. is UA 50296516-001
----------	---

### 2.3.Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

### 2.4.Measurement Uncertainty

Test Item	Frequency Range	Expanded uncertainty (U <sub>lab</sub> )	Expanded uncertainty (U <sub>cispr</sub> )
Conducted Emission	(9kHz to 150kHz)	2.63 dB	4.0 dB
	(150kHz to 30MHz)	2.35 dB	3.6 dB
Radiated Emission	(9kHz to 30MHz)	3.68 dB	N/A
Radiated Emission	(30MHz to 1000MHz)	3.48 dB	5.2 dB
Radiated Emission	(above 1000MHz)	3.90 dB	N/A

- (1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.
- (2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.


### 3. RADIATED EMISSION MEASUREMENT

#### 3.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2015/02/04
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2015/06/18
3	Log per Antenna	SCHWARZBECK	VULB9163	9163-470	2015/06/18
4	EMI Test Software	AUDIX	E3	N/A	2015/06/18
5	Positioning Controller	MF	MF-7082	/	2015/06/18

#### 3.2. Block Diagram of Test Setup

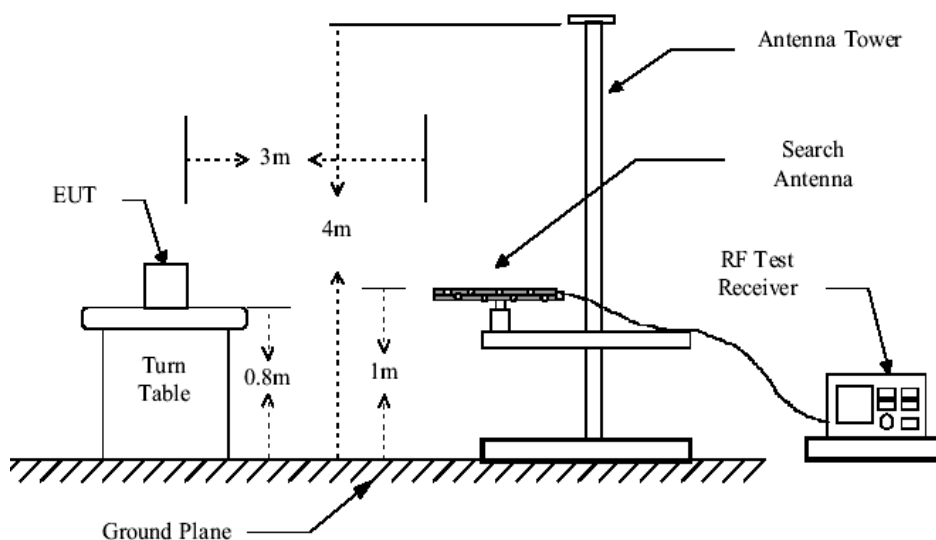

*Below 1G*

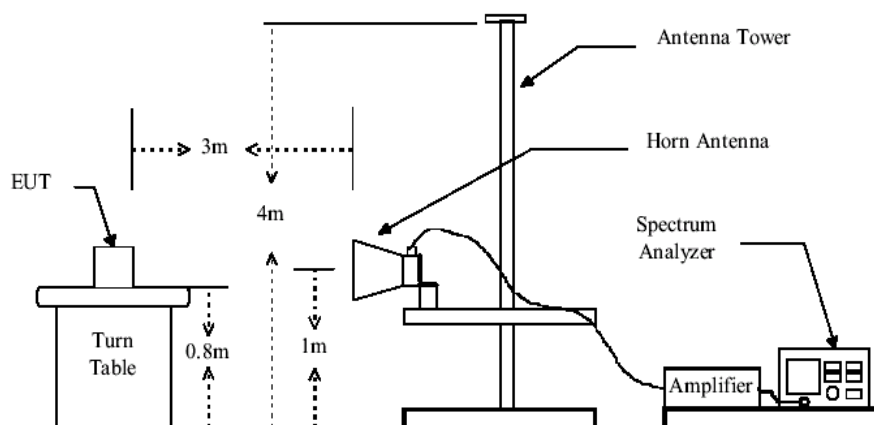

*Above 1G*



### 3.3. Radiated Emission Limit (Class B)

Limits for radiated disturbance Blow 1GHz

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46
960 ~ 1000	3	500	54
Remark : (1) Emission level $(\text{dB})\mu\text{V} = 20 \log$ Emission level $\mu\text{V/m}$ (2) The smaller limit shall apply at the cross point between two frequency bands. (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.			

### 3.4. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 3.5. Operating Condition of EUT

4.5.1. Setup the EUT as shown in Section 4.2.

4.5.2. Let the EUT work in test mode (on) and measure it.

### 3.6. Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated by-log antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009 on radiated emission measurement. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Below 1G:

The bandwidth of the EMI test receiver is set at 120kHz, 1000kHz.

The frequency range from 30MHz to 1000MHz is checked.

Above 1G:


The bandwidth of the EMI test receiver is set at 1MHz, 3MHz for Peak detector.

The bandwidth of the EMI test receiver is set at 1MHz, 10Hz for Average detector

The frequency range from 1GHz to 6GHz is checked.

## 3.7. Radiated Emission Noise Measurement Result


Test Mode: Transmit data with PC	Test voltage: DC 3.7V
Test Distance: 3m	Test Results: Passed

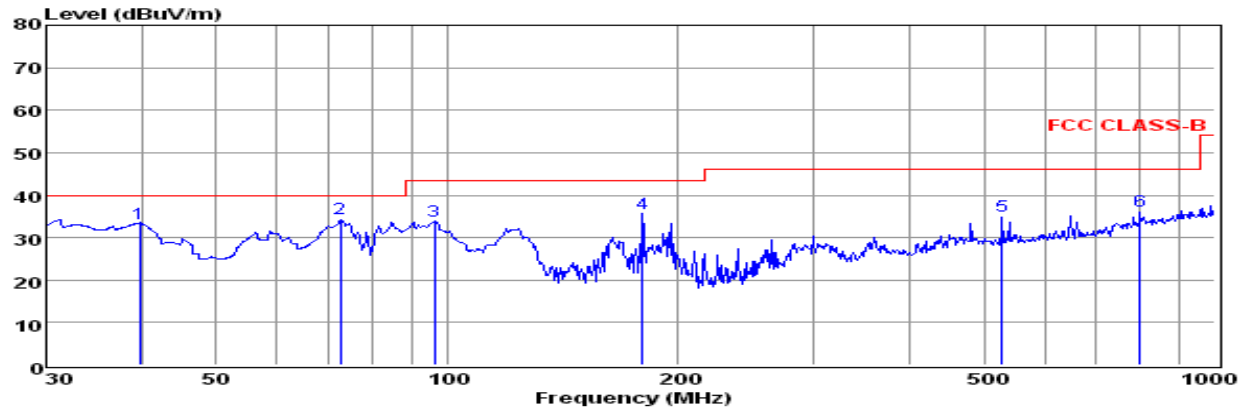

Env./Ins: 24°C/56%  
pol: HORIZONTAL

	Freq MHz	Reading dBuV	CabLos dB	Antfac dB/m	Measured dBuV/m	Limit dBuV/m	Over dB	Remark
1	39.71	19.51	0.38	13.51	33.40	40.00	-6.60	QP
2	72.59	25.65	0.55	8.21	34.41	40.00	-5.59	QP
3	96.10	20.39	0.58	12.91	33.88	43.50	-9.62	QP
4	179.39	25.28	0.89	9.64	35.81	43.50	-7.69	QP
5	528.25	16.43	1.46	17.11	35.00	46.00	-11.00	QP
6	798.98	14.67	1.68	20.05	36.40	46.00	-9.60	QP

Note: 1. All readings are Quasi-peak values.  
2. Measured= Reading + Antenna Factor + Cable Loss  
3. The emission that are 20dB below the official limit are not reported

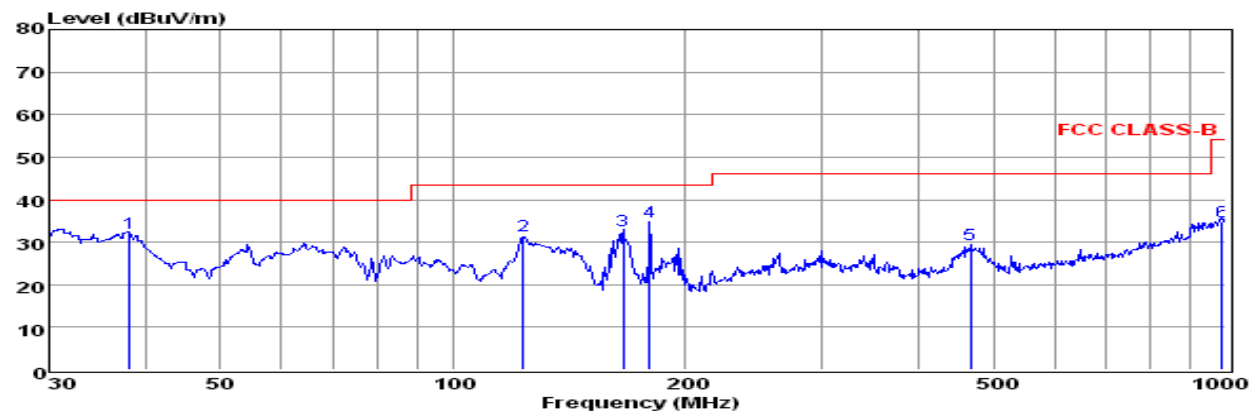

Env./Ins: 24°C/56%  
pol: VERTICAL

	Freq MHz	Reading dBuV	CabLos dB	Antfac dB/m	Measured dBuV/m	Limit dBuV/m	Over dB	Remark
1	38.08	18.74	0.38	13.09	32.21	40.00	-7.79	QP
2	123.27	20.92	0.70	9.97	31.59	43.50	-11.91	QP
3	166.07	23.08	0.77	8.85	32.70	43.50	-10.80	QP
4	179.39	24.16	0.89	9.64	34.69	43.50	-8.81	QP
5	467.24	12.46	1.31	15.76	29.53	46.00	-16.47	QP
6	989.54	11.21	2.01	21.67	34.89	54.00	-19.11	QP

Note: 1. All readings are Quasi-peak values.  
2. Measured= Reading + Antenna Factor + Cable Loss  
3. The emission that are 20dB below the official limit are not reported

Polarization	Frequency MHz	Emission Level dB $\mu$ V/m		Limits dB $\mu$ V/m		Margin dB $\mu$ V/m	
		Peak	AVG	Peak	AVG	Peak	AVG
Horizontal	2537.16	60.25	44.92	74.00	54.00	-13.75	-9.08
	3633.52	62.12	46.11	74.00	54.00	-11.88	-7.89
	5247.38	58.53	42.87	74.00	54.00	-15.47	-11.13
Vertical	1936.82	58.42	42.26	74.00	54.00	-15.58	-11.74
	3128.02	61.03	45.71	74.00	54.00	-12.97	-8.29
	4932.17	54.28	38.02	74.00	54.00	-19.72	-15.98

**Notes:**

1. Measuring frequencies from 9k~6GHz , No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~6GHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measure
4. Only record the worst test result.

## 4. POWER LINE CONDUCTED EMISSIONS

### 4.1. Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:


Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

### 4.2. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101142	2013/06/18
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	101840	2013/06/18
3	Artificial Mains	ROHDE & SCHWARZ	ENV216	101288	2013/06/19
4	EMI Test Software	AUDIX	E3	N/A	2013/06/18


### 4.3. Block Diagram of Test Setup

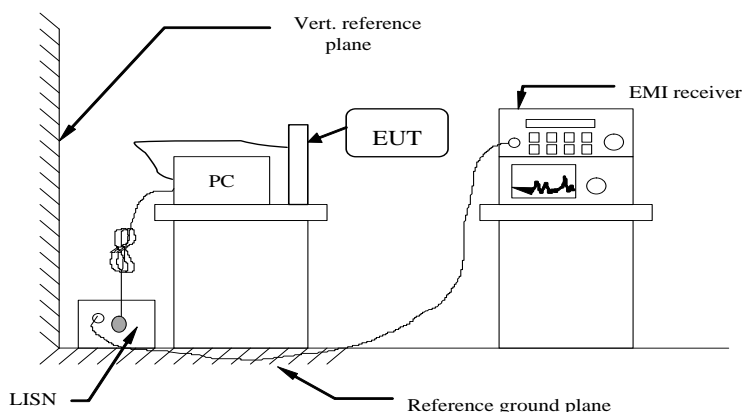

## 4.4. Test Results

PASS.


Test result for AC 120V

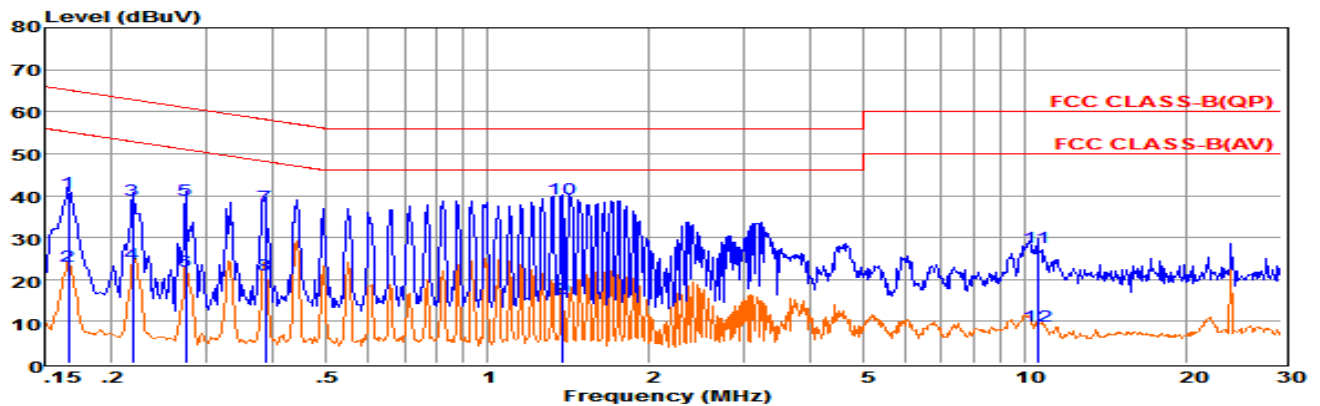

Env. Ins: 24\*/56%  
 Pol: LINE

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBpW	dB	dB	dBpW	dBpW	dB	
1	0.17	21.16	9.59	0.02	40.77	65.16	-24.39	QP
2	0.17	3.58	9.59	0.02	23.19	55.16	-31.97	Average
3	0.22	19.20	9.63	0.03	38.86	62.88	-24.02	QP
4	0.22	4.03	9.63	0.03	23.69	52.87	-29.18	Average
5	0.27	19.42	9.63	0.03	39.08	60.98	-21.90	QP
6	0.27	2.24	9.63	0.03	21.90	50.98	-29.08	Average
7	0.39	17.92	9.62	0.04	37.58	58.17	-20.59	QP
8	0.39	1.60	9.62	0.04	21.26	48.16	-26.90	Average
9	1.38	-4.29	9.63	0.05	15.39	46.00	-30.61	Average
10	1.38	19.49	9.63	0.05	39.17	56.00	-16.83	QP
11	10.56	7.87	9.69	0.08	27.64	60.00	-32.36	QP
12	10.56	-10.89	9.69	0.08	8.88	50.00	-41.12	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.  
 2. The emission levels that are 20dB below the official limit are not reported.

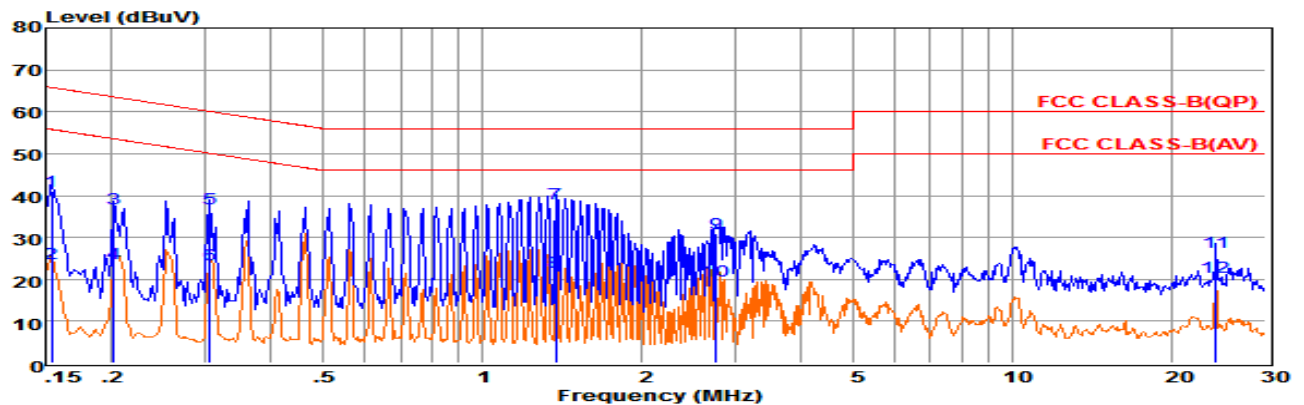


Env. Ins: 24\*/56%  
 Pol: NEUTRAL

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBpW	dB	dB	dBpW	dBpW	dB	
1	0.15	21.37	9.69	0.02	41.08	65.78	-24.70	QP
2	0.15	3.95	9.69	0.02	23.66	55.77	-32.11	Average
3	0.20	17.18	9.59	0.02	36.79	63.54	-26.75	QP
4	0.20	4.18	9.59	0.02	23.79	53.53	-29.74	Average
5	0.31	17.37	9.60	0.03	37.00	60.06	-23.06	QP
6	0.31	3.83	9.60	0.03	23.46	50.06	-26.60	Average
7	1.37	18.53	9.63	0.05	38.21	56.00	-17.79	QP
8	1.38	2.16	9.63	0.05	21.84	46.00	-24.16	Average
9	2.76	11.33	9.64	0.05	31.02	56.00	-24.98	QP
10	2.77	-0.08	9.64	0.05	19.61	46.00	-26.39	Average
11	24.14	6.65	9.82	0.13	26.60	60.00	-33.40	QP
12	24.14	0.58	9.82	0.13	20.53	50.00	-29.47	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.  
 2. The emission levels that are 20dB below the official limit are not reported.


## Test result for AC 240V

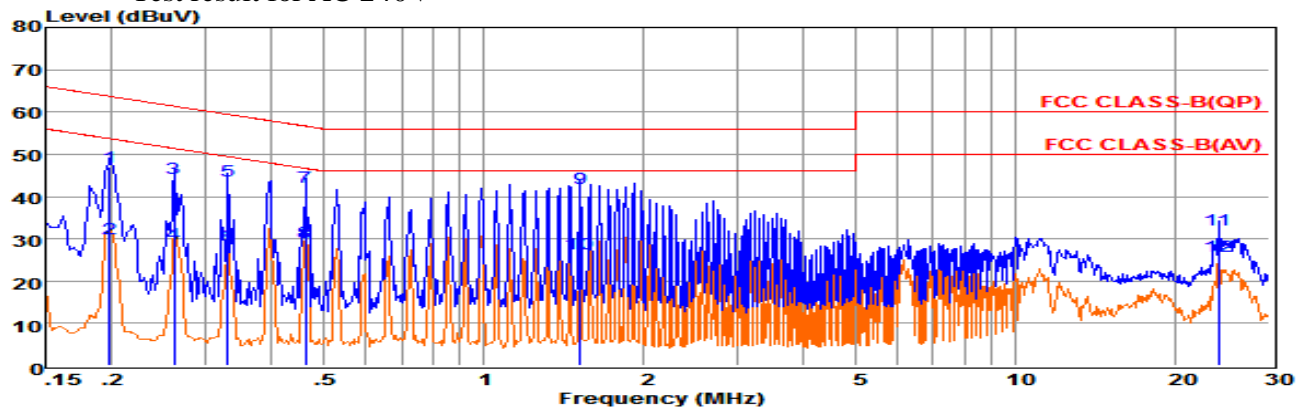

Env. Ins: 24\*/56%  
Pol: NEUTRAL

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBpW	dB	dB	dBpW	dBpW	dB	
1	0.20	27.49	9.59	0.02	47.10	63.71	-16.61	QP
2	0.20	10.48	9.59	0.02	30.09	53.71	-23.62	Average
3	0.26	24.71	9.60	0.03	44.34	61.38	-17.04	QP
4	0.26	9.17	9.60	0.03	28.80	51.38	-22.58	Average
5	0.33	23.94	9.61	0.03	43.58	59.44	-15.86	QP
6	0.33	8.57	9.61	0.03	28.21	49.44	-21.23	Average
7	0.46	22.62	9.62	0.04	42.28	56.67	-14.39	QP
8	0.46	9.47	9.62	0.04	29.13	46.67	-17.54	Average
9	1.52	22.21	9.63	0.05	41.89	56.00	-14.11	QP
10	1.52	6.90	9.63	0.05	26.58	46.00	-19.42	Average
11	24.01	12.20	9.82	0.13	32.15	60.00	-27.85	QP
12	24.02	5.97	9.82	0.13	25.92	50.00	-24.08	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.  
2. The emission levels that are 20dB below the official limit are not reported.

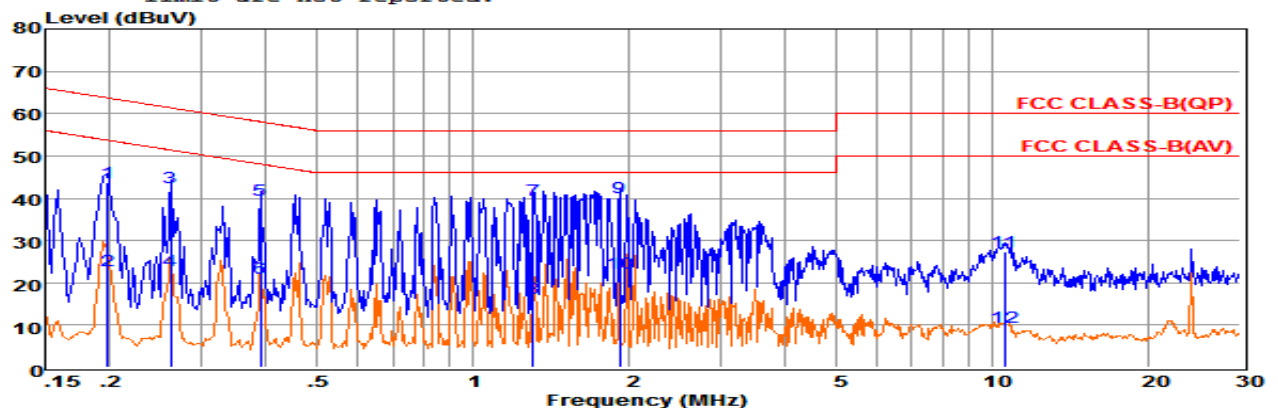

Env. Ins: 24\*/56%  
Pol: LINE

	Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBpW	dB	dB	dBpW	dBpW	dB	
1	0.20	24.14	9.63	0.02	43.79	63.71	-19.92	QP
2	0.20	3.39	9.63	0.02	23.04	53.71	-30.67	Average
3	0.26	22.74	9.63	0.03	42.40	61.38	-18.98	QP
4	0.26	3.13	9.63	0.03	22.79	51.38	-28.59	Average
5	0.39	19.90	9.62	0.04	39.56	58.08	-18.52	QP
6	0.39	1.60	9.62	0.04	21.26	48.08	-26.82	Average
7	1.30	19.93	9.63	0.05	39.61	56.00	-16.39	QP
8	1.30	-3.39	9.63	0.05	16.29	46.00	-29.71	Average
9	1.92	20.47	9.64	0.05	40.16	56.00	-15.84	QP
10	1.92	2.51	9.64	0.05	22.20	46.00	-23.80	Average
11	10.56	7.55	9.69	0.08	27.32	60.00	-32.68	QP
12	10.56	-10.18	9.69	0.08	9.59	50.00	-40.41	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.  
2. The emission levels that are 20dB below the official limit are not reported.

-----THE END OF REPORT-----