

# FCC&IC Radio Test Report

**FCC ID: SIB-BGTAB-NV20A**

**IC: 6719D-BGTABNV20A**

This report concerns (check one):  Original Grant  Class II Change

**Project No.** : 1407C097  
**Equipment** : dreamtab  
**Model Name** : BGTAB-NV20A  
**Applicant** : Foxconn International Inc  
**Address** : NO 2 ZIYOU ST TUCHENG DISTRICT NEW  
TAIPEI Taiwan 236

**Date of Receipt** : Jul. 04, 2014  
**Date of Test** : Jul. 04, 2014~ Jul. 25, 2014  
**Issued Date** : Jul. 28, 2014  
**Tested by** : BTL Inc.

**Testing Engineer** : David Mao  
(David Mao)

**Technical Manager** : Leo Hung  
(Leo Hung)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

## **B T L I N C .**

No.3,Jinshagang 1st Road, Shixia,Dalang Town, Dongguan, China.

TEL: +86-769-8318-3000FAX: +86-769-8319-6000

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>6</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
<b>3 . GENERAL INFORMATION</b>	<b>9</b>
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	14
<b>4 . EMC EMISSION TEST</b>	<b>15</b>
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	15
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS	16
4.1.6 EUT TEST CONDITIONS	16
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	18
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	19
4.2.5 EUT OPERATING CONDITIONS	20
4.2.6 EUT TEST CONDITIONS	20
4.2.7 TEST RESULTS (9K TO 30MHZ)	20
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHZ)	20
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	21
<b>5 . BANDWIDTH TEST</b>	<b>22</b>
5.1 APPLIED PROCEDURES	22
5.1.1 TEST PROCEDURE	22
5.1.2 DEVIATION FROM STANDARD	22
5.1.3 TEST SETUP	22
5.1.4 EUT OPERATION CONDITIONS	22
5.1.5 EUT TEST CONDITIONS	22
5.1.6 TEST RESULTS	22
<b>6 . MAXIMUM OUTPUT POWER TEST</b>	<b>23</b>

<b>Table of Contents</b>	<b>Page</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>23</b>
6.1.1 TEST PROCEDURE	23
6.1.2 DEVIATION FROM STANDARD	23
6.1.3 TEST SETUP	23
6.1.4 EUT OPERATION CONDITIONS	23
6.1.5 EUT TEST CONDITIONS	23
6.1.6 TEST RESULTS	23
<b>7 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>24</b>
7.1 APPLIED PROCEDURES / LIMIT	24
7.1.1 TEST PROCEDURE	24
7.1.2 DEVIATION FROM STANDARD	24
7.1.3 TEST SETUP	24
7.1.4 EUT OPERATION CONDITIONS	24
7.1.5 EUT TEST CONDITIONS	24
7.1.6 TEST RESULTS	24
<b>8 . POWER SPECTRAL DENSITY TEST</b>	<b>25</b>
8.1 APPLIED PROCEDURES / LIMIT	25
8.1.1 TEST PROCEDURE	25
8.1.2 DEVIATION FROM STANDARD	25
8.1.3 TEST SETUP	25
8.1.4 EUT OPERATION CONDITIONS	25
8.1.5 EUT TEST CONDITIONS	25
8.1.6 TEST RESULTS	25
<b>9 . MEASUREMENT INSTRUMENTS LIST</b>	<b>26</b>
<b>10 . EUT TEST PHOTO</b>	<b>28</b>
<b>ATTACHMENT A - CONDUCTED EMISSION</b>	<b>32</b>
<b>ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)</b>	<b>35</b>
<b>ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>37</b>
<b>ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>44</b>
<b>ATTACHMENT E - BANDWIDTH</b>	<b>77</b>
<b>ATTACHMENT F - MAXIMUM OUTPUT POWER</b>	<b>88</b>
<b>ATTACHMENT G – ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>91</b>
<b>ATTACHMENT H – POWER SPECTRAL DENSITY</b>	<b>110</b>

### REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
NEI-FICP-4-1407C097	Original Issue.	Jul. 28, 2014

## 1. CERTIFICATION

Equipment : dreamtab  
Brand Name : FUHU  
Model Name : BGTAB-NV20A  
Applicant : Foxconn International Inc.  
Manufacturer : FUHU INC  
Address : 909N., Sepulveda Blvd., Suite 540, E1 Segundo, CA 90245  
Factory : HONGFUJIN Precision Electronics (Chong Qing) Co., Ltd.  
Address : No.1, 1<sup>st</sup> E District RD., Shapingba District, Chongqing 401332, P.R. China  
Date of Test : Jul. 04, 2014~ Jul. 25, 2014  
Test Item : ENGINEERING SAMPLE  
Standard(s) : FCC Part15, Subpart C(15.247) / ANSI C63.4-2009  
Canada RSS-210:2010  
RSS-GEN Issue 3, Dec 2010

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc..

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FICP-4-1407C097) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C Canada RSS-210:2010; RSS-GEN Issue 3, Dec 2010					
Standard(s)		Section	Test Item	Judgment	Remark
FCC	IC				
15.207		RSS-GEN 7.2.2	Conducted Emission	PASS	
15.247(d)		RSS-210 Annex 8 (A8.5)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)		RSS-210 Annex 8 (A8.2(a))	6dB Bandwidth	PASS	
15.247(b)(3)		RSS-210 Annex 8 (A8.4(4))	Peak Output Power	PASS	
15.247(e)		RSS-210 Annex 8 (A8.2(b))	Power Spectral Density	PASS	
15.203		-	Antenna Requirement	PASS	
15.209/15.205		RSS-210 Annex 8 (A8.5)	Transmitter Radiated Emissions	PASS	

**NOTE:**

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02 (Measurement Guidelines of DTS)

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792

BTL's test firm number for FCC: 319330

BTL's test firm number for IC: 4428B-1

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	dreamtab	
Brand Name	FUHU	
Model Name	BGTAB-NV20A	
Model Difference	N/A	
Product Description	Operation Frequency	5745~5825 MHz
	Modulation Technology	802.11a/n:OFDM
	Bit Rate of Transmitter	300Mbps
	Output Power (Max.)	802.11a: 21.73 dBm 802.11n(20MHz): 23.53 dBm 802.11n(40MHz):23.30 dBm
Power Source	#1 DC supplied from AC Adapter. Model: ADS-65LSI-19-3 19065G #2 Supplied from rechargeable Li-ion polymer battery. Brand / Model: McNair / MLP2462113-4S	
Power Rating	#1 I/P AC 100-240V~ 50/60Hz 1.5A O/P: DC 19V 3.42A #2 14.8V 1650mAh 24.42Wh	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

802.11a / 802.11n 20M					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>149</b>	<b>5745</b>	153	5765	<b>157</b>	<b>5785</b>
161	5805	<b>165</b>	<b>5825</b>		

802.11n 40M			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>151</b>	<b>5755</b>	<b>159</b>	<b>5795</b>

3. Table for Filed Antenna

**The product has 2 group antenna: MAG Corporation and FOXCONN .**

**Group 1**

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	FOXCONN	PCA-3007-25GC1-A3	PIFA	N/A	1.29	320mm
2	FOXCONN	PCA-3007-25GC1-A4	PIFA	N/A	-0.05	600mm

**Group 2**

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	MAG Corporation	PCA-3007-25GC1-A3	PIFA	N/A	4.13	320mm
2	MAG Corporation	PCA-3007-25GC1-A4	PIFA	N/A	-0.78	600mm

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A MODE CHANNEL 149/157/165
Mode 2	TX N-20MHZ MODE CHANNEL 149/157/165
Mode 3	TX N-40MHZ MODE CHANNEL 151/159
Mode 4	TX MODE

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 4	TX MODE

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A MODE CHANNEL 149/157/165
Mode 2	TX N-20MHZ MODE CHANNEL 149/157/165
Mode 3	TX N-40MHZ MODE CHANNEL 151/159

Note:


- (1) For radiated below 1G test, the 802.11a is found to be the worst case and recorded.
- (2) The EUT is considered a portable unit; it was pre-tested on the positioning of each 3 axis. The worst case was found positioned on Z-plane. Therefore only the test data of this Z-plane was used for radiated emission measurement test.

### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	N/A		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	14	14	14
IEEE 802.11 n (20MHz)	13	13	13

Test software version	N/A	
Frequency	5755 MHz	5795 MHz
IEEE 802.11 n (40MHz)	14	13

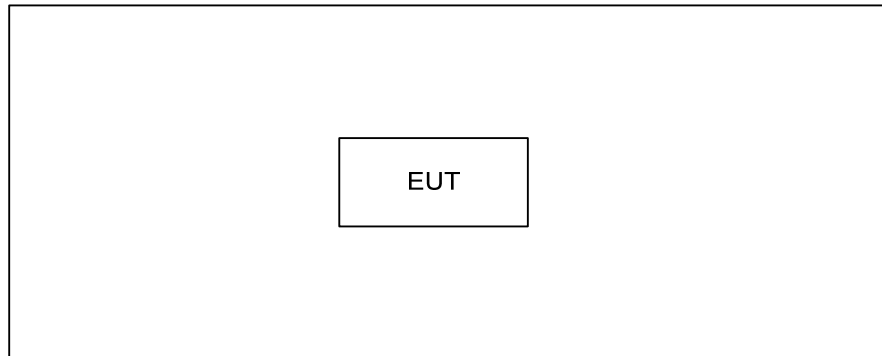**3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
-	-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

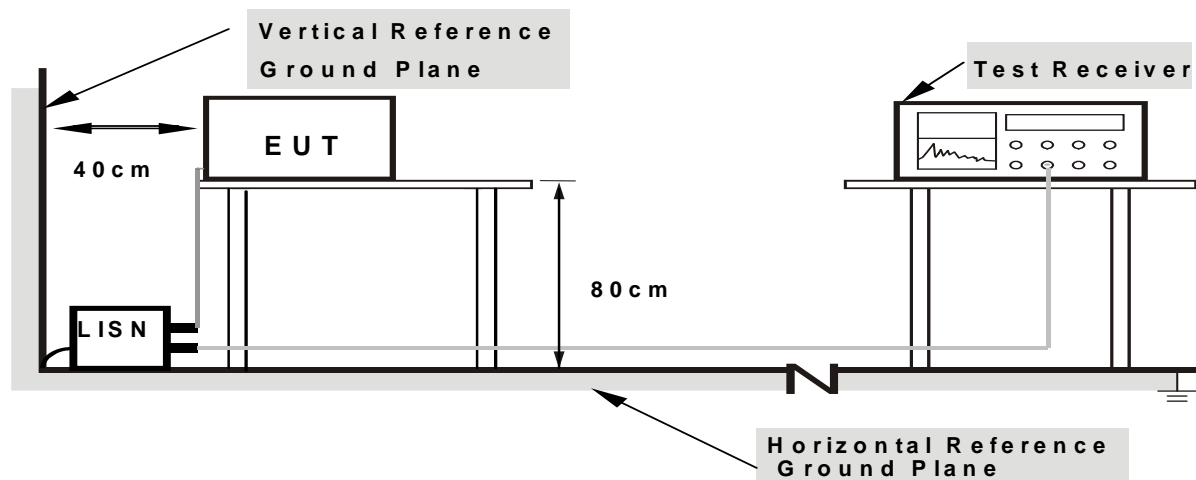

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 25°C  
 Relative Humidity: 55%  
 Test Voltage: DC14.8V

#### 4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "\*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz-1000MHz)

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) & RSS-210 section 2.2& Annex 8 (A8.5), then the 15.209(a)& RSS-Gen limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

**4.2.2 TEST PROCEDURE**


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**4.2.3 DEVIATION FROM TEST STANDARD**


No deviation

**4.2.4 TEST SETUP**


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

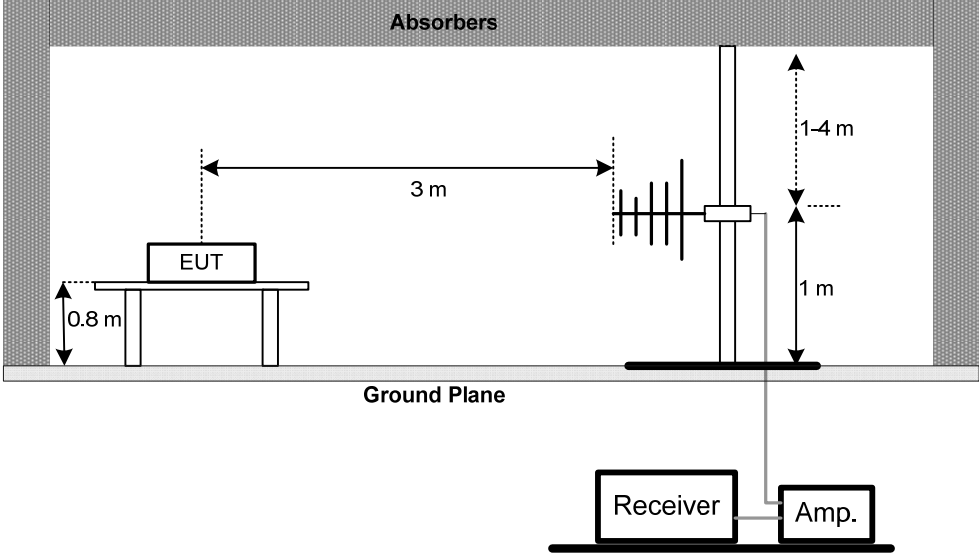

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

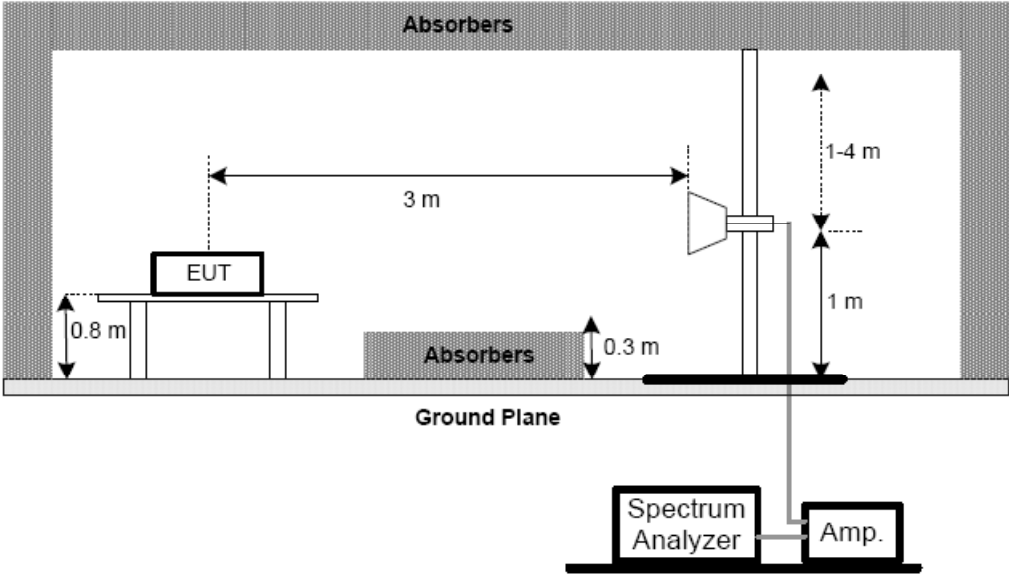

(C) For radiated emissions below 30MHz

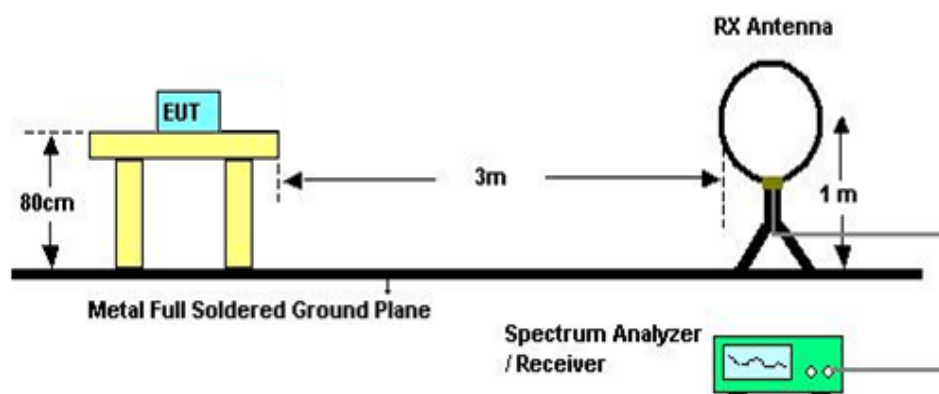

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC14.8V

#### 4.2.7 TEST RESULTS (9K TO 30MHZ)

Please refer to the Attachment B

#### 4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHZ)

Please refer to the Attachment C

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

#### 4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown " \* " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (5) EUT Orthogonal Axis:  
"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand
- (6) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

## 5. BANDWIDTH TEST

### 5.1 Applied procedures

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-210			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2) RSS-GEN section 4.6.1 RSS-210 Annex 8 (A8.2(a))	Bandwidth	5725 - 5825	PASS

#### 5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP



#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 5.1.5 EUT TEST CONDITIONS

Temperature: 25°C  
Relative Humidity: 55%  
Test Voltage: DC14.8V

#### 5.1.6 TEST RESULTS

Please refer to the Attachment E.

## 6. MAXIMUM OUTPUT POWER TEST

### 6.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C/ RSS-210				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3) RSS-210 Annex 8.4(4)	Maximum Output Power	1 Watt or 30dBm	5725 - 5825	PASS

#### 6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.3 of FCC KDB 558074 D01 DTS Meas Guidance v03r02.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing. Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

#### 6.1.5 EUT TEST CONDITIONS

Temperature: 25°C  
Relative Humidity: 55%  
Test Voltage: DC14.8V

#### 6.1.6 TEST RESULTS

**Please refer to the Attachment F.**

## 7. ANTENNA CONDUCTED SPURIOUS EMISSION

### 7.1 Applied procedures / limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

#### 7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### 7.1.3 TEST SETUP



#### 7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 7.1.5 EUT TEST CONDITIONS

Temperature: 25°C  
Relative Humidity: 55%  
Test Voltage: DC14.8V

#### 7.1.6 TEST RESULTS

Please refer to the Attachment G.



## 8. POWER SPECTRAL DENSITY TEST

### 8.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C / RSS-210				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e) RSS-210 Annex 8( A8.2(b))	Power Spectral Density	8 dBm (in any 3KHz)	5745 - 5825	PASS

#### 8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP



#### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 8.1.5 EUT TEST CONDITIONS

Temperature: 25°C  
 Relative Humidity: 55%  
 Test Voltage: DC14.8V

#### 8.1.6 TEST RESULTS

Please refer to the Attachment H.

## 9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 29, 2015
2	LISN	R&S	ENV216	101447	Mar. 29, 2015
3	Test Cable	N/A	C_17	N/A	Mar. 14, 2015
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 29, 2015
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 29, 2015

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	EMCO	3142C	00066462	Mar. 29, 2015
2	Antenna	EMCO	3142C	00066464	Mar. 29, 2015
3	Amplifier	Agilent	8447D	2944A11203	Nov. 11, 2014
4	Amplifier	Agilent	8447D	2944A11204	Nov. 11, 2014
5	Spectrum Analyzer	Agilent	E4443A	MY48250370	Nov. 11, 2014
6	RF Pre-selector	Agilent	N9039A	MY46520201	Nov. 11, 2014
7	Test Cable	N/A	Cable_5m_8m_15m	N/A	Jan. 14, 2015
8	Test Cable	N/A	Cable_5m_11m_15m	N/A	Jan. 14, 2015
9	Spectrum Analyzer	Agilent	E4447A	MY48250208	Nov. 11, 2014
10	RF Pre-selector	Agilent	N9039A	MY46520214	Nov. 11, 2014
11	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A
12	Horn Antenna	EMCO	3115	9605-4803	Mar. 29, 2015
13	Amplifier	Agilent	8449B	3008A02584	Nov. 11, 2014
14	Spectrum Analyzer	Agilent	E4447A	MY48250208	Nov. 11, 2014
15	Test Cable	Huber+Suhner	SUCOFLEX_1_5m_4m	N/A	Jan. 14, 2015
16	Multi-Device Controller	ETS-Lindgren	2090	N/A	N/A

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series Power meter	Agilent	N1911A	MY45100473	Mar. 29, 2015
2	Wireband Power sensor	Agilent	N1921A	MY51100041	Mar. 29, 2015

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
 All calibration period of equipment list is one year.

**10. EUT TEST PHOTO****Conducted Measurement Photos**

## Radiated Measurement Photos

9KHz to 30MHz



**Radiated Measurement Photos**

**30MHz to 1000MHz**





## Radiated Measurement Photos

Above 1000MHz




## ATTACHMENT A - CONDUCTED EMISSION



Test Mode:	TX Mode
------------	---------


### Line

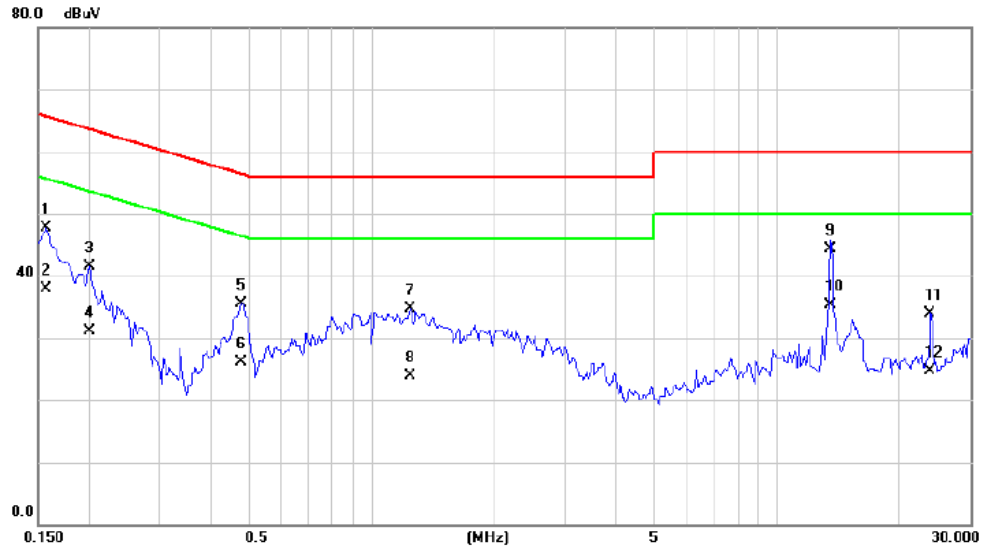

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1577	38.10	9.52	47.62	65.58	-17.96	QP	
2		0.1577	28.34	9.52	37.86	55.58	-17.72	AVG	
3		0.2006	32.01	9.54	41.55	63.59	-22.04	QP	
4		0.2006	21.64	9.54	31.18	53.59	-22.41	AVG	
5		0.4781	25.83	9.69	35.52	56.37	-20.85	QP	
6		0.4781	16.37	9.69	26.06	46.37	-20.31	AVG	
7		1.2437	24.99	9.71	34.70	56.00	-21.30	QP	
8		1.2437	14.29	9.71	24.00	46.00	-22.00	AVG	
9		13.6013	34.08	10.19	44.27	60.00	-15.73	QP	
10	*	13.6013	25.16	10.19	35.35	50.00	-14.65	AVG	
11		24.0000	23.42	10.55	33.97	60.00	-26.03	QP	
12		24.0000	14.07	10.55	24.62	50.00	-25.38	AVG	

Test Mode: TX Mode

### Neutral

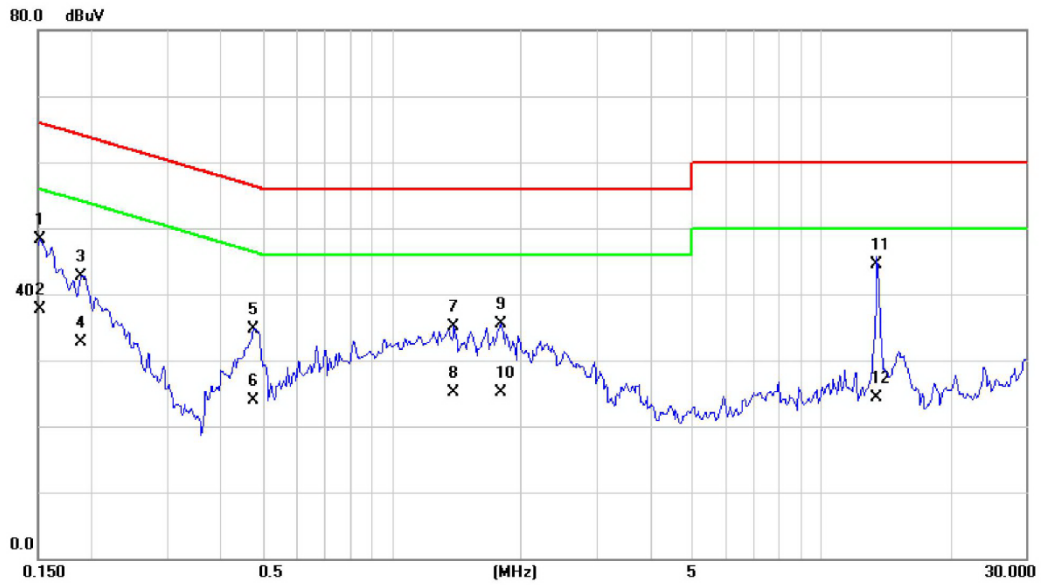

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1514	38.71	9.63	48.34	65.92	-17.58	QP	
2		0.1514	28.11	9.63	37.74	55.92	-18.18	AVG	
3		0.1890	33.01	9.61	42.62	64.08	-21.46	QP	
4		0.1890	23.16	9.61	32.77	54.08	-21.31	AVG	
5		0.4781	25.09	9.64	34.73	56.37	-21.64	QP	
6		0.4781	14.33	9.64	23.97	46.37	-22.40	AVG	
7		1.3960	25.40	9.70	35.10	56.00	-20.90	QP	
8		1.3960	15.37	9.70	25.07	46.00	-20.93	AVG	
9		1.7943	25.69	9.73	35.42	56.00	-20.58	QP	
10		1.7943	15.31	9.73	25.04	46.00	-20.96	AVG	
11	*	13.5152	34.25	10.23	44.48	60.00	-15.52	QP	
12		13.5152	14.16	10.23	24.39	50.00	-25.61	AVG	

**ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)**

Test Mode : TX Mode

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0094	0°	68.24	24.30	92.54	128.12	-35.58	AVG
0.0094	0°	72.17	24.30	96.47	148.12	-51.65	PEAK
0.0138	0°	70.22	24.30	94.52	124.81	-30.29	AVG
0.0138	0°	79.65	24.30	103.95	144.81	-40.86	PEAK
0.0245	0°	56.46	24.02	80.48	119.82	-39.35	AVG
0.0245	0°	60.09	24.02	84.11	139.82	-55.72	PEAK
0.0313	0°	61.25	23.58	84.83	117.69	-32.86	AVG
0.0313	0°	65.54	23.58	89.12	137.69	-48.57	PEAK
0.5680	0°	18.48	20.02	38.50	72.52	-34.02	QP
1.7543	0°	18.38	19.52	37.90	69.54	-31.64	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0094	90°	76.64	24.30	100.94	128.18	-27.24	AVG
0.0094	90°	82.52	24.30	106.82	148.18	-41.36	PEAK
0.0237	90°	56.41	24.07	80.48	120.11	-39.63	AVG
0.0237	90°	59.21	24.07	83.28	140.11	-56.83	PEAK
0.0308	90°	57.25	23.62	80.87	117.83	-36.97	AVG
0.0308	90°	58.17	23.62	81.79	137.83	-56.05	PEAK
0.0426	90°	59.36	22.87	82.23	115.02	-32.79	AVG
0.0426	90°	63.23	22.87	86.10	135.02	-48.92	PEAK
0.4911	90°	17.55	19.82	37.37	73.78	-36.41	QP
1.7155	90°	18.67	19.53	38.20	69.54	-31.34	QP


Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

**ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)**

Test Mode: TX A MODE 5745MHz


Vertical

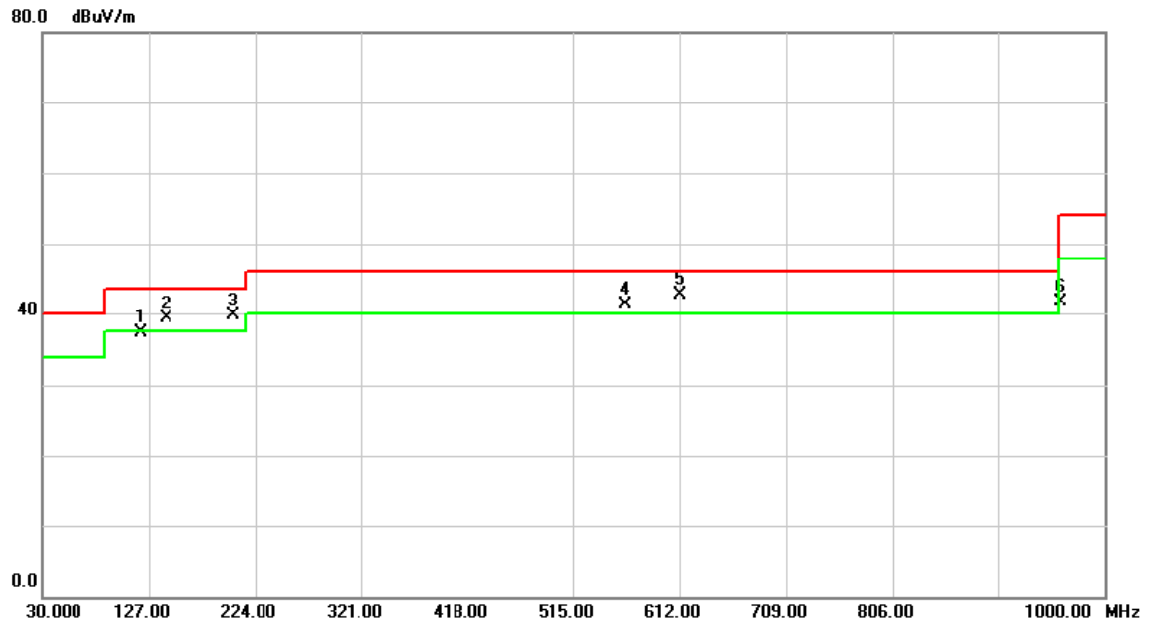

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		119.2400	54.16	-16.77	37.39	43.50	-6.11	peak	
2	!	142.5200	53.85	-14.50	39.35	43.50	-4.15	peak	
3	!	203.6300	56.59	-16.94	39.65	43.50	-3.85	peak	
4	!	561.5600	49.21	-7.88	41.33	46.00	-4.67	peak	
5	*	612.0000	49.56	6.79	42.77	46.00	3.23	peak	
6		960.2300	43.85	-2.19	41.66	54.00	-12.34	peak	

Test Mode: TX A MODE 5745MHz


### Horizontal

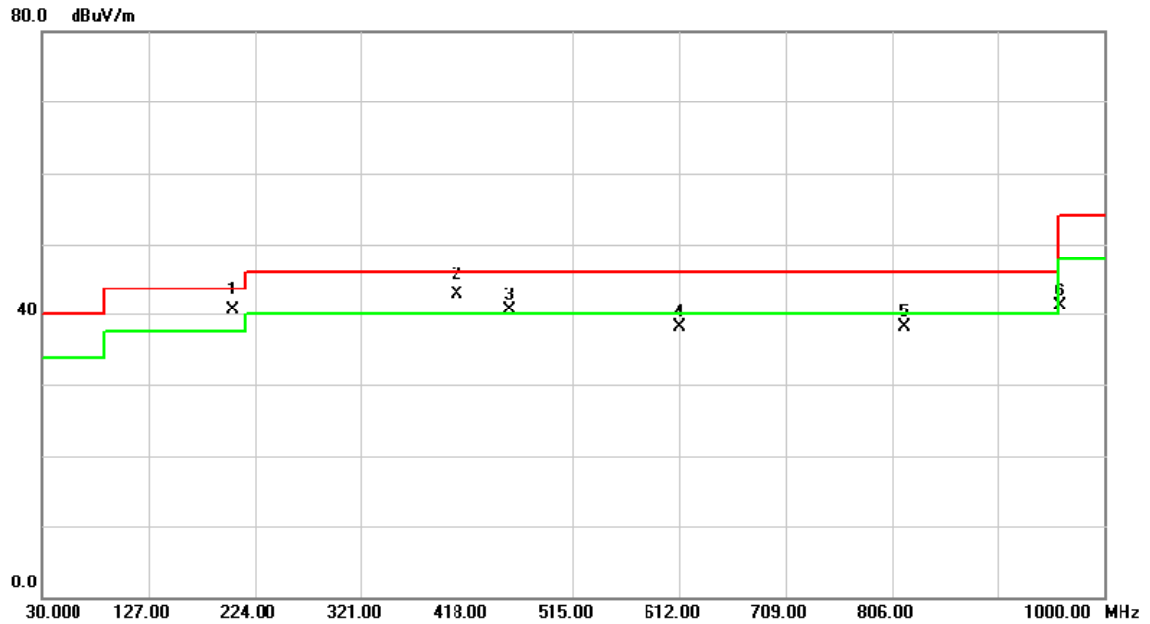

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	203.6300	57.36	-16.94	40.42	43.50	-3.08	QP	
2	!	408.3000	53.58	-10.95	42.63	46.00	-3.37	QP	
3	!	456.8000	50.28	-9.73	40.55	46.00	-5.45	peak	
4		612.0000	44.82	-6.79	38.03	46.00	-7.97	peak	
5		816.6700	42.67	-4.57	38.10	46.00	-7.90	peak	
6		960.2300	43.28	-2.19	41.09	54.00	-12.91	peak	

Test Mode: TX A MODE 5785MHz

Vertical

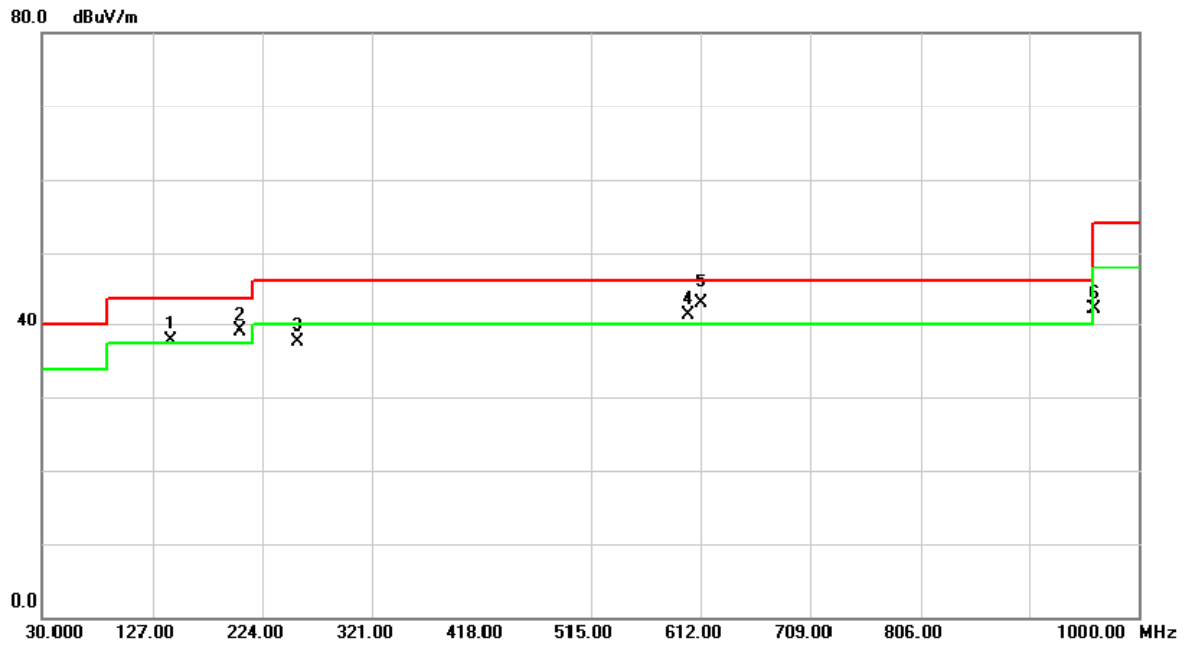


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	142.5200	52.35	-14.50	37.85	43.50	-5.65	peak	
2	!	203.6300	56.09	-16.94	39.15	43.50	-4.35	peak	
3		256.0100	52.43	-14.70	37.73	46.00	-8.27	peak	
4	!	601.3300	48.13	-6.76	41.37	46.00	-4.63	peak	
5	*	612.0000	49.74	-6.79	42.95	46.00	-3.05	QP	
6		960.2300	44.35	-2.19	42.16	54.00	-11.84	peak	



Test Mode: TX A MODE 5785MHz


### Horizontal

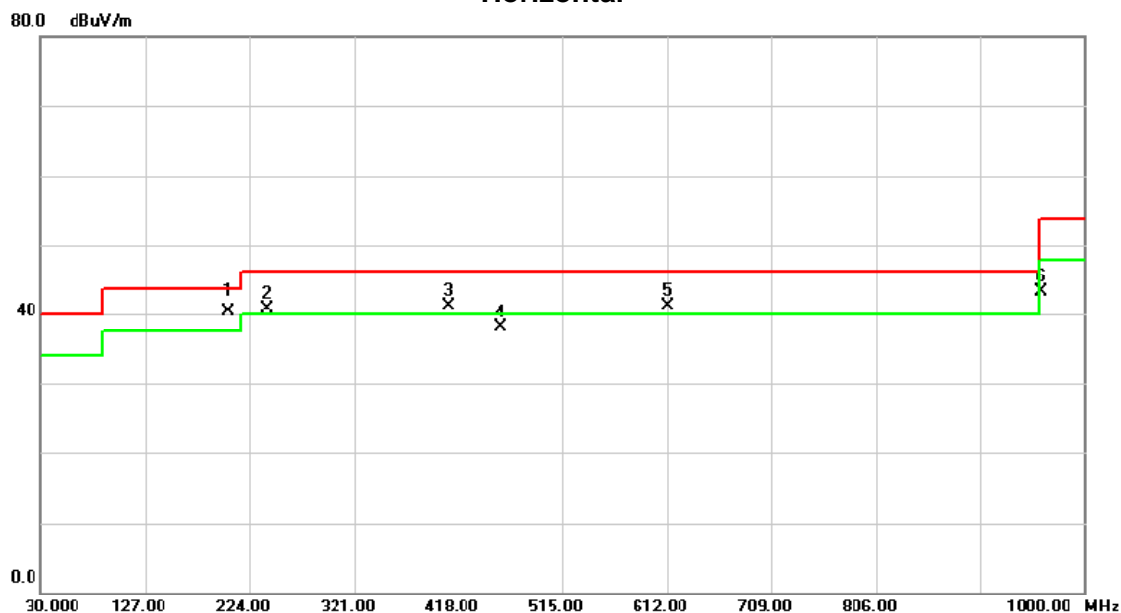

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	203.6300	57.15	-16.94	40.21	43.50	-3.29	QP	
2	!	239.5200	56.12	-15.50	40.62	46.00	-5.38	peak	
3	!	408.3000	52.02	-10.95	41.07	46.00	-4.93	peak	
4	!	456.8000	47.78	-9.73	38.05	46.00	-7.95	peak	
5	!	612.0000	47.82	-6.79	41.03	46.00	-4.97	peak	
6		960.2300	45.26	-2.19	43.09	54.00	-10.91	peak	


Test Mode: TX A MODE 5825MHz

Vertical

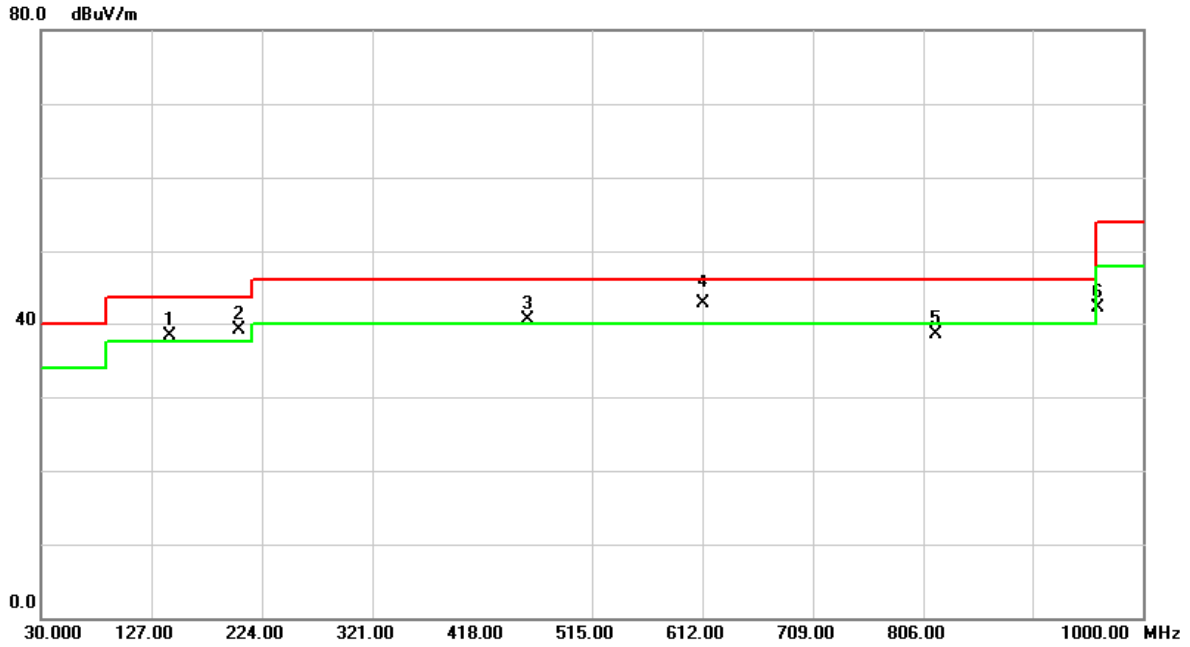

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	142.5200	52.85	-14.50	38.35	43.50	-5.15	peak	
2	!	203.6300	56.09	-16.94	39.15	43.50	-4.35	peak	
3	!	458.7400	50.27	-9.72	40.55	46.00	-5.45	peak	
4	*	612.0000	49.46	-6.79	42.67	46.00	-3.33	QP	
5		816.6700	43.03	-4.57	38.46	46.00	-7.54	peak	
6		960.2300	44.35	-2.19	42.16	54.00	-11.84	peak	

Test Mode: TX A MODE 5825MHz

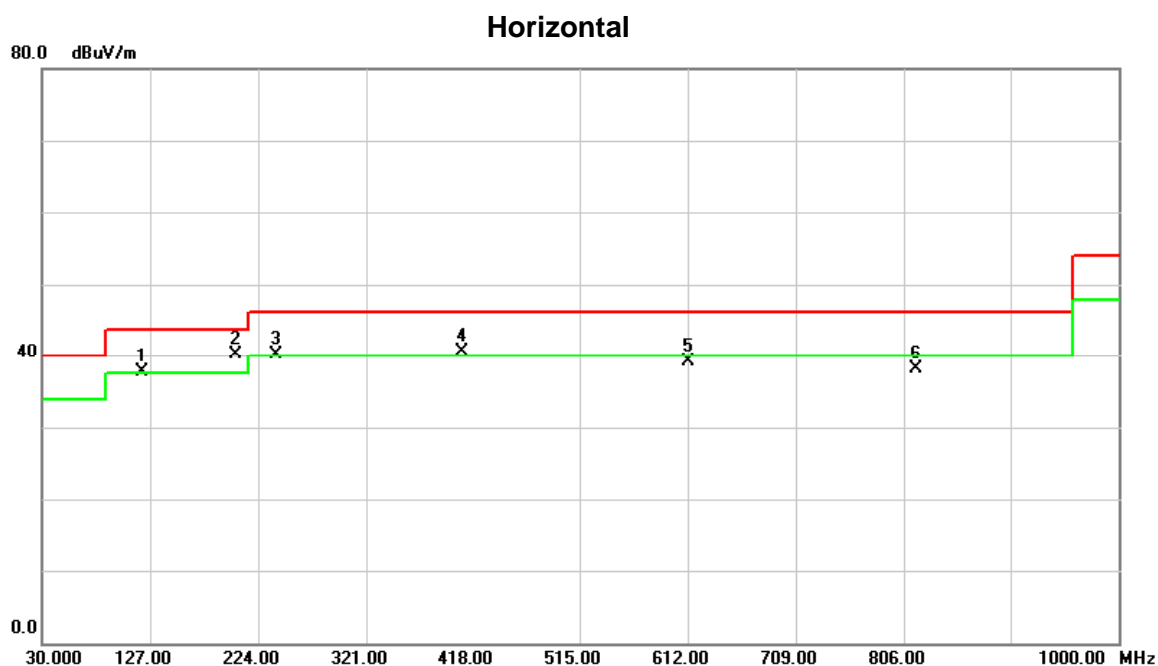


No.	Mk.	Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector	Comment
1	!	119.2400	54.50	-16.77	37.73	43.50	-5.77	peak	
2	*	203.6300	57.07	-16.94	40.13	43.50	-3.37	peak	
3	!	239.5200	55.62	-15.50	40.12	46.00	-5.88	peak	
4	!	408.3000	51.52	-10.95	40.57	46.00	-5.43	peak	
5		612.0000	45.82	-6.79	39.03	46.00	-6.97	peak	
6		816.6700	42.67	-4.57	38.10	46.00	-7.90	peak	

**ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)**

Orthogonal Axis :	X
Test Mode :	TX A Mode 5745MHz


### Vertical

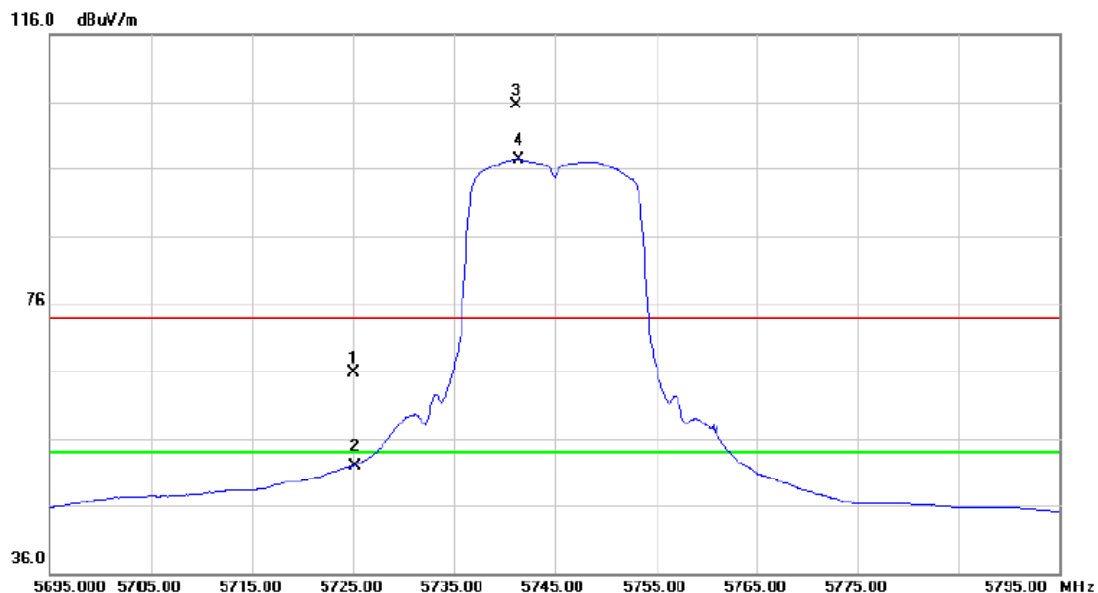

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5725.000	21.19	44.58	65.77	74.00	-8.23	peak	
2		5725.000	7.41	44.58	51.99	54.00	-2.01	AVG	
3	X	5741.200	60.92	44.66	105.58	74.00	31.58	peak	Fundamental frequency, no limit
4	*	5741.400	52.66	44.66	97.32	54.00	43.32	AVG	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	TX A Mode 5745MHz


**Vertical**

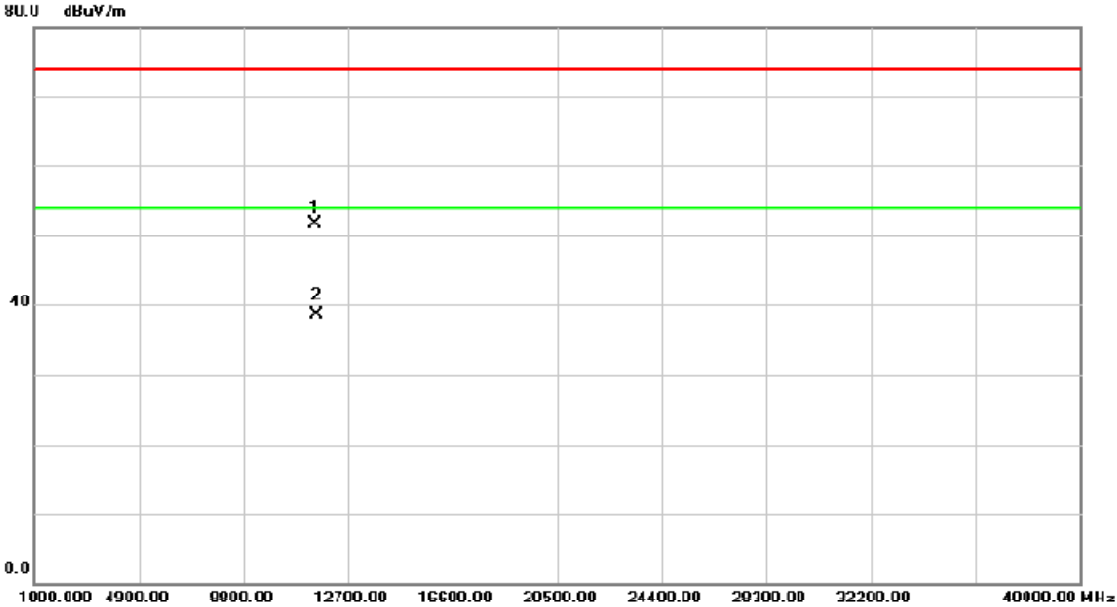

No	Mk	Freq	Reading	Correct	Measure-	Limit	Over		
		MHz	dBuV	Factor	ment	dBuV/m	dB	Detector	Comment
1		11490.17	37.42	14.25	51.67	74.00	-22.33	peak	
2	*	11490.17	24.24	14.25	30.49	54.00	-15.51	AVG	

Orthogonal Axis :	X
Test Mode :	TX A Mode 5745MHz


### Horizontal

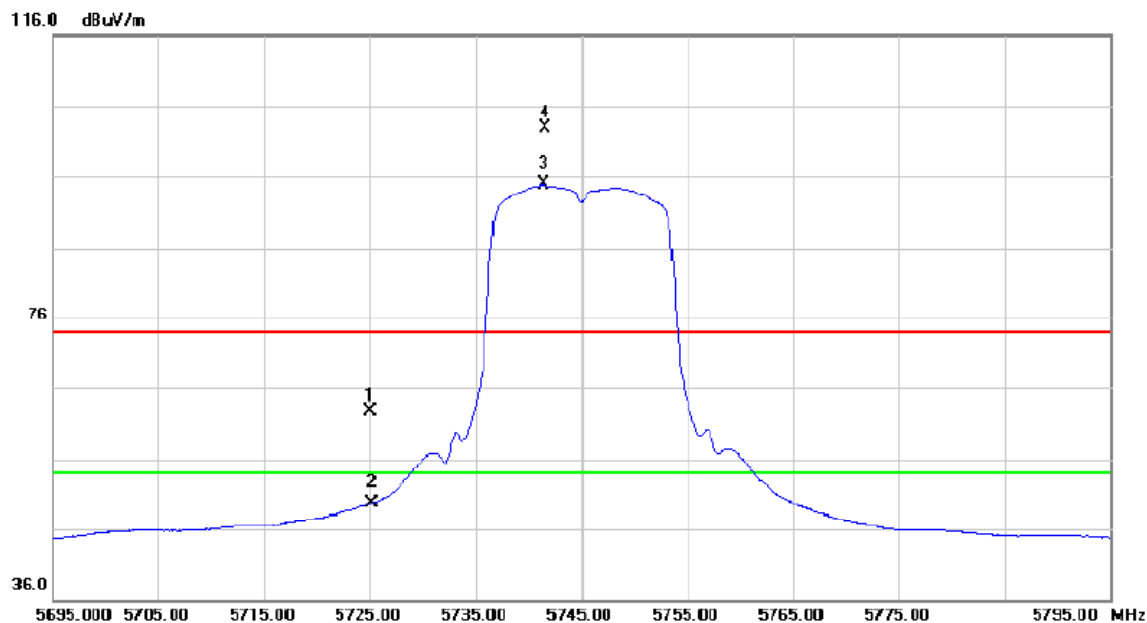

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5725.000	18.04	44.58	62.62	74.00	-11.38	peak	
2		5725.000	5.05	44.58	49.63	54.00	-4.37	AVG	
3	*	5741.500	50.18	44.66	94.84	54.00	40.84	AVG	Fundamental frequency, no limit
4	X	5741.600	58.24	44.66	102.90	74.00	28.90	peak	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	TX A Mode 5745MHz

**Horizontal**

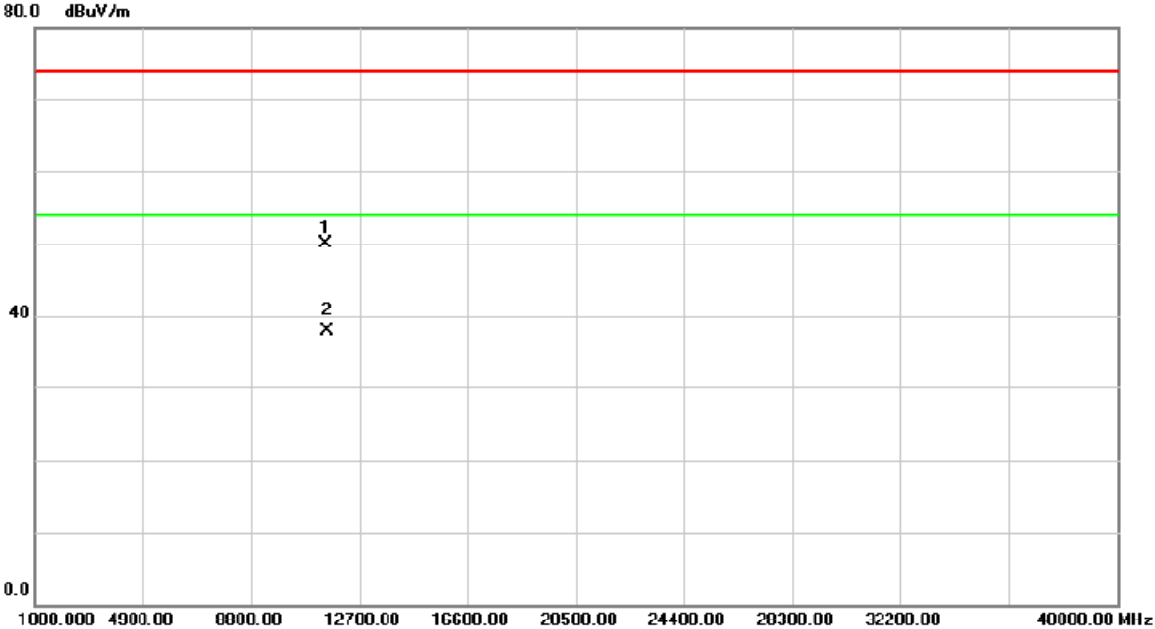


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.12	35.69	14.25	49.94	74.00	-24.06	peak	
2	*	11490.12	23.75	14.25	38.00	54.00	-16.00	AVG	



Orthogonal Axis :	X
Test Mode :	TX A Mode 5785MHz


**Vertical**

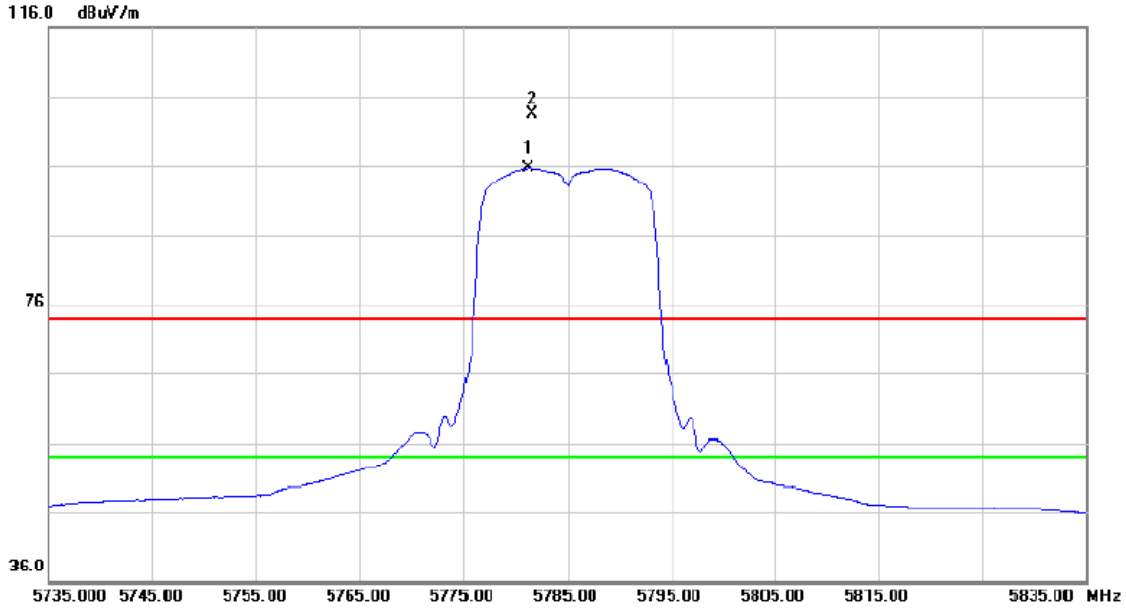

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5781.200	50.74	44.87	95.61	54.00	41.61	AVG	Fundamental frequency, no limit
2	X	5781.600	58.54	44.87	103.41	74.00	29.41	peak	Fundamental frequency, no limit


Orthogonal Axis :	X
Test Mode :	TX A Mode 5785MHz

### Vertical

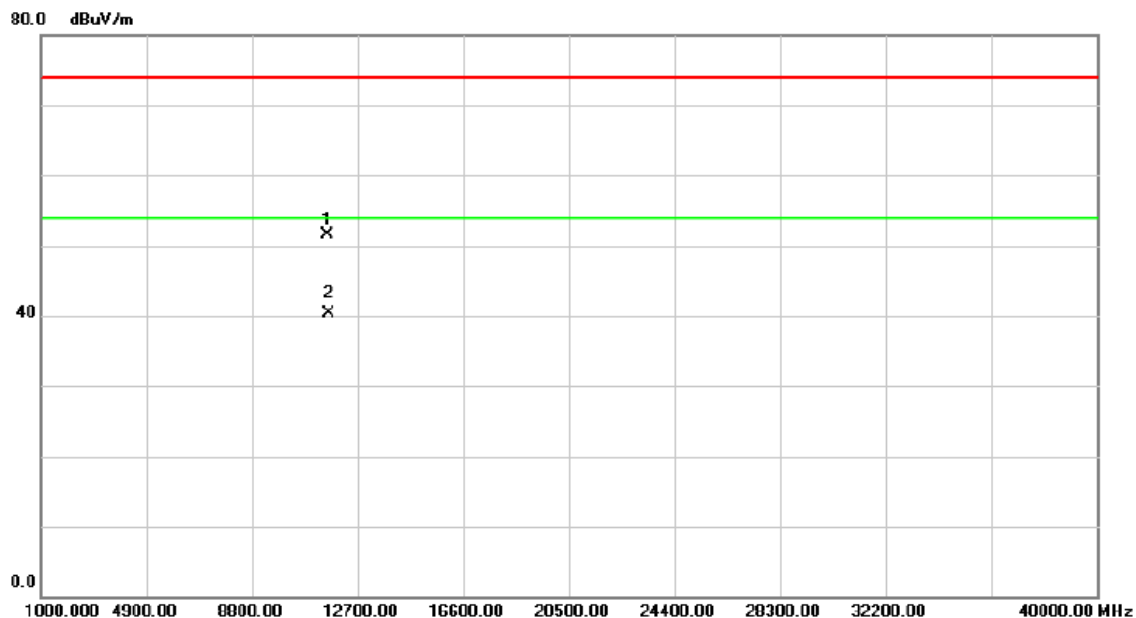


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.28	37.23	14.30	51.53	74.00	-22.47	peak	
2	*	11570.28	25.97	14.30	40.27	54.00	-13.73	AVG	

Orthogonal Axis :	X
Test Mode :	TX A Mode 5785MHz

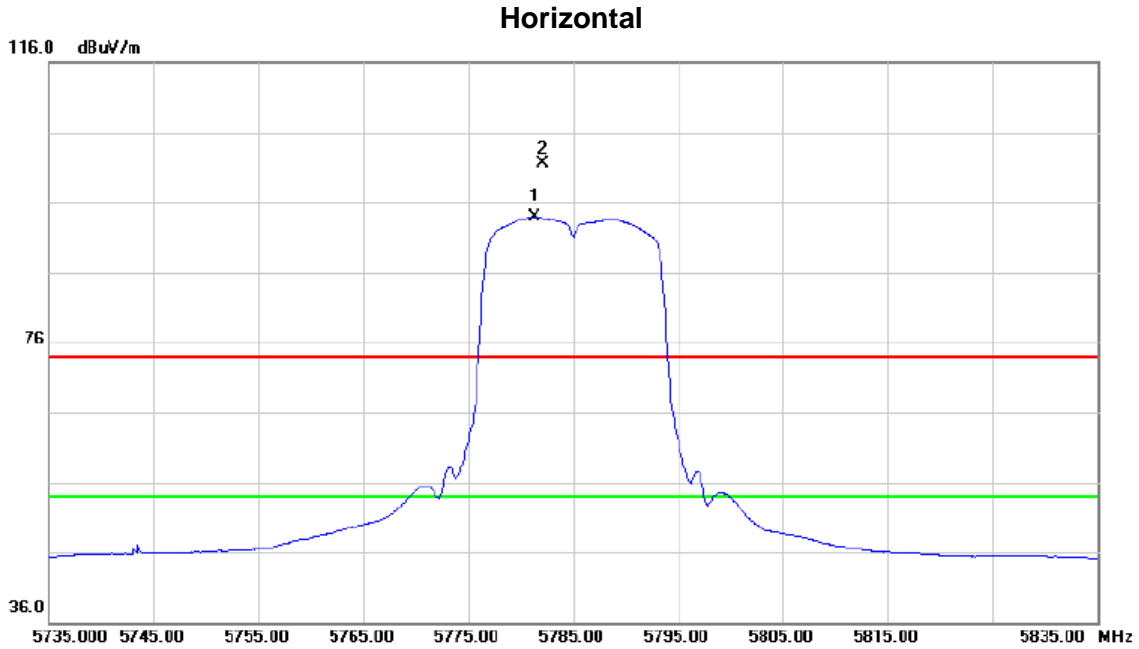

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5781.300	49.08	44.87	93.95	54.00	39.95	AVG	Fundamental frequency, no limit
2	X	5782.100	56.68	44.87	101.55	74.00	27.55	peak	Fundamental frequency, no limit


Orthogonal Axis :	X
Test Mode :	TX A Mode 5785MHz

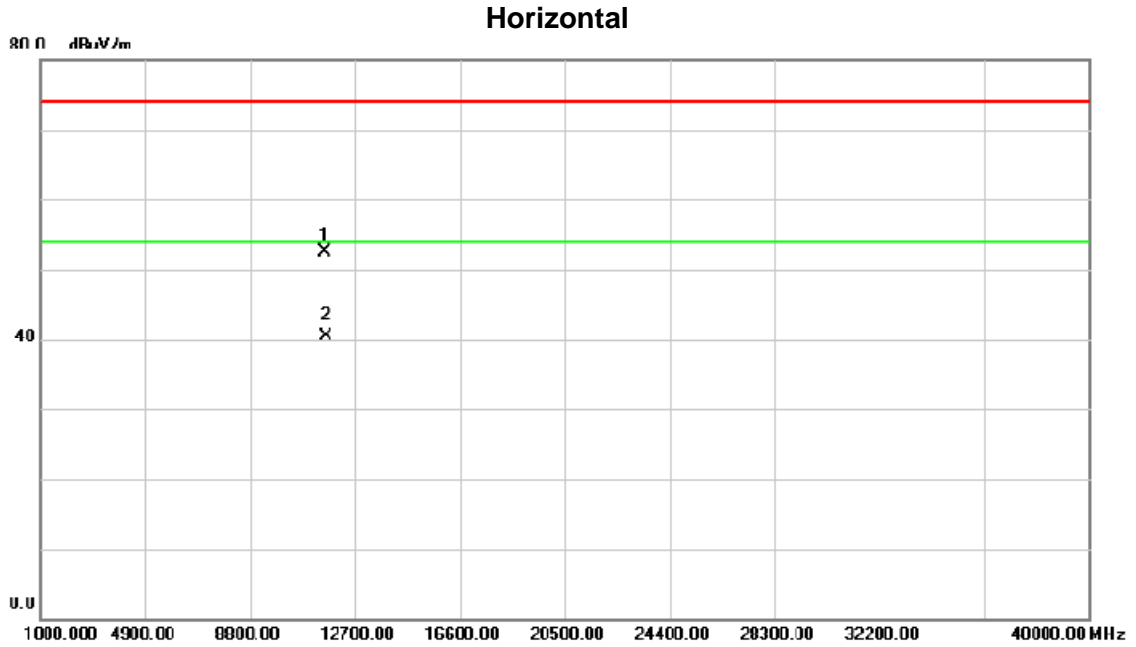

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.17	38.27	14.30	52.57	74.00	-21.43	peak	
2	*	11570.17	26.11	14.30	40.41	54.00	-13.59	AVG	

Orthogonal Axis :	X
Test Mode :	TX A Mode 5825MHz


### Vertical

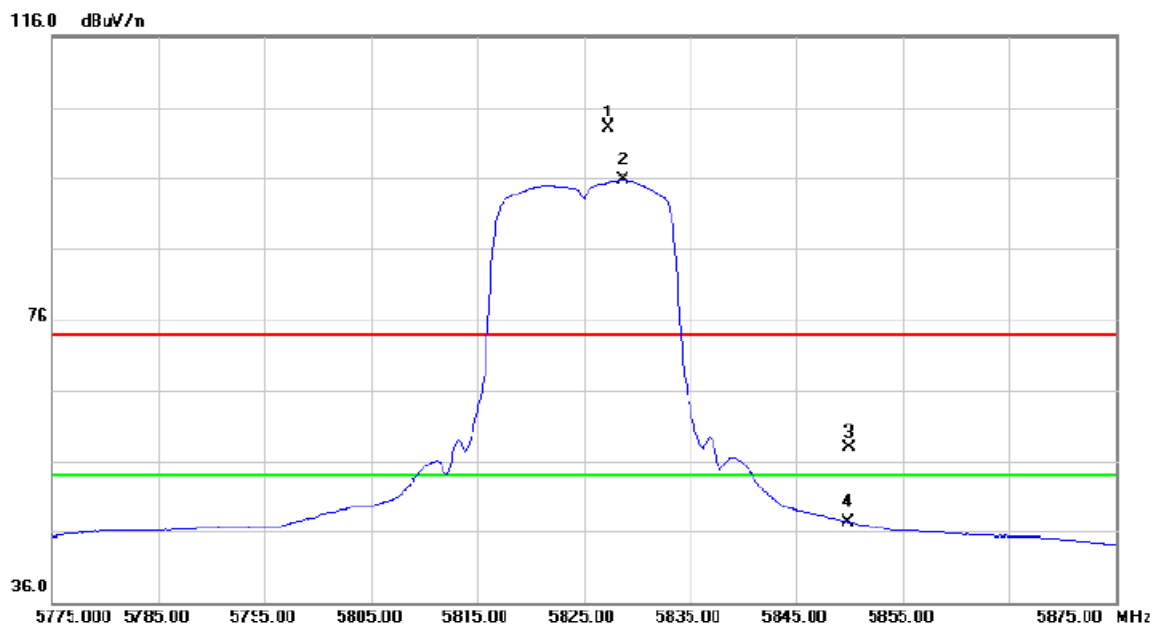

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5827.300	58.06	45.11	103.17	74.00	29.17	peak	Fundamental frequency, no limit
2	*	5828.700	50.52	45.12	95.64	54.00	41.64	AVG	Fundamental frequency, no limit
3		5850.000	12.62	45.23	57.85	74.00	-16.15	peak	
4		5850.000	2.05	45.23	47.28	54.00	-6.72	AVG	

Orthogonal Axis :	X
Test Mode :	TX A Mode 5825MHz


**Vertical**

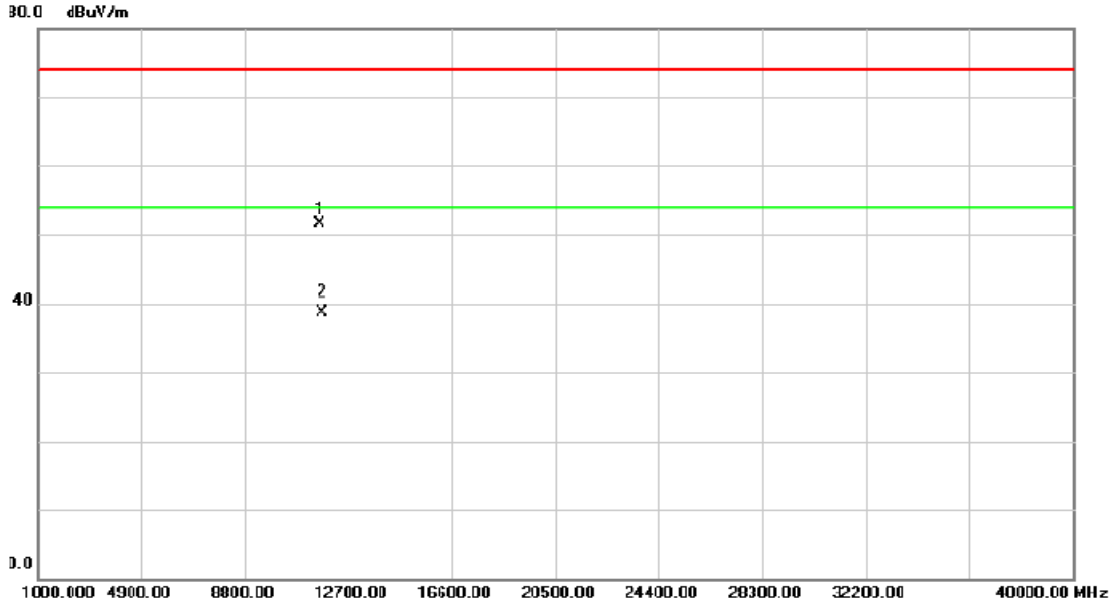

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.23	37.24	14.34	51.58	74.00	-22.42	peak	
2	*	11650.23	24.38	14.34	38.72	54.00	-15.28	AVG	

Orthogonal Axis :	X
Test Mode :	TX A Mode 5825MHz


### Horizontal

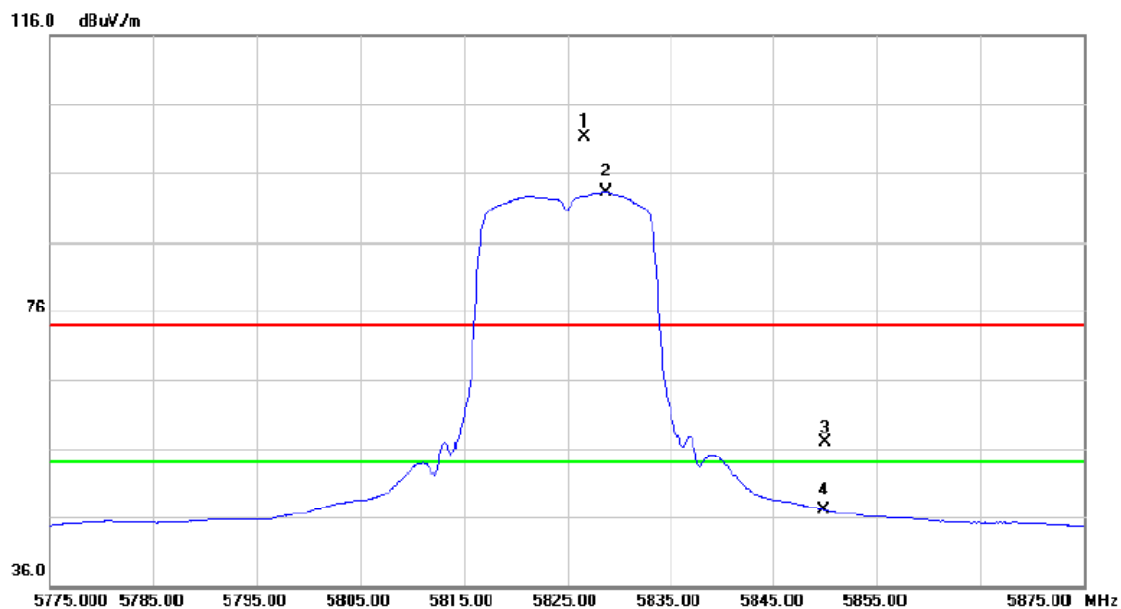

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5826.600	56.17	45.11	101.28	74.00	27.28	peak	Fundamental frequency, no limit
2	*	5828.800	48.09	45.12	93.21	54.00	39.21	AVG	Fundamental frequency, no limit
3		5850.000	11.63	45.23	56.86	74.00	-17.14	peak	
4		5850.000	1.87	45.23	47.10	54.00	-6.90	AVG	

Orthogonal Axis :	X
Test Mode :	TX A Mode 5825MHz

**Horizontal**

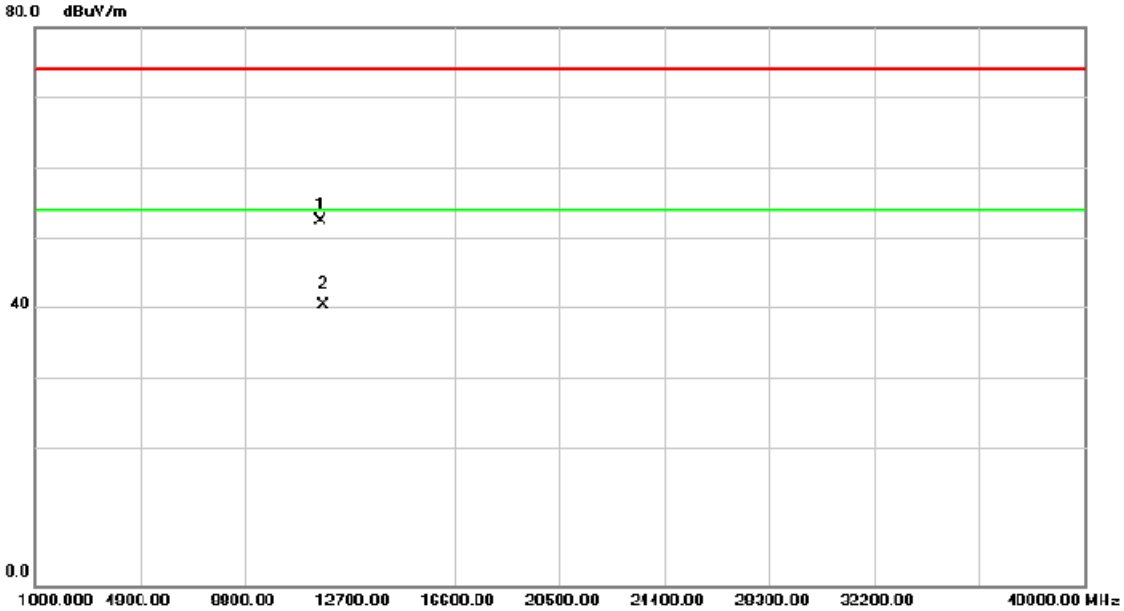


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.23	38.02	14.34	52.36	74.00	-21.64	peak	
2	*	11650.23	25.93	14.34	40.27	54.00	-13.73	AVG	



Orthogonal Axis :	X
Test Mode :	TX N20 Mode 5745MHz


### Vertical

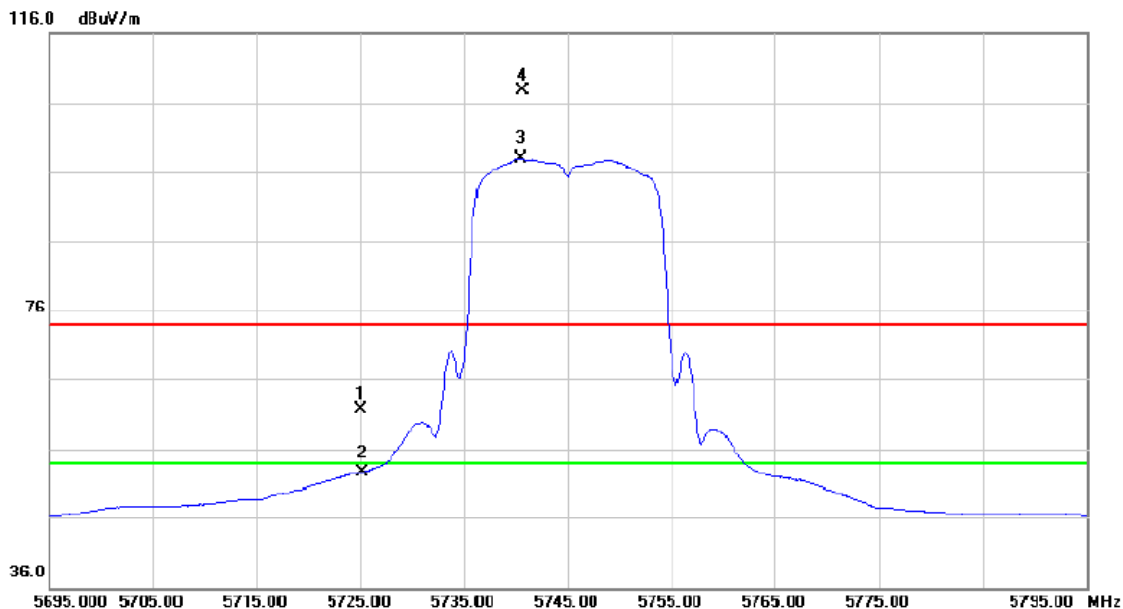

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5725.000	17.13	44.58	61.71	74.00	-12.29	peak	
2		5725.000	7.91	44.58	52.49	54.00	-1.51	AVG	
3	*	5740.500	53.23	44.66	97.89	54.00	43.89	AVG	Fundamental frequency, no limit
4	X	5740.700	63.04	44.66	107.70	74.00	33.70	peak	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	TX N20 Mode 5745MHz


**Vertical**

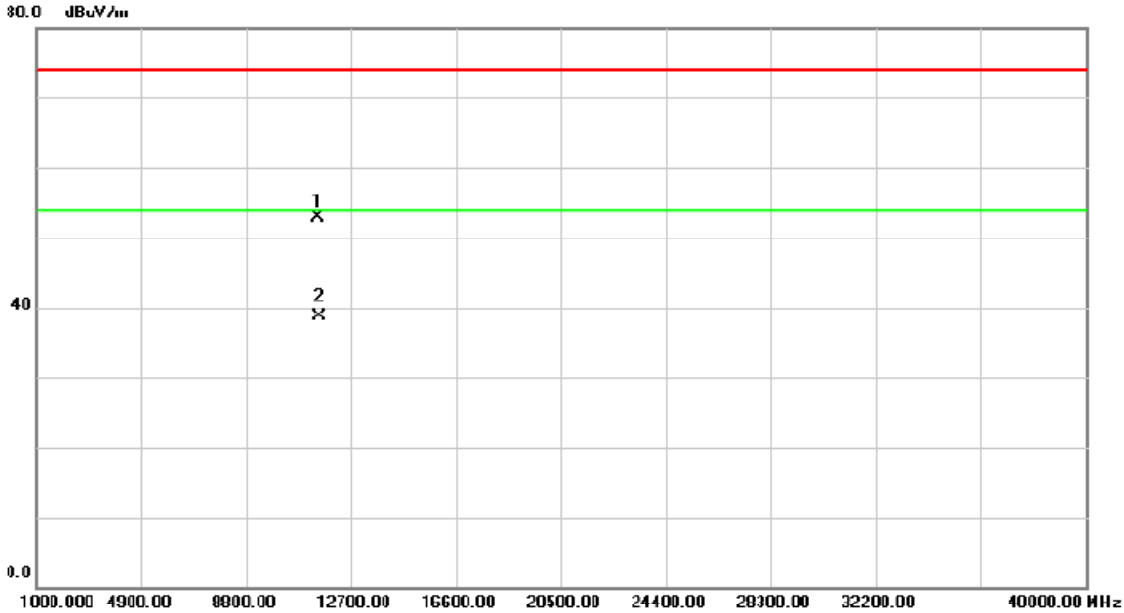

No.	Mk.	Freq. MHz	Reading Level dEuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.22	38.56	14.25	52.81	74.00	-21.19	peak	
2	*	11490.22	24.37	14.25	38.62	54.00	-15.38	AVG	

Orthogonal Axis :	X
Test Mode :	TX N20 Mode 5745MHz


### Horizontal

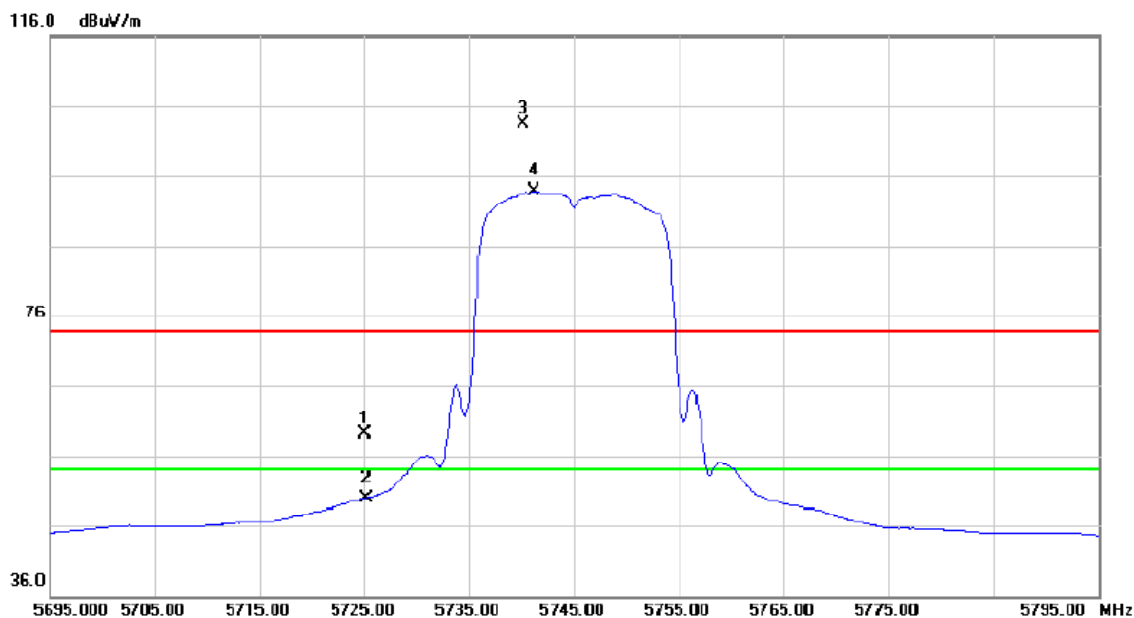

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5725.000	14.58	44.58	59.16	74.00	-14.84	peak	
2		5725.000	5.28	44.58	49.86	54.00	-4.14	AVG	
3	X	5740.100	58.78	44.66	103.44	74.00	29.44	peak	Fundamental frequency, no limit
4	*	5741.200	49.20	44.66	93.86	54.00	39.86	AVG	Fundamental frequency, no limit


Orthogonal Axis :	X
Test Mode :	TX N20 Mode 5745MHz

### Horizontal

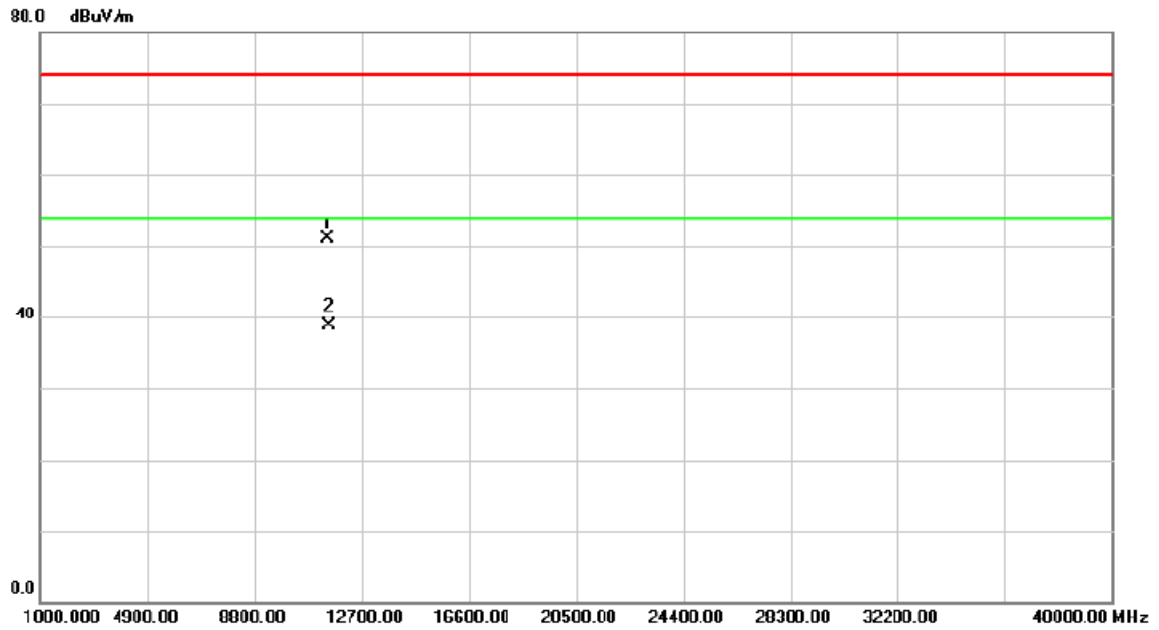

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.34	36.65	14.25	50.90	74.00	-23.10	peak	
2	*	11490.34	24.48	14.25	38.73	54.00	-15.27	AVG	


Orthogonal Axis :	X
Test Mode :	TX N20 Mode 5785MHz

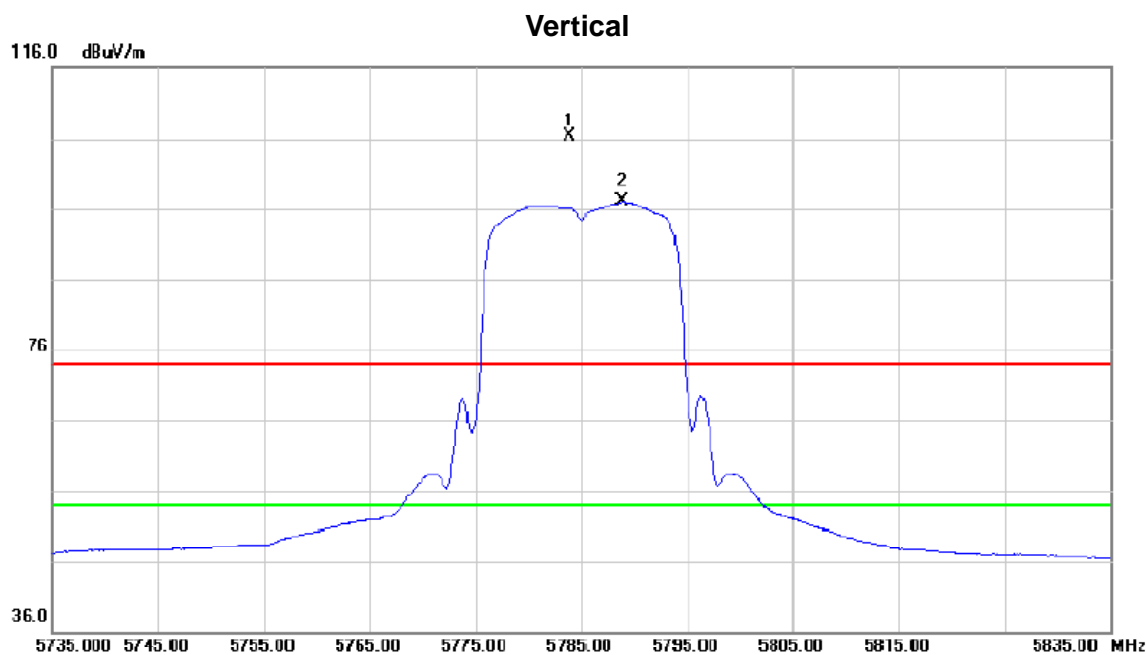

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5783.800	61.41	44.89	106.30	74.00	32.30	peak	Fundamental frequency, no limit
2	*	5788.800	52.12	44.91	97.03	54.00	43.03	AVG	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	TX N20 Mode 5785MHz


### Vertical

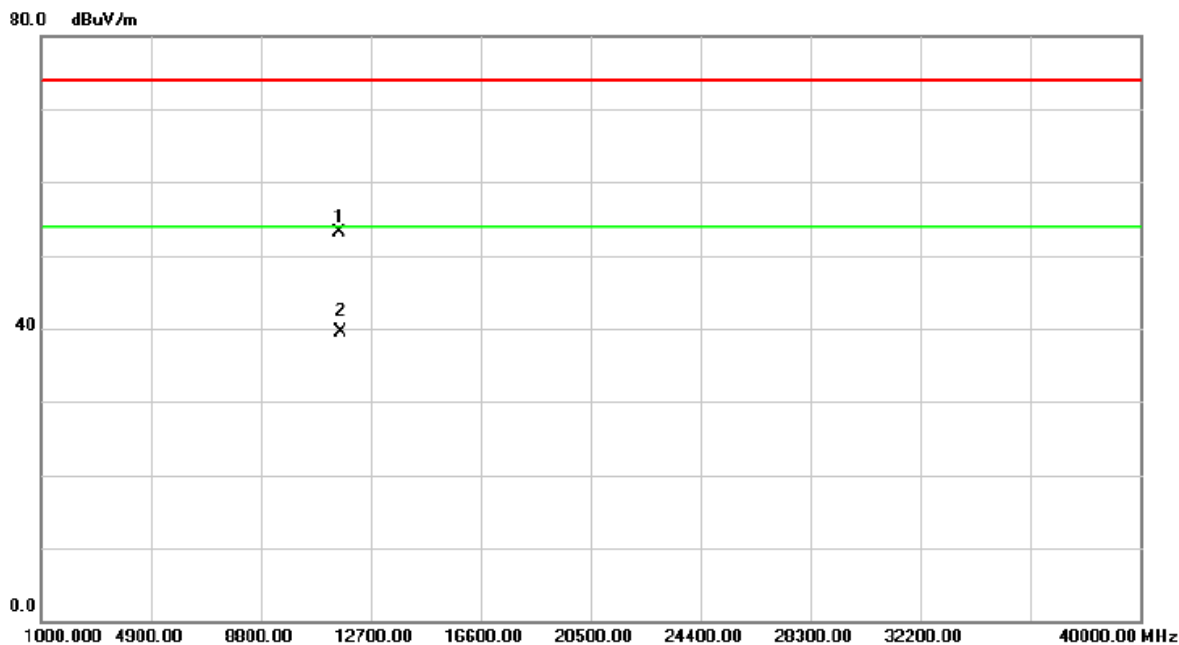

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11570.12	38.84	14.30	53.14	74.00	-20.86	peak	
2	*	11570.12	25.26	14.30	39.56	54.00	-14.44	AVG	


Orthogonal Axis :	X
Test Mode :	TX N20 Mode 5785MHz

**Horizontal**

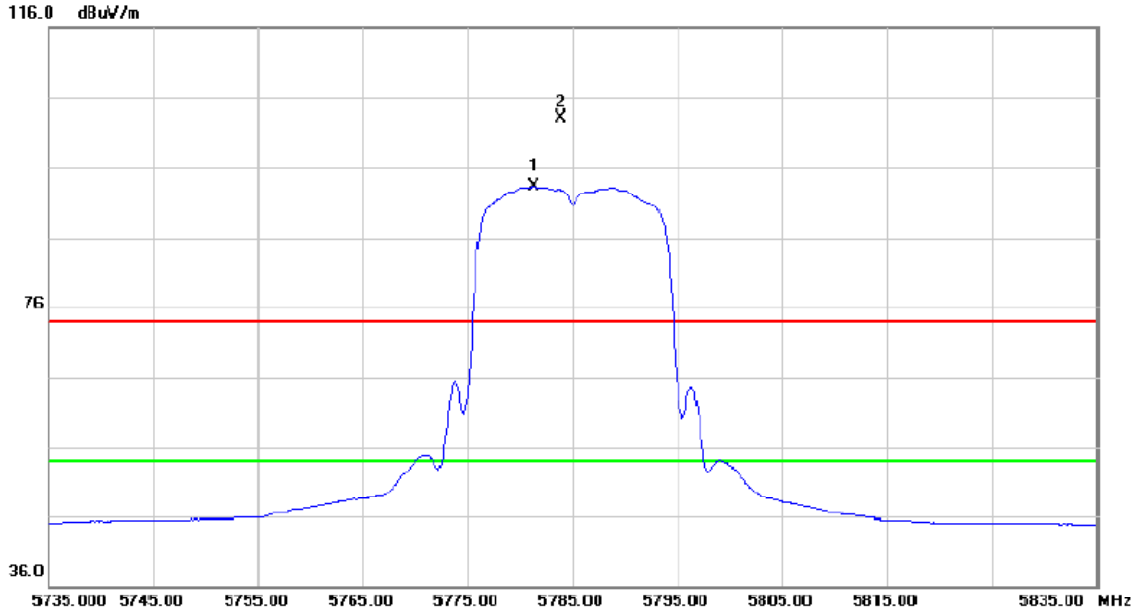

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5781.300	48.36	44.87	93.23	54.00	39.23	AVG	Fundamental frequency, no limit
2	X	5783.900	58.17	44.89	103.06	74.00	29.06	peak	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	TX N20 Mode 5785MHz

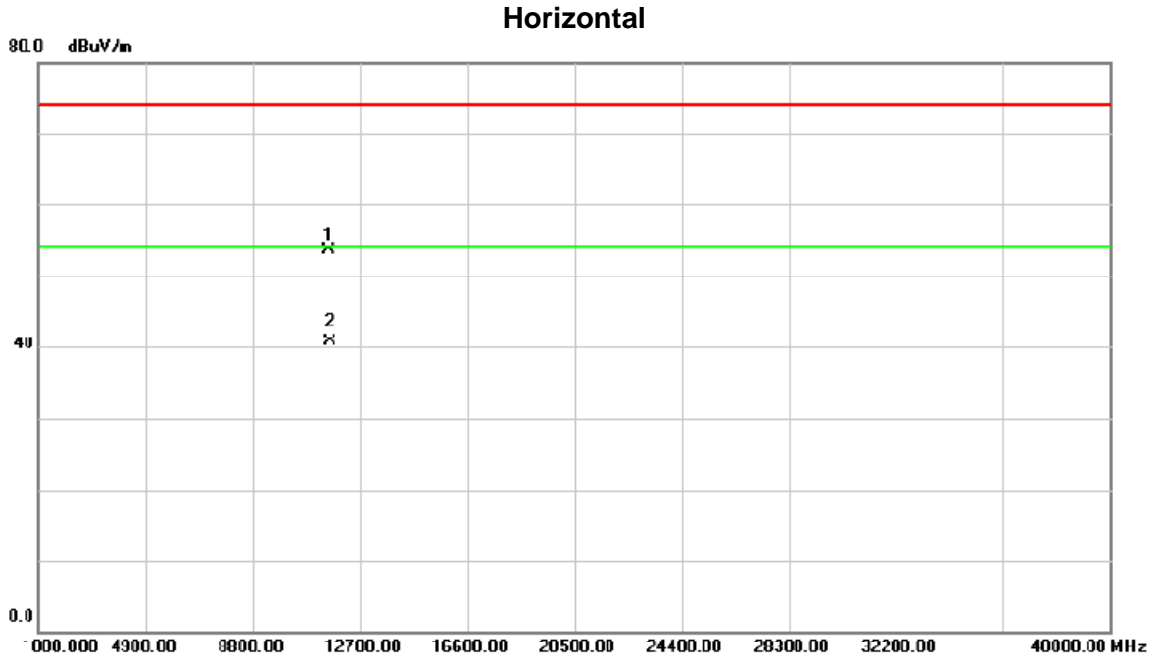


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.13	39.25	14.30	53.55	74.00	-20.45	peak	
2	*	11570.13	26.37	14.30	40.67	54.00	-13.33	AVG	



Orthogonal Axis :	X
Test Mode :	TX N20 Mode 5825MHz


### Vertical

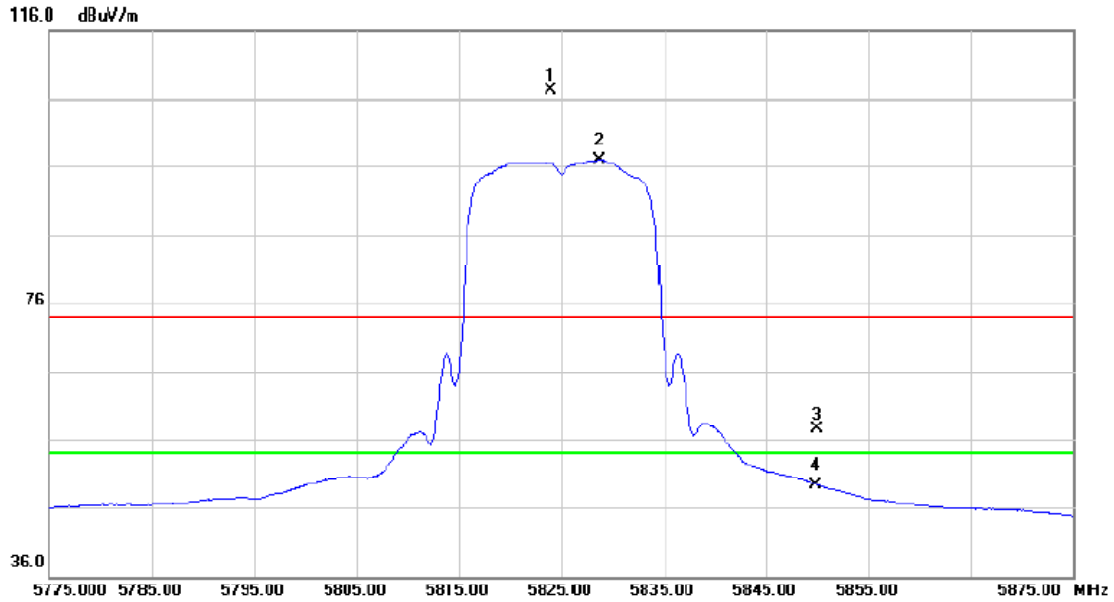

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5824.000	62.04	45.10	107.14	74.00	33.14	peak	Fundamental frequency, no limit
2	*	5828.700	51.73	45.12	96.85	54.00	42.85	AVG	Fundamental frequency, no limit
3		5850.000	12.31	45.23	57.54	74.00	-16.46	peak	
4		5850.000	4.16	45.23	49.39	54.00	-4.61	AVG	


Orthogonal Axis :	X
Test Mode :	TX N20 Mode 5825MHz

**Vertical**

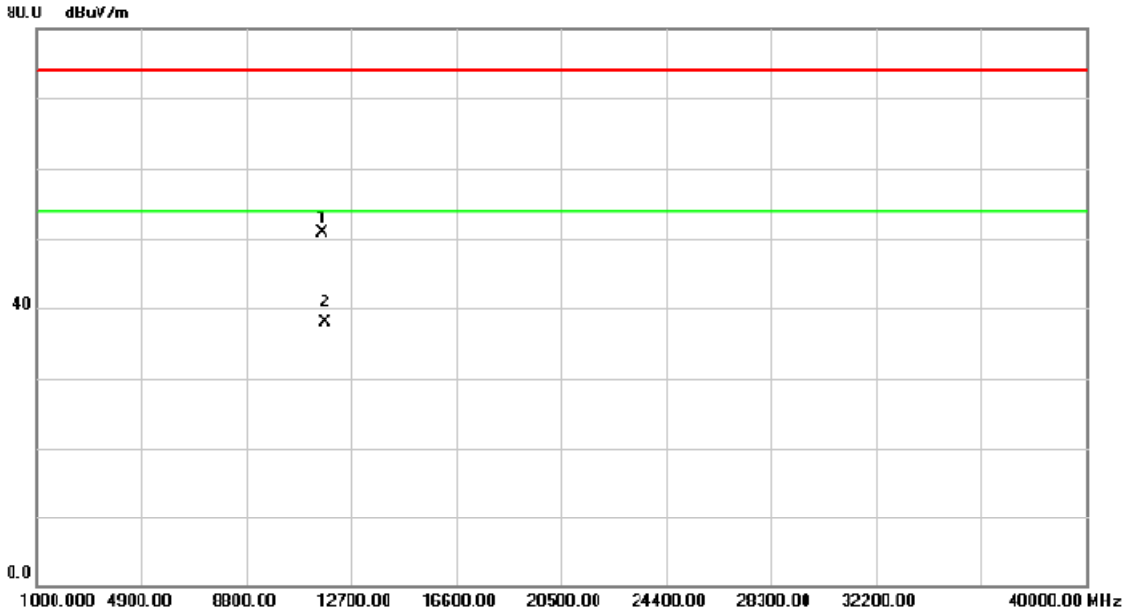

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.28	36.42	14.34	50.76	74.00	-23.24	pcak	
2	*	11650.28	23.62	14.34	37.96	54.00	-16.04	AVG	


Orthogonal Axis :	X
Test Mode :	TX N20 Mode 5825MHz

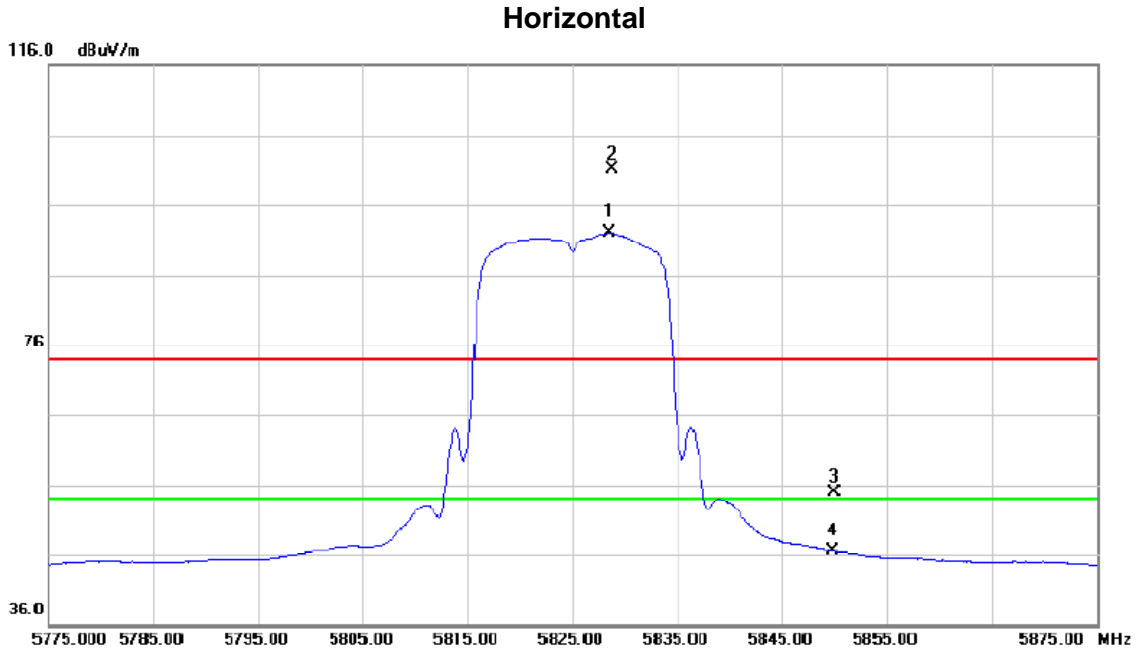

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5828.500	46.96	45.12	92.08	54.00	38.08	AVG	Fundamental frequency, no limit
2	X	5828.800	55.92	45.12	101.04	74.00	27.04	peak	Fundamental frequency, no limit
3		5850.000	9.72	45.23	54.95	74.00	-19.05	peak	
4		5850.000	1.24	45.23	46.47	54.00	-7.53	AVG	


Orthogonal Axis :	X
Test Mode :	TX N20 Mode 5825MHz

### Horizontal

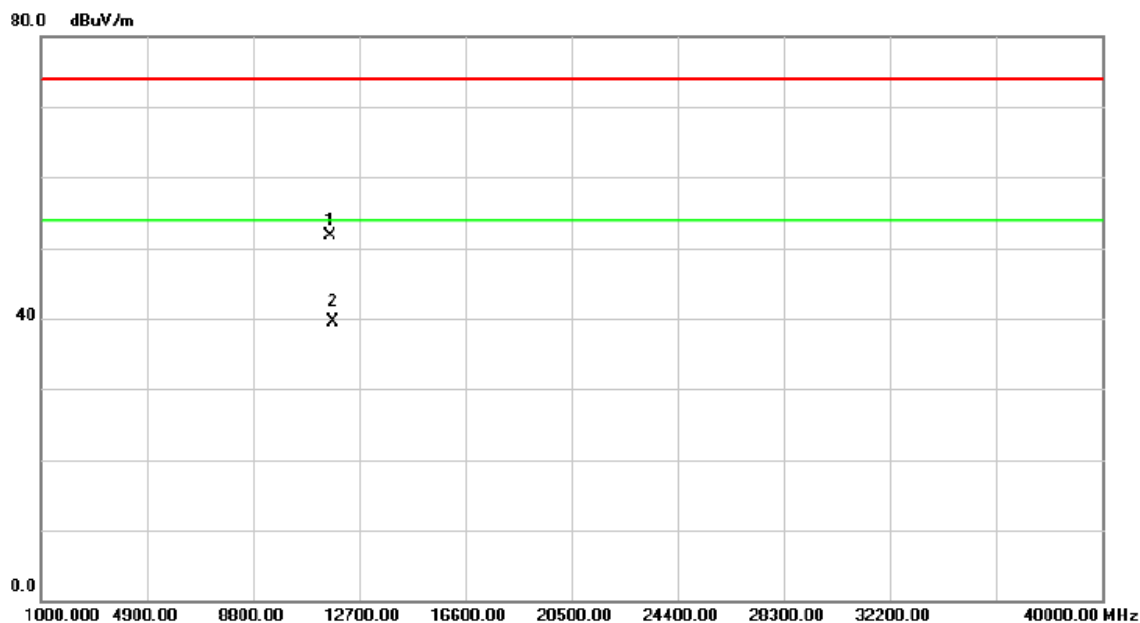

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.36	37.38	14.34	51.72	74.00	-22.28	peak	
2	*	11650.36	25.21	14.34	39.55	54.00	-14.45	AVG	


Orthogonal Axis :	X
Test Mode :	TX N40 Mode 5755MHz

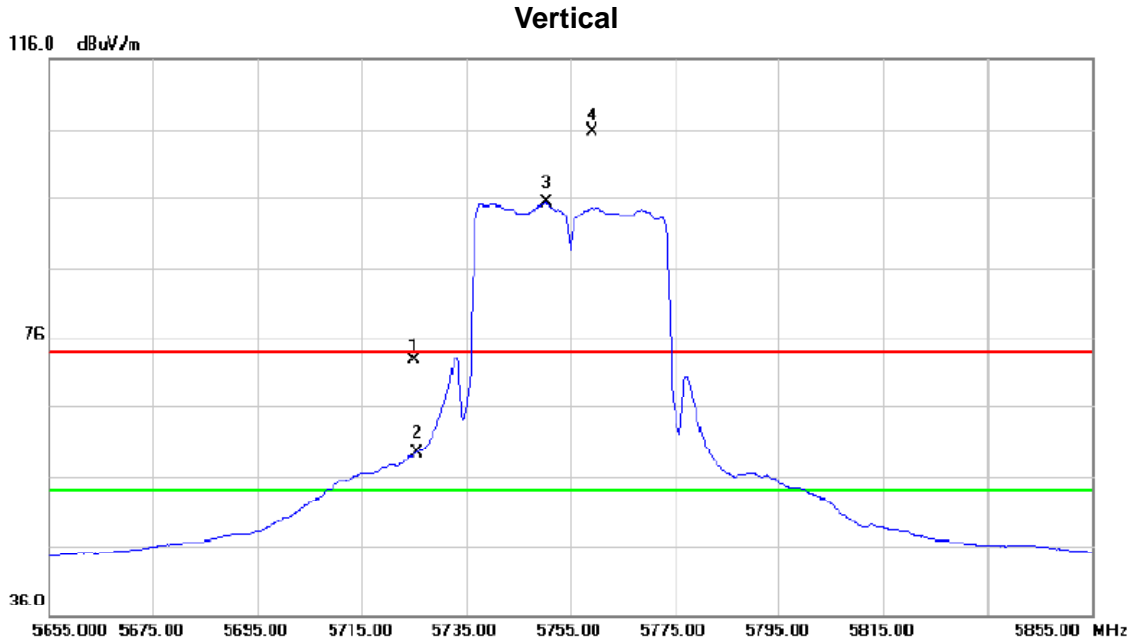

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5725.000	28.18	44.58	72.76	74.00	-1.24	peak	
2	X	5725.000	14.73	44.58	59.31	54.00	5.31	AVG	
3	*	5750.200	50.54	44.71	95.25	54.00	41.25	AVG	Fundamental frequency, no limit
4	X	5759.200	60.88	44.76	105.64	74.00	31.64	peak	Fundamental frequency, no limit


Orthogonal Axis :	X
Test Mode :	TX N40 Mode 5755MHz

**Vertical**

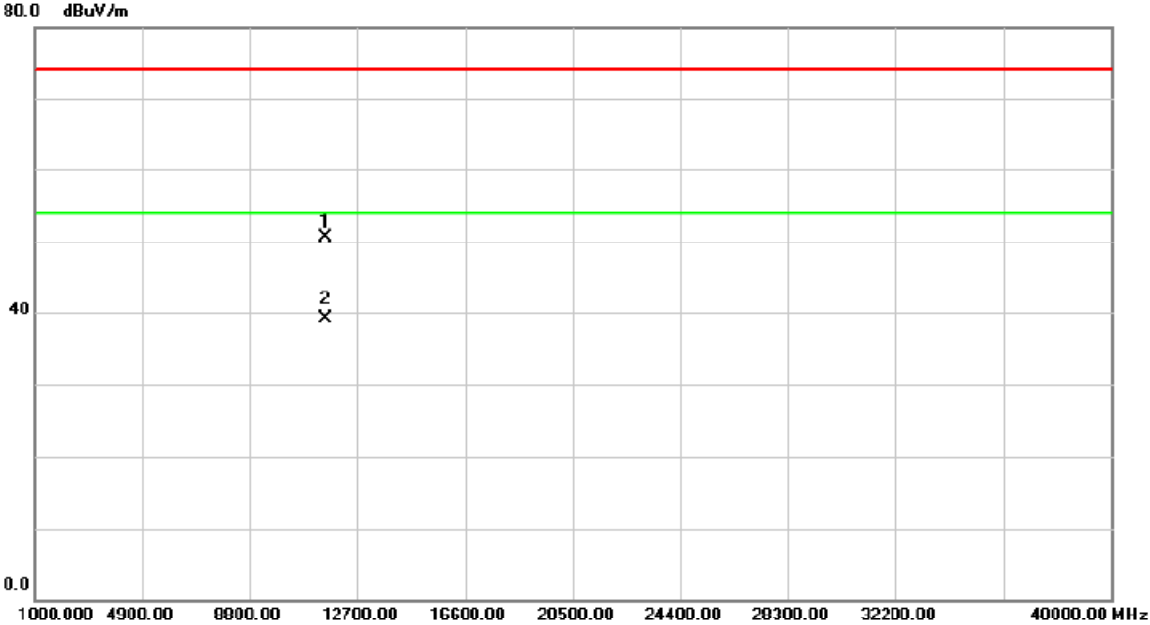

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Ovcr dB	Detector	Comment
1		11510.26	36.25	14.27	50.52	74.00	-23.48	peak	
2	*	11510.26	24.86	14.27	39.13	54.00	-14.87	AVG	


Orthogonal Axis :	X
Test Mode :	TX N40 Mode 5755MHz

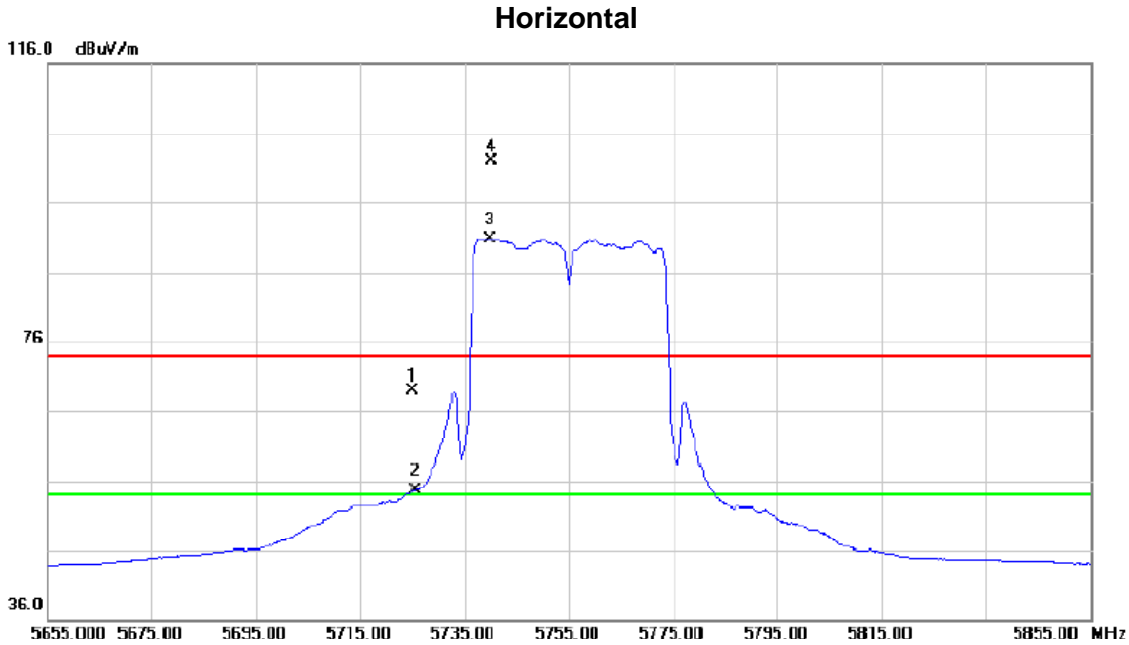

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5725.000	24.40	44.58	68.98	74.00	-5.02	peak	
2	X	5725.000	9.84	44.58	54.42	54.00	0.42	AVG	
3	*	5740.000	46.06	44.66	90.72	54.00	36.72	AVG	Fundamental frequency, no limit
4	X	5740.200	57.29	44.66	101.95	74.00	27.95	peak	Fundamental frequency, no limit

Orthogonal Axis :	X
Test Mode :	TX N40 Mode 5755MHz

**Horizontal**

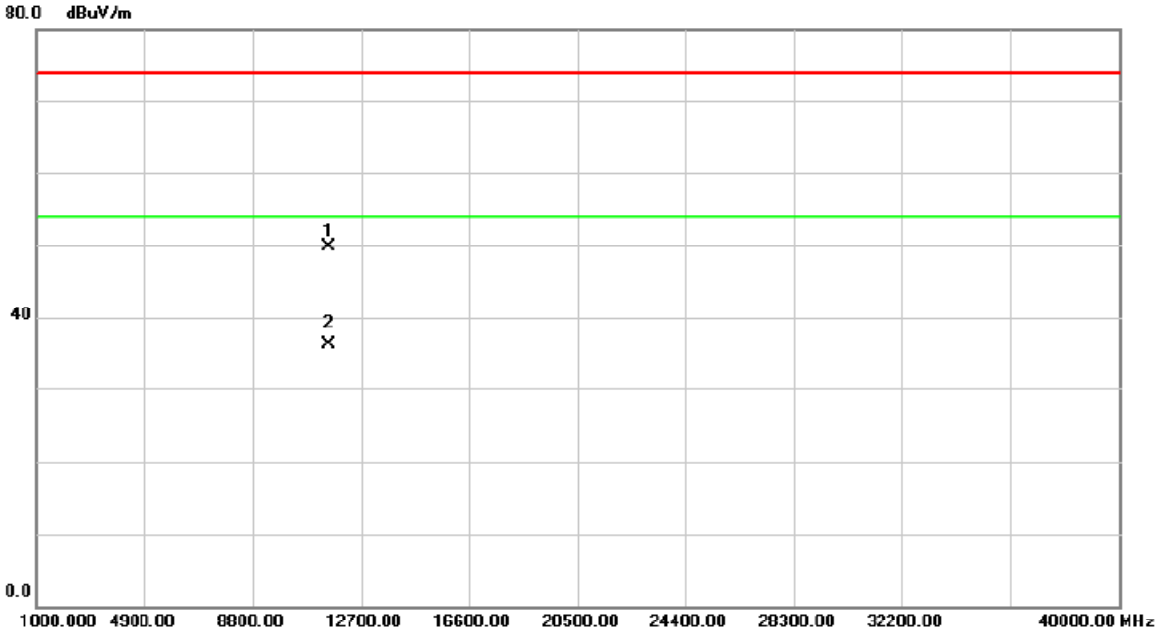


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11510.43	35.37	14.27	49.64	74.00	-24.36	peak	
2	*	11510.43	22.11	14.27	36.38	54.00	-17.62	AVG	



Orthogonal Axis :	X
Test Mode :	TX N40 Mode 5795MHz


### Vertical

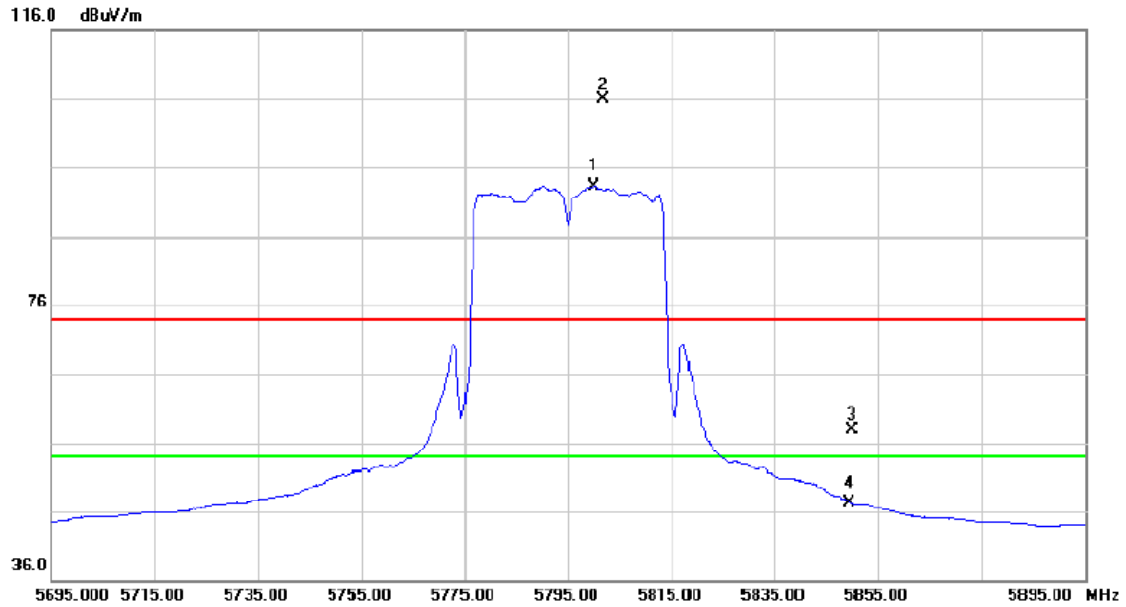

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5800.000	48.33	44.97	93.30	54.00	39.30	AVG	Fundamental frequency, no limit
2	X	5801.800	60.85	44.98	105.83	74.00	31.83	peak	Fundamental frequency, no limit
3		5850.000	12.64	45.23	57.87	74.00	-16.13	peak	
4		5850.000	2.10	45.23	47.33	54.00	-6.67	AVG	


Orthogonal Axis :	X
Test Mode :	TX N40 Mode 5795MHz

### Vertical

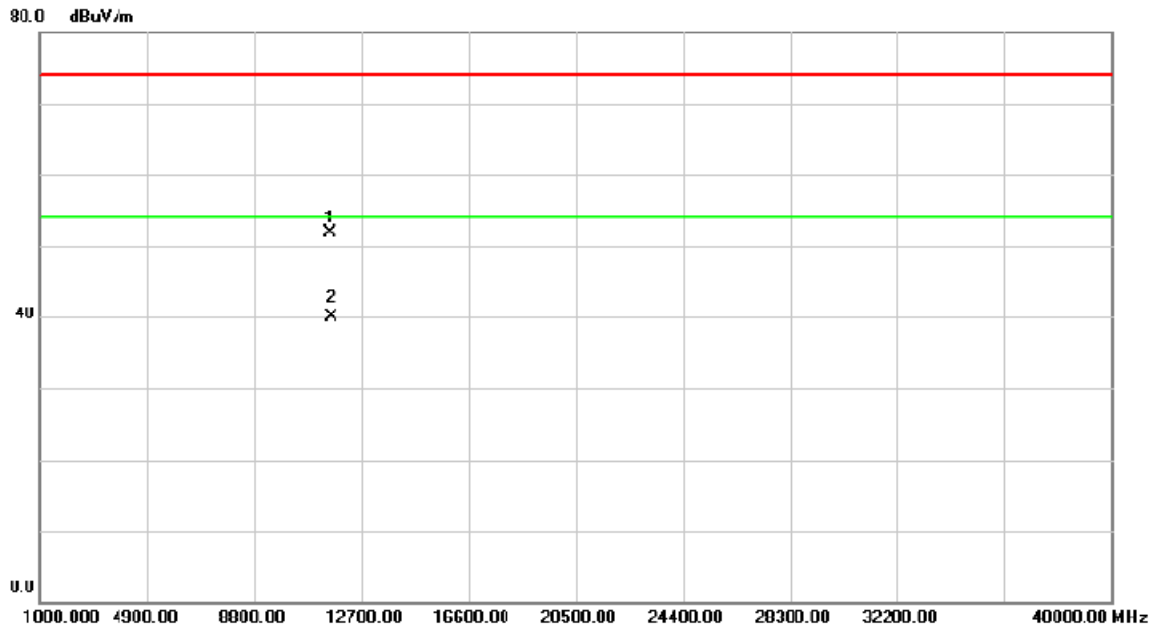


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.23	37.36	14.31	51.67	74.00	-22.33	peak	
2	*	11590.26	25.55	14.31	39.86	54.00	-14.14	AVG	

Orthogonal Axis :	X
Test Mode :	TX N40 Mode 5795MHz

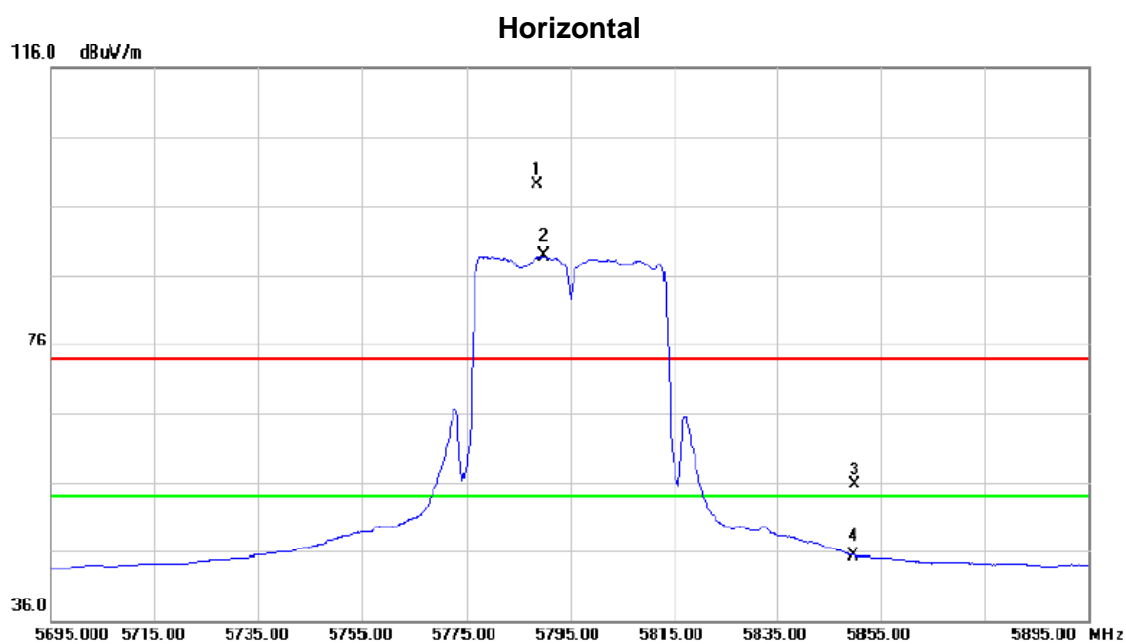

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5788.800	54.28	44.91	99.19	74.00	25.19	peak	Fundamental frequency, no limit
2	*	5790.000	43.84	44.92	88.76	54.00	34.76	AVG	Fundamental frequency, no limit
3		5850.000	10.56	45.23	55.79	74.00	-18.21	peak	
4		5850.000	0.14	45.23	45.37	54.00	-8.63	AVG	

Orthogonal Axis :	X
Test Mode :	TX N40 Mode 5795MHz

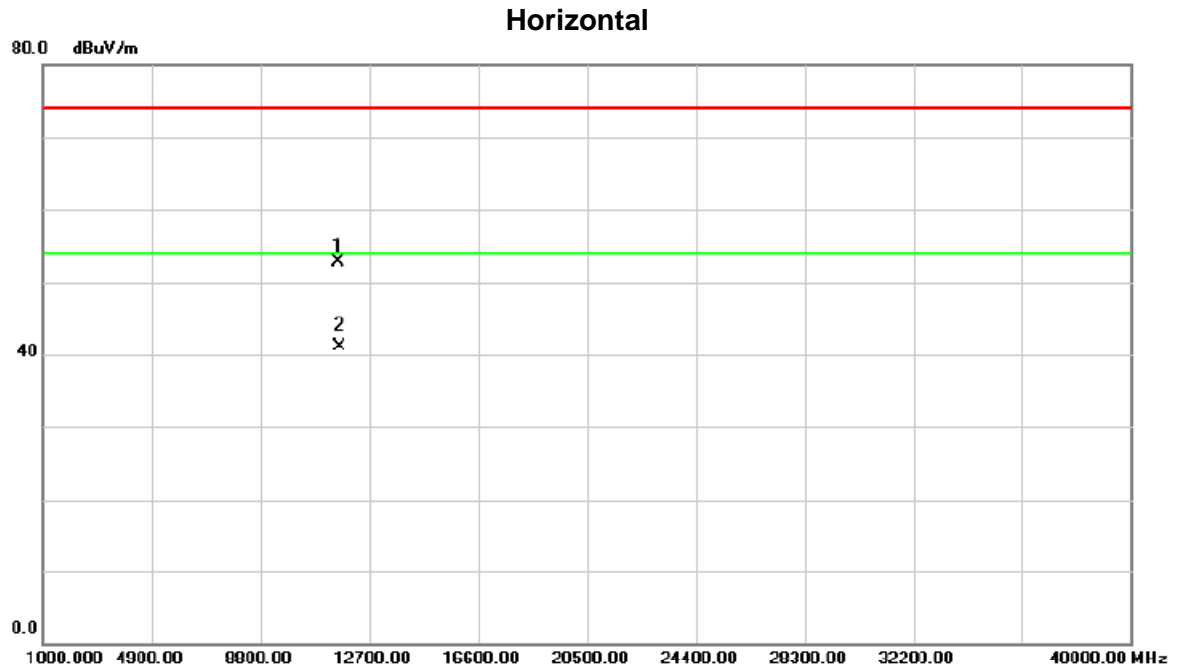


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.56	38.48	14.31	52.79	74.00	-21.21	peak	
2	*	11590.56	26.89	14.31	41.20	54.00	-12.80	AVG	

## ATTACHMENT E - BANDWIDTH

**Test Mode : TX A Mode\_CH149/157/165**


Test Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	LIMIT (MHz)
CH149	5745	15.85	16.35	>=500KHz
CH157	5785	15.70	16.35	>=500KHz
CH165	5825	15.85	16.40	>=500KHz

**TX CH 149**

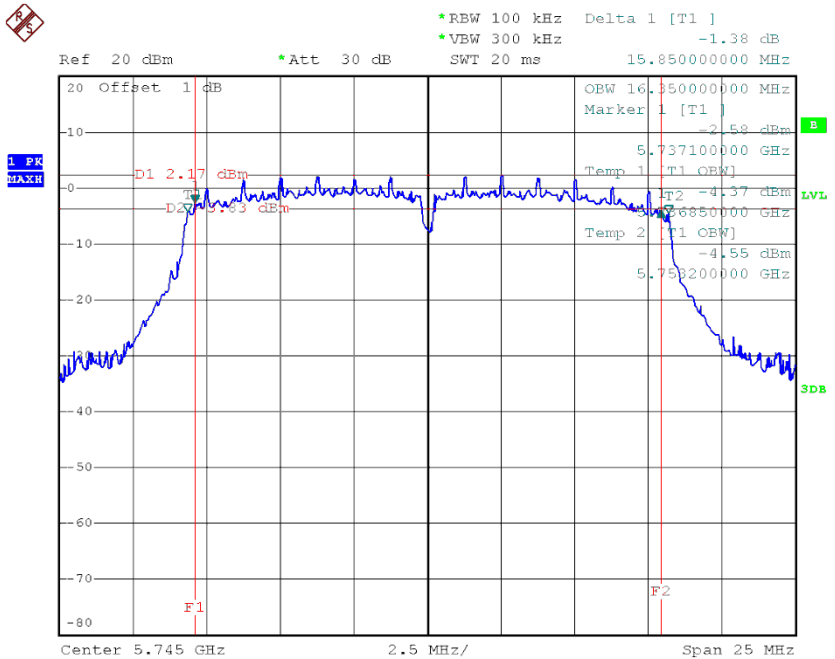


Date: 8.JUL.2014 17:30:38

### TX CH 157

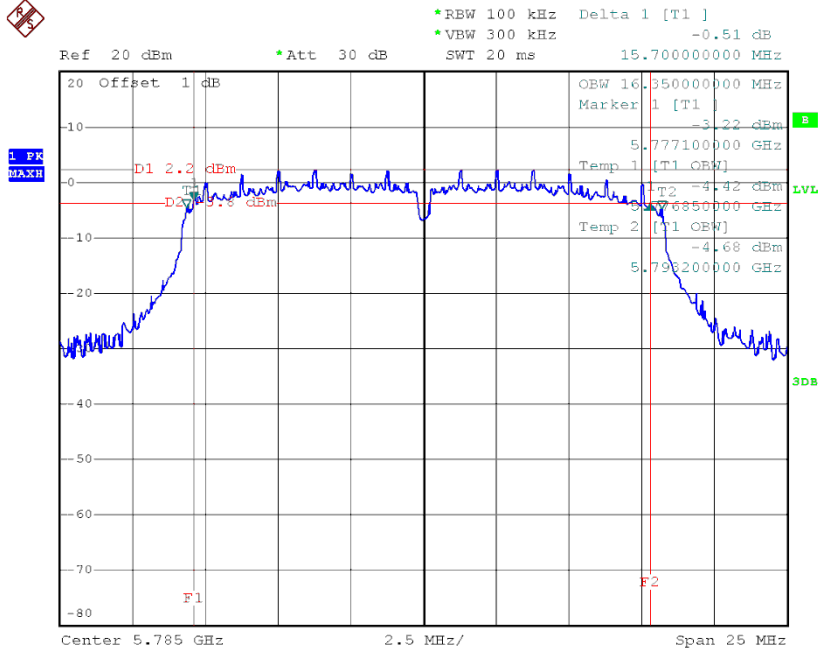

Date: 8.JUL.2014 17:28:05

### TX CH 165

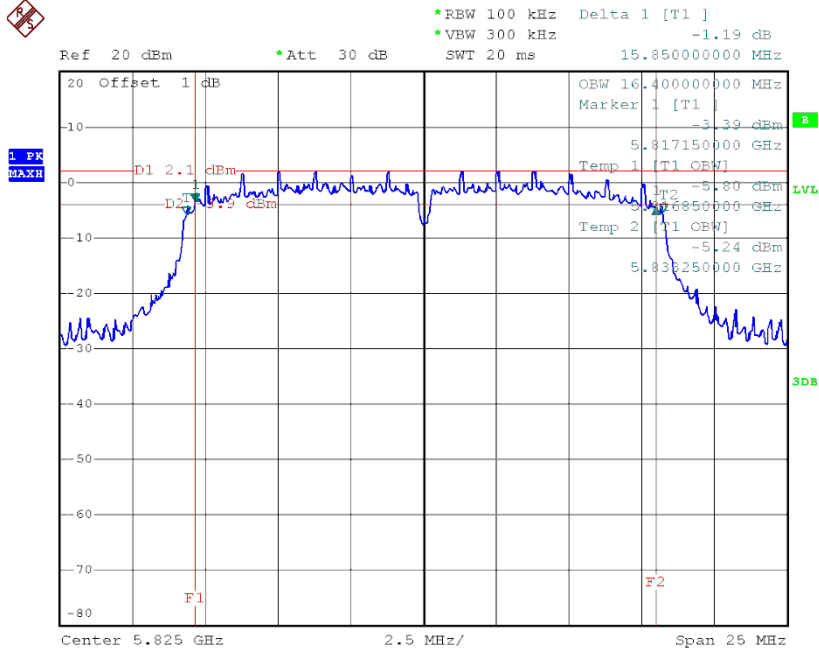


Date: 8.JUL.2014 17:25:07

**Test Mode : TX N-20MHz Mode\_CH149/157/165\_ANT 1**

Test Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	LIMIT (MHz)
CH149	5745	16.83	17.45	>=500KHz
CH157	5785	16.75	17.45	>=500KHz
CH165	5825	16.30	17.45	>=500KHz


**TX CH 149**

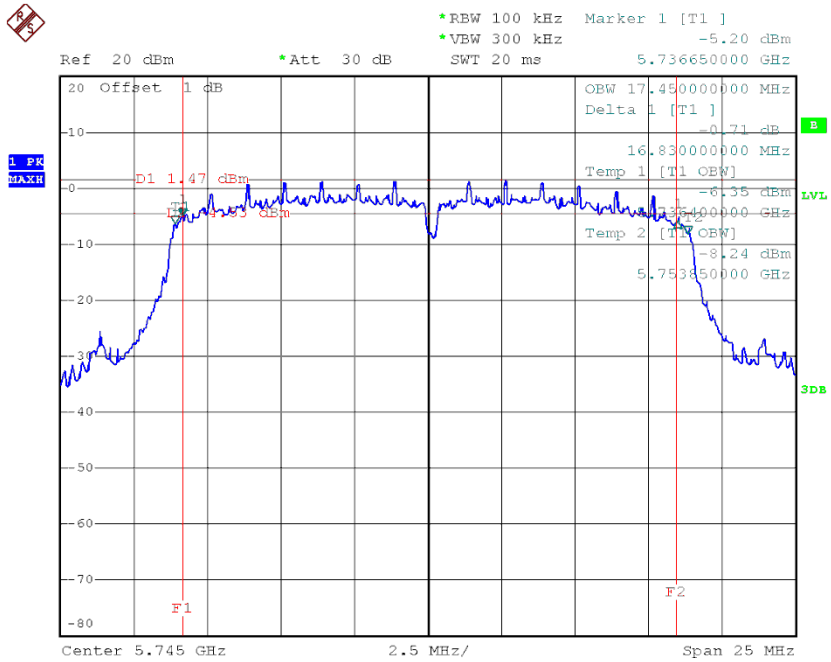

Date: 8.JUL.2014 17:12:47




### TX CH 157

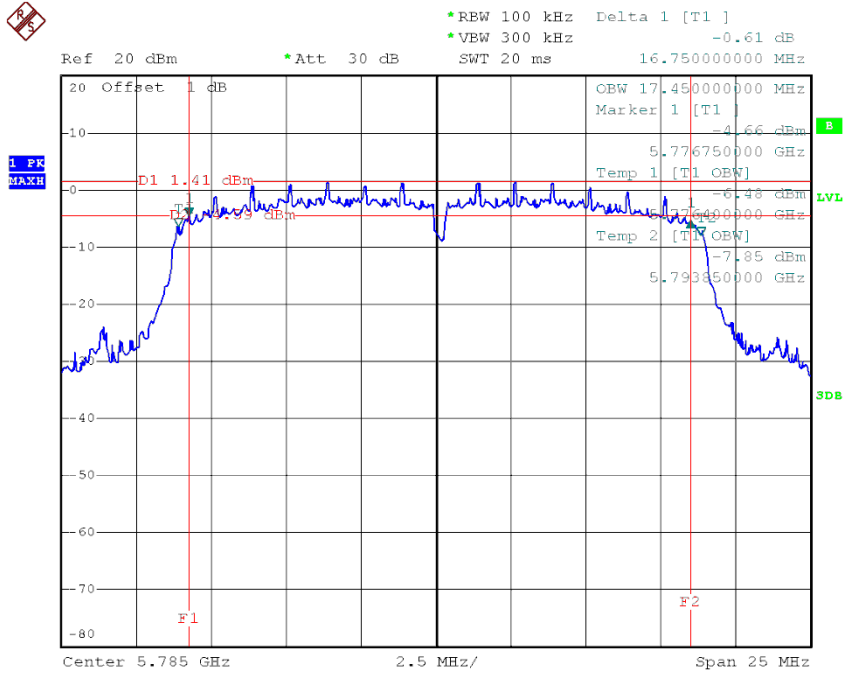

Date: 8.JUL.2014 17:17:36

### TX CH 165

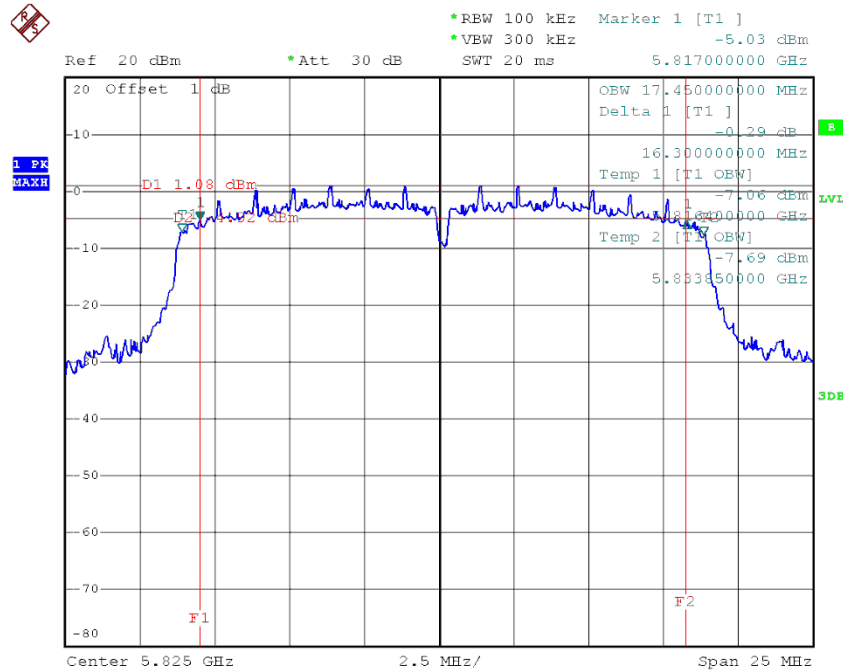


Date: 8.JUL.2014 17:21:04

**Test Mode : TX N-20MHz Mode\_CH149/157/165\_ANT 2**


Test Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	LIMIT (MHz)
CH149	5745	16.73	17.45	>=500KHz
CH157	5785	16.80	17.45	>=500KHz
CH165	5825	16.35	17.45	>=500KHz

**TX CH 149**

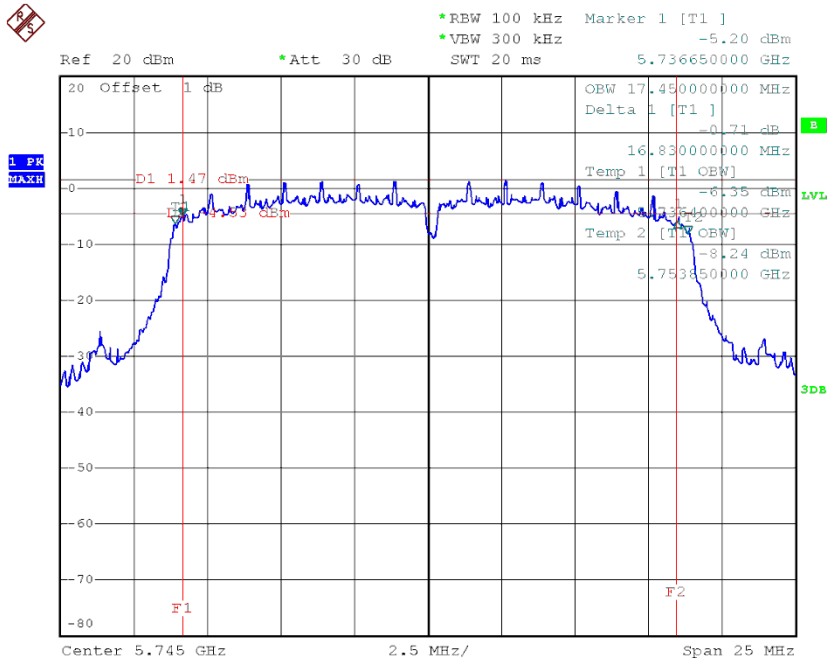


Date: 8.JUL.2014 17:12:47

### TX CH 157

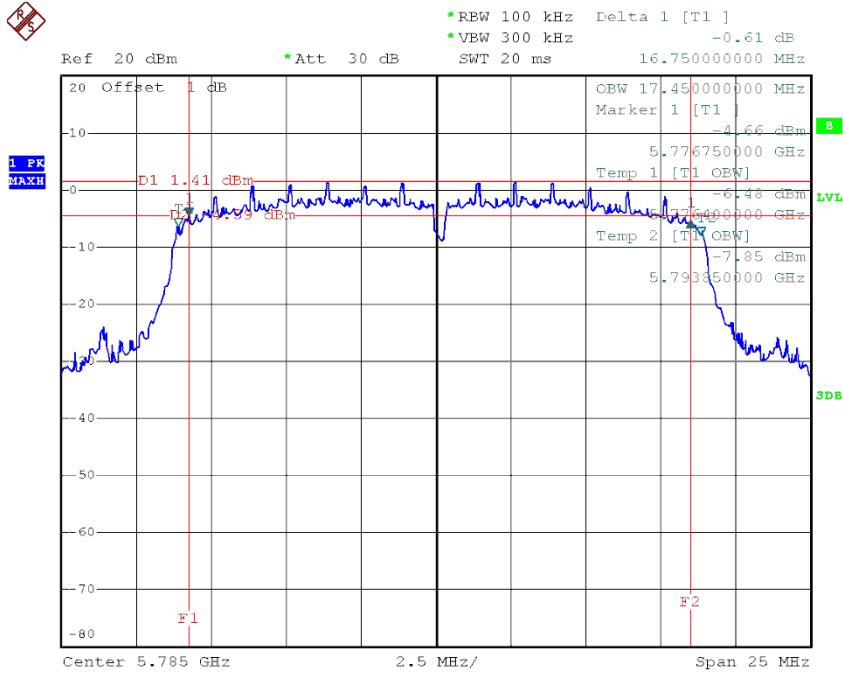

Date: 8.JUL.2014 17:17:36

### TX CH 165

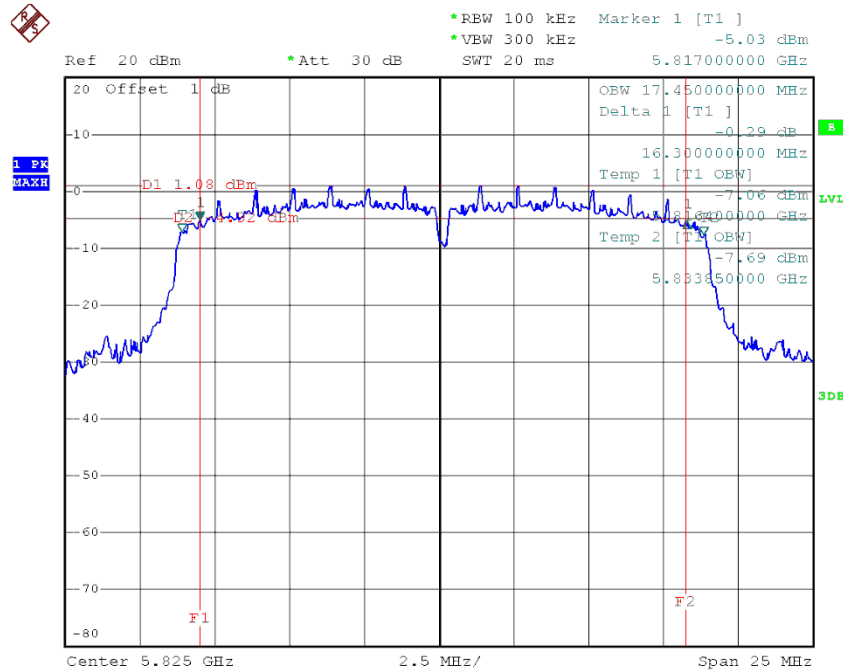


Date: 8.JUL.2014 17:21:04

**Test Mode : TX N-40MHz Mode\_CH151/159\_ANT 1**


Test Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	LIMIT (MHz)
CH151	5755	36.30	36.30	>=500KHz
CH159	5795	36.45	36.30	>=500KHz

**TX CH 151**

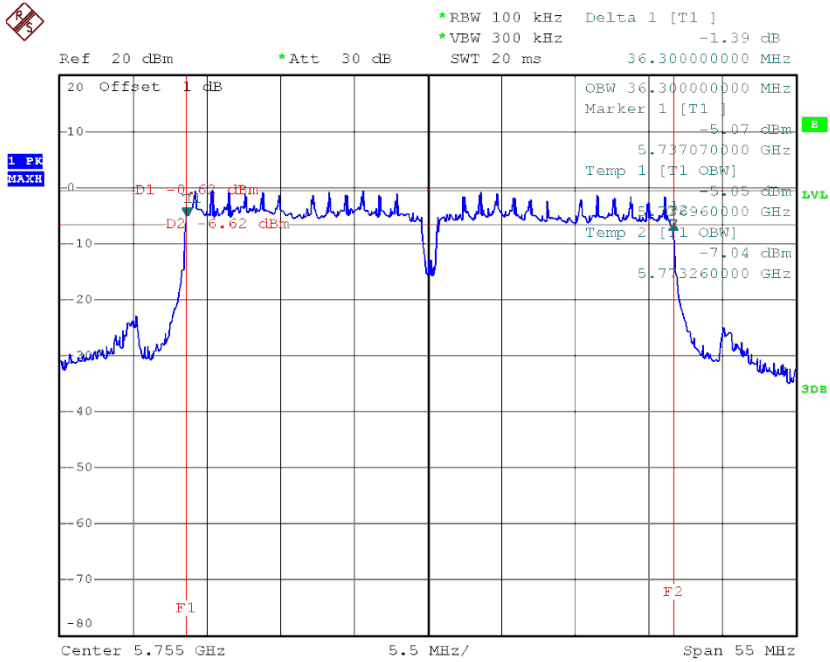

Date: 8.JUL.2014 17:01:08

**TX CH 159**

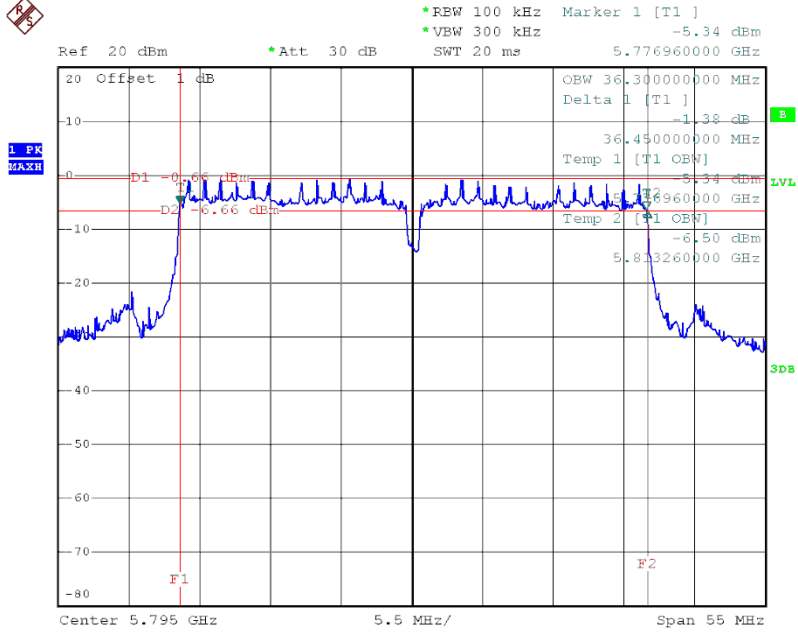


Date: 8.JUL.2014 17:07:07

**Test Mode : TX N-40MHz Mode\_CH151/159\_ANT 2**


Test Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	LIMIT (MHz)
CH151	5755	36.41	36.30	>=500KHz
CH159	5795	36.45	36.30	>=500KHz

**TX CH 151**

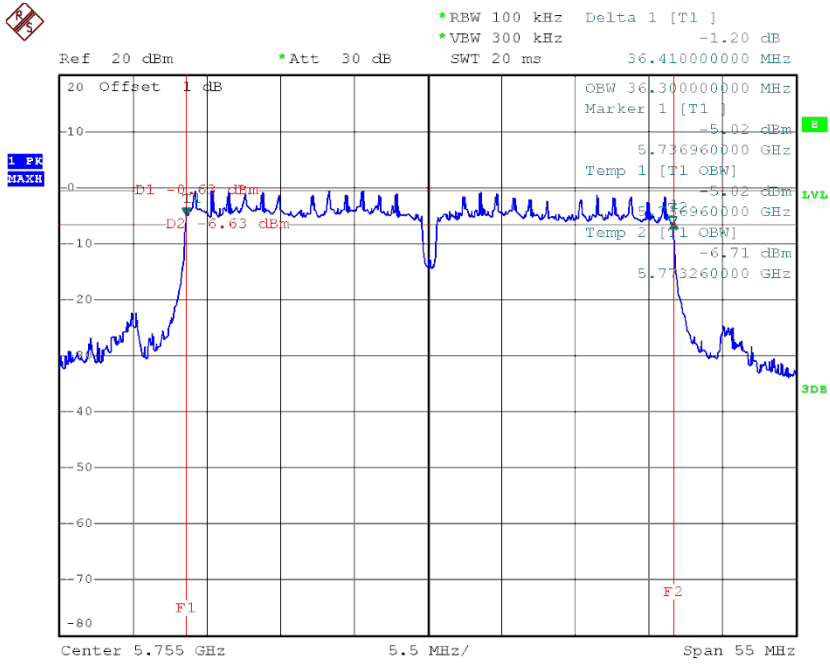

Date: 8.JUL.2014 16:59:57

**TX CH 159**

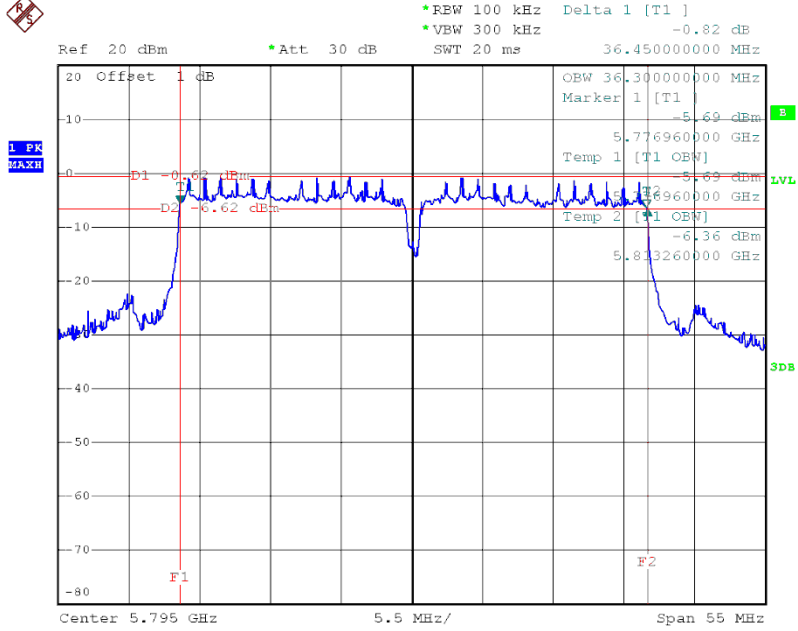

Date: 8.JUL.2014 17:06:11

## ATTACHMENT F - MAXIMUM OUTPUT POWER



Test Mode : TX A Mode				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	21.71	30	1
CH157	5785	21.73	30	1
CH165	5825	21.54	30	1

Test Mode : TX N-20M Mode_ANT 1				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	20.87	30	1
CH157	5785	20.82	30	1
CH165	5825	20.63	30	1

Test Mode : TX N-20M Mode_ANT 2				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	20.14	30	1
CH157	5785	20.09	30	1
CH165	5825	20.03	30	1

Test Mode : TX N-20M Mode_Total				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	23.53	30	1
CH157	5785	23.48	30	1
CH165	5825	23.35	30	1

<b>Test Mode : TX N-40M Mode_ANT 1</b>				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	20.72	30	1
CH159	5795	20.51	30	1


<b>Test Mode : TX N-40M Mode_ANT 2</b>				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	19.82	30	1
CH159	5795	19.43	30	1

<b>Test Mode : TX N-40M Mode_Total</b>				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	23.30	30	1
CH159	5795	23.01	30	1

**ATTACHMENT G – ANTENNA CONDUCTED SPURIOUS  
EMISSION**


Test Mode : TX A Mode

### TX A Mode CH149

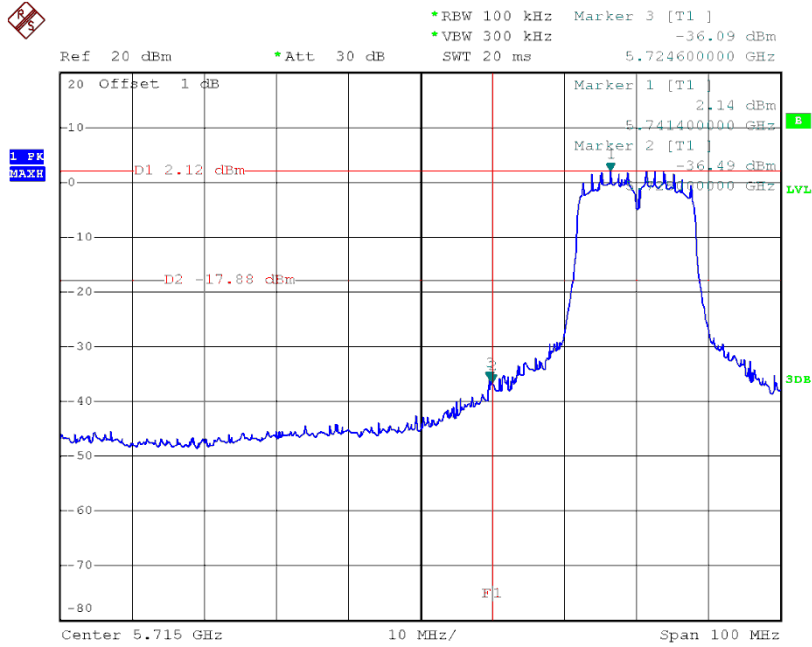


Date: 8.JUL.2014 17:36:52

### TX A Mode CH165

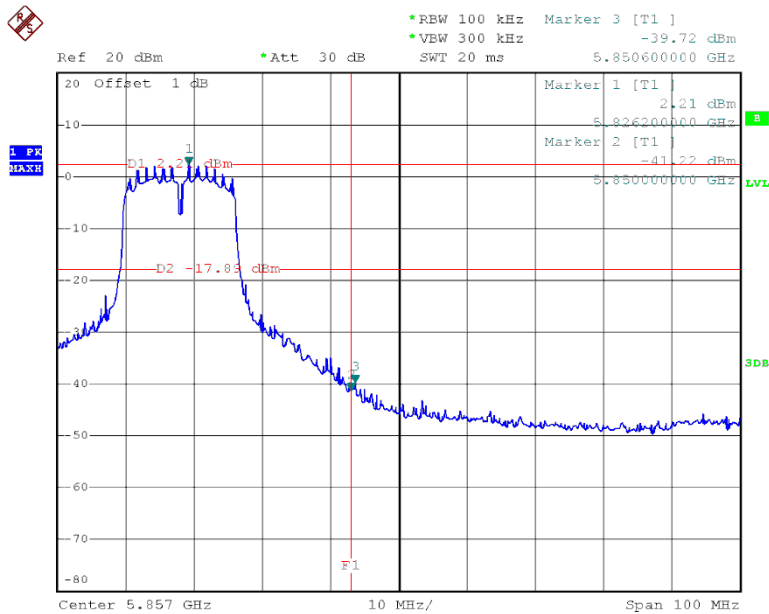


Date: 8.JUL.2014 17:43:40

### TX A Mode CH149 (30MHz to 1000MHz)

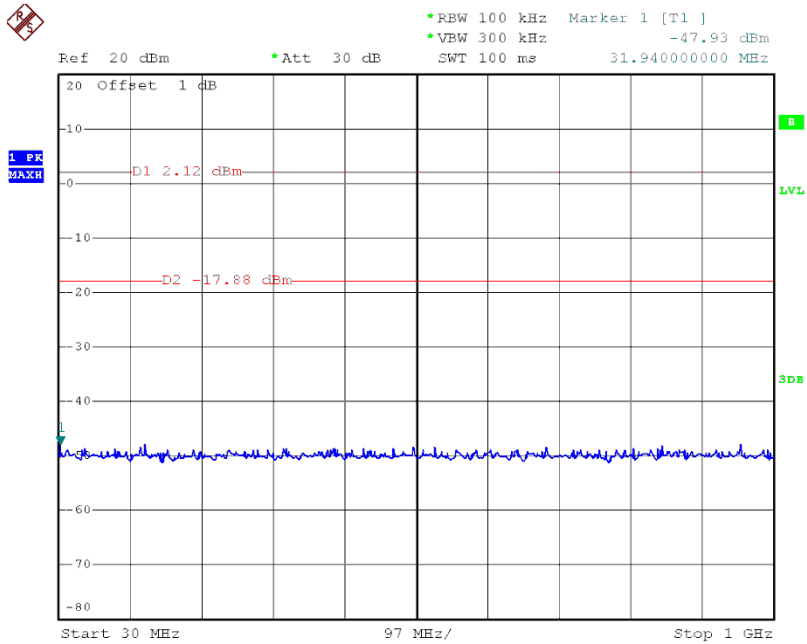


Date: 8.JUL.2014 17:39:39

### TX A Mode CH149 (1000MHz to 10<sup>th</sup> Harmonic)

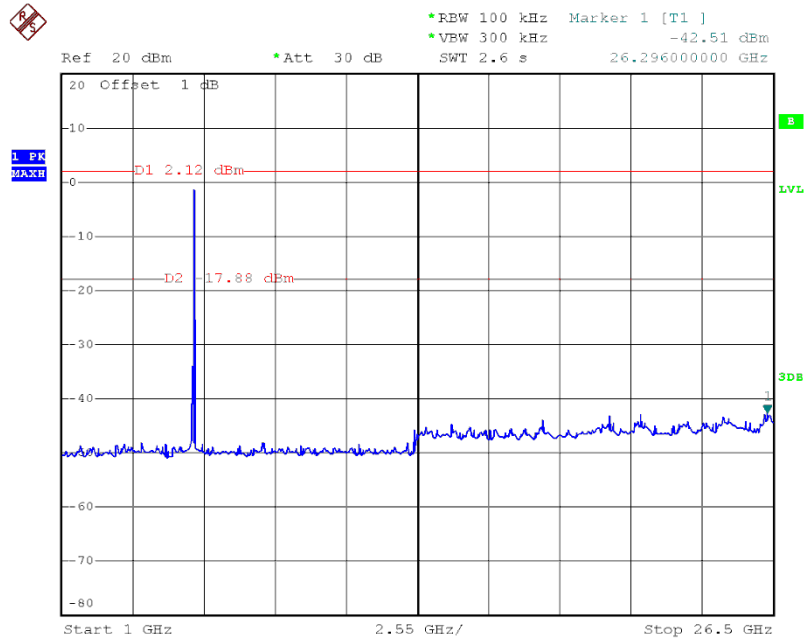


Date: 8.JUL.2014 17:40:02

### TX A Mode CH157 (30MHz to 1000MHz)

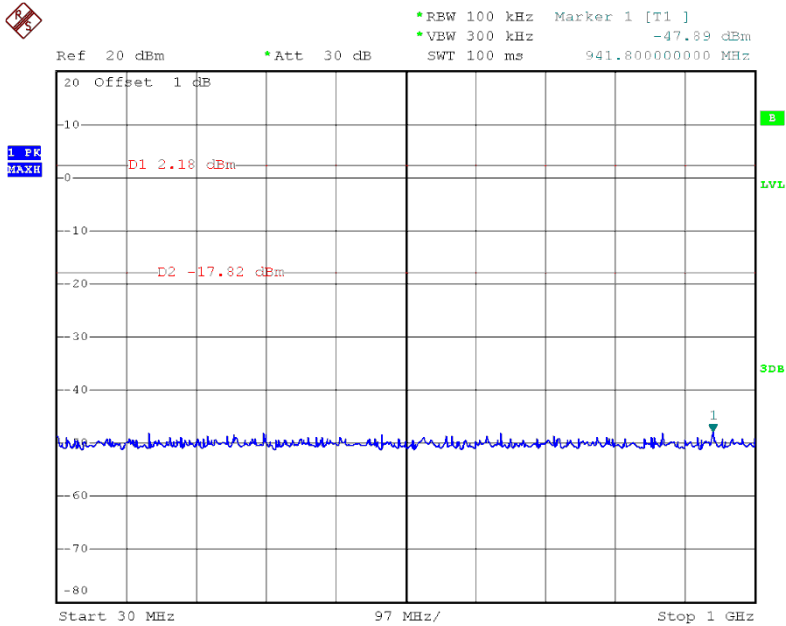


Date: 8.JUL.2014 17:47:28

### TX A Mode CH157 (1000MHz to 10<sup>th</sup> Harmonic)

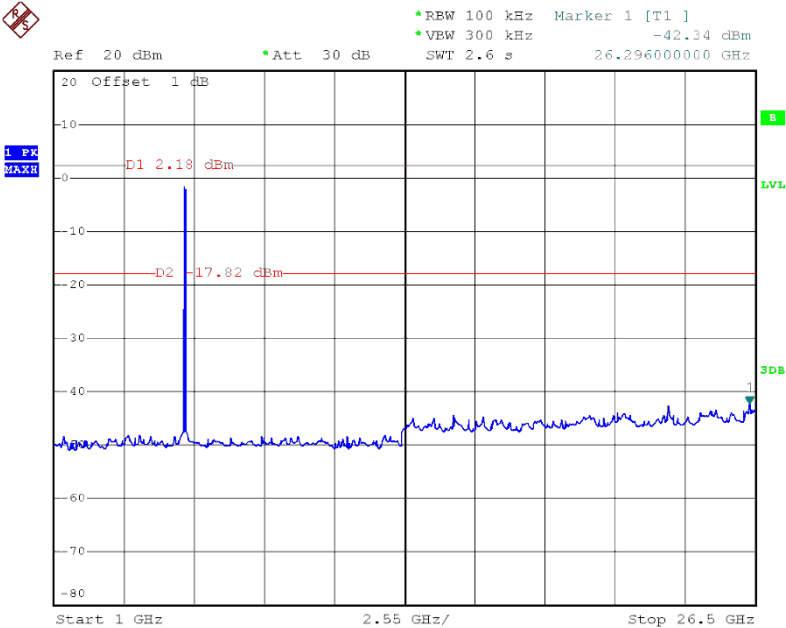


Date: 8.JUL.2014 17:47:00

### TX A Mode CH165 (30MHz to 1000MHz)

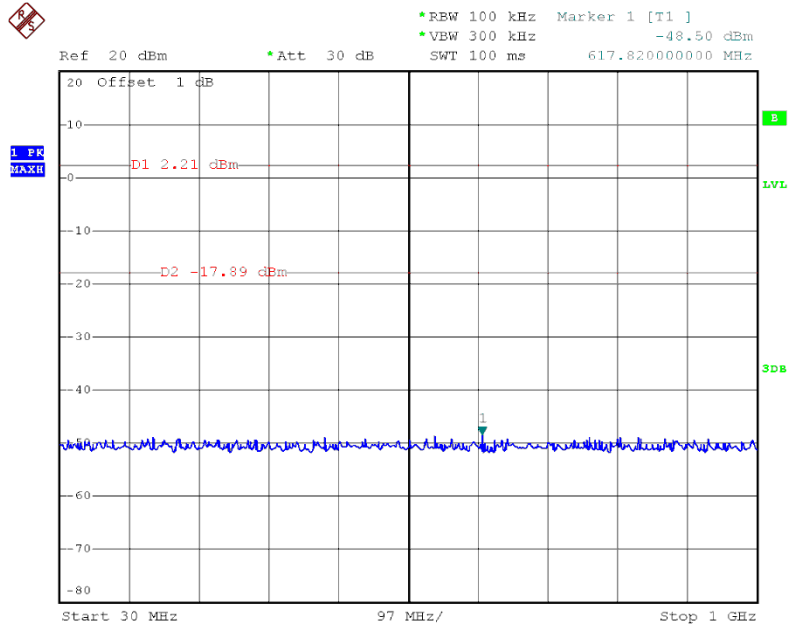

Date: 8.JUL.2014 17:44:22


### TX A Mode CH165 (1000MHz to 10<sup>th</sup> Harmonic)

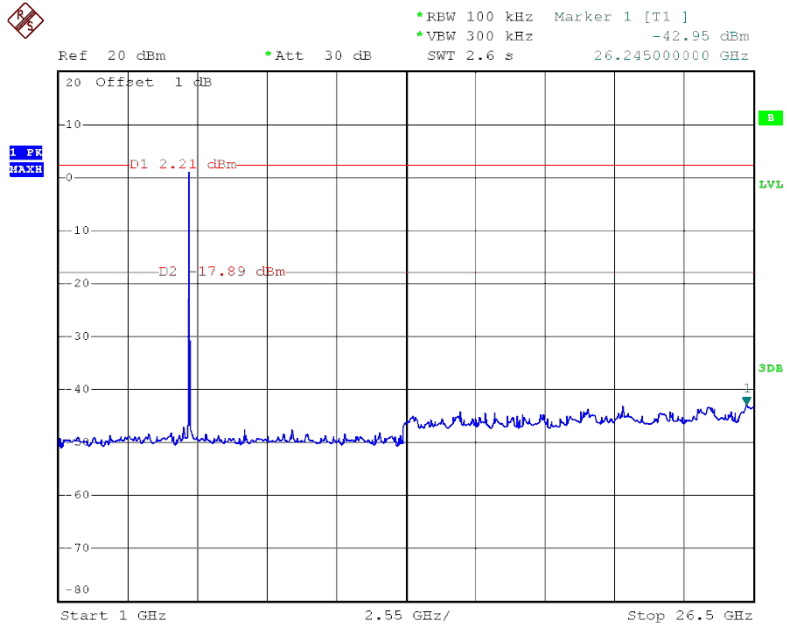

Date: 8.JUL.2014 17:44:52


Test Mode : TX N-20M Mode\_ANT 1

### TX HT20 mode CH149

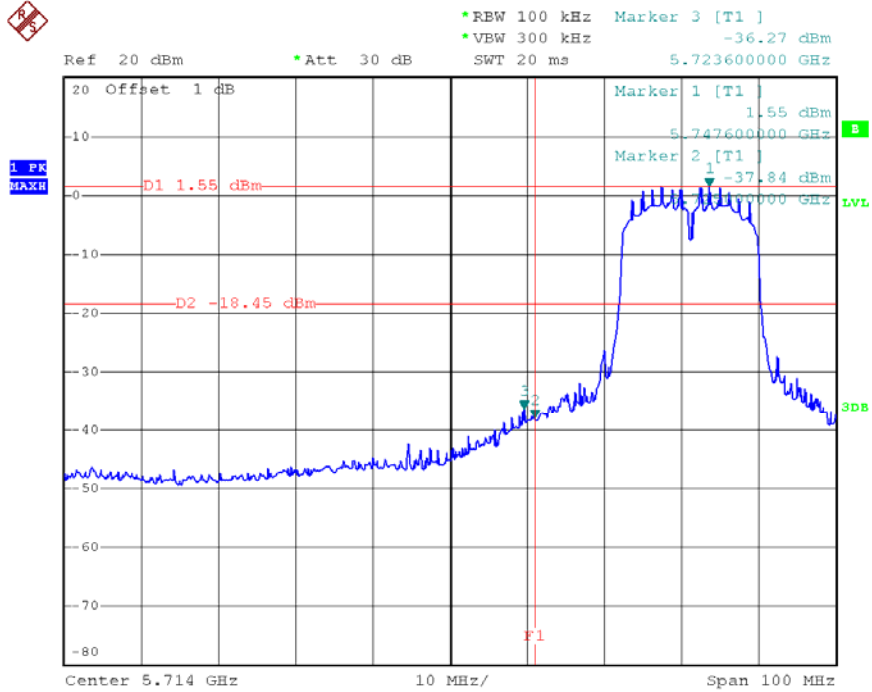

Date: 8.JUL.2014 17:53:06


### TX HT20 mode CH165

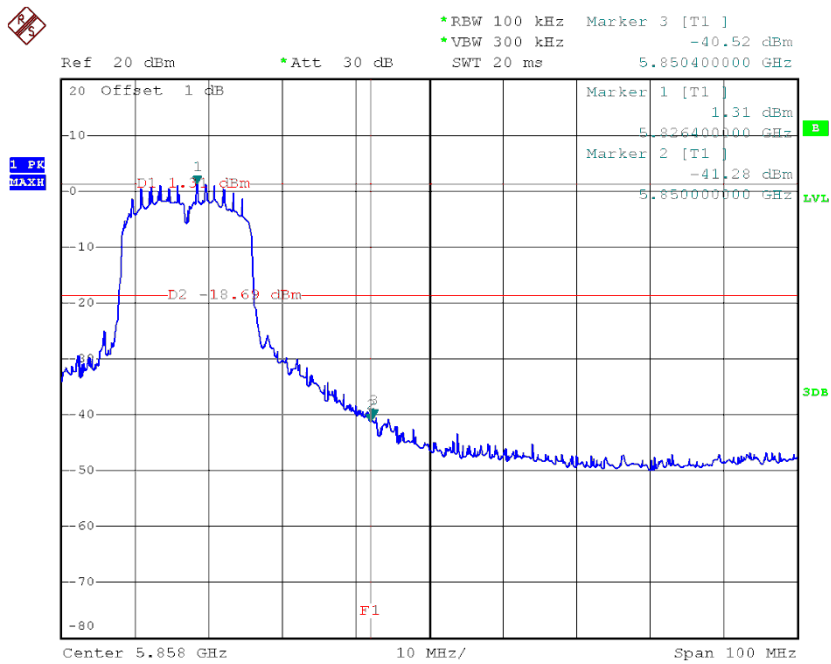

Date: 8.JUL.2014 18:03:08




### TX HT20 mode CH149 (30MHz to 1000MHz)

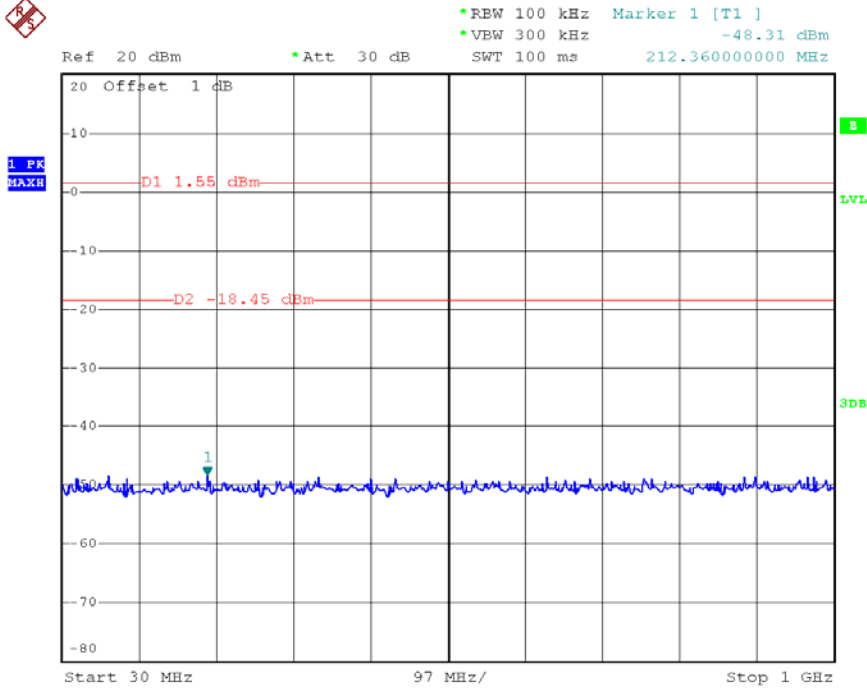


Date: 8.JUL.2014 17:55:12

### TX HT20 mode CH149 (1000MHz to 10<sup>th</sup> Harmonic)

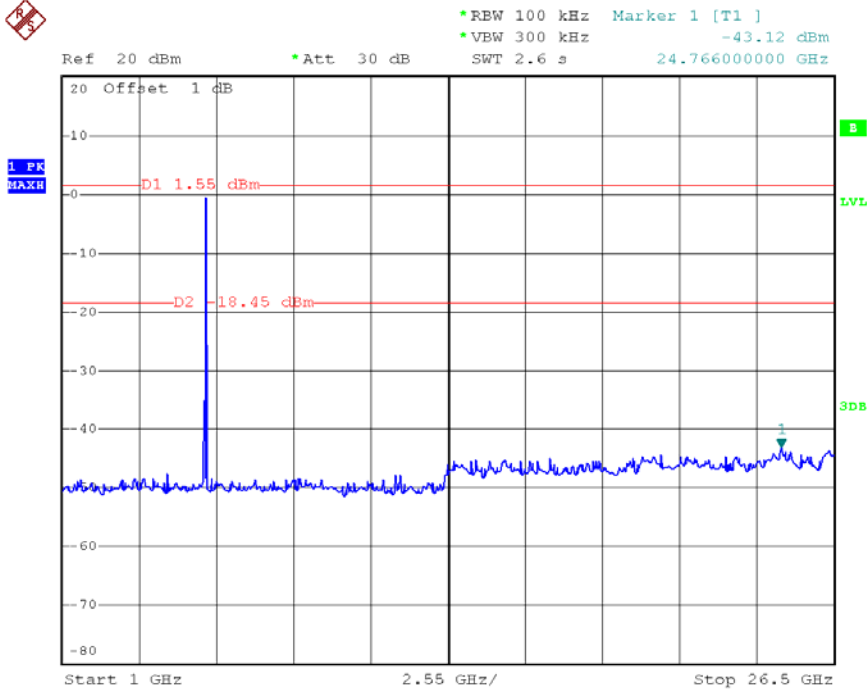


Date: 8.JUL.2014 17:55:30

### TX HT20 mode CH157 (30MHz to 1000MHz)

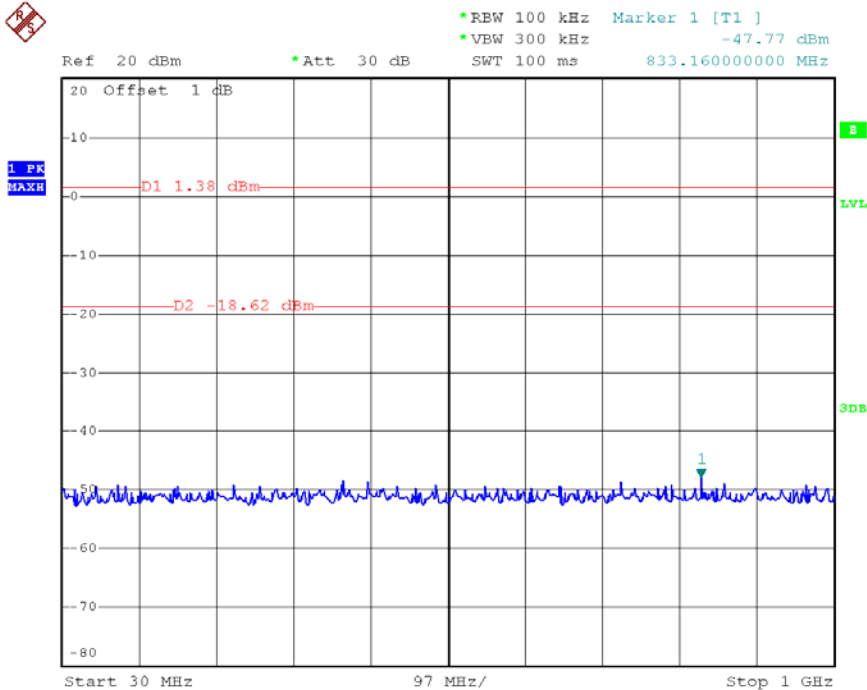


Date: 8.JUL.2014 18:08:36

### TX HT20 mode CH157 (1000MHz to 10<sup>th</sup> Harmonic)

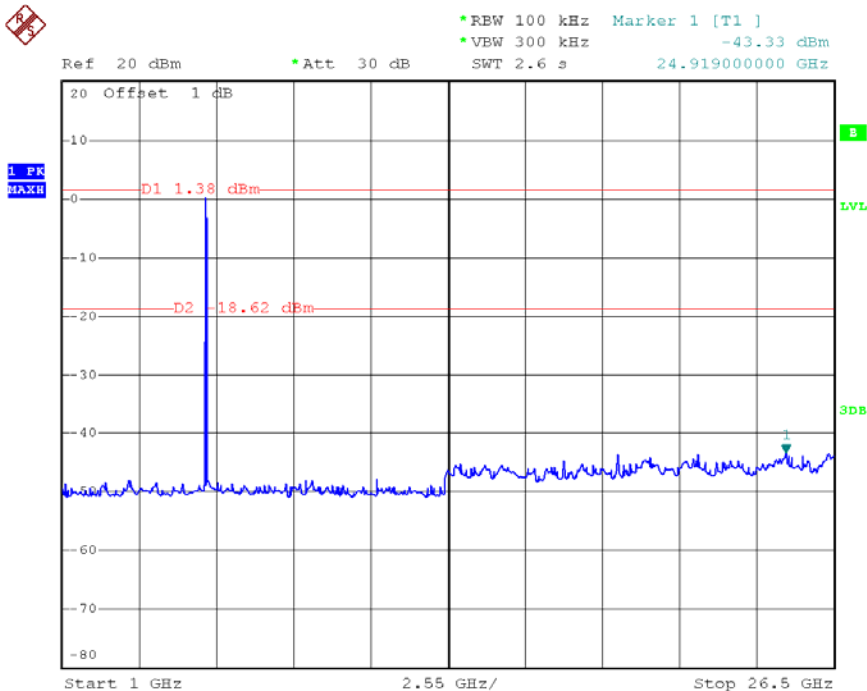


Date: 8.JUL.2014 18:08:55

**TX HT20 mode CH165 (30MHz to 1000MHz)**

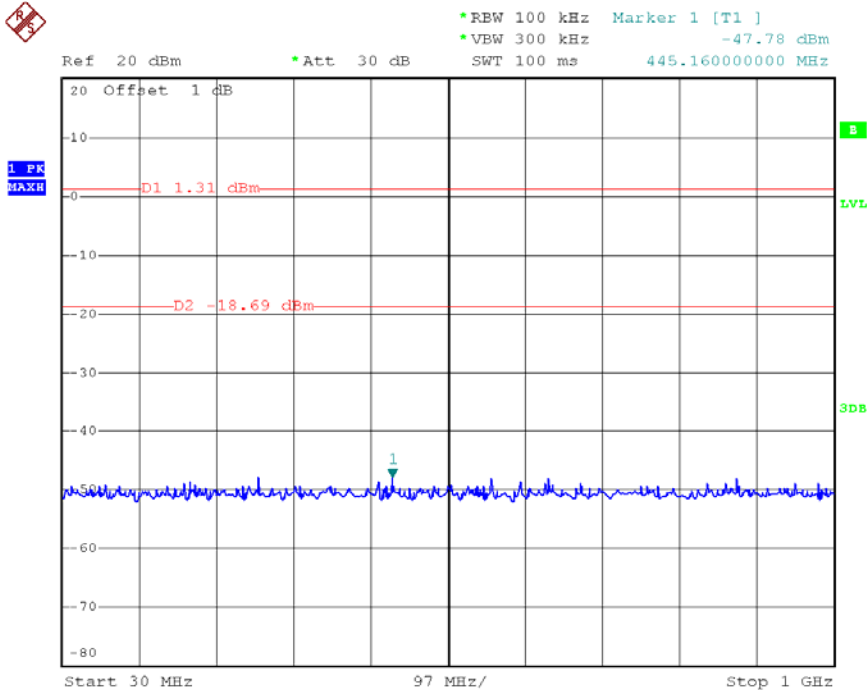

Date: 8.JUL.2014 18:04:16


**TX HT20 mode CH165 (1000MHz to 10<sup>th</sup> Harmonic)**

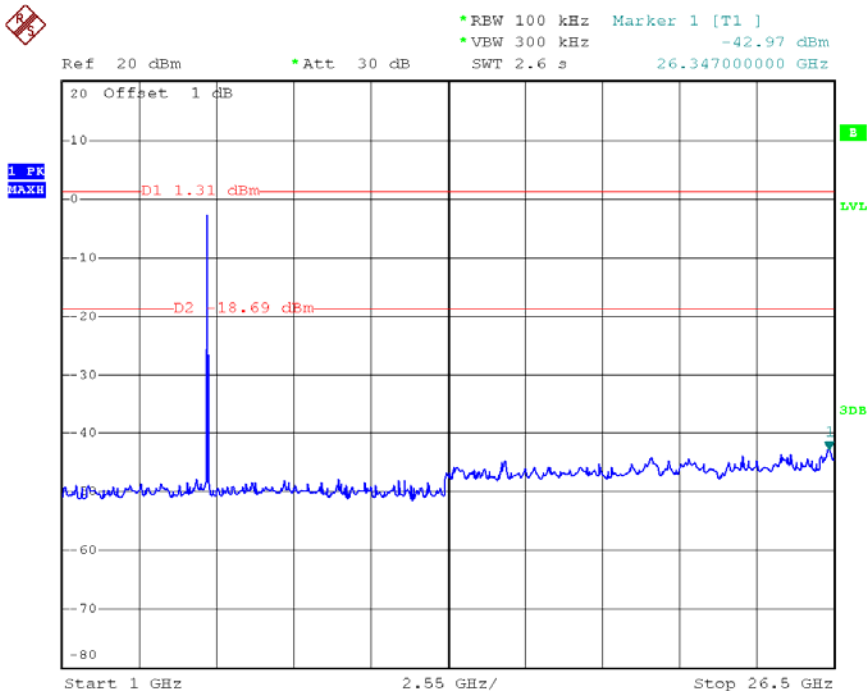

Date: 8.JUL.2014 18:04:35


Test Mode : TX N-20M Mode\_ANT 2

### TX HT20 mode CH149

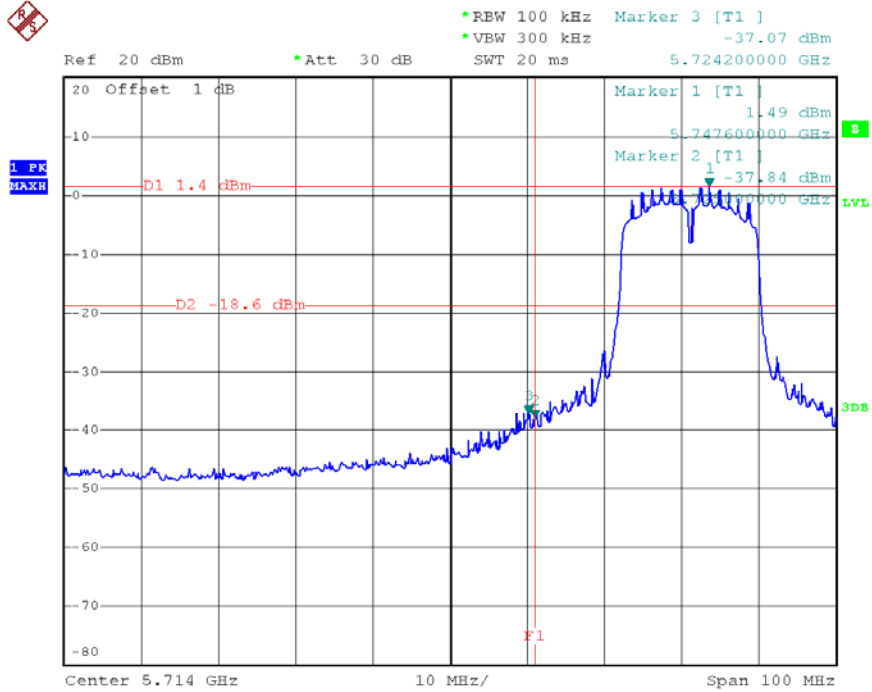


Date: 8.JUL.2014 17:52:04

### TX HT20 mode CH165

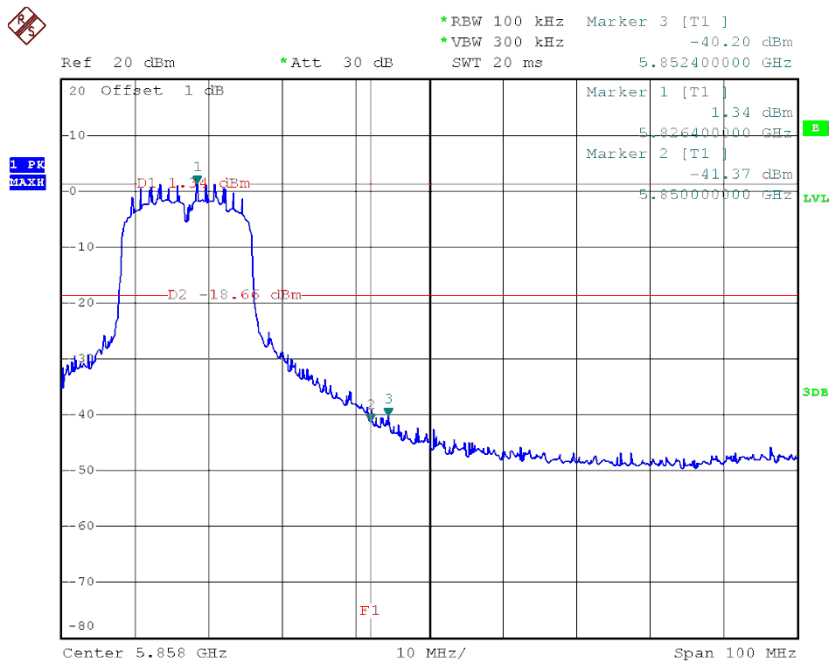


Date: 8.JUL.2014 18:02:04

### TX HT20 mode CH149 (30MHz to 1000MHz)

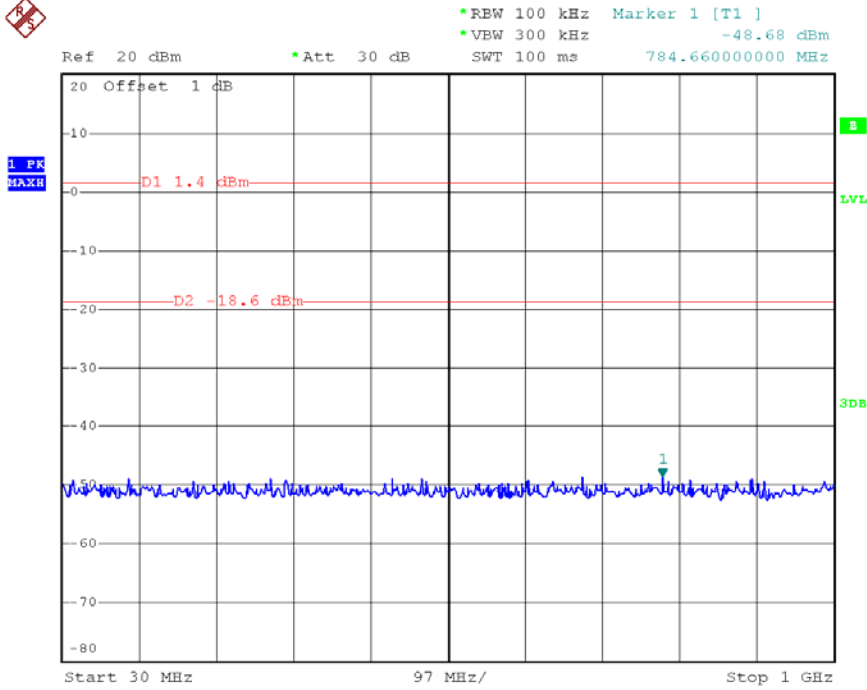


Date: 8.JUL.2014 17:58:15

### TX HT20 mode CH149 (1000MHz to 10<sup>th</sup> Harmonic)

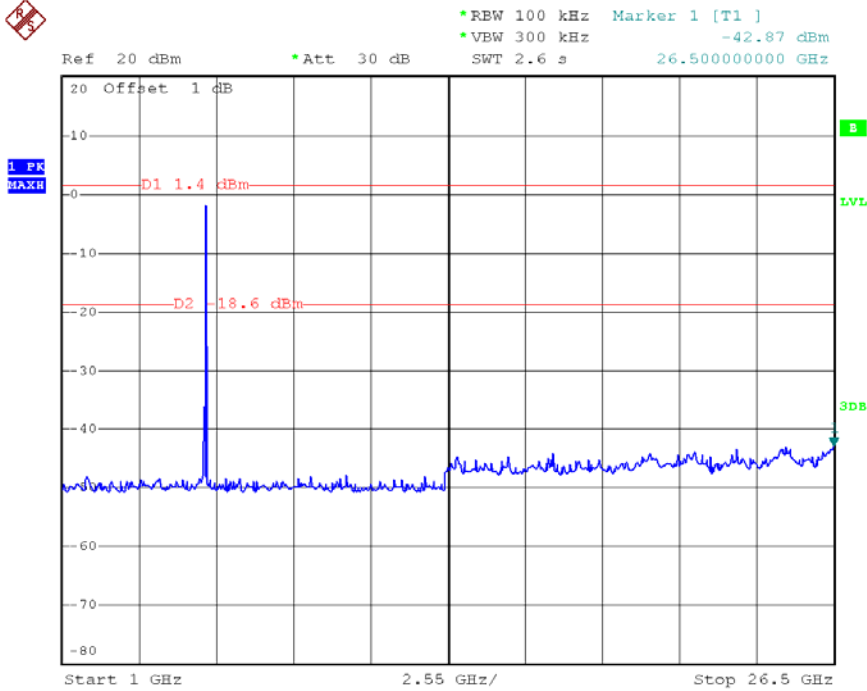


Date: 8.JUL.2014 17:58:05

**TX HT20 mode CH157 (30MHz to 1000MHz)**

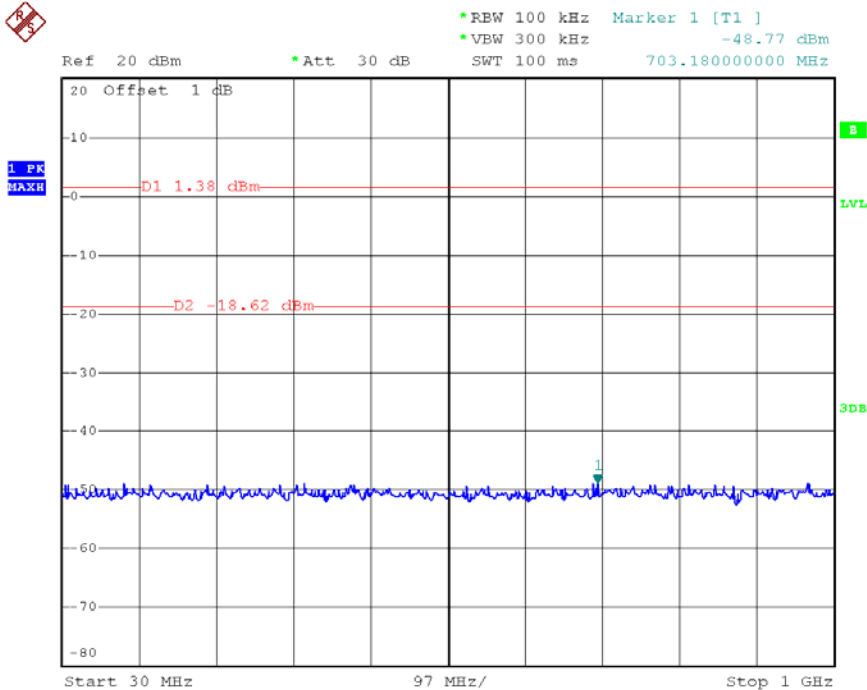


Date: 8.JUL.2014 18:08:24

**TX HT20 mode CH157 (1000MHz to 10<sup>th</sup> Harmonic)**

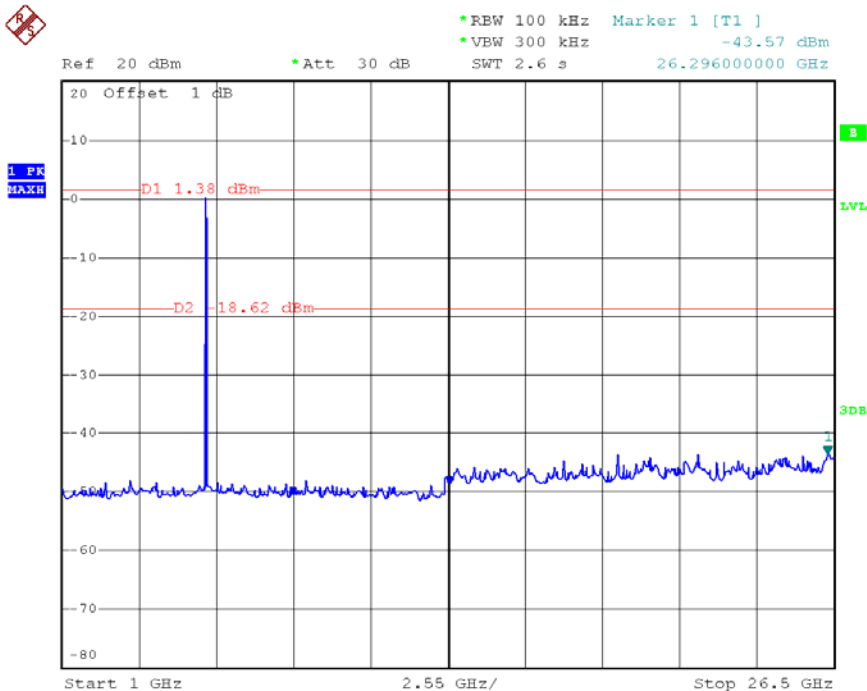


Date: 8.JUL.2014 18:08:49

**TX HT20 mode CH165 (30MHz to 1000MHz)**

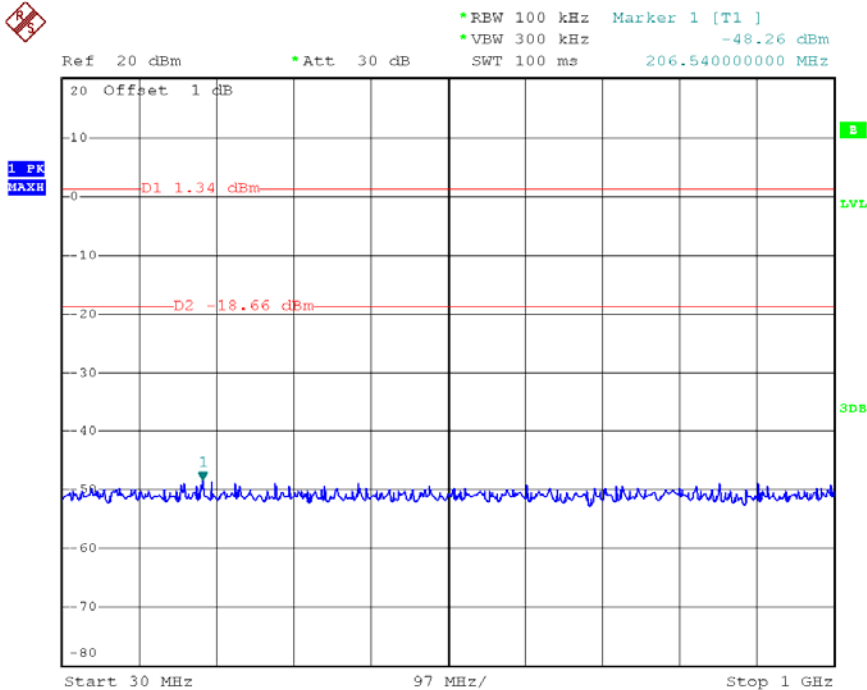

Date: 8.JUL.2014 18:06:12


**TX HT20 mode CH165 (1000MHz to 10<sup>th</sup> Harmonic)**

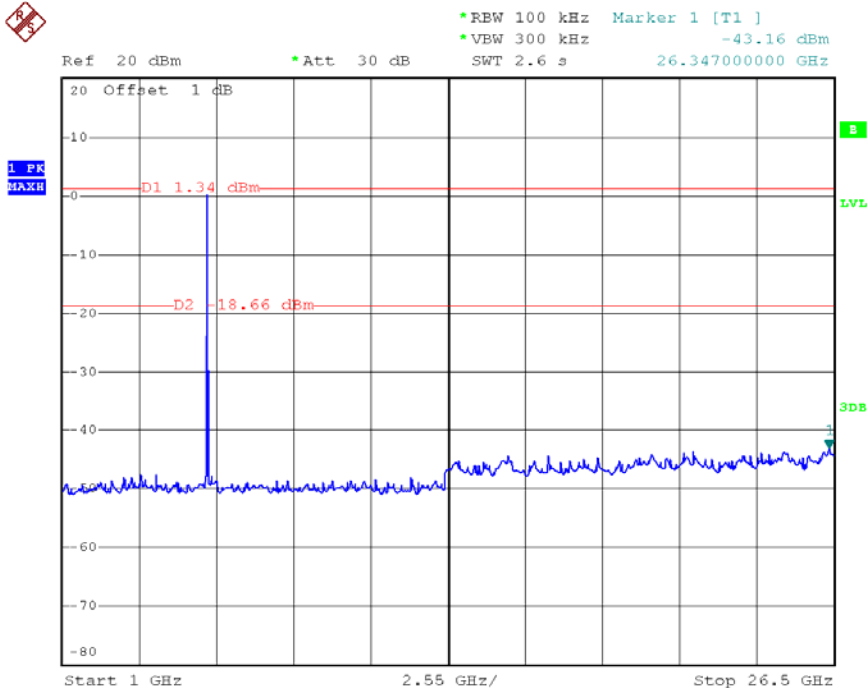

Date: 8.JUL.2014 18:06:00


Test Mode : TX N-40M Mode\_ANT 1

### TX HT40 mode CH151

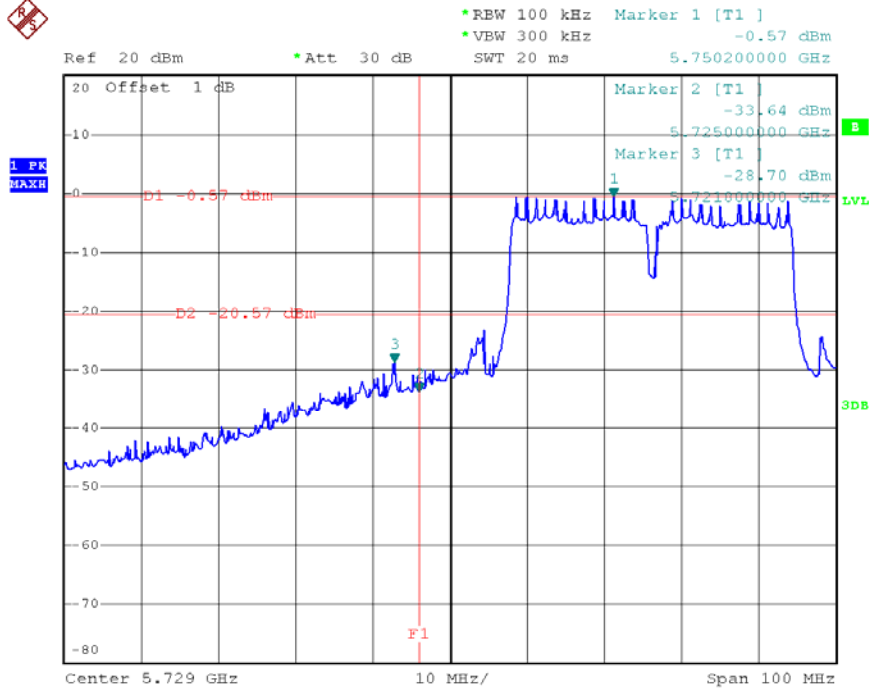

Date: 8.JUL.2014 18:54:36


### TX HT40 mode CH159

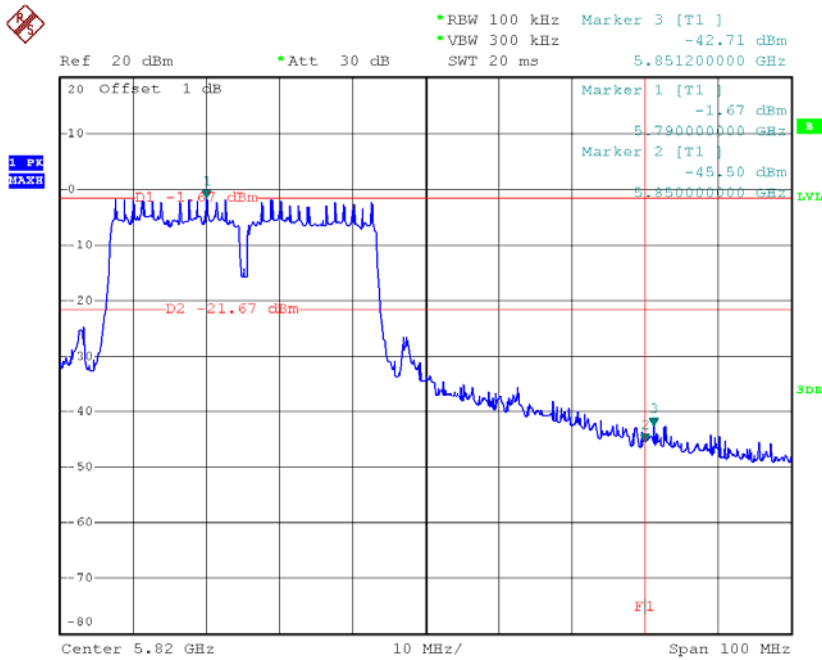

Date: 8.JUL.2014 19:01:29




**TX HT40 mode CH151 (30MHz to 1000MHz)**

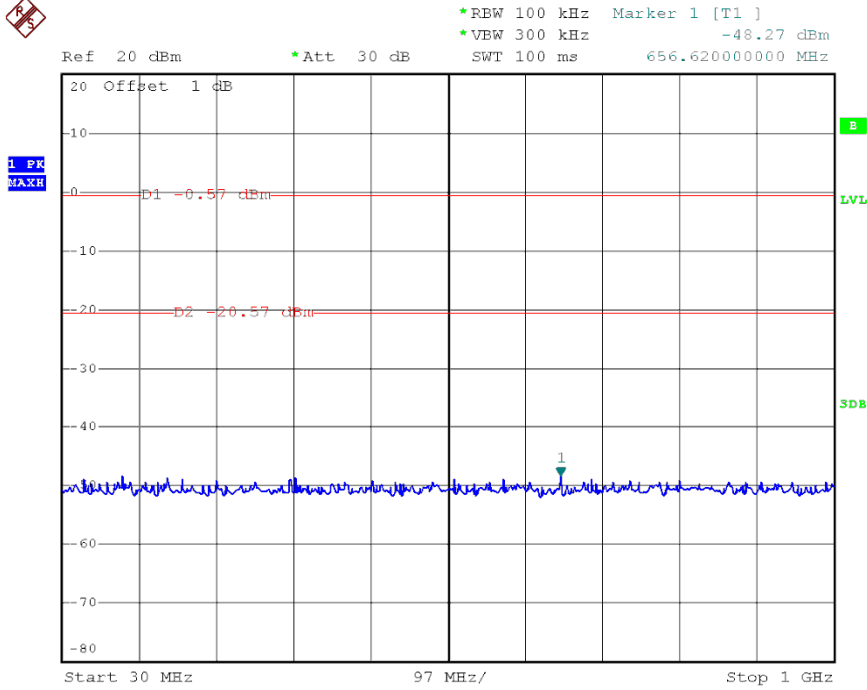


Date: 8.JUL.2014 18:55:33

**TX HT40 mode CH151 (1000MHz to 10<sup>th</sup> Harmonic)**

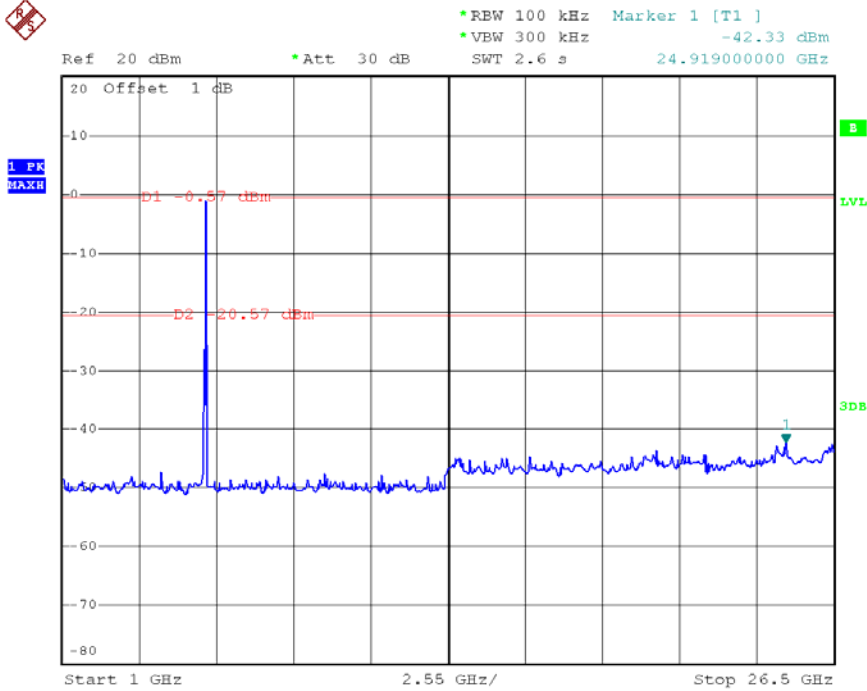


Date: 8.JUL.2014 18:55:55

**TX HT40 mode CH159 (30MHz to 1000MHz)**

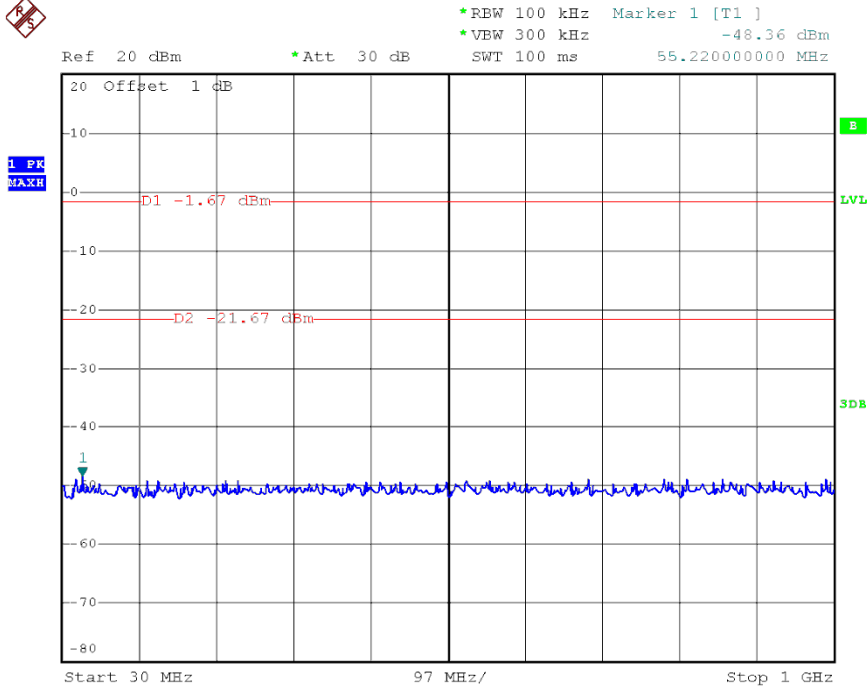

Date: 8.JUL.2014 19:02:17


**TX HT40 mode CH159 (1000MHz to 10<sup>th</sup> Harmonic)**

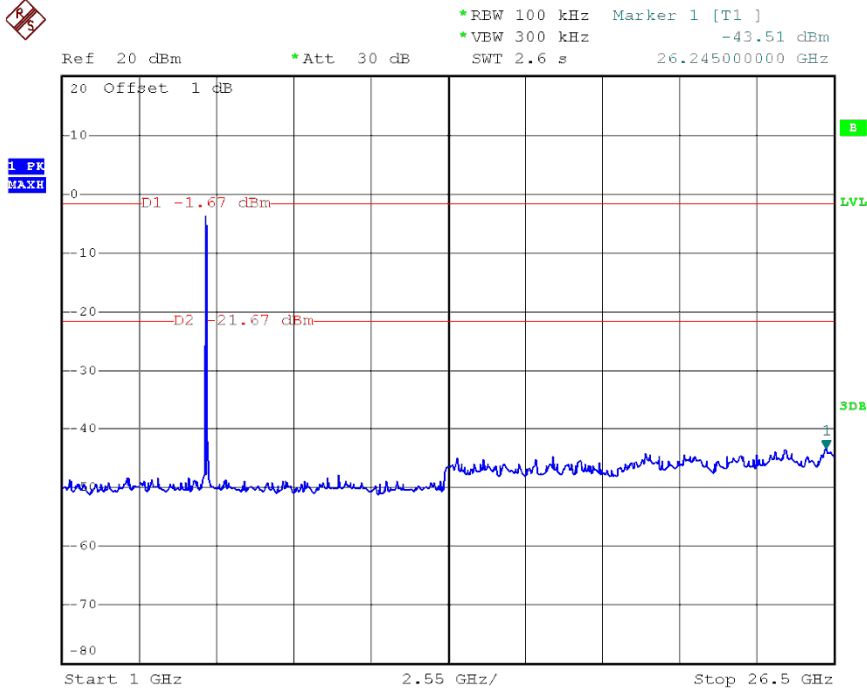

Date: 8.JUL.2014 19:02:38


Test Mode : TX N-40M Mode\_ANT 2

### TX HT40 mode CH151

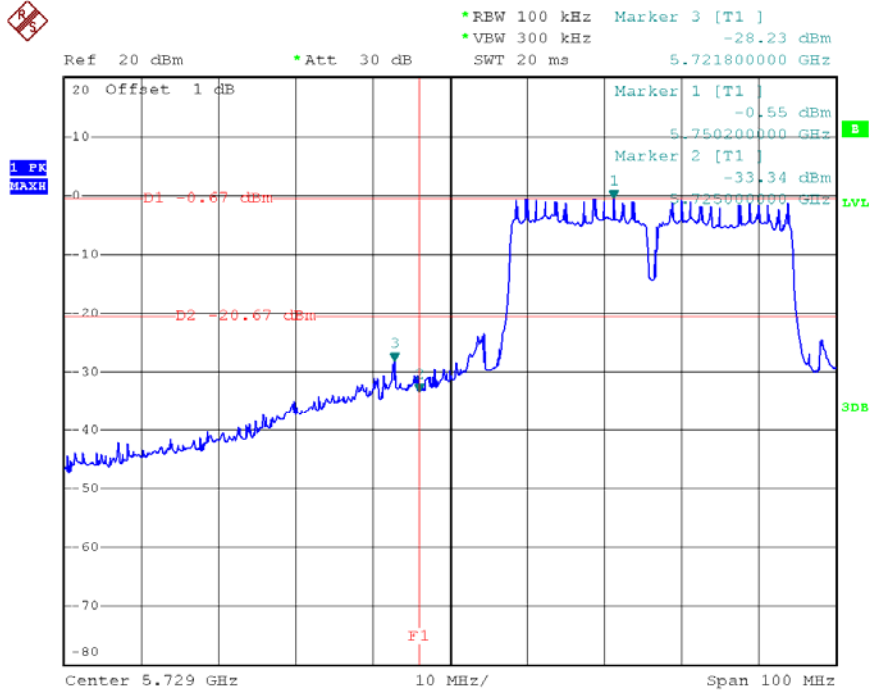


Date: 8.JUL.2014 18:53:53

### TX HT40 mode CH159

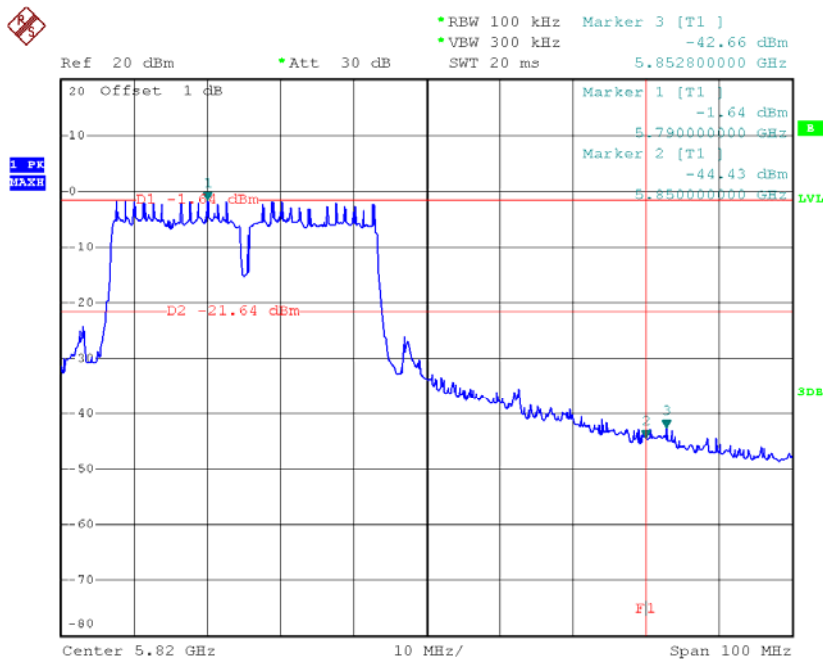


Date: 8.JUL.2014 19:00:25

### TX HT40 mode CH151 (30MHz to 1000MHz)

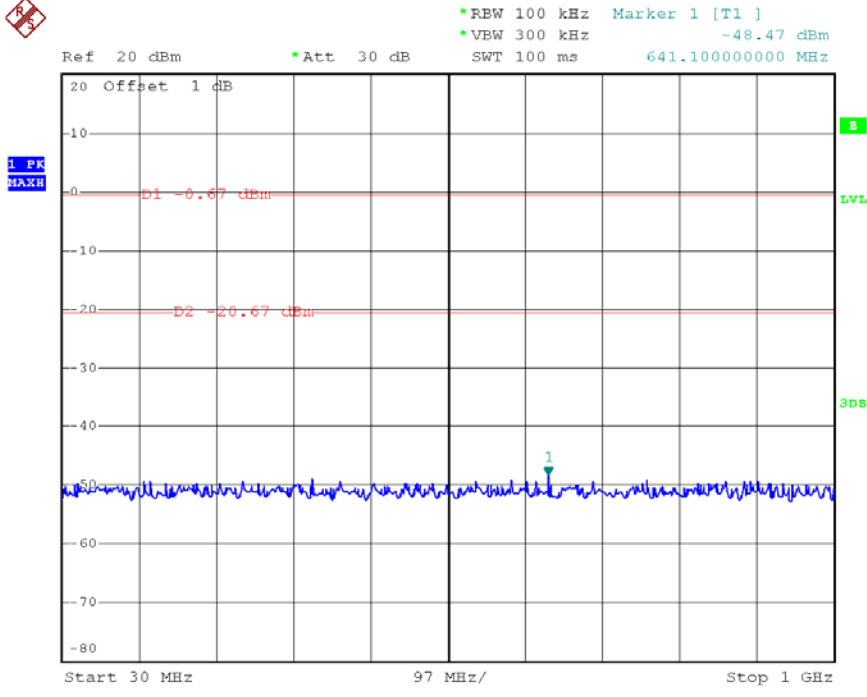


Date: 8.JUL.2014 18:56:54

### TX HT40 mode CH151 (1000MHz to 10<sup>th</sup> Harmonic)

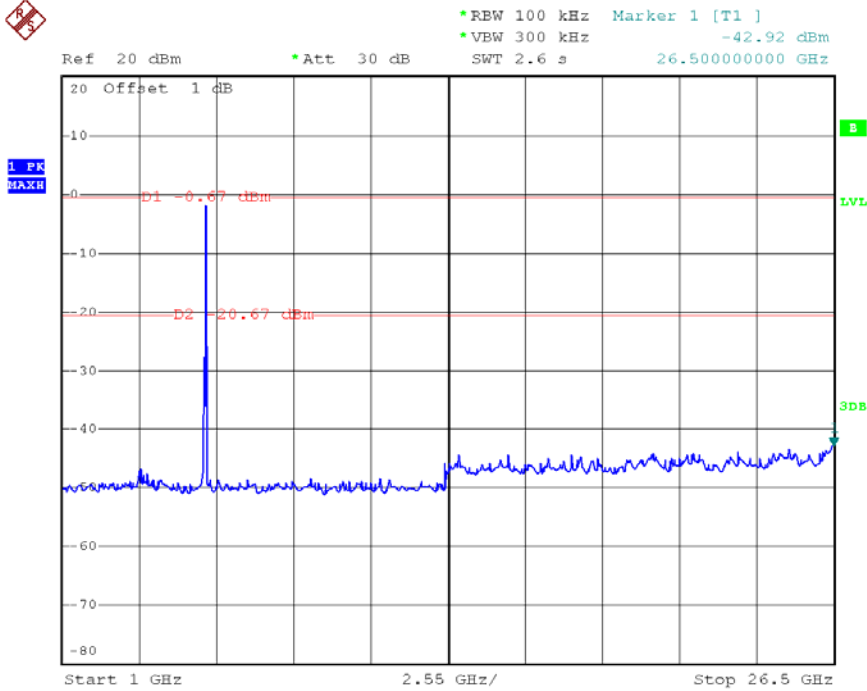


Date: 8.JUL.2014 18:56:44

### TX HT40 mode CH159 (30MHz to 1000MHz)

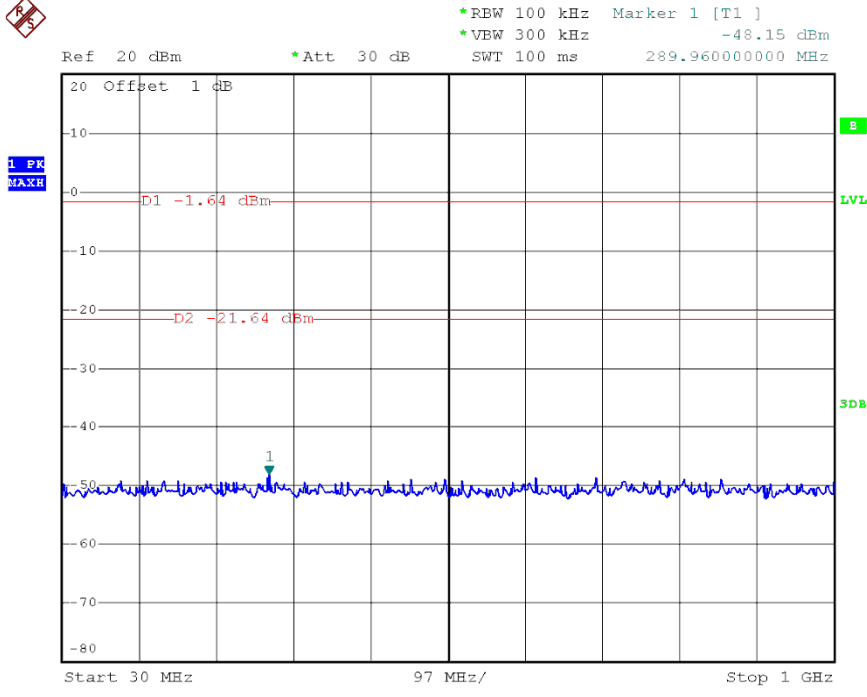

Date: 8.JUL.2014 19:03:52

### TX HT40 mode CH159 (1000MHz to 10<sup>th</sup> Harmonic)

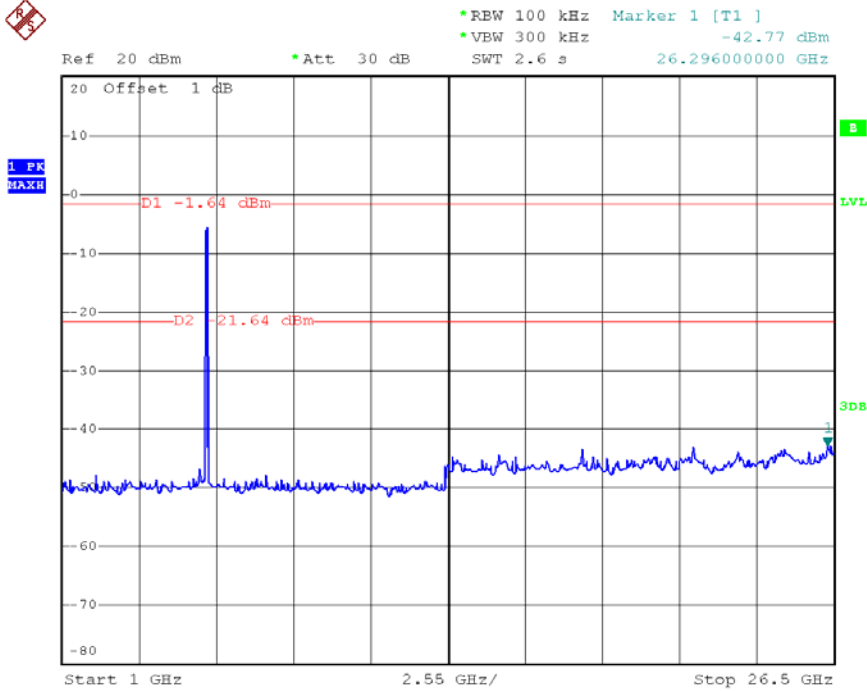


Date: 8.JUL.2014 19:03:40

## ATTACHMENT H – POWER SPECTRAL DENSITY

**Test Mode :TX A Mode\_CH149/157/165**


Test Channel	Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)
CH149	5745 MHz	-11.85	8
CH157	5785 MHz	-12.60	8
CH165	5825 MHz	-13.37	8

**TX CH149**

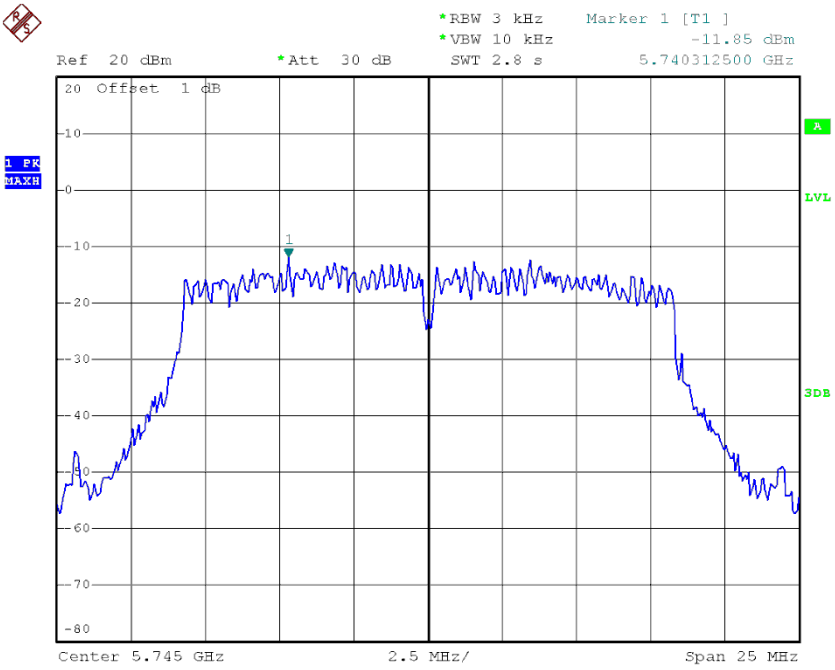


Date: 8.JUL.2014 17:29:22

**TX CH157**

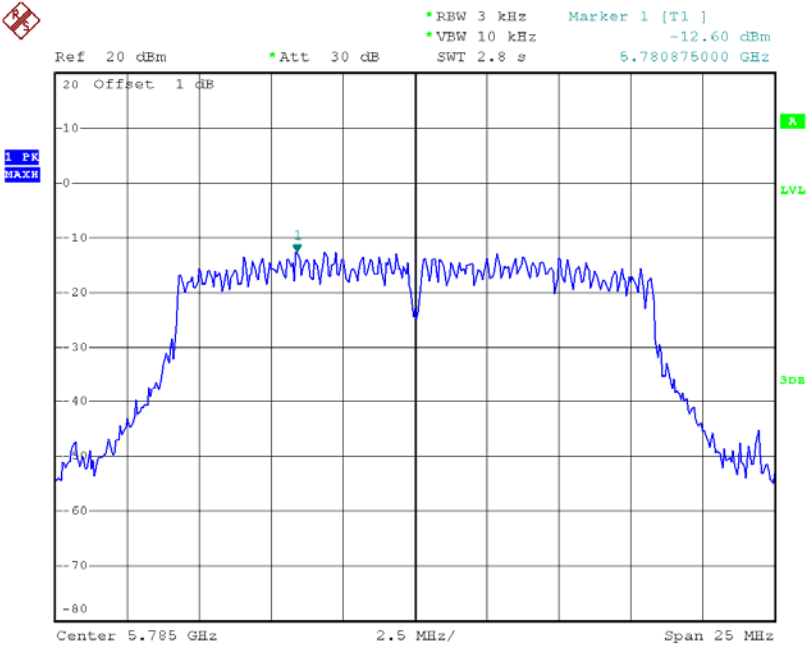

Date: 8.JUL.2014 17:28:30

**TX CH165**

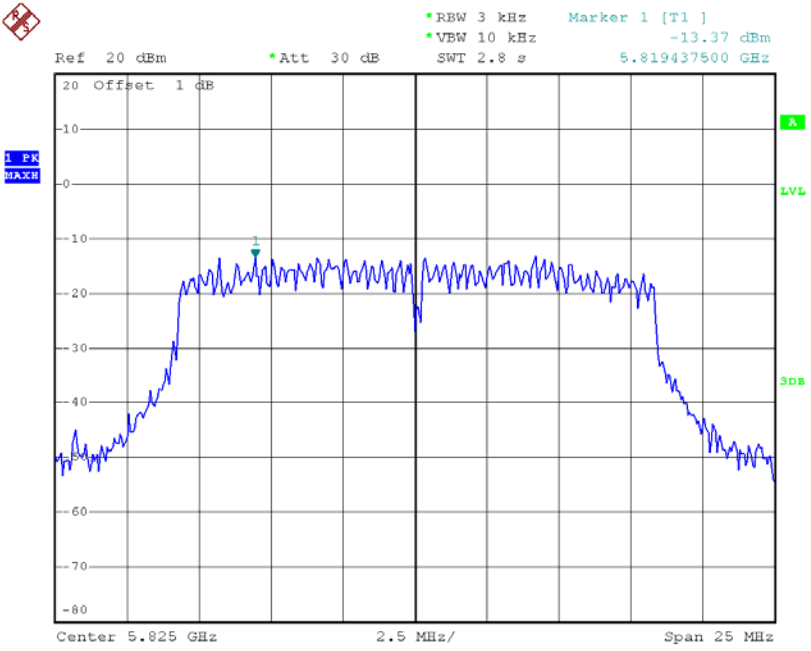


Date: 8.JUL.2014 17:23:59



**Test Mode : TX N-20M Mode\_CH149/157/165\_ANT 1**


Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH149	5745	-12.6	8
CH157	5785	-13.19	8
CH165	5825	-13.69	8

**TX CH149**

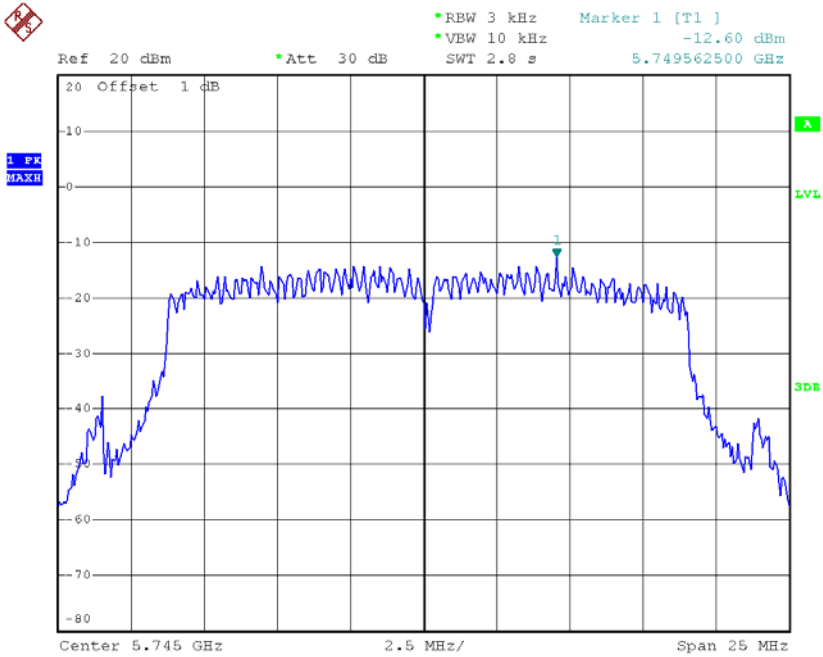


Date: 8.JUL.2014 17:13:33

**TX CH157**

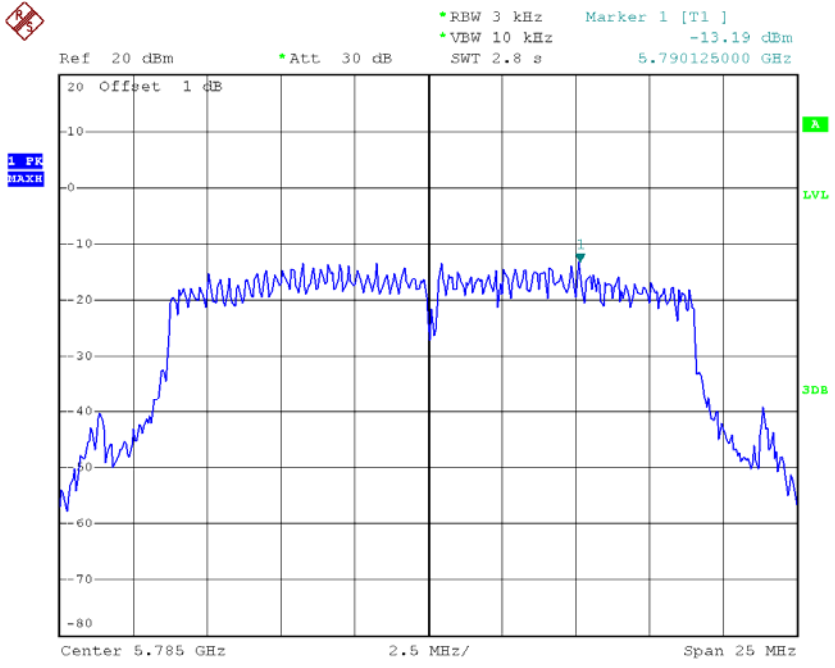

Date: 8.JUL.2014 17:14:51

**TX CH165**

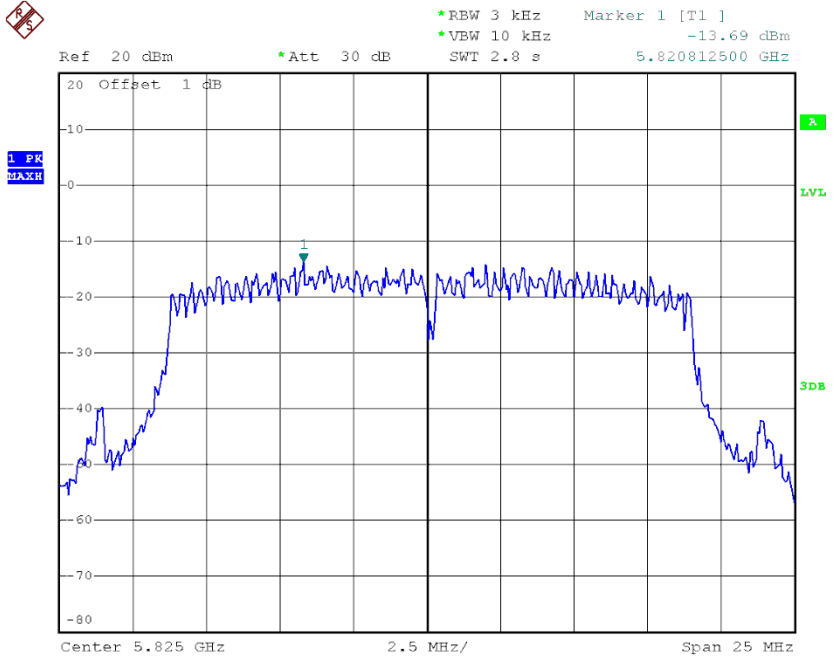

Date: 8.JUL.2014 17:21:35


**Test Mode : TX N-20M Mode\_CH149/157/165\_ANT 2**

Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH149	5745	-13.31	8
CH157	5785	-13.54	8
CH165	5825	-13.99	8

**Test Mode : TX N-20M Mode\_CH149/157/165\_Total**


Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH149	5745	-9.93	8
CH157	5785	-10.35	8
CH165	5825	-10.83	8

**TX CH149**

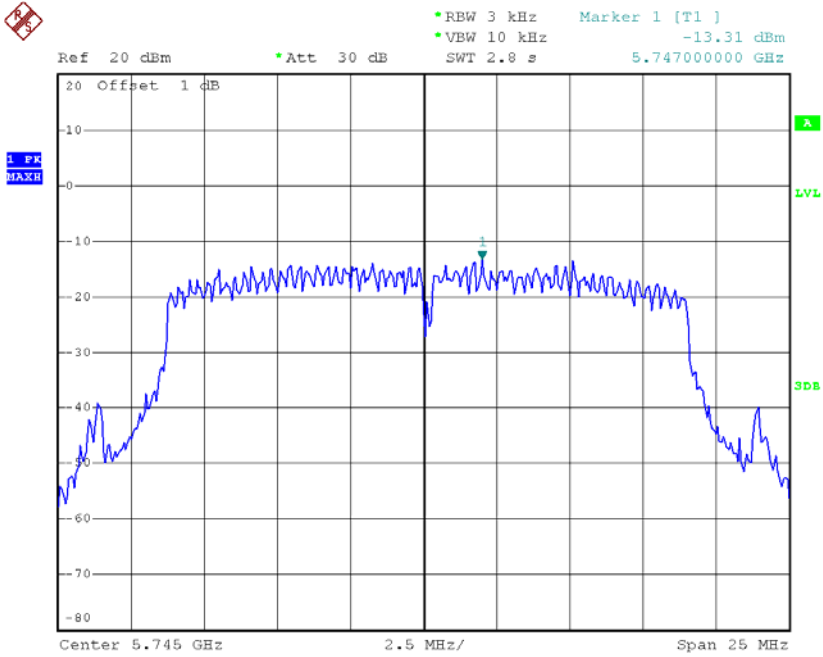


Date: 8.JUL.2014 17:13:22

### TX CH157

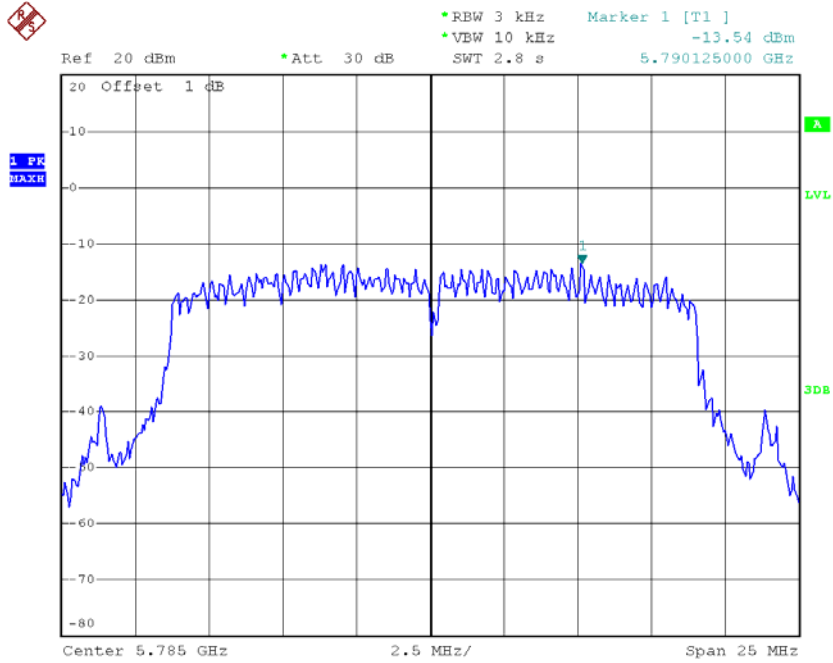

Date: 8.JUL.2014 17:14:32

### TX CH165

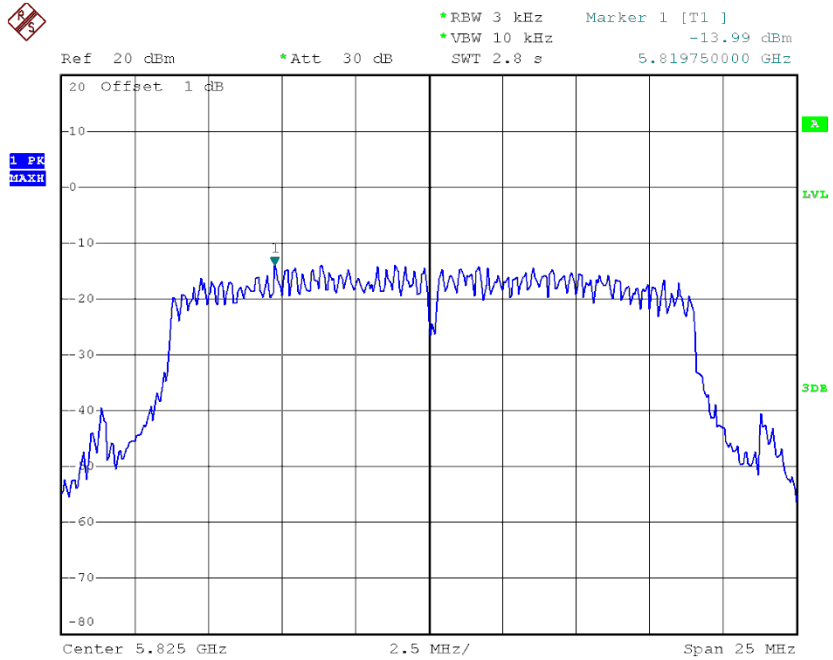


Date: 8.JUL.2014 17:21:24

**Test Mode : TX N-40M Mode\_CH151/159\_ANT 1**


Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH151	5755	-15.93	8
CH159	5795	-15.48	8

**TX CH151**

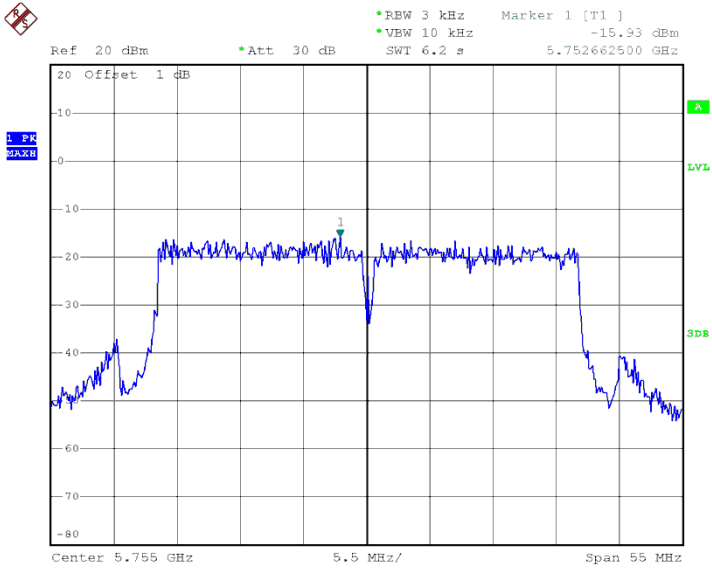

Date: 8.JUL.2014 17:03:20

**TX CH159**

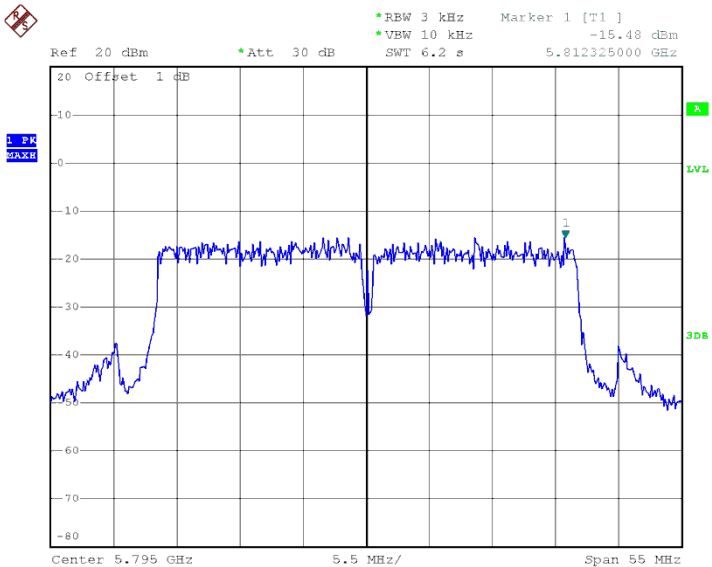

Date: 8.JUL.2014 17:04:23


**Test Mode : TX N-40M Mode\_CH151/159\_ANT 2**

Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH151	5755	-15.25	8
CH159	5795	-15.58	8

**Test Mode : TX N-40M Mode\_CH151/159\_Total**


Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH151	5755	-12.57	8
CH159	5795	-12.52	8

**TX CH151**

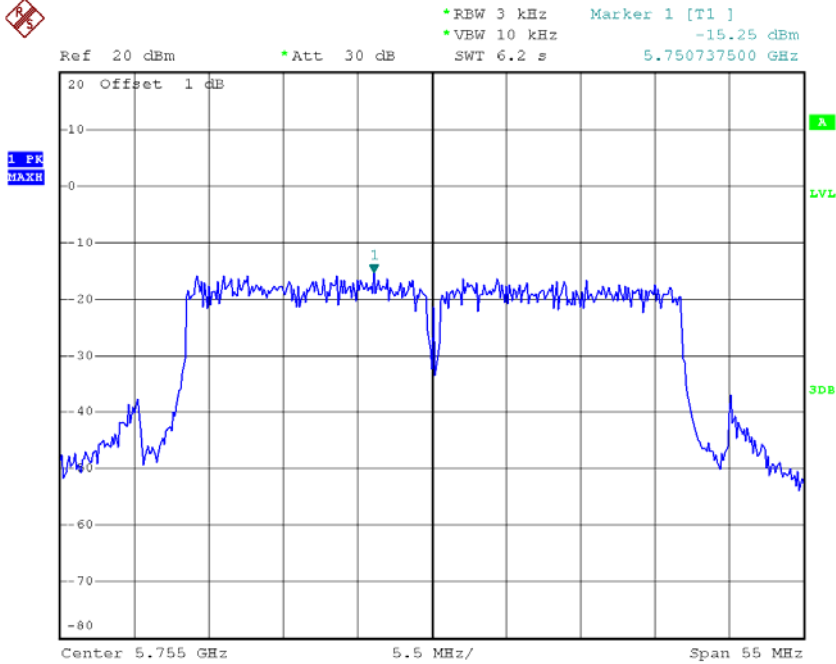

Date: 8.JUL.2014 17:03:03

**TX CH159**

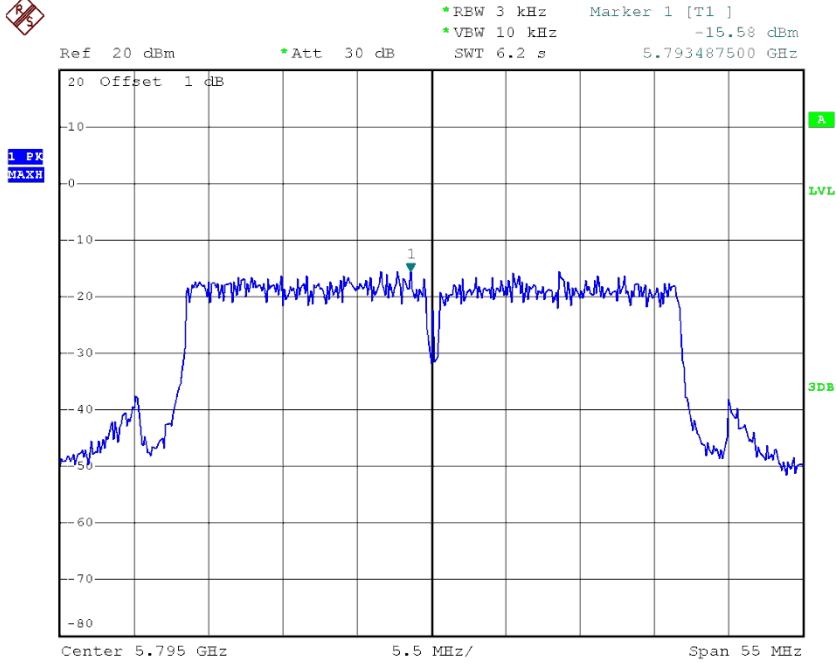

Date: 8.JUL.2014 17:04:16