

# RADIO TEST REPORT

## FCC 47 CFR PART 15 SUBPART C

### INDUSTRY CANADA RSS-247

<b>Test Standard</b>	<b>FCC Part 15.247 and IC RSS-247 issue 2</b>
<b>FCC ID</b>	<b>SIB-ICG100NAR-2</b>
<b>ISED ID</b>	<b>6719D-ICG100NAR</b>
<b>Product name</b>	<b>ICG</b>
<b>Brand Name</b>	<b>Intwine connect</b>
<b>Model</b>	<b>ICG-100-NA-R, ICG-100-NA-C</b>
<b>Test Result</b>	<b>Pass</b>

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of CCS. Inc.

The sample selected for test was production product and was provided by manufacturer.



Approved by:

Handwritten signature of Sam Chuang in black ink.

Sam Chuang  
Manager

Reviewed by:

Handwritten signature of Ed Chiang in black ink.

Ed Chiang  
Engineer

## Revision History

Rev.	Issue Date	Revisions	Revised By
00	March 30, 2017	Initial Issue	Doris Chu
01	June 7, 2017	1. Modify section 4.3.4	Angel Cheng

---

## Table of contents

<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
<b>1.1 EUT INFORMATION .....</b>	<b>4</b>
<b>1.2 EUT CHANNEL INFORMATION.....</b>	<b>5</b>
<b>1.3 ANTENNA INFORMATION.....</b>	<b>5</b>
<b>1.4 MEASUREMENT UNCERTAINTY.....</b>	<b>6</b>
<b>1.5 FACILITIES AND TEST LOCATION .....</b>	<b>7</b>
<b>1.6 INSTRUMENT CALIBRATION .....</b>	<b>7</b>
<b>1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT.....</b>	<b>8</b>
<b>2. TEST SUMMERY .....</b>	<b>9</b>
<b>3. DESCRIPTION OF TEST MODES.....</b>	<b>10</b>
<b>3.1 THE WORST MODE OF OPERATING CONDITION .....</b>	<b>10</b>
<b>3.2 THE WORST MODE OF MEASUREMENT .....</b>	<b>11</b>
<b>3.3 EUT DUTY CYCLE .....</b>	<b>12</b>
<b>4. TEST RESULT .....</b>	<b>13</b>
<b>4.1 AC POWER LINE CONDUCTED EMISSION .....</b>	<b>13</b>
<b>4.2 20DB BANDWIDTH AND OCCUPIED BANDWIDTH(99%).....</b>	<b>16</b>
<b>4.3 OUTPUT POWER MEASUREMENT .....</b>	<b>19</b>
<b>4.4 FREQUENCY SEPARATION.....</b>	<b>21</b>
<b>4.5 NUMBER OF HOPPING .....</b>	<b>24</b>
<b>4.6 CONDUCTED BANDEGE AND SPURIOUS EMISSION .....</b>	<b>26</b>
<b>4.7 TIME OF OCCUPANCY (DWELL TIME) .....</b>	<b>31</b>
<b>4.8 RADIATION BANDEGE AND SPURIOUS EMISSION .....</b>	<b>33</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	

## 1. GENERAL INFORMATION

### 1.1 EUT INFORMATION

Applicant	Foxconn International Inc NO 2 ZIYOU ST TUCHENG DISTRICT NEW TAIPEI 236
Manufacturer	Foxconn International Inc NO 2 ZIYOU ST TUCHENG DISTRICT NEW TAIPEI 236
Equipment	ICG
Model No.	ICG-100-NA-R, ICG-100-NA-C
Model Discrepancy	ICG-100-NA-R: Plastic ICG-100-NA-C: Metal
Trade Name	Intwine connect
Received Date	January 13, 2017
Date of Test	March 22 ~ 27, 2017
Output Power(W)	GFSK : 0.0079 8DPSK : 0.0015
Power Operation	VDC from Power Adapter For ICG-100-NA-R 1. DVE / DSA-18PFM-12FUS I/P: 100-240Vac, 0.6A, 50-60Hz O/P: 12Vdc, 1.5A 2. MEAN WELL / GST18U12 I/P: 100-240Vac, 0.5A, 50-60Hz O/P: 12Vdc, 1.5A For ICG-100-NA-C 1. DVE / DSA-18PFM-12FUS I/P: 100-240Vac, 0.6A, 50-60Hz O/P: 12Vdc, 1.5A

## 1.2 EUT CHANNEL INFORMATION

Frequency Range	2402MHz-2480MHz
Modulation Type	1. GFSK for BR-1Mbps 2. $\pi/4$ -DQPSK for EDR-2Mbps 3. 8DPSK for EDR-3Mbps
Number of channel	79 Channels

**Remark:**

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4 and RSS-GEN Table A1 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
<input type="checkbox"/> 1 MHz or less	1	Middle
<input type="checkbox"/> 1 MHz to 10 MHz	2	1 near top and 1 near bottom
<input checked="" type="checkbox"/> More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

## 1.3 ANTENNA INFORMATION

<b>Antenna Type</b>	<input type="checkbox"/> PIFA <input type="checkbox"/> PCB <input checked="" type="checkbox"/> Dipole <input type="checkbox"/> Coils
<b>Antenna Gain</b>	1) FIT: 5 dBi 2) Luxshare: 5 dBi

## 1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 1.4003
RF output power, conducted	+/- 1.1372
Power density, conducted	+/- 1.4003
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683
3M Semi Anechoic Chamber / 40G~60G	+/- 1.8509
3M Semi Anechoic Chamber / 60G~75G	+/- 1.9869
3M Semi Anechoic Chamber / 75G~110G	+/- 2.9651
3M Semi Anechoic Chamber / 110G~170G	+/- 2.7807
3M Semi Anechoic Chamber / 170G~220G	+/- 3.6437
3M Semi Anechoic Chamber / 220G~325G	+/- 4.2982

**Remark:**

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

## 1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at  
No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Eric Lee	
Radiation	Ed Chiang	
RF Conducted	Eric Lee	

**Remark:** The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

## 1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Power Meter	Anritsu	ML2495A	1012009	07/04/2016	07/03/2017
Power Sensor	Anritsu	MA2411B	917072	07/04/2016	07/03/2017
Spectrum Analyzer	R&S	FSV 40	101073	10/05/2016	10/04/2017

Wugu 966 Chamber A					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Bilog Antenna	Sunol Sciences	JB3	A030105	07/03/2016	07/02/2017
Horn Antenna	EMCO	3117	00055165	02/20/2017	02/19/2018
Pre-Amplifier	EMCI	EMC 012635	980151	06/23/2016	06/22/2017
Pre-Amplifier	EMEC	EM330	060609	06/08/2016	06/07/2017
Spectrum Analyzer	Agilent	E4446A	US42510252	12/05/2016	12/04/2017
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	EZ-EMC (CCS-3A1RE)				

Conducted Emission Room # B					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
LISN	R&S	ENV216	101054	05/11/2016	05/10/2017
LISN	SCHWARZBECK	NSLK 8127	8127-541	11/22/2016	11/21/2017
Receiver	R&S	ESCI	101073	08/20/2016	08/19/2017

**Remark:** Each piece of equipment is scheduled for calibration once a year.

## 1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT



EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	Notebook	Acer	Aspire 4320 series	N/A	QDS-BRCM1018

## 1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, KDB 558074 D01 v03r05, RSS-247 Issue 2 and RSS-GEN Issue 4.

## 1.9 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2



## 2. TEST SUMMERY

FCC Standard Section	IC Standard Section	Report Section	Test Item	Result
15.203	-	1.2	Antenna Requirement	Pass
15.207(a)	RSS-GEN 8.8	4.1	AC Conducted Emission	Pass
15.247(a)(1)	RSS-247(5.1)(a)	4.2	20 dB Bandwidth	-
-	RSS-GEN 6.6	4.2	Occupied Bandwidth (99%)	-
15.247(b)(1)	RSS-247(5.4)(b)	4.3	Output Power Measurement	Pass
15.247(a)(1)	RSS-247(5.1)(b)	4.4	Frequency Separation	Pass
15.247(a)(1)(iii)	RSS-247(5.1)(d)	4.5	Number of Hopping	Pass
15.247(d)	RSS-247(5.5)	4.6	Conducted Band Edge	Pass
15.247(d)	RSS-247(5.5)	4.6	Conducted Emission	Pass
15.247(a)(1)(iii)	RSS-247(5.1)(d)	4.7	Time of Occupancy	Pass
15.247(d)	RSS-GEN 8.9, 8.10	4.8	Radiation Band Edge	Pass
15.247(d)	RSS-GEN 8.9, 8.10	4.8	Radiation Spurious Emission	Pass

### 3. DESCRIPTION OF TEST MODES

#### 3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	GFSK for BR-1Mbps (DH5) $\pi/4$ -DQPSK for EDR-2Mbps (DH5) 8DPSK for EDR-3Mbps (DH5)
Test Channel Frequencies	<p><b>GFSK for BR-1Mbps:</b>                      1.Lowest Channel : 2402MHz                      2.Middle Channel : 2441MHz                      3.Highest Channel : 2480MHz</p> <p><b><math>\pi/4</math>-DQPSK for EDR-2Mbps:</b>                      1.Lowest Channel : 2402MHz                      2.Middle Channel : 2441MHz                      3.Highest Channel : 2480MHz</p> <p><b>8DPSK for EDR-3Mbps:</b>                      1.Lowest Channel : 2402MHz                      2.Middle Channel : 2441MHz                      3.Highest Channel : 2480MHz</p>

*Remark:*

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

### 3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Voltage/Hz	120V/60Hz
Test Mode	Mode 1:EUT power by AC adapter via power cable.
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Voltage/Hz	120V/60Hz
Test Mode	Mode 1:EUT power by AC adapter via power cable.
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4


Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Voltage/Hz	120V/60Hz
Test Mode	Mode 1:EUT power by AC adapter via power cable.
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input checked="" type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	<input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical

*Remark:*

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case(Z-Plane and Horizontal) were recorded in this report
3. For AC power line conducted emission and below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.
4. EUT pre-scanned in ICG-100-NA-Cand ICG-100-NA-R for below 1GHz radiated measurement. The worst case ICG-100-NA-R were recorded in this report.

### 3.3 EUT DUTY CYCLE

Duty Cycle				
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)	Duty Factor(dB)
BR-1Mbps	100.0000	100.0000	100.00%	0.00
EDR-3Mbps	0.2600	3.7500	6.93%	11.59

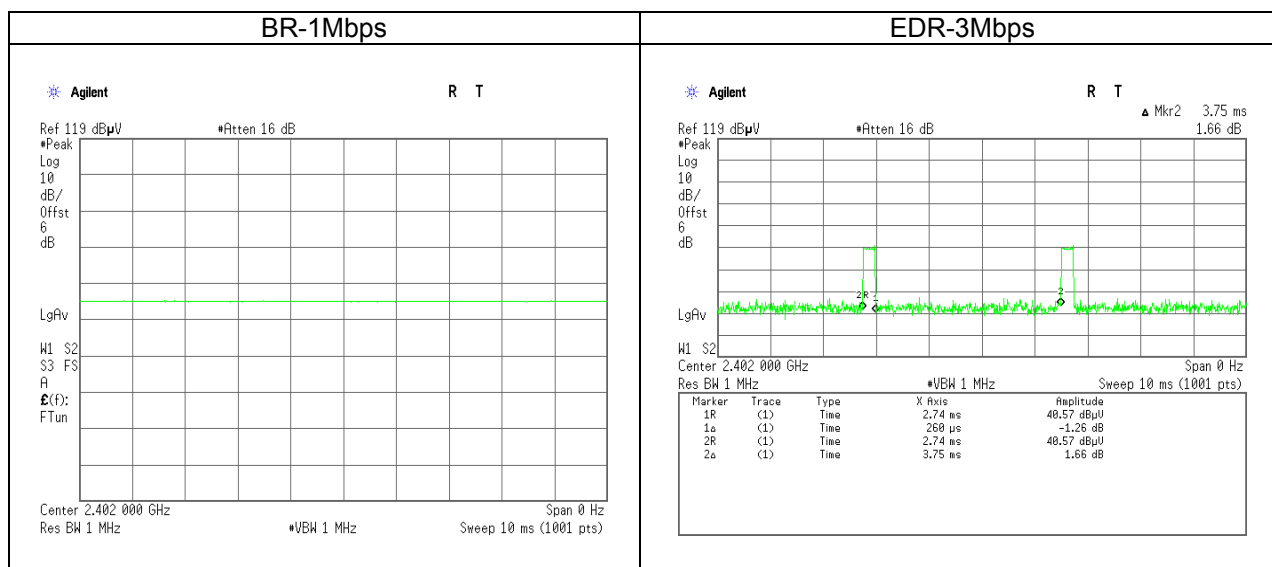

## 4. TEST RESULT

### 4.1 AC POWER LINE CONDUCTED EMISSION

#### 4.1.1 Test Limit

According to §15.207(a) and RSS-GEN section 8.8,

Frequency Range (MHz)	Limits(dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


\* Decreases with the logarithm of the frequency.

#### 4.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

#### 4.1.3 Test Setup

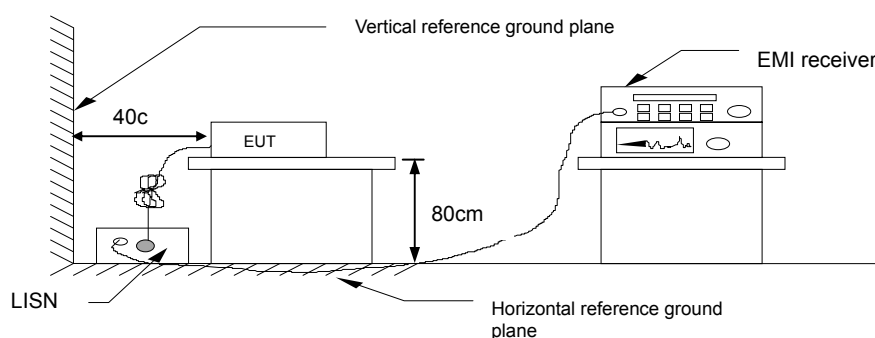


#### 4.1.4 Test Result

**PASS**


**Test Data**

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Test Voltage:	120Vac / 60Hz	Test Date	March 29, 2017
Phase:	Line	Test Engineer	Eric Lee

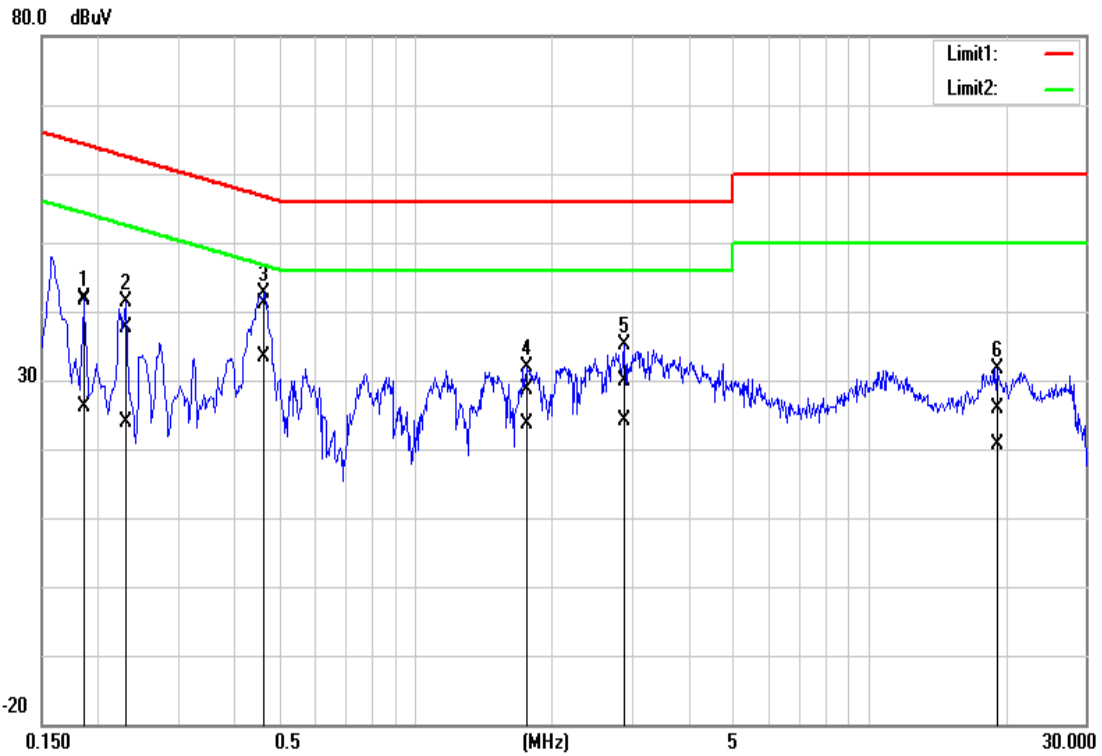

Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)
0.1860	32.04	16.42	9.69	41.73	26.11	64.21	54.21	-22.48	-28.10
0.2300	27.83	14.17	9.69	37.52	23.86	62.45	52.45	-24.93	-28.59
0.4660	31.48	23.76	9.68	41.16	33.44	56.58	46.58	-15.42	-13.14
1.7700	19.02	13.84	9.70	28.72	23.54	56.00	46.00	-27.28	-22.46
2.8940	20.07	14.53	9.70	29.77	24.23	56.00	46.00	-26.23	-21.77
19.1620	16.07	10.84	9.85	25.92	20.69	60.00	50.00	-34.08	-29.31

Test Mode:	Mode 1	Temp/Hum	27(°C)/ 53%RH
Test Voltage:	120Vac / 60Hz	Test Date	March 29, 2017
Phase:	Neutral	Test Engineer	Eric Lee

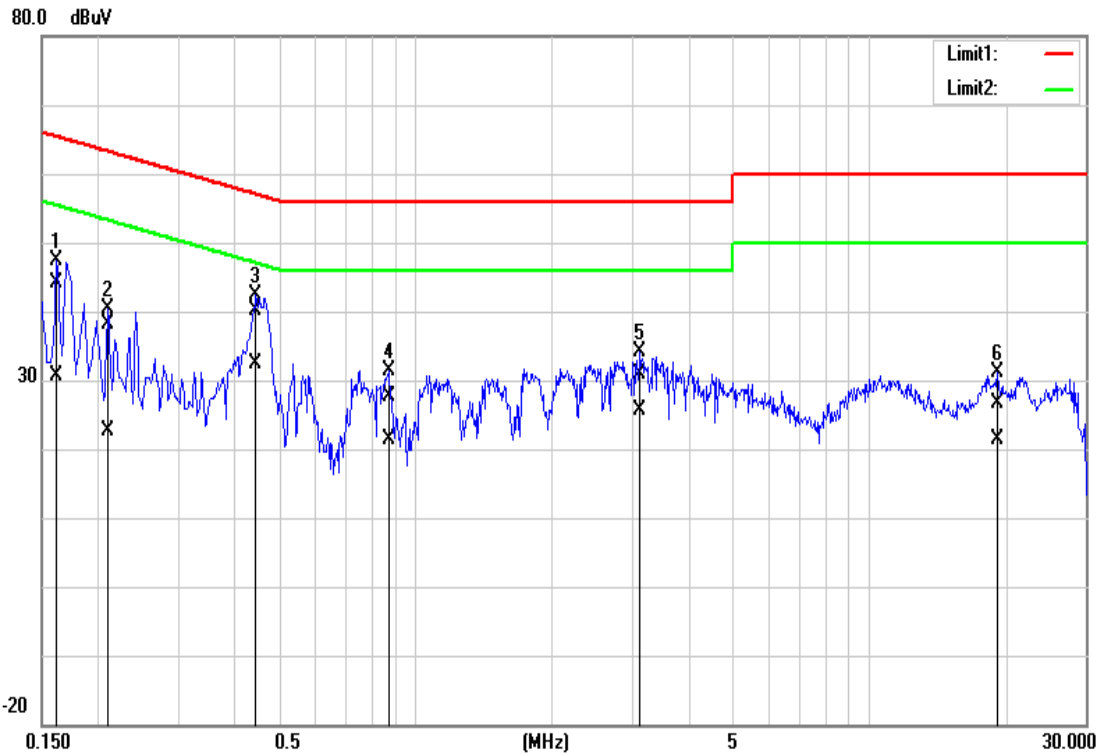

Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)
0.1620	34.48	20.82	9.71	44.19	30.53	65.36	55.36	-21.17	-24.83
0.2100	28.33	12.96	9.70	38.03	22.66	63.21	53.21	-25.18	-30.55
0.4460	30.39	22.74	9.69	40.08	32.43	56.95	46.95	-16.87	-14.52
0.8740	17.98	11.74	9.69	27.67	21.43	56.00	46.00	-28.33	-24.57
3.1300	21.11	16.01	9.71	30.82	25.72	56.00	46.00	-25.18	-20.28
19.1420	16.66	11.50	9.92	26.58	21.42	60.00	50.00	-33.42	-28.58

## 4.2 20DB BANDWIDTH AND OCCUPIED BANDWIDTH(99%)

### 4.2.1 Test Limit

According to §15.247(a) (1), RSS-247 section 5.1(a) and RSS-GEN 6.6,

**20 dB Bandwidth** : For reporting purposes only.


**Occupied Bandwidth(99%)** : For reporting purposes only.

### 4.2.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 11.8.1,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 30kHz, VBW = 100kHz and Detector = Peak, to measurement 20 dB Bandwidth and 99% Bandwidth.
4. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.

### 4.2.3 Test Setup

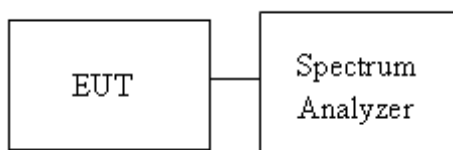

### 4.2.4 Test Result


Test mode: GFSK_BR-1Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	OBW(99%) (MHz)	20dB BW (MHz)
Low	2402	0.8769	0.9551
Mid	2441	0.8596	0.9521
High	2480	0.8856	0.9565


Test mode: 8DPSK_EDR-3Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	OBW(99%) (MHz)	20dB BW (MHz)
Low	2402	1.1201	1.1739
Mid	2441	1.1201	1.1739
High	2480	1.1201	1.1782



**Test Data**

**GFSK\_BR-1Mbps mode**

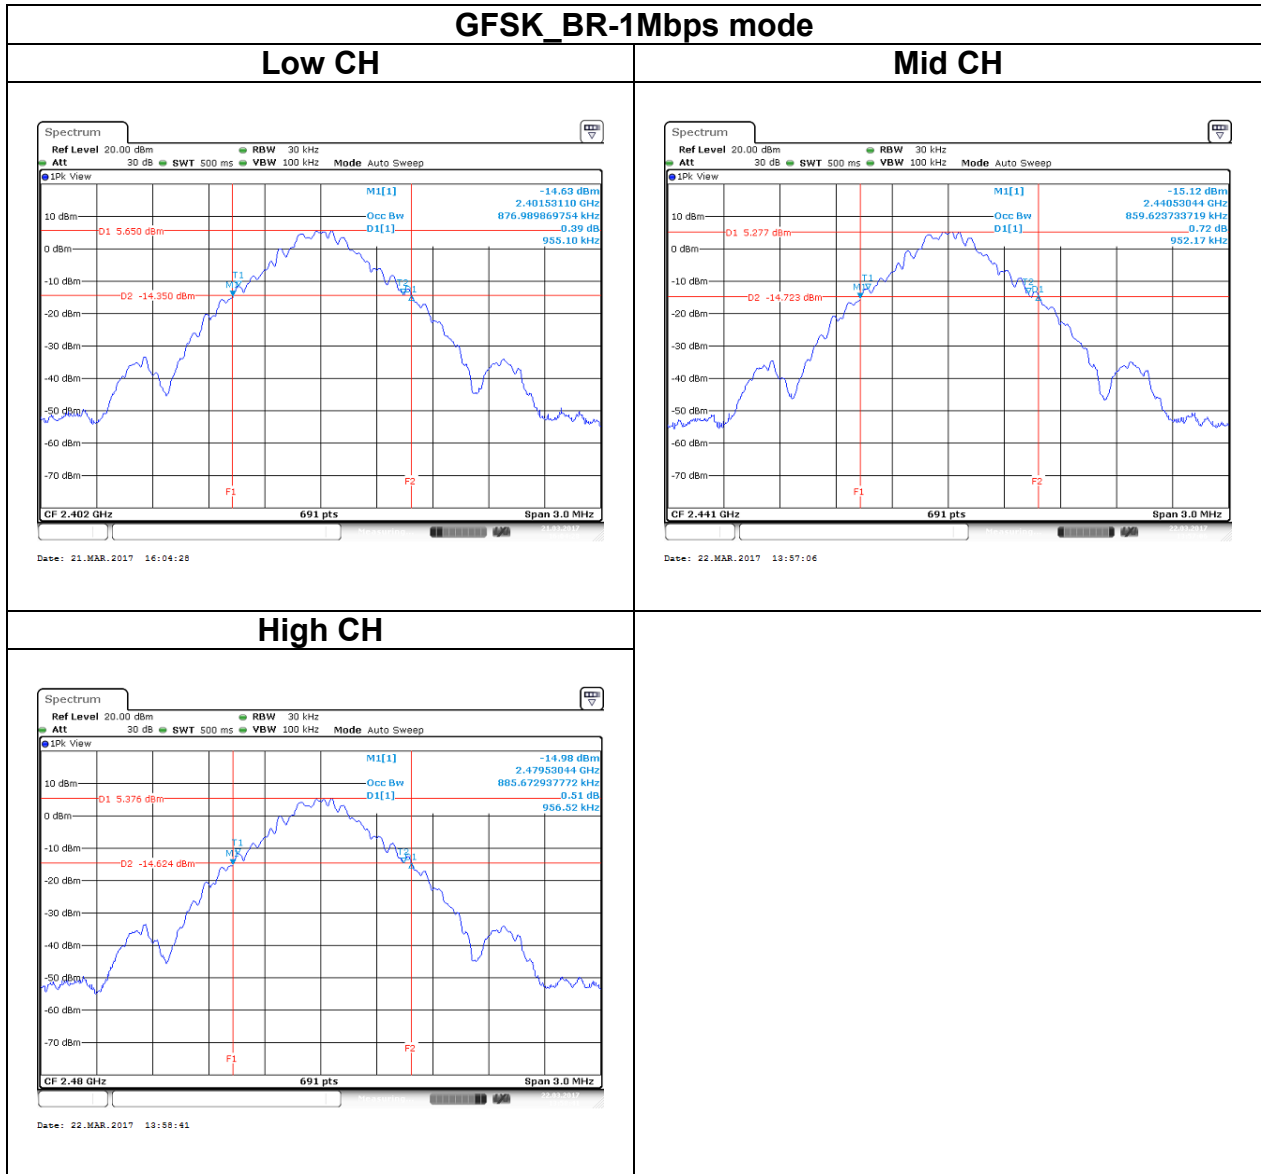

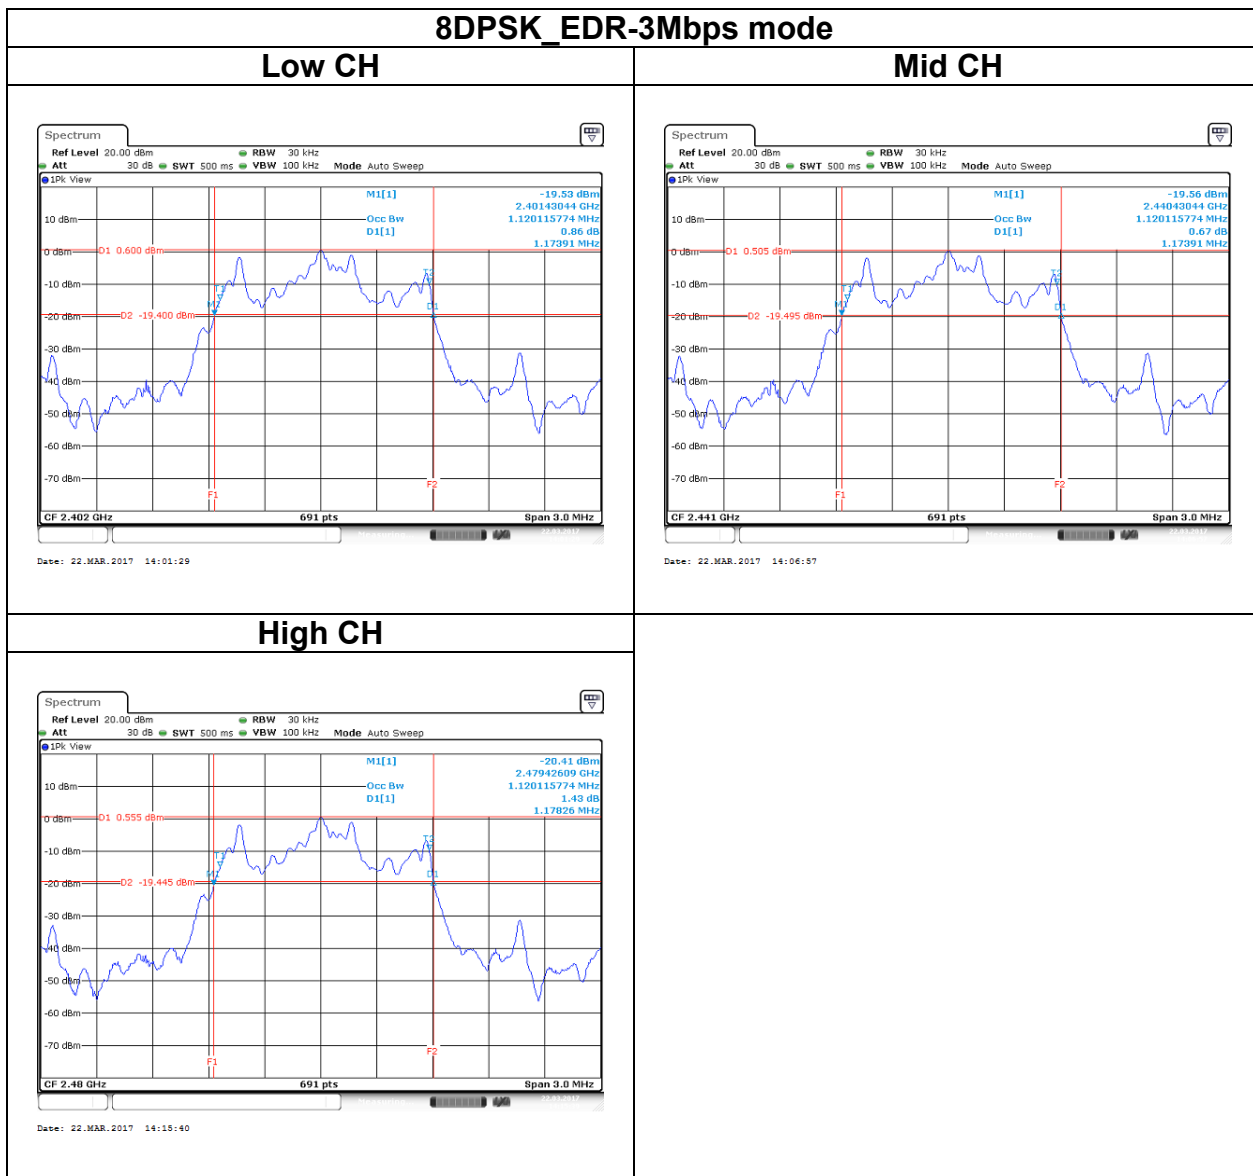

## 4.3 OUTPUT POWER MEASUREMENT

### 4.3.1 Test Limit

According to §15.247(a)(1) and RSS-247 section 5.4(b)

#### Peak output power :

##### FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

##### IC

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 21dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : 21dBm [ Limit = 30 – (DG – 6)]
-------	---

Average output power : For reporting purposes only.

### 4.3.2 Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

### 4.3.3 Test Setup

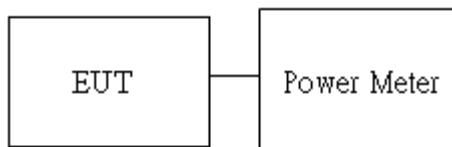

### 4.3.4 Test Result

**Peak output power :**

**For GFSK / DH5**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	<b>*8.97</b>	0.0079	0.125	PASS
Mid	2441	8.58	0.0072		PASS
High	2480	8.93	0.0078		PASS

**For 8DPSK / DH5**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	<b>*1.69</b>	0.0015	0.125	PASS
Mid	2441	1.49	0.0014		PASS
High	2480	1.60	0.0014		PASS

**Average output power :**

**For GFSK / DH5**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	8.85	0.0077
Mid	2441	8.47	0.0070
High	2480	8.76	0.0075

**For 8DPSK / DH5**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	1.58	0.0014
Mid	2441	1.37	0.0014
High	2480	1.54	0.0014

## 4.4 FREQUENCY SEPARATION

### 4.4.1 Test Limit

According to §15.247(a)(1) and RSS-247 section 5.1(b)


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

### 4.4.2 Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep = auto.  
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

### 4.4.3 Test Setup

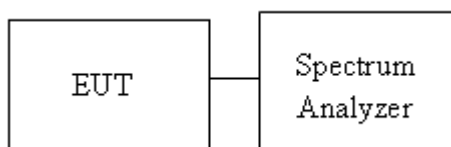



### 4.4.4 Test Result

Test mode: GFSK_BR-1Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	1.0029	0.6367	PASS
Mid	2441	1.0029	0.6347	PASS
High	2480	1.0029	0.6377	PASS

Test mode: 8DPSK_EDR-3Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	1.0029	0.7826	PASS
Mid	2441	1.0029	0.7826	PASS
High	2480	1.0029	0.7855	PASS

**Test Data**

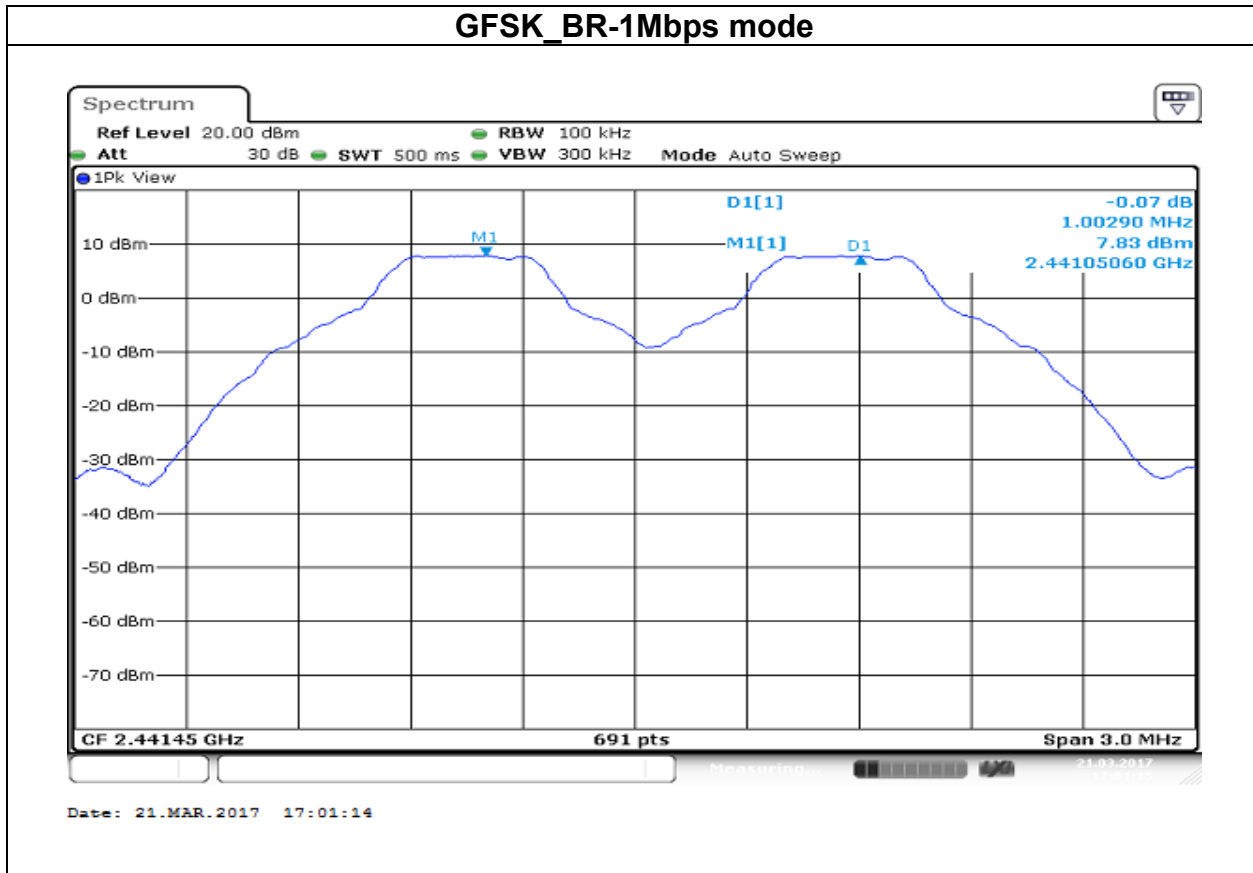

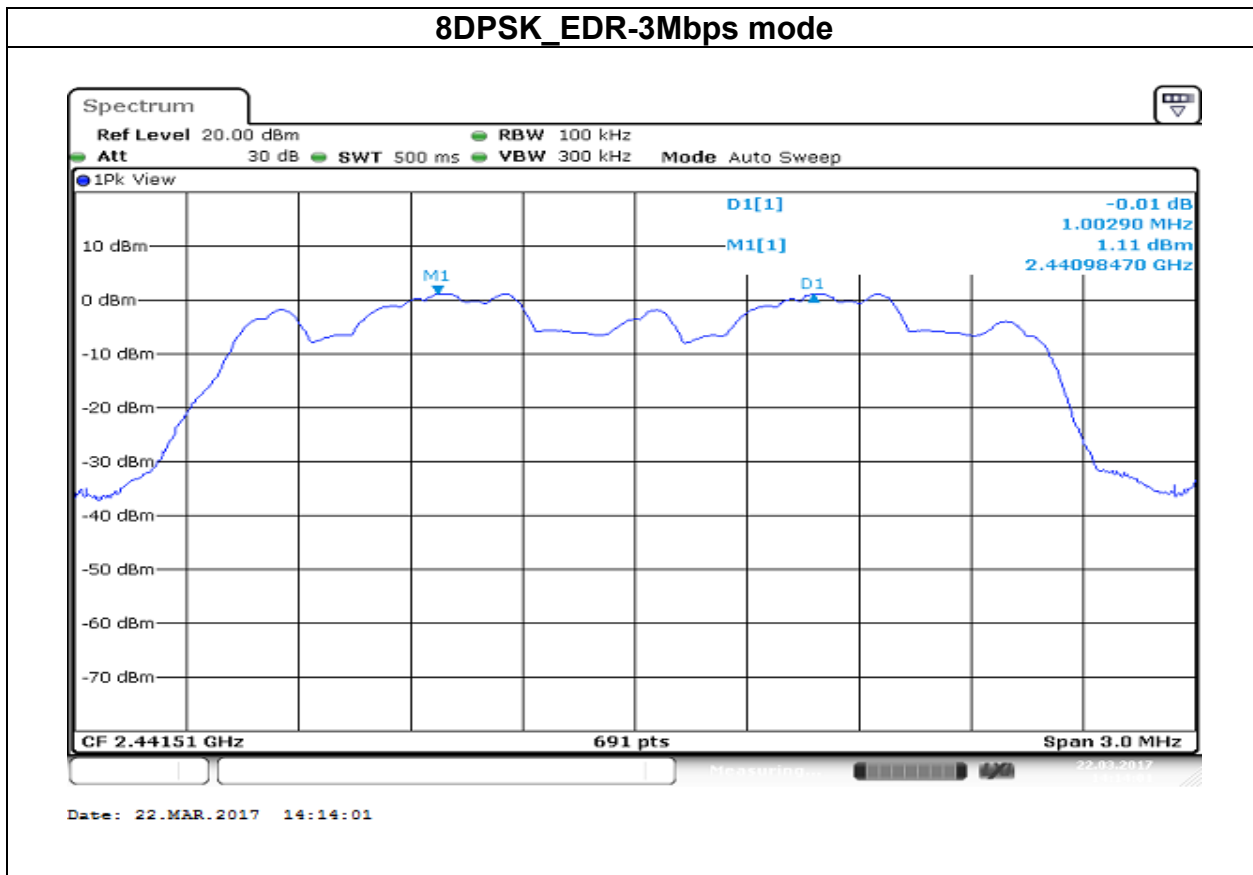

## 4.5 NUMBER OF HOPPING

### 4.5.1 Test Limit

According to §15.247(a)(1)(iii) and RSS-247 section 5.1(d)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 4.5.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW = 100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.

### 4.5.3 Test Setup

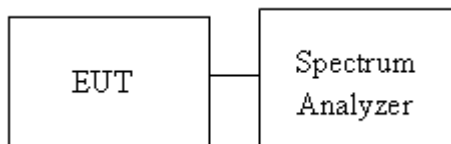

### 4.5.4 Test Result


Number of Hopping				
Mode	Frequency (MHz)	Hopping Channel Number	Hopping Channel Number Limits	Result
BR-1Mbps	2402-2480	79	15	Pass
EDR-3Mbps	2402-2480	79	15	

**REMARK:**

The frequency spectrum was broken up in to two sub-range to clearly show all of the hopping frequencies. In the AFH mode, this device operation was using 20 channels, so the requirement for minimum number of hopping channels is satisfied



**Test Data**

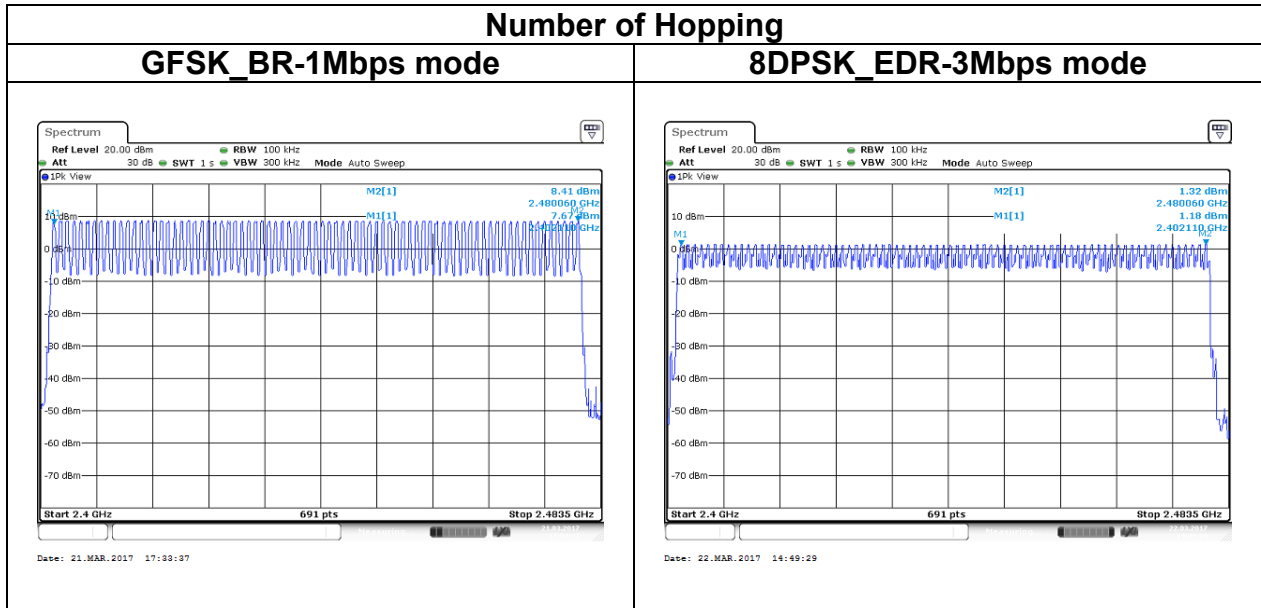

## 4.6 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

### 4.6.1 Test Limit


According to §15.247(d) and RSS-247 section 5.5

Limit	-20 dBc
-------	---------

### 4.6.2 Test Procedure



1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.


### 4.6.3 Test Setup


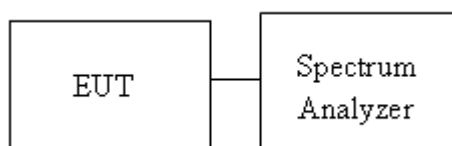




### 4.6.4 Test Result

#### Test Data

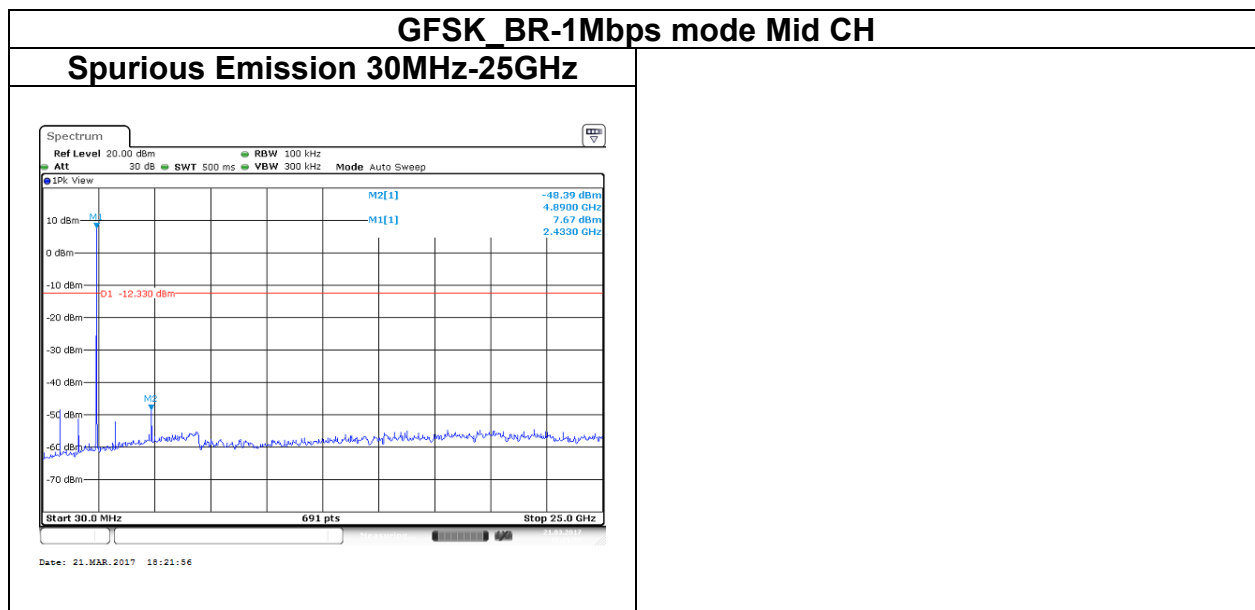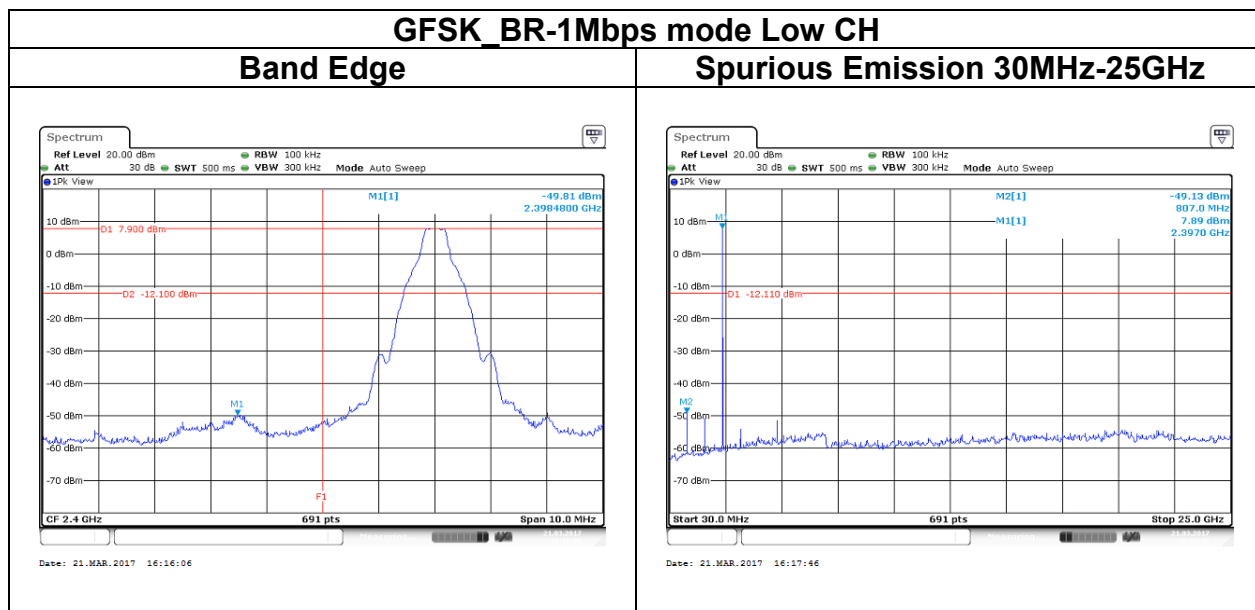

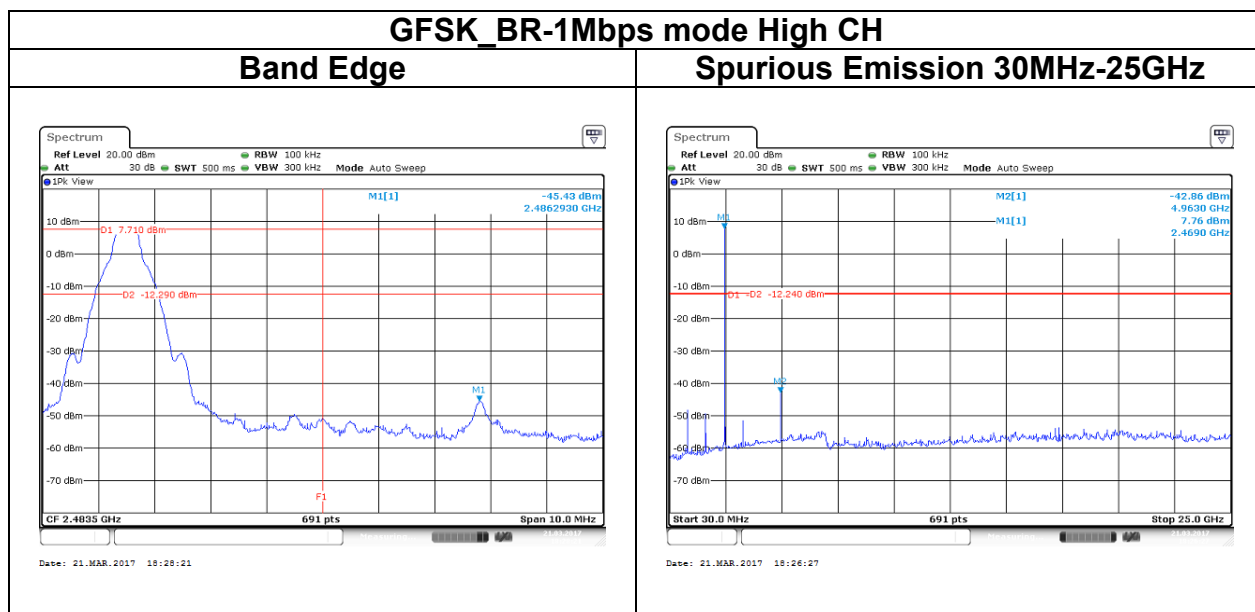

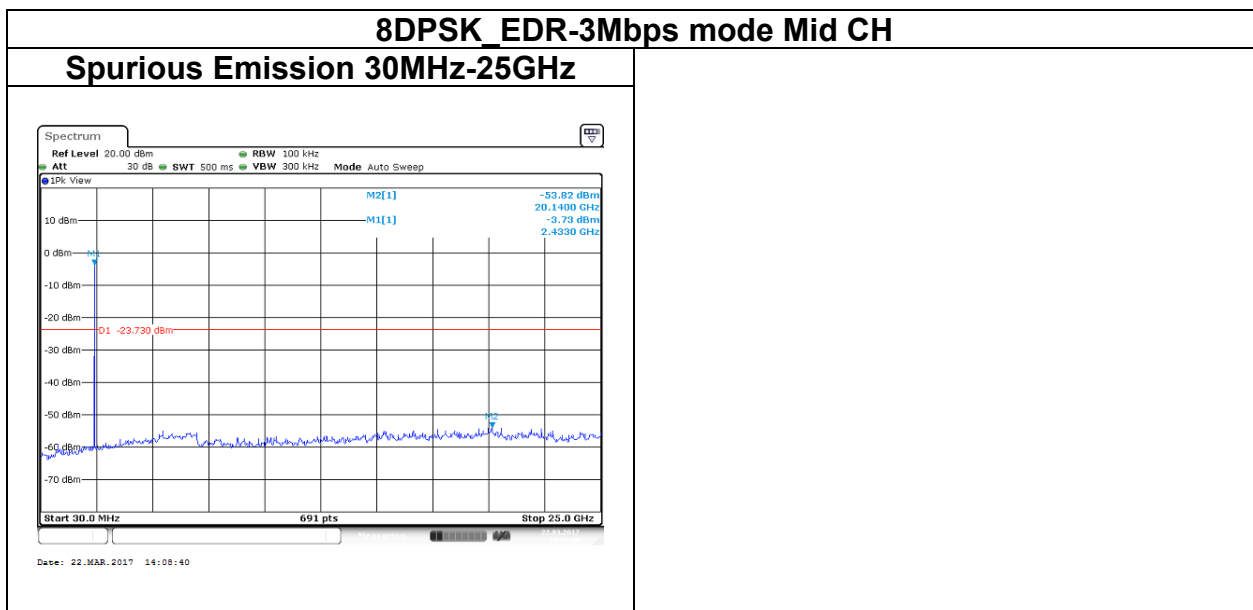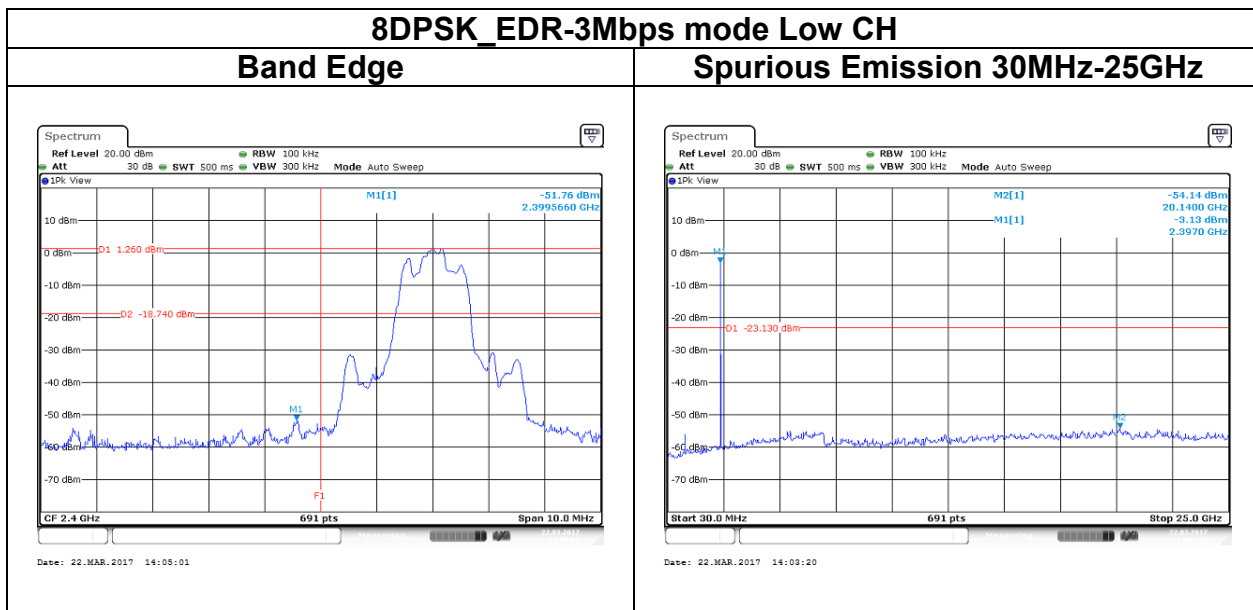

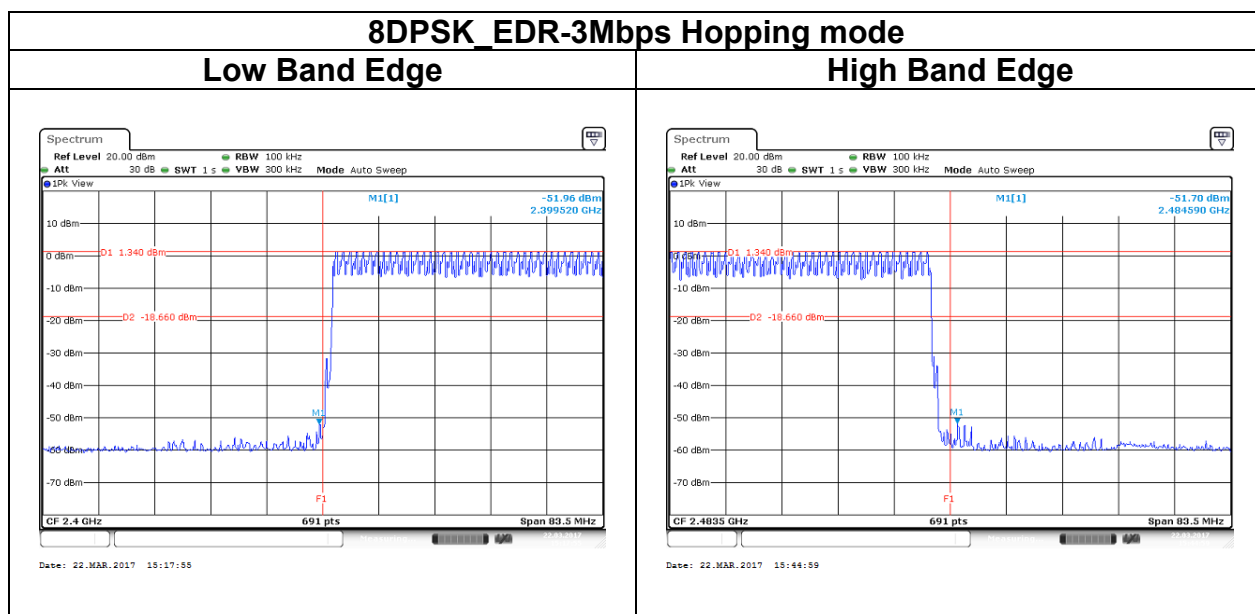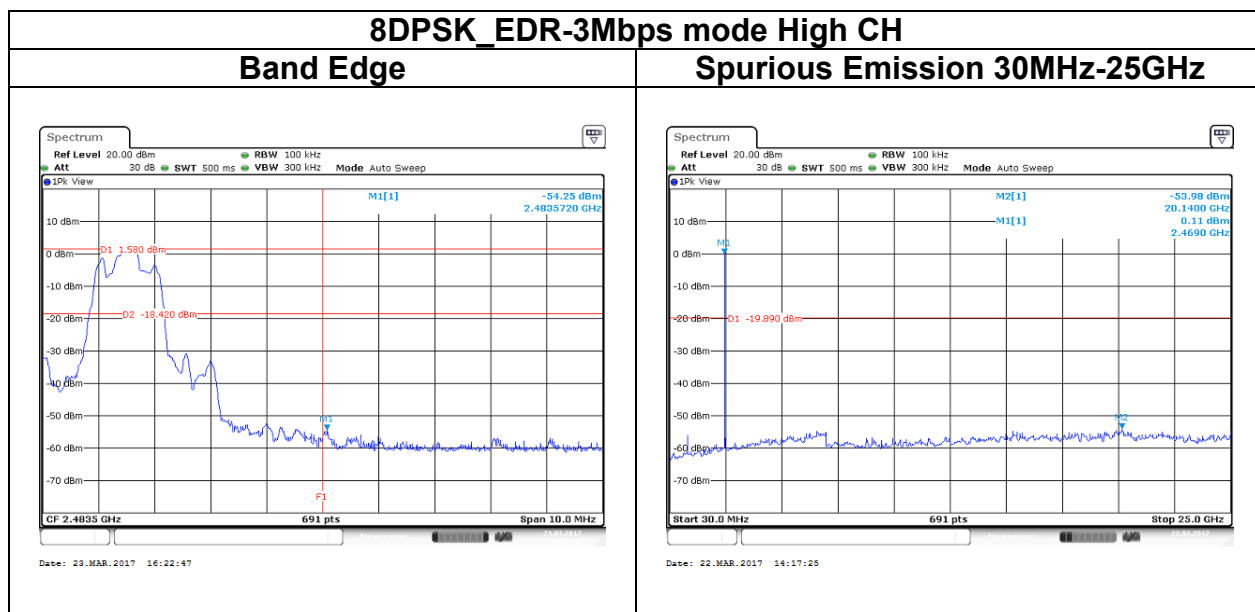

## 4.7 TIME OF OCCUPANCY (DWELL TIME)

### 4.7.1 Test Limit


According to §15.247(a)(1)(iii) and RSS-247 section 5.1(d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.7.2 Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = 1 ms


### 4.7.3 Test Setup

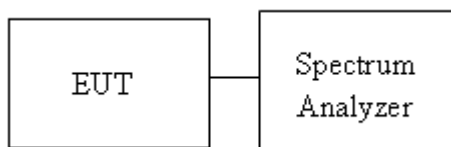

### 4.7.4 Test Result

Time of Occupancy (Dwell Time)							
Mode	Frequency (MHz)	Pulse Time Per Hopping (ms)	Minimum Number of Hopping Freq.	Number of pulse in	Dwell Time IN	Dwell Time Limits (s)	Result
				(0.4 * N sec)	(0.4 * N sec)		
BR-1Mbps	2441	2.8986	79	106.67	0.3092	0.4	Pass
EDR-3Mbps	2441	3.4783	79	106.67	0.3710	0.4	
AFH: DH5	2441	2.8986	20	53.33	0.1546	0.4	
Non-AFH: DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 * 0.4 * 79 = 106.6$							
AFH: DH5 Packet permit maximum $800 / 20 / 6 = 6.666$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $6.666 * 0.4 * 20 = 53.33$							

**Test Data**

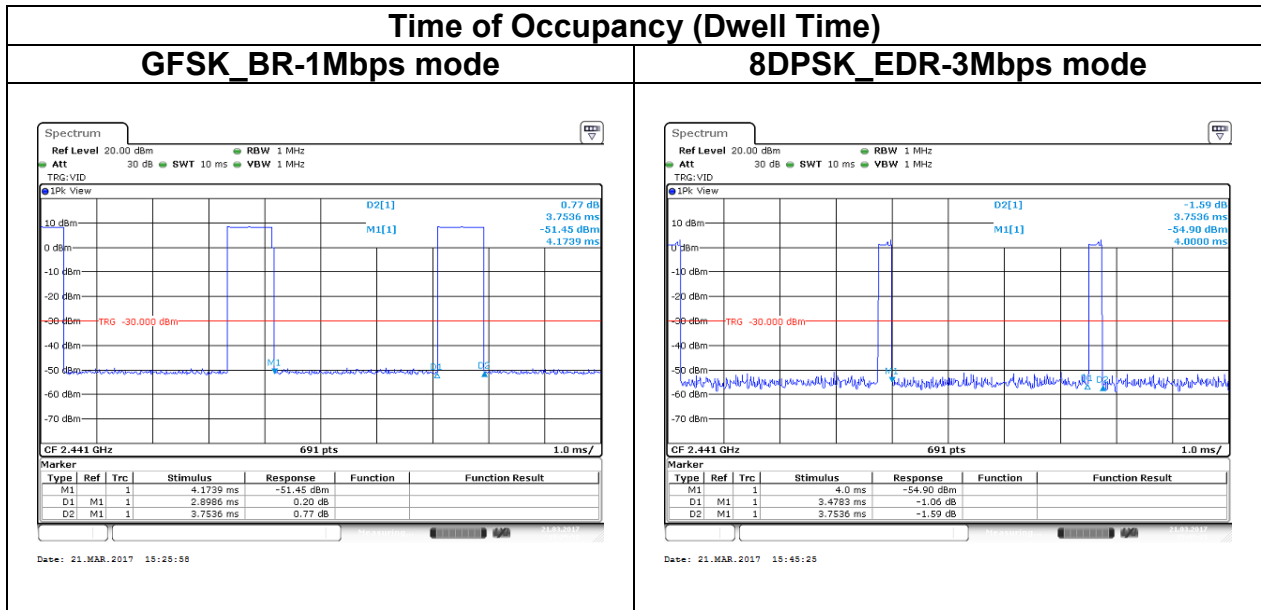



## 4.8 RADIATION BANDEGE AND SPURIOUS EMISSION

### 4.8.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

IC according to RSS-247 section 5.5, RSS-Gen, Section 8.9 and 8.10

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

#### Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

#### Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

### 4.8.2 Test Procedure


Test method Refer as KDB 558074 D01 v03r05, Section 12.1.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 30MHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.
4. For harmonic, the worst case of output power was BR-1Mbps. Therefore only BR-1Mbps record in the report.
5. The SA setting following :
  - (1) Below 1G : RBW = 100kHz, VBW  $\geq$  3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
  - (2) Above 1G :
    - (2.1) For Peak measurement : RBW = 1MHz, VBW  $\geq$  3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
    - (2.2) For Average measurement : RBW = 1MHz, VBW
      - If Duty Cycle  $\geq$  98%, VBW=10Hz.
      - If Duty Cycle < 98%, VBW $\geq$ 1/T.


Configuration	Duty Cycle (%)	T(ms)	1/T (kHz)	VBW setting
GFSK_BR-1Mbps	100.00%	100.0000	-	10Hz
8DPSK_EDR-3Mbps	6.93%	0.2600	3.846	3.9K

### 4.8.3 Test Setup


#### 9kHz ~ 30MHz

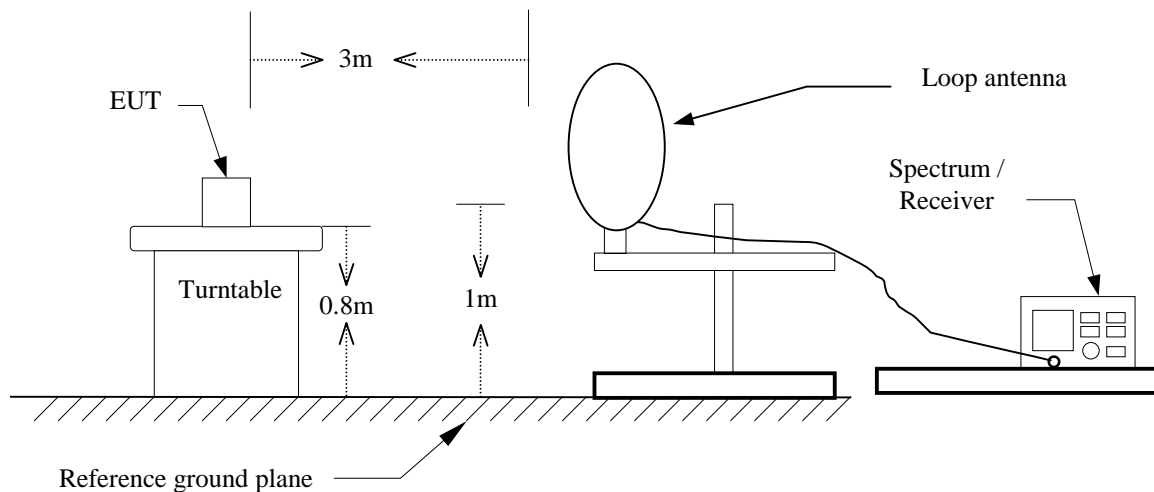

#### 30MHz ~ 1GHz

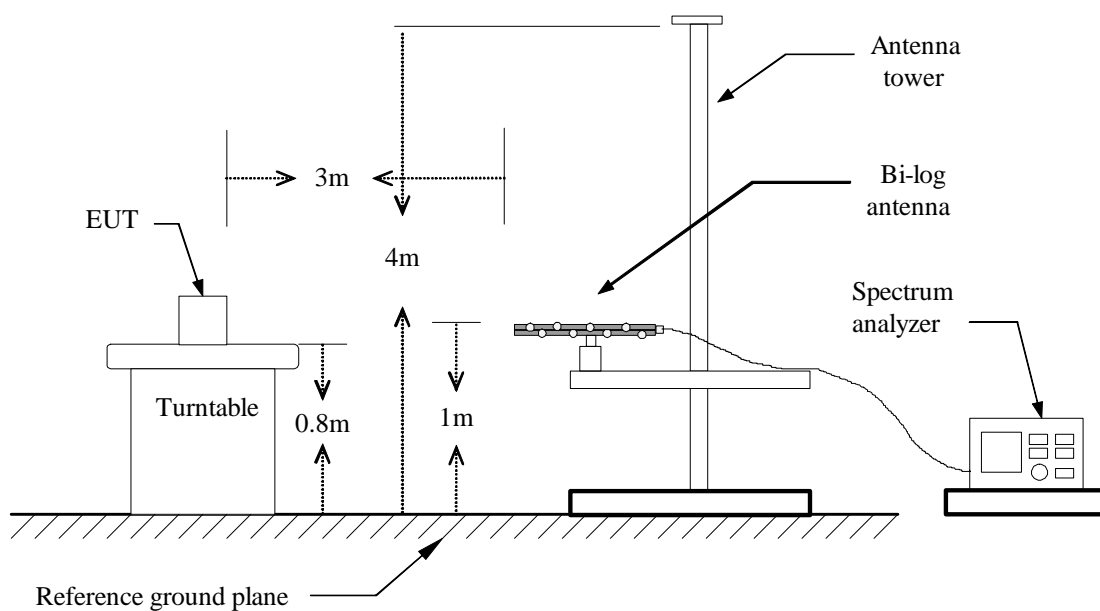


**Above 1 GHz**

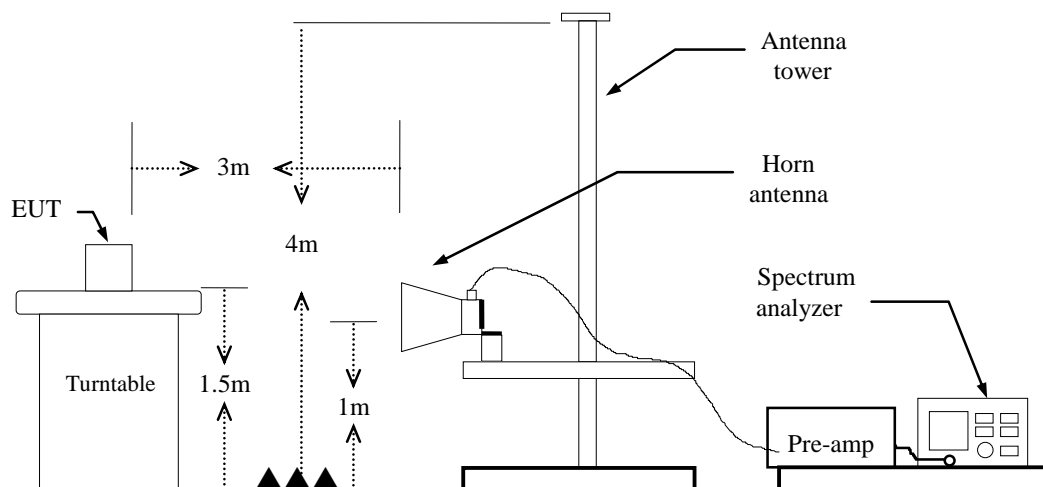

### 4.8.4 Test Result


#### Band Edge Test Data

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Band Edge	Test Date	March 22, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak		

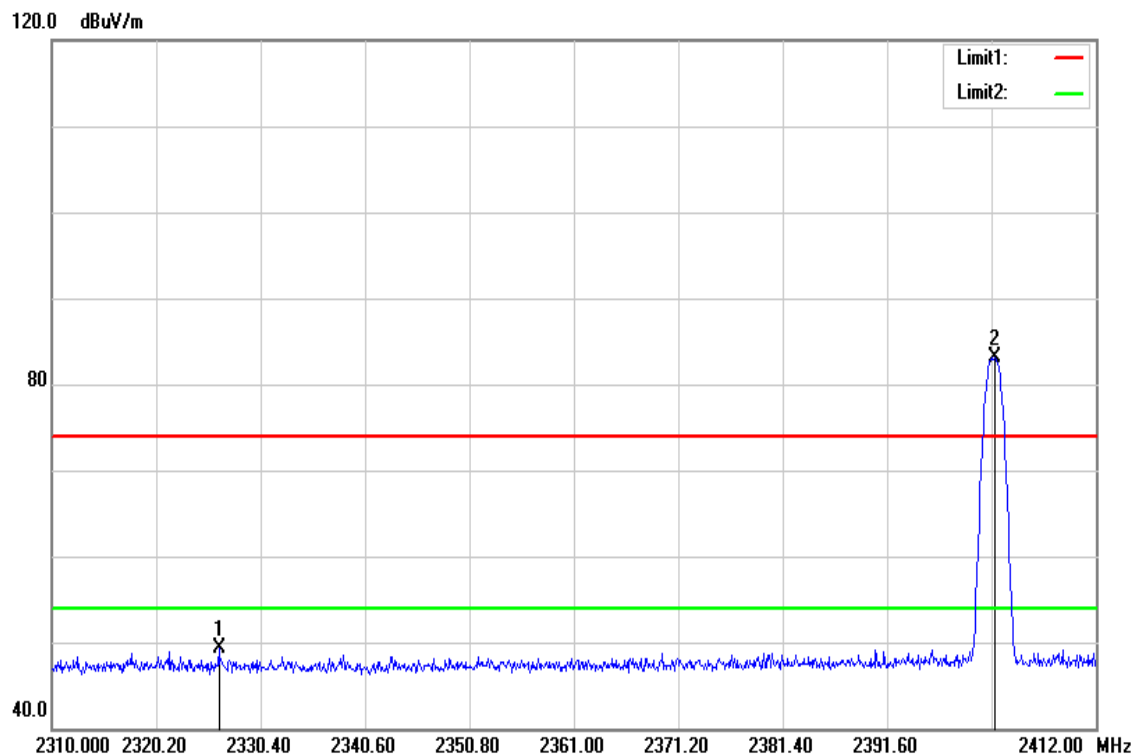


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2326.320	52.18	-2.95	49.23	74.00	-24.77	peak
2402.106	85.42	-2.41	83.01	-	-	peak

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Band Edge	Test Date	March 22, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Average		

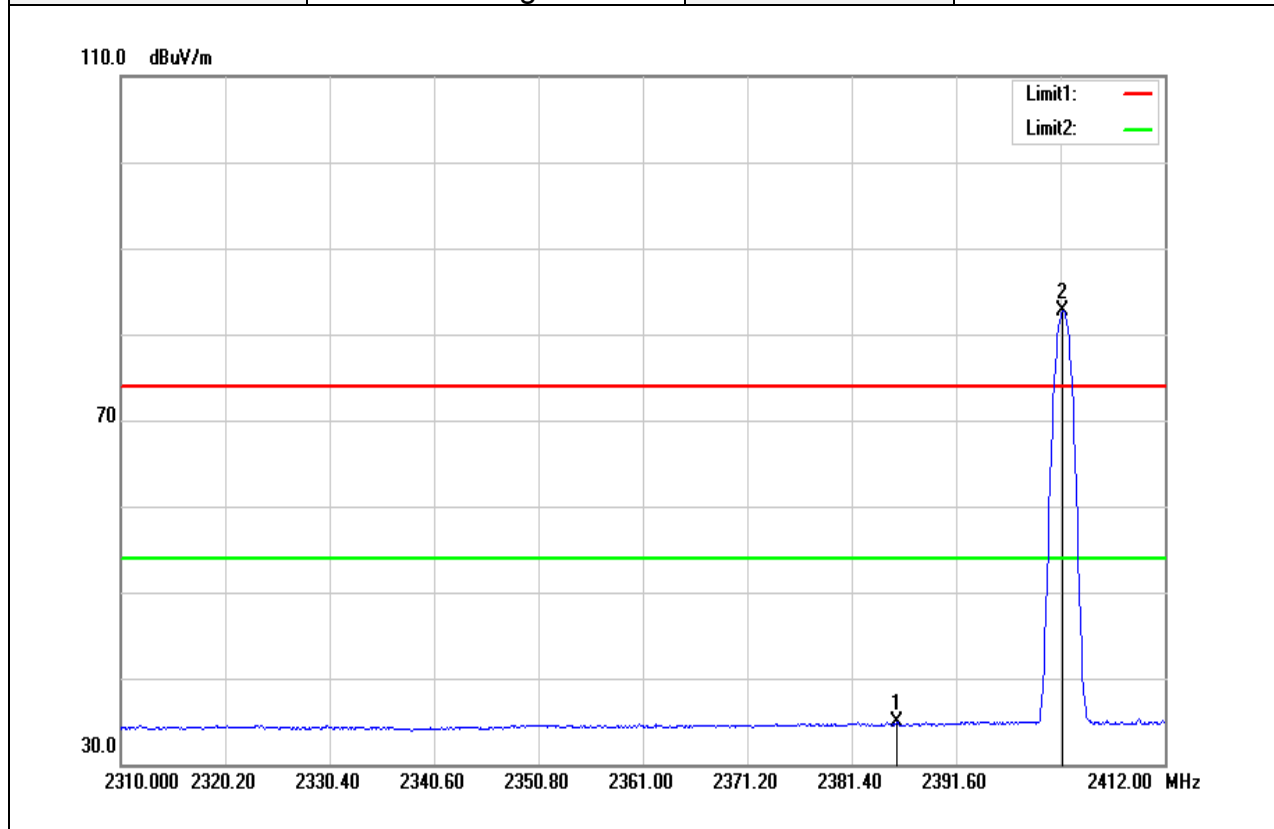


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2385.786	37.36	-2.53	34.83	54.00	-19.17	AVG
2402.004	85.10	-2.41	82.69	-	-	AVG

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Band Edge	Test Date	March 22, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak		

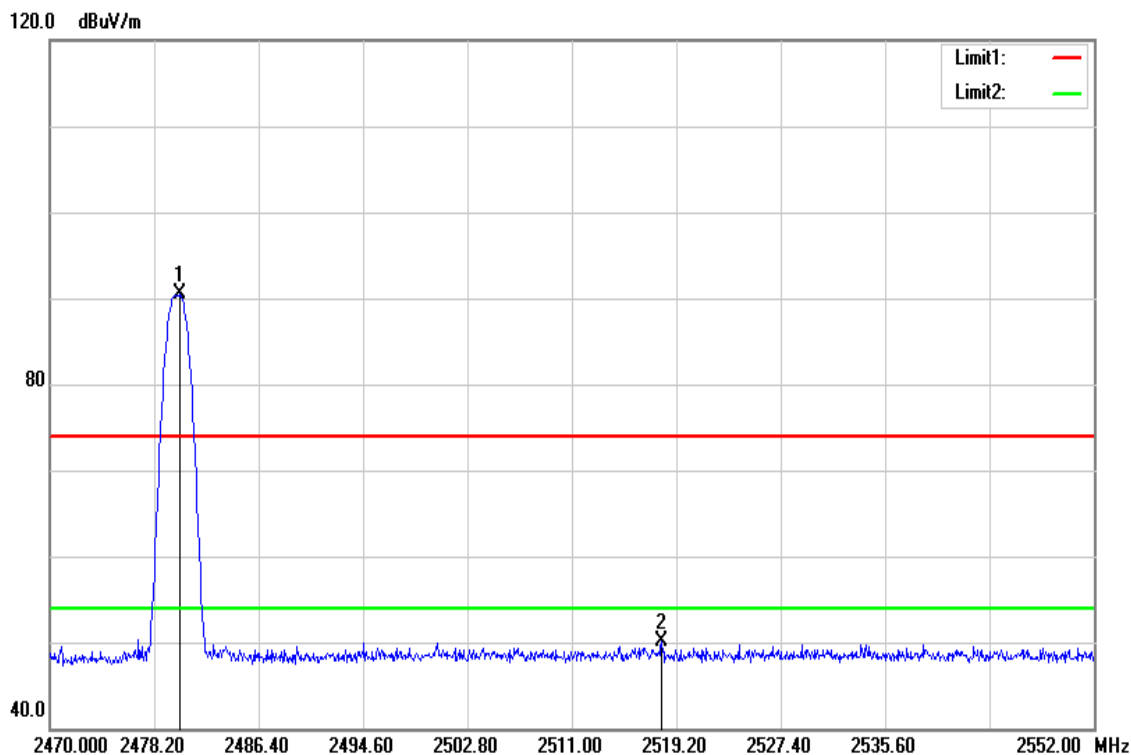

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2480.168	92.43	-2.03	90.40	-	-	peak
2518.052	51.90	-1.81	50.09	74.00	-23.91	peak


Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Band Edge	Test Date	March 22, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Average		

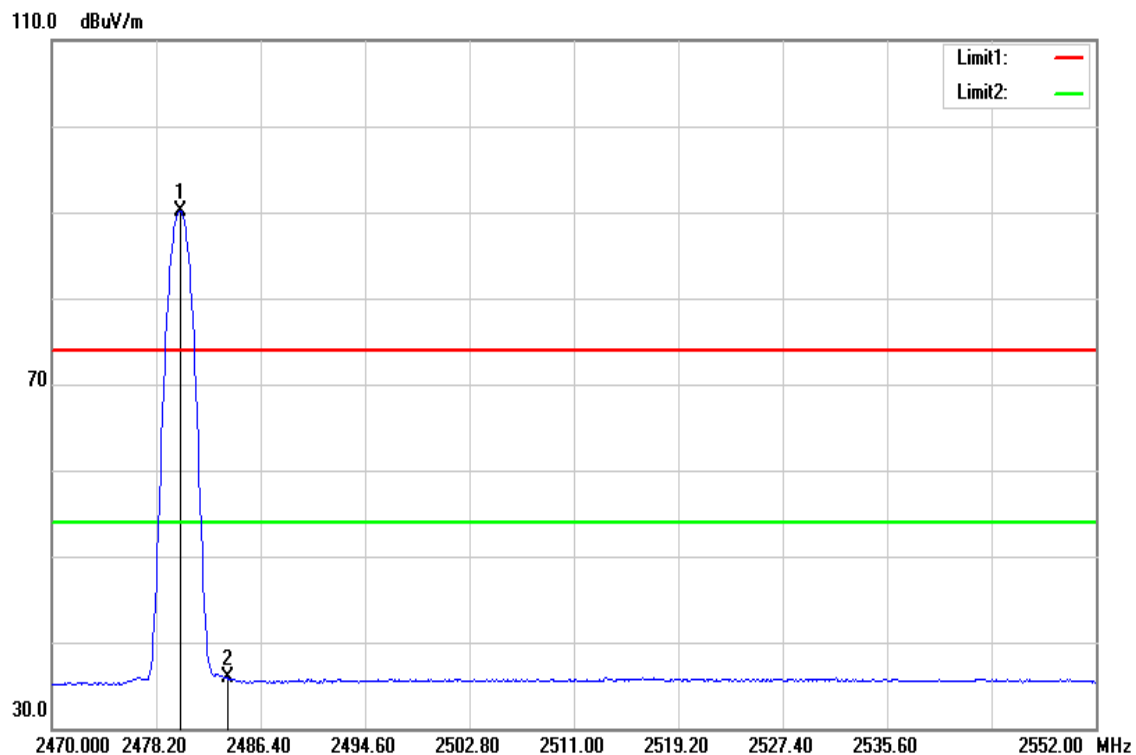

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2480.086	92.13	-2.03	90.10	-	-	AVG
2483.776	37.95	-1.99	35.96	54.00	-18.04	AVG




Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Band Edge	Test Date	March 22, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak		

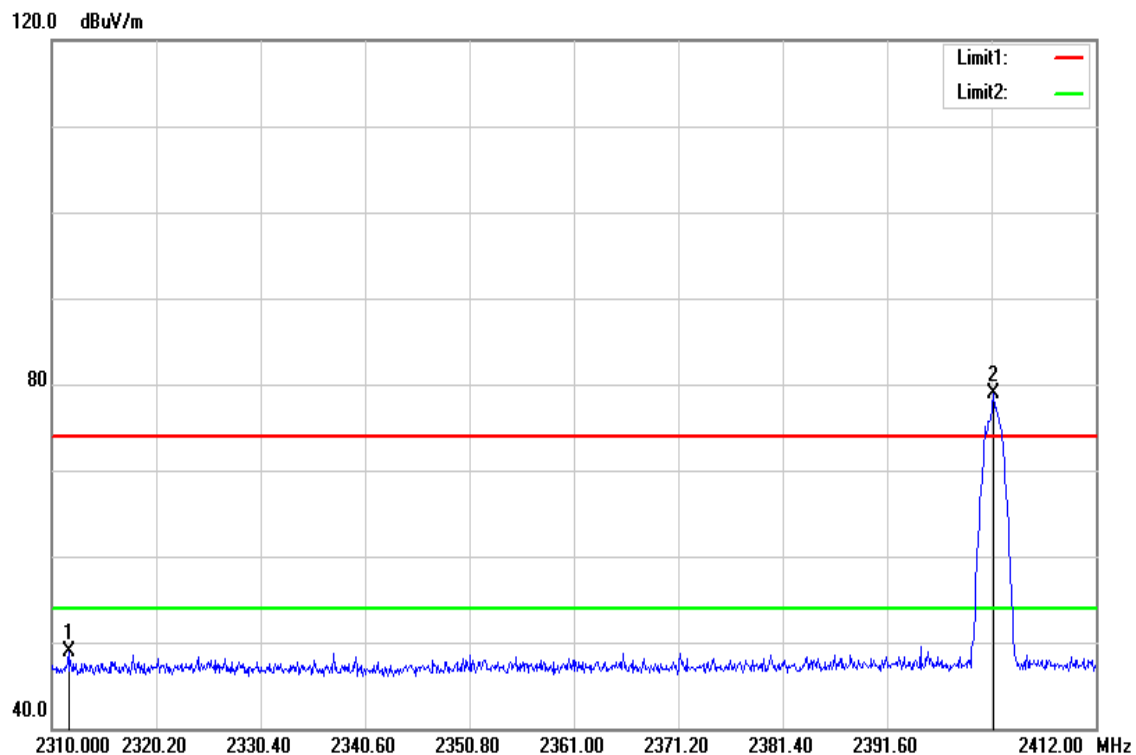


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2311.632	51.88	-3.00	48.88	74.00	-25.12	peak
2402.004	81.24	-2.41	78.83	-	-	peak

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Band Edge	Test Date	March 22, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Average		

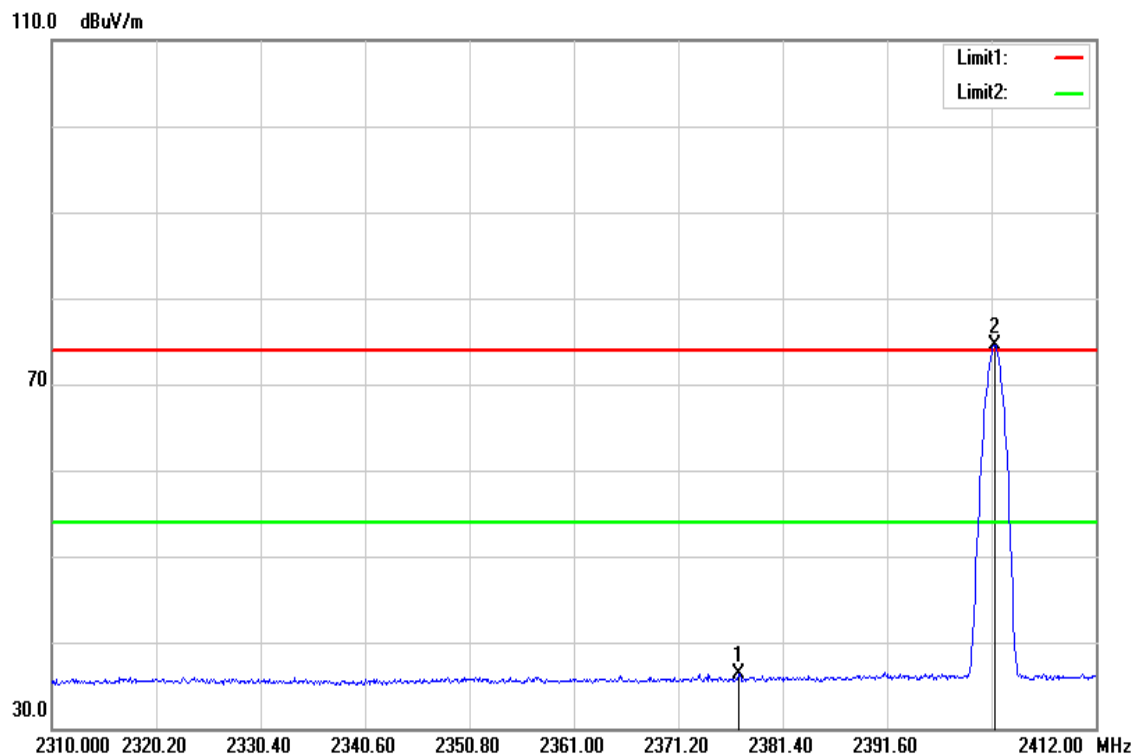


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2377.116	38.99	-2.60	36.39	54.00	-17.61	AVG
2402.106	76.88	-2.41	74.47	-	-	AVG

Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Band Edge	Test Date	March 22, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak		

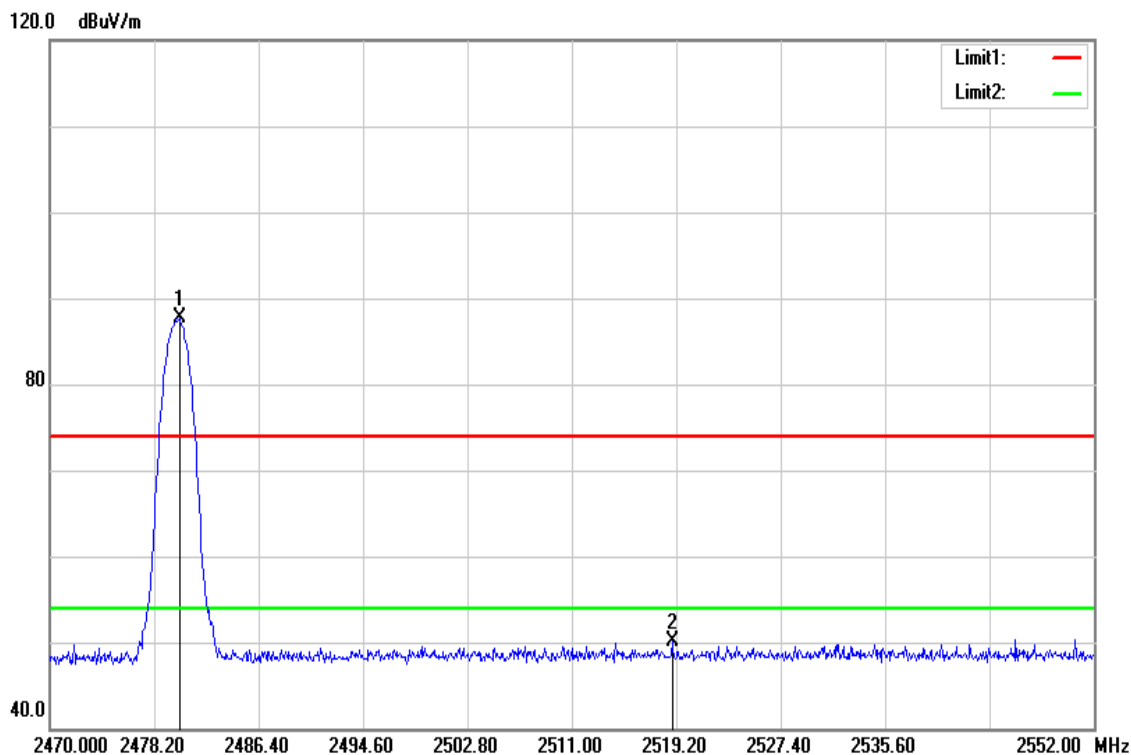

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2480.168	89.78	-2.03	87.75	-	-	peak
2518.872	51.86	-1.81	50.05	74.00	-23.95	peak


Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Band Edge	Test Date	March 22, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Average		

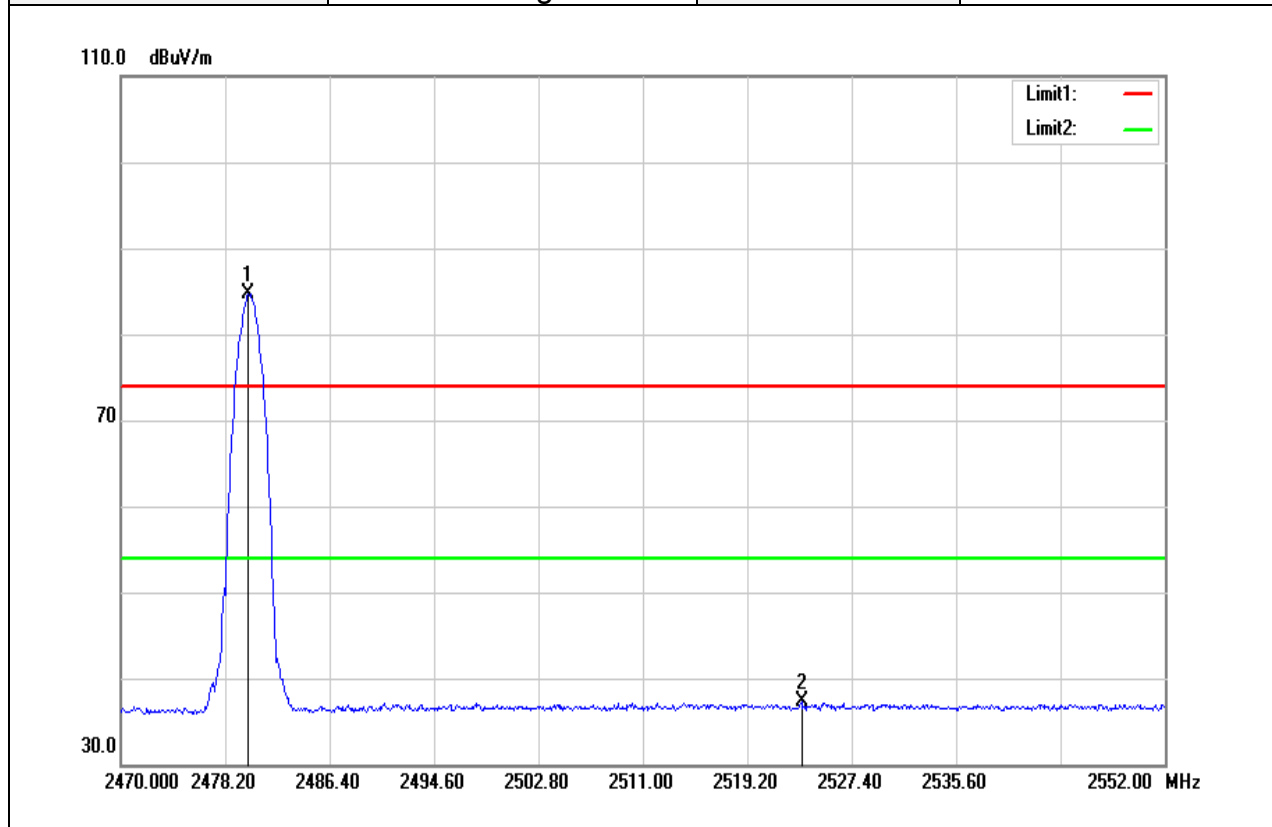

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2480.004	86.64	-2.03	84.61	-	-	AVG
2523.464	39.07	-1.80	37.27	54.00	-16.73	AVG


**Below 1G Test Data**

Test Mode:	BT Mode	Temp/Hum	27(°C)/ 53%RH
Test Item	30MHz-1GHz	Test Date	March 27, 2017
Polarize	Vertical	Test Engineer	Ed Chiang
Detector	Peak and Qusi-peak		

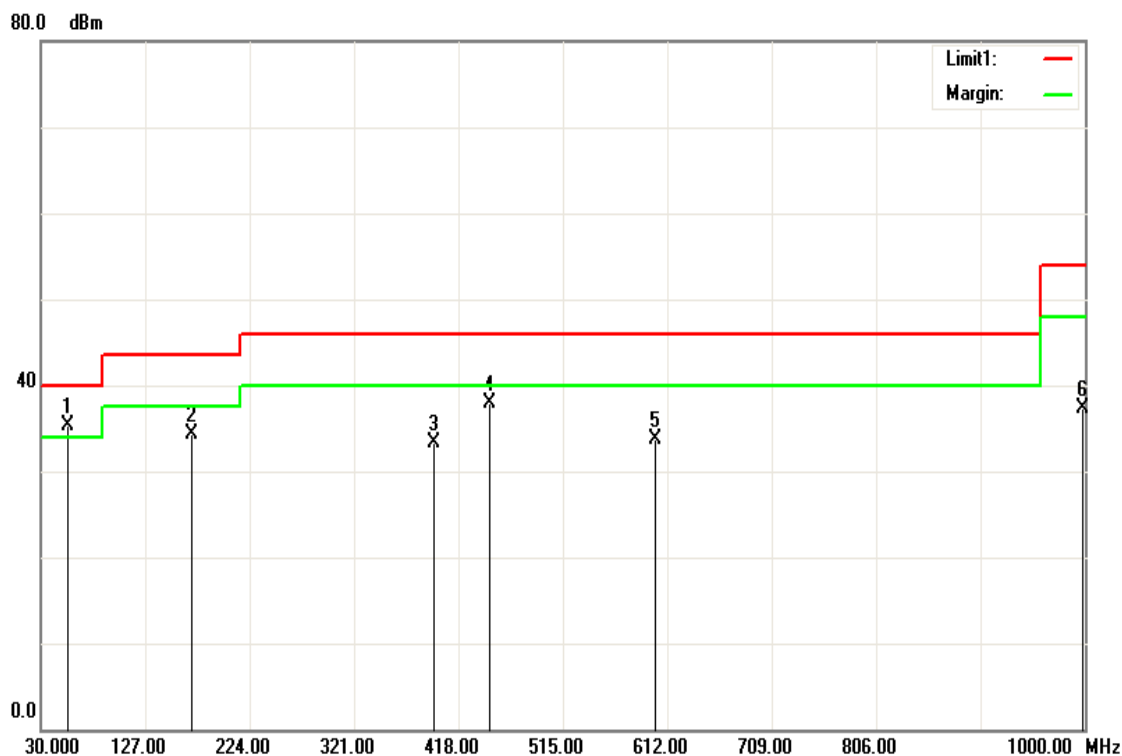

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
55.2200	37.16	-1.78	35.38	40.00	-4.62	QP
169.6800	32.67	1.67	34.34	43.50	-9.16	peak
395.6900	26.10	7.28	33.38	46.00	-12.62	peak
447.1000	30.77	7.06	37.83	46.00	-8.17	peak
600.3600	35.25	-1.56	33.69	46.00	-12.31	peak
998.0600	30.93	6.39	37.32	54.00	-16.68	peak


Test Mode:	BT Mode	Temp/Hum	27(°C)/ 53%RH
Test Item	30MHz-1GHz	Test Date	March 27, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak and Quasi-peak		

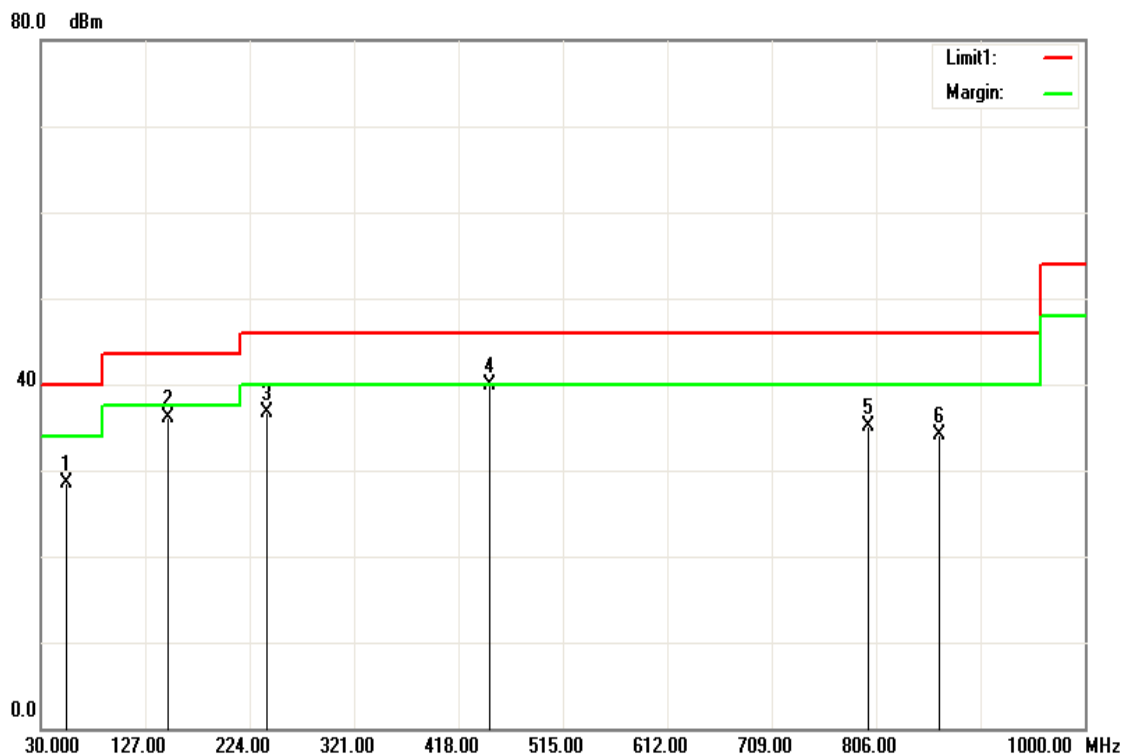

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
54.2500	30.48	-1.88	28.60	40.00	-11.40	peak
148.3400	35.69	0.45	36.14	43.50	-7.36	peak
240.4900	29.85	6.77	36.62	46.00	-9.38	peak
447.1000	32.76	7.06	39.82	46.00	-6.18	QP
798.2400	33.84	1.30	35.14	46.00	-10.86	peak
864.2000	32.78	1.25	34.03	46.00	-11.97	peak

**Above 1G Test Data**

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2017
Polarize	Vertical	Test Engineer	Ed Chiang
Detector	Peak and Average		

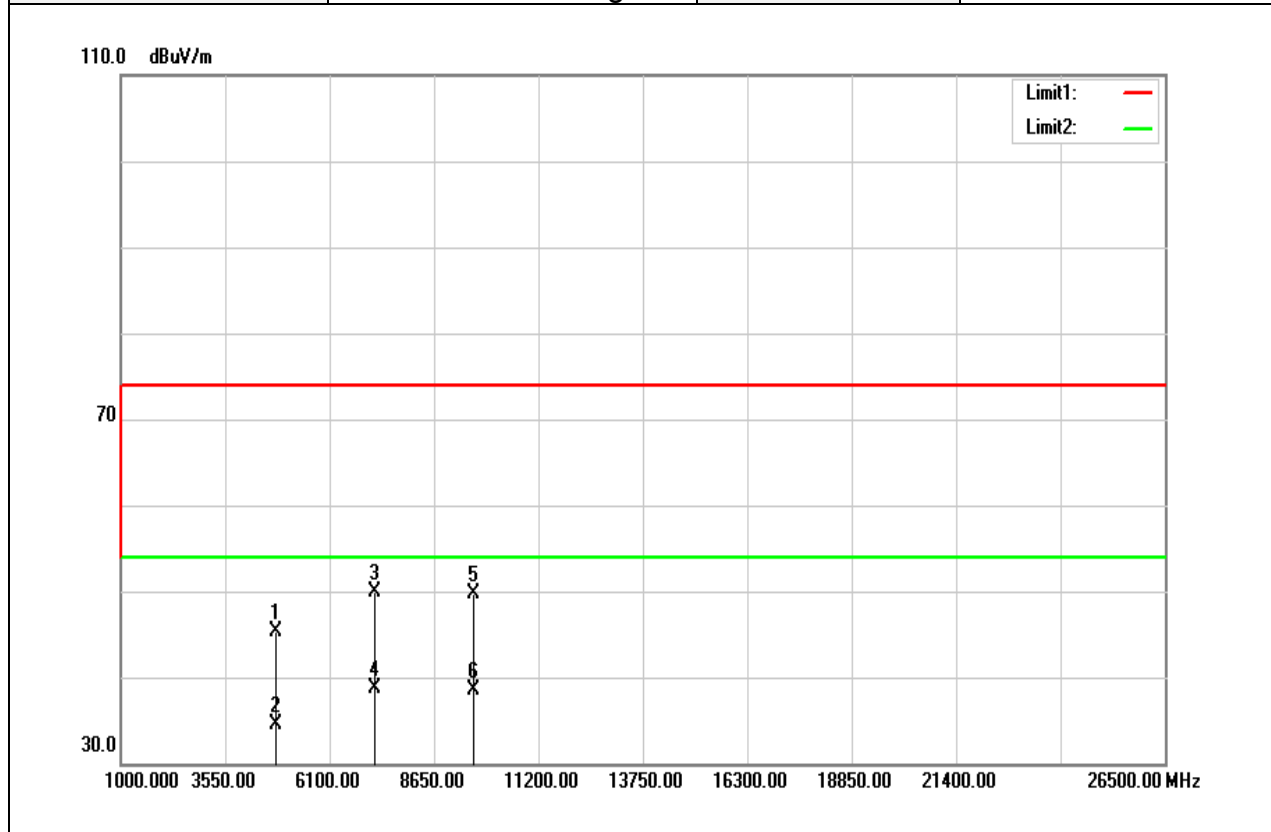


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	40.26	5.04	45.30	74.00	-28.70	peak
4804.000	29.54	5.04	34.58	54.00	-19.42	AVG
7206.000	37.35	12.62	49.97	74.00	-24.03	peak
7206.000	26.06	12.62	38.68	54.00	-15.32	AVG
9608.000	32.06	17.60	49.66	74.00	-24.34	peak
9608.000	20.84	17.60	38.44	54.00	-15.56	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak and Average		

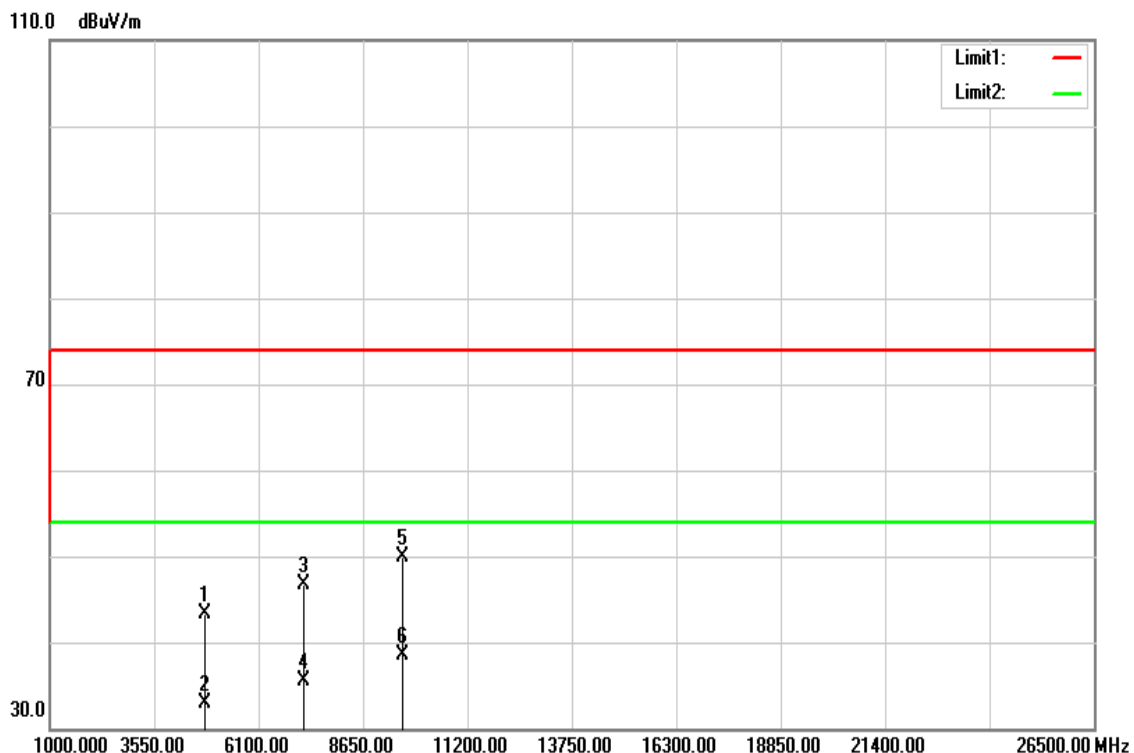


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	38.25	5.04	43.29	74.00	-30.71	peak
4804.000	27.80	5.04	32.84	54.00	-21.16	AVG
7206.000	34.17	12.62	46.79	74.00	-27.21	peak
7206.000	22.82	12.62	35.44	54.00	-18.56	AVG
9608.000	32.30	17.60	49.90	74.00	-24.10	peak
9608.000	20.88	17.60	38.48	54.00	-15.52	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Test Mode:	GFSK_BR-1Mbps Mid CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2017
Polarize	Vertical	Test Engineer	Ed Chiang
Detector	Peak and Average		

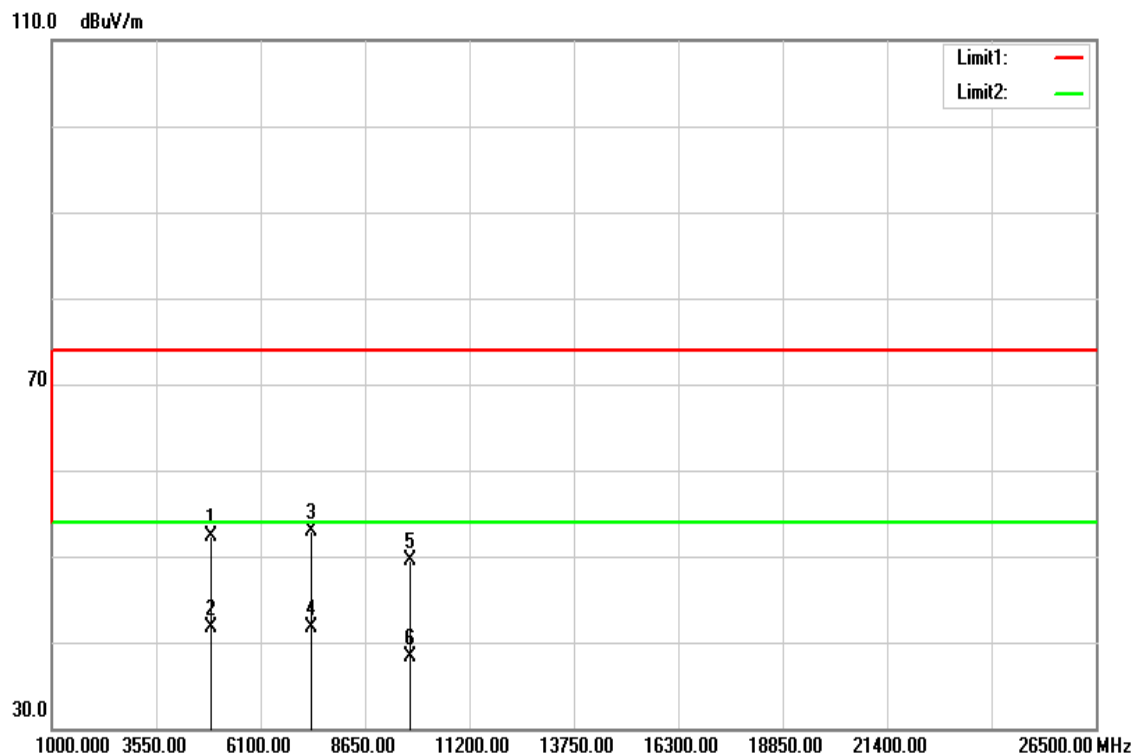


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4883.000	46.97	5.26	52.23	74.00	-21.77	peak
4883.000	36.37	5.26	41.63	54.00	-12.37	AVG
7326.000	39.86	12.98	52.84	74.00	-21.16	peak
7326.000	28.69	12.98	41.67	54.00	-12.33	AVG
9760.000	31.94	17.60	49.54	74.00	-24.46	peak
9760.000	20.67	17.60	38.27	54.00	-15.73	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Mid CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak and Average		

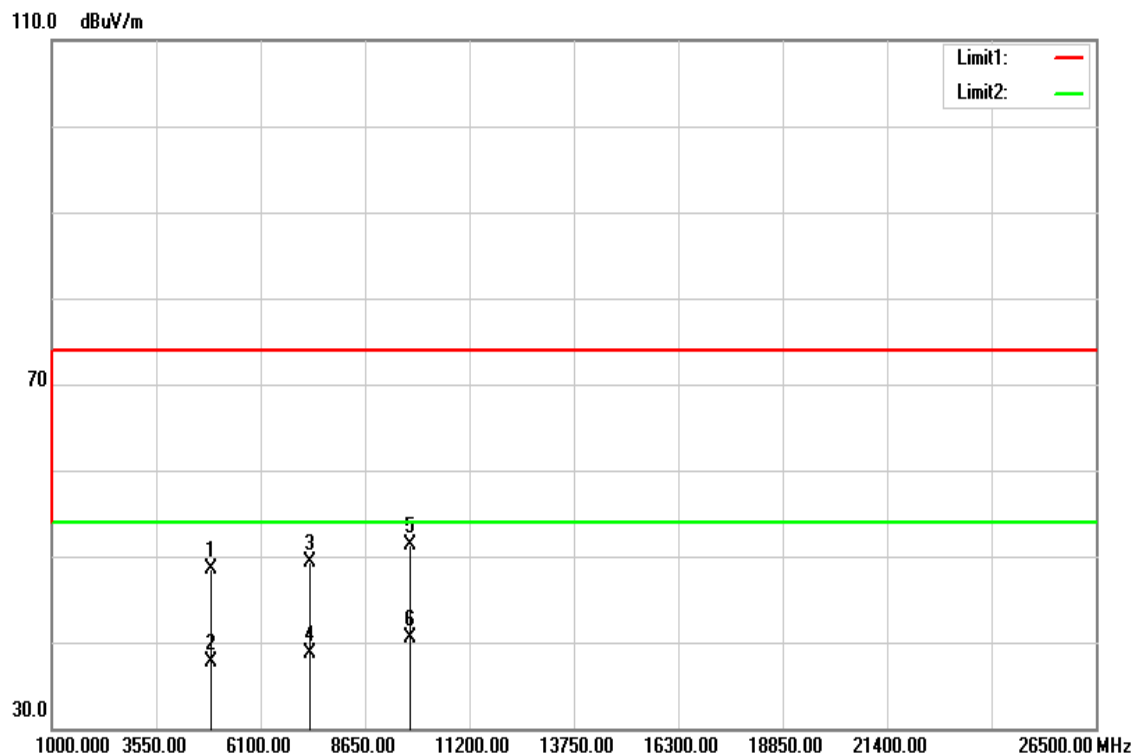


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4883.000	43.20	5.26	48.46	74.00	-25.54	peak
4883.000	32.38	5.26	37.64	54.00	-16.36	AVG
7320.000	36.43	12.97	49.40	74.00	-24.60	peak
7320.000	25.77	12.97	38.74	54.00	-15.26	AVG
9760.000	33.69	17.60	51.29	74.00	-22.71	peak
9760.000	22.98	17.60	40.58	54.00	-13.42	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2017
Polarize	Vertical	Test Engineer	Ed Chiang
Detector	Peak and Average		

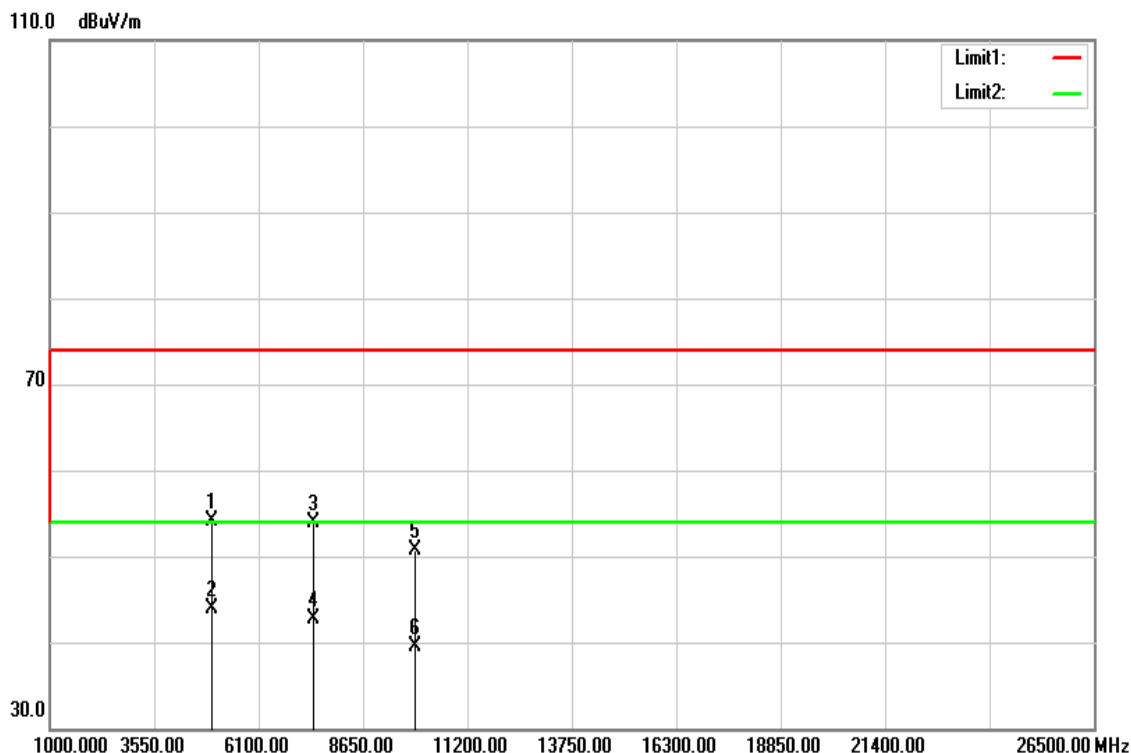


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBu /m)	Margin (dB)	Remark
4960.000	48.57	5.46	54.03	74.00	-19.97	peak
4960.000	38.52	5.46	43.98	54.00	-10.02	AVG
7438.000	40.50	13.32	53.82	74.00	-20.18	peak
7438.000	29.31	13.32	42.63	54.00	-11.37	AVG
9920.000	33.18	17.60	50.78	74.00	-23.22	peak
9920.000	21.88	17.60	39.48	54.00	-14.52	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak and Average		

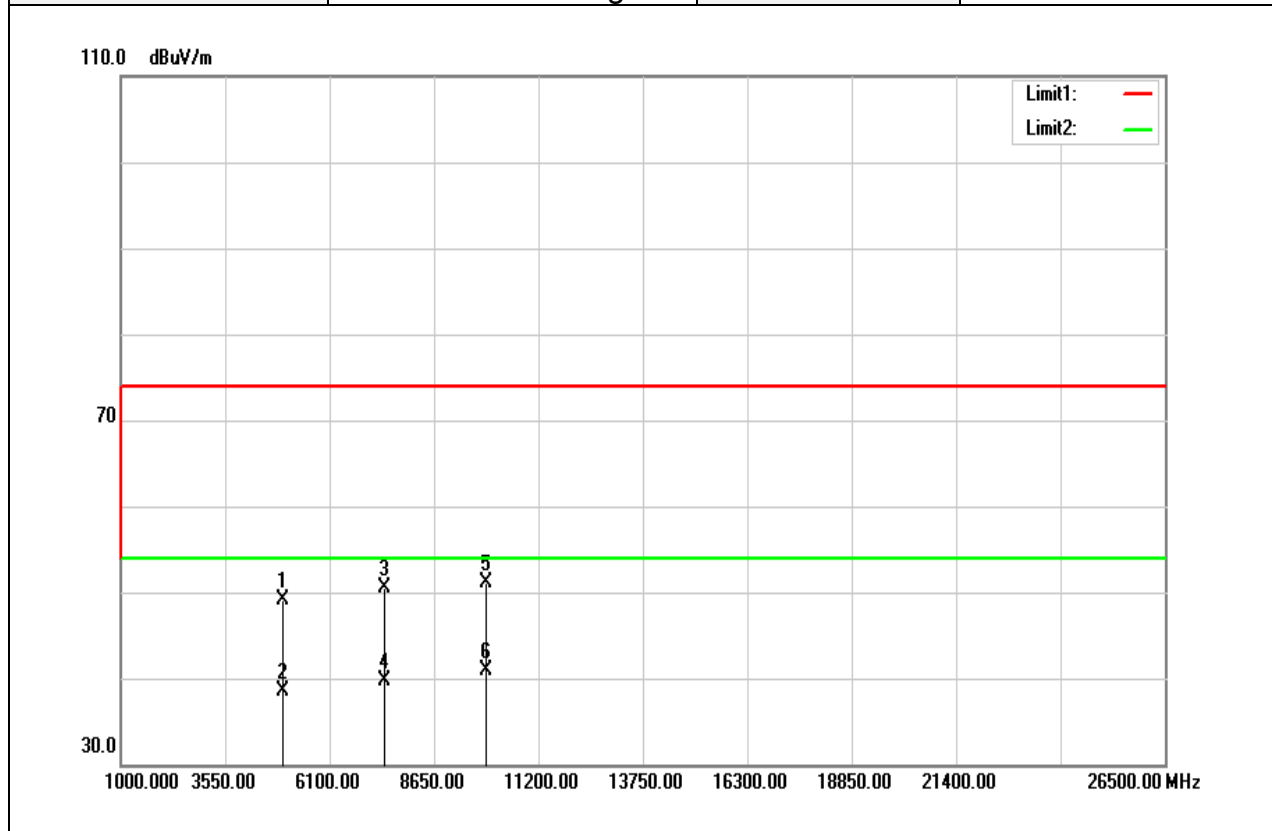


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	43.72	5.46	49.18	74.00	-24.82	peak
4960.000	33.01	5.46	38.47	54.00	-15.53	AVG
7438.000	37.14	13.32	50.46	74.00	-23.54	peak
7438.000	26.34	13.32	39.66	54.00	-14.34	AVG
9920.000	33.56	17.60	51.16	74.00	-22.84	peak
9920.000	23.24	17.60	40.84	54.00	-13.16	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2017
Polarize	Vertical	Test Engineer	Ed Chiang
Detector	Peak and Average		

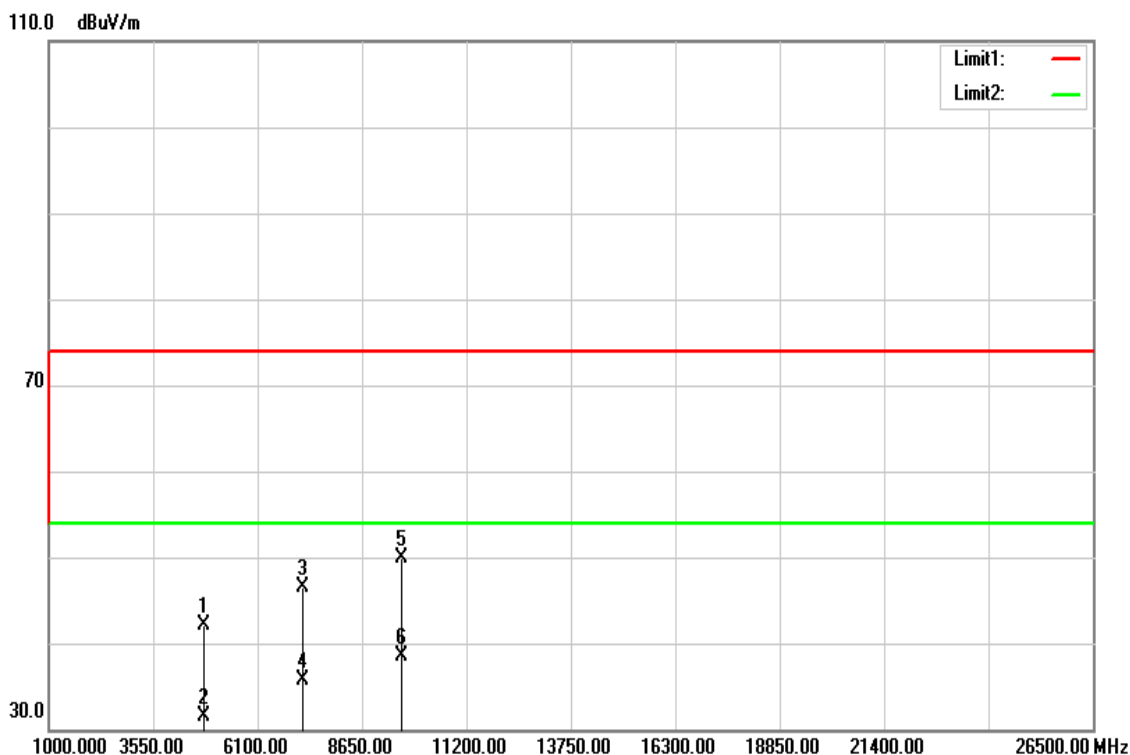


Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	37.13	5.04	42.17	74.00	-31.83	peak
4804.000	26.51	5.04	31.55	54.00	-22.45	AVG
7206.000	33.85	12.62	46.47	74.00	-27.53	peak
7206.000	23.05	12.62	35.67	54.00	-18.33	AVG
9608.000	32.38	17.60	49.98	74.00	-24.02	peak
9608.000	20.89	17.60	38.49	54.00	-15.51	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak and Average		

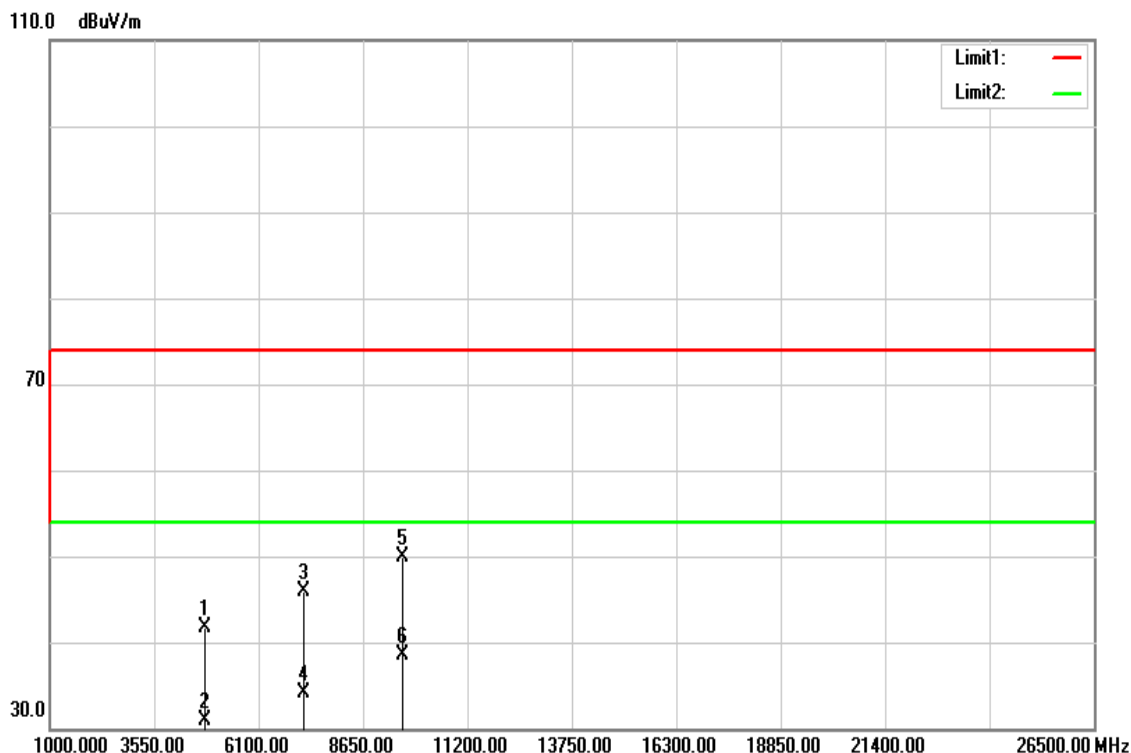


Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	36.62	5.04	41.66	74.00	-32.34	peak
4804.000	25.90	5.04	30.94	54.00	-23.06	AVG
7206.000	33.24	12.62	45.86	74.00	-28.14	peak
7206.000	21.56	12.62	34.18	54.00	-19.82	AVG
9608.000	32.26	17.60	49.86	74.00	-24.14	peak
9608.000	20.84	17.60	38.44	54.00	-15.56	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2017
Polarize	Vertical	Test Engineer	Ed Chiang
Detector	Peak and Average		

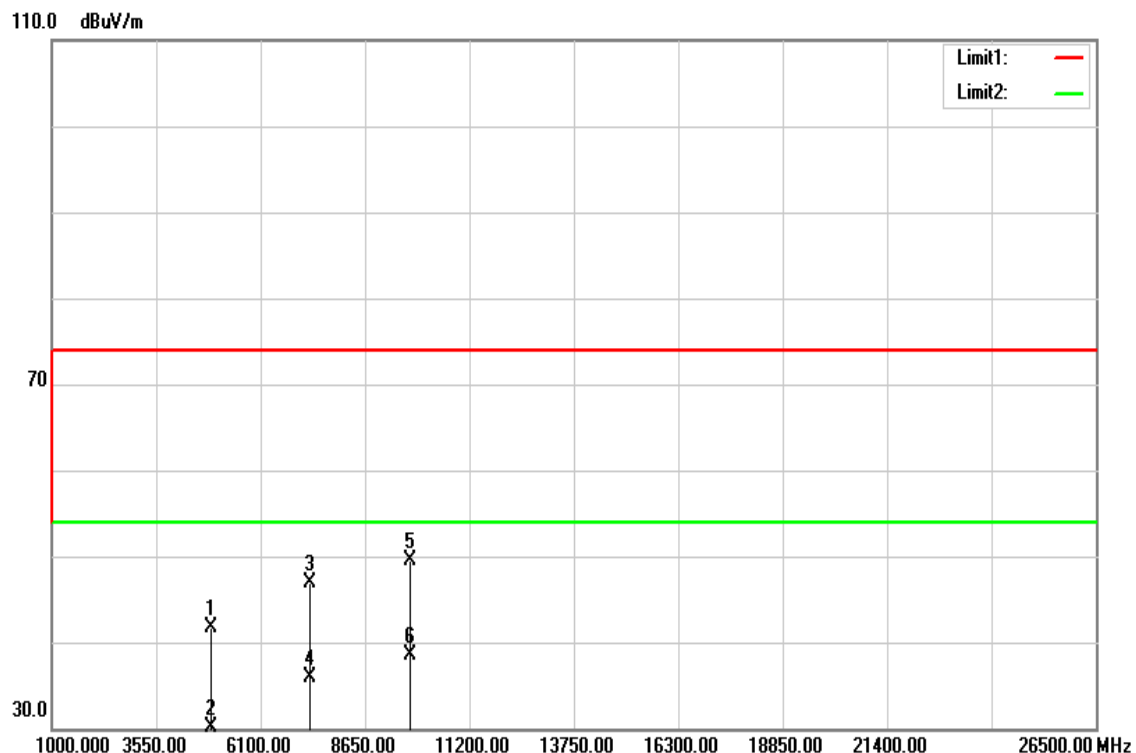


Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4880.000	36.53	5.25	41.78	74.00	-32.22	peak
4880.000	24.93	5.25	30.18	54.00	-23.82	AVG
7320.000	33.87	12.97	46.84	74.00	-27.16	peak
7320.000	22.95	12.97	35.92	54.00	-18.08	AVG
9760.000	31.93	17.60	49.53	74.00	-24.47	peak
9760.000	20.82	17.60	38.42	54.00	-15.58	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak and Average		

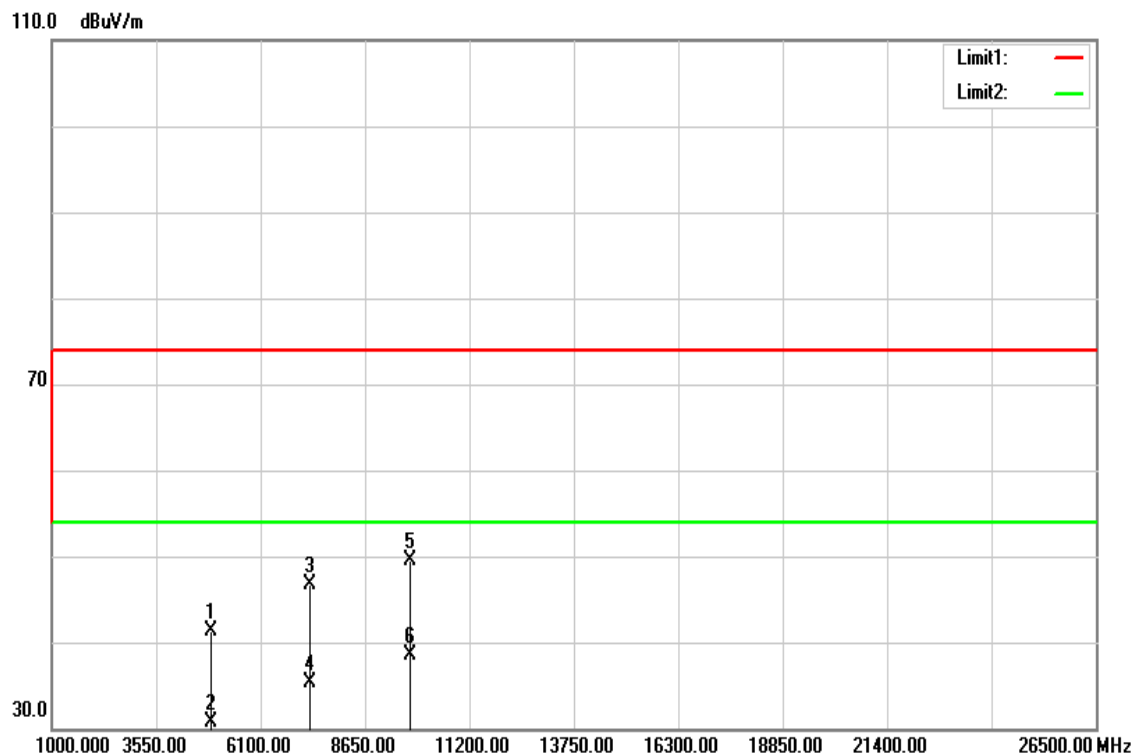


Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4880.000	36.11	5.25	41.36	74.00	-32.64	peak
4880.000	25.54	5.25	30.79	54.00	-23.21	AVG
7320.000	33.66	12.97	46.63	74.00	-27.37	peak
7320.000	22.31	12.97	35.28	54.00	-18.72	AVG
9760.000	31.93	17.60	49.53	74.00	-24.47	peak
9760.000	20.84	17.60	38.44	54.00	-15.56	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2017
Polarize	Vertical	Test Engineer	Ed Chiang
Detector	Peak and Average		

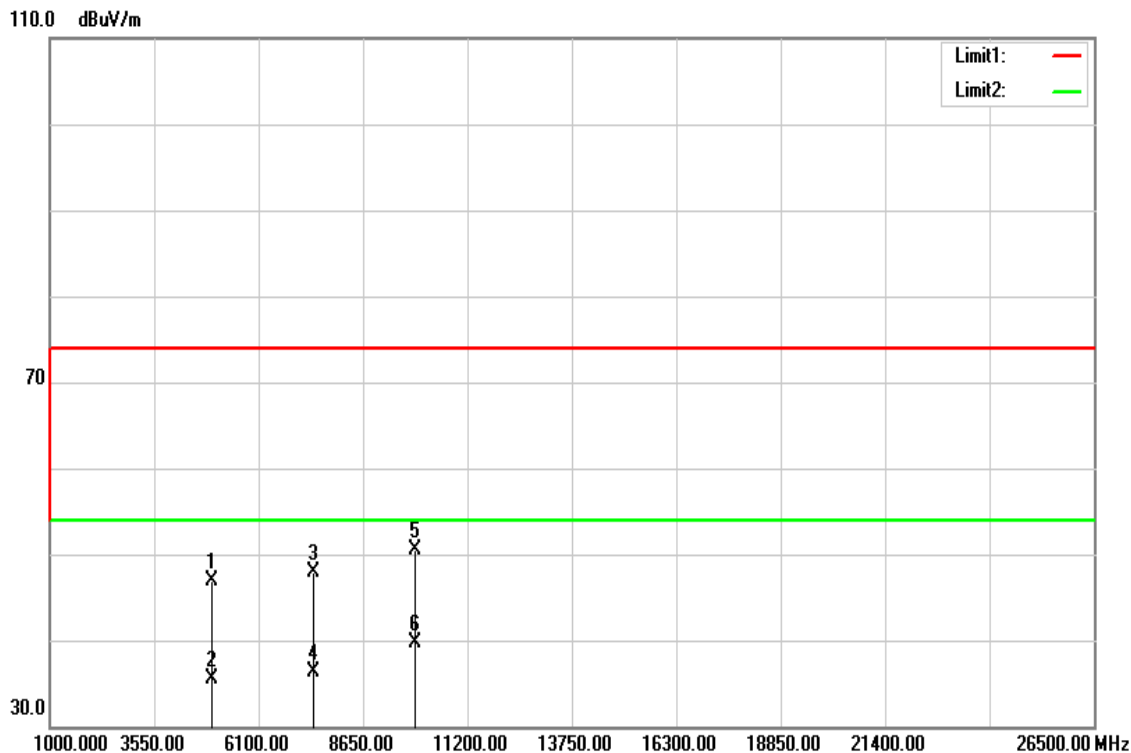


Frequency MHz	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	41.39	5.46	46.85	74.00	-27.15	peak
4960.000	29.98	5.46	35.44	54.00	-18.56	AVG
7440.000	34.58	13.33	47.91	74.00	-26.09	peak
7440.000	22.88	13.33	36.21	54.00	-17.79	AVG
9920.000	32.81	17.60	50.41	74.00	-23.59	peak
9920.000	22.12	17.60	39.72	54.00	-14.28	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	27(°C)/ 53%RH
Test Item	Harmonic	Test Date	March 24, 2017
Polarize	Horizontal	Test Engineer	Ed Chiang
Detector	Peak and Average		

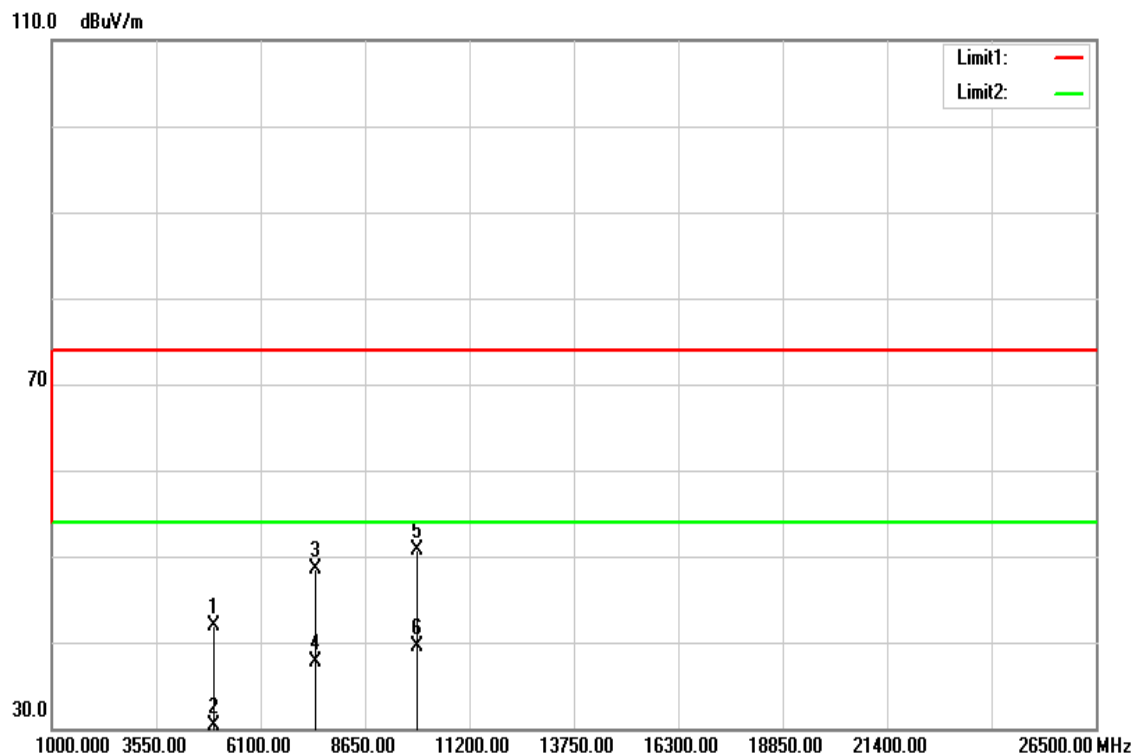

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	36.40	5.46	41.86	74.00	-32.14	peak
4960.000	24.92	5.46	30.38	54.00	-23.62	AVG
7440.000	35.12	13.33	48.45	74.00	-25.55	peak
7440.000	24.35	13.33	37.68	54.00	-16.32	AVG
9920.000	33.06	17.60	50.66	74.00	-23.34	peak
9920.000	21.88	17.60	39.48	54.00	-14.52	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit