

WiFi 5.3GHz Band

Frequency: 5280 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5280.4$ MHz; $\sigma = 5.262$ S/m; $\epsilon_r = 51.264$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2012/03/16
- Probe: EX3DV4 - SN3665; ConvF(4.01, 4.01, 4.01); Calibrated: 2012/04/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear Side/Touch/802.11a/CH56/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.38 W/kg

Rear Side/Touch/802.11a/CH56/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.84 W/kg

Peak SAR (extrapolated) = 2.84 W/kg

SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 1.72 W/kg

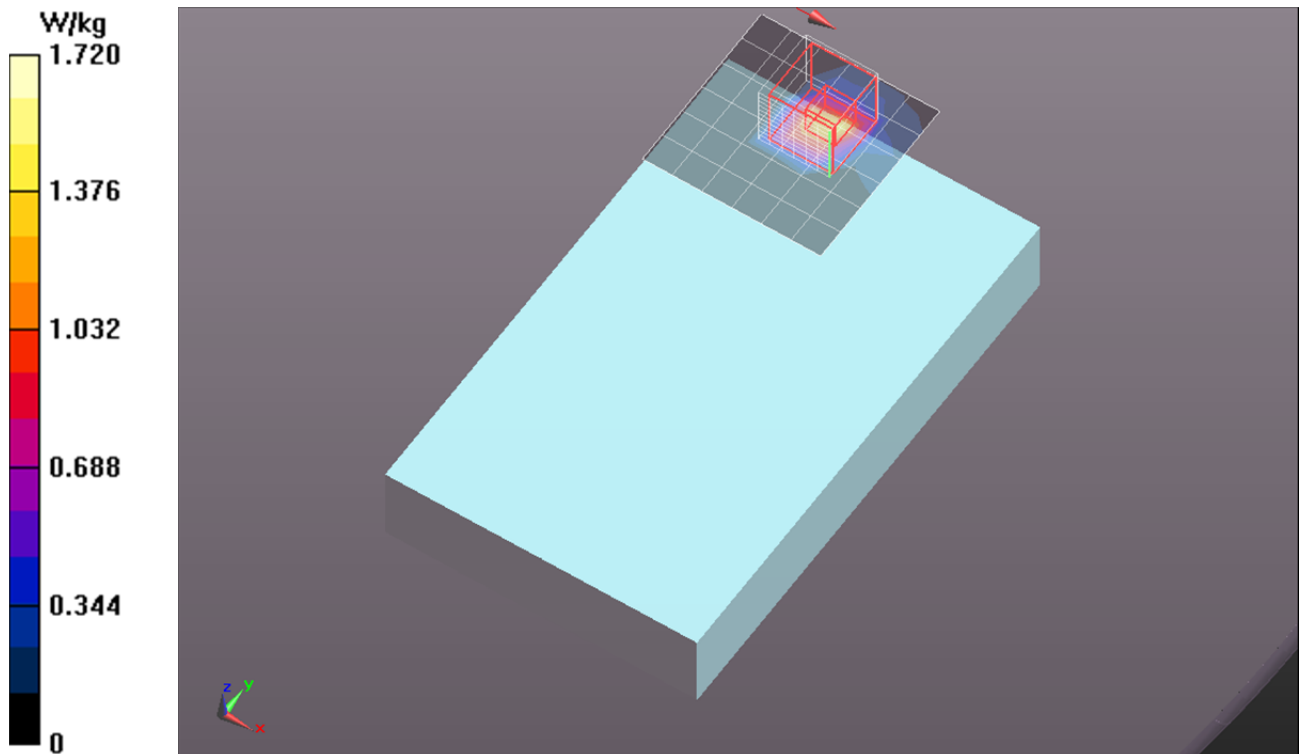

WiFi 5.3GHz Band

Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.293$ S/m; $\epsilon_r = 51.241$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2012/03/16
- Probe: EX3DV4 - SN3665; ConvF(4.01, 4.01, 4.01); Calibrated: 2012/04/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear Side/Touch/802.11a/CH64/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.58 W/kg

Rear Side/Touch/802.11a/CH64/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.01 W/kg

SAR(1 g) = 0.781 W/kg; SAR(10 g) = 0.246 W/kg


Maximum value of SAR (measured) = 1.91 W/kg

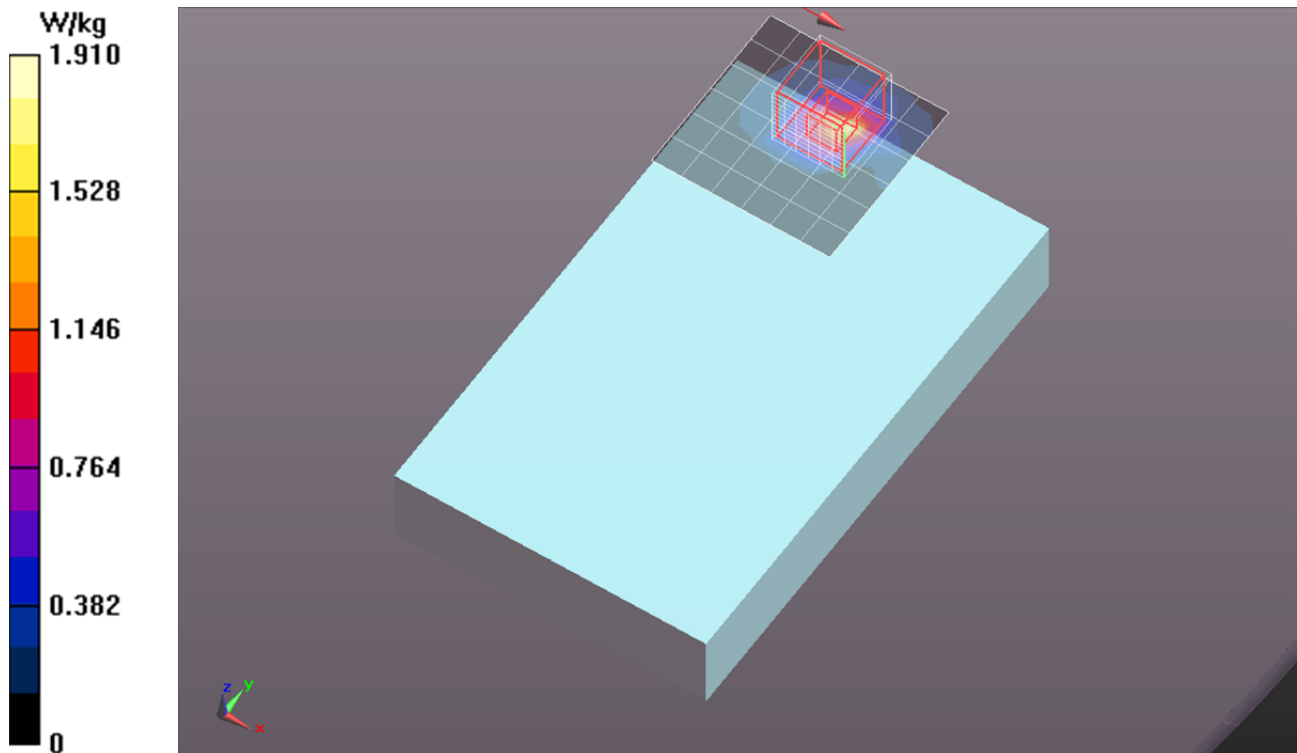

WiFi 5.3GHz Band

Frequency: 5320 MHz; Duty Cycle: 1:1

Edge/Edge3/802.11a/CH64/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.932 W/kg

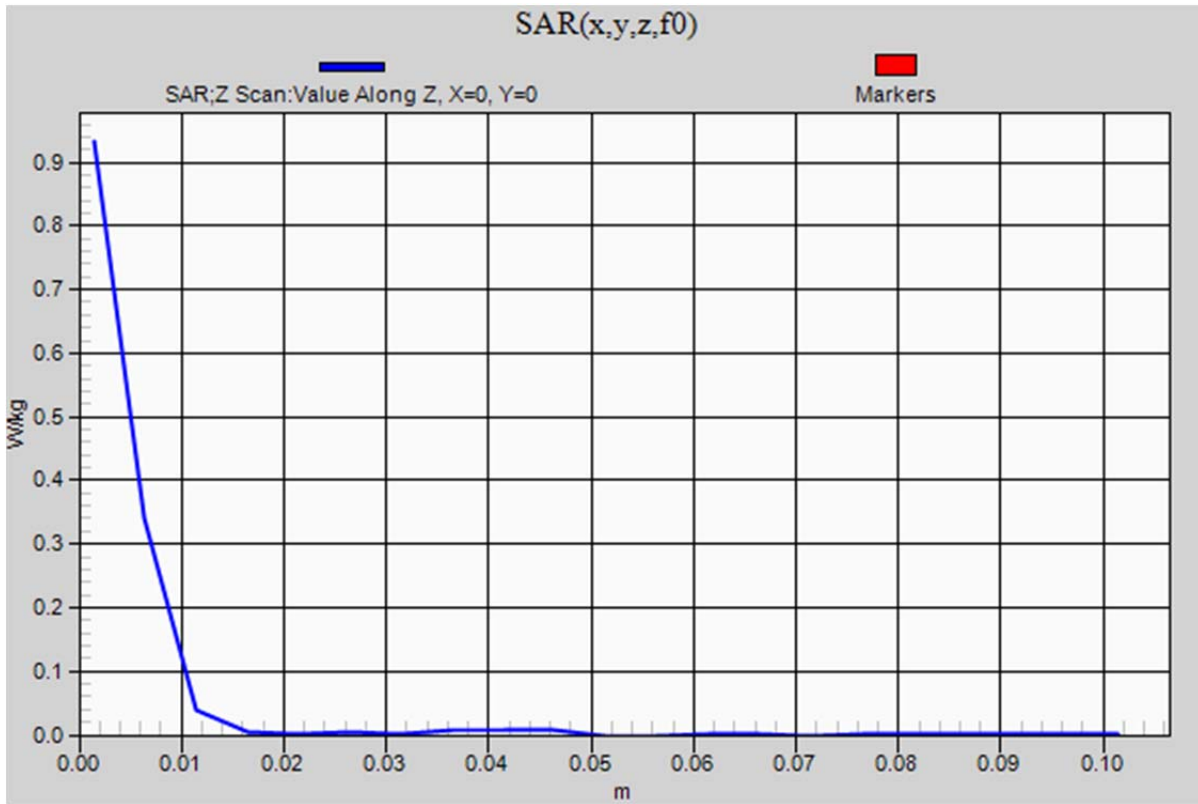

WiFi 5.3GHz Band

Frequency: 5280 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5280.4$ MHz; $\sigma = 5.262$ S/m; $\epsilon_r = 51.264$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2012/03/16
- Probe: EX3DV4 - SN3665; ConvF(4.01, 4.01, 4.01); Calibrated: 2012/04/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge3/802.11a/CH56/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.809 W/kg

Edge/Edge3/802.11a/CH56/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,


dz=2mm

Reference Value = 7.387 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 0.837 W/kg

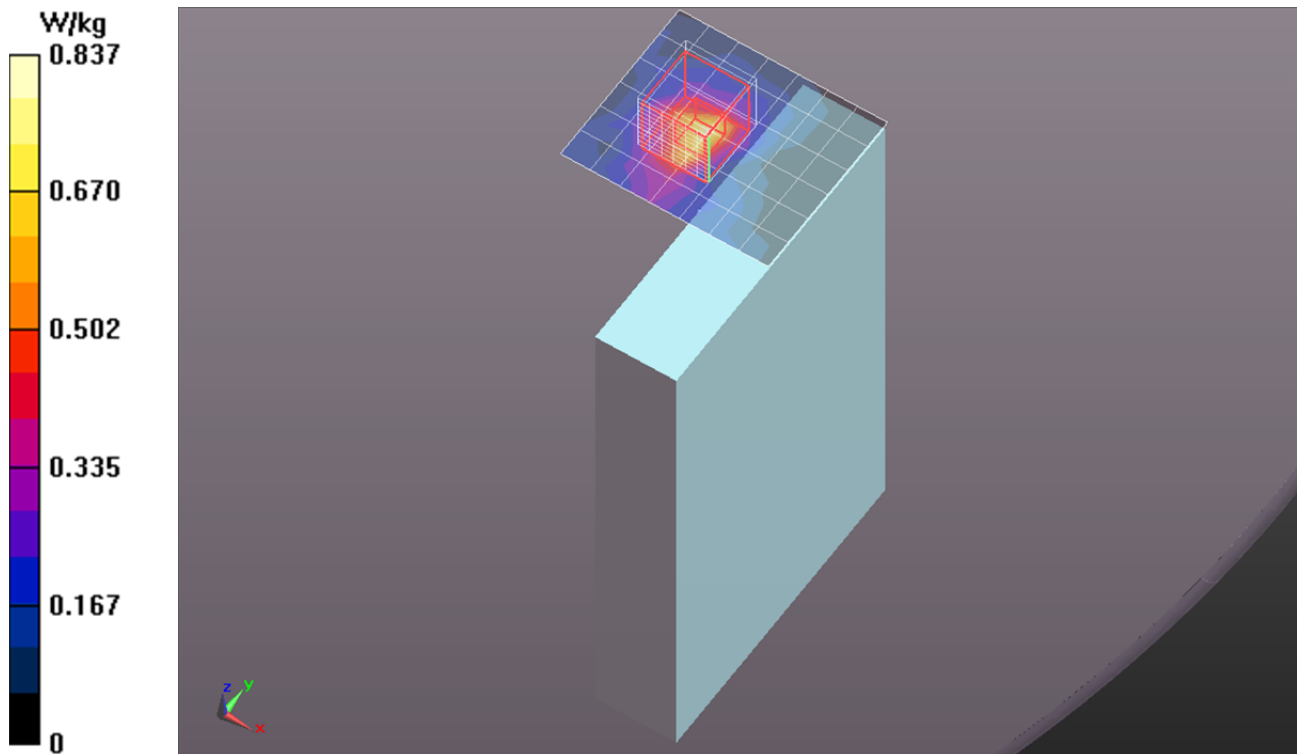

WiFi 5.3GHz Band

Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 5.293 \text{ S/m}$; $\epsilon_r = 51.241$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2012/03/16
- Probe: EX3DV4 - SN3665; ConvF(4.01, 4.01, 4.01); Calibrated: 2012/04/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge3/802.11a/CH64/Area Scan (8x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.900 W/kg

Edge/Edge3/802.11a/CH64/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,

dz=2mm

Reference Value = 8.695 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.973 W/kg

