

Fersenautomatik



Appropriate action to be in compliance with the FCC – rules:
(20db distance of carrier frequency to the first harmonic at 4.930Ghz)

Implement action:

Material:

Dimensions:


Position:

Insert a conductive strip


Kapton, coated with 35µ copper, or Cu-foil (alternative)

23mm x 2.5mm


Parallel to the antenna, stuck at the front side of BB-wall, left-justified (where is populated the quartz), 2 glue dots (see picture)

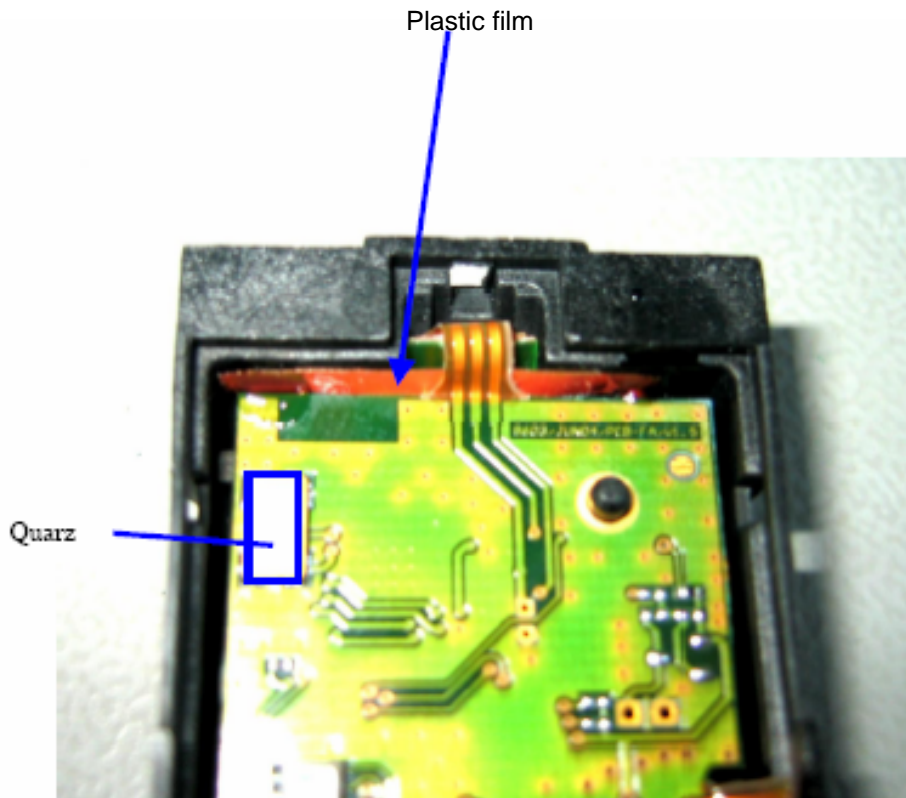


Fersenautomatik

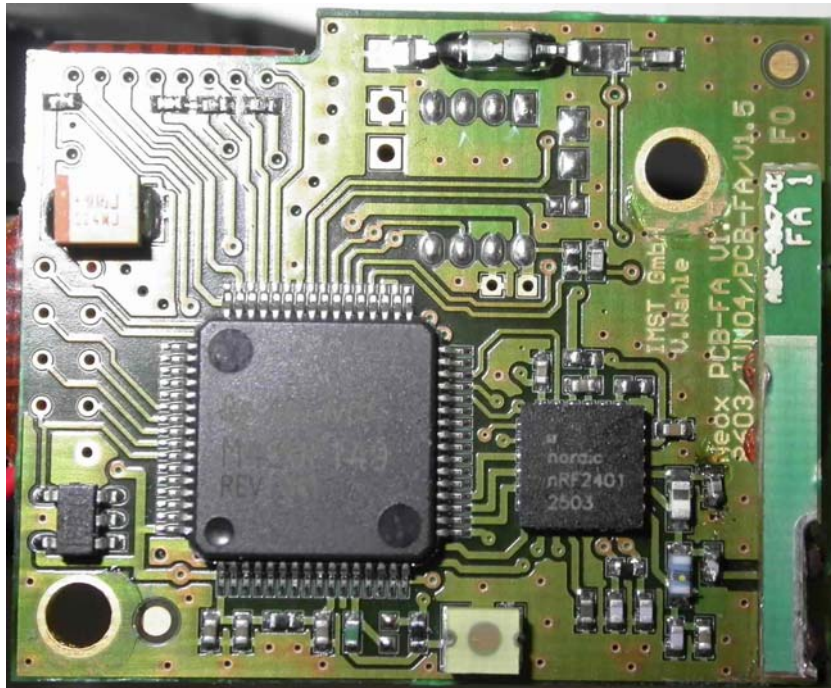



Fersenautomatik

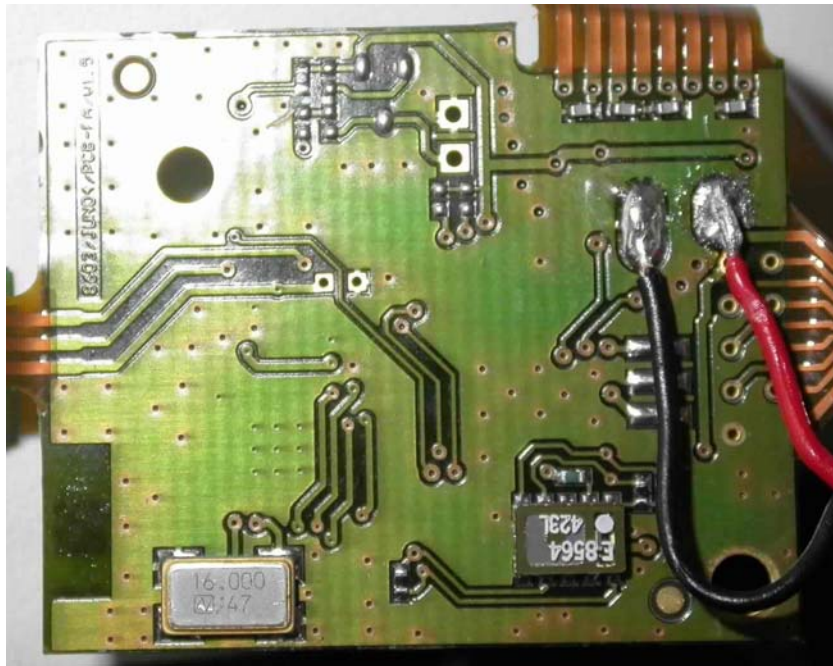

Vorderbacke

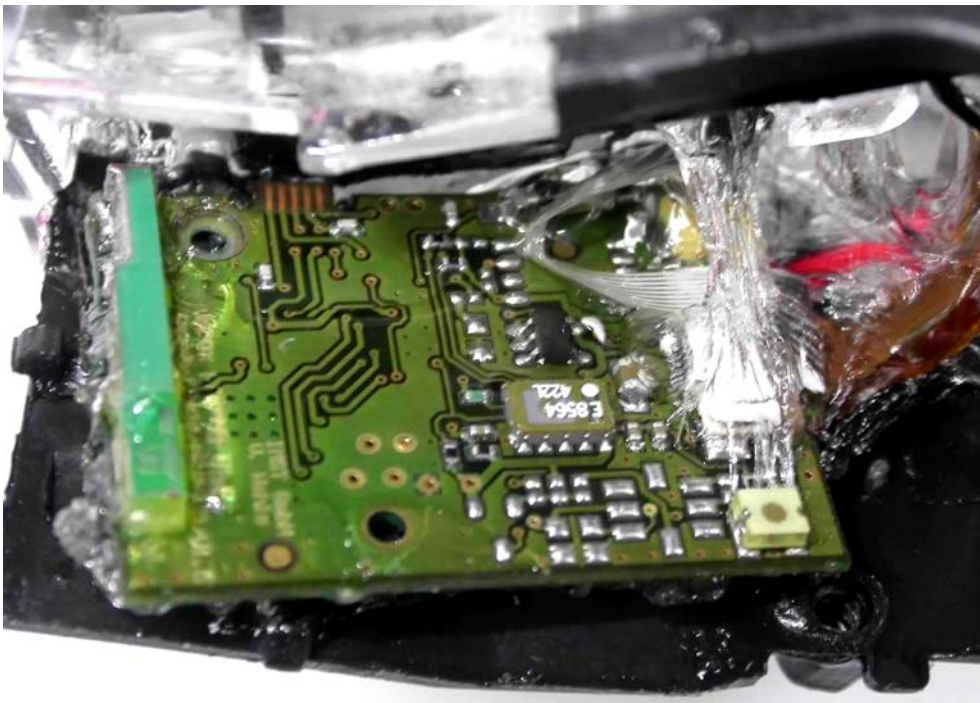

Vorderbacke

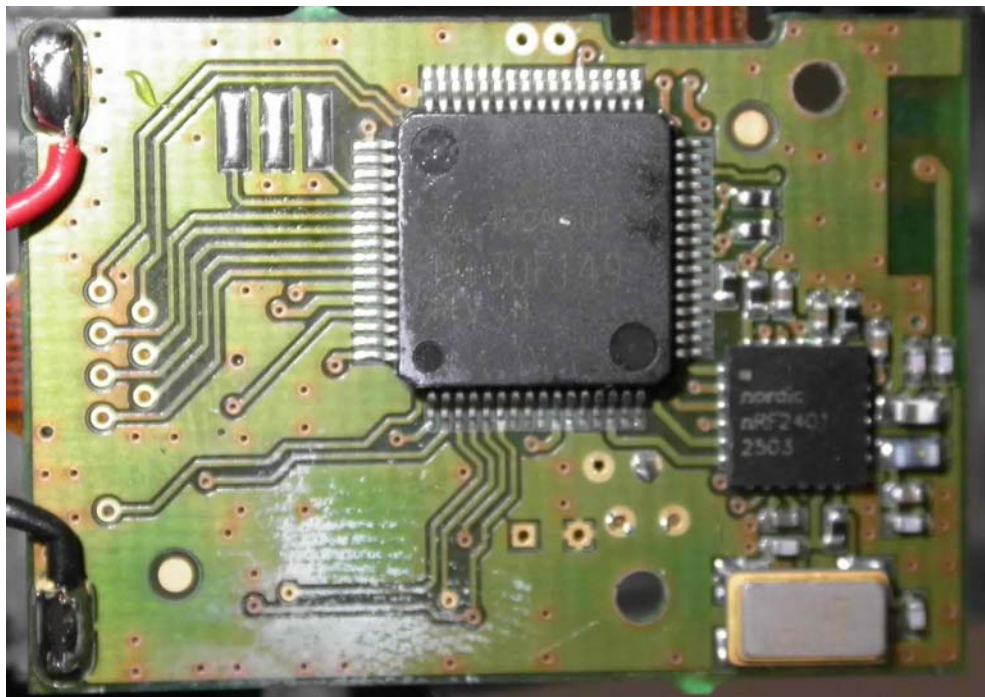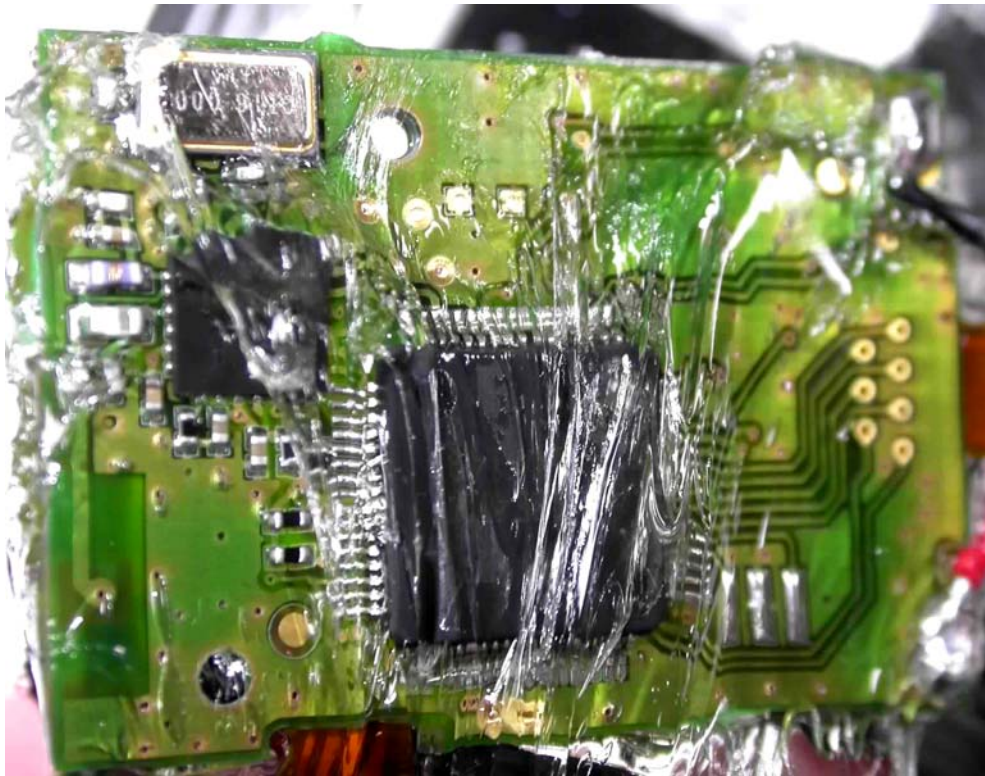

Vorderbacke

