

TEST REPORT

Product Name: 4G MPOS Device
FCC ID: SIT-KT700
Trademark: Kaissen, onedine
Model Number: KT700, otg
Prepared For: Kaissen Technology LLC
Address: 7412 SW 48 St, Suite B, Miami, FL, 33155, the United States
Manufacturer: Shenzhen Adreamer Elite Co.,Ltd.
Address: Floor4th, Fuanna industrial park, No.1qingning road, qinghu, longhua Dist, Shenzhen, China.
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: Feb. 21, 2022
Sample tested Date: Feb. 21, 2022 to Mar. 10, 2022
Issue Date: Mar. 10, 2022
Report No.: CTB220309015RFX
Test Standards: FCC Part 2, 22, 24E, 27
Test Results: PASS
Remark: This is LTE radio test report.

Compiled by:

Arron Liu

Reviewed by:

Bin Mei

Approved by:

Rita Xiao / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY.....	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP.....	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment.....	8
4.4 Test Mode	8
4.5 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. RF EXPOSURE	11
6.1 Standard Applicable	11
6.2 Test Result	11
7. RF OUTPUT POWER.....	12
7.1 Standard Applicable	12
7.2 Test Procedure	12
7.3 Summary of Test Results/Plots.....	13
8. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....	26
8.1 Standard Applicable	26
8.2 Test Procedure	26
8.3 Summary of Test Results	26
9. EMISSION BANDWIDTH.....	27
9.1 Standard Applicable	27
9.2 Test Procedure	27
9.3 Summary of Test Results/Plots.....	27
10. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL	28
10.1 Standard Applicable	28
10.2 Test Procedure	29
10.3 Summary of Test Results/Plots.....	29

11. SPURIOUS RADIATED EMISSIONS	30
11.1 Standard Applicable	30
11.2 Test Procedure	31
11.3 Summary of Test Results/Plots.....	32
12. FREQUENCY STABILITY	53
12.1 Standard Applicable	53
12.2 Test Procedure	53
12.3 Summary of Test Results/Plots.....	53

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220309015RFX	Mar. 10, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
Conducted output power	Part 2.1046(a)	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS
Effective Radiated Power of Transmitter(EIRP)	Part 22.913(a)(5)/Part27.50(h)(2)	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS
peak-to-average ratio	Part 27.50(d)	KDB 971168 D01v02r02	PASS
99% & 26dB Occupied Bandwidth	Part 2.1049(h)	KDB 971168 D01v02r02	PASS
Band Edge at antenna terminals	Part 2.1051/ Part 22.917(a)/Part 27.53(m) (4)	KDB 971168 D01v02r02	PASS
Spurious emissions at antenna terminals	Part 2.1051/ Part 22.917(a)/Part 27.53(m) (4)	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS
Field strength of spurious radiation	Part 2.1053/ Part 22.917(a)/Part 27.53(m) (4)	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS
Frequency stability	Part 2.1055/Part 27.54	TIA-603-E-2016 & KDB 971168 D01v02r02	PASS

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Receiver Reference Sensitivity level	1.9dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	KT700, otg
Model Description:	All the model are the same circuit and RF module, only the model name and inconsistencies in the size of the display. Test model : KT700
Hardware Version:	Q05M001 B1-1 QT150
Software Version:	SQ806_Userdebug_20220218
Operation Frequency:	FDD-LTE BAND 2: 1850-1910MHz FDD-LTE BAND 4:1710-1755MHz FDD-LTE BAND 5:824-849MHz FDD-LTE BAND 7:2500-2570MHz FDD-LTE BAND 12: 699-716MHz FDD-LTE BAND 17: 704-716MHz TDD-LTE BAND 41: 2555-2655MHz
Max. RF output power:	FDD-LTE BAND 2: 22.19 dBm FDD-LTE BAND 4: 23.00 dBm FDD-LTE BAND 5: 23.90 dBm FDD-LTE BAND 7: 22.11 dBm FDD-LTE BAND 17:23.60 dBm FDD-LTE BAND 12: 23.53 dBm TDD-LTE BAND 41: 22.29 dBm
Type of Modulation:	QPSK, 16QAM
Antenna installation:	Internal antenna
Antenna Gain:	FDD-LTE BAND 2:2.0dBi FDD-LTE BAND 4: 2.0dBi FDD-LTE BAND 5: 0.5dBi FDD-LTE BAND 7: 2.0 dBi FDD-LTE BAND 12: -0.5dBi FDD-LTE BAND 17: -0.5 dBi TDD-LTE BAND 41: 2.0 dBi
Ratings:	DC 5V charging from adapter Battery DC3.7V, 6000mAh

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No	Device Type	Brand	Model	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Test Mode

Test Mode List		
Test Mode	Description	Remark
TM1	FDD-LTE BAND 2	Low, Middle, High Channels
TM2	FDD-LTE BAND 4	Low, Middle, High Channels
TM3	FDD-LTE BAND 5	Low, Middle, High Channels
TM4	FDD-LTE BAND 12	Low, Middle, High Channels
TM5	FDD-LTE BAND 7	Low, Middle, High Channels
TM6	FDD-LTE BAND 17	Low, Middle, High Channels
TM7	TDD-LTE BAND 41	Low, Middle, High Channels

4.5 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):	3.7V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05

16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

6. RF EXPOSURE

6.1 Standard Applicable

According to §1.1307 and §2.1091, §2.1093, the portable transmitter must comply the RF exposure requirements.

6.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure report.

7. RF OUTPUT POWER

7.1 Standard Applicable

According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.


According to §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

According to §27.50(c)(10), portable stations (hand-held devices) in the 698-746 MHz band are limited to 3 watts ERP.

7.2 Test Procedure

Conducted output power test method:

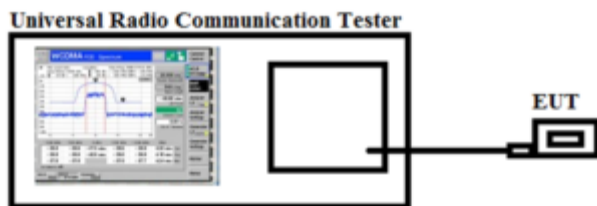

Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

7.3 Summary of Test Results/Plots

Max. Radiated Power:

FDD-LTE Band 12

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	22.51	<34.77	PASS
		H	22.45		
	MCH	V	22.98		PASS
		H	21.17		
	HCH	V	22.06		PASS
		H	21.01		
16QAM	LCH	V	22.71	<34.77	PASS
		H	21.37		
	MCH	V	22.13		PASS
		H	22.03		
	HCH	V	22.10		PASS
		H	21.42		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.94	<34.77	PASS
		H	21.72		
	MCH	V	21.55		PASS
		H	21.88		
	HCH	V	21.82		PASS
		H	21.56		
16QAM	LCH	V	22.28	<34.77	PASS
		H	21.76		
	MCH	V	22.67		PASS
		H	22.71		
	HCH	V	22.95		PASS
		H	21.99		
Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	22.69	<34.77	PASS
		H	21.55		

Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
	MCH	V	22.80	<34.77	PASS
		H	22.21		
	HCH	V	22.15		PASS
		H	21.76		
16QAM	LCH	V	22.53		PASS
		H	22.29		
	MCH	V	22.25		PASS
		H	21.43		
	HCH	V	21.58	PASS	
		H	21.68		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	22.31	<34.77	PASS
		H	22.98		
	MCH	V	21.73		PASS
		H	22.66		
	HCH	V	22.79		PASS
		H	22.57		
16QAM	LCH	V	21.87	<34.77	PASS
		H	22.89		
	MCH	V	22.36		PASS
		H	21.17		
	HCH	V	21.48		PASS
		H	22.25		

FDD-LTE Band 17

Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.47	<34.77	PASS
		H	21.50		
	MCH	V	21.72		PASS
		H	22.18		
	HCH	V	21.96		PASS
		H	21.04		
16QAM	LCH	V	21.83	<34.77	PASS
		H	21.55		
	MCH	V	21.36		PASS

		H	21.72		
	HCH	V	21.65		PASS
		H	22.07		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.40	<34.77	PASS
		H	21.81		
	MCH	V	21.38		PASS
		H	22.50		
	HCH	V	21.87		PASS
		H	21.66		
16QAM	LCH	V	22.22	<34.77	PASS
		H	22.11		
	MCH	V	22.51		PASS
		H	21.68		
	HCH	V	21.58		PASS
		H	21.37		

FDD-LTE Band 2

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	ERP [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.45	<33.00	PASS
		H	20.05		
	MCH	V	19.69		PASS
		H	20.07		
	HCH	V	20.35		PASS
		H	19.51		
16QAM	LCH	V	20.67	<33.00	PASS
		H	20.81		
	MCH	V	19.54		PASS
		H	20.25		
	HCH	V	20.81		PASS
		H	20.10		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.08	<33.00	PASS
		H	20.12		
	MCH	V	20.73		PASS
		H	19.38		
	HCH	V	20.53		PASS
		H	20.49		
16QAM	LCH	V	19.71	<33.00	PASS
		H	20.70		
	MCH	V	20.55		PASS
		H	20.85		
	HCH	V	19.20		PASS
		H	20.70		
Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.07	<33.00	PASS
		H	19.15		
	MCH	V	19.73		PASS
		H	20.40		
	HCH	V	20.70		PASS
		H	19.23		

16QAM	LCH	V	20.56	<33.00	PASS
		H	19.07		
	MCH	V	19.33		PASS
		H	20.93		
	HCH	V	20.93		PASS
		H	20.66		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.11	<33.00	PASS
		H	20.69		
	MCH	V	19.07		PASS
		H	20.96		
	HCH	V	19.47		PASS
		H	19.09		
16QAM	LCH	V	20.16	<33.00	PASS
		H	19.47		
	MCH	V	20.04		PASS
		H	19.45		
	HCH	V	19.61		PASS
		H	19.86		
Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.87	<33.00	PASS
		H	20.38		
	MCH	V	19.29		PASS
		H	20.45		
	HCH	V	20.09		PASS
		H	20.49		
16QAM	LCH	V	19.08	<33.00	PASS
		H	20.99		
	MCH	V	20.88		PASS
		H	19.65		
	HCH	V	19.13		PASS
		H	20.08		
Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.06	<33.00	PASS

	MCH	H	20.08		PASS	
		V	19.60			
	HCH	H	19.18			PASS
		V	20.00			
16QAM	LCH	H	19.88	<33.00		PASS
		V	19.70			
	MCH	H	19.59			PASS
		V	19.62			
HCH	H	20.93		PASS		
	V	19.14				

FDD-LTE Band 4

Channel Bandwidth: 1.4 MHz							
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict		
QPSK	LCH	V	20.45	<30.00	PASS		
		H	21.32				
	MCH	V	20.71			PASS	
		H	21.31				
	HCH	V	21.90				PASS
		H	21.72				
16QAM	LCH	V	21.65	<30.00			PASS
		H	21.73				
	MCH	V	21.85				PASS
		H	21.22				
	HCH	V	20.26				PASS
		H	21.69				
Channel Bandwidth: 3 MHz							
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)			Verdict
QPSK	LCH	V	21.00	<30.00	PASS		
		H	20.12				
	MCH	V	20.99			PASS	
		H	20.01				
	HCH	V	21.53				PASS
		H	21.29				
16QAM	LCH	V	21.73	<30.00			PASS
		H	22.00				
	MCH	V	21.16				PASS
		H	21.50				

	HCH	V	20.77		PASS
		H	20.99		
Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.54	<30.00	PASS
		H	21.89		PASS
	MCH	V	20.67		PASS
		H	21.93		PASS
	HCH	V	20.32		PASS
		H	20.98		PASS
16QAM	LCH	V	20.73	<30.00	PASS
		H	21.55		PASS
	MCH	V	21.50		PASS
		H	21.81		PASS
	HCH	V	21.60		PASS
		H	21.39		PASS
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.50	<30.00	PASS
		H	21.22		PASS
	MCH	V	21.44		PASS
		H	21.75		PASS
	HCH	V	21.15		PASS
		H	20.81		PASS
16QAM	LCH	V	20.40	<30.00	PASS
		H	21.23		PASS
	MCH	V	21.04		PASS
		H	21.69		PASS
	HCH	V	20.27		PASS
		H	20.69		PASS
Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.72	<30.00	PASS
		H	20.65		PASS
	MCH	V	20.02		PASS
		H	21.40		PASS
	HCH	V	20.91		PASS

		H	20.82		
16QAM	LCH	V	21.08	<30.00	PASS
		H	20.56		
	MCH	V	20.77		PASS
		H	21.40		
	HCH	V	21.71		PASS
		H	21.53		
Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.20	<30.00	PASS
		H	20.62		
	MCH	V	20.62		PASS
		H	20.69		
	HCH	V	20.75		PASS
		H	21.75		
16QAM	LCH	V	21.06	<30.00	PASS
		H	20.60		
	MCH	V	21.89		PASS
		H	21.09		
	HCH	V	21.26		PASS
		H	21.02		

FDD-LTE Band 5

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	22.43	<38.45	PASS
		H	21.23		
	MCH	V	21.80		PASS
		H	21.66		
	HCH	V	22.20		PASS
		H	21.44		
16QAM	LCH	V	22.42	<38.45	PASS
		H	22.78		
	MCH	V	22.73		PASS
		H	22.09		
	HCH	V	22.95		PASS
		H	22.02		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	22.73	<38.45	PASS
		H	21.20		
	MCH	V	21.67		PASS
		H	22.21		
	HCH	V	22.40		PASS
		H	22.78		
16QAM	LCH	V	21.54	<38.45	PASS
		H	22.24		
	MCH	V	22.19		PASS
		H	22.50		
	HCH	V	22.57		PASS
		H	22.43		
Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.50	<38.45	PASS
		H	22.62		
	MCH	V	22.31		PASS
		H	22.02		
	HCH	V	22.40		PASS
		H	22.10		

Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
16QAM	LCH	V	21.73	<38.45	PASS
		H	21.33		
	MCH	V	21.03		PASS
		H	21.78		
	HCH	V	21.78		PASS
		H	22.75		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	21.48	<38.45	PASS
		H	22.37		
	MCH	V	21.81		PASS
		H	21.72		
	HCH	V	21.27		PASS
		H	21.30		
16QAM	LCH	V	22.55	<38.45	PASS
		H	21.53		
	MCH	V	21.70		PASS
		H	22.39		
	HCH	V	21.86		PASS
		H	21.90		

FDD-LTE Band 7

Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.21	<33.00	PASS
		H	19.72		
	MCH	V	20.46		PASS
		H	20.04		
	HCH	V	20.35		PASS
		H	20.17		
16QAM	LCH	V	20.56	<33.00	PASS
		H	19.36		
	MCH	V	19.72		PASS
		H	20.70		
	HCH	V	19.12		PASS
		H	19.77		
Channel Bandwidth: 10 MHz					

Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.80	<33.00	PASS
		H	19.70		
	MCH	V	20.91		PASS
		H	19.40		
	HCH	V	20.43		PASS
		H	20.96		
16QAM	LCH	V	20.76	<33.00	PASS
		H	20.01		
	MCH	V	19.04		PASS
		H	19.91		
	HCH	V	20.02		PASS
		H	20.30		
Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.63	<33.00	PASS
		H	20.86		
	MCH	V	20.67		PASS
		H	19.39		
	HCH	V	19.83		PASS
		H	20.67		
16QAM	LCH	V	19.18	<33.00	PASS
		H	19.71		
	MCH	V	20.78		PASS
		H	20.62		
	HCH	V	20.22		PASS
		H	19.43		
Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.67	<33.00	PASS
		H	20.37		
	MCH	V	19.18		PASS
		H	20.28		
	HCH	V	19.66		PASS
		H	20.22		
16QAM	LCH	V	19.54	<33.00	PASS
		H	19.89		

	MCH	V	20.83		PASS
		H	19.85		
	HCH	V	20.98		PASS
		H	20.71		

TDD-LTE Band 41

Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.70	<33.00	PASS
		H	20.47		
	MCH	V	20.98		PASS
		H	20.56		
	HCH	V	20.62		PASS
		H	20.56		
16QAM	LCH	V	20.06	<33.00	PASS
		H	20.12		
	MCH	V	20.97		PASS
		H	19.68		
	HCH	V	19.73		PASS
		H	20.71		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.43	<33.00	PASS
		H	20.88		
	MCH	V	20.33		PASS
		H	19.75		
	HCH	V	19.92		PASS
		H	20.57		
16QAM	LCH	V	19.82	<33.00	PASS
		H	20.54		
	MCH	V	19.02		PASS
		H	20.82		
	HCH	V	20.74		PASS
		H	20.59		
Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.73	<33.00	PASS

	MCH	H	20.84		PASS
		V	19.41		
	HCH	H	20.72		PASS
		V	20.97		
16QAM	LCH	V	20.57	<33.00	PASS
		H	19.78		
	MCH	V	20.14		PASS
		H	19.69		
	HCH	V	19.41		PASS
		H	20.20		
Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.56	<33.00	PASS
		H	20.32		
	MCH	V	19.79		PASS
		H	20.75		
	HCH	V	19.59		PASS
		H	19.57		
16QAM	LCH	V	19.28	<33.00	PASS
		H	19.96		
	MCH	V	20.95		PASS
		H	20.67		
	HCH	V	20.37		PASS
		H	20.85		

Max. Conducted Output Power

Please refer to Appendix A: Average Power Output Data

Test result: Pass

8. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER

8.1 Standard Applicable

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

8.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal " RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the " on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

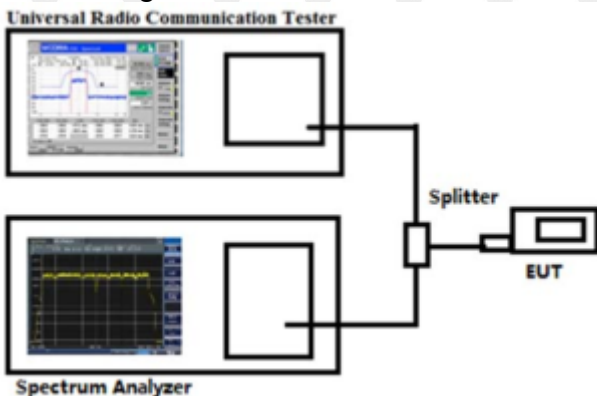

8.3 Summary of Test Results

Please refer to Appendix B: Peak-to-Average Ratio

Test result: Pass

9. EMISSION BANDWIDTH

9.1 Standard Applicable

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

9.2 Test Procedure

According to § 22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test Configuration for the emission bandwidth testing:

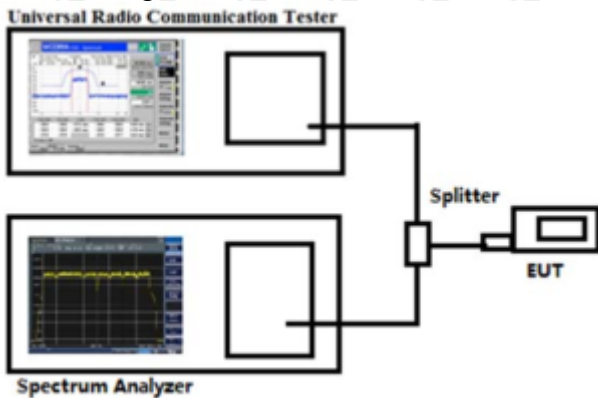

9.3 Summary of Test Results/Plots

Please refer to Appendix C: 26dB Bandwidth and Occupied Bandwidth
 Test result: Pass

10. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL

10.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to §27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to §27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation,


measured in watts, by at least $43 + 10 \log (P)$ dB.

According to §27.53(m)(4), for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.

10.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10 th harmonic.

Test Configuration for the out of band emissions testing:

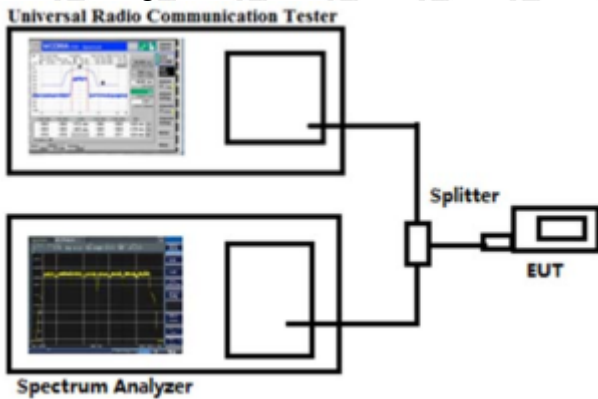

10.3 Summary of Test Results/Plots

Please refer to Appendix D & E: Band Edge & Conducted Spurious Emission
 Test result: Pass

11.SPURIOUS RADIATED EMISSIONS

11.1 Standard Applicable

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to § 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to § 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to § 27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to § 27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to § 27.53(g) the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of

operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

11.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA-603-E and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

11.3 Summary of Test Results/Plots

Note: 1. this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

2. All test modes (different bandwidth and different modulation) are performed, but only the worst case is recorded in this report.

Test Data:
QPSK

Band 12 23017 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1196.98	150	142	-58.90	-13	-45.90	Pass	H
1808.86	146	280	-50.84	-13	-37.84	Pass	H
3938.85	150	330	-48.27	-13	-35.27	Pass	H
5784.37	146	194	-44.72	-13	-31.72	Pass	H
6523.24	149	260	-49.90	-13	-36.90	Pass	H
7968.19	151	31	-45.46	-13	-32.46	Pass	H
1204.59	149	4	-51.77	-13	-38.77	Pass	V
1462.97	148	257	-62.87	-13	-49.87	Pass	V
3590.99	147	55	-49.87	-13	-36.87	Pass	V
3915.08	148	273	-52.60	-13	-39.60	Pass	V
5921.91	150	136	-54.53	-13	-41.53	Pass	V
6532.95	150	16	-49.93	-13	-36.93	Pass	V

Band 12 23095 channel/BW1.4 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1314.06	150	142	-59.26	-13	-46.26	Pass	H
1626.47	146	280	-56.73	-13	-43.73	Pass	H
3784.37	150	330	-48.88	-13	-35.88	Pass	H
5783.21	146	194	-45.08	-13	-32.08	Pass	H
6531.24	149	260	-51.60	-13	-38.60	Pass	H
8054.33	151	31	-48.89	-13	-35.89	Pass	H
1163.25	149	4	-52.73	-13	-39.73	Pass	V
1334.69	148	257	-63.44	-13	-50.44	Pass	V
3580.13	147	55	-50.50	-13	-37.50	Pass	V
3935.12	148	273	-54.04	-13	-41.04	Pass	V
5896.69	150	136	-49.74	-13	-36.74	Pass	V
6581.68	150	16	-49.31	-13	-36.31	Pass	V

Band 12 23173 channel/BW1.4 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1287.01	150	142	-53.09	-13	-40.09	Pass	H
1772.54	146	280	-51.04	-13	-38.04	Pass	H
3883.42	150	330	-47.37	-13	-34.37	Pass	H
5896.39	146	194	-42.54	-13	-29.54	Pass	H
6407.34	149	260	-46.98	-13	-33.98	Pass	H
8039.46	151	31	-48.87	-13	-35.87	Pass	H
1277.90	149	4	-55.18	-13	-42.18	Pass	V
1453.15	148	257	-64.95	-13	-51.95	Pass	V
3687.57	147	55	-51.44	-13	-38.44	Pass	V
3909.10	148	273	-49.57	-13	-36.57	Pass	V
5763.26	150	136	-54.27	-13	-41.27	Pass	V
6510.20	150	16	-45.11	-13	-32.11	Pass	V

16QAM

Band 12 23017 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1320.02	150	142	-55.65	-13	-42.65	Pass	H
1803.00	146	280	-50.98	-13	-37.98	Pass	H
3873.99	150	330	-45.99	-13	-32.99	Pass	H
5922.81	146	194	-45.30	-13	-32.30	Pass	H
6382.10	149	260	-48.26	-13	-35.26	Pass	H
8086.96	151	31	-47.24	-13	-34.24	Pass	H
1298.10	149	4	-50.56	-13	-37.56	Pass	V
1431.41	148	257	-64.83	-13	-51.83	Pass	V
3655.76	147	55	-54.66	-13	-41.66	Pass	V
3915.72	148	273	-52.77	-13	-39.77	Pass	V
5834.27	150	136	-51.02	-13	-38.02	Pass	V
6527.01	150	16	-47.81	-13	-34.81	Pass	V

Band 12 23095 channel/BW1.4 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1197.36	150	142	-56.96	-13	-43.96	Pass	H
1786.96	146	280	-56.70	-13	-43.70	Pass	H
3794.32	150	330	-46.00	-13	-33.00	Pass	H
5913.96	146	194	-45.79	-13	-32.79	Pass	H
6389.13	149	260	-50.99	-13	-37.99	Pass	H
8020.44	151	31	-46.97	-13	-33.97	Pass	H
1237.46	149	4	-50.53	-13	-37.53	Pass	V
1427.06	148	257	-60.79	-13	-47.79	Pass	V
3578.93	147	55	-54.20	-13	-41.20	Pass	V
3905.50	148	273	-50.09	-13	-37.09	Pass	V
5880.05	150	136	-48.06	-13	-35.06	Pass	V
6467.25	150	16	-46.95	-13	-33.95	Pass	V

Band 12 23173 channel/BW1.4 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1365.45	150	142	-54.21	-13	-41.21	Pass	H
1795.97	146	280	-51.88	-13	-38.88	Pass	H
3933.06	150	330	-49.24	-13	-36.24	Pass	H
5772.32	146	194	-45.06	-13	-32.06	Pass	H
6527.05	149	260	-49.85	-13	-36.85	Pass	H
7984.26	151	31	-48.97	-13	-35.97	Pass	H
1282.28	149	4	-51.63	-13	-38.63	Pass	V
1469.93	148	257	-61.95	-13	-48.95	Pass	V
3529.84	147	55	-53.10	-13	-40.10	Pass	V
4000.58	148	273	-51.11	-13	-38.11	Pass	V
5836.96	150	136	-48.67	-13	-35.67	Pass	V
6531.32	150	16	-50.71	-13	-37.71	Pass	V

Note:

- 1) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 2) Tested with all kind of bandwidth, RB Size and RB Offset, Found the 1.4MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

QPSK

Band 17 23755 channel/BW5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1232.84	150	142	-57.38	-13	-44.38	Pass	H
1643.27	146	280	-51.83	-13	-38.83	Pass	H
3935.25	150	330	-52.14	-13	-39.14	Pass	H
5849.64	146	194	-43.13	-13	-30.13	Pass	H
6539.04	149	260	-48.71	-13	-35.71	Pass	H
8008.47	151	31	-48.82	-13	-35.82	Pass	H
1209.18	149	4	-53.16	-13	-40.16	Pass	V
1464.20	148	257	-59.29	-13	-46.29	Pass	V
3570.17	147	55	-49.56	-13	-36.56	Pass	V
4005.47	148	273	-53.75	-13	-40.75	Pass	V
5755.57	150	136	-50.56	-13	-37.56	Pass	V
6489.10	150	16	-48.35	-13	-35.35	Pass	V

Band 17 23790 channel/BW5 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1270.46	150	142	-55.80	-13	-42.80	Pass	H
1805.69	146	280	-51.07	-13	-38.07	Pass	H
3926.14	150	330	-47.50	-13	-34.50	Pass	H
5933.55	146	194	-40.98	-13	-27.98	Pass	H
6478.11	149	260	-51.15	-13	-38.15	Pass	H
8015.79	151	31	-48.06	-13	-35.06	Pass	H
1175.46	149	4	-53.34	-13	-40.34	Pass	V
1389.75	148	257	-65.93	-13	-52.93	Pass	V
3689.11	147	55	-49.13	-13	-36.13	Pass	V
3878.03	148	273	-54.72	-13	-41.72	Pass	V
5752.26	150	136	-53.04	-13	-40.04	Pass	V
6535.32	150	16	-46.40	-13	-33.40	Pass	V

Band 17 23825 channel/BW5 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1354.61	150	142	-59.51	-13	-46.51	Pass	H
1789.34	146	280	-55.08	-13	-42.08	Pass	H
3812.31	150	330	-46.40	-13	-33.40	Pass	H
5960.96	146	194	-43.22	-13	-30.22	Pass	H
6515.18	149	260	-51.43	-13	-38.43	Pass	H
7931.76	151	31	-48.06	-13	-35.06	Pass	H
1188.08	149	4	-55.42	-13	-42.42	Pass	V
1357.62	148	257	-65.28	-13	-52.28	Pass	V
3523.77	147	55	-48.29	-13	-35.29	Pass	V
3838.93	148	273	-53.98	-13	-40.98	Pass	V
5779.14	150	136	-49.12	-13	-36.12	Pass	V
6469.68	150	16	-49.02	-13	-36.02	Pass	V

16QAM

Band 17 23755 channel/BW5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1208.03	150	142	-57.65	-13	-44.65	Pass	H
1648.41	146	280	-56.64	-13	-43.64	Pass	H
3936.14	150	330	-50.59	-13	-37.59	Pass	H
5940.34	146	194	-41.33	-13	-28.33	Pass	H
6545.47	149	260	-49.35	-13	-36.35	Pass	H
8013.49	151	31	-47.43	-13	-34.43	Pass	H
1270.67	149	4	-56.43	-13	-43.43	Pass	V
1393.18	148	257	-61.96	-13	-48.96	Pass	V
3569.83	147	55	-52.21	-13	-39.21	Pass	V
3943.68	148	273	-53.05	-13	-40.05	Pass	V
5850.37	150	136	-50.67	-13	-37.67	Pass	V
6569.61	150	16	-45.65	-13	-32.65	Pass	V

Band 17 23790 channel/BW5 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1383.46	150	142	-55.79	-13	-42.79	Pass	H
1778.19	146	280	-55.91	-13	-42.91	Pass	H
3960.94	150	330	-46.43	-13	-33.43	Pass	H
5901.55	146	194	-46.11	-13	-33.11	Pass	H
6421.47	149	260	-50.59	-13	-37.59	Pass	H
7965.13	151	31	-43.49	-13	-30.49	Pass	H
1317.30	149	4	-53.73	-13	-40.73	Pass	V
1425.53	148	257	-62.80	-13	-49.80	Pass	V
3630.22	147	55	-49.65	-13	-36.65	Pass	V
3883.66	148	273	-55.35	-13	-42.35	Pass	V
5775.27	150	136	-50.61	-13	-37.61	Pass	V
6536.69	150	16	-51.82	-13	-38.82	Pass	V

Band 17 23825 channel/BW5 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1200.53	150	142	-53.40	-13	-40.40	Pass	H
1732.61	146	280	-56.47	-13	-43.47	Pass	H
3858.92	150	330	-47.83	-13	-34.83	Pass	H
5788.04	146	194	-43.89	-13	-30.89	Pass	H
6445.42	149	260	-48.95	-13	-35.95	Pass	H
8069.35	151	31	-45.66	-13	-32.66	Pass	H
1157.81	149	4	-52.87	-13	-39.87	Pass	V
1368.07	148	257	-63.09	-13	-50.09	Pass	V
3599.02	147	55	-49.91	-13	-36.91	Pass	V
3899.15	148	273	-55.59	-13	-42.59	Pass	V
5884.79	150	136	-49.30	-13	-36.30	Pass	V
6444.33	150	16	-50.07	-13	-37.07	Pass	V

QPSK

Band 7 20775 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1299.45	150	142	-54.57	-13	-41.57	Pass	H
1699.72	146	280	-54.25	-13	-41.25	Pass	H
3939.36	150	330	-50.80	-13	-37.80	Pass	H
5846.06	146	194	-42.29	-13	-29.29	Pass	H
6500.03	149	260	-53.29	-13	-40.29	Pass	H
8062.33	151	31	-48.29	-13	-35.29	Pass	H
1271.20	149	4	-57.03	-13	-44.03	Pass	V
1480.44	148	257	-59.67	-13	-46.67	Pass	V
3537.96	147	55	-50.63	-13	-37.63	Pass	V
3856.76	148	273	-50.67	-13	-37.67	Pass	V
5903.00	150	136	-54.19	-13	-41.19	Pass	V
6454.65	150	16	-46.82	-13	-33.82	Pass	V

Band 7 21100 channel/BW 5 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1347.48	150	142	-59.12	-13	-46.12	Pass	H
1682.10	146	280	-55.54	-13	-42.54	Pass	H
3848.84	150	330	-46.73	-13	-33.73	Pass	H
5950.68	146	194	-43.41	-13	-30.41	Pass	H
6361.30	149	260	-49.61	-13	-36.61	Pass	H
8058.67	151	31	-44.20	-13	-31.20	Pass	H
1290.79	149	4	-52.72	-13	-39.72	Pass	V
1446.05	148	257	-63.65	-13	-50.65	Pass	V
3616.84	147	55	-49.03	-13	-36.03	Pass	V
3833.37	148	273	-53.09	-13	-40.09	Pass	V
5847.53	150	136	-52.91	-13	-39.91	Pass	V
6535.41	150	16	-45.85	-13	-32.85	Pass	V

Band 7 21425 channel/BW 5 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1362.06	150	142	-53.70	-13	-40.70	Pass	H
1679.87	146	280	-50.23	-13	-37.23	Pass	H
3778.30	150	330	-46.12	-13	-33.12	Pass	H
5801.19	146	194	-40.95	-13	-27.95	Pass	H
6415.57	149	260	-53.29	-13	-40.29	Pass	H
8047.56	151	31	-47.37	-13	-34.37	Pass	H
1312.00	149	4	-53.10	-13	-40.10	Pass	V
1363.97	148	257	-63.97	-13	-50.97	Pass	V
3615.11	147	55	-51.71	-13	-38.71	Pass	V
3882.06	148	273	-53.88	-13	-40.88	Pass	V
5846.56	150	136	-50.23	-13	-37.23	Pass	V
6459.52	150	16	-48.18	-13	-35.18	Pass	V

16QAM

Band 7 20775 channel/BW 5 (lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1328.72	150	142	-59.75	-13	-46.75	Pass	H
1812.47	146	280	-51.54	-13	-38.54	Pass	H
3880.72	150	330	-47.81	-13	-34.81	Pass	H
5919.97	146	194	-41.68	-13	-28.68	Pass	H
6527.08	149	260	-52.45	-13	-39.45	Pass	H
8016.47	151	31	-48.36	-13	-35.36	Pass	H
1176.00	149	4	-52.39	-13	-39.39	Pass	V
1364.90	148	257	-63.01	-13	-50.01	Pass	V
3640.26	147	55	-51.20	-13	-38.20	Pass	V
3845.58	148	273	-55.04	-13	-42.04	Pass	V
5753.11	150	136	-50.71	-13	-37.71	Pass	V
6560.78	150	16	-51.88	-13	-38.88	Pass	V

Band 7 21100 channel/BW 5 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1387.34	150	142	-56.71	-13	-43.71	Pass	H
1757.28	146	280	-54.62	-13	-41.62	Pass	H
3845.64	150	330	-50.38	-13	-37.38	Pass	H
5816.12	146	194	-42.87	-13	-29.87	Pass	H
6399.64	149	260	-51.39	-13	-38.39	Pass	H
8012.15	151	31	-43.06	-13	-30.06	Pass	H
1165.71	149	4	-54.11	-13	-41.11	Pass	V
1460.99	148	257	-60.29	-13	-47.29	Pass	V
3499.58	147	55	-52.12	-13	-39.12	Pass	V
3848.24	148	273	-53.20	-13	-40.20	Pass	V
5854.18	150	136	-51.46	-13	-38.46	Pass	V
6546.24	150	16	-49.82	-13	-36.82	Pass	V

Band 7 21425 channel/BW 5 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1319.80	150	142	-58.82	-13	-45.82	Pass	H
1709.04	146	280	-52.50	-13	-39.50	Pass	H
3859.73	150	330	-51.39	-13	-38.39	Pass	H
5861.91	146	194	-44.40	-13	-31.40	Pass	H
6515.04	149	260	-48.22	-13	-35.22	Pass	H
8039.60	151	31	-42.78	-13	-29.78	Pass	H
1258.21	149	4	-51.51	-13	-38.51	Pass	V
1367.53	148	257	-60.71	-13	-47.71	Pass	V
3571.05	147	55	-48.35	-13	-35.35	Pass	V
3857.85	148	273	-55.93	-13	-42.93	Pass	V
5741.61	150	136	-48.84	-13	-35.84	Pass	V
6437.24	150	16	-48.03	-13	-35.03	Pass	V

QPSK

Band 5 20407 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1330.64	149	327	-54.46	-13	-41.46	Pass	H
1683.12	143	143	-49.19	-13	-36.19	Pass	H
3816.22	152	176	-51.56	-13	-38.56	Pass	H
5916.75	156	147	-44.44	-13	-31.44	Pass	H
6517.80	149	112	-43.13	-13	-30.13	Pass	H
7960.13	142	209	-49.61	-13	-36.61	Pass	H
1254.50	151	174	-55.98	-13	-42.98	Pass	V
1393.82	143	170	-56.69	-13	-43.69	Pass	V
3667.32	155	257	-50.36	-13	-37.36	Pass	V
3767.02	143	308	-46.15	-13	-33.15	Pass	V
5869.30	156	232	-44.27	-13	-31.27	Pass	V
6510.91	152	328	-48.06	-13	-35.06	Pass	V

Band 5 20525 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1334.59	145	60	-54.69	-13	-41.69	Pass	H
1726.43	152	231	-50.57	-13	-37.57	Pass	H
3969.28	144	60	-47.37	-13	-34.37	Pass	H
5786.77	150	321	-43.67	-13	-30.67	Pass	H
6420.16	150	60	-43.97	-13	-30.97	Pass	H
7969.86	142	304	-47.19	-13	-34.19	Pass	H
1292.57	145	223	-55.37	-13	-42.37	Pass	V
1456.97	140	102	-60.02	-13	-47.02	Pass	V
3551.00	156	357	-51.15	-13	-38.15	Pass	V
3868.31	140	12	-46.28	-13	-33.28	Pass	V
5883.63	159	148	-46.95	-13	-33.95	Pass	V
6609.98	140	36	-50.23	-13	-37.23	Pass	V

Band 5 20643 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1419.83	151	291	-53.66	-13	-40.66	Pass	H
1697.11	154	228	-51.81	-13	-38.81	Pass	H
3993.18	148	53	-49.25	-13	-36.25	Pass	H
5844.57	151	154	-46.70	-13	-33.70	Pass	H
6508.31	158	344	-43.05	-13	-30.05	Pass	H
7960.54	149	95	-47.41	-13	-34.41	Pass	H
1264.86	147	149	-53.42	-13	-40.42	Pass	V
1365.22	154	96	-60.32	-13	-47.32	Pass	V
3505.89	140	61	-52.05	-13	-39.05	Pass	V
3870.76	157	137	-49.18	-13	-36.18	Pass	V
5882.41	157	310	-44.29	-13	-31.29	Pass	V
6565.79	158	15	-48.99	-13	-35.99	Pass	V

16QAM

Band 5 20407 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1375.90	156	207	-53.95	-13	-40.95	Pass	H
1775.82	144	278	-51.50	-13	-38.50	Pass	H
3823.96	144	222	-47.28	-13	-34.28	Pass	H
5870.63	154	273	-45.32	-13	-32.32	Pass	H
6455.09	145	49	-46.47	-13	-33.47	Pass	H
7934.92	154	222	-47.96	-13	-34.96	Pass	H
1292.45	155	213	-58.28	-13	-45.28	Pass	V
1518.15	145	110	-59.79	-13	-46.79	Pass	V
3524.92	153	338	-52.98	-13	-39.98	Pass	V
3934.61	159	197	-47.07	-13	-34.07	Pass	V
5827.83	150	228	-43.28	-13	-30.28	Pass	V
6590.78	157	107	-47.12	-13	-34.12	Pass	V

Band 5 20525 channel/BW1.4(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1388.62	150	109	-53.28	-13	-40.28	Pass	H
1768.12	156	330	-49.75	-13	-36.75	Pass	H
3817.68	150	191	-49.03	-13	-36.03	Pass	H
5841.07	148	115	-46.41	-13	-33.41	Pass	H
6422.52	158	52	-46.07	-13	-33.07	Pass	H
7978.29	146	167	-46.12	-13	-33.12	Pass	H
1143.47	149	335	-54.06	-13	-41.06	Pass	V
1481.06	149	331	-59.08	-13	-46.08	Pass	V
3496.24	154	147	-53.08	-13	-40.08	Pass	V
3830.12	144	145	-46.44	-13	-33.44	Pass	V
5767.80	151	193	-44.43	-13	-31.43	Pass	V
6504.71	146	210	-48.39	-13	-35.39	Pass	V

Band 5 20643 channel/BW1.4(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1258.74	156	354	-57.25	-13	-44.25	Pass	H
1752.83	160	8	-51.97	-13	-38.97	Pass	H
3914.08	153	197	-49.90	-13	-36.90	Pass	H
5756.93	151	218	-43.42	-13	-30.42	Pass	H
6523.05	143	76	-44.44	-13	-31.44	Pass	H
8090.68	145	115	-45.76	-13	-32.76	Pass	H
1228.11	151	311	-53.92	-13	-40.92	Pass	V
1407.28	142	230	-60.44	-13	-47.44	Pass	V
3644.88	150	179	-51.57	-13	-38.57	Pass	V
3829.38	149	328	-49.37	-13	-36.37	Pass	V
5881.83	148	332	-44.90	-13	-31.90	Pass	V
6649.11	147	56	-49.31	-13	-36.31	Pass	V

Note:

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

4) Tested with all kind of bandwidth, RB Size and RB Offset, Found the 1.4MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

QPSK

Band 4 19957 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1359.72	142	314	-53.32	-13	-40.32	Pass	H
1632.52	148	117	-51.32	-13	-38.32	Pass	H
3809.38	155	31	-49.40	-13	-36.40	Pass	H
5887.08	144	213	-45.32	-13	-32.32	Pass	H
6579.23	142	279	-46.35	-13	-33.35	Pass	H
8060.43	159	85	-45.56	-13	-32.56	Pass	H
1271.35	155	163	-54.78	-13	-41.78	Pass	V
1417.72	151	211	-61.16	-13	-48.16	Pass	V
3516.08	144	66	-53.14	-13	-40.14	Pass	V
3824.66	148	125	-51.11	-13	-38.11	Pass	V
5800.84	149	207	-44.78	-13	-31.78	Pass	V
6483.62	156	303	-49.27	-13	-36.27	Pass	V

Band 4 20175 channel/BW1.4 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1325.15	151	24	-53.55	-13	-40.55	Pass	H
1676.14	154	318	-48.47	-13	-35.47	Pass	H
3984.63	149	227	-50.62	-13	-37.62	Pass	H
5834.01	154	49	-44.18	-13	-31.18	Pass	H
6549.29	159	31	-42.73	-13	-29.73	Pass	H
8017.46	145	102	-48.75	-13	-35.75	Pass	H
1146.80	145	290	-53.75	-13	-40.75	Pass	V
1354.79	144	142	-59.33	-13	-46.33	Pass	V
3572.57	142	187	-54.49	-13	-41.49	Pass	V
3766.77	140	181	-49.01	-13	-36.01	Pass	V
5871.48	150	8	-47.22	-13	-34.22	Pass	V
6601.08	145	57	-47.62	-13	-34.62	Pass	V

Band 4 20393 channel/BW1.4 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1343.86	150	26	-54.88	-13	-41.88	Pass	H
1776.94	141	76	-49.82	-13	-36.82	Pass	H
3933.06	143	266	-47.99	-13	-34.99	Pass	H
5897.56	149	121	-44.90	-13	-31.90	Pass	H
6592.47	160	267	-43.01	-13	-30.01	Pass	H
7998.47	145	79	-49.02	-13	-36.02	Pass	H
1220.64	142	61	-55.64	-13	-42.64	Pass	V
1521.28	148	103	-58.00	-13	-45.00	Pass	V
3480.73	150	244	-55.04	-13	-42.04	Pass	V
3917.64	154	166	-48.96	-13	-35.96	Pass	V
5780.76	160	234	-43.70	-13	-30.70	Pass	V
6569.58	149	162	-49.79	-13	-36.79	Pass	V

16QAM

Band 4 19957 channel/BW1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1431.73	154	102	-57.09	-13	-44.09	Pass	H
1803.26	159	249	-52.57	-13	-39.57	Pass	H
3935.29	146	228	-50.86	-13	-37.86	Pass	H
5848.77	159	104	-44.66	-13	-31.66	Pass	H
6549.61	150	5	-45.43	-13	-32.43	Pass	H
8019.01	157	91	-48.35	-13	-35.35	Pass	H
1176.08	146	37	-53.98	-13	-40.98	Pass	V
1527.37	144	4	-58.10	-13	-45.10	Pass	V
3560.53	146	355	-54.35	-13	-41.35	Pass	V
3909.16	144	352	-47.52	-13	-34.52	Pass	V
5736.32	152	118	-45.41	-13	-32.41	Pass	V
6522.84	149	203	-49.25	-13	-36.25	Pass	V

Band 4 20175 channel/BW1.4 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1392.23	159	39	-56.27	-13	-43.27	Pass	H
1798.35	141	93	-50.11	-13	-37.11	Pass	H
3903.64	145	227	-49.02	-13	-36.02	Pass	H
5925.11	151	12	-46.81	-13	-33.81	Pass	H
6477.11	158	335	-42.35	-13	-29.35	Pass	H
7943.18	159	103	-48.19	-13	-35.19	Pass	H
1142.34	148	108	-56.67	-13	-43.67	Pass	V
1399.17	151	174	-56.87	-13	-43.87	Pass	V
3655.97	149	174	-51.17	-13	-38.17	Pass	V
3931.21	147	40	-48.71	-13	-35.71	Pass	V
5784.51	144	20	-45.30	-13	-32.30	Pass	V
6463.69	155	324	-51.40	-13	-38.40	Pass	V

Band 4 20393 channel/BW1.4 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1313.12	148	38	-57.67	-13	-44.67	Pass	H
1805.74	155	91	-49.13	-13	-36.13	Pass	H
3905.43	147	175	-47.99	-13	-34.99	Pass	H
5938.07	157	269	-46.97	-13	-33.97	Pass	H
6423.58	154	167	-42.54	-13	-29.54	Pass	H
8095.28	143	208	-46.19	-13	-33.19	Pass	H
1216.72	151	35	-57.27	-13	-44.27	Pass	V
1447.41	156	8	-57.78	-13	-44.78	Pass	V
3566.37	142	233	-52.84	-13	-39.84	Pass	V
3747.94	155	253	-49.53	-13	-36.53	Pass	V
5764.96	146	54	-47.55	-13	-34.55	Pass	V
6554.80	159	67	-51.33	-13	-38.33	Pass	V

QPSK

Band 2 18607 channel/BW 1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1272.69	154	338	-55.74	-13	-42.74	Pass	H
1751.68	143	23	-50.02	-13	-37.02	Pass	H
3979.03	153	119	-49.17	-13	-36.17	Pass	H
5843.00	154	38	-45.34	-13	-32.34	Pass	H
6578.44	153	225	-43.20	-13	-30.20	Pass	H
7948.61	159	104	-48.39	-13	-35.39	Pass	H
1263.26	152	141	-55.51	-13	-42.51	Pass	V
1357.05	159	332	-56.34	-13	-43.34	Pass	V
3528.26	156	321	-53.27	-13	-40.27	Pass	V
3792.32	146	328	-49.95	-13	-36.95	Pass	V
5877.38	142	326	-44.57	-13	-31.57	Pass	V
6467.82	153	254	-49.35	-13	-36.35	Pass	V

Band 2 18900 channel/BW 1.4 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1371.53	152	163	-55.90	-13	-42.90	Pass	H
1698.72	148	144	-49.02	-13	-36.02	Pass	H
3915.31	157	162	-49.29	-13	-36.29	Pass	H
5779.58	147	195	-46.69	-13	-33.69	Pass	H
6550.61	144	350	-43.37	-13	-30.37	Pass	H
7991.56	156	292	-47.29	-13	-34.29	Pass	H
1193.37	141	201	-56.44	-13	-43.44	Pass	V
1458.15	148	111	-59.19	-13	-46.19	Pass	V
3612.32	147	8	-50.52	-13	-37.52	Pass	V
3775.75	141	80	-51.11	-13	-38.11	Pass	V
5900.32	157	110	-44.26	-13	-31.26	Pass	V
6501.79	143	149	-48.91	-13	-35.91	Pass	V

Band 2 19193 channel/BW 1.4 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1364.81	150	181	-58.37	-13	-45.37	Pass	H
1633.49	146	332	-50.63	-13	-37.63	Pass	H
3812.15	150	23	-51.93	-13	-38.93	Pass	H
5774.75	146	143	-44.75	-13	-31.75	Pass	H
6552.58	149	183	-46.56	-13	-33.56	Pass	H
7949.87	151	119	-48.08	-13	-35.08	Pass	H
1155.14	149	7	-51.90	-13	-38.90	Pass	V
1420.16	148	148	-59.60	-13	-46.60	Pass	V
3652.45	147	318	-51.12	-13	-38.12	Pass	V
3864.16	148	99	-52.40	-13	-39.40	Pass	V
5880.02	150	7	-49.98	-13	-36.98	Pass	V
6565.53	150	34	-49.76	-13	-36.76	Pass	V

16QAM

Band 2 18607 channel/BW 1.4(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1212.76	150	217	-53.51	-13	-40.51	Pass	H
1668.43	146	83	-54.17	-13	-41.17	Pass	H
3808.97	150	331	-51.19	-13	-38.19	Pass	H
5774.53	146	47	-42.75	-13	-29.75	Pass	H
6363.25	149	16	-49.87	-13	-36.87	Pass	H
8082.90	151	206	-48.66	-13	-35.66	Pass	H
1211.93	149	138	-56.74	-13	-43.74	Pass	V
1451.70	148	324	-58.35	-13	-45.35	Pass	V
3524.57	147	98	-55.28	-13	-42.28	Pass	V
3876.43	148	307	-53.20	-13	-40.20	Pass	V
5807.30	150	196	-45.96	-13	-32.96	Pass	V
6590.00	150	345	-51.10	-13	-38.10	Pass	V

Band 2 18900 channel/BW 1.4 (middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1294.52	151	33	-56.54	-13	-43.54	Pass	H
1667.82	151	235	-46.03	-13	-33.03	Pass	H
3838.72	155	293	-47.39	-13	-34.39	Pass	H
5823.80	145	121	-45.99	-13	-32.99	Pass	H
6642.75	155	327	-46.18	-13	-33.18	Pass	H
8048.22	148	234	-44.33	-13	-31.33	Pass	H
1211.60	149	88	-49.83	-13	-36.83	Pass	V
1461.65	154	160	-53.70	-13	-40.70	Pass	V
3544.73	147	148	-53.39	-13	-40.39	Pass	V
3993.10	146	344	-51.61	-13	-38.61	Pass	V
5805.63	152	252	-47.51	-13	-34.51	Pass	V
6654.01	154	62	-50.46	-13	-37.46	Pass	V

Band 2 19193 channel/BW 1.4 (highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1393.46	151	256	-61.54	-13	-48.54	Pass	H
1698.25	148	224	-46.50	-13	-33.50	Pass	H
3850.88	152	148	-45.95	-13	-32.95	Pass	H
5904.81	151	318	-43.95	-13	-30.95	Pass	H
6549.67	148	14	-41.47	-13	-28.47	Pass	H
8087.56	151	278	-41.79	-13	-28.79	Pass	H
1088.48	148	182	-53.78	-13	-40.78	Pass	V
1448.36	154	129	-53.49	-13	-40.49	Pass	V
3597.80	155	276	-53.92	-13	-40.92	Pass	V
3856.73	149	94	-48.87	-13	-35.87	Pass	V
5939.14	151	158	-43.37	-13	-30.37	Pass	V
6501.82	147	354	-46.91	-13	-33.91	Pass	V

Note:

1) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

2) Tested with all kind of bandwidth, RB Size and RB Offset, Found the 1.4MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

QPSK

Band 41 40265 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1356.24	149	165	-56.00	-25	-31.00	Pass	H
1718.80	146	208	-50.75	-25	-25.75	Pass	H
3883.84	146	4	-50.26	-25	-25.26	Pass	H
5823.49	150	198	-44.58	-25	-19.58	Pass	H
6606.09	146	341	-40.70	-25	-15.70	Pass	H
8121.44	150	235	-45.23	-25	-20.23	Pass	H
1203.67	146	292	-54.22	-25	-29.22	Pass	V
1442.60	150	158	-61.93	-25	-36.93	Pass	V
3539.88	149	55	-50.70	-25	-25.70	Pass	V
3818.38	150	319	-46.13	-25	-21.13	Pass	V
5803.90	146	118	-43.88	-25	-18.88	Pass	V
6642.87	150	155	-44.16	-25	-19.16	Pass	V

Band 41 40740 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1329.65	149	165	-57.99	-25	-32.99	Pass	H
1754.51	146	208	-52.36	-25	-27.36	Pass	H
3915.96	146	4	-50.30	-25	-25.30	Pass	H
5850.68	150	198	-38.86	-25	-13.86	Pass	H
6478.28	146	341	-42.93	-25	-17.93	Pass	H
7993.15	150	235	-43.07	-25	-18.07	Pass	H
1175.31	146	292	-51.02	-25	-26.02	Pass	V
1514.97	150	158	-58.87	-25	-33.87	Pass	V
3576.29	149	55	-48.64	-25	-23.64	Pass	V
3871.00	150	319	-49.31	-25	-24.31	Pass	V
5755.71	146	118	-42.87	-25	-17.87	Pass	V
6534.33	150	155	-45.15	-25	-20.15	Pass	V

Band 41 41215 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1423.88	149	165	-58.02	-25	-33.02	Pass	H
1741.56	146	208	-49.48	-25	-24.48	Pass	H
3963.78	146	4	-45.89	-25	-20.89	Pass	H
5840.25	150	198	-39.17	-25	-14.17	Pass	H
6543.39	146	341	-45.47	-25	-20.47	Pass	H
8146.59	150	235	-46.11	-25	-21.11	Pass	H
1194.71	146	292	-54.26	-25	-29.26	Pass	V
1514.02	150	158	-62.25	-25	-37.25	Pass	V
3478.66	149	55	-51.69	-25	-26.69	Pass	V
3922.56	150	319	-52.01	-25	-27.01	Pass	V
5824.31	146	118	-47.14	-25	-22.14	Pass	V
6544.11	150	155	-49.19	-25	-24.19	Pass	V

16QAM

Band 41 40365 channel/BW 5(lowest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1316.68	149	165	-57.51	-25	-32.51	Pass	H
1632.16	146	208	-49.97	-25	-24.97	Pass	H
3940.77	146	4	-50.26	-25	-25.26	Pass	H
5892.93	150	198	-40.60	-25	-15.60	Pass	H
6485.97	146	341	-45.37	-25	-20.37	Pass	H
8034.82	150	235	-48.10	-25	-23.10	Pass	H
1218.91	146	292	-54.15	-25	-29.15	Pass	V
1539.04	150	158	-57.85	-25	-32.85	Pass	V
3494.72	149	55	-51.06	-25	-26.06	Pass	V
3782.52	150	319	-50.79	-25	-25.79	Pass	V
5797.33	146	118	-43.55	-25	-18.55	Pass	V
6585.48	150	155	-43.65	-25	-18.65	Pass	V

Band 41 40740 channel/BW 5(middle channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1411.75	149	165	-53.64	-25	-28.64	Pass	H
1769.70	146	208	-49.28	-25	-24.28	Pass	H
3955.48	146	4	-44.65	-25	-19.65	Pass	H
5881.35	150	198	-43.86	-25	-18.86	Pass	H
6525.52	146	341	-42.55	-25	-17.55	Pass	H
8140.18	150	235	-43.01	-25	-18.01	Pass	H
1257.91	146	292	-54.64	-25	-29.64	Pass	V
1385.60	150	158	-59.15	-25	-34.15	Pass	V
3463.04	149	55	-52.21	-25	-27.21	Pass	V
3820.53	150	319	-45.86	-25	-20.86	Pass	V
5706.17	146	118	-42.58	-25	-17.58	Pass	V
6461.16	150	155	-47.24	-25	-22.24	Pass	V

Band 41 41215 channel/BW 5(highest channel)							
Frequency (MHz)	Height (cm)	Azimuth (deg)	Spurious Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	Antenna Polaxis.
1346.93	149	165	-57.21	-25	-32.21	Pass	H
1744.37	146	208	-44.09	-25	-19.09	Pass	H
3834.92	146	4	-47.21	-25	-22.21	Pass	H
5972.67	150	198	-44.42	-25	-19.42	Pass	H
6471.63	146	341	-39.98	-25	-14.98	Pass	H
8166.25	150	235	-46.49	-25	-21.49	Pass	H
1193.07	146	292	-54.89	-25	-29.89	Pass	V
1425.70	150	158	-53.29	-25	-28.29	Pass	V
3569.12	149	55	-49.34	-25	-24.34	Pass	V
3735.99	150	319	-47.26	-25	-22.26	Pass	V
5743.52	146	118	-46.81	-25	-21.81	Pass	V
6545.81	150	155	-47.52	-25	-22.52	Pass	V

Note:

1)Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 1GHz are attenuated more than 20 dB below the applicable limit and not required to be reported, the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

2)Tested with all kind of bandwidth, RB Size and RB Offset, Found the 1.4MHz with full RB were the worst case; and then Only the worst case is recorded in the report.

12. FREQUENCY STABILITY

12.1 Standard Applicable

According to §22.355, §24.235, §27.54 the limit is 2.5ppm.

12.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a

Frequency Domain Analyzer in histogram mode

12.3 Summary of Test Results/Plots

Note: 1.Normal Voltage NV=DC3.7V; Low Voltage LV=DC3.33V; High Voltage HV=DC4.07V

Please refer to Appendix F: Frequency Stability

Test result: Pass

******* END OF REPORT *******