

TEST REPORT

Test Report No.: 8117FC

Applicant : Xanavi Informatics Corporation
EUT : Bluetooth module with chip type antenna
Model No. : UGZZ5-X02
Serial No. : 0016fed6b531
FCC ID : SJ2HGZ0024
Issue Date : 30 October 2008
Date of Test : 9-10 October 2008 (Radiated Emission Test)
8, 14 October 2008 (Conducted Test via Antenna Terminal)
Test Standard : FCC Part 15 Subpart C § 15.247 (10-1-07 Edition)
Procedure : ANSI C63.4: 2003 PUBLIC NOTICE DA 00-705
PUBLIC NOTICE DA 00-1407
Test Results : PASS

Approved By:


Manager / Jiro Ogiwara

Reviewed By:


Engineer / Yukihito Minegishi
/ Kentaro Fukuda

Tested By:


Engineer / Yukihito Minegishi
/ Tatsuro Sato

NVLAP LAB CODE 200607-0

Table of Contents

Revised Record	4
1 Test Report	5
2 General Information	5
2.1 Applicant Information	5
2.2 Product Description	5
2.3 Summary of Test and Inspection Result	6
2.4 Test Methodology	7
2.5 Test Facility	7
3 System Test Configuration	8
3.1 Justification	8
3.2 Operating Modes	9
3.3 Configuration of Tested System	10
3.4 Test Instruments	13
3.5 Special Test Condition	13
3.6 Equipment Modifications	13
4 Antenna Requirement	14
5 AC Powerline Conducted Emission	15
6 20dB Bandwidth	16
6.1 Test Setup	16
6.2 Test Results	16
7 Carrier Frequency Separation	17
7.1 Test Setup	17
7.2 Test Results	17
8 Number of Hopping Frequency	18
8.1 Test Setup	18
8.2 Test Results	18
9 Dwell Time	19
9.1 Test Setup	19
9.2 Test Results	19
10 Maximum Peak Output Power	21
10.1 Test Setup	21
10.2 Test Results	21
11 Band Edge Compliance	22
11.1 Test Setup	22
11.2 Test Results	22
12 Spurious RF Conducted Emission	24
12.1 Test Setup	24
12.2 Test Results	24
13 Radiated Emission	28
13.1 Test Setup	28
13.2 Radiated Emission Calculation	28
13.3 Test Results	29
14 Photos of Tested EUT and Test Setup	38

Appendix 1: AFH-Hopping Sequence.....39
Appendix 2: Certificate of Accreditation41
Appendix 3: Test Instruments.....42

Revised Record

Revised Record					
Number of Revised Time	Mark	Date	Person in Charge	Detail of Revision	Approved By
Initial	-	30 October 2008	Tatsuro Sato	-	Jiro Ogiwara

1 Test Report

- (1) This report summarizes the result of a single investigation and test result relate only to tested sample.
- (2) The report shall not be reproduced except in full without the written approval of the TAIYO YUDEN Co., Ltd.
- (3) This test report must not be used by the client to claim product endorsement by any government agency.
- (4) We hereby certify that no party to the applications authorized hereunder is subject to a denial of benefits, including FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 853(a).
- (5) The test results in this report are traceable to international standards.

2 General Information

2.1 Applicant Information

Company Name	Xanavi Informatics Corporation
Address	1410 Inada Hitachinaka-Shi, Ibaraki-Ken, 312-8505, JAPAN

2.2 Product Description

EUT	Bluetooth module with chip type antenna
Model No.	UGZZ5-X02
Serial No.	0016fed6b531
FCC ID	SJ2HGZ0024
Production Stage	Production
Type of Wide Band Modulation	FHSS: Frequency Hopping (79ch) and AFH (20ch)
Type of Modulation	GFSK
ITU Code	F1D
Power Supply	DC 3.30V
Operating Voltage Range	DC 3.10V Min. DC 3.50V Max.
Operating Temperature Range	-30°C Min. 85°C Max.
Weight	4.4g
Dimensions of EUT	W 21.7mm × L 47.0mm × H 2.4mm
Antenna Type	Mono-pole Type
Max Antenna Gain	1.0dBi
Operating Clocks	26MHz
Receipt Date of Tested Sample	6 October 2008

EUT is Bluetooth module with chip type antenna.

This is operated within the bands 2400 - 2483.5MHz frequency hopping intentional radiators.

It provides 79 channels. And it adopts an AFH function to prevent interference with other wireless applications. Refer to Appendix 1.

EUT operates in the unlicensed 2.4 GHz ISM (Industrial Scientific Medical) band. A frequency hop transceiver is applied to combat interference and fading.

2.3 Summary of Test and Inspection Result

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
1	AC Powerline Conducted Emission	ANSI C63.4: 2003	FCC 15.207	Conducted Emission Test	-	-	N/A*1
2	Carrier Frequency Separation	Public Notice DA00-705	FCC 15.247 (a)(1)	Conducted RF Test via Antenna Terminal	N/A	-	Pass
3	Number of Hopping Frequency	Public Notice DA00-1407	FCC 15.247 (a)(1)(iii)		N/A	-	Pass
4	Dwell Time		FCC 15.247 (a)(1)(iii)		N/A	-	Pass
5	Maximum Peak Output Power		FCC 15.247 (b)(1)		N/A	-	Pass
6	Band Edge Compliance		FCC 15.247(d)		N/A	-	Pass
7	Spurious RF Conducted Emission		FCC 15.247(d)		N/A	-	Pass
8	Radiated Emission		FCC 15.247(d)		Radiated Emission Test	N/A	Peak 22.3dB Average 8.8dB Transmitting Mode: 2441MHz Type of Modulation: GFSK Modulation Frequency: 4882.000MHz Axial Direction: XY-Plane Antenna Polarization: Vertical

*1: This EUT is intended for using in vehicle device (Car Navigation System).
So this measurement is not applied to this EUT.

2.4 Test Methodology

Interference measurements were made in accordance with ANSI C63.4: 2003 Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.5 Test Facility

TAIYO YUDEN CO., LTD. EMC Center.
5607-2, Nakamuroda-machi, Takasaki-shi, Gunma, 370-3347, Japan.

1. FCC 47CFR, Part 15 Subpart C regulation test were performed on the shielded room, and radiated interference field strength test was performed on the 10 meter semi-anechoic chamber located at TAIYO YUDEN CO., LTD. EMC Center, 5607-2 Nakamuroda-machi, Takasaki-shi, Gunma, 370-3347 Japan.
2. This Laboratory is accredited under the National Voluntary Laboratory Accreditation Program (NVLAP) by United States Department of Commerce, National Institute of Standard and Technology (NIST) for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations.
3. These criteria encompass the requirements of ISO/IEC 17025:2005 and the relevant requirements of ISO 9002:1994 as suppliers of calibration or test results. Accreditation awarded for specific services, listed on the Scope of Accreditation for: Electromagnetic Compatibility and Telecommunications FCC. (NVLAP LAB CODE: 200607-0). Refer the certificate of the accreditation to Appendix 2.
4. This laboratory is listed by Federal Communications Commission, Equipment Authorization Division (Registration Number: 606514) and listed by Industry Canada (No.4389A-1).

3 System Test Configuration

3.1 Justification

1. Emission tests were performed with no deviation from the ANSI C63.4: 2003 and FCC 47CFR, Part 15 Section 15.247 regulation tests were performed with no deviation from the FCC Public Notice DA00-705 released March 30, 2000 and Public Notice DA00-1407 released June 26, 2000.
2. The system was configured for testing a typical fashion (as a customer would normally use it.).
3. Radiate testing in the range of 1 GHz to 25 GHz was investigated with the spectrum (peak detector function) under the FCC regulation section 15.209 (e) and 15.35 (b). For above 18GHz, test performed at an antenna to EUT distance of 1 meter. The level of any unwanted emissions from EUT did not exceed the level of the fundamental emission (Compliance with 15.209 (c)). And test result found to be compliance with FCC regulation section 15.209 (a) Radiated emission limits (500 micro-volts/meter). Data is presented for the “worst case” measurements, that E.U.T was normal operated.
4. Radiate testing in the range of 30 MHz to 1000 MHz was performed at an antenna to EUT distance of 3 meters under the 15.209 (e) and 15.31(f)(1).
5. Tests were performed with the representative channel operation as follows.
 - a. Lowest Frequency Channel: CH0 2402MHz
 - b. Middle Frequency Channel: CH39 2441MHz
 - c. Highest Frequency Channel: CH78 2480MHz

3.2 Operating Modes

Transmitting Mode

Modulation		GFSK
Signal Pattern		PRBS9
Signal Packet Type	GFSK	DH5
Representative Channel		CH0 2402MHz (Lowest Frequency Channel)
		CH39 2441MHz (Middle Frequency Channel)
		CH78 2480MHz (Highest Frequency Channel)

Remarks:

Signal Pattern PRBS9: Periodic Pseudo Random Bit Sequence. $2^9 - 1$

Signal Packet Type: DH5:

Data high rate, ACL type packet

Data payload with CRC, without FEC

Fully transmission within one consecutive 625-microsecond transmission slots

Number of slot = 5

Data size of payload = 339bytes

Software (Controller): AIO Easy Tester Lite! Ver1.27 software supplied by ALPS ELECTRIC CO., LTD. was used to set up to the Bluetooth operating mode except for AFH operating mode.


Ceva Host Controller Tester (Tester Version BT1.2) Ver1.7.2.1 software supplied by Ceva Inc. was used to set up to the Bluetooth operating mode for AFH operating mode.

3.3 Configuration of Tested System

(1) Conducted RF Test via Antenna Terminal

These numbers and the marks in the picture are corresponding to the numbers and the marks in tables shown.
 Power Supply of EUT: DC3.30V from Regulated DC Power Supply “e”.

Test Setting for Normal Frequency Hopping and Non Frequency Hopping Mode

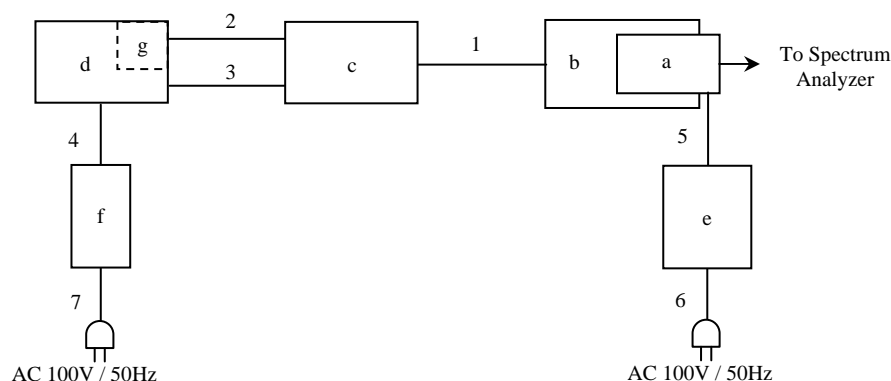


List of EUT and Accessories

	Product Name	M/N	S/N	Manufacturer	EUT / Accessory	FCC ID / DoC
a	Bluetooth module with chip type antenna	UGZZ5-X02	0016fed6b531	ALPS ELECTRIC CO., LTD.	EUT	SJ2HGZ0024
b	Jig	-	7	Xanavi Informatics Corporation	Accessory	-
c	QUICK STARTER KIT Board	FX364Z12-1	6	ALPS ELECTRIC CO., LTD.	Accessory	-
d	Note PC	CF-B5V	0GKSA03930	Panasonic Corporation	Accessory	-
e	Regulated DC Power Supply	PA18-3A	6110066	KENWOOD Corporation	Accessory	-
f	AC Adapter for Note PC	CF-AA1533JCI	C000703316C	Panasonic Corporation	Accessory	-
g	RS-232C Serial I/O Card	PM-020	R16994	Brainboxes Japan Corporation	Accessory	-

Interface Cables

	Cable Type	M/N	Shielded	Ferrite Core	Material of Connector	Length	Treatment for the Extra Length
1	Flat Cable	-	No	No	Plastic	0.15m	-
2	RS-232C Cable	-	No	No	Plastic	0.50m	-
3	USB Cable	-	Yes	No	Metal	2.00m	-
4	DC Cable	-	No	No	Plastic	1.70m	-
5	DC Cable	-	No	No	Plastic	0.60m	-
6	AC Cable	-	No	No	Plastic	2.00m	-
7	AC Cable	-	No	No	Plastic	0.80m	-

Test Setting for AFH Mode

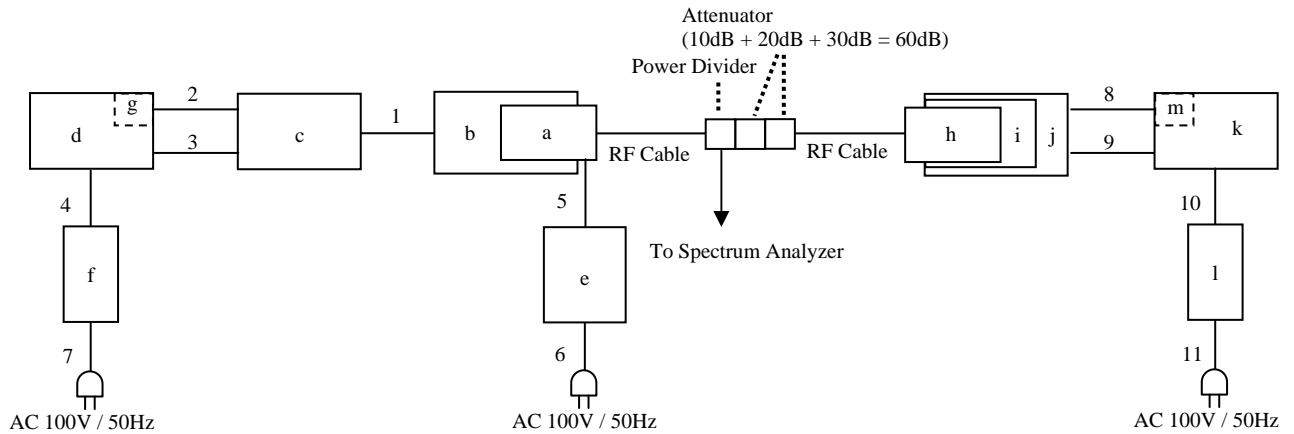

List of EUT and Accessories


	Product Name	M/N	S/N	Manufacturer	EUT / Accessory	FCC ID / DoC
a	Bluetooth module with chip type antenna	UGZZ5-X02	0016fed6b531	ALPS ELECTRIC CO., LTD.	EUT	SJ2HGZ0024
b	Jig	-	7	Xanavi Informatics Corporation	Accessory	-
c	QUICK STARTER KIT Board	FX364Z12-1	6	ALPS ELECTRIC CO., LTD.	Accessory	-
d	Note PC	CF-B5V	0GKSA03930	Panasonic Corporation	Accessory	-
e	Regulated DC Power Supply	PA18-3A	6110066	KENWOOD Corporation	Accessory	-
f	AC Adapter for Note PC	CF-AA1533JCI	C000703316C	Panasonic Corporation	Accessory	-
g	RS-232C Serial I/O Card	PM-020	R16994	Brainboxes Japan Corporation	Accessory	-
h	Bluetooth module with chip type antenna	HGZ0024	0016fed6ea52	ALPS ELECTRIC CO., LTD.	Accessory	-
i	Jig	FX417Z25	2	ALPS ELECTRIC CO., LTD.	Accessory	-
j	QUICK STARTER KIT Board	FX364Z12-1	163	ALPS ELECTRIC CO., LTD.	Accessory	-
k	Note PC	FMVNC1DC23	CP222125	Fujitsu Limited	Accessory	-
l	AC Adapter for Note PC	SEC80N2-19.0	CP235922-01	Fujitsu Limited	Accessory	-
m	RS-232C Serial I/O Card	PM-010	PM77856	Brainboxes Japan Corporation	Accessory	-

Interface Cables

	Cable Type	M/N	Shielded	Ferrite Core	Material of Connector	Length	Treatment for the Extra Length
1	Flat Cable	-	No	No	Plastic	0.15m	-
2	RS-232C Cable	-	No	No	Plastic	0.50m	-
3	USB Cable	-	Yes	No	Metal	2.00m	-
4	DC Cable	-	No	No	Plastic	1.70m	-
5	DC Cable	-	No	No	Plastic	0.80m	-
6	AC Cable	-	No	No	Plastic	2.00m	-
7	AC Cable	-	No	No	Plastic	0.80m	-
8	RS-232C Cable	-	No	No	Plastic	0.53m	-
9	USB Cable	-	Yes	No	Metal	2.00m	-
10	DC Cable	-	No	No	Plastic	1.82m	-
11	AC Cable	-	No	No	Plastic	2.00m	-

(2) Radiated Emission Test

These numbers and the marks in the picture are corresponding to the numbers and the marks in tables shown.
 Power Supply of EUT: DC3.30V from Regulated DC Power Supply “b”.

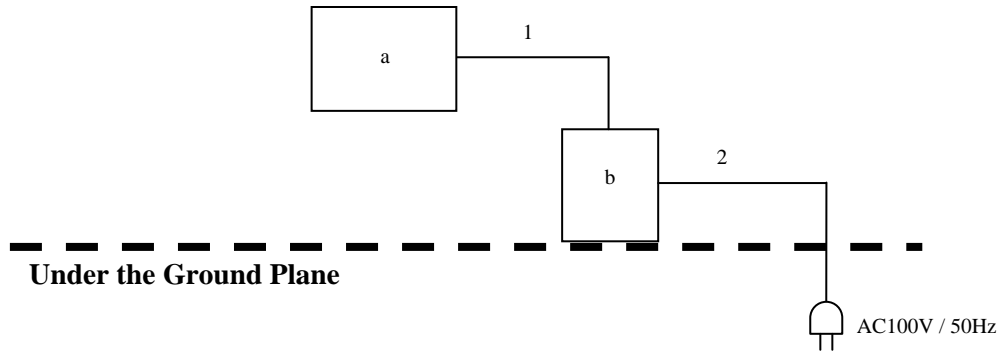

List of EUT and Accessories

	Product Name	M/N	S/N	Manufacturer	EUT / Accessory	FCC ID / DoC
a	Bluetooth module with chip type antenna	UGZZ5-X02	0016fed6b531	ALPS ELECTRIC CO., LTD.	EUT	SJ2HGZ0024
b	Regulated DC Power Supply	PA18-1.2A	2110071	KENWOOD Corporation	Accessory	-

Interface Cables

	Cable Type	M/N	Shielded	Ferrite Core	Material of Connector	Length	Notes
1	DC Cable	-	No	No	Plastic	1.41m	-
2	AC Cable	-	No	No	Plastic	2.06m	-

3.4 Test Instruments

About test instruments for all tests, please refer to appendix 3.

3.5 Special Test Condition

Nothing.

3.6 Equipment Modifications

No modification has been carried out by TAIYO YUDEN CO., LTD. EMC Center.

4 Antenna Requirement

The EUT provides a permanently attached antenna and it was found to be compliant with FCC regulation section 15.203.

Antenna Type	Mono-pole Type
Antenna Gain	1.0dBi

5 AC Powerline Conducted Emission

N/A

This EUT is intended for using in vehicle device (Car Navigation System).
So this measurement is not applied to this EUT.

6 20dB Bandwidth

6.1 Test Setup

The spectrum analyzer was connected to the transmitter output port through the RF cable.

Spectrum Analyzer Setting:

Detector Mode	Peak
RBW	30kHz
VBW	30kHz
Span	2MHz
Sweep Time	Auto

6.2 Test Results

Serial No. : 0016fed6b531
 Power : DC 3.30V
 Transmitting Mode : Non Frequency Hopping
 Temperature : 24.0°C
 Humidity : 62.0 %

Operation Mode: Transmitting Mode (GFSK Modulation)

CH	Frequency [MHz]	20dB Bandwidth [MHz]
0ch(Lowest)	2402.0	0.954
39ch(Middle)	2441.0	0.862
78ch(Highest)	2480.0	0.870

7 Carrier Frequency Separation

7.1 Test Setup

The spectrum analyzer was connected to the transmitter output port through the RF cable.

Spectrum Analyzer Setting:

Detector Mode	Peak
RBW	100kHz
VBW	300kHz
Span	3MHz
Sweep Time	Auto

7.2 Test Results

Serial No.	:	0016fed6b531
Power	:	DC 3.30V
Transmitting Mode	:	Frequency Hopping (79ch) AFH (20ch)
Temperature	:	24.0°C (Frequency Hopping (79ch)) 25.5°C (AFH (20ch))
Humidity	:	62.0 % (Frequency Hopping (79ch)) 50.2 % (AFH (20ch))
Regulation	:	FCC Part15 C §15.247 (a)(1)

Operating Mode: Transmitting Mode, Frequency Hopping (79ch)

GFSK Modulation		
CH	Channel Separation [MHz]	Limit *1 [MHz]
Low Frequency (0ch-1ch)	0.992	> 0.636
Middle Frequency (38ch-39ch)	0.998	> 0.575
High Frequency (77ch-78ch)	1.004	> 0.580

Operating Mode: Transmitting Mode, AFH (20ch)

GFSK Modulation		
CH	Channel Separation [MHz]	Limit *1 [MHz]
Low Frequency (0ch-1ch)	0.998	> 0.636
Middle Frequency (38ch-39ch)	0.980	> 0.575
High Frequency (77ch-78ch)	1.022	> 0.580

*1: Limit value of Carrier Frequency Separation is 2/3 of 20dB Bandwidth.
Refer the result of 20dB Bandwidth to Section 6.

8 Number of Hopping Frequency

8.1 Test Setup

The spectrum analyzer was connected to the transmitter output port through the RF cable.

Spectrum Analyzer Setting:

Detector Mode	Peak
RBW	300kHz
VBW	300kHz
Sweep Time	Auto

8.2 Test Results

Serial No. : 0016fed6b531
 Power : DC 3.30V
 Transmitting Mode : Frequency Hopping (79ch)
 AFH (20ch)
 Temperature : 24.0°C (Frequency Hopping (79ch))
 25.5°C (AFH (20ch))
 Humidity : 62.0 % (Frequency Hopping (79ch))
 50.2 % (AFH (20ch))
 Regulation : FCC Part15 C §15.247 (a)(1)(iii)

Operating Mode: Transmitting Mode (GFSK Modulation)

Mode	Number of Channel [time]	Limit [time]
Frequency Hopping (79ch)	79	>=15
AFH (20ch)	20	>=15

9 Dwell Time

9.1 Test Setup

The spectrum analyzer was connected to the transmitter output port through the RF cable.

Spectrum Analyzer Setting:

Detector Mode	Peak
RBW	1MHz
VBW	1MHz
Span	0Hz
Sweep Time	Auto

9.2 Test Results

Serial No.	:	0016fed6b531
Power	:	DC 3.30V
Transmitting Mode	:	Frequency Hopping (79ch) AFH (20ch)
Temperature	:	24.0°C (Frequency Hopping (79ch)) 25.5°C (AFH (20ch))
Humidity	:	62.0 % (Frequency Hopping (79ch)) 50.2 % (AFH (20ch))
Regulation	:	FCC Part15 C §15.247 (a)(1)(iii)

Operating Mode: Transmitting Mode, Frequency Hopping (79ch)

GFSK Modulation		
CH	Dwell Time [ms]	Limit [ms]
0ch (Lowest)	316.91	<=400
39ch (Middle)	316.91	<=400
78ch (Highest)	319.04	<=400

Operating Mode: Transmitting Mode, AFH (20ch)

GFSK Modulation		
CH	Dwell Time [ms]	Limit [ms]
0ch (Lowest)	319.09	<=400
39ch (Middle)	318.67	<=400
78ch (Highest)	318.67	<=400

Data of Dwell Time (Frequency Hopping (79ch))

Time of Occupancy (Dwell Time) for Packet Type DH5

Worst-case Hopping (79ch) of Frequency is shown the following.

The frequency-hopping rate of Bluetooth system is 1600hops per 1 second.
A DH5 packet needs 5 times slot for transmitting and 1 time slot for receiving.

In a DH5 packet, it hops 266.67 times for transmitting per 1 second.

The number of hopping channel is 79.

The number of times that appears in 1 channel per 1 second is as follows.

$$266.67/79=3.37 \text{ [times]}$$

The average time of occupancy on any channel shall not be greater than 0.4 seconds (400ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed $0.4 \times 79 = 31.6$ seconds

The number of times that appears in 1 channel per 31.6 seconds is as follows.

$$3.37 \times 31.6 = 106.49 \text{ [times]}$$

Transmitting time is 2.996 ms.

Then, dwell time is $106.49 \times 2.996\text{ms} = 319.04\text{ms}$ per 31.6 seconds.

Data of Dwell Time (AFH (20ch))

Time of Occupancy (Dwell Time) for Packet Type DH5

Worst-case Hopping (20ch) of AFH is shown the following.

The frequency-hopping rate of Bluetooth system is 1600hops per 1 second.
A DH5 packet needs 5 times slot for transmitting and 1 time slot for receiving.

In a DH5 packet, it hops 266.67 times for transmitting per 1 second.

The number of hopping channel is 20.

The number of times that appears in 1 channel per 1 second is as follows.

$$266.67/20=13.34 \text{ [times]}$$

The average time of occupancy on any channel shall not be greater than 0.4 seconds (400ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed $0.4 \times 20 = 8.0$ seconds

The number of times that appears in 1 channel per 8.0 seconds is as follows.

$$13.34 \times 8.0 = 106.72 \text{ [times]}$$

Transmitting time is 2.990 ms.

Then, dwell time is $106.72 \times 2.990\text{ms} = 319.09\text{ms}$ per 8.0 seconds.

10 Maximum Peak Output Power

10.1 Test Setup

The spectrum analyzer was connected to the transmitter output port through the RF cable.

Spectrum Analyzer Setting:

Detector Mode	Peak
RBW	1MHz
VBW	1MHz
Span	5MHz
Sweep Time	Auto

10.2 Test Results

Serial No. : 0016fed6b531
 Power : DC 3.30V
 Transmitting Mode : Non Frequency Hopping
 Temperature : 24.0°C
 Humidity : 62.0 %
 Regulation : FCC Part15 C §15.247 (b)(1)

Operating Mode: Transmitting Mode (GFSK Modulation)

CH	Frequency [MHz]	Reading [dBm]	Cable Loss1 [dB]	Cable Loss2 [dB]	Result		Limit	
					[dBm]	[mW]	[dBm]	[mW]
0ch(Lowest)	2402	-2.50	0.64	0.40	-1.46	0.715	30.0	1000
39ch(Middle)	2441	-3.69	0.64	0.40	-2.65	0.543	30.0	1000
78ch(Highest)	2480	-4.78	0.62	0.40	-3.76	0.421	30.0	1000

Result = Reading + Cable Loss1 + Cable Loss2

Note: Cable Loss1: RF Cable

Cable Loss2: Conversion cable used for connecting to SMA type

11 Band Edge Compliance

11.1 Test Setup

The spectrum analyzer was connected to the transmitter output port through the RF cable.

Spectrum Analyzer Setting:


Detector Mode	Peak
RBW	100kHz
VBW	300kHz
Span	100MHz
Sweep Time	Auto

11.2 Test Results

Serial No.	:	0016fed6b531
Power	:	DC 3.30V
Transmitting Mode	:	Frequency Hopping (79ch) AFH (20ch) Non Frequency Hopping
Temperature	:	24.0°C (Frequency Hopping (79ch)) 25.5°C (AFH (20ch))
Humidity	:	62.0 % (Frequency Hopping (79ch)) 50.2 % (AFH (20ch))
Regulation	:	FCC Part15 C §15.247 (d)

The spectrum data are attached next page. Display line indicates the 20dB offset below highest level. It shows compliance with the requirement in part 15.247(d).

Operating Mode: Transmitting Mode (GFSK Modulation)

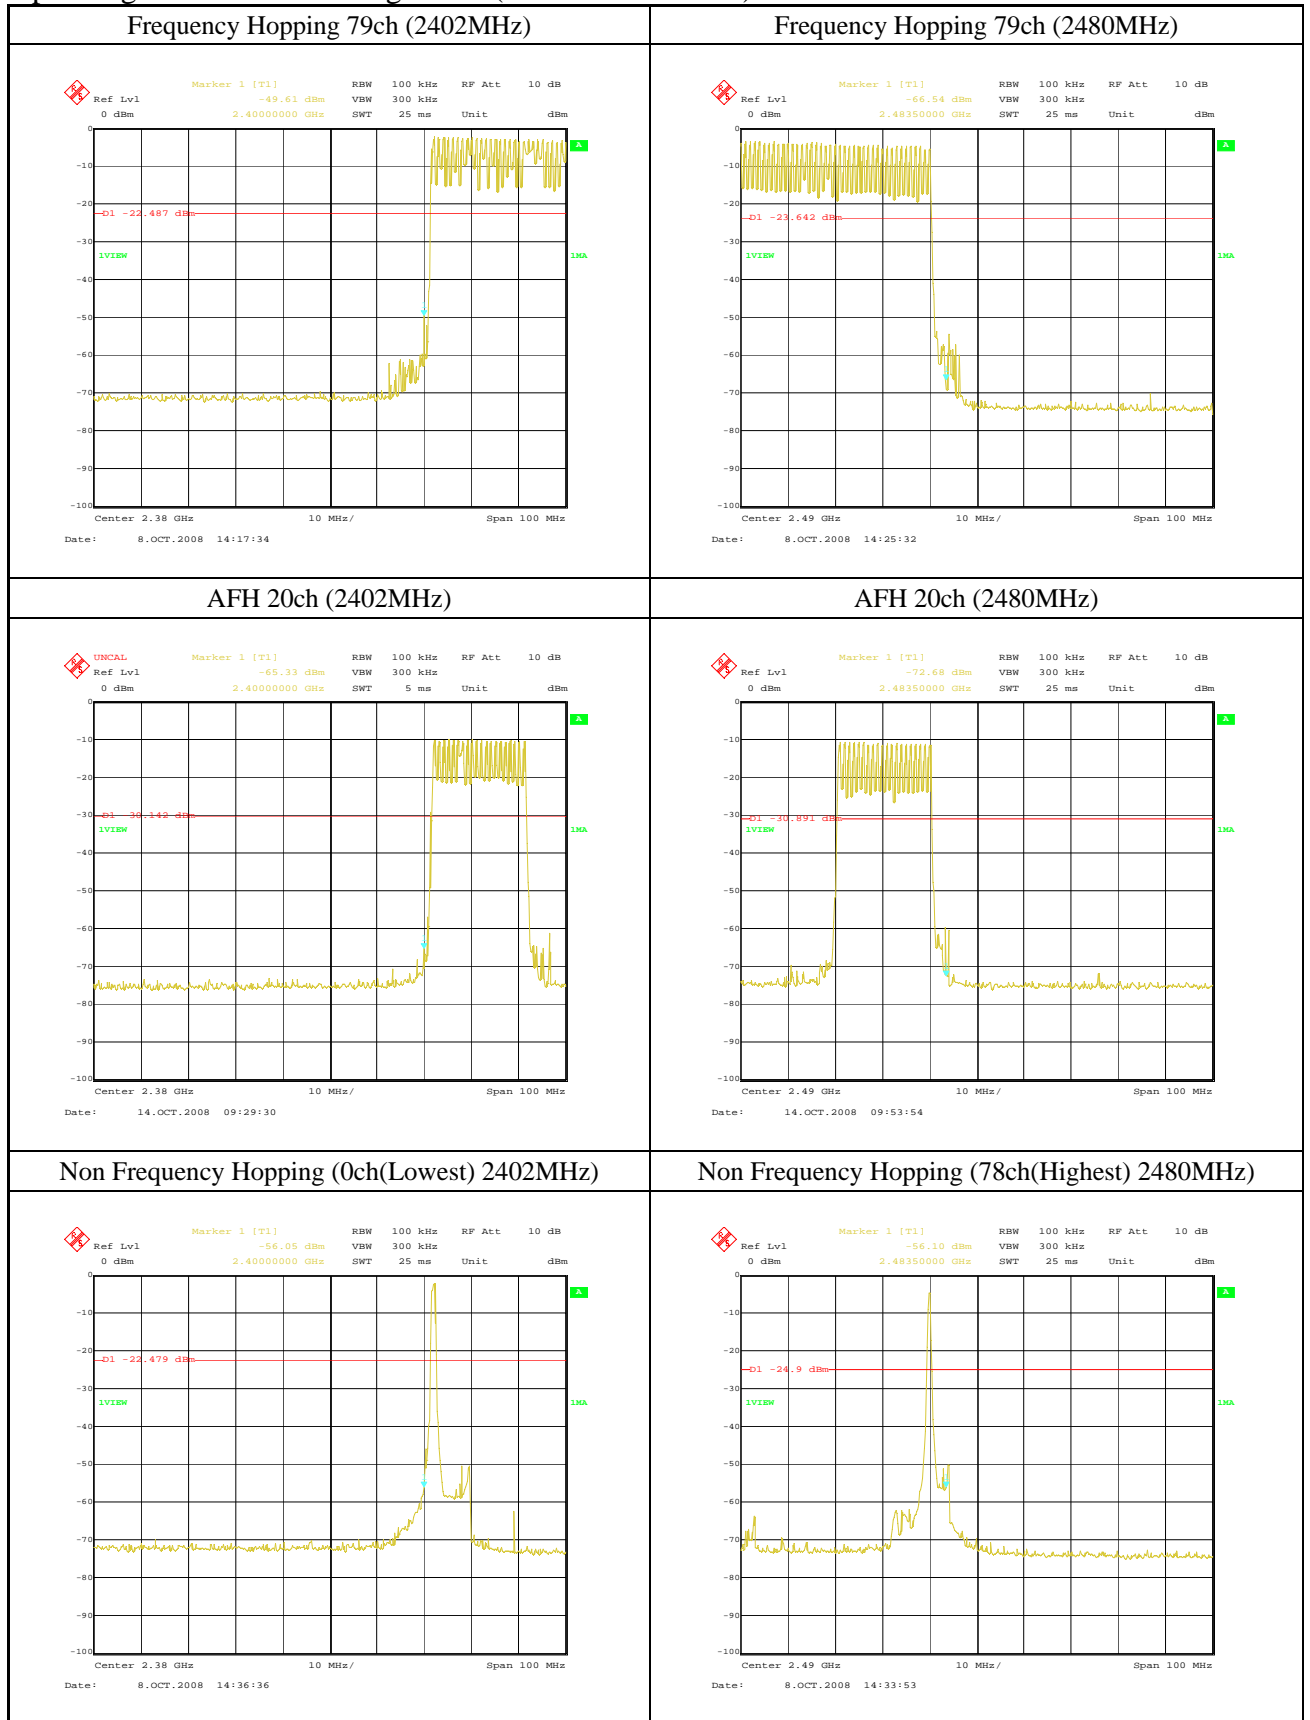

12 Spurious RF Conducted Emission

12.1 Test Setup

The spectrum analyzer was connected to the transmitter output port through the RF cable.

Spectrum Analyzer Setting:

Detector Mode	Peak
RBW	100kHz
VBW	300kHz
Sweep Time	Auto


12.2 Test Results

Serial No. : 0016fed6b531
Power : DC 3.30V
Transmitting Mode : Non Frequency Hopping
Temperature : 24.0°C
Humidity : 62.0 %
Regulation : FCC Part15 C §15.247 (d)


The spectrum data are attached next page. Display line indicates the 20dB offset below highest level. It shows compliance with the requirement in part 15.247(d).

Operating Mode: Transmitting Mode (GFSK Modulation)


(i) 0ch (Lowest) 2402MHz

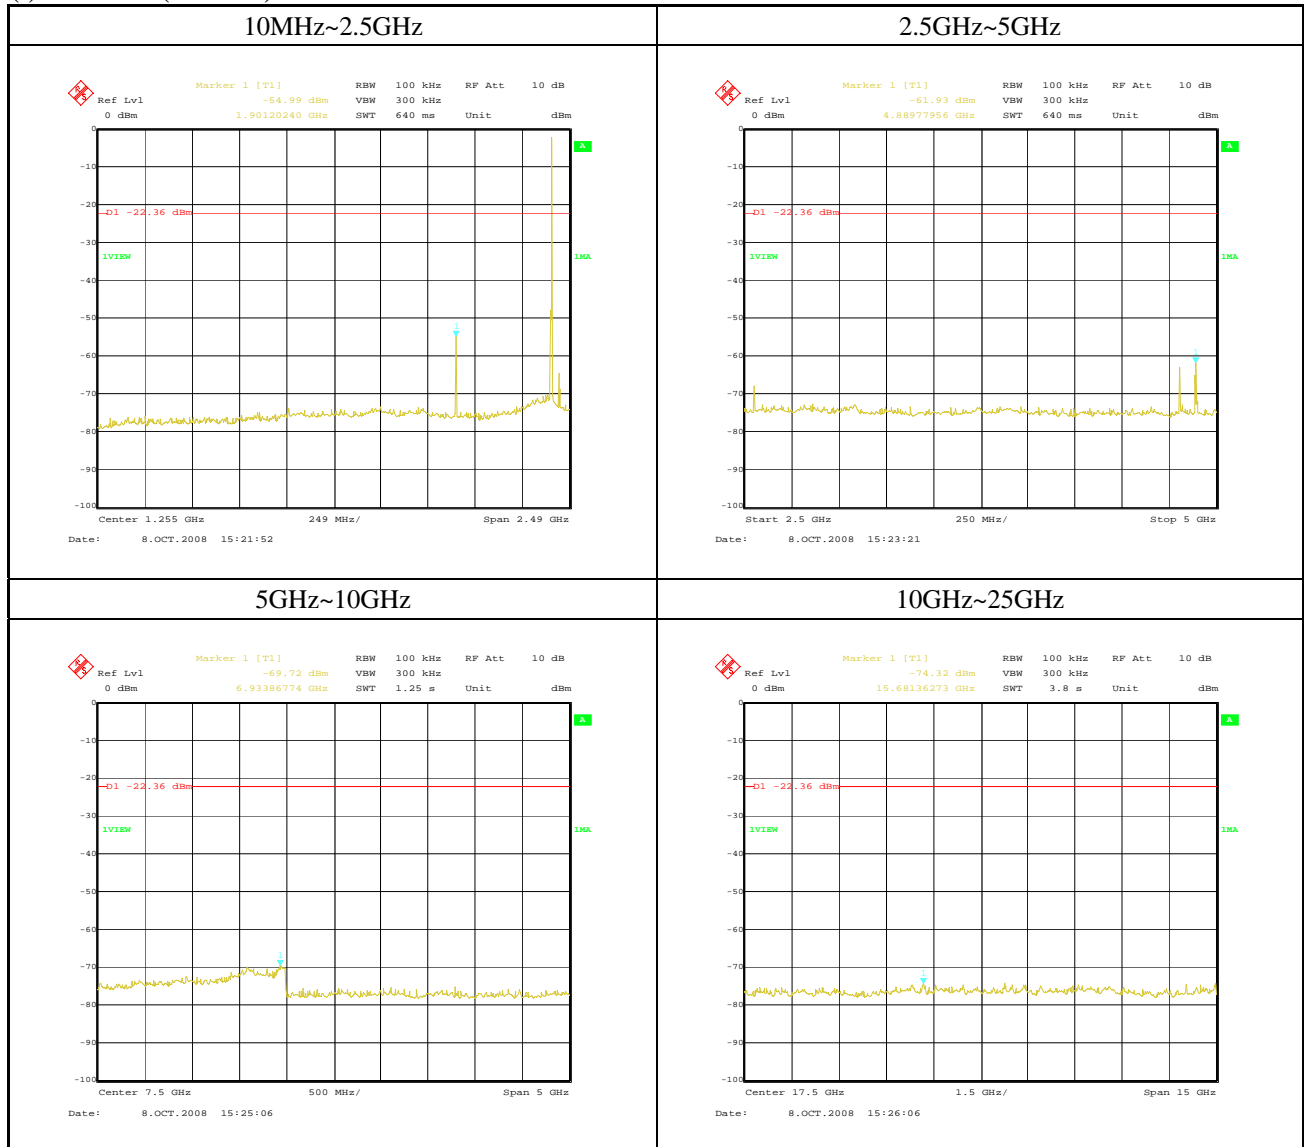

(ii) 39ch (Middle) 2441MHz

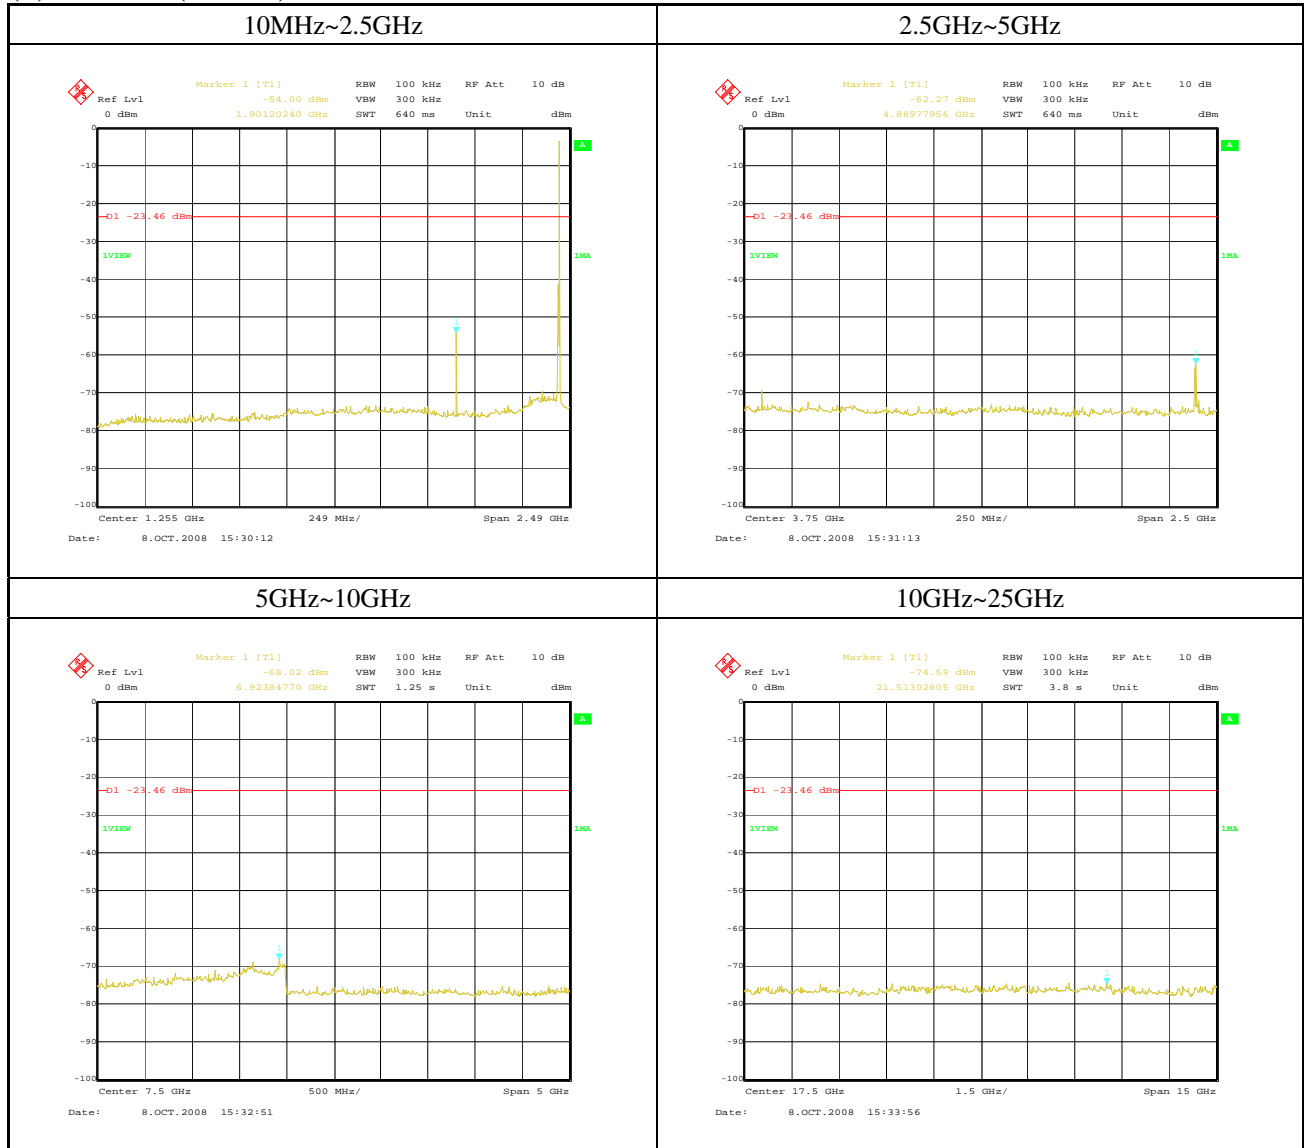

(iii) 78ch (Highest) 2480MHz

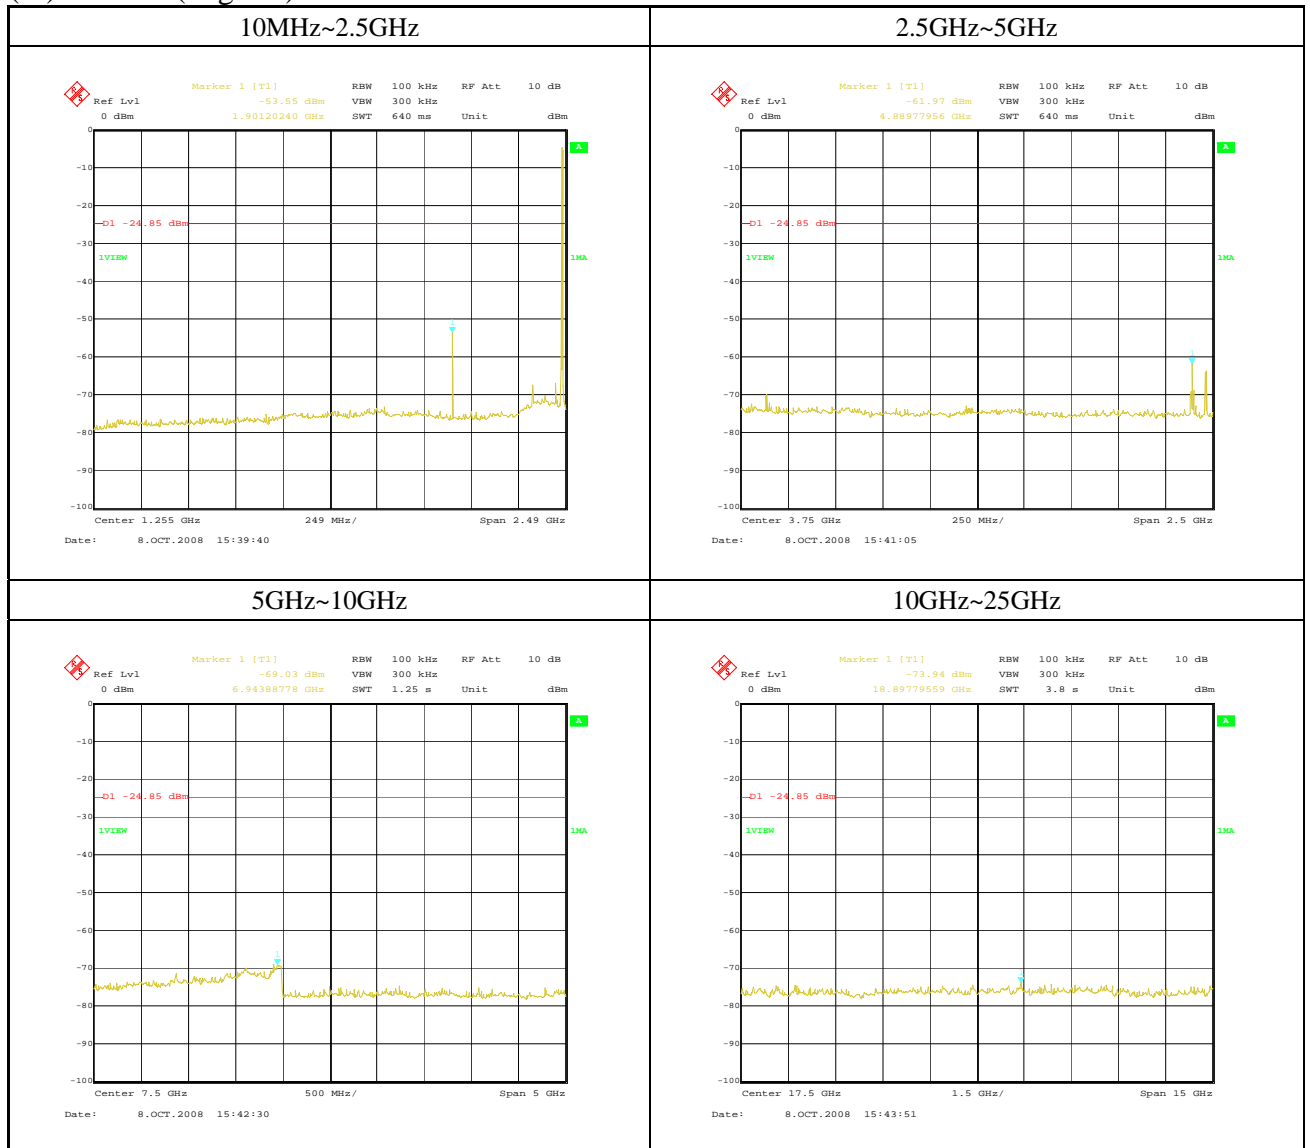

13 Radiated Emission

13.1 Test Setup

The test setup was made according to ANSI STD C63.4: 2003 clause 8 on the 10-meter semi-anechoic chamber, which allows a 3 or 1 m distance measurement.
 EUT was placed on non-conductive table (foam polystyrene).
 The height of this table was 0.8 m.
 The measurement has been conducted with both horizontal and vertical antenna polarization.
 For above 1GHz, the receiving antenna is fixed in the height that EUT is in the illumination area of the 3dB beamwidth of the antenna.
 The turntable has been fully rotated. The highest radiation of the equipment has been recorded.
 For further description of the configuration refer to separate document named "Test Setup Photos (8117FC)".

Distance between equipment and antenna : 3m (30MHz to 18GHz)
 1m (18GHz to 25GHz)

Test Receiver Setting:

30~1000MHz:

Detector Mode	Quasi-Peak
Bandwidth	120kHz

Spectrum Analyzer Setting:

1~25GHz:

Detector Mode	Peak and Average
Bandwidth	Peak: RBW: 1MHz, VBW: 1MHz
	Average: RBW: 1MHz, VBW: 10Hz

13.2 Radiated Emission Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading.

The basic equation with a sample calculation is as follows:

$$c.f. = AF + CF + AL - AG - DF$$

$$RE = RA + c.f.$$

Where

c.f.	:	Correction Factor [dB(1/m)]
RE	:	Radiated Emission (Emission Level - Result) [dB(uV/m)]
RA	:	Receiver Amplitude (Reading Level) [dBuV]
AF	:	Antenna Factor [dB(1/m)]
CF	:	Cable Attenuation Loss [dB]
AG	:	Amplifier Gain [dB]
AL	:	Attenuator Loss [dB]
DF	:	Distance Factor
		Distance between equipment and antenna: 3m = 0 [dB]
		Distance between equipment and antenna: 1m = 9.5 [dB]

Assume a receiver reading of 36.5 dBuV is obtained.
 The Correction Factor of -2.0 dB/m is added, giving a Radiated Emission of 34.5 dBuV/m.
 The 34.5 dBuV/m value was mathematically converted to its corresponding level in uV/m.

$$RE = 36.5 + (-2.0) = 34.5 \text{ dBuV/m}$$

$$\text{Level in uV/m} = \text{Common Antilogarithm: } 10^{(34.5/20)} = 53.1 \text{ uV/m}$$

13.3 Test Results

Product	: Bluetooth module with chip type antenna	Model	: UGZZ5-X02
Serial No.	: 0016fed6b531	Test Standard	: FCC Part15 Subpart C §15.247(d)
Power Supply	: DC 3.30V	Temp. / Humid.	: 23.8°C / 57.2%
Operator	: Sato		
Remark	: Transmitting Mode GFSK Modulation		

Radiated Emission: Lch (2402MHz)

Axial Direction: XY-Plane

Below 1GHz

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
62.217	V	29.0			-10.7	18.3			40.0	21.7			*
400.000	H	20.4			-4.8	15.6			46.0	30.4			Floor Noise

Above 1GHz

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
4804.000	H			48.2	1.3		49.5	74.0			24.5		
4804.000	H	38.4			1.3	39.7		54.0		14.3			
4804.000	V		51.2		1.3		52.5	74.0			21.5		
4804.000	V	41.5			1.3	42.8		54.0		11.2			
4885.950	V		50.2		1.6		51.8	74.0			22.2		
4885.950	V	34.4			1.6	36.0		54.0		18.0			
7206.000	H		44.1		4.0		48.1	74.0			25.9		* Floor Noise
7206.000	H	31.3			4.0	35.3		54.0		18.7			* Floor Noise
9608.000	H		43.4		7.0		50.4	74.0			23.6		* Floor Noise
9608.000	H	31.4			7.0	38.4		54.0		15.6			* Floor Noise
12010.000	H		45.2		8.0		53.2	74.0			20.8		Floor Noise
12010.000	H	32.8			8.0	40.8		54.0		13.2			Floor Noise

Note: * = Out of Restricted Band.

This frequency is out of the restricted bands, so radiated emission limits specified in Section 15.209 does not apply.

15.247(d):

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Axial Direction: YZ-Plane**Below 1GHz**

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
62.360	V	29.1			-10.8	18.3			40.0	21.7			*
400.000	H	20.4			-4.8	15.6			46.0	30.4			Floor Noise

Above 1GHz

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
4804.000	H			48.2	1.3			49.5	74.0			24.5	
4804.000	H	38.3			1.3		39.6		54.0		14.4		
4804.000	V			48.8	1.3			50.1	74.0			23.9	
4804.000	V	39.5			1.3		40.8		54.0		13.2		
4885.970	V			46.7	1.6			48.3	74.0			25.7	
4885.970	V	33.1			1.6		34.7		54.0		19.3		
7206.000	H			44.1	4.0			48.1	74.0			25.9	* Floor Noise
7206.000	H	31.3			4.0		35.3		54.0		18.7		* Floor Noise
9608.000	H			43.4	7.0			50.4	74.0			23.6	* Floor Noise
9608.000	H	31.4			7.0		38.4		54.0		15.6		* Floor Noise
12010.000	H			45.2	8.0			53.2	74.0			20.8	Floor Noise
12010.000	H	32.8			8.0		40.8		54.0		13.2		Floor Noise

Note: * = Out of Restricted Band.

This frequency is out of the restricted bands, so radiated emission limits specified in Section 15.209 does not apply.

15.247(d):

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Axial Direction: ZX-Plane**Below 1GHz**

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
62.493	V	28.5			-10.8	17.7			40.0	22.3			*
400.000	H	20.4			-4.8	15.6			46.0	30.4			Floor Noise

Above 1GHz

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
4804.000	H			49.0	1.3		50.3	74.0			23.7		
4804.000	H		39.7		1.3		41.0	54.0		13.0			
4804.000	V			48.7	1.3		50.0	74.0			24.0		
4804.000	V		38.1		1.3		39.4	54.0			14.6		
4885.883	V			45.2	1.6			46.8	74.0			27.2	
4885.883	V		32.3		1.6		33.9	54.0			20.1		
7206.000	H			44.1	4.0			48.1	74.0			25.9	* Floor Noise
7206.000	H		31.3		4.0		35.3	54.0			18.7		* Floor Noise
9608.000	H			43.4	7.0			50.4	74.0			23.6	* Floor Noise
9608.000	H		31.4		7.0		38.4	54.0			15.6		* Floor Noise
12010.000	H			45.2	8.0			53.2	74.0			20.8	Floor Noise
12010.000	H		32.8		8.0		40.8	54.0			13.2		Floor Noise

Note: * = Out of Restricted Band.

This frequency is out of the restricted bands, so radiated emission limits specified in Section 15.209 does not apply.

15.247(d):

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Radiated Emission: Mch (2441MHz)**Axial Direction: XY-Plane****Below 1GHz**

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
62.069	V	28.1			-10.7	17.4			40.0	22.6			*
250.000	H	20.1			-9.3	10.8			46.0	35.2			Floor Noise
400.000	H	20.4			-4.8	15.6			46.0	30.4			Floor Noise

Above 1GHz

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
4882.000	H			45.8	1.6			47.4	74.0			26.6	
4882.000	H	37.5			1.6			39.1	54.0			14.9	
4882.000	V			50.1	1.6			51.7	74.0			22.3	
4882.000	V	43.6			1.6			45.2	54.0			8.8	
4885.958	V			49.4	1.6			51.0	74.0			23.0	
4885.958	V	33.0			1.6			34.6	54.0			19.4	
7323.000	H			44.1	4.3			48.4	74.0			25.6	Floor Noise
7323.000	H	31.6			4.3			35.9	54.0			18.1	Floor Noise
9764.000	H			43.1	7.3			50.4	74.0			23.6	* Floor Noise
9764.000	H	31.1			7.3			38.4	54.0			15.6	* Floor Noise
12205.000	H			44.6	8.1			52.7	74.0			21.3	Floor Noise
12205.000	H	32.2			8.1			40.3	54.0			13.7	Floor Noise

Note: * = Out of Restricted Band.

This frequency is out of the restricted bands, so radiated emission limits specified in Section 15.209 does not apply.

15.247(d):

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Axial Direction: YZ-Plane**Below 1GHz**

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
62.748	V	28.5			-10.8	17.7			40.0	22.3			*
250.000	H	20.1			-9.3	10.8			46.0	35.2			Floor Noise
400.000	H	20.4			-4.8	15.6			46.0	30.4			Floor Noise

Above 1GHz

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
4882.000	H			45.2	1.6			46.8	74.0			27.2	
4882.000	H		36.9		1.6		38.5		54.0		15.5		
4882.000	V			47.3	1.6			48.9	74.0			25.1	
4882.000	V		38.9		1.6		40.5		54.0		13.5		
4885.958	V			47.3	1.6			48.9	74.0			25.1	
4885.958	V		32.1		1.6		33.7		54.0		20.3		
7323.000	H			44.1	4.3			48.4	74.0			25.6	Floor Noise
7323.000	H		31.6		4.3		35.9		54.0		18.1		Floor Noise
9764.000	H			43.1	7.3			50.4	74.0			23.6	* Floor Noise
9764.000	H		31.1		7.3		38.4		54.0		15.6		* Floor Noise
12205.000	H			44.6	8.1			52.7	74.0			21.3	Floor Noise
12205.000	H		32.2		8.1		40.3		54.0		13.7		Floor Noise

Note: * = Out of Restricted Band.

This frequency is out of the restricted bands, so radiated emission limits specified in Section 15.209 does not apply.

15.247(d):

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Axial Direction: ZX-Plane**Below 1GHz**

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
62.520	V	28.0			-10.8	17.2			40.0	22.8			*
250.000	H	20.1			-9.3	10.8			46.0	35.2			Floor Noise
400.000	H	20.4			-4.8	15.6			46.0	30.4			Floor Noise

Above 1GHz

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
4882.000	H		48.1		1.6		49.7		74.0		24.3		
4882.000	H	40.8			1.6	42.4			54.0	11.6			
4882.000	V		49.5		1.6		51.1		74.0		22.9		
4882.000	V	42.8			1.6	44.4			54.0	9.6			
4886.083	V		48.0		1.6		49.6		74.0		24.4		
4886.083	V	32.2			1.6	33.8			54.0	20.2			
7323.000	H		44.1		4.3		48.4		74.0		25.6		Floor Noise
7323.000	H	31.6			4.3	35.9			54.0	18.1			Floor Noise
9764.000	H		43.1		7.3		50.4		74.0		23.6		* Floor Noise
9764.000	H	31.1			7.3	38.4			54.0	15.6			* Floor Noise
12205.000	H		44.6		8.1		52.7		74.0		21.3		Floor Noise
12205.000	H	32.2			8.1	40.3			54.0	13.7			Floor Noise

Note: * = Out of Restricted Band.

This frequency is out of the restricted bands, so radiated emission limits specified in Section 15.209 does not apply.

15.247(d):

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Radiated Emission: Hch (2480MHz)**Axial Direction: XY-Plane****Below 1GHz**

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
62.463	V	28.6			-10.8	17.8			40.0	22.2			*
400.000	H	20.4			-4.8	15.6			46.0	30.4			Floor Noise

Above 1GHz

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
2483.500	H			54.2	-4.8			49.4	74.0			24.6	
2483.500	H		33.9		-4.8		29.1		54.0		24.9		
2483.500	V		49.0		-4.8			44.2	74.0			29.8	
2483.500	V		32.8		-4.8		28.0		54.0		26.0		
4886.083	V		49.1		1.6			50.7	74.0			23.3	
4886.083	V		34.2		1.6		35.8		54.0		18.2		
4960.000	H		45.5		1.8			47.3	74.0			26.7	
4960.000	H		35.7		1.8		37.5		54.0		16.5		
4960.000	V		49.1		1.8			50.9	74.0			23.1	
4960.000	V		39.6		1.8		41.4		54.0		12.6		
7440.000	H		42.9		4.6			47.5	74.0			26.5	Floor Noise
7440.000	H		32.5		4.6		37.1		54.0		16.9		Floor Noise
9920.000	H		44.1		7.5			51.6	74.0			22.4	* Floor Noise
9920.000	H		31.6		7.5		39.1		54.0		14.9		* Floor Noise
12400.000	H		44.3		8.2			52.5	74.0			21.5	Floor Noise
12400.000	H		32.5		8.2		40.7		54.0		13.3		Floor Noise

Note: * = Out of Restricted Band.

This frequency is out of the restricted bands, so radiated emission limits specified in Section 15.209 does not apply.

15.247(d):

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Axial Direction: YZ-Plane**Below 1GHz**

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
62.406	V	28.8			-10.8	18.0			40.0	22.0			*
400.000	H	20.4			-4.8	15.6			46.0	30.4			Floor Noise

Above 1GHz

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
2483.500	H			53.9	-4.8			49.1	74.0			24.9	
2483.500	H		33.6		-4.8		28.8		54.0		25.2		
2483.500	V			51.4	-4.8			46.6	74.0			27.4	
2483.500	V		33.0		-4.8		28.2		54.0		25.8		
4886.033	V			46.2	1.6			47.8	74.0			26.2	
4886.033	V		33.1		1.6		34.7		54.0		19.3		
4960.000	H			48.2	1.8			50.0	74.0			24.0	
4960.000	H		39.0		1.8		40.8		54.0		13.2		
4960.000	V			46.2	1.8			48.0	74.0			26.0	
4960.000	V		35.8		1.8		37.6		54.0		16.4		
7440.000	H			42.9	4.6			47.5	74.0			26.5	Floor Noise
7440.000	H		32.5		4.6		37.1		54.0		16.9		Floor Noise
9920.000	H			44.1	7.5			51.6	74.0			22.4	* Floor Noise
9920.000	H		31.6		7.5		39.1		54.0		14.9		* Floor Noise
12400.000	H			44.3	8.2			52.5	74.0			21.5	Floor Noise
12400.000	H		32.5		8.2		40.7		54.0		13.3		Floor Noise

Note: * = Out of Restricted Band.

This frequency is out of the restricted bands, so radiated emission limits specified in Section 15.209 does not apply.

15.247(d):

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Axial Direction: ZX-Plane**Below 1GHz**

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
62.337	V	28.5			-10.8	17.7			40.0	22.3			*
400.000	H	20.4			-4.8	15.6			46.0	30.4			Floor Noise

Above 1GHz

Frequency [MHz]	Pol. [H / V]	Reading [dB(uV)]			Factor [dB/m]	Level [dB(uV/m)]			Limit [dB(uV/m)]	Margin [dB]			Remark
		QP	AV	PK		QP	AV	PK		QP	AV	PK	
2483.500	H			55.4	-4.8			50.6	74.0			23.4	
2483.500	H		33.7		-4.8		28.9		54.0			25.1	
2483.500	V			58.8	-4.8			54.0	74.0			20.0	
2483.500	V		35.2		-4.8		30.4		54.0			23.6	
4886.033	V			46.6	1.6			48.2	74.0			25.8	
4886.033	V		32.7		1.6		34.3		54.0			19.7	
4960.000	H			47.6	1.8			49.4	74.0			24.6	
4960.000	H		35.7		1.8		37.5		54.0			16.5	
4960.000	V			49.5	1.8			51.3	74.0			22.7	
4960.000	V		39.2		1.8		41.0		54.0			13.0	
7440.000	H			42.9	4.6			47.5	74.0			26.5	Floor Noise
7440.000	H		32.5		4.6		37.1		54.0			16.9	Floor Noise
9920.000	H			44.1	7.5			51.6	74.0			22.4	* Floor Noise
9920.000	H		31.6		7.5		39.1		54.0			14.9	* Floor Noise
12400.000	H			44.3	8.2			52.5	74.0			21.5	Floor Noise
12400.000	H		32.5		8.2		40.7		54.0			13.3	Floor Noise

Note: * = Out of Restricted Band.

This frequency is out of the restricted bands, so radiated emission limits specified in Section 15.209 does not apply.

15.247(d):

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


14 Photos of Tested EUT and Test Setup

Setup photo with EUT has been submitted as separate document named "Test Setup Photos (8117FC)".

Appendix 1: AFH-Hopping Sequence

AFH-Hopping Sequence is provided for in the Bluetooth Spec 1.2. Here is an outline below.


1. In the case of 79Hopping

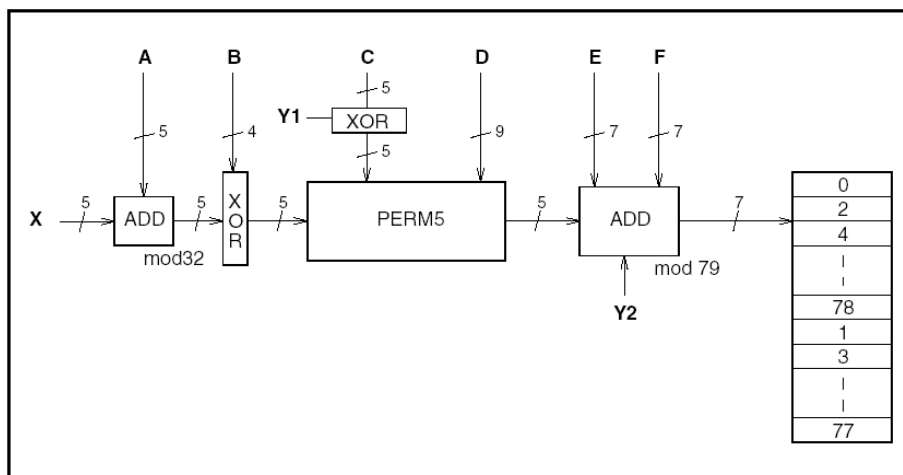

Due to the above flow, 32 hops are made into 5 ways. Then, the sign of the sign head 160 is formed. The remainder that is worked out by dividing with 79 is assigned to Hopping Channel.

Each parameter of the above figure uses the value calculated from the Bluetooth clock and the Bluetooth address, which are shown in the next page.

2. In the case of AFH-Hopping

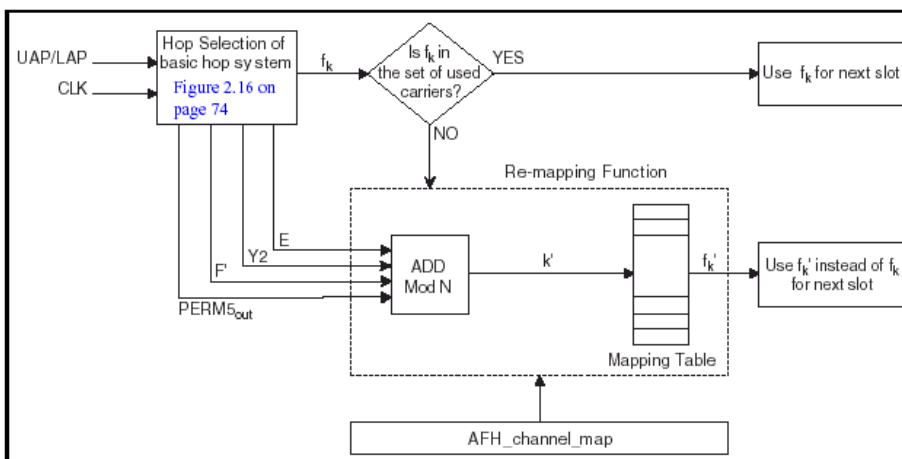

Also in the case of AFH, the fundamental sign adopt the sign head 160 that is the same as the case of 79Hopping. Hopping Pattern uses the value that is worked out by dividing with the number of AFH-Channel's. Then, available Hopping becomes even as well as 79Hopping.

The selection of the communication Channel is done by the communication error rate and the receiving signal strength. Frequency is determined by pairing the channel and the value, which is divided by the number of AFH-Channel one-to-one.

It is decided in the specifications that Communication Channel has to have "20Channels" at least. However, if the number of communication Channel is controlled to be under 20 back to 79Channel-Hopping, and select the communication Channel again.

3. The parameter list which decides Hopping-Pattern

	Page scan / Interlaced Page Scan / Inquiry scan / Interlaced Inquiry Scan	Page/Inquiry	Master/Slave page response and Inquiry response	Connection state
X	$CLKN_{16-12} /$ $(CLKN_{16-12} + 16) \bmod 32 /$ $Xir_{4-0} /$ $Xir_{4-0} + 16) \bmod 32$	Xp_{4-0} / Xi_{4-0}	$Xprm_{4-0} /$ $Xprs_{4-0} /$ Xir_{4-0}	CLK_{6-2}
Y1	0	$CLKE_1 / CLK_{N_1}$	$CLKE_1 / CLK_{N_1} / 1$	CLK_1
Y2	0	$32 \times CLKE_1 /$ $32 \times CLK_{N_1}$	$32 \times CLKE_1 /$ $32 \times CLK_{N_1} /$ 32×1	$32 \times CLK_1$
A	A_{27-23}	A_{27-23}	A_{27-23}	$A_{27-23} \oplus CLK_{25-21}$
B	A_{22-19}	A_{22-19}	A_{22-19}	A_{22-19}
C	$A_{8,6,4,2,0}$	$A_{8,6,4,2,0}$	$A_{8,6,4,2,0}$	$A_{8,6,4,2,0} \oplus CLK_{20-16}$
D	A_{18-10}	A_{18-10}	A_{18-10}	$A_{18-10} \oplus CLK_{15-7}$
E	$A_{13,11,9,7,5,3,1}$	$A_{13,11,9,7,5,3,1}$	$A_{13,11,9,7,5,3,1}$	$A_{13,11,9,7,5,3,1}$
F	0	0	0	$16 \times CLK_{27-7} \bmod 79$
F'	n/a	n/a	n/a	$16 \times CLK_{27-7} \bmod N$

Appendix 2: Certificate of Accreditation

United States Department of Commerce
National Institute of Standards and Technology

NVLAP[®]

Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 200607-0

Taiyo Yuden Co., Ltd. EMC Center
Takasaki-shi Gunma 370-3347
JAPAN

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated 18 June 2005).*

2008-10-01 through 2009-09-30
Effective dates



Jelly S. Bruce
For the National Institute of Standards and Technology

Appendix 3: Test Instruments

1. Conducted RF Test via Antenna Terminal

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date (Interval (year))	
Spectrum Analyzer	Rohde & Schwarz	FSIQ26	840061/0004	22 February 2008 (1)	●
	Agilent Technologies	E4446A	US42070181	17 October 2007 (1)	○
Power Meter	Agilent Technologies	N1911A	MY45100612	18 February 2008 (1)	○
Power Sensor	Agilent Technologies	N1922A	MY45240439	18 February 2008 (1)	○
RF Cable	SUHNER	SUCOFLEX 104	RF2-2	1 July 2008 (1)	●
		SUCOFLEX 104E	RF3-3	1 July 2008 (1)	○
Power Divider	Aeroflex / Inmet	6005-03	RF-8	1 July 2008 (1)	●
Multi Meter	Agilent Technologies	34401A	MY41038383	25 June 2008 (1)	●
Hygro Thermograph	SEKONIC	ST-200	HD01-000779	14 February 2008 (1)	●

Note:

- : Applied by measurement.
- : Not applied by measurement.

2. Radiated Emission Test

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date (Interval (year))	
10m Anechoic Chamber	TDK Co., Ltd.	DA-06912	-	12 February 2008 (1)	●
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100148	18 July 2008 (1)	●
Spectrum Analyzer	Agilent Technologies	E4407B	MY44221019	28 April 2008 (1)	●
		E4446A	US42070181	17 October 2007 (1)	●
Amplifier	Agilent Technologies	83017A	3950M00169	31 July 2008 (1)	●
		8447D	2944A06812	11 September 2008 (1)	●
RF Selector	TDK Co., Ltd	NS4900	0302-010		
Tunable Filter	TOYO Corporation	NF-49BT	No.1	31 July 2008 (1)	○
RF Filter	Microtronics	ERM50702-01	020		○
RF Cable	SUHNER	RG214	RG1	11 September 2008 (1)	●
		RG214	RG3		●
		RG214	RG5		●
		RG214	RG7		●
		RG214	RG8		●
	HP	HP8120-4782	163 9232	●	
	SUHNER	SUCOFLEX 106	SU1	31 July 2008 (1)	●
		SUCOFLEX 103	SU5		●
SUCOFLEX 103		SU6	○		
HP	85381C	No.3		●	
Attenuator	KYORITSU	KPD-602	220142	11 September 2008 (1)	●
Antenna	Schwarzbeck	BBA9106	No.3	19 December 2007 (1)	○
		UHALP9108-A	0160		○
		VULB9160	3179		●
		VHA9103	No.3 (+D3-1, 2)		○
		UHA9105	No.3		○
	EMCO	3115	9403-4232	13 February 2008 (2)	●
		3116	9311-2227		●
Multi Meter	Agilent Technologies	34401A	MY41038383	25 June 2008 (1)	●
Hygro Thermograph	SEKONIC	ST-50	HE01-00511	14 February 2008 (1)	●
Software	TOYO Corporation	EP5/RE Ver.3.7.0	0208086	-	●

Note:

- : Applied by measurement.
- : Not applied by measurement.