

# TEST REPORT

**Reference No.**..... : WTS14S0312655E  
**FCC ID** ..... : SJ8-CA630HR  
**Applicant**..... : RDI Technology (Shenzhen) Co., Ltd.  
**Address**..... : Building C1, Xintang Industrial Park East Baishixia, Fuyong, Baoan, Shenzhen, PRC.  
**Manufacturer** ..... : The same as above  
**Address**..... : The same as above  
**Product Name**..... : Digital Wireless Camera  
**Model No**..... : CA630HR  
**Standards**..... : FCC CFR47 Part 15 Section 15.247:2012  
**Date of Receipt sample** .... : Apr.01, 2014  
**Date of Test** ..... : Apr.02~04, 2014  
**Date of Issue**..... : Apr.11, 2014  
**Test Result**..... : **Pass \***

**\*Remarks:**

The results shown in this test report refer only to the sample(s) tested; this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Testing location: The same as above

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

## 2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 TEST SUMMARY</b> .....	<b>2</b>
<b>3 CONTENTS</b> .....	<b>3</b>
<b>4 GENERAL INFORMATION</b> .....	<b>5</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	5
4.2 DETAILS OF E.U.T. ....	5
4.3 CHANNEL LIST .....	5
4.4 TEST MODE .....	6
4.5 TEST FACILITY .....	6
<b>5 EQUIPMENT USED DURING TEST</b> .....	<b>7</b>
5.1 EQUIPMENTS LIST .....	7
5.2 MEASUREMENT UNCERTAINTY .....	7
5.3 TEST EQUIPMENT CALIBRATION .....	7
<b>6 CONDUCTED EMISSION</b> .....	<b>8</b>
6.1 E.U.T. OPERATION .....	8
6.2 EUT SETUP .....	8
6.3 MEASUREMENT DESCRIPTION .....	8
6.4 CONDUCTED EMISSION TEST RESULT .....	9
<b>7 RADIATED SPURIOUS EMISSIONS</b> .....	<b>11</b>
7.1 EUT OPERATION.....	11
7.2 TEST SETUP .....	12
7.3 SPECTRUM ANALYSER SETUP .....	13
7.4 TEST PROCEDURE .....	14
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
7.6 SUMMARY OF TEST RESULTS .....	15
<b>8 BAND EDGE MEASUREMENT</b> .....	<b>18</b>
8.1 TEST PROCEDURE .....	18
8.2 TEST RESULT .....	18
<b>9 20 DB BANDWIDTH MEASUREMENT</b> .....	<b>20</b>
9.1 TEST PROCEDURE .....	20
9.2 TEST RESULT .....	20
<b>10 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>22</b>
10.1 TEST PROCEDURE.....	22
10.2 TEST RESULT .....	22
<b>11 HOPPING CHANNEL SEPARATION</b> .....	<b>25</b>
11.1 TEST PROCEDURE.....	25
11.2 TEST RESULT .....	25
<b>12 NUMBER OF HOPPING FREQUENCY</b> .....	<b>28</b>
12.1 TEST PROCEDURE.....	28
12.2 TEST RESULT .....	28
<b>13 DWELL TIME</b> .....	<b>29</b>
13.1 TEST PROCEDURE.....	29
13.2 TEST RESULT .....	29
<b>14 ANTENNA REQUIREMENT</b> .....	<b>33</b>

<b>15</b>	<b>RF EXPOSURE.....</b>	<b>34</b>
15.1	REQUIREMENTS.....	34
15.2	THE PROCEDURES / LIMIT.....	34
15.3	MPE CALCULATION METHOD.....	35
<b>16</b>	<b>PHOTOGRAPHS – TEST SETUP.....</b>	<b>36</b>
16.1	PHOTOGRAPH – CONDUCTED EMISSION TEST SETUP.....	36
16.2	PHOTOGRAPH – RADIATION SPURIOUS EMISSION TEST SETUP.....	36
<b>17</b>	<b>PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....</b>	<b>38</b>
17.1	EXTERNAL VIEW.....	38
17.2	INTERNAL VIEW.....	44

## 4 General Information

### 4.1 General Description of E.U.T.

Product Name	: Digital Wireless Camera
Model No.	: CA630HR
Operation Frequency	: 2402MHz ~ 2480MHz, 40 channels in total
Type of Modulation	: GFSK
The lowest oscillator	: 32.768kHz
Antenna installation	: Monopole antenna
Antenna Gain	: 2dBi

### 4.2 Details of E.U.T.

Technical Data	:DC 9V, 600mA powered by adapter (Adapter Input: 100-240V~50/60Hz, 200mA)
Adapter	: Csec, M/N:CS6D090060FUF

### 4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	15	2430	29	2458
2	2404	16	2432	30	2460
3	2406	17	2434	31	2462
4	2408	18	2436	32	2464
5	2410	19	2438	33	2466
6	2412	20	2440	34	2468
7	2414	21	2442	35	2470
8	2416	22	2444	36	2472
9	2418	23	2446	37	2474
10	2420	24	2448	38	2476
11	2422	25	2450	39	2478
12	2424	26	2452	40	2480
13	2426	27	2454	-	-
14	2428	28	2456	-	-

#### 4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2440MHz	2480MHz

#### 4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services (Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A-1, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

Registration 880581, May 26, 2011.

## 5 Equipment Used during Test

### 5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.18,2013	Sep.17,2014
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.18,2013	Sep.17,2014
3.	Limitter	York	MTS-IMP-136	261115-001-0024	Sep.18,2013	Sep.17,2014
4.	Cable	LARGE	RF300	-	Sep.18,2013	Sep.17,2014
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.18,2013	Sep.17,2014
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.18,2013	Sep.17,2014
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.20,2013	Apr.19,2014
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.18,2013	Sep.17,2014
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.20,2013	Apr.19,2014
6	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2014	Mar.16,2015
7	Coaxial Cable (above 1GHz)	Top	1000MHZ-25GHz	EW02014-7	Apr.20,2013	Apr.19,2014
8	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.20,2013	Apr.19,2014

### 5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (Bilog antenna 30M~1000MHz)
	$\pm 5.47$ dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)

### 5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz 56 dB $\mu$ V between 0.5MHz & 5MHz 60 dB $\mu$ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

### 6.1 E.U.T. Operation

Operating Environment :


Temperature:	22.6 °C
Humidity:	52.5 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

### 6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

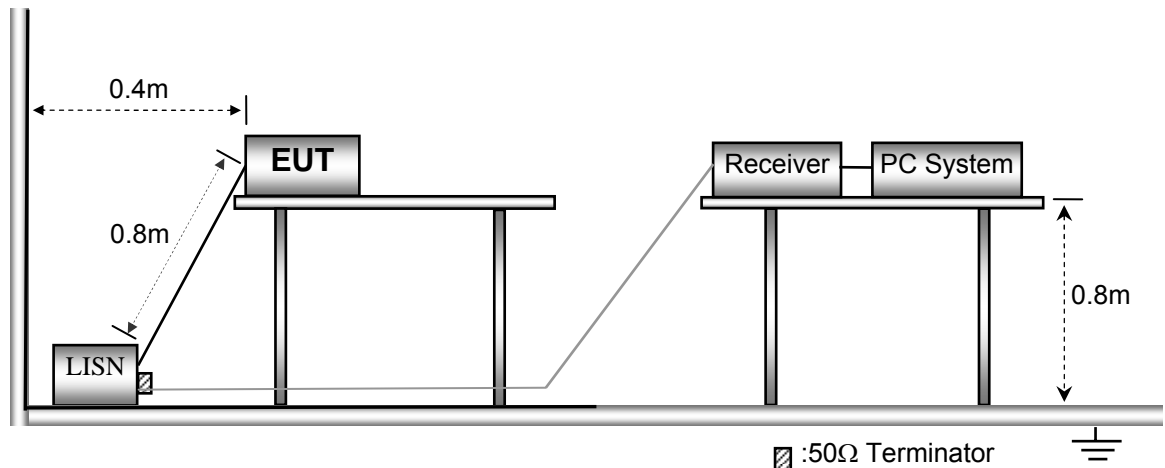


### 6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.




## 6.4 Conducted Emission Test Result

Live line:

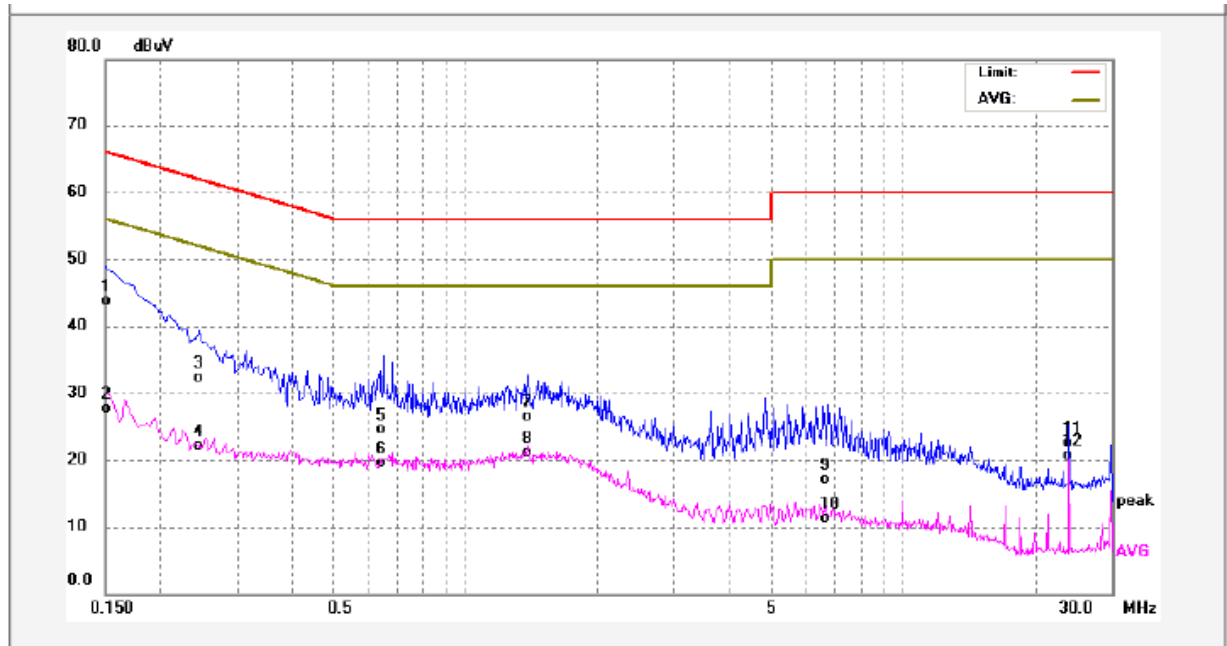

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	33.11	10.57	43.68	65.99	-22.31	QP	
2	0.1500	17.12	10.57	27.69	55.99	-28.30	AVG	
3	0.2460	21.64	10.57	32.21	61.89	-29.68	QP	
4	0.2460	11.55	10.57	22.12	51.89	-29.77	AVG	
5	0.6500	13.54	11.04	24.58	56.00	-31.42	QP	
6	0.6500	8.37	11.04	19.41	46.00	-26.59	AVG	
7	1.3820	15.48	10.95	26.43	56.00	-29.57	QP	
8	1.3820	10.19	10.95	21.14	46.00	-24.86	AVG	
9	6.7420	6.37	10.76	17.13	60.00	-42.87	QP	
10	6.7420	0.53	10.76	11.29	50.00	-38.71	AVG	
11	23.9980	10.93	11.59	22.52	60.00	-37.48	QP	
12	23.9980	9.07	11.59	20.66	50.00	-29.34	AVG	

Neutral line:

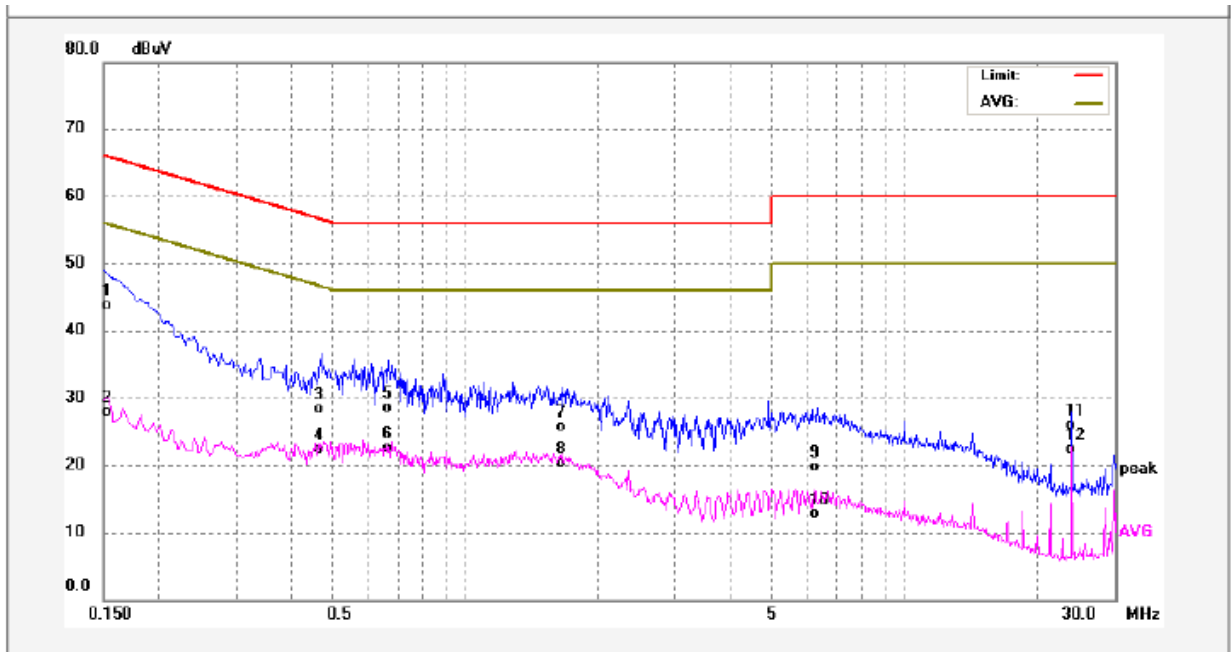

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	33.16	10.57	43.73	65.99	-22.26	QP	
2	0.1500	17.41	10.57	27.98	55.99	-28.01	AVG	
3	0.4700	17.79	10.56	28.35	56.51	-28.16	QP	
4	0.4700	11.71	10.56	22.27	46.51	-24.24	AVG	
5	0.6700	17.32	11.10	28.42	56.00	-27.58	QP	
6	0.6700	11.31	11.10	22.41	46.00	-23.59	AVG	
7	1.6540	14.49	11.15	25.64	56.00	-30.36	QP	
8	1.6540	9.20	11.15	20.35	46.00	-25.65	AVG	
9	6.3300	8.94	10.75	19.69	60.00	-40.31	QP	
10	6.3300	1.94	10.75	12.69	50.00	-37.31	AVG	
11	23.9980	14.25	11.59	25.84	60.00	-34.16	QP	
12	23.9980	10.70	11.59	22.29	50.00	-27.71	AVG	

## 7 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


## 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

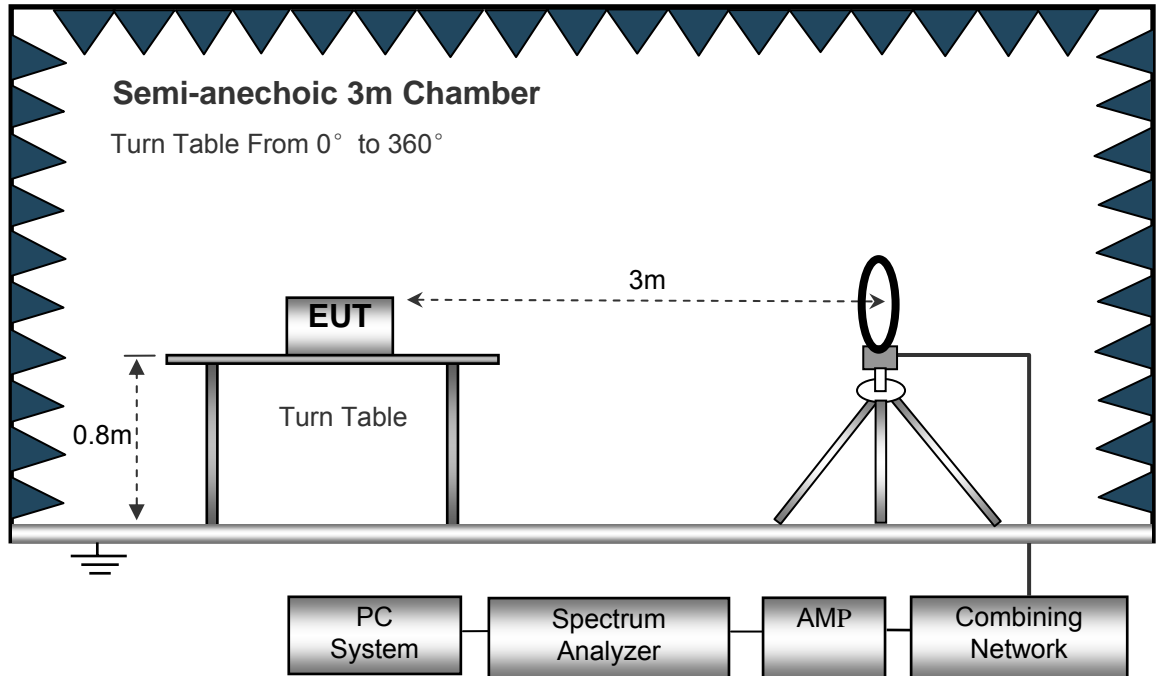

The test setup for emission measurement from 30 MHz to 1 GHz.

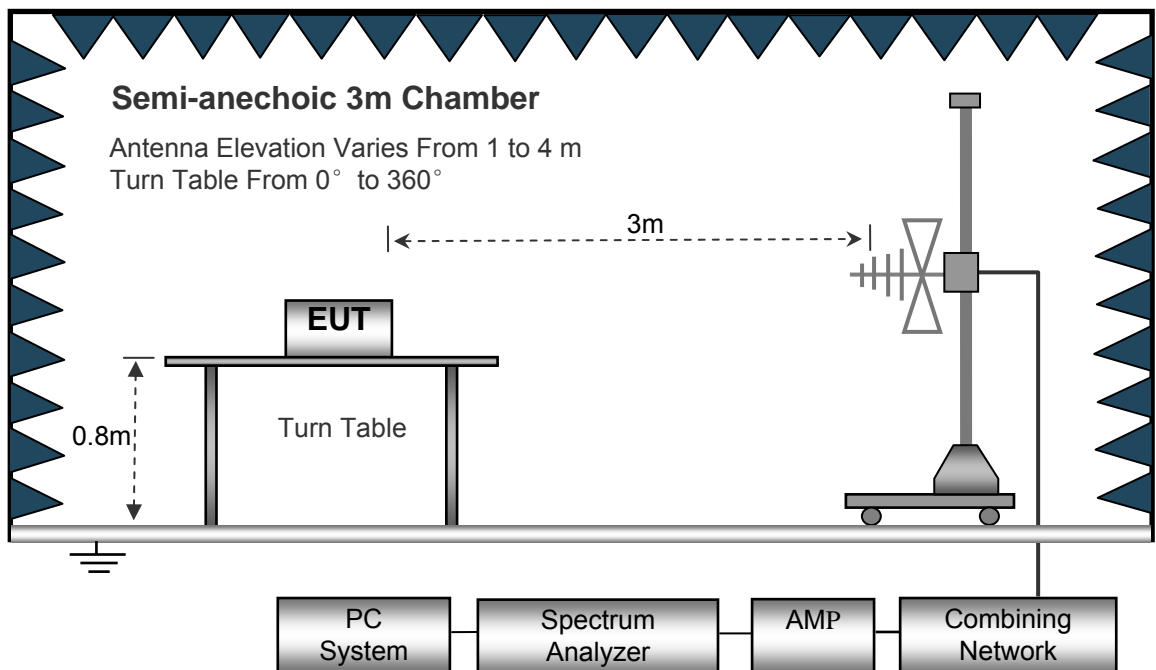

The test setup for emission measurement above 1 GHz.

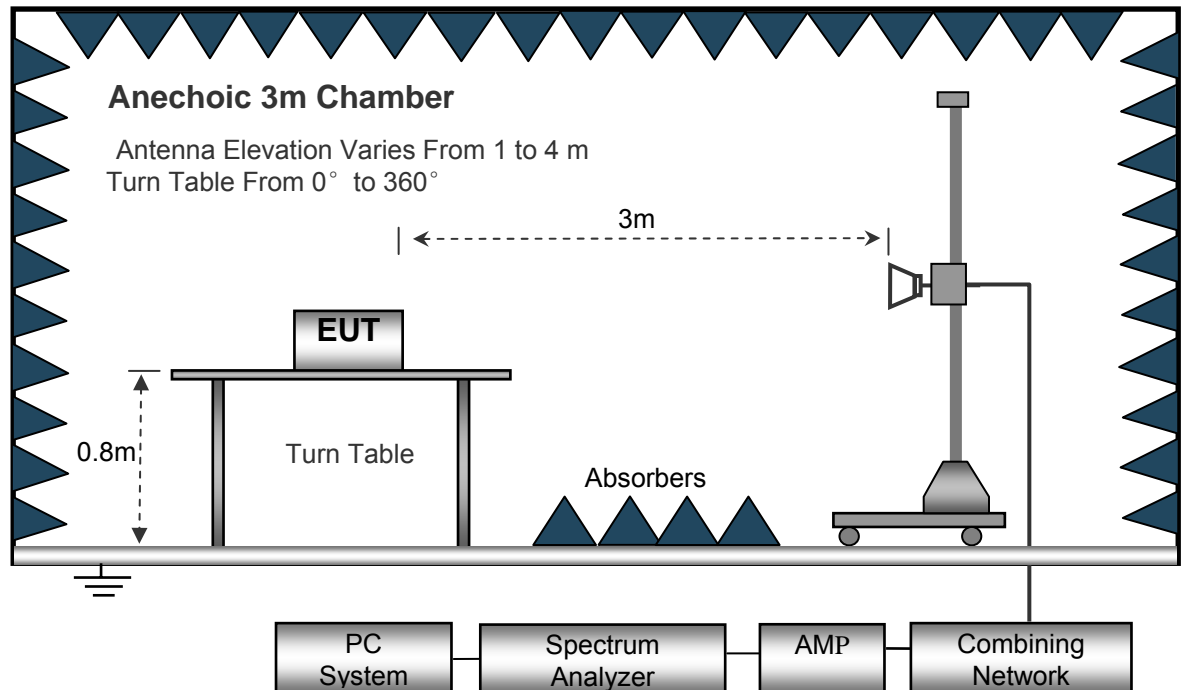

### 7.3 Spectrum Analyser Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

## 7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 7.6 Summary of Test Results

### Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

### Test Frequency: 30MHz ~ 18GHz

Test mode: transmitting mode

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Low Channel									
199.10	23.12	QP	315	1.2	H	11.13	34.25	40.00	-5.75
199.10	19.69	QP	35	1.4	V	11.13	30.82	40.00	-9.18
4804.00	52.90	PK	74	1.5	V	-1.06	51.84	74.00	-22.16
4804.00	43.28	Ave	74	1.5	V	-1.06	42.22	54.00	-11.78
7206.00	41.81	PK	9	1.3	H	1.33	43.14	74.00	-30.86
7206.00	38.28	Ave	9	1.3	H	1.33	39.61	54.00	-14.39
2314.65	45.06	PK	270	1.3	V	-13.19	31.87	74.00	-42.13
2314.65	39.61	Ave	270	1.3	V	-13.19	26.42	54.00	-27.58
2382.40	42.90	PK	325	1.2	H	-13.14	29.76	74.00	-44.24
2382.40	37.39	Ave	325	1.2	H	-13.14	24.25	54.00	-29.75
2489.28	43.86	PK	356	1.6	V	-13.08	30.78	74.00	-43.22
2489.28	36.73	Ave	356	1.6	V	-13.08	23.65	54.00	-30.35

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Middle Channel									
199.10	23.75	QP	15	1.7	H	11.13	34.88	40.00	-5.12
199.10	19.49	QP	118	1.4	V	11.13	30.62	40.00	-9.38
4880.00	53.23	PK	311	1.5	V	-0.62	52.61	74.00	-21.39
4880.00	44.21	Ave	311	1.5	V	-0.62	43.59	54.00	-10.41
7320.00	40.66	PK	288	1.2	H	2.21	42.87	74.00	-31.13
7320.00	37.35	Ave	288	1.2	H	2.21	39.56	54.00	-14.44
2334.82	45.54	PK	205	1.4	V	-13.19	32.35	74.00	-41.65
2334.82	37.16	Ave	205	1.4	V	-13.19	23.97	54.00	-30.03
2361.47	42.19	PK	259	1.4	H	-13.14	29.05	74.00	-44.95
2361.47	38.60	Ave	259	1.4	H	-13.14	25.46	54.00	-28.54
2497.01	44.63	PK	209	2.0	V	-13.08	31.55	74.00	-42.45
2497.01	37.69	Ave	209	2.0	V	-13.08	24.61	54.00	-29.39



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK High Channel									
199.10	23.14	QP	209	1.5	H	11.13	34.27	40.00	-5.73
199.10	20.74	QP	86	1.5	V	11.13	31.87	40.00	-8.13
4960.00	52.83	PK	128	1.2	V	-0.24	52.59	74.00	-21.41
4960.00	44.85	Ave	128	1.2	V	-0.24	44.61	54.00	-9.39
7440.00	40.25	PK	140	1.2	H	2.84	43.09	74.00	-30.91
7440.00	38.73	Ave	140	1.2	H	2.84	41.57	54.00	-12.43
2311.92	45.04	PK	113	1.4	V	-13.19	31.85	74.00	-42.15
2311.92	39.03	Ave	113	1.4	V	-13.19	25.84	54.00	-28.16
2382.79	44.07	PK	163	1.6	H	-13.14	30.93	74.00	-43.07
2382.79	38.75	Ave	163	1.6	H	-13.14	25.61	54.00	-28.39
2492.26	43.98	PK	109	1.9	V	-13.08	30.90	74.00	-43.10
2492.26	37.38	Ave	109	1.9	V	-13.08	24.30	54.00	-29.70

**Test Frequency: Above 18GHz**

The measurements were more than 20 dB below the limit and not reported


## 8 Band Edge Measurement


Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	DA 00-705
Test Mode:	Transmitting

### 8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 8.2 Test Result

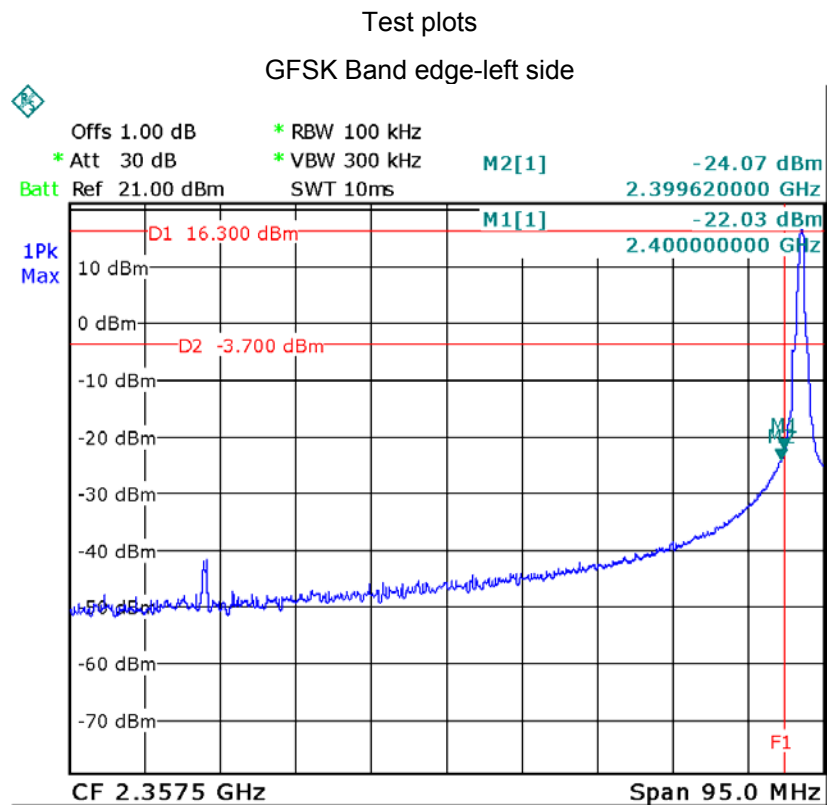

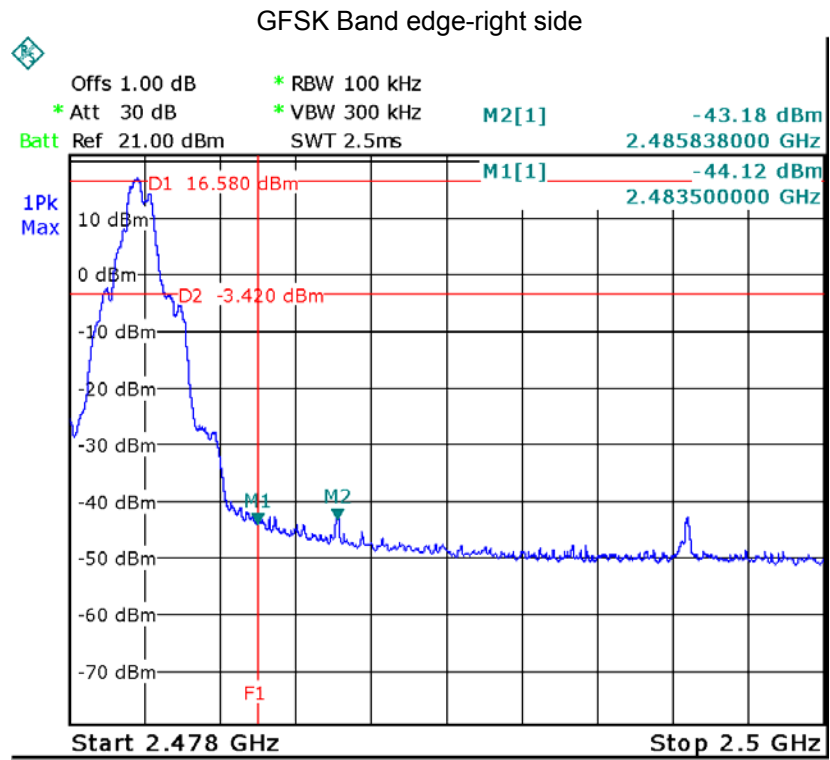

## 9 20 dB Bandwidth Measurement


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Mode:	Test in fixing operating frequency at low, Middle, high channel.

### 9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

### 9.2 Test Result


Modulation	Test Channel	Bandwidth
GFSK	Low	1.046MHz
GFSK	Middle	1.054MHz
GFSK	High	1.038MHz

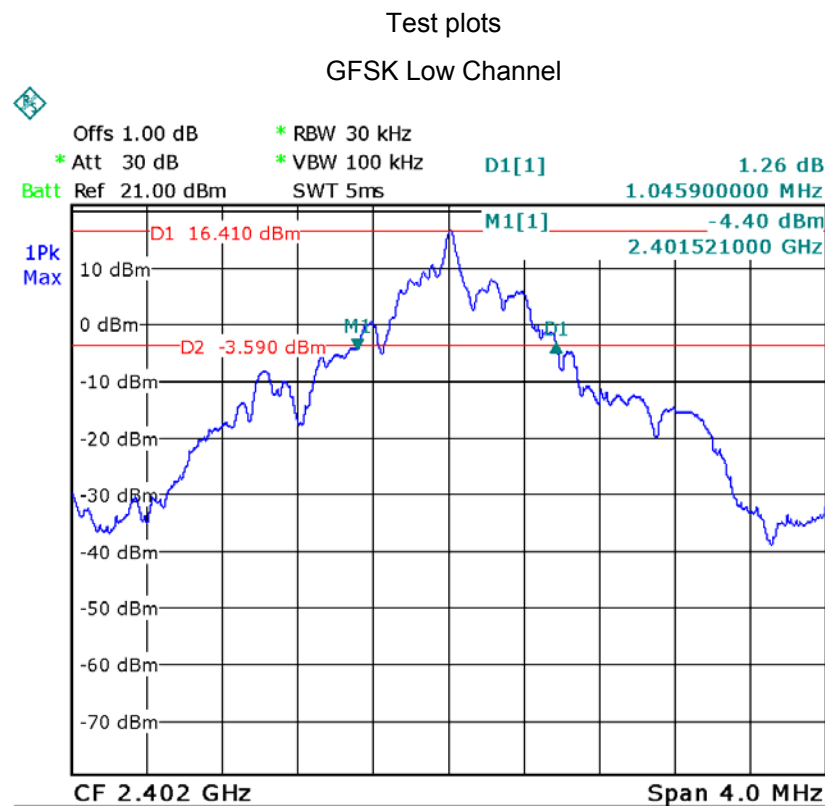

GFSK Middle Channel

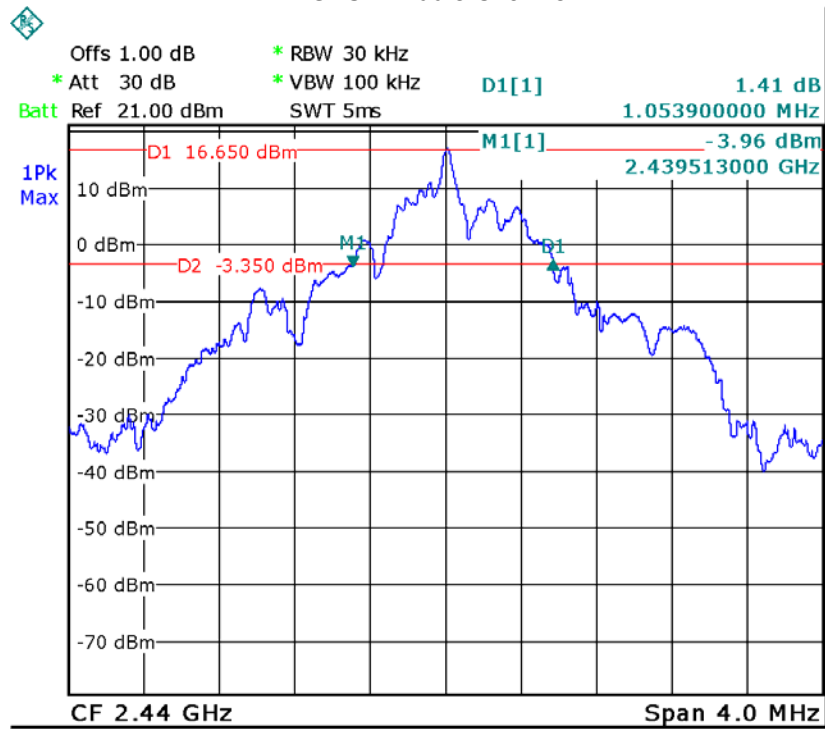

GFSK High Channel

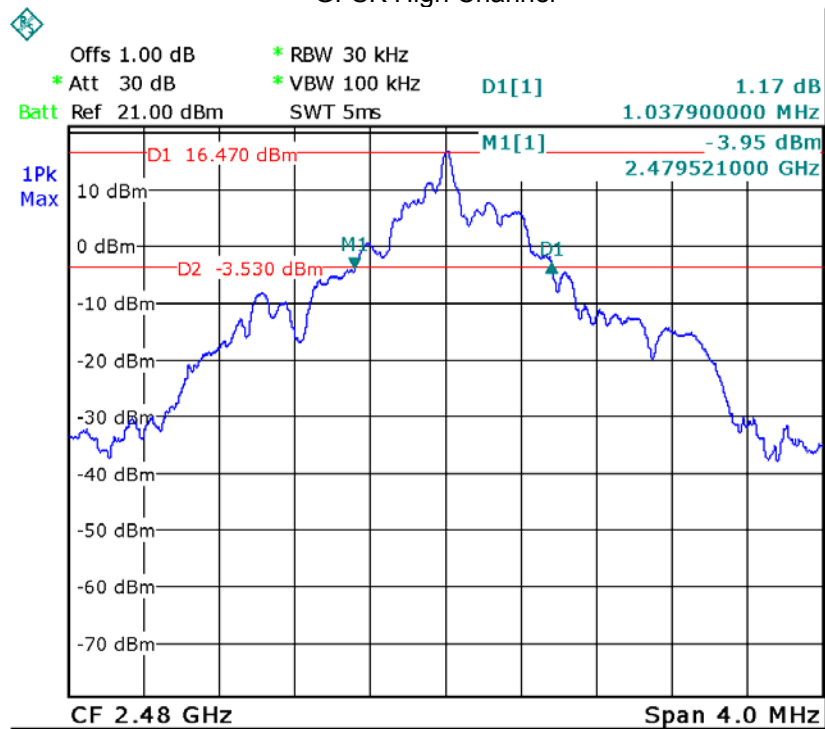

## 10 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

### 10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### 10.2 Test Result


Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	16.19	20.97
GFSK	Middle	16.72	20.97
GFSK	High	16.33	20.97

Test plots


GFSK Low Channel

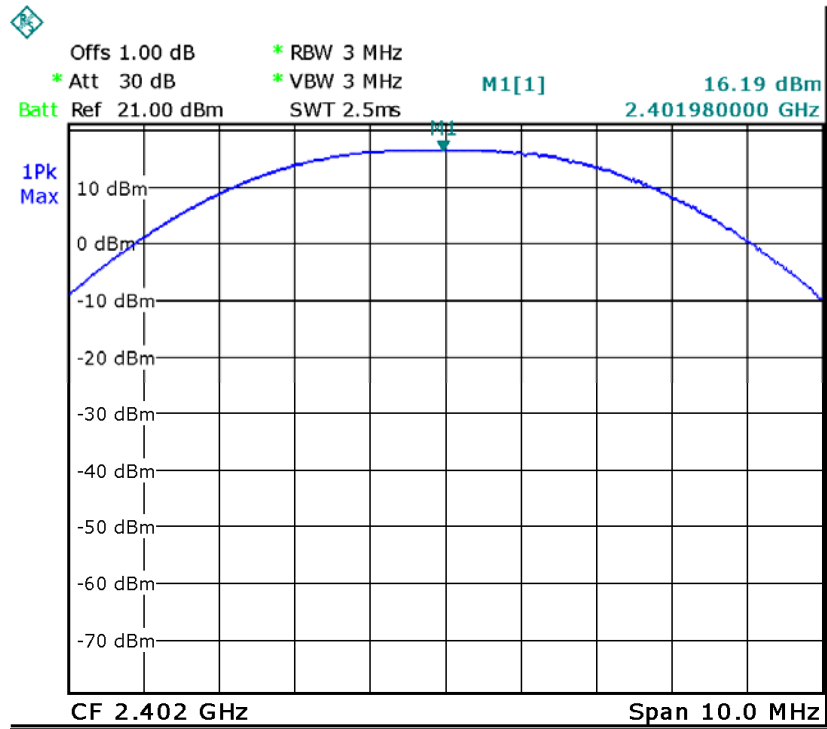

GFSK Middle Channel

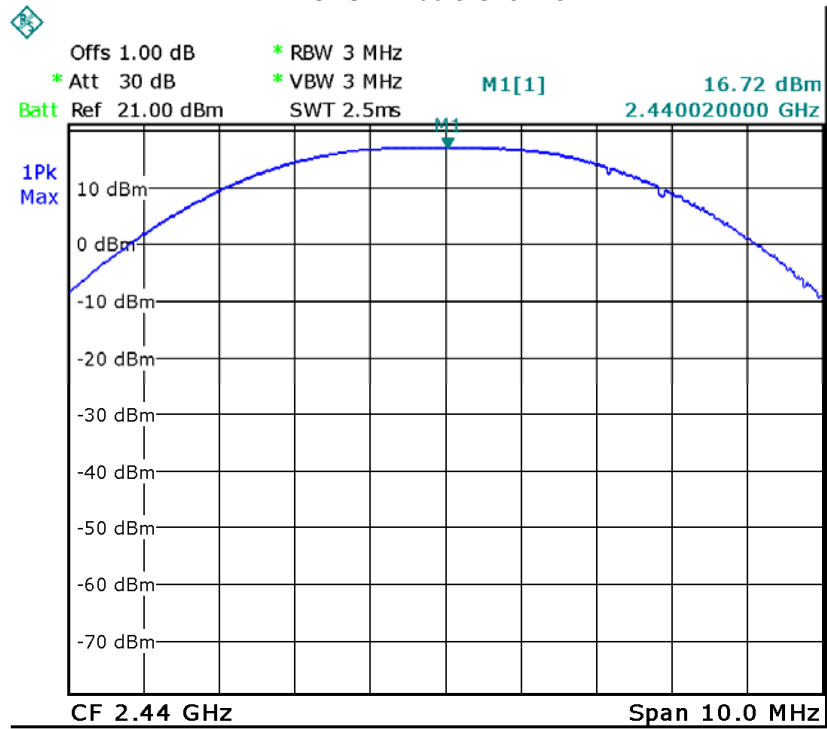

### GFSK High Channel

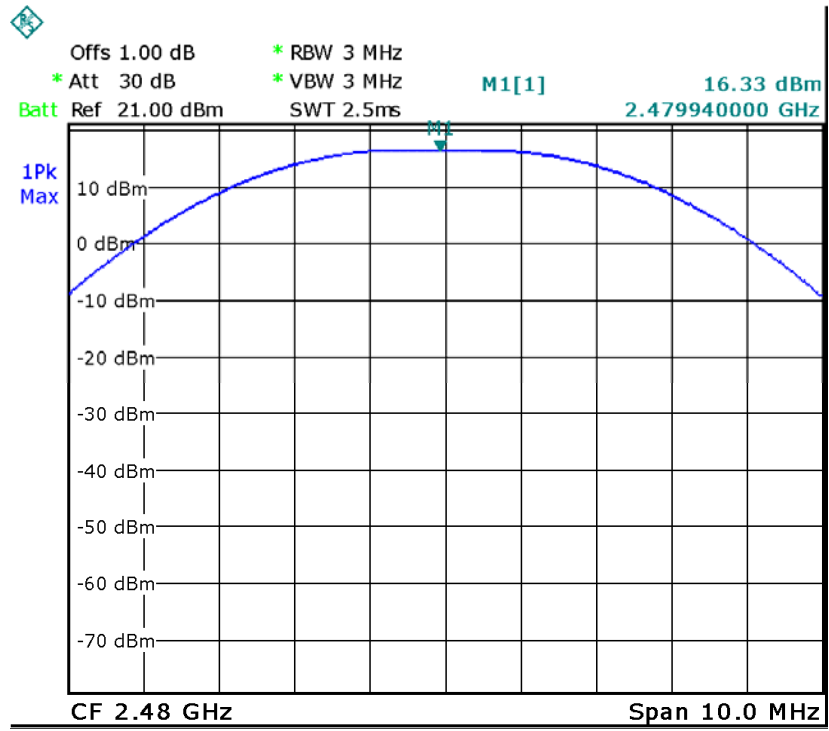



## 11 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.


### 11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 4.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


### 11.2 Test Result

Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	1.996	PASS
GFSK	Middle	1.996	PASS
GFSK	High	1.996	PASS


### Test plots GFSK Low Channel

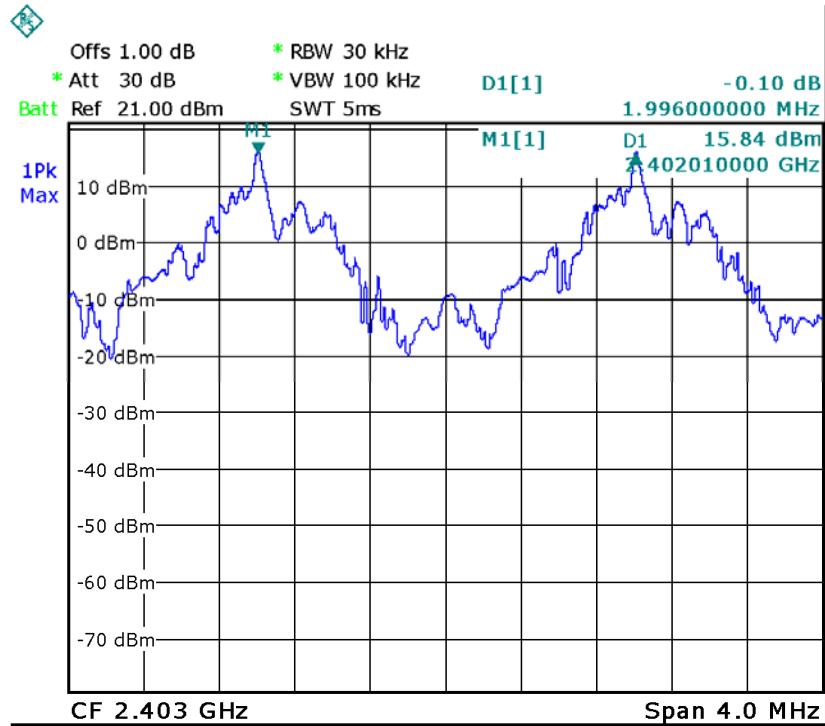

### GFSK Middle Channel

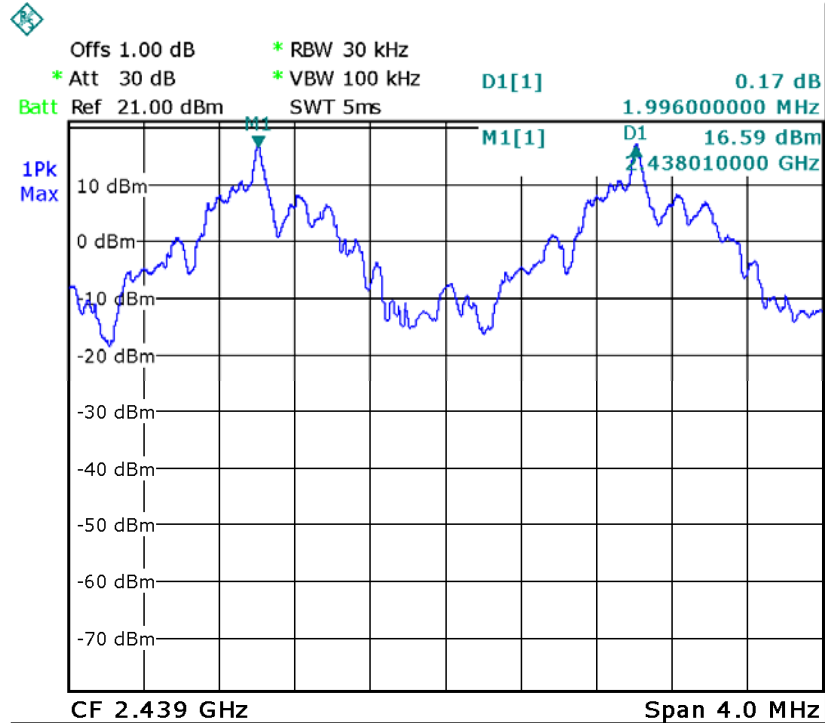

GFSK High Channel

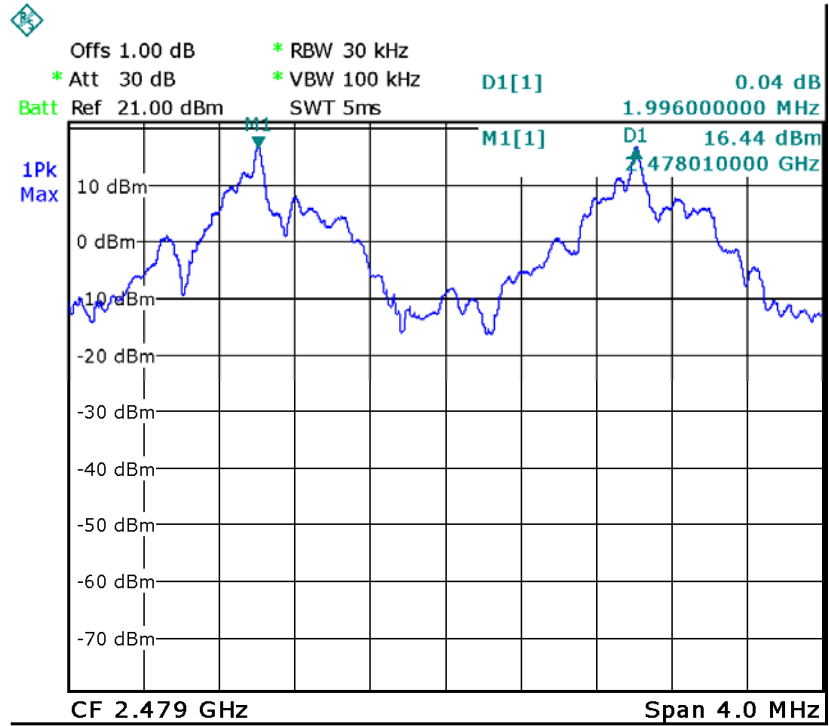

## 12 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

### 12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW = 300KHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency =2.4835GHz. Sweep=auto;

### 12.2 Test Result

Test Plots: 40 Channels in total

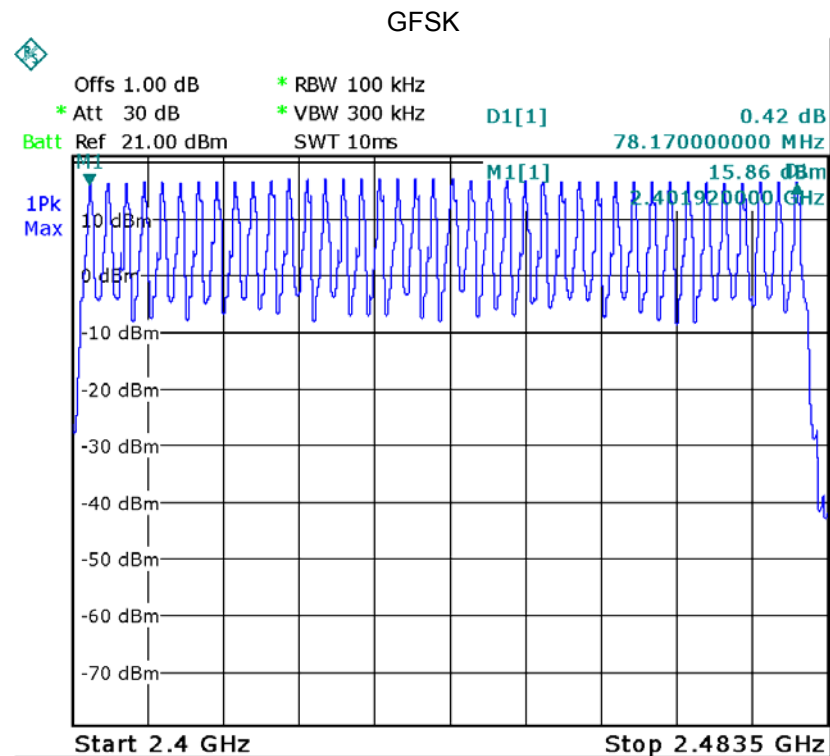

## 13 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

### 13.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 1MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

### 13.2 Test Result

The test period:  $T = 0.4(s) * 40 = 16(s)$

So, the Dwell Time can be calculated as follows:



Low channel: Dwell Time =  $29(\text{times})/1(s) * 209(\mu s) * 16(s) = 0.097(s)$

Middle Channel: Dwell Time =  $28(\text{times})/1(s) * 209(\mu s) * 16(s) = 0.094(s)$



High Channel: Dwell Time =  $28(\text{times})/1(s) * 211(\mu s) * 16(s) = 0.095(s)$

Frequency	Mkr Delta(ms)	Dwell Time(s)	Limits(s)	Result
2402MHz	40.0	0.097	0.400	Pass
2440 MHz	40.0	0.094	0.400	Pass
2480MHz	40.0	0.095	0.400	Pass



Test Plots  
Low Channel

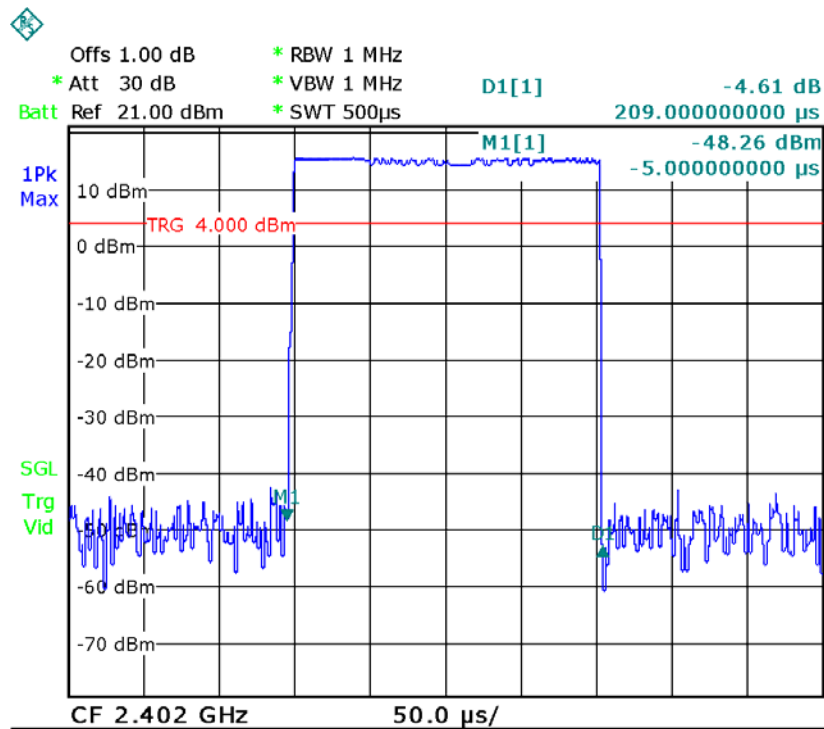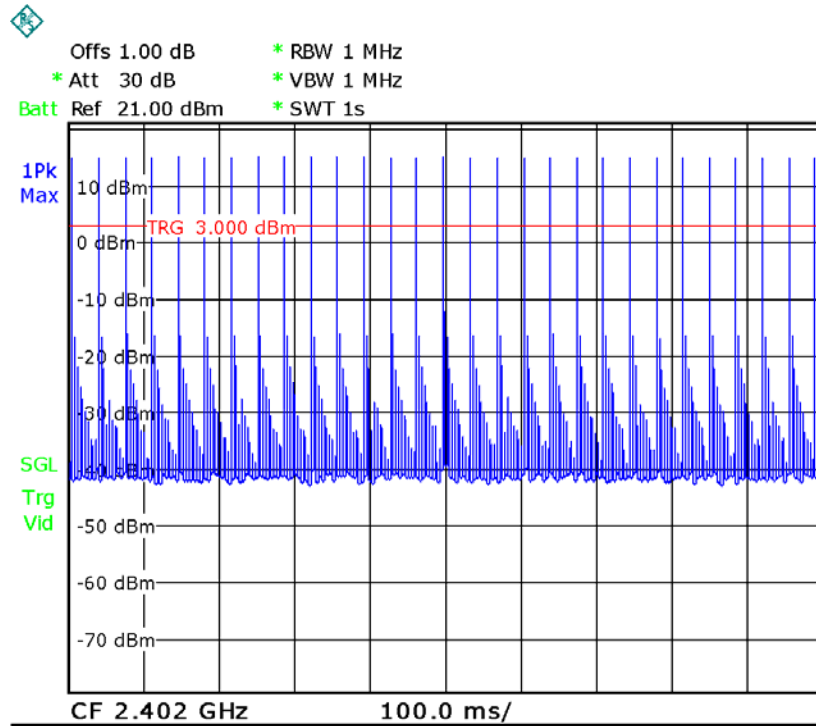

Middle Channel

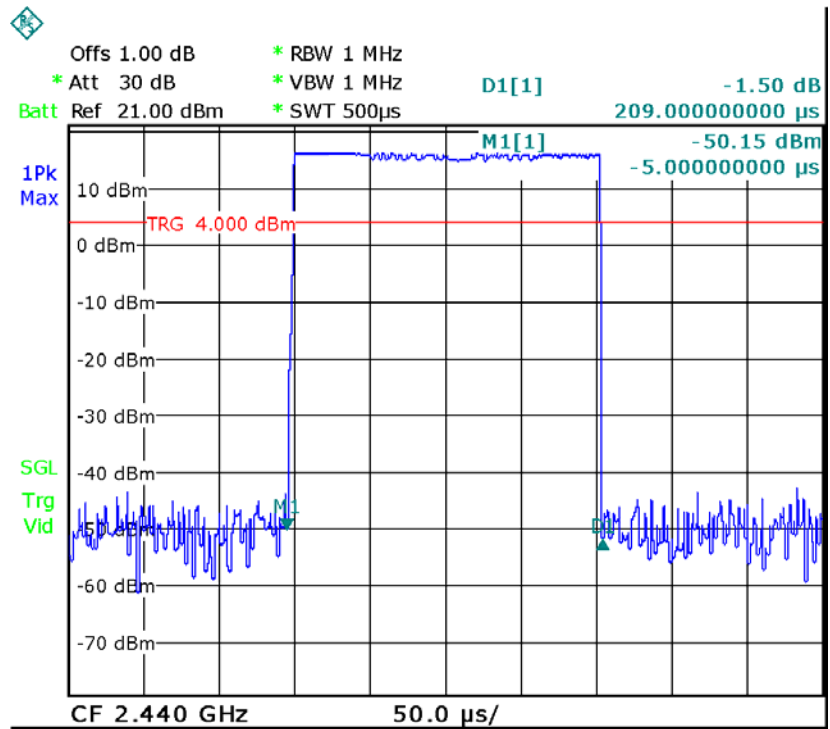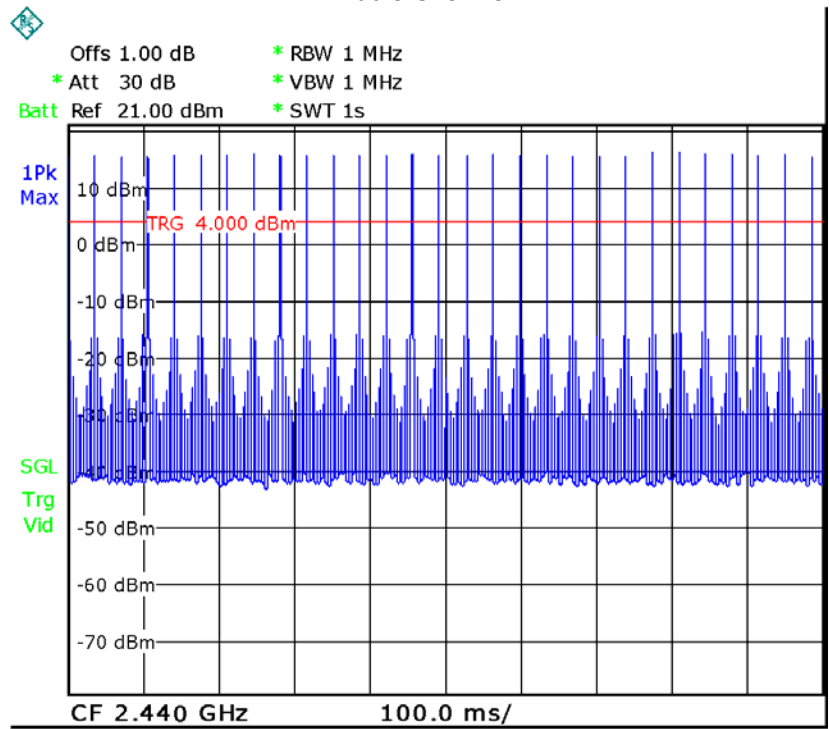

### High Channel

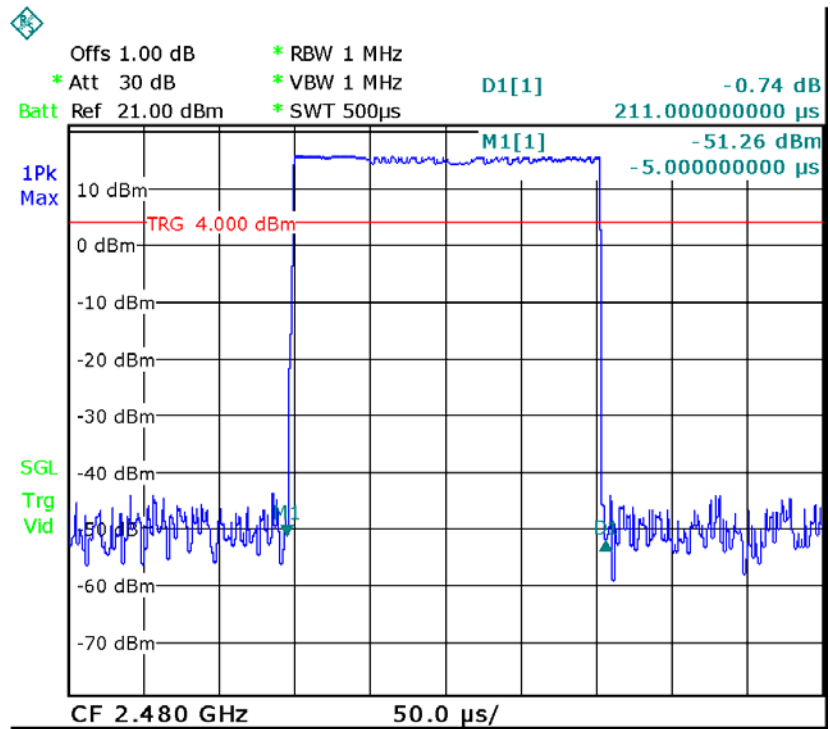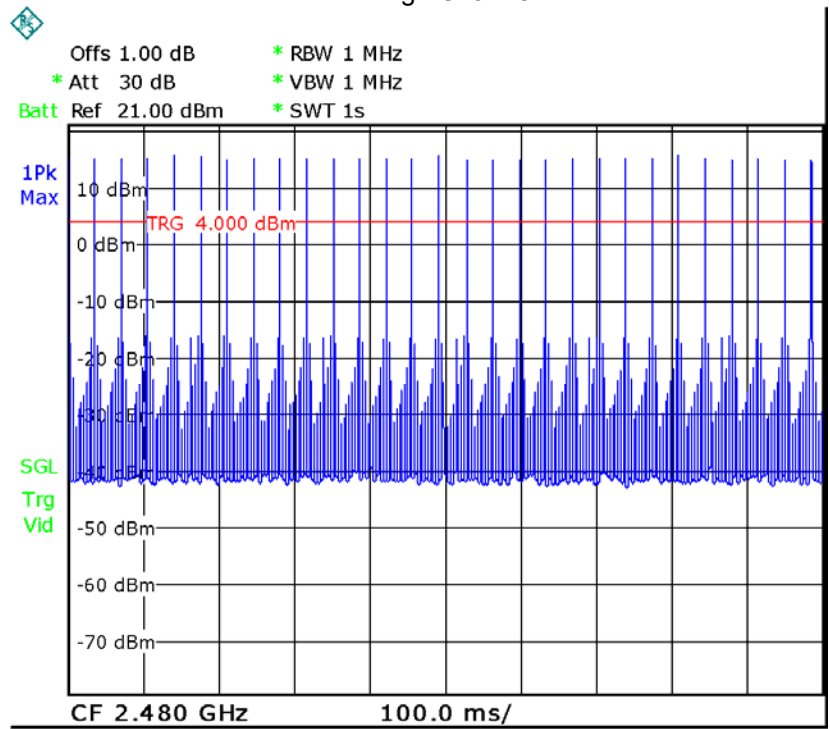



## **14 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a Monopole antenna with RP SMA connector (The whorl is non-standard, it only apply to this model), fulfil the requirement of this section.

## 15 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091

### 15.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

### 15.2 The procedures / limit

#### (A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

#### (B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 15.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance,  $d=0.2\text{m}$ , as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm <sup>2</sup> )	Limit of Power Density (mW/cm <sup>2</sup> )
1.585	16.72	46.989	0.015	1


## 16 Photographs – Test Setup

### 16.1 Photograph – Conducted Emission Test Setup




### 16.2 Photograph – Radiation Spurious Emission Test Setup


Below 30MHz

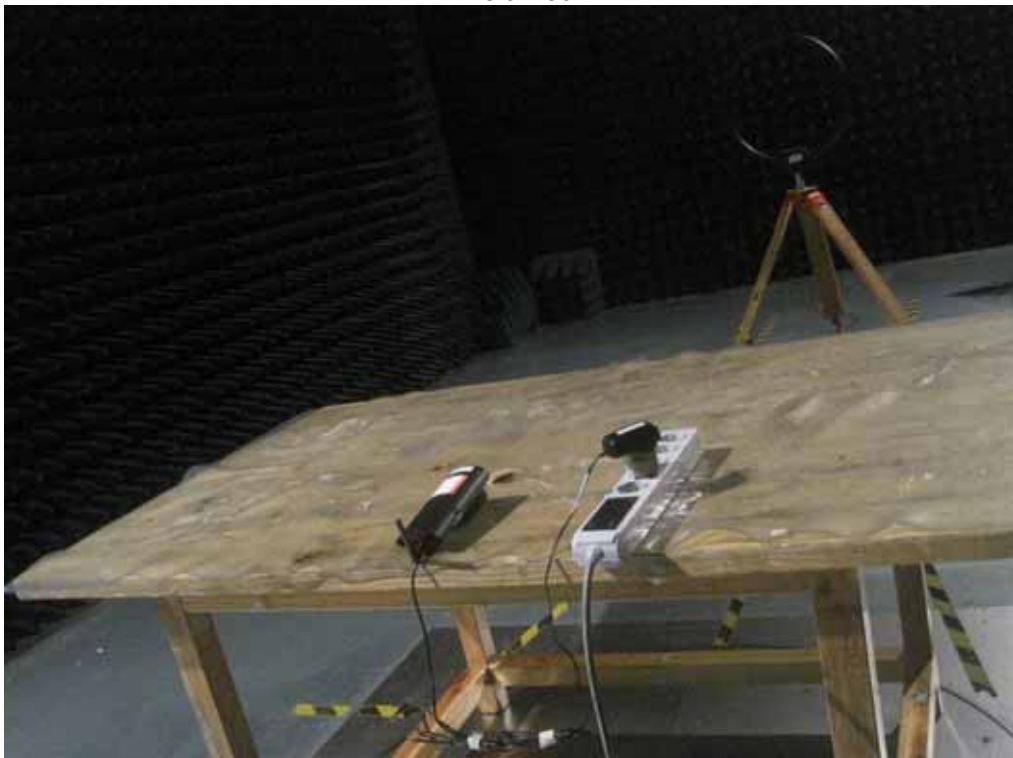

30MHz-1GHz

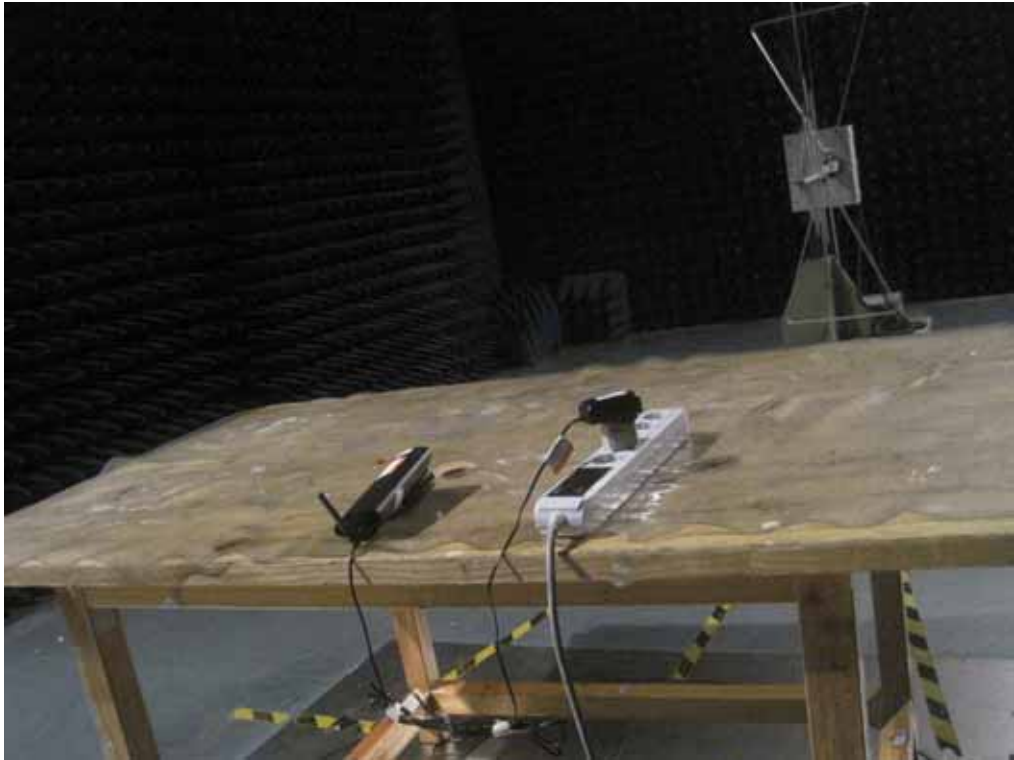

Above 1GHz

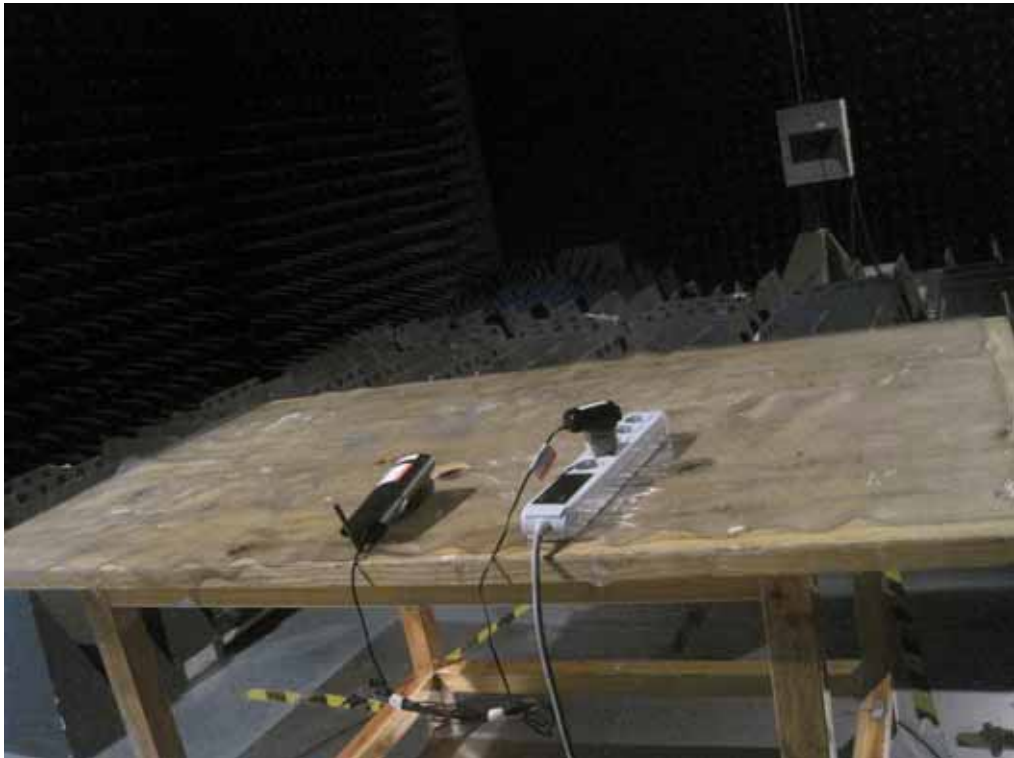


## 17 Photographs - Constructional Details


### 17.1 External View





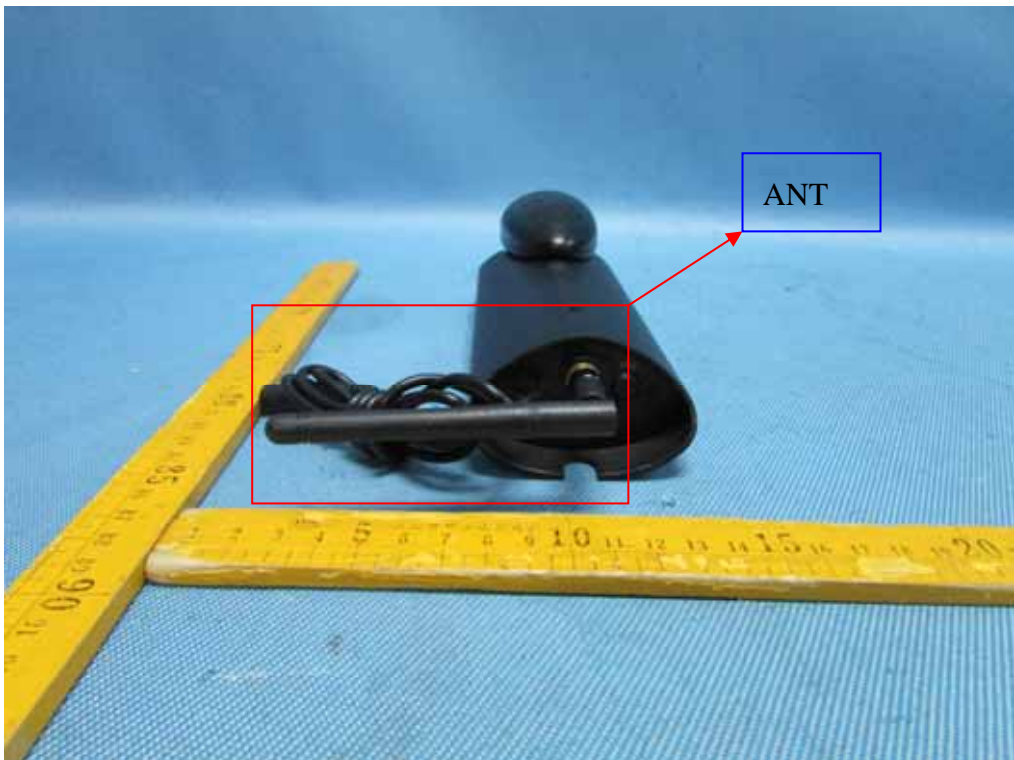






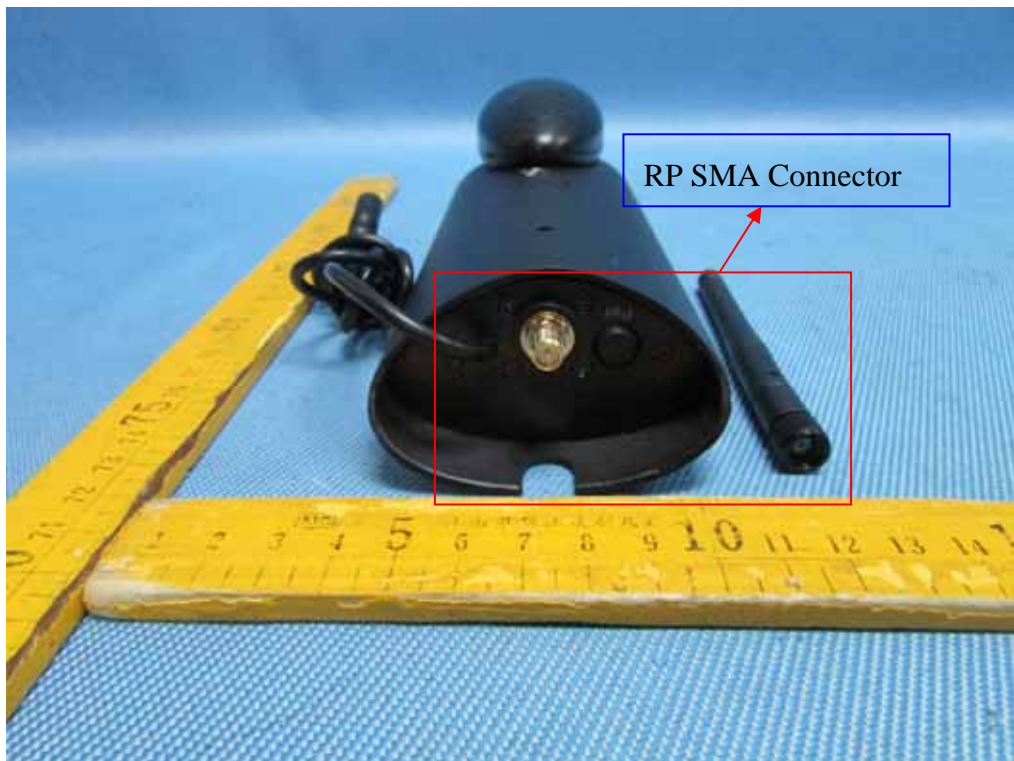











### 17.2 Internal View

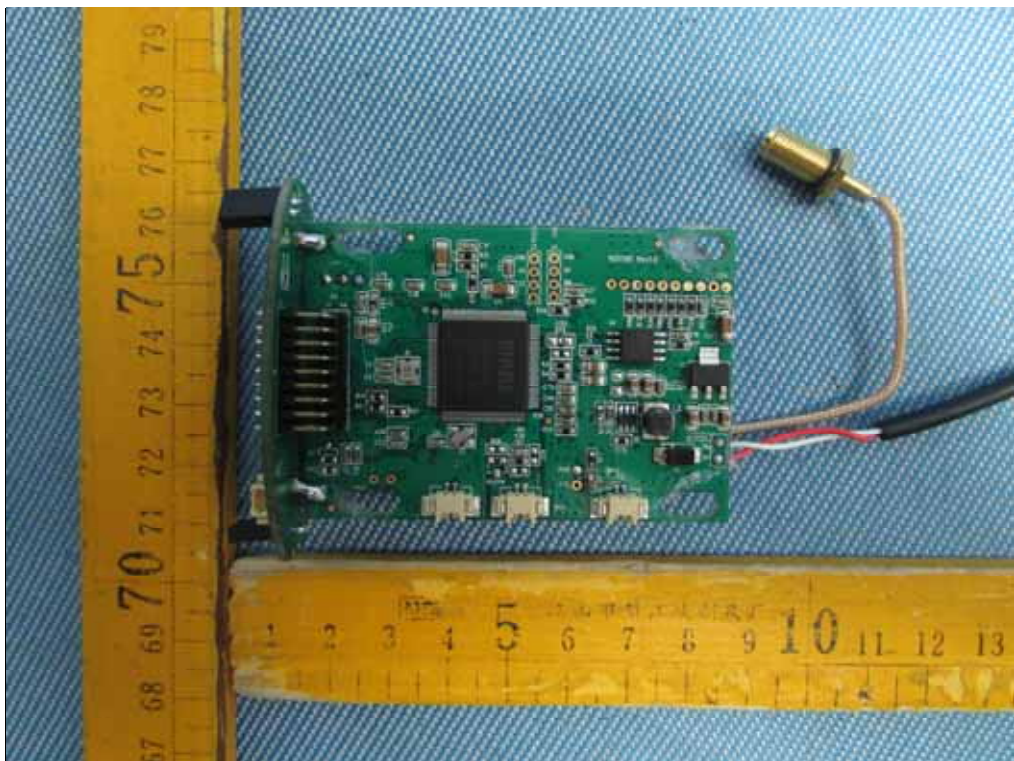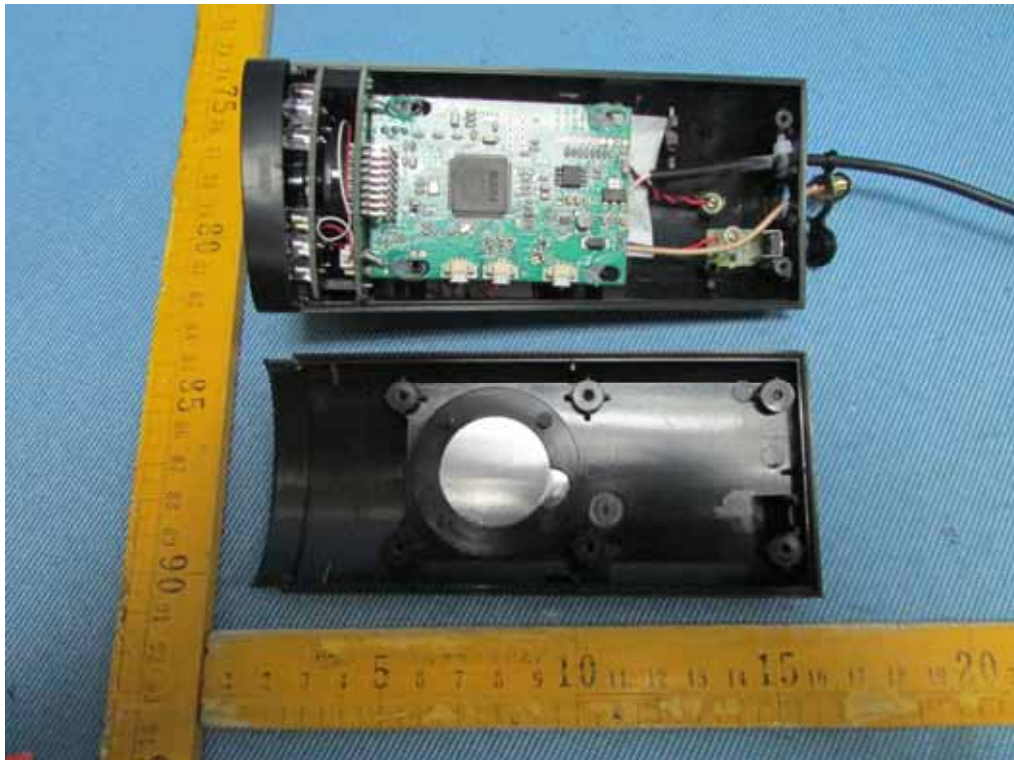

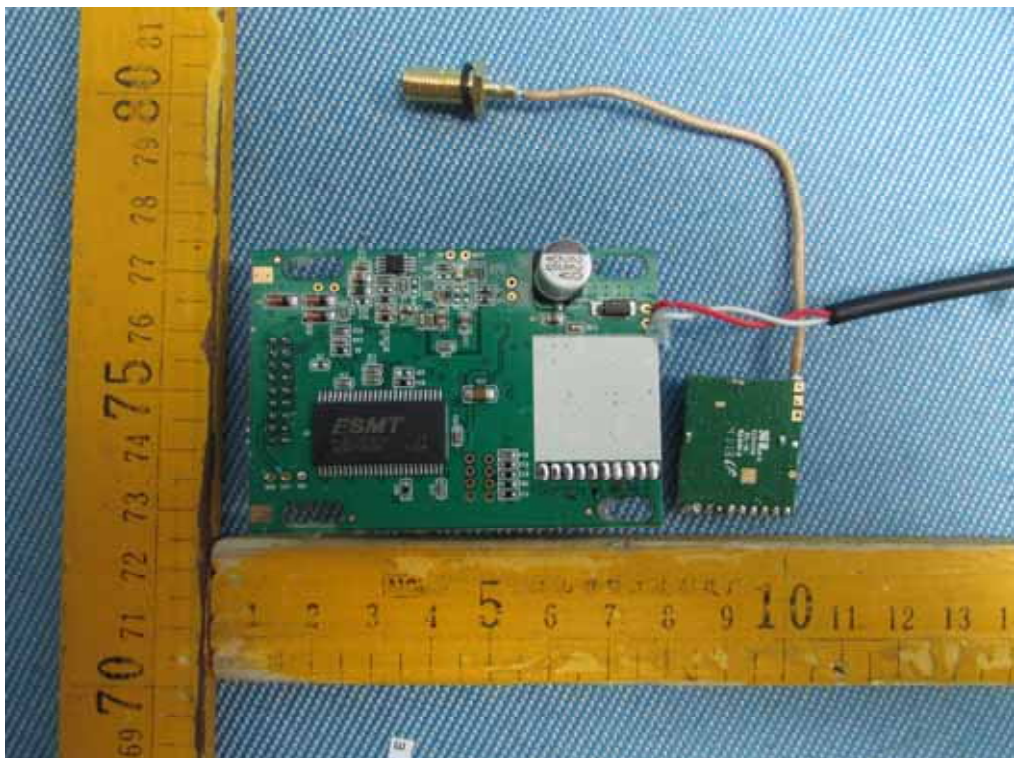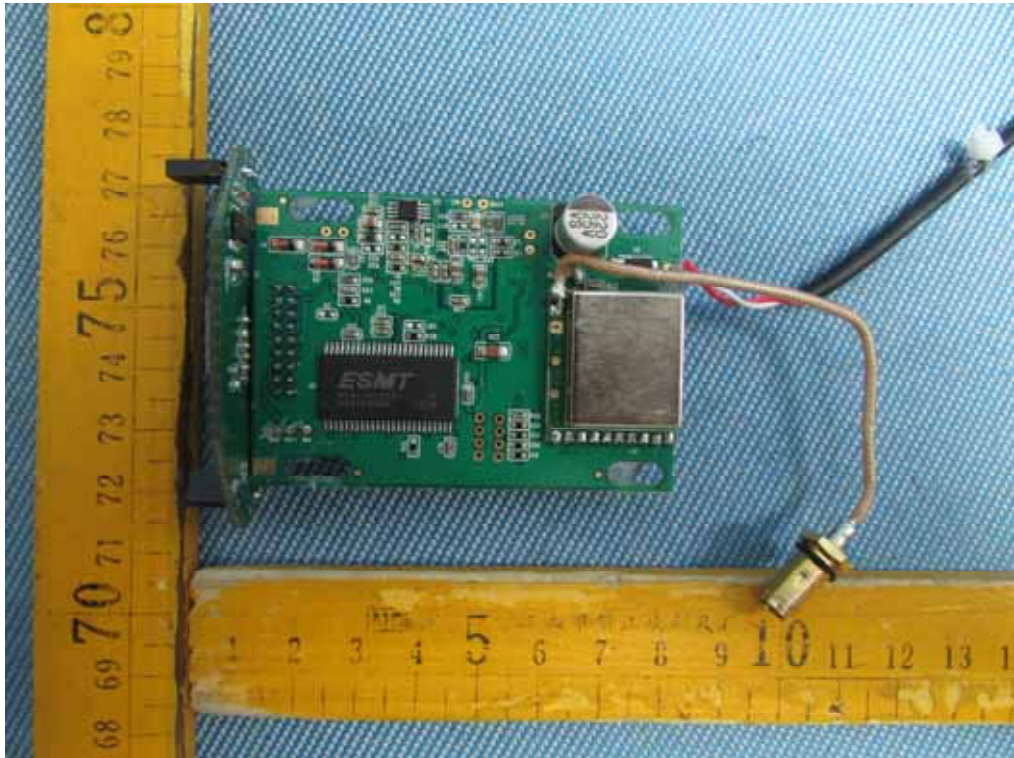

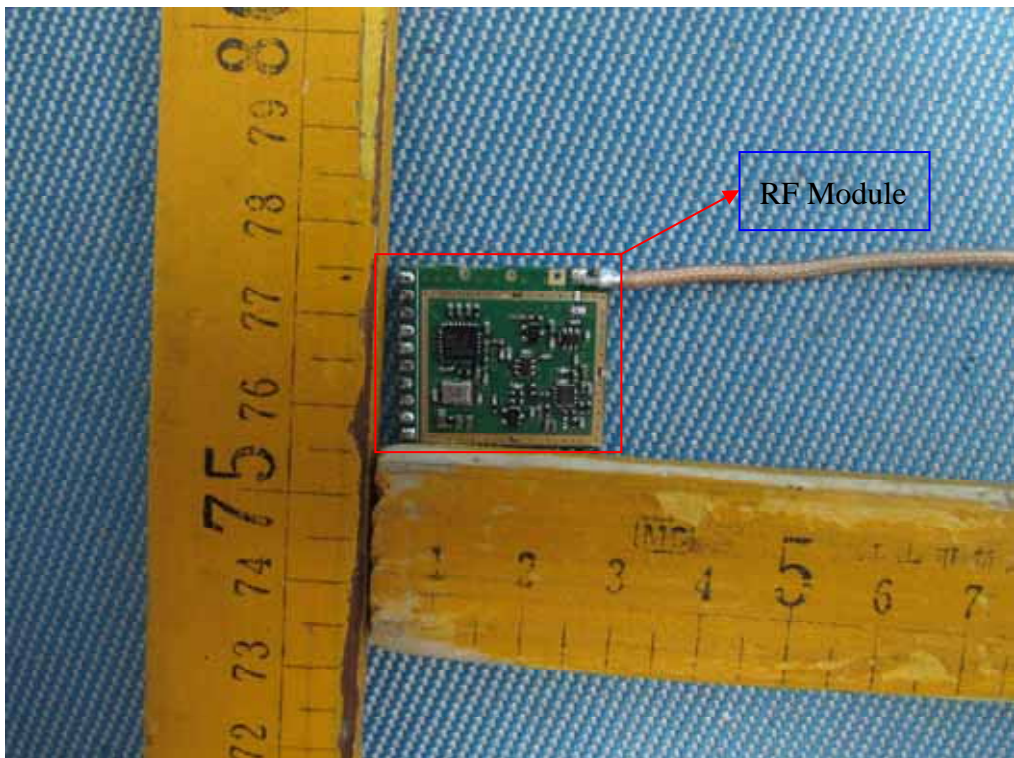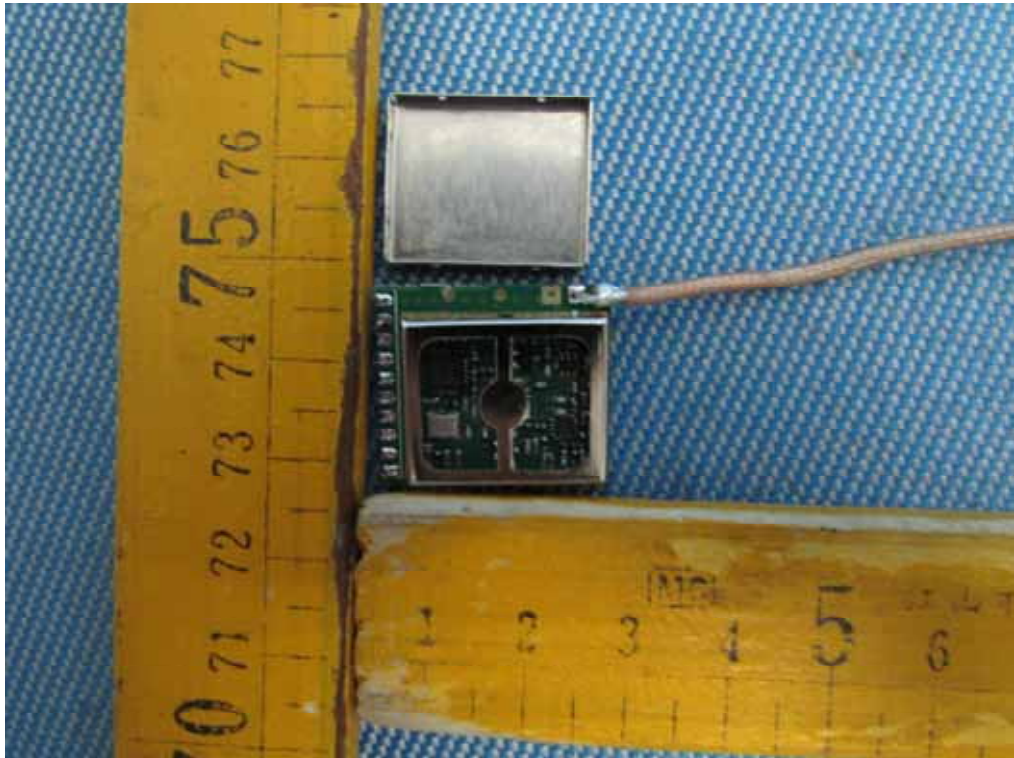

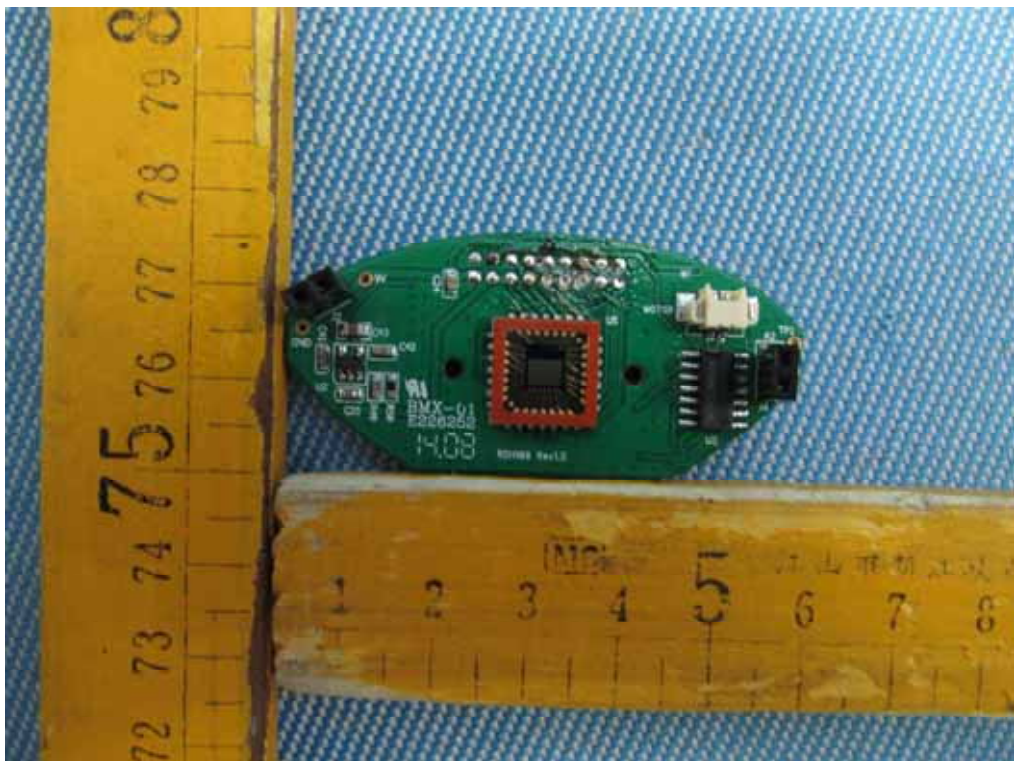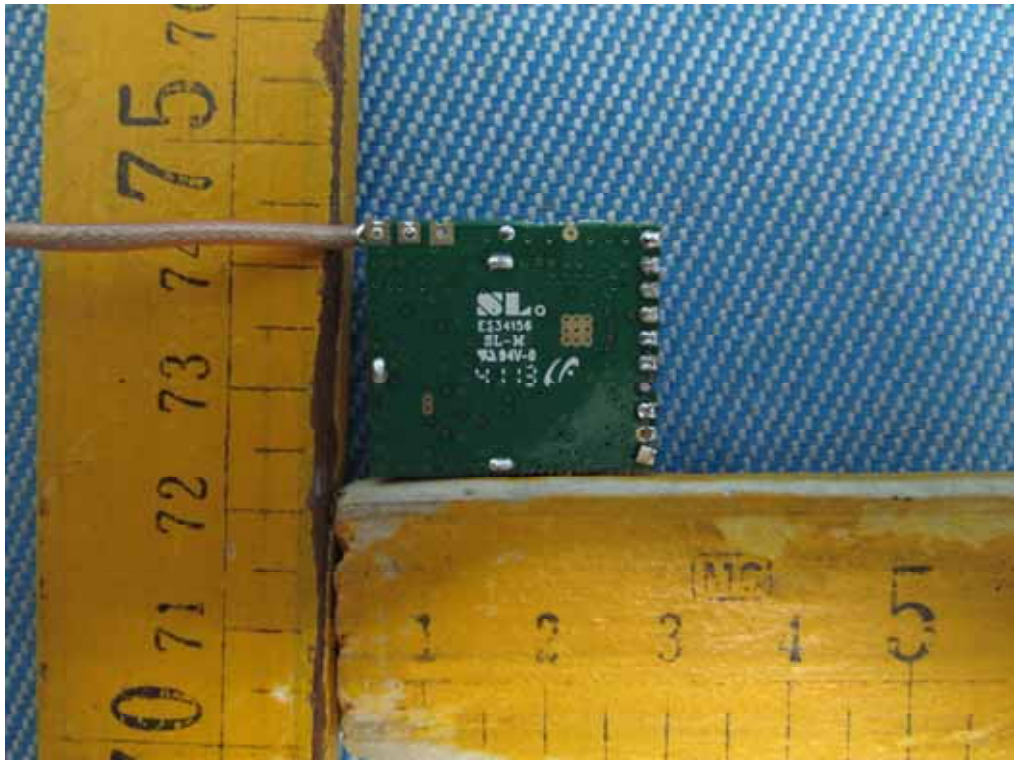

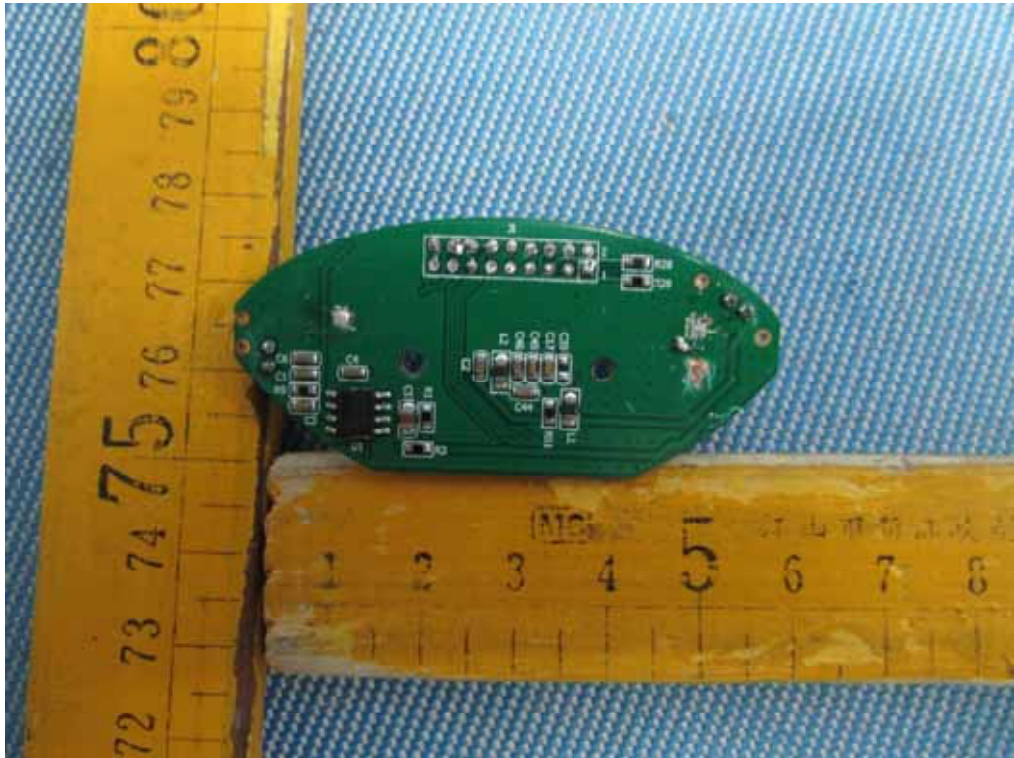





===== End of Report =====