

承 认 书

APPROVAL SHEET

CUSTOMER NAME:

PRODUCT NAME: 2.4G small SMA male head female needle -
small 5dBi black antenna

CUSTOMER P/N:

Youbi P/N: UB02S58B5D8B REV: A

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKED BY:		
APPROVED BY:	工程专用章 Changxing. Liu	
DATE:	2022/09/15	

Modification History

Version	Content Revision	Issued by	Date
A	Original version	King	2022-09-15

Content




<i>Item</i>	<i>Description</i>
1.-----	Electrical Specification
2.-----	Test Items and Equipment
3.-----	S Parameter
4.-----	Efficiency and Gain
5.-----	Radiation Pattern
6.-----	Mechanical Specification

1. Electrical Specification:

Characteristics	Specifications	Unit
Outline Dimensions	Φ9.35x172	mm
Frequency	2400-2500	MHz
Impedance	50	Ω
Machine VSWR	< 2.0	
Polarization	Linear Polarization	
Gain	5.0±1	dBi
Efficiency	> 65	%
Connector Type	RP-SMA Male Plug connecto	
Operating temperature	-20℃~+65℃	
Storage Temp	-20℃~+65℃	


2. Test Items and Equipment

	Test items	Test equipment
S Parameter	1.Return Loss 2.VSWR	Network analyzer (Agilent E5071B)
The whole machine of Passive parameters	1.Frequency 2.Gain 3.Radiation Pattern	1.3D microwave darkroom (5m*5m*5m) 2.Network analyzer (Agilent E5071B)
The whole machine of Active parameters	1.TRP 2.TIS	1.3D microwave darkroom (5m*5m*5m) 2.Comprehensive test instrument (CMW500)

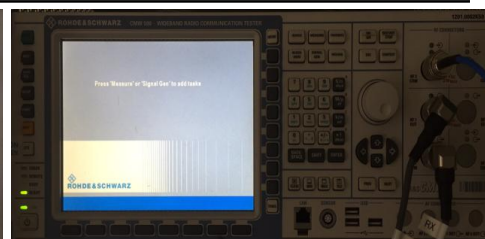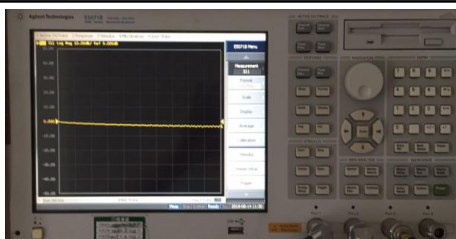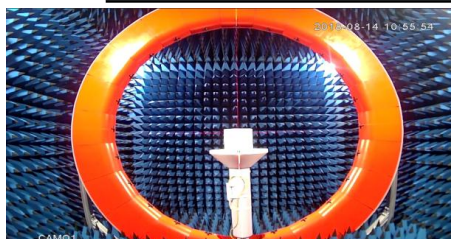

3. S Parameter

Frequency (MHz)	Return Loss (dB)	VSWR
2400	-17.05	1.32
2450	-22.44	1.16
2500	-14.71	1.47

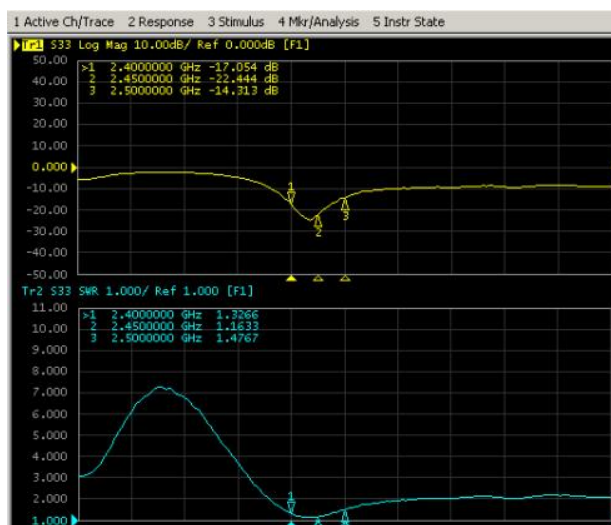



* Voltage Standing Wave Ratio(VSWR)

Return Loss(RL)

$$RL=20*\log_{10}[(VSWR+1)/(VSWR-1)]$$


4. Efficiency and Gain

Frequency (MHz)	2400	2450	2500
Efficiency (%)	74.5	73.2	71.9
Gain (dBi)	5.0	4.63	4.52

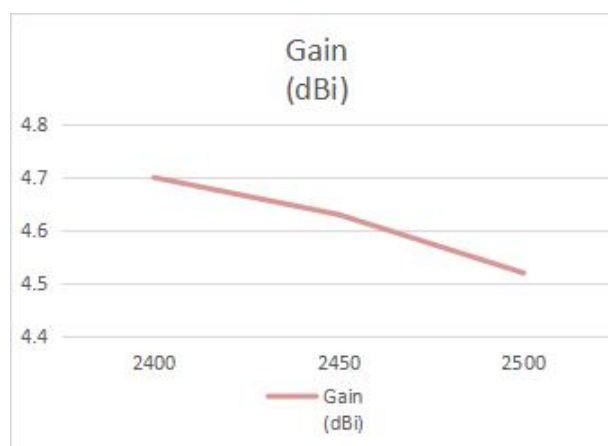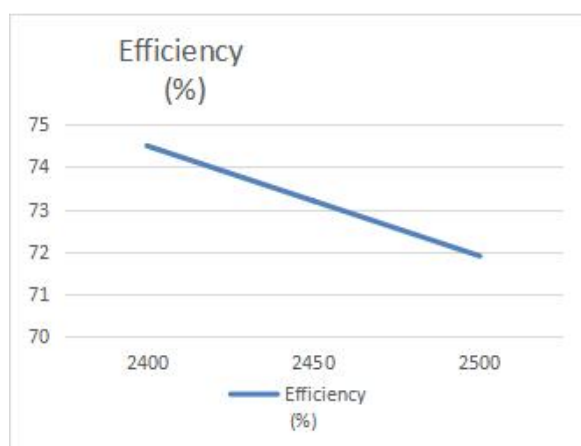


5. Radiation Pattern


5-1 Antenna 3D Radiation Pattern

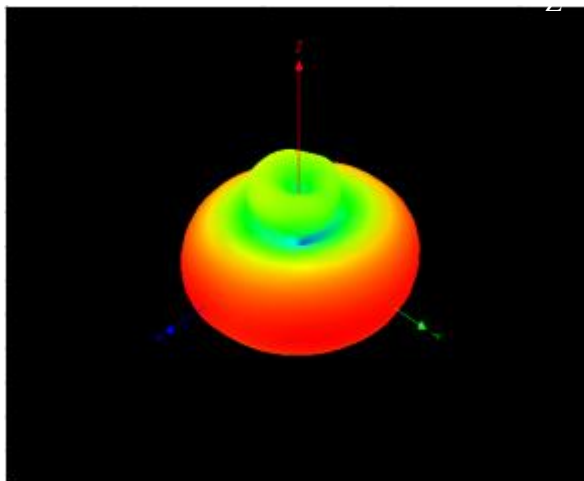

2400MHz

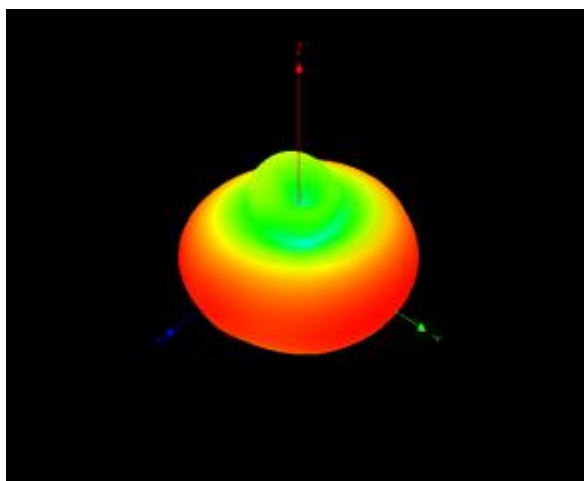


2450MHz

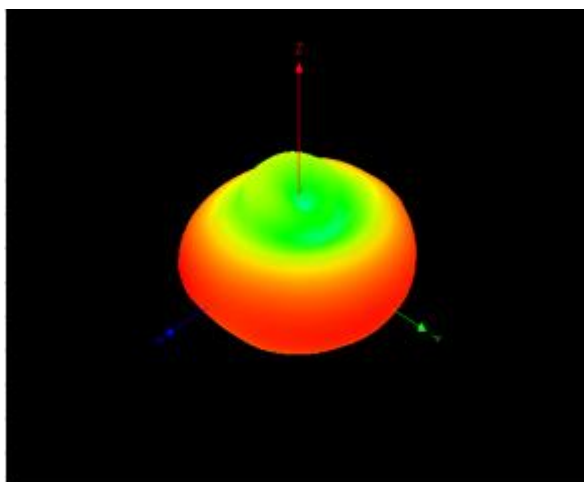


2500MHz


5-2 Antenna 2D Radiation Pattern

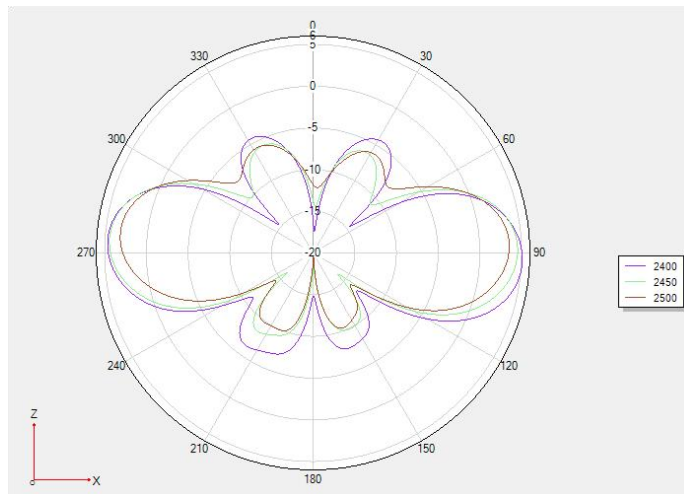

Phi 0 2D

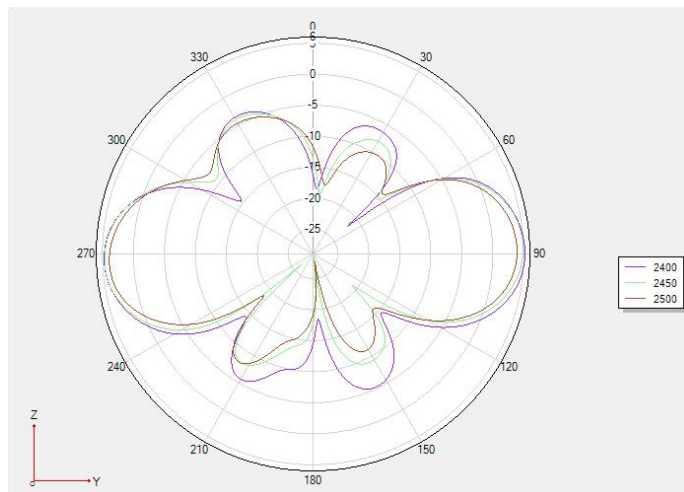

Phi 90 2D

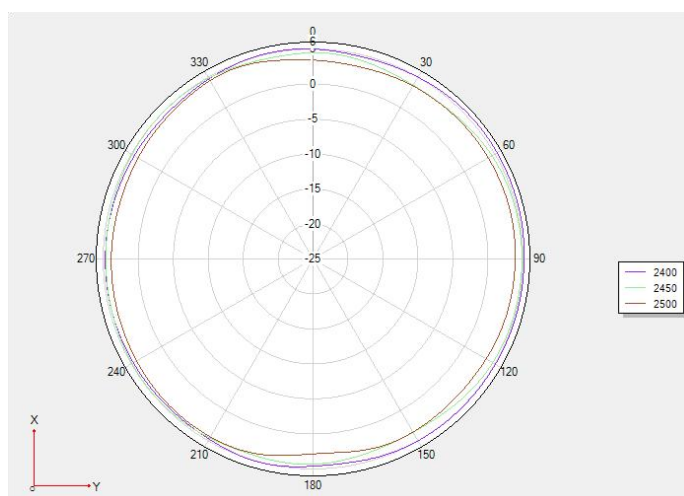

Theta 90 2D

6. Mechanical Specification:

RoHS

COMPLIANT

REV.	DESCRIPTION	ECN NO.	DATE	DRAWN
A	First Sample	/	2022.9.15	King

Specification:
Frequency Range :2400~2500MHz
VSWR : ≤2.0

ITEM	PART NUMBER	PART NAME & DESCRIPTION	QTY	GENERAL TOLERANCE: LINEAR: X.XXX±0.10 X±0.3 XX±0.5 XXX±2.0 ANGLE±0.5°	TITLE : 2.4G small SMA male head female needle - small 5dBi black antenna P/N : UB02S58B5D8B	REV. A	UNITS mm	SCALE 1 : 1	APPR. : Changxing.Liu	CHECK. : Dillon	DRAW. : King
1	Connector	RP-SMA Male Plug connector ,Brass,Nickel plated,POM Black	1								
2	Seat-1	Seat-1, PC-4PBT Black	1								
3	Seat-2	Seat-2, PC Black	1								
4	Rivet	Rivet,POM Black	2								
5	Cable	RG178 Coaxial cable,Brown	1								
6	PCB	FR-4 ,Black oil	1								
7	Screw	Brass	1								
8	Cover	Cover,TPPEE ,Black	1								

UANT

东莞市优比电子有限公司

好天线 · 优比造

Dongguan Youbi Electronics Co.,Ltd