

FCC TEST REPORT

FCC ID : SJ8-M370QN
Applicant : RDI Technology (Shenzhen) Co., Ltd.
Address : Building C1 Xingtang Industrial Park, East Baishixia, Fuyong,
Baoan, Shenzhen, China

Equipment Under Test (EUT) :

Product Name : Digital Wireless Camera and Lcd Monitor
Model No. : M370QN

Standards : FCC CFR47 Part 15 Section 15.247:2010

Date of Test : January 17 ~ February 6, 2012

Date of Issue : February 14, 2012

Test Engineer : Hunk yan / Engineer



Reviewed By : Philo zhong / Manager



Test Result	: PASS
--------------------	---------------

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.
1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,
Shenzhen 518105, China

Tel :+86-755-27553488

Fax:+86-755-27553868

2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions (9kHz to 25GHz)	15.205(a) 15.209 15.247(d)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS.....	3
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF E.U.T.....	5
4.3 DETAILS OF E.U.T.....	5
4.4 DESCRIPTION OF SUPPORT UNITS.....	5
4.5 STANDARDS APPLICABLE FOR TESTING	5
4.6 TEST FACILITY	6
4.7 TEST LOCATION	6
5 EQUIPMENT USED DURING TEST	7
6 CONDUCTED EMISSION	9
6.1 E.U.T. OPERATION.....	9
6.2 EUT SETUP.....	10
6.3 CONDUCTED EMISSION TEST RESULT	10
6.4 PHOTOGRAPH – CONDUCTED EMISSION TEST SETUP	13
7 RADIATED SPURIOUS EMISSIONS.....	14
7.1 EUT OPERATION :	14
7.2 MEASUREMENT UNCERTAINTY	14
7.3 TEST SETUP.....	15
7.4 SPECTRUM ANALYZER SETUP	16
7.5 TEST PROCEDURE.....	17
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
7.7 SUMMARY OF TEST RESULTS	18
7.8 PHOTOGRAPH – RADIATION SPURIOUS EMISSION TEST SETUP	27
8 BAND EDGE MEASUREMENT	28
8.1 TEST RESULT:	29
9 20 DB BANDWIDTH MEASUREMENT.....	33
9.1 TEST PROCEDURE:.....	33
9.2 TEST RESULT:	33
10 MAXIMUM PEAK OUTPUT POWER	35
10.1 TEST PROCEDURE:.....	35
10.2 TEST RESULT:.....	35
11 HOPPING CHANNEL SEPARATION.....	36
11.1 TEST PROCEDURE:.....	36
11.2 TEST RESULT:.....	36
12 NUMBER OF HOPPING FREQUENCY	39
12.1 TEST PROCEDURE:.....	39
12.2 TEST RESULT:.....	39
13 DWELL TIME	40
13.1 TEST PROCEDURE:.....	40
13.2 TEST RESULT:.....	40
14 ANTENNA REQUIREMENT	43

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

15 RF EXPOSURE 44

15.1 REQUIMENTS: 44

15.2 MEASUREMENT RESULT: 44

16 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS..... 45

16.1 PRODUCT VIEW 45

16.2 EUT – APPEARANCE VIEW 46

16.3 EUT – OPEN VIEW 47

16.4 EUT - PCB VIEW 48

16.5 RF MODULE - VIEW 49

17 FCC LABEL..... 51

4 General Information

4.1 Client Information

Applicant : RDI Technology (Shenzhen) Co., Ltd.
Address of Applicant : Building C1 Xingtang Industrial Park, East Baishixia, Fuyong,
 Baoan, Shenzhen, China

Manufacturer : RDI Technology (Shenzhen) Co., Ltd.
Address of Manufacturer : Building C1 Xingtang Industrial Park, East Baishixia, Fuyong,
 Baoan, Shenzhen, China

4.2 General Description of E.U.T.

Product Name : Digital Wireless Camera and Lcd Monitor
Model No. : M370QN
Operation Frequency : 2402MHz ~ 2480MHz
Antenna Gain : -2.39 dBi

4.3 Details of E.U.T.

Technical Data : The EUT is powered by 3.7VDC (Li-ion Rechargeable Battery) or AC Adapter. Two kind of adapter could be used and the test result carried out by using the two adapter were passed, and the data show in the report is the adapter 1's.

Adapter 1 : CS5B050100FUF (Csec)
 Input: 100 ~ 240VAC, 50/60Hz, 200mA
 Output: 5.0VDC, 1.0A

Adapter 2 : HK-X105-A05 (HON-KWANG)
 Input: 100 ~ 240VAC, 50/60Hz, 200mA
 Output: 5.0VDC, 1.0A

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a Digital Wireless Camera and Lcd Monitor. The standards used were FCC CFR47 Part 15 Section 15.203, Section 15.207, Section 15.209 and Section 15.247.

4.6 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: IC7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A, August 3, 2010.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

4.7 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen, China

5 Equipment Used during Test

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Uncertainty
EMC Analyzer	Agilent/ E7405A	MY45114943	W2008001	9k-26.5GHz	Aug. 2, 2011	Aug. 1, 2012	±1dB
Trilog Broadband Antenne	SCHWARZB ECK MESS- ELEKTROM / VULB9163	336	W2008002	30-3000 MHz	Aug. 2, 2011	Aug. 1, 2012	±1dB
Broad-band Horn Antenna	SCHWARZB ECK MESS- ELEKTROM / BBHA 9120D(1201)	667	W2008003	1-18GHz	Aug. 2, 2011	Aug. 1, 2012	f < 10 GHz : ±1dB 10GHz < f < 18 GHz : ±1.5dB
Broadband Preamplifier	SCHWARZB ECK MESS- ELEKTROM / BBV 9718	9718-148	W2008004	0.5-18GHz	Aug. 2, 2011	Aug. 1, 2012	±1.2dB
Broad-band Horn Antenna	SCHWARZB ECK MESS- ELEKTROM / BBHA 9170	399	W2008005	15-26.5GHz	Aug. 2, 2011	Aug. 1, 2012	±1.5dB
Broadband Preamplifier	SCHWARZB ECK MESS- ELEKTROM / BBV 9719	9719-254	W2008006	18-26.5GHz	Aug. 2, 2011	Aug. 1, 2012	±1.2dB
10m Coaxial Cable with N-male Connectors	SCHWARZB ECK MESS- ELEKTROM / AK 9515 H	-	-	-	Aug. 2, 2011	Aug. 1, 2012	-
10m 50 Ohm Coaxial Cable	SCHWARZB ECK MESS- ELEKTROM / AK 9513	-	-	-	Aug. 2, 2011	Aug. 1, 2012	-
Positioning Controller	C&C LAB/ CC-C-IF	-	-	-	Aug. 2, 2011	Aug. 1, 2012	-
Color Monitor	SUNSP0/ SP-14C	-	-	-	Aug. 2, 2011	Aug. 1, 2012	-

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

RDI Technology (Shenzhen) Co., Ltd.

FCC ID: SJ8-M370QN

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Uncertainty
Test Receiver	ROHDE&SC HWAZ/ESPI	101155	W2005001	9k-3GHz	Aug. 2, 2011	Aug. 1, 2012	±1dB
Two-Line V- Network	ROHDE&SC HWAZ/ENV216	100115	W2005002	50Ω/50μH	Aug. 2, 2011	Aug. 1, 2012	±10%
RF Generator	TESEQ GmbH/ NSG4070	25781	W2008008	Fraq-range : 9K-1GHz RF voltage : - 60 dBm- +10dBm	Aug. 2, 2011	Aug. 1, 2012	Power_freq distinguish0. 1Hz RFelectricity distinguish 0.1B
Active Loop Antenna	Beijing Dazhi / ZN30900A	-	-	-	Aug. 2, 2011	Aug. 1, 2012	±1dB
AC Power Supply	TONGYUN/ DTDGC-4	-	-	-	Aug. 2, 2011	Aug. 1, 2012	-

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES

Reference No.: WT12010189-F-E-F

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C
Humidity: 51 % RH
Atmospheric Pressure: 1012 mbar

EUT Operation:


The pre-test was performed in normal link mode and continuously transmit mode, the worse mode is normal link mode, so the data show is that mode's only.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15.207 limits.

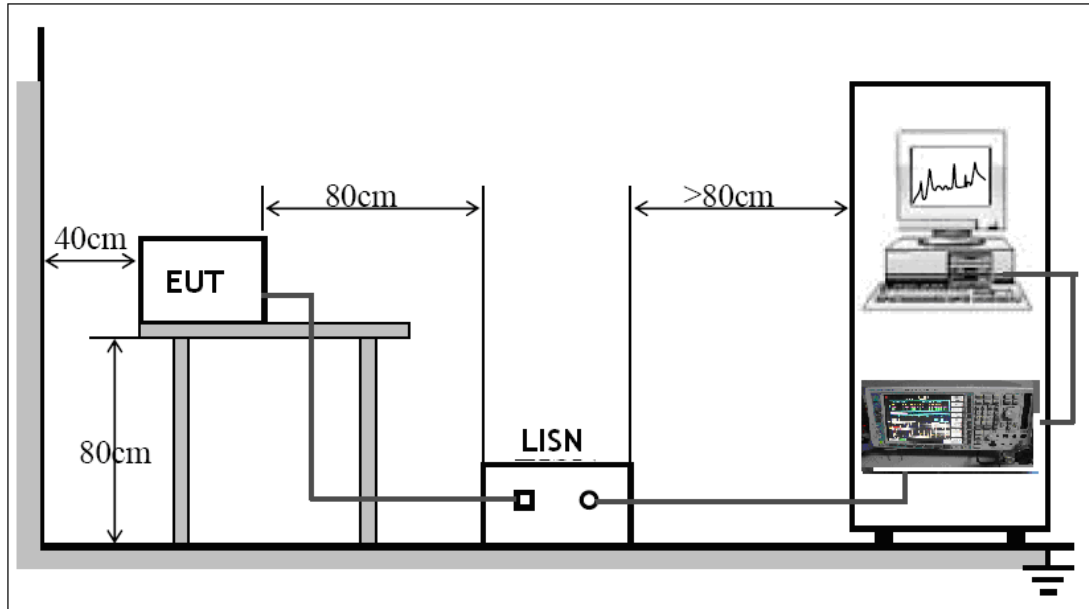


The EUT was placed on the test table in shielding room

6.3 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

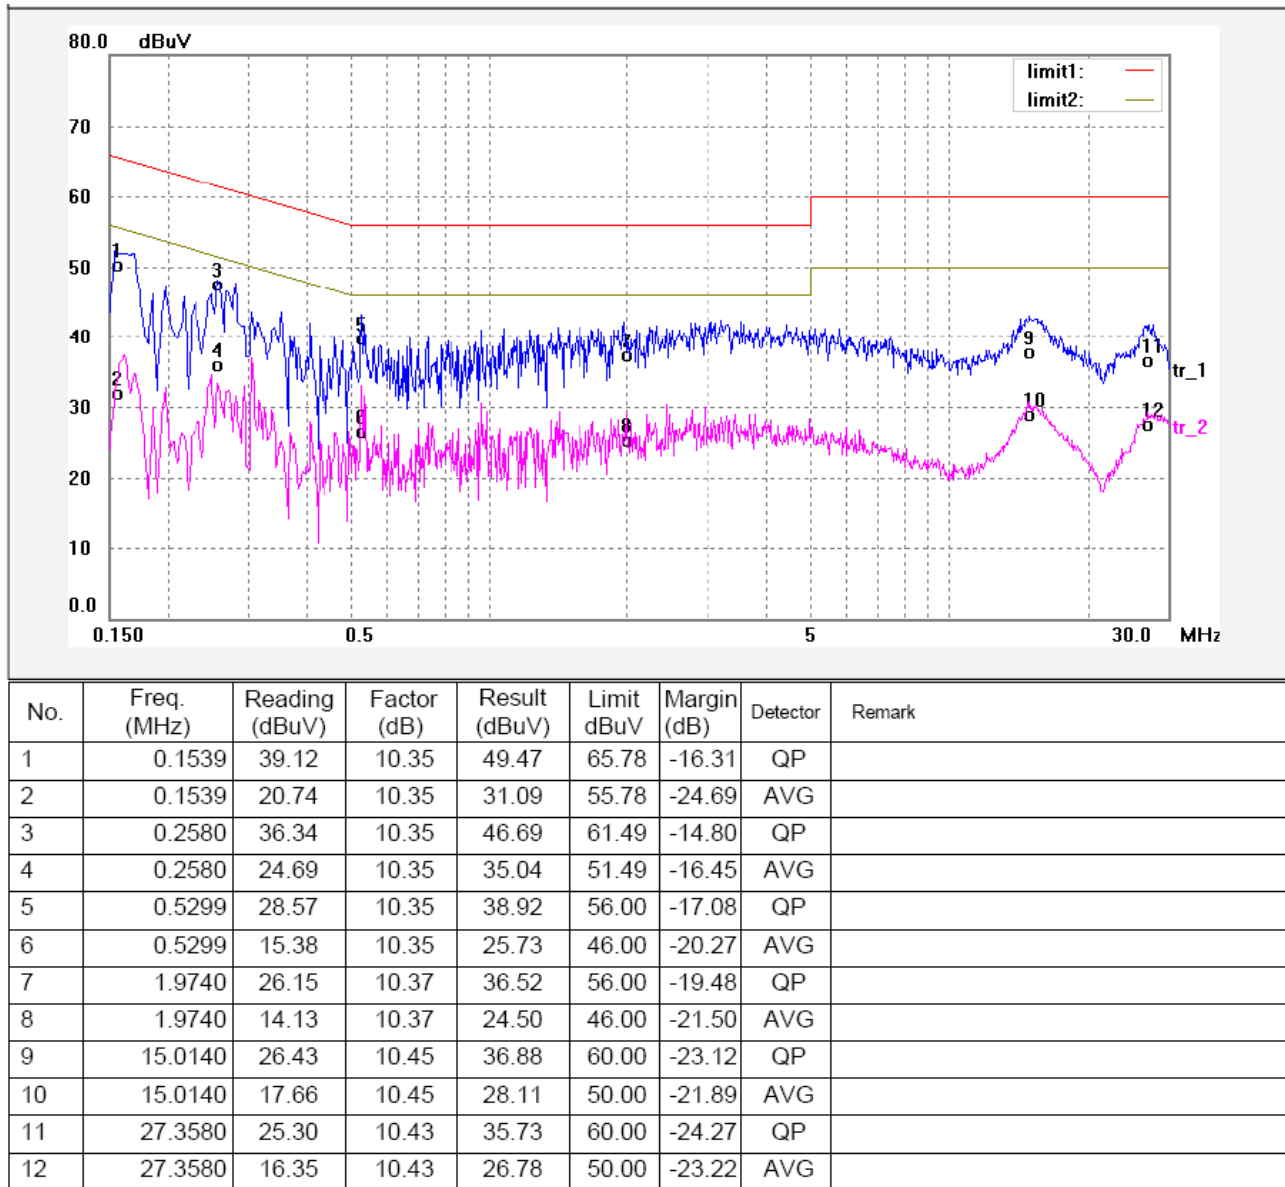

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.


Neutral line:

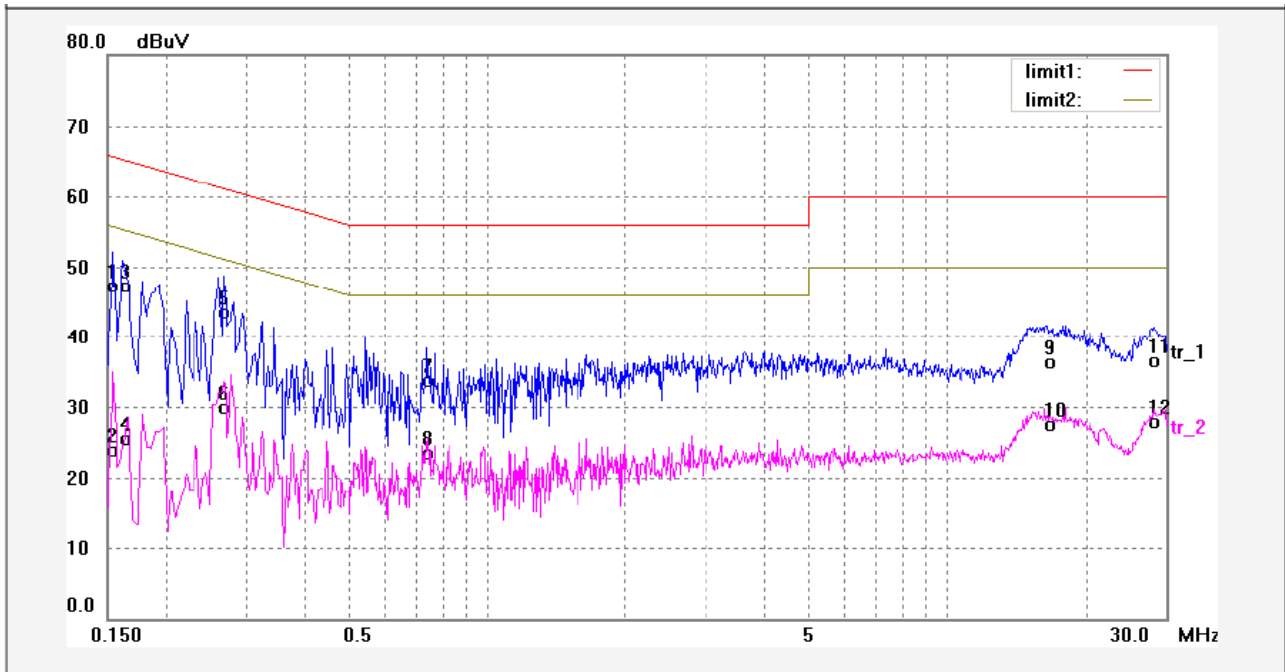

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	36.07	10.35	46.42	65.78	-19.36	QP	
2	0.1539	12.66	10.35	23.01	55.78	-32.77	AVG	
3	0.1620	36.11	10.35	46.46	65.36	-18.90	QP	
4	0.1620	14.27	10.35	24.62	55.36	-30.74	AVG	
5	0.2700	32.37	10.35	42.72	61.12	-18.40	QP	
6	0.2700	18.71	10.35	29.06	51.12	-22.06	AVG	
7	0.7420	22.51	10.36	32.87	56.00	-23.13	QP	
8	0.7420	12.30	10.36	22.66	46.00	-23.34	AVG	
9	16.5620	24.96	10.45	35.41	60.00	-24.59	QP	
10	16.5620	16.22	10.45	26.67	50.00	-23.33	AVG	
11	28.3860	25.35	10.43	35.78	60.00	-24.22	QP	
12	28.3860	16.61	10.43	27.04	50.00	-22.96	AVG	

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

6.4 Photograph – Conducted Emission Test Setup

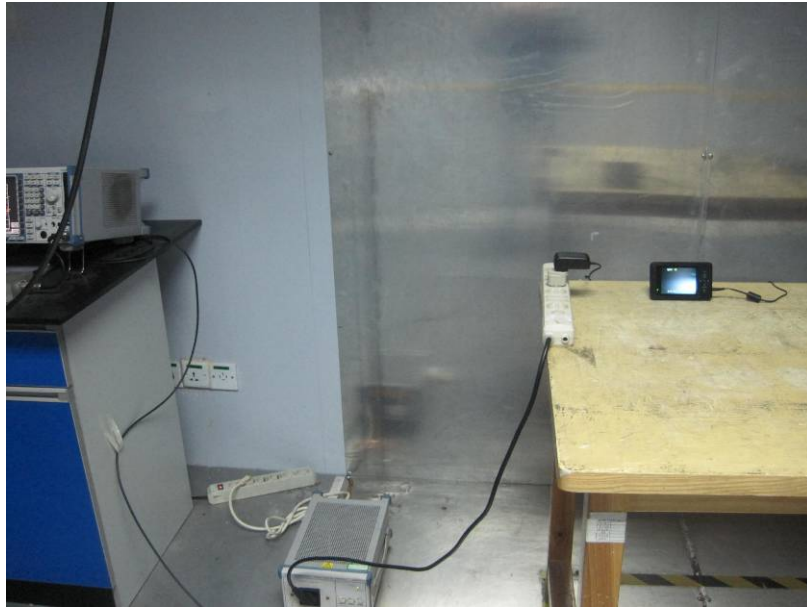

7 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: Based on DA 00-705
 Test Result: PASS
 Frequency Range: 9kHz to 25GHz
 Measurement Distance: 3m
 Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Test mode: The EUT was tested in continuously Transmit mode.

7.1 EUT Operation :

Operating Environment:
 Temperature: 25.5 °C
 Humidity: 51 % RH
 Atmospheric Pressure: 1012 mbar

7.2 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Waltek EMC Lab is $\pm 5.03\text{dB}$.


7.3 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003.

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

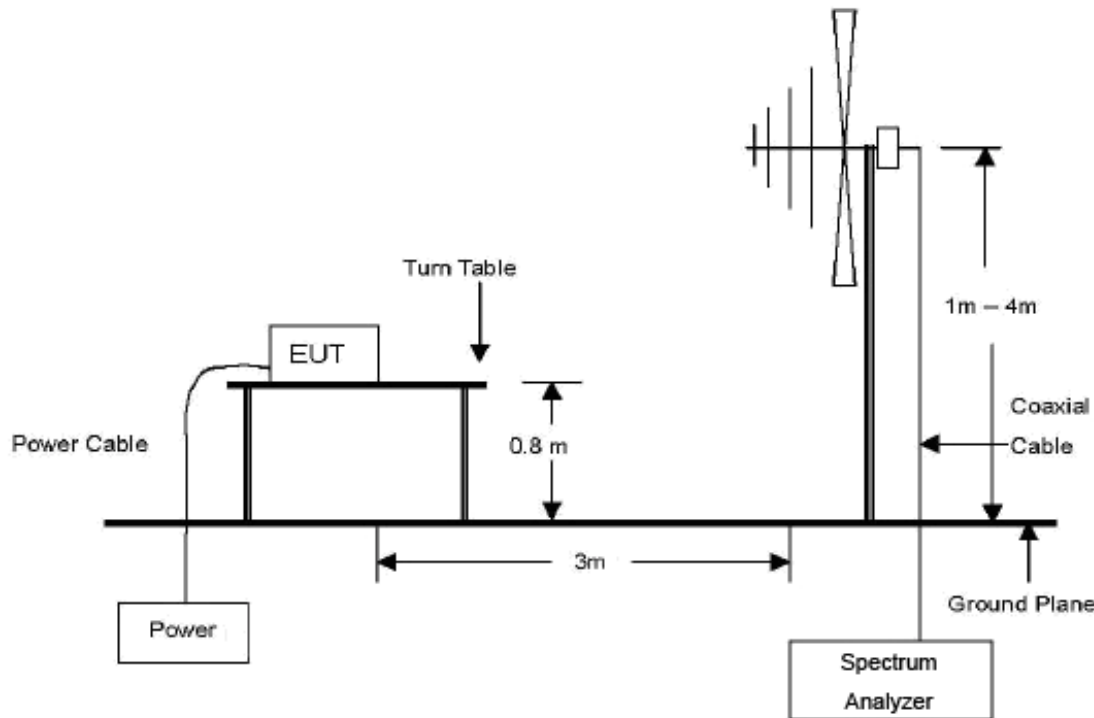

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 25 GHz Emissions.

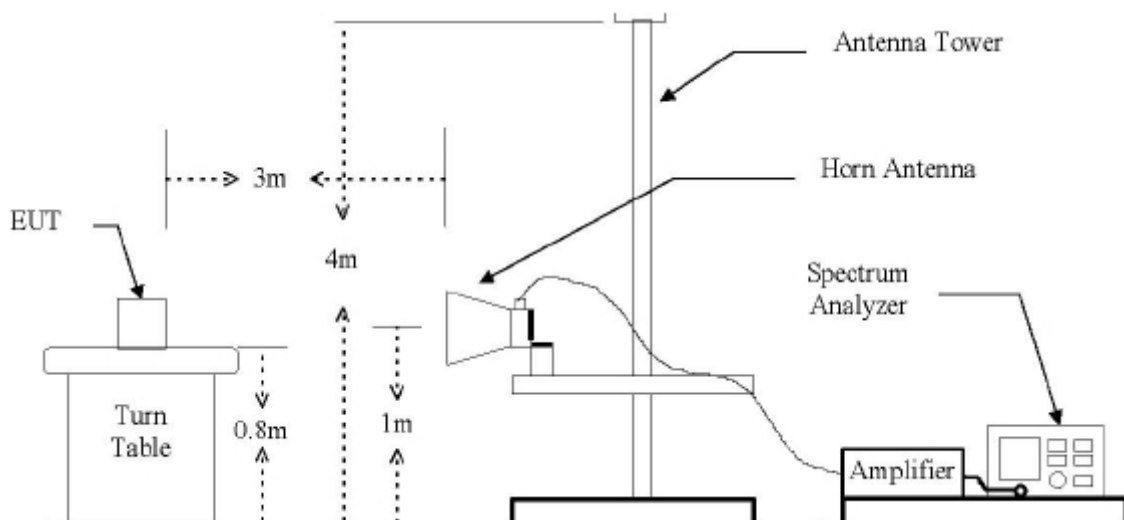

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

7.4 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 9kHz to 25000MHz.

9kHz ~ 30MHz

Start Frequency 9kHz
 Stop Frequency 30MHz
 Sweep Speed..... Auto
 IF Bandwidth 10KHz
 Video Bandwidth..... 10KHz
 Resolution Bandwidth..... 10KHz

30MHz ~ 1GHz

Start Frequency 30 MHz
 Stop Frequency 1000MHz
 Sweep Speed..... Auto
 IF Bandwidth 120 KHz
 Video Bandwidth..... 100KHz
 Quasi-Peak Adapter Bandwidth 120 KHz
 Quasi-Peak Adapter Mode Normal
 Resolution Bandwidth 100KHz

Above 1GHz

Start Frequency 1000 MHz
 Stop Frequency 25000MHz
 Sweep Speed..... Auto
 IF Bandwidth 120 KHz
 Video Bandwidth..... 3MHz
 Quasi-Peak Adapter Bandwidth 120 KHz
 Quasi-Peak Adapter Mode Normal
 Resolution Bandwidth 1MHz

7.5 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.7 Summary of Test Results


According to the data in this section, the EUT complied with the FCC CFR47 Part 15 Section 15.209 & 15.247 standards.

Test mode: continuously receive mode

Remark: the EUT was pretested at the high, middle and low channel, and the worse case was the low Channel, so the data show was the low channel only. Because the emissions below 30MHz are more than 20dB below the limit, the data is not show in the report.


Test Frequency : 30MHz ~ 1000MHz

Antenna polarization: Vertical

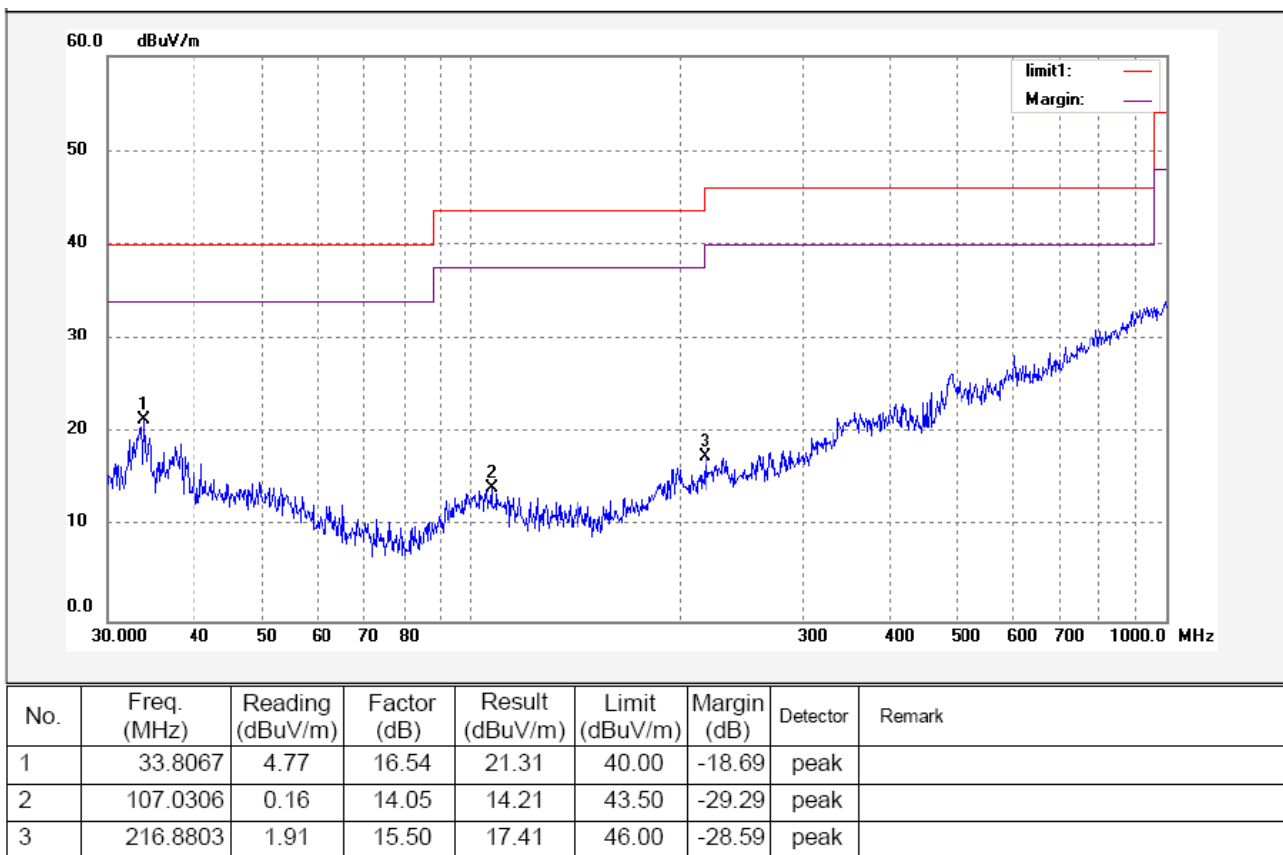

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Antenna polarization: Horizontal

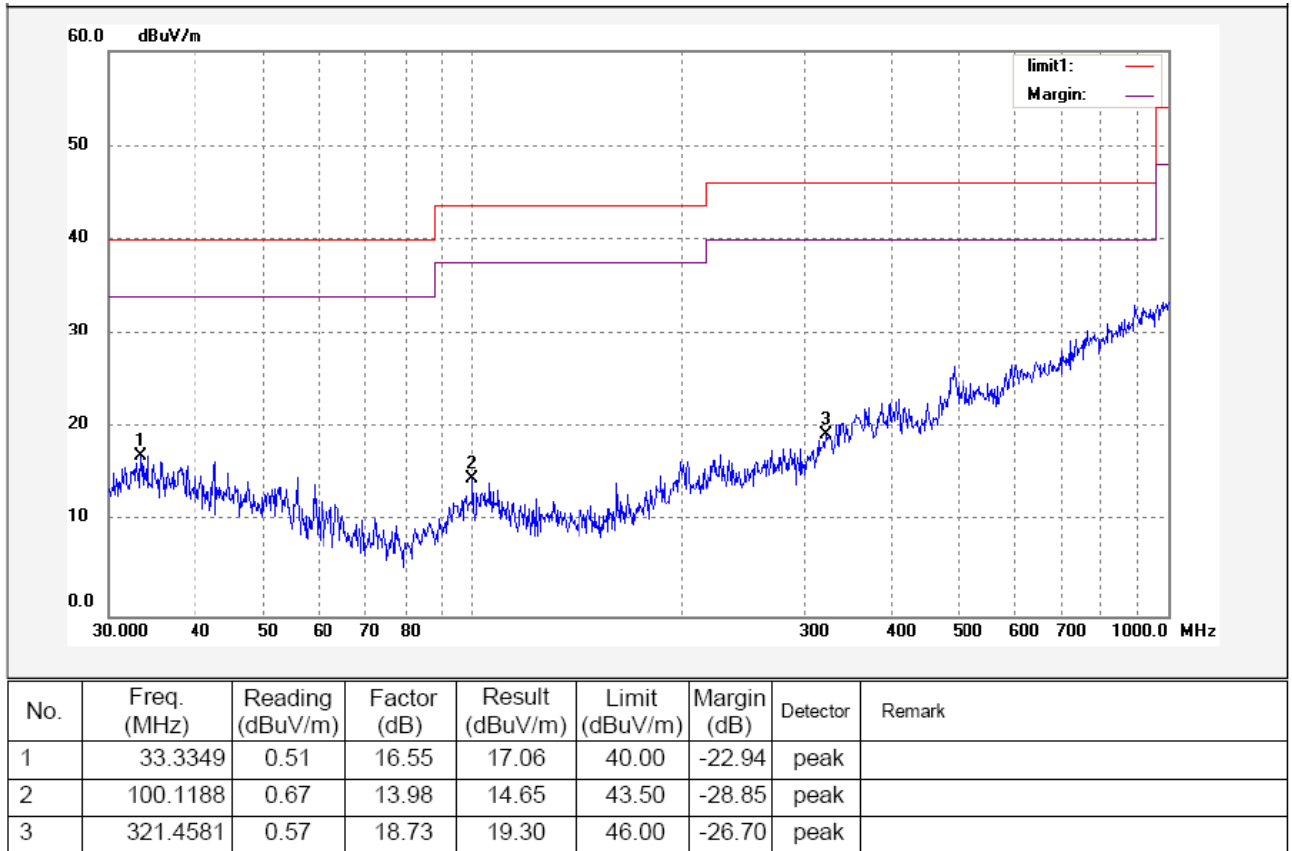


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Test Frequency: Above 1GHz radiation test data:


Remark: No any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

Antenna polarization: Vertical

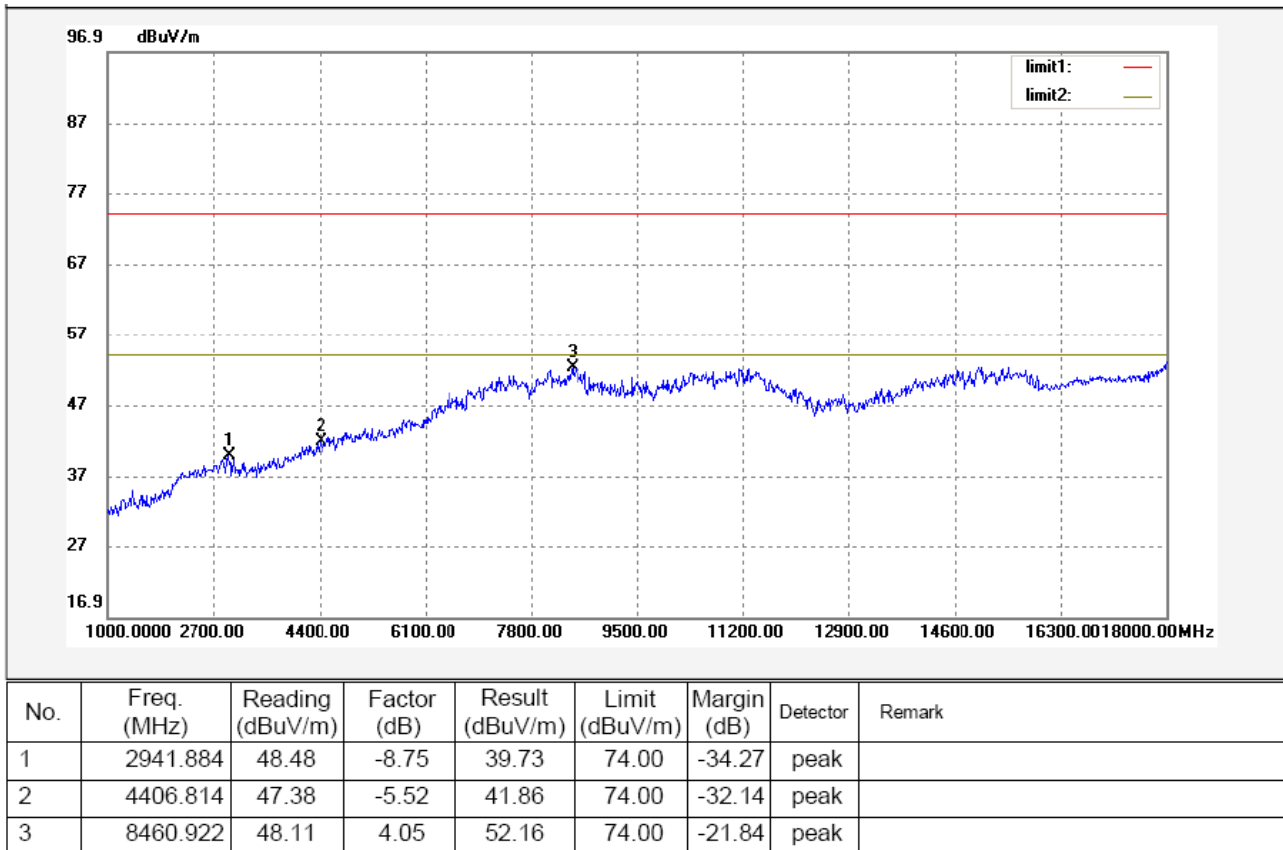

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Antenna polarization: Horizontal

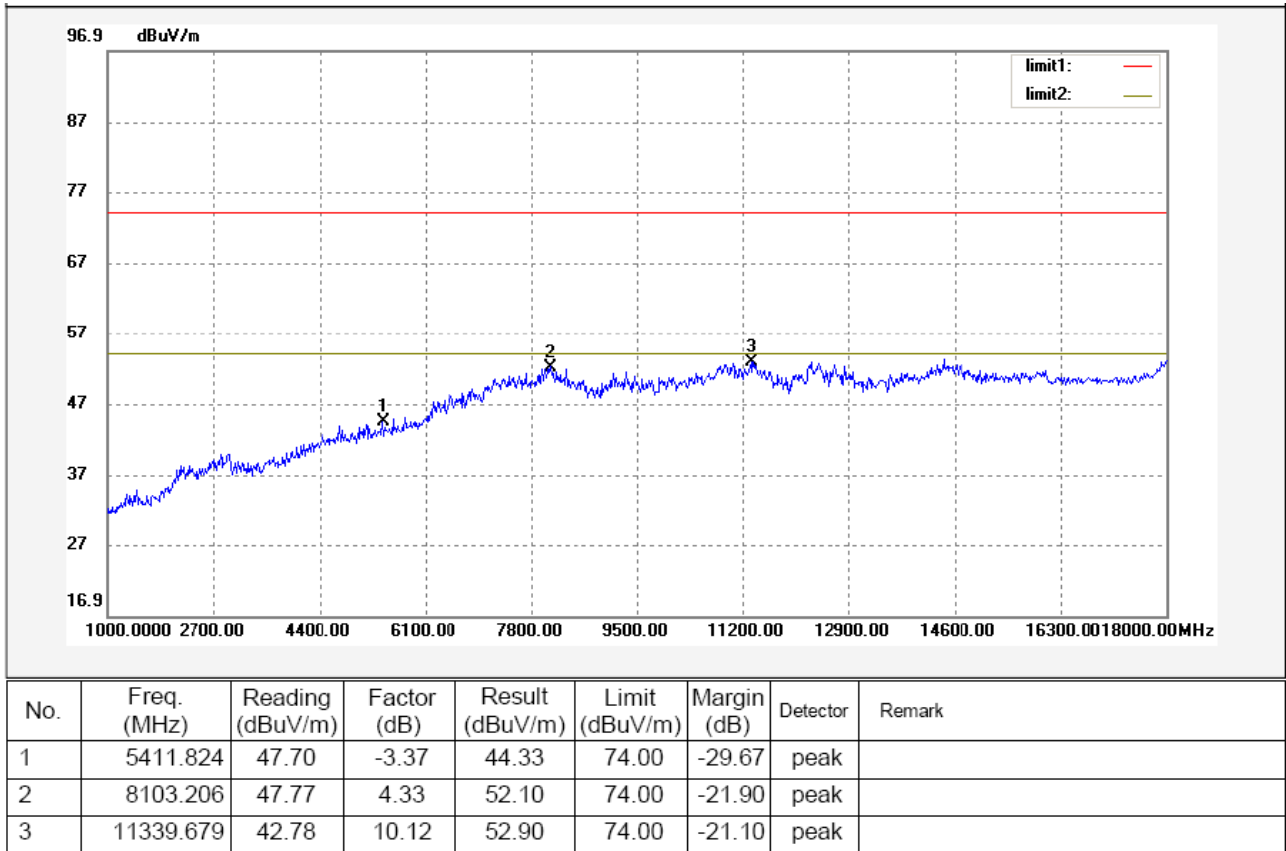


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode: continuously transmit mode

Remark: the EUT was pretested at the high, middle and low channel, and the worse case was the low Channel, so the data show was the low channel only. Because the emissions below 30MHz are more than 20dB below the limit, the data is not show in the report.

Test Frequency : 30MHz ~ 1000MHz


Antenna polarization: Vertical

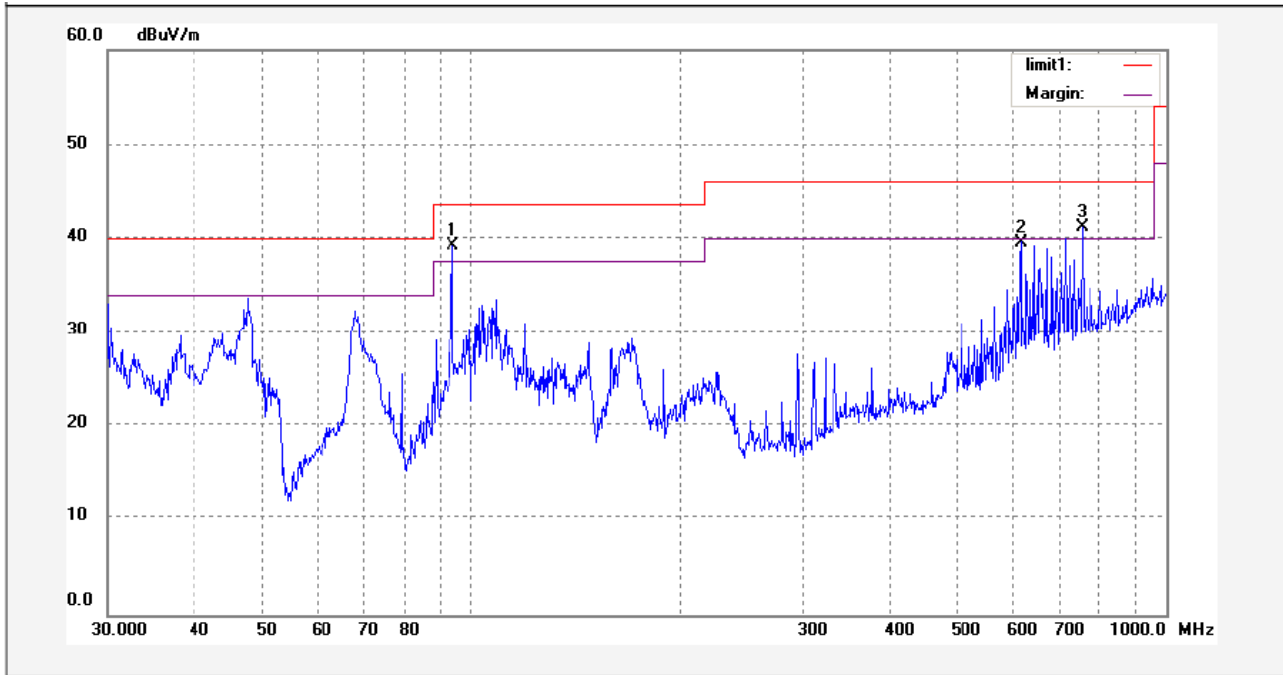

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	93.9829	26.31	12.86	39.17	43.50	-4.33	peak	
2	617.9417	13.60	26.00	39.60	46.00	-6.40	peak	
3	757.6201	13.10	28.03	41.13	46.00	-4.87	peak	

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Antenna polarization: Horizontal

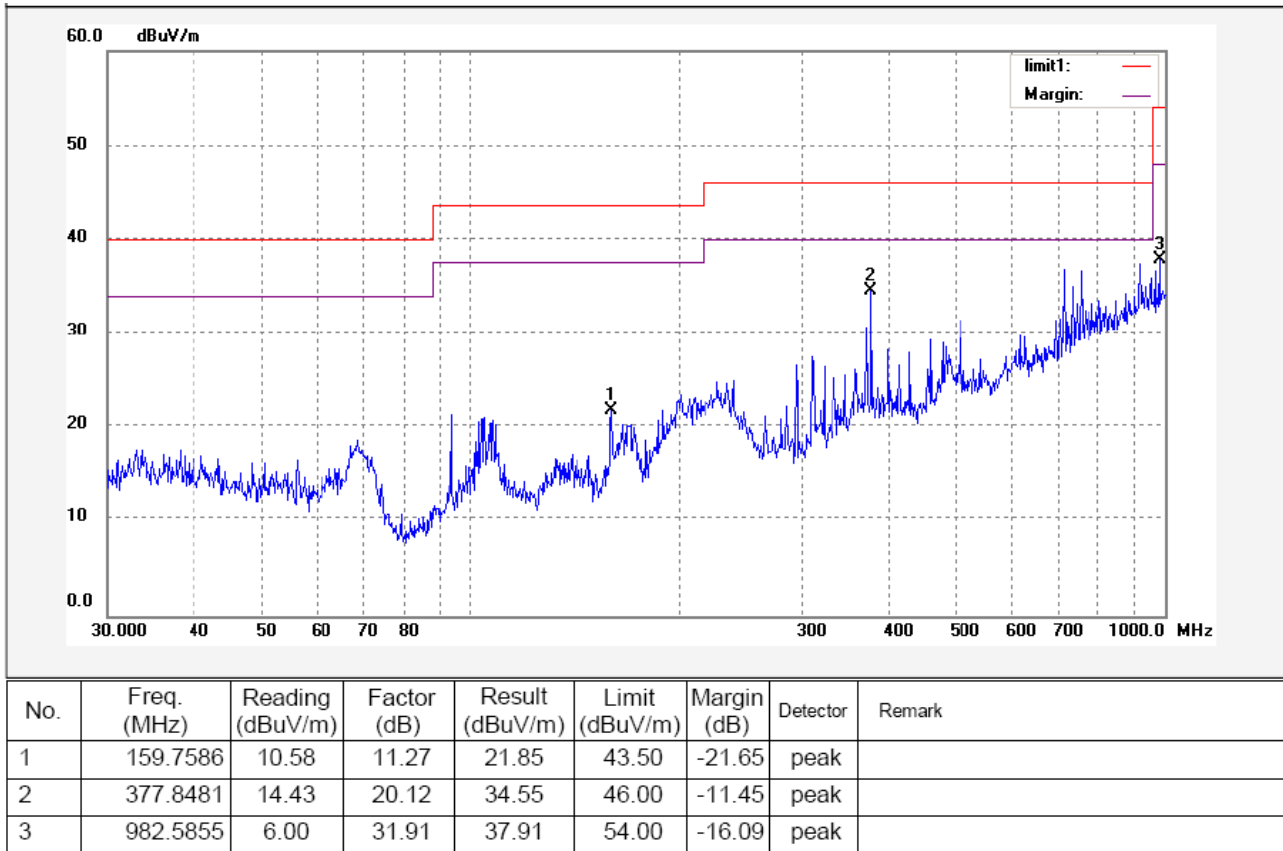

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Test Frequency: 1GHz ~ 25GHz

And the below is the Fundamental and Harmonic

Frequency (MHz)	Detector	Antenna Polarization	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
Low frequency							
2402.00	AV	Vertical	103.30		(Fund.)	1.2	80
4804.00	AV	Vertical	46.96	54.00	-7.04	1.6	95
7206.00	AV	Vertical	47.90	54.00	-6.10	1.2	120
9608.00	AV	Vertical	44.63	54.00	-9.37	2.0	100
12010.00	AV	Vertical	40.99	54.00	-13.01	1.8	230
14412.00	AV	Vertical	42.28	54.00	-11.72	1.3	160
16814.00	AV	Vertical	39.09	54.00	-14.91	1.7	100
19216.00	AV	Vertical	37.37	54.00	-16.63	1.9	110
21618.00	AV	Vertical	35.15	54.00	-18.85	1.3	80
24020.00	AV	Vertical	36.30	54.00	-17.70	1.4	115
2402.00	AV	Horizontal	97.03		(Fund.)	1.4	-10
4804.00	AV	Horizontal	46.27	54.00	-7.73	1.1	170
7206.00	AV	Horizontal	44.02	54.00	-9.98	1.5	150
9608.00	AV	Horizontal	41.13	54.00	-12.87	1.6	140
12010.00	AV	Horizontal	43.11	54.00	-10.89	1.9	65
14412.00	AV	Horizontal	38.02	54.00	-15.98	1.4	160
16814.00	AV	Horizontal	44.12	54.00	-9.88	1.7	190
19216.00	AV	Horizontal	35.97	54.00	-18.03	1.7	150
21618.00	AV	Horizontal	37.30	54.00	-16.70	1.2	90
24020.00	AV	Horizontal	39.07	54.00	-14.93	1.9	65
2402.00	PK	Vertical	115.18		(Fund.)	1.2	80
4804.00	PK	Vertical	59.96	74.00	-14.04	2.0	110
7206.00	PK	Vertical	60.90	74.00	-13.10	1.8	90
9608.00	PK	Vertical	57.63	74.00	-16.37	1.3	220
12010.00	PK	Vertical	53.99	74.00	-20.01	1.2	155
14412.00	PK	Vertical	55.28	74.00	-18.72	1.6	100
16814.00	PK	Vertical	52.09	74.00	-21.91	1.7	135
19216.00	PK	Vertical	50.37	74.00	-23.63	1.4	170
21618.00	PK	Vertical	48.15	74.00	-25.85	1.9	140
24020.00	PK	Vertical	49.30	74.00	-24.70	1.3	145
2402.00	PK	Horizontal	108.53		(Fund.)	1.8	50
4804.00	PK	Horizontal	46.27	74.00	-27.73	2.2	140
7206.00	PK	Horizontal	44.02	74.00	-29.98	1.5	150
9608.00	PK	Horizontal	41.13	74.00	-32.87	1.4	40
12010.00	PK	Horizontal	43.11	74.00	-30.89	1.4	140
14412.00	PK	Horizontal	38.02	74.00	-35.98	1.4	40
16814.00	PK	Horizontal	44.12	74.00	-29.88	1.8	270
19216.00	PK	Horizontal	35.97	74.00	-38.03	1.9	110

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

21618.00	PK	Horizontal	37.30	74.00	-36.70	1.7	110
24020.00	PK	Horizontal	39.07	74.00	-34.93	1.4	115
Middle frequency							
2440.00	AV	Vertical	103.95		(Fund.)	1.5	110
4880.00	AV	Vertical	46.51	54.00	-7.49	1.6	140
7320.00	AV	Vertical	44.62	54.00	-9.38	1.1	100
9760.00	AV	Vertical	43.48	54.00	-10.52	1.4	60
12200.00	AV	Vertical	46.72	54.00	-7.28	1.4	95
14640.00	AV	Vertical	39.39	54.00	-14.61	1.1	190
17080.00	AV	Vertical	42.64	54.00	-11.36	1.5	0
19520.00	AV	Vertical	37.45	54.00	-16.55	1.9	80
21960.00	AV	Vertical	41.44	54.00	-12.56	1.5	290
24400.00	AV	Vertical	34.50	54.00	-19.50	1.4	140
2440.00	AV	Horizontal	98.18		(Fund.)	1.5	130
4880.00	AV	Horizontal	44.58	54.00	-9.42	1.1	150
7320.00	AV	Horizontal	46.31	54.00	-7.69	1.5	365
9760.00	AV	Horizontal	40.42	54.00	-13.58	1.6	160
12200.00	AV	Horizontal	43.17	54.00	-10.83	1.6	150
14640.00	AV	Horizontal	38.57	54.00	-15.43	1.6	260
17080.00	AV	Horizontal	35.76	54.00	-18.24	1.8	245
19520.00	AV	Horizontal	38.45	54.00	-15.55	1.3	140
21960.00	AV	Horizontal	39.68	54.00	-14.32	1.2	160
24400.00	AV	Horizontal	34.36	54.00	-19.64	2.1	180
2440.00	PK	Vertical	113.91		(Fund.)	1.1	95
4880.00	PK	Vertical	62.51	74.00	-11.49	1.3	130
7320.00	PK	Vertical	60.62	74.00	-13.38	1.6	100
9760.00	PK	Vertical	56.48	74.00	-17.52	1.2	200
12200.00	PK	Vertical	59.72	74.00	-14.28	1.7	290
14640.00	PK	Vertical	52.39	74.00	-21.61	1.6	50
17080.00	PK	Vertical	55.64	74.00	-18.36	1.7	10
19520.00	PK	Vertical	50.45	74.00	-23.55	1.7	180
21960.00	PK	Vertical	54.44	74.00	-19.56	1.7	230
24400.00	PK	Vertical	47.50	74.00	-26.50	1.1	160
2440.00	PK	Horizontal	109.08		(Fund.)	1.5	0
4880.00	PK	Horizontal	57.58	74.00	-16.42	2.1	125
7320.00	PK	Horizontal	59.31	74.00	-14.69	1.3	200
9760.00	PK	Horizontal	53.42	74.00	-20.58	1.7	110
12200.00	PK	Horizontal	56.17	74.00	-17.83	1.6	160
14640.00	PK	Horizontal	51.57	74.00	-22.43	1.1	210
17080.00	PK	Horizontal	48.76	74.00	-25.24	1.1	215
19520.00	PK	Horizontal	51.45	74.00	-22.55	1.9	190
21960.00	PK	Horizontal	52.68	74.00	-21.32	1.3	0
24400.00	PK	Horizontal	47.36	74.00	-26.64	1.8	215
High frequency							


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

2480.00	AV	Vertical	104.58		(Fund.)	1.5	260
4960.00	AV	Vertical	48.37	54.00	-5.63	1.6	50
7440.00	AV	Vertical	44.80	54.00	-9.20	1.3	130
9920.00	AV	Vertical	47.26	54.00	-6.74	1.6	120
12400.00	AV	Vertical	42.36	54.00	-11.64	1.7	185
14880.00	AV	Vertical	48.91	54.00	-5.09	1.7	160
17360.00	AV	Vertical	42.94	54.00	-11.06	1.1	100
19840.00	AV	Vertical	43.81	54.00	-10.19	1.5	260
22320.00	AV	Vertical	42.13	54.00	-11.87	1.1	230
24800.00	AV	Vertical	35.75	54.00	-18.25	1.7	185
2480.00	AV	Horizontal	98.73		(Fund.)	1.5	130
4960.00	AV	Horizontal	44.76	54.00	-9.24	1.7	210
7440.00	AV	Horizontal	43.07	54.00	-10.93	1.2	215
9920.00	AV	Horizontal	43.89	54.00	-10.11	1.9	220
12400.00	AV	Horizontal	41.75	54.00	-12.25	1.2	135
14880.00	AV	Horizontal	35.94	54.00	-18.06	1.4	200
17360.00	AV	Horizontal	40.15	54.00	-13.85	1.6	290
19840.00	AV	Horizontal	34.82	54.00	-19.18	1.7	110
22320.00	AV	Horizontal	37.65	54.00	-16.35	1.3	100
24800.00	AV	Horizontal	33.03	54.00	-20.97	2.0	150
2480.00	PK	Vertical	113.26		(Fund.)	1.1	275
4960.00	PK	Vertical	61.37	74.00	-12.63	1.4	70
7440.00	PK	Vertical	57.80	74.00	-16.20	2.0	110
9920.00	PK	Vertical	60.26	74.00	-13.74	1.4	180
12400.00	PK	Vertical	55.36	74.00	-18.64	1.4	200
14880.00	PK	Vertical	61.91	74.00	-12.09	1.6	110
17360.00	PK	Vertical	55.94	74.00	-18.06	1.5	100
19840.00	PK	Vertical	56.81	74.00	-17.19	1.4	180
22320.00	PK	Vertical	55.13	74.00	-18.87	1.8	215
24800.00	PK	Vertical	48.75	74.00	-25.25	1.3	175
2480.00	PK	Horizontal	108.75		(Fund.)	1.6	180
4960.00	PK	Horizontal	57.76	74.00	-16.24	1.8	140
7440.00	PK	Horizontal	56.07	74.00	-17.93	1.2	230
9920.00	PK	Horizontal	56.89	74.00	-17.11	1.5	230
12400.00	PK	Horizontal	54.75	74.00	-19.25	1.4	100
14880.00	PK	Horizontal	48.94	74.00	-25.06	1.6	150
17360.00	PK	Horizontal	53.15	74.00	-20.85	1.8	245
19840.00	PK	Horizontal	47.82	74.00	-26.18	1.9	190
22320.00	PK	Horizontal	50.65	74.00	-23.35	1.5	120
24800.00	PK	Horizontal	46.03	74.00	-27.97	1.2	260


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

7.8 Photograph – Radiation Spurious Emission Test Setup

Below 1GHz

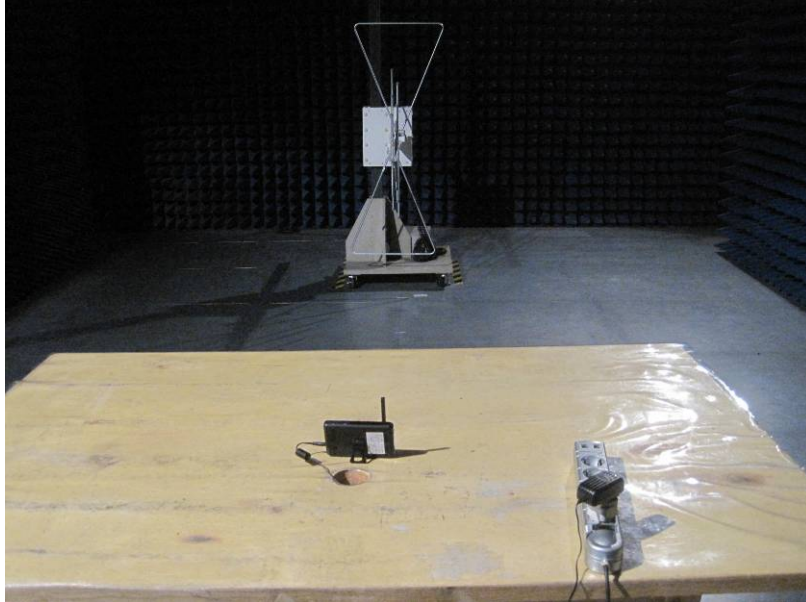

Above 1GHz

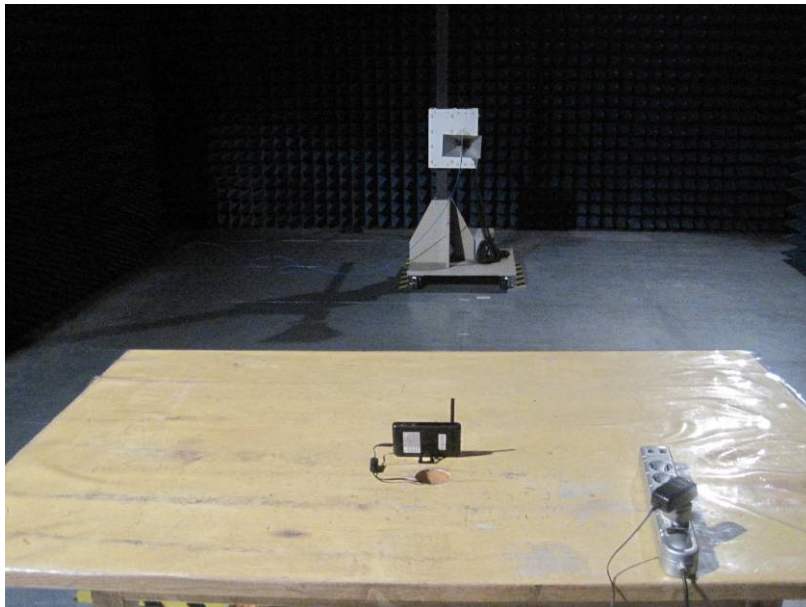

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES


Reference No.: WT12010189-F-E-F

8 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	Based on DA 00-705
Measurement Distance:	3m
Limit:	40.0 dBuV/m between 30MHz & 88MHz; 43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz; 54.0 dBuV/m above 960MHz. 74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz
Detector:	For Peak value: RBW = 1 MHz for $f \geq 1$ GHz VBW $\geq$ RBW; Sweep = auto Detector function = peak Trace = max hold For AVG value: RBW = 1 MHz for $f \geq 1$ GHz VBW = 10Hz; Sweep = auto Detector function = AVG Trace = max hold

8.1 Test Result:

Low Channel – Peak

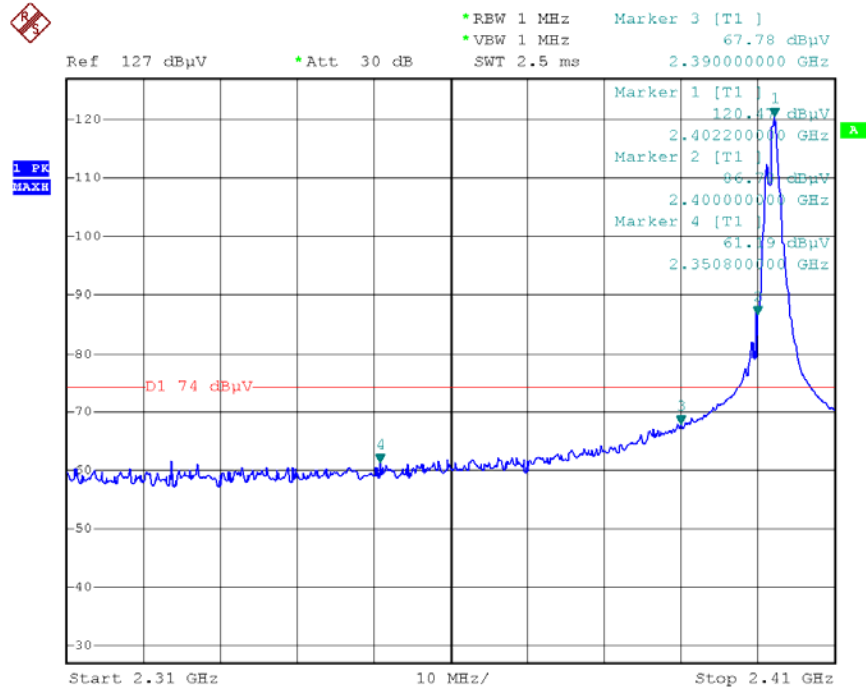


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES

Reference No.: WT12010189-F-E-F

Low Channel – AV

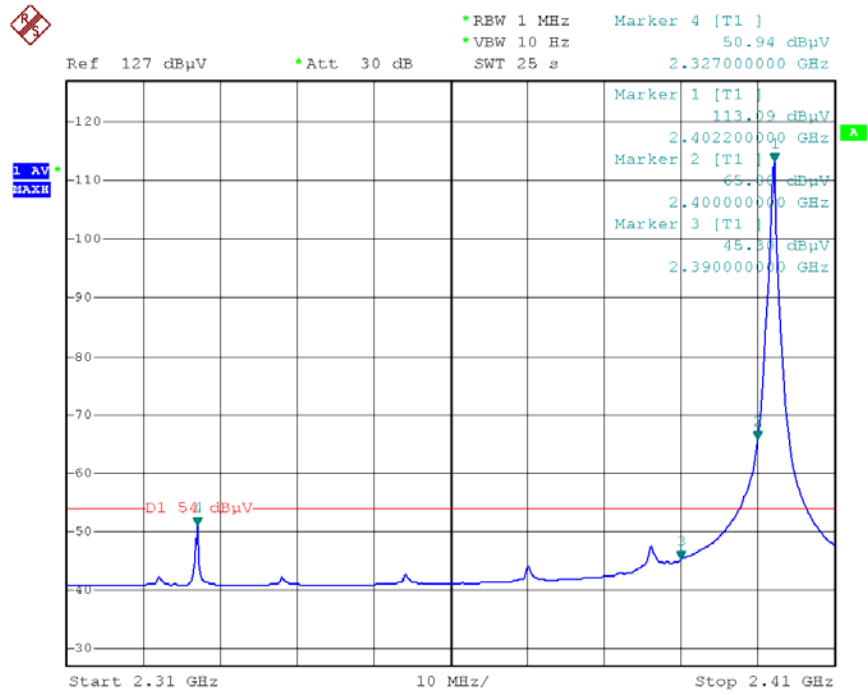


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES

Reference No.: WT12010189-F-E-F

High Channel – Peak

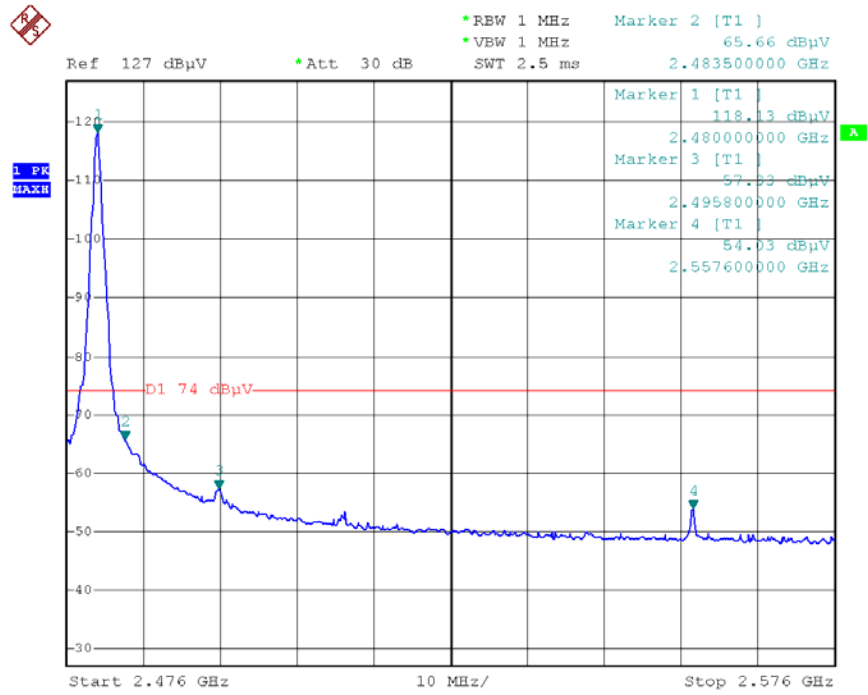


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES

Reference No.: WT12010189-F-E-F

High Channel – AV

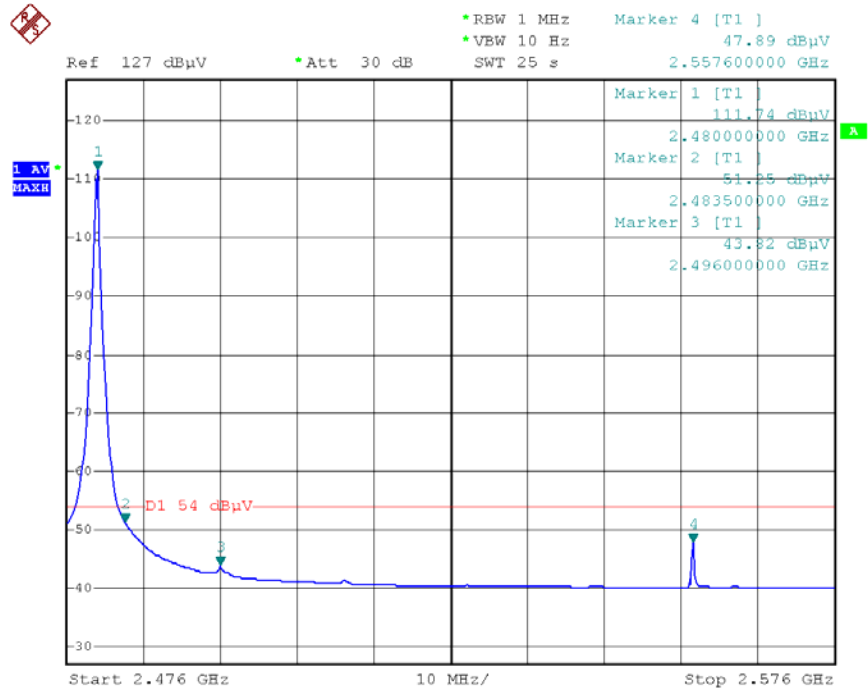

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

9 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247
 Test Method: Based on DA 00-705
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.

9.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 100kHz

9.2 Test Result:

Test Channel	Bandwidth
Low	2.31MHz
Middle	1.51MHz
High	1.46MHz


Test result plot as follows:

Low Channel

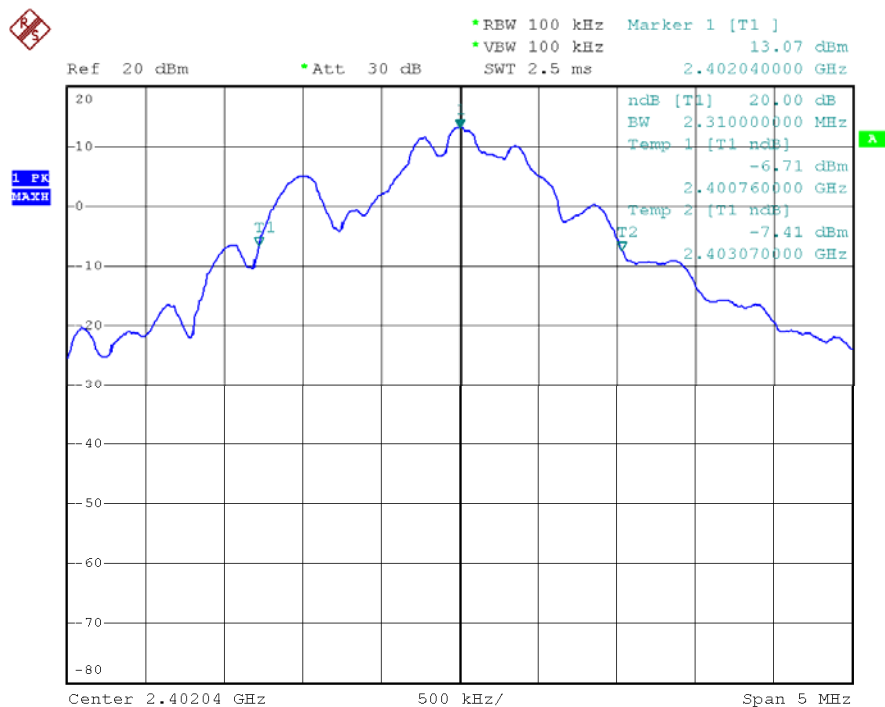


The results shown in this test report refer only to the sample(s) tested, This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

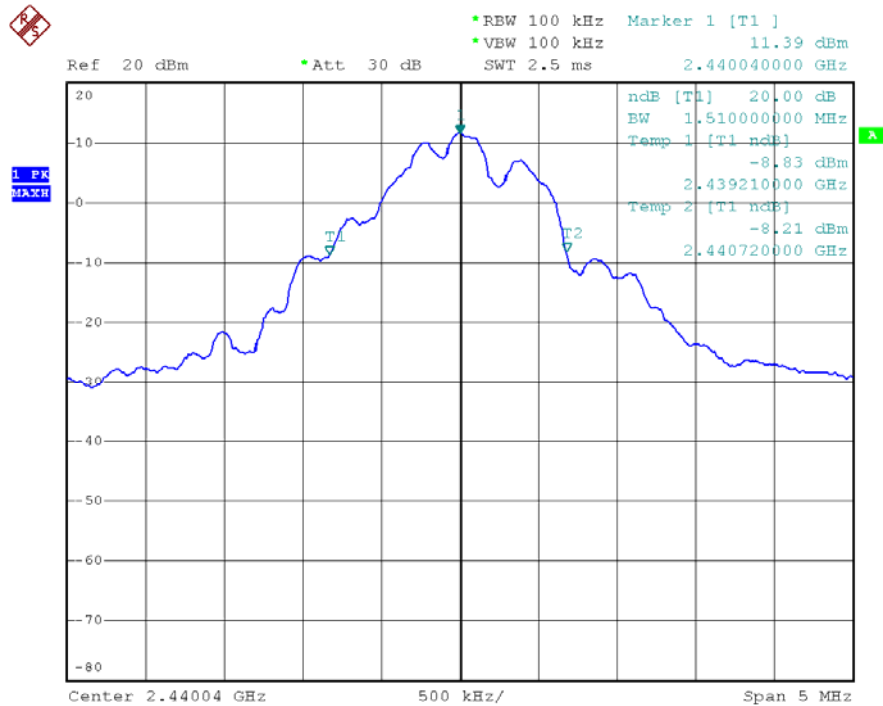

High Channel

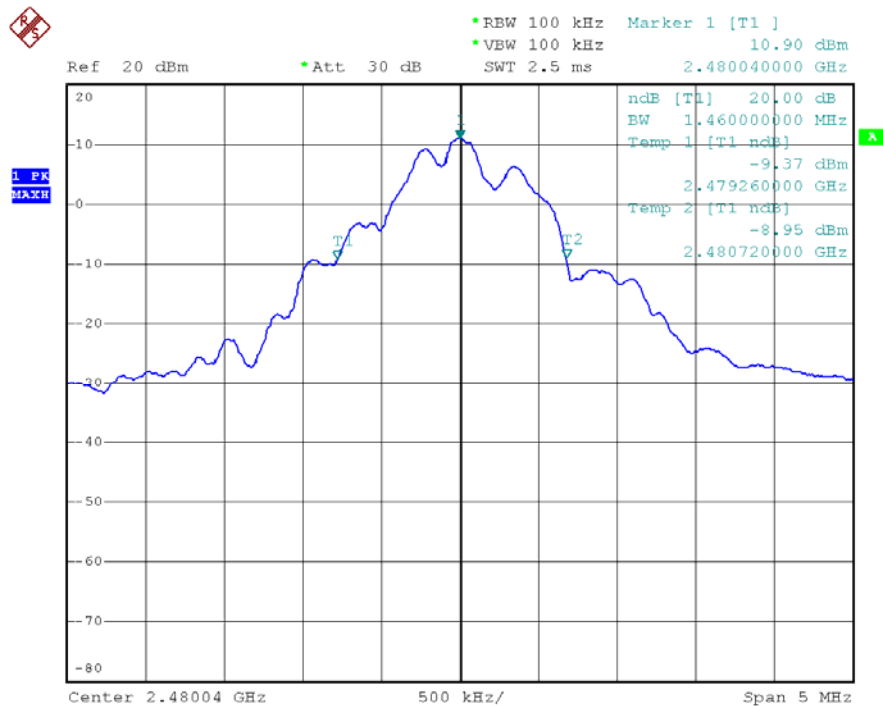

The results shown in this test report refer only to the sample(s) tested, This Test report cannot be reproduced, except in full, without prior written permission of the Company.

10 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	Based on ANSI C63.4:2003
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result “Number of Hopping Frequency” of this document. The 0.125watts (20.97 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 10 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

10.2 Test Result:

Test Channel	Output Power (dBm)	Limit (dBm)
Low	13.24	20.97
Middle	11.46	20.97
High	10.85	20.97

11 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	Based on DA 00-705
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 100kHz , Span = 5MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.2 Test Result:


Test Channel	Separation (MHz)	Result
Low	2.00	PASS
Middle	2.00	PASS
High	2.01	PASS

Test result plot as follows:

Low Channel:

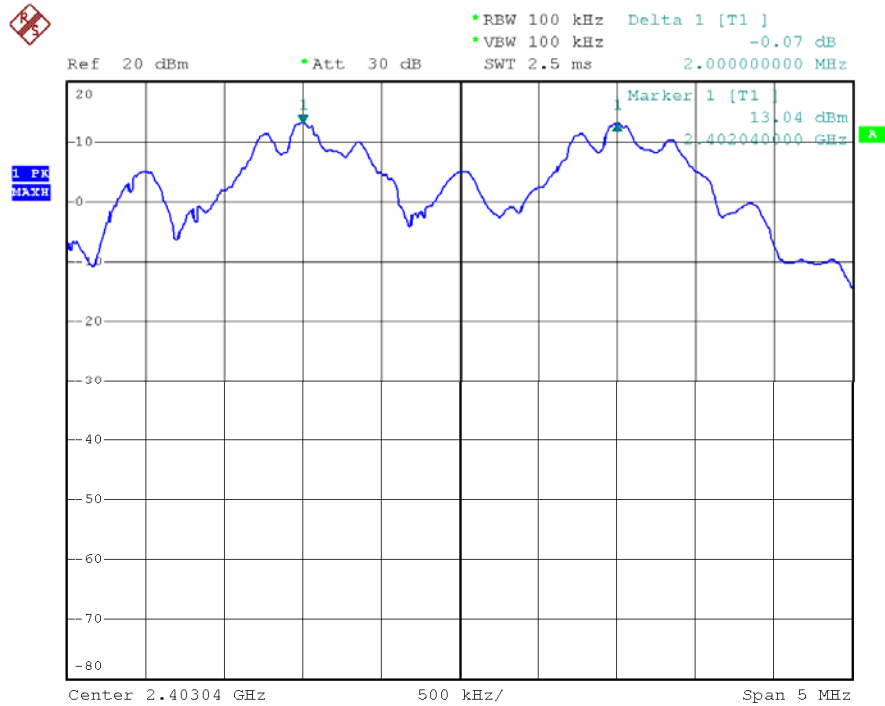

Middle Channel

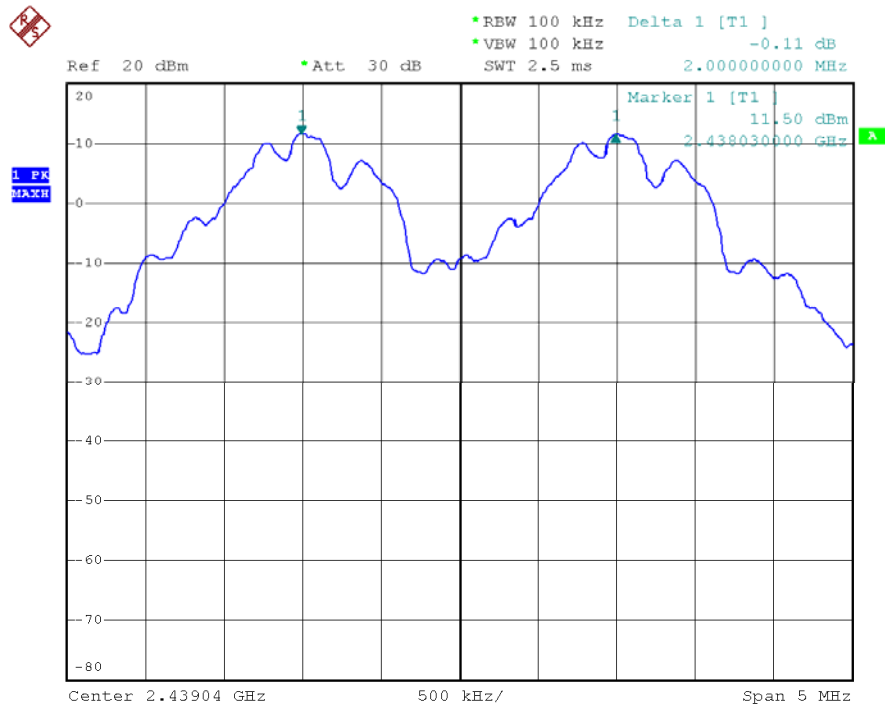

The results shown in this test report refer only to the sample(s) tested, This Test report cannot be reproduced, except in full, without prior written permission of the Company.


WALTEK SERVICES

Reference No.: WT12010189-F-E-F

RDI Technology (Shenzhen) Co., Ltd.

FCC ID: SJ8-M370QN

High Channel

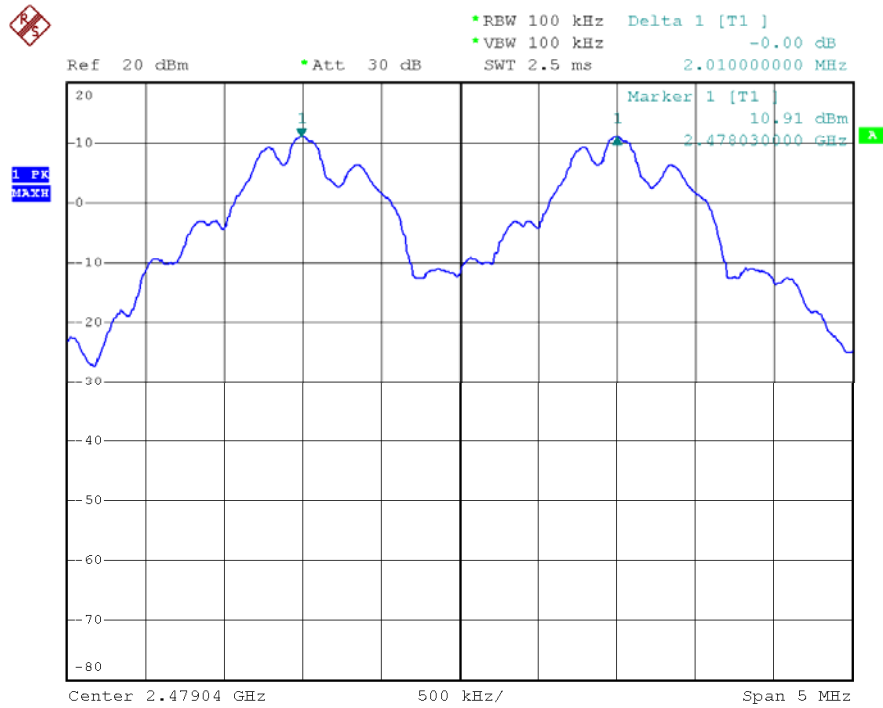

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES

Reference No.: WT12010189-F-E-F

12 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	Based on DA 00-705
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 100 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Center Frequency = 2441MHz, Span = 86MHz. Submit the test result graph.

12.2 Test Result:

Total Channels are 40 Channels.

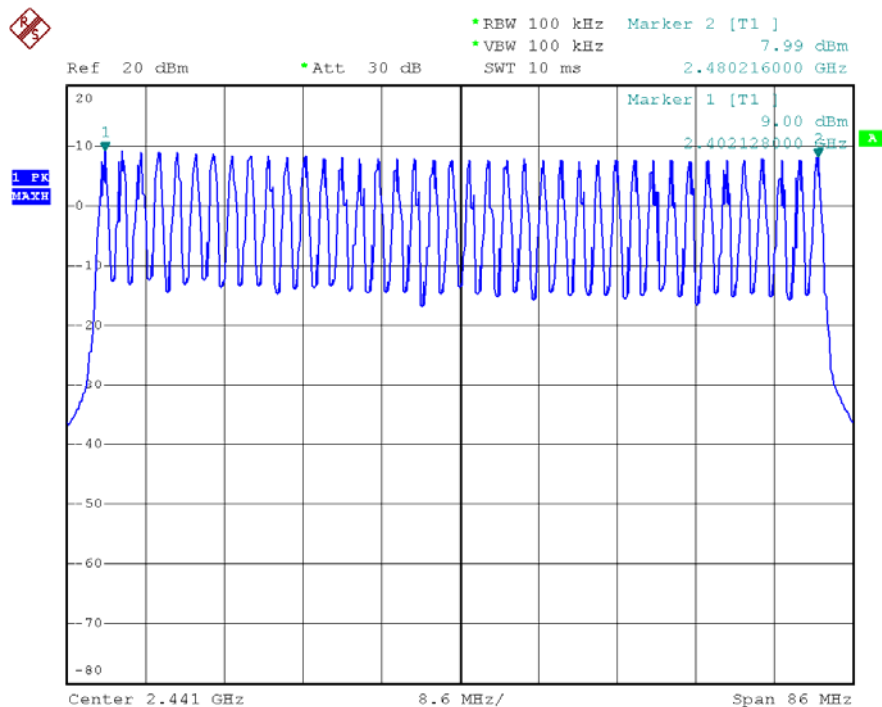

The results shown in this test report refer only to the sample(s) tested, This Test report cannot be reproduced, except in full, without prior written permission of the Company.

13 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	Based on DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centered on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 1MHz.Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: $T = 0.4(s) * 40 = 16 (s)$


So, the Dwell Time can be calculated as follows:

Dwell time = $31 * 16 * (MkrDelta) / 1000$


Note : Mkr Delta is once pulse time.

Frequency	Mkr Delta(ms)	Dwell Time(s)	Limits(s)	Result
2402 MHz	0.265	0.131	0.400	Pass
2440 MHz	0.291	0.144	0.400	Pass
2480 MHz	0.256	0.127	0.400	Pass

Low Channel

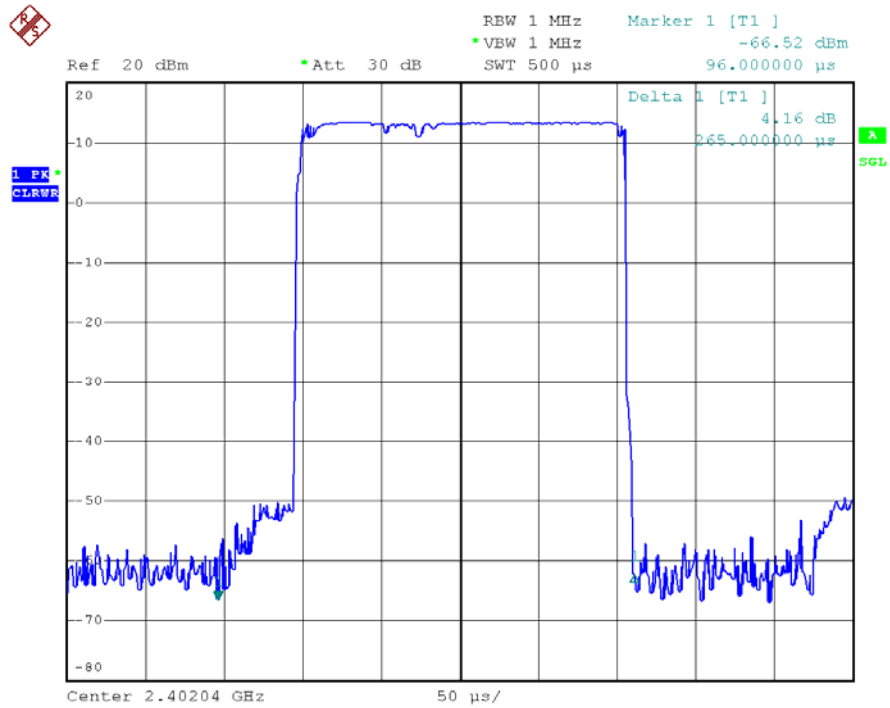

Middle Channel

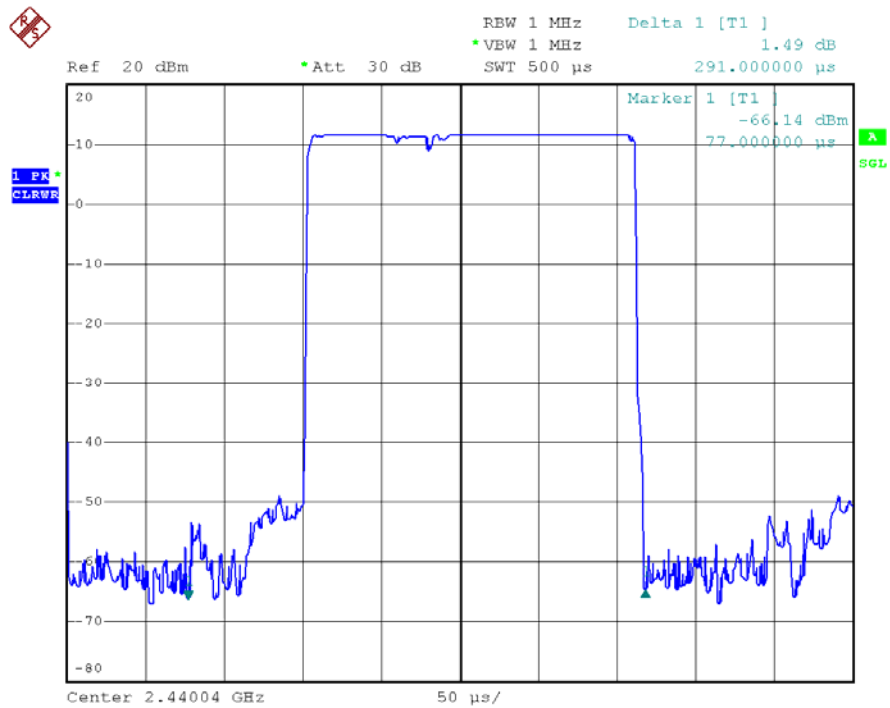


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES

Reference No.: WT12010189-F-E-F

High Channel

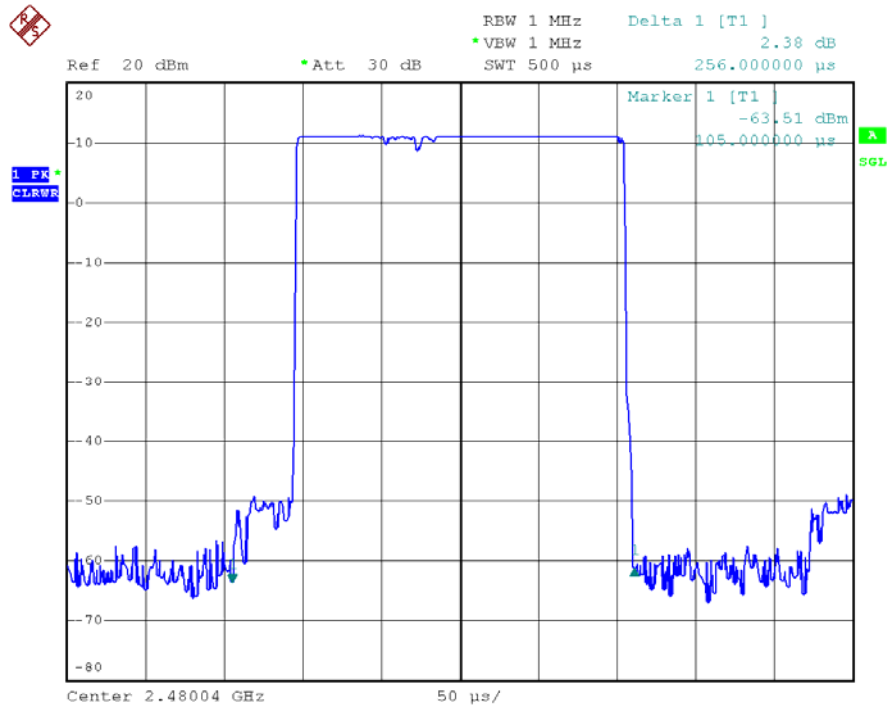

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES

Reference No.: WT12010189-F-E-F

14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product has a permanent antenna, fulfill the requirement of this section.

15 RF Exposure

15.1 Requirements:

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

This is a portable device.

15.2 Measurement Result:

Frequency (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Conducted Power (dBm)	Conducted Power (mW)	Radiated Power (e.i.r.p) (mW)
2402	-2.39	0.577	13.24	21.09	12.16
2440	-2.39	0.577	11.46	14.00	8.07
2480	-2.39	0.577	10.85	12.16	7.01

The EUT works on the 2.4G ISM band, and the max output power (conducted) of which is 21.09mW at 2402MHz lower than low threshold 60/f (GHz) mW (24.98mW), d < 2.5cm in general population category.

The SAR evaluation is not required.

16 Photographs - Constructional Details

16.1 Product View



The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES


Reference No.: WT12010189-F-E-F

16.2 EUT – Appearance View




16.3 EUT – Open View



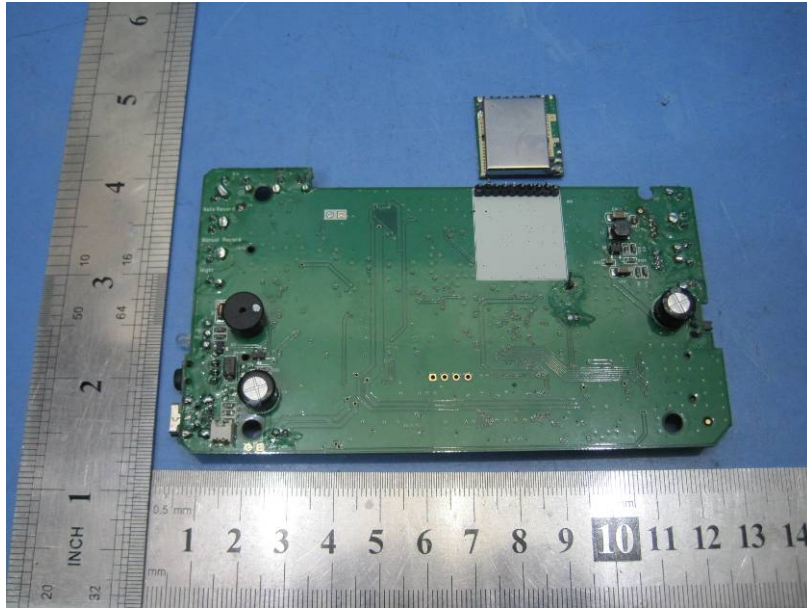


16.4 EUT - PCB View

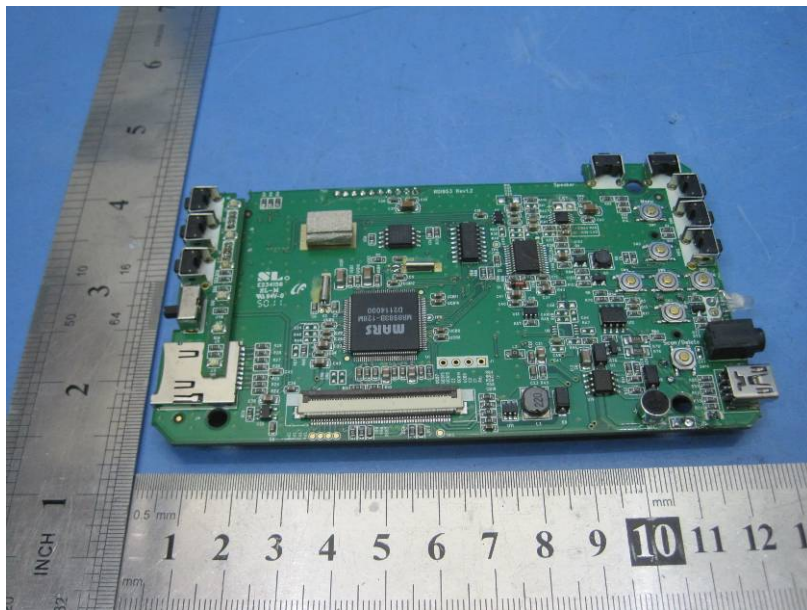


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES

Reference No.: WT12010189-F-E-F

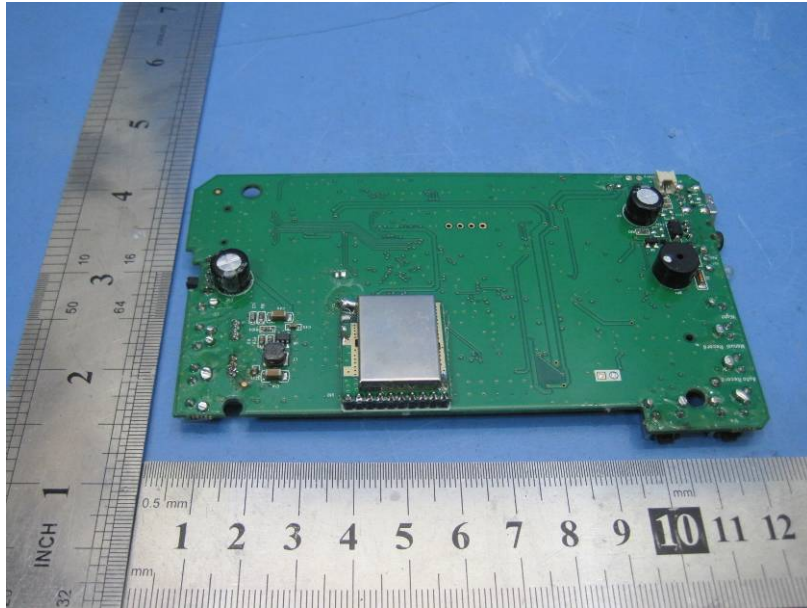



16.5 RF Module - View

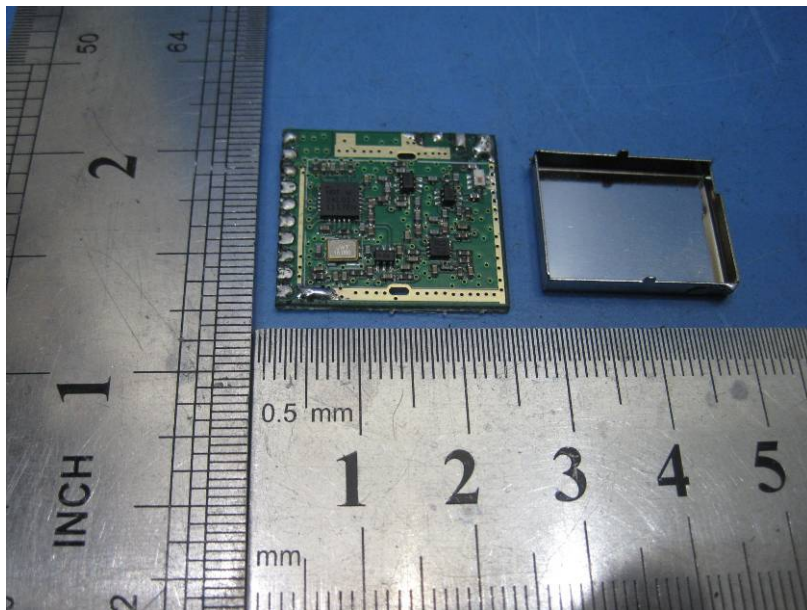

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES

Reference No.: WT12010189-F-E-F

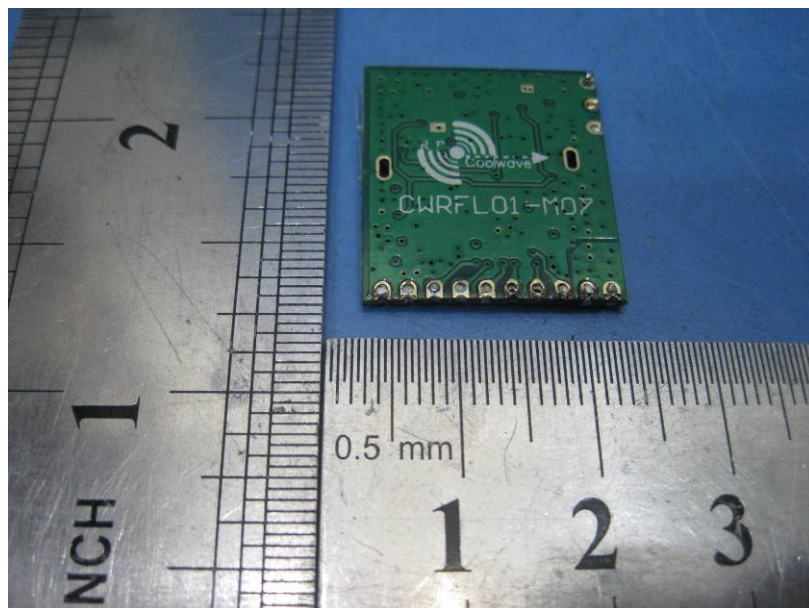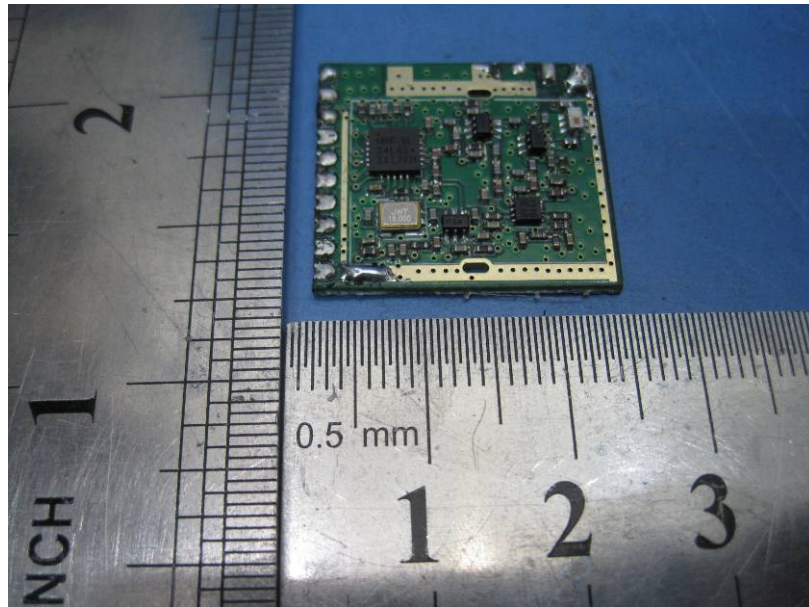

17 FCC Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/ proposed FCC Label Location

