

# FCC TEST REPORT

**FCC ID** : SJ8-UBRC13  
**Applicant** : RDI Technology (Shenzhen) Co., Ltd.  
**Address** : Building C1 Xintang Industrial Park, East Baishixia, Fuyong, Baoan, Shenzhen, China  
**Manufacturer** : The same as above  
**Address** : The same as above  
**Equipment Under Test (EUT) :**  
Product Name : Wireless Camera  
Model No. : UDRC13  
**Standards** : FCC CFR47 Part 15 Section 15.247:2010  
**Date of Test** : April 22~25, 2013  
**Date of Issue** : May 06, 2013

**Test Result** : **PASS**

Remark:

\* The sample described above has been tested to be in compliance with the requirements of ANSI C63.4:2003. The test results have been reviewed and comply with the rules listed above and found to meet their essential requirements.

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,

Shenzhen 518105, China

Tel: +86-755-83551033


Fax: +86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

## 2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Duty Cycle	15.35	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY.....</b>	<b>2</b>
<b>3 CONTENTS.....</b>	<b>3</b>
<b>4 GENERAL INFORMATION .....</b>	<b>5</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	5
4.2 DETAILS OF E.U.T.....	5
4.3 TEST FACILITY .....	5
4.4 TEST LOCATION.....	5
4.5 TEST MODE .....	5
4.6 CHANNEL LIST .....	6
<b>5 EQUIPMENT USED DURING TEST.....</b>	<b>7</b>
5.1 EQUIPMENTS LIST .....	7
5.2 MEASUREMENT UNCERTAINTY .....	8
5.3 TEST EQUIPMENT CALIBRATION .....	8
<b>6 CONDUCTED EMISSION.....</b>	<b>9</b>
6.1 E.U.T. OPERATION .....	9
6.2 EUT SETUP .....	9
6.3 CONDUCTED EMISSION TEST RESULT .....	10
<b>7 RADIATED SPURIOUS EMISSIONS .....</b>	<b>12</b>
7.1 EUT OPERATION : .....	12
7.2 TEST SETUP .....	13
7.3 SPECTRUM ANALYZER SETUP .....	14
7.4 TEST PROCEDURE.....	15
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	15
7.6 SUMMARY OF TEST RESULTS .....	16
<b>8 DUTY CYCLE.....</b>	<b>26</b>
8.1 TEST PROCEDURE.....	26
8.2 TEST RESULT .....	26
<b>9 BAND EDGE MEASUREMENT.....</b>	<b>28</b>
9.1 TEST RESULT: .....	29
<b>10 20 DB BANDWIDTH MEASUREMENT.....</b>	<b>33</b>
10.1 TEST PROCEDURE:.....	33
10.2 TEST RESULT: .....	33
<b>11 MAXIMUM PEAK OUTPUT POWER.....</b>	<b>35</b>
11.1 TEST PROCEDURE:.....	35
11.2 TEST RESULT: .....	35
<b>12 HOPPING CHANNEL SEPARATION .....</b>	<b>38</b>
12.1 TEST PROCEDURE:.....	38
12.2 TEST RESULT: .....	38
<b>13 NUMBER OF HOPPING FREQUENCY .....</b>	<b>41</b>
13.1 TEST PROCEDURE:.....	41
13.2 TEST RESULT: .....	41
<b>14 DWELL TIME.....</b>	<b>42</b>

14.1	TEST PROCEDURE:.....	42
14.2	TEST RESULT: .....	42
<b>15</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>46</b>
<b>16</b>	<b>RF EXPOSURE .....</b>	<b>47</b>
16.1	REQUIREMENTS: .....	47
16.2	THE PROCEDURES / LIMIT .....	47
16.3	MPE CALCULATION METHOD.....	48
<b>17</b>	<b>PHOTOGRAPHS – TEST SETUP.....</b>	<b>49</b>
17.1	PHOTOGRAPH – RADIATION SPURIOUS EMISSION TEST SETUP .....	49
17.2	PHOTOGRAPH – CONDUCTED EMISSION TEST SETUP.....	52
<b>18</b>	<b>PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....</b>	<b>53</b>
18.1	EXTERNAL VIEW .....	53
18.2	EUT - INTERNAL VIEW .....	56
18.3	ADAPTER - EXTERNAL VIEW.....	60
<b>19</b>	<b>FCC LABEL .....</b>	<b>62</b>

## 4 General Information

### 4.1 General Description of E.U.T.

<b>Product Name</b>	: Wireless Camera
<b>Model No.</b>	: UDRC13
<b>Operation Frequency</b>	: 2402MHz ~ 2480MHz, 40 channels in total
<b>Type of Modulation</b>	: GFSK
<b>Oscillator</b>	: Crystal 27MHz for CPU,16MHz for RF module
<b>Antenna installation</b>	: Integrated Antenna
<b>Antenna Gain</b>	: 2 dBi

### 4.2 Details of E.U.T.

<b>Technical Data</b>	: (1) DC 3.7V, 1000mA powered by battery (2)DC 5V, 1A powered by adapter
<b>Adapter</b>	: Manufacturer:Csec, M/N:CS6D050100FUF

### 4.3 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

### 4.4 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd.,Songgang Street, Baoan District, Shenzhen, China

### 4.5 Test Mode

Test Item	Test Mode
Conducted Emissions	Normal linking(adapter)
Radiated Emissions	Normal linking(adapter)
	Normal linking(battery)

**4.6 Channel List**

<b>Channel No.</b>	<b>Frequency (MHz)</b>	<b>Channel No.</b>	<b>Frequency (MHz)</b>	<b>Channel No.</b>	<b>Frequency (MHz)</b>	<b>Channel No.</b>	<b>Frequency (MHz)</b>
1	2402	2	2404	3	2406	4	2408
5	2410	6	2412	7	2414	8	2416
9	2418	10	2420	11	2422	12	2424
13	2426	14	2428	15	2430	16	2432
17	2434	18	2436	19	2438	20	2440
21	2442	22	2444	23	2446	24	2448
25	2450	26	2452	27	2454	28	2456
29	2458	30	2460	31	2462	32	2464
33	2466	34	2468	35	2470	36	2472
37	2474	38	2476	39	2478	40	2480

## 5 Equipment Used during Test

### 5.1 Equipments List

<b>Conducted Emissions</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1.	EMI Test Receiver	R&S	ESCI	101155	Aug. 13,2012	Aug. 12,2013
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Aug. 13,2012	Aug. 12,2013
3.	Cable	LARGE	RF300	EW02014-3	Aug.14,2012	Aug. 13,2013
<b>3m Semi-anechoic Chamber for Radiation Emissions (Test Frequency: 1GHz ~6GHz)</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1.	EMC Analyzer	Agilent	E7405A	MY45114943	Aug. 13,2012	Aug. 12,2013
4.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Aug. 13,2012	Aug. 12,2013
5.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	399	Aug. 13,2012	Aug. 12,2013
6.	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.07,2013	Apr.06,2014
7.	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-148	Aug. 13,2012	Aug. 12,2013
8.	10m Coaxial Cable with N- plug	SCHWARZBECK	AK 9515 H	-	Aug. 13,2012	Aug. 12,2013
<b>3m Semi-anechoic Chamber for Radiation(TDK) (Test Frequency: 32.768kHz ~1GHz)</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1	Test Receiver	R&S	ESCI	101296	Aug.09,2012	Aug.08,2013
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Aug. 13,2012	Aug. 12,2013
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Aug.11,2012	Aug.10,2013
4	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Apr.07,2013	Apr.06,2014
5	Cable	HUBER+SUHNE R	CBL2	525178	Sep.15,2012	Sep.14,2013

## 5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (Bilog antenna 30M~1000MHz)
	$\pm 4.74$ dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)

## 5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.



## 6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz 56 dB $\mu$ V between 0.5MHz & 5MHz 60 dB $\mu$ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

### 6.1 E.U.T. Operation

#### Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar

#### EUT Operation:


The test was performed in normal link mode, the test data were shown in the report.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 6.2 EUT Setup


The EUT was placed on the test table in shielding room.

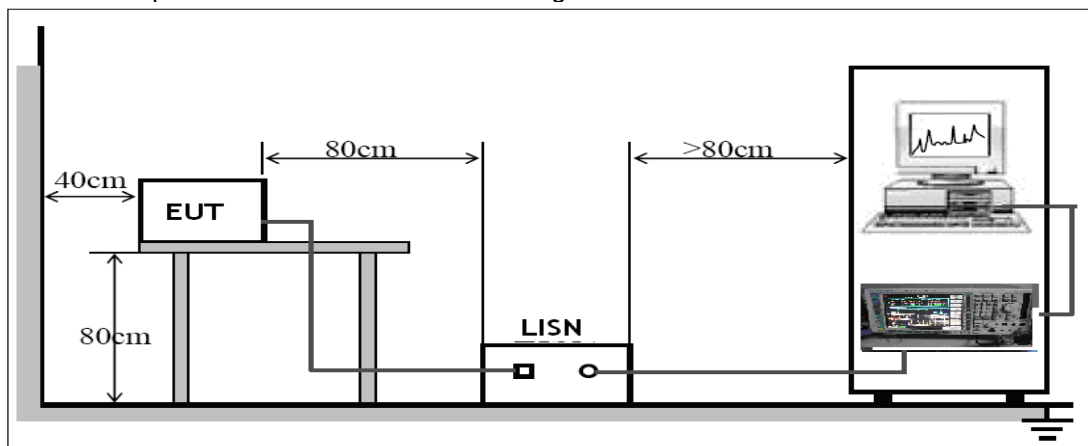

### 6.3 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

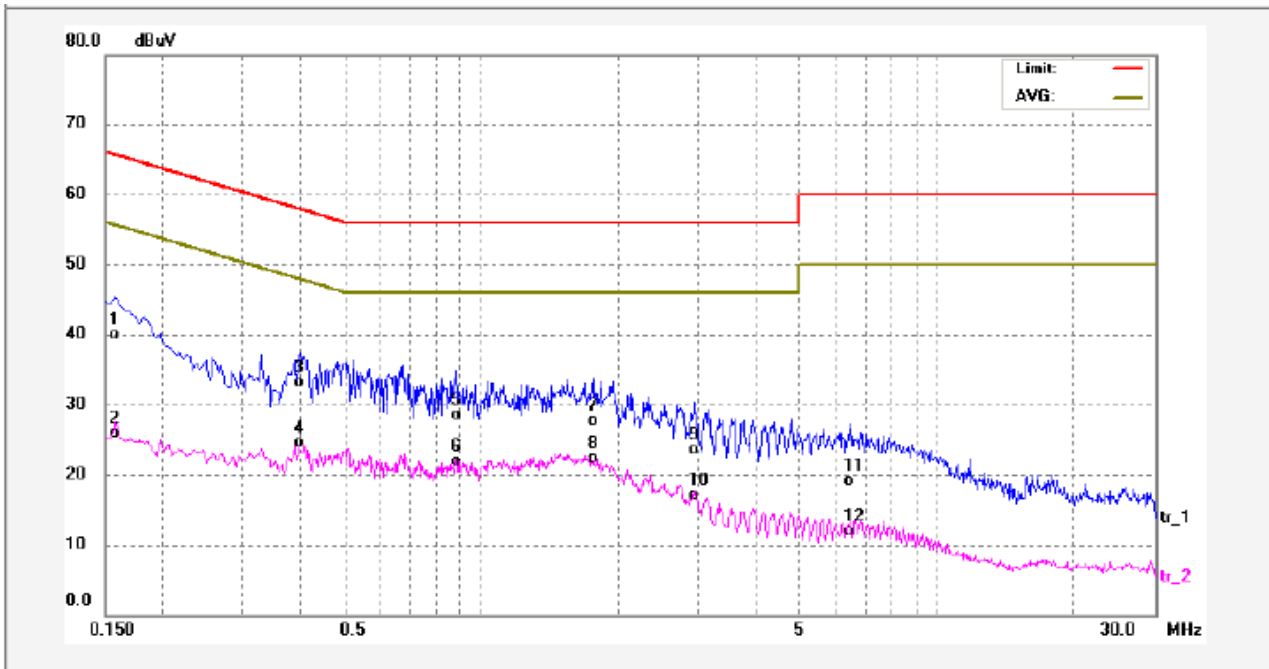

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	27.82	11.19	39.01	65.56	-26.55	QP	
2	0.1580	13.97	11.19	25.16	55.56	-30.40	AVG	
3	0.4020	21.08	11.31	32.39	57.81	-25.42	QP	
4	0.4020	12.32	11.31	23.63	47.81	-24.18	AVG	
5	0.8820	16.37	11.24	27.61	56.00	-28.39	QP	
6	0.8820	9.86	11.24	21.10	46.00	-24.90	AVG	
7	1.7540	15.80	11.19	26.99	56.00	-29.01	QP	
8	1.7540	10.26	11.19	21.45	46.00	-24.55	AVG	
9	2.9380	11.55	11.21	22.76	56.00	-33.24	QP	
10	2.9380	5.02	11.21	16.23	46.00	-29.77	AVG	
11	6.4580	7.03	11.25	18.28	60.00	-41.72	QP	
12	6.4580	-0.10	11.25	11.15	50.00	-38.85	AVG	

Neutral line:

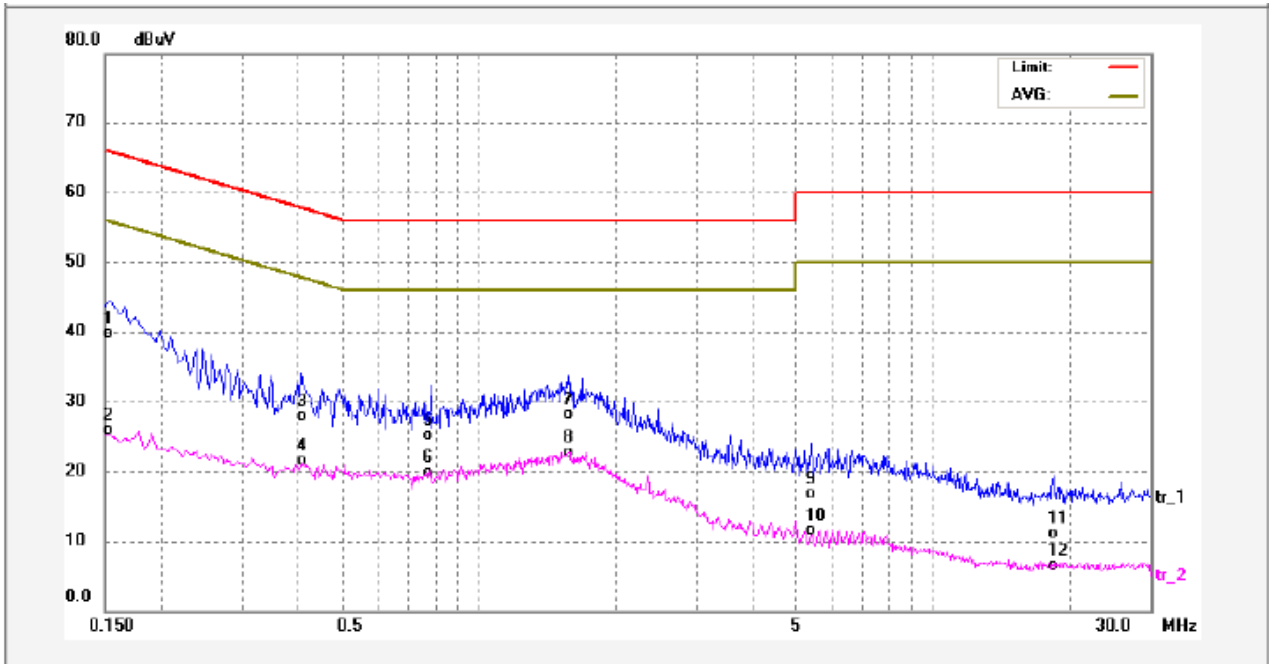

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	27.74	11.18	38.92	65.78	-26.86	QP	
2	0.1539	13.84	11.18	25.02	55.78	-30.76	AVG	
3	0.4060	15.86	11.31	27.17	57.73	-30.56	QP	
4	0.4060	9.46	11.31	20.77	47.73	-26.96	AVG	
5	0.7860	13.11	11.29	24.40	56.00	-31.60	QP	
6	0.7860	7.72	11.29	19.01	46.00	-26.99	AVG	
7	1.5700	16.17	11.19	27.36	56.00	-28.64	QP	
8	1.5700	10.69	11.19	21.88	46.00	-24.12	AVG	
9	5.3900	4.58	11.24	15.82	60.00	-44.18	QP	
10	5.3900	-0.63	11.24	10.61	50.00	-39.39	AVG	
11	18.3860	-1.16	11.48	10.32	60.00	-49.68	QP	
12	18.3860	-5.86	11.48	5.62	50.00	-44.38	AVG	

## 7 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 7.1 EUT Operation :

Operating Environment:

Temperature: 25.5 °C


Humidity: 51 % RH

Atmospheric Pressure: 1014 mbar


## 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

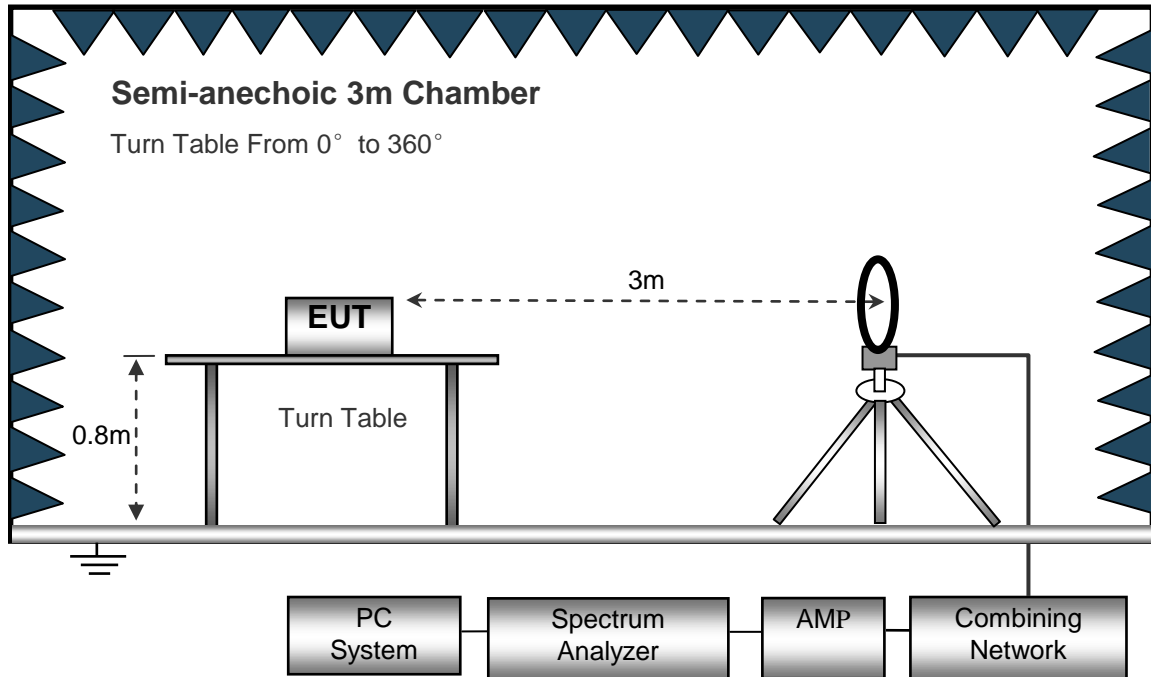

The test setup for emission measurement from 30 MHz to 1 GHz.

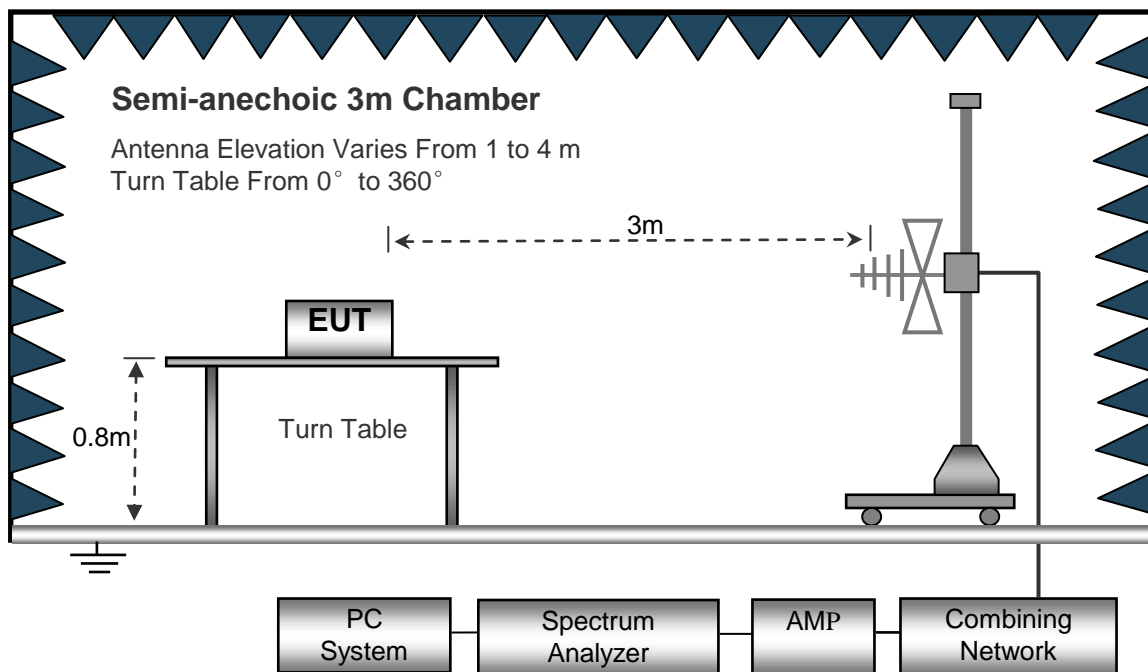

The test setup for emission measurement above 1 GHz.

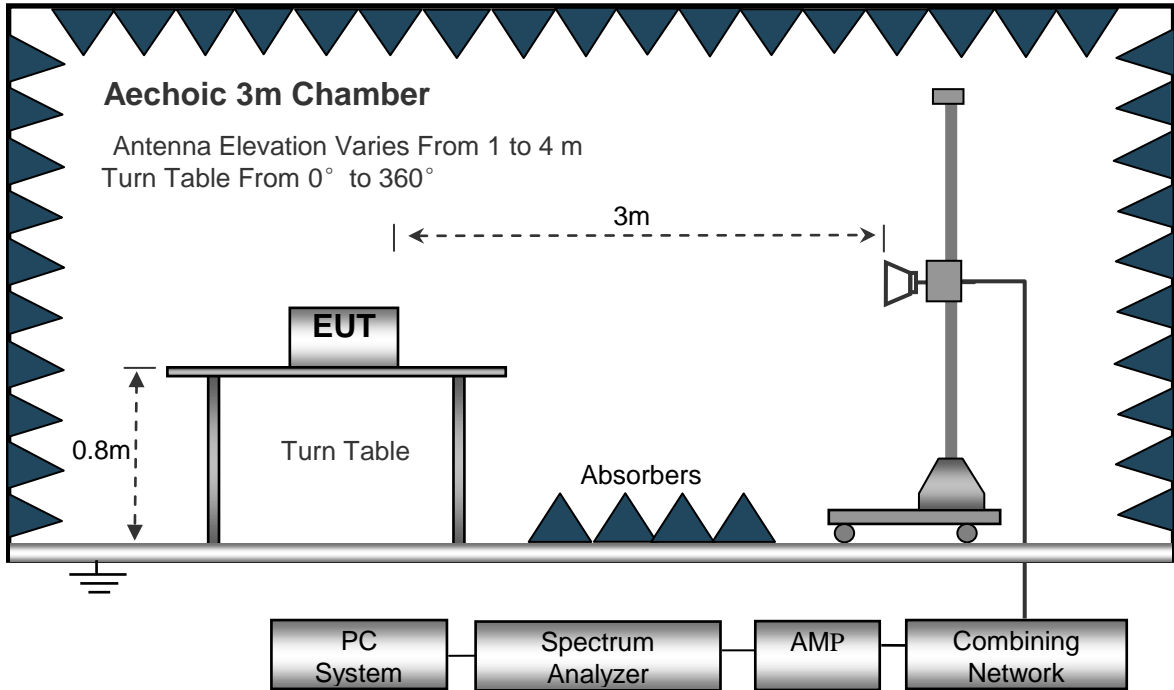

### 7.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 16MHz to 25000MHz.

Below 30MHz

- Sweep Speed.....Auto
- IF Bandwidth .....10KHz
- Video Bandwidth .....10KHz
- Resolution Bandwidth .....10KHz

30MHz ~ 1GHz

- Sweep Speed.....Auto
- IF Bandwidth .....120 KHz
- Video Bandwidth .....100KHz
- Quasi-Peak Adapter Bandwidth.....120 KHz
- Quasi-Peak Adapter Mode .....Normal
- Resolution Bandwidth .....100KHz

Above 1GHz

- Sweep Speed.....Auto
- IF Bandwidth .....120 KHz
- Video Bandwidth .....3MHz
- Quasi-Peak Adapter Bandwidth.....120 KHz
- Quasi-Peak Adapter Mode .....Normal
- Resolution Bandwidth .....1MHz

## 7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

## 7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B.

The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

### 7.6 Summary of Test Results

**Test Frequency :Below 30MHz**


No .	Freq (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0167	61.50	-11.00	50.50	123.15	72.65	QP

**Test Frequency : 30MHz ~ 1000MHz**

Remark: the EUT was pretested at the high, middle and low channel, and the worse case was the low Channel, so the data show was the low channel only.

Test mode: Normal Link(adapter)


Antenna polarization: Vertical

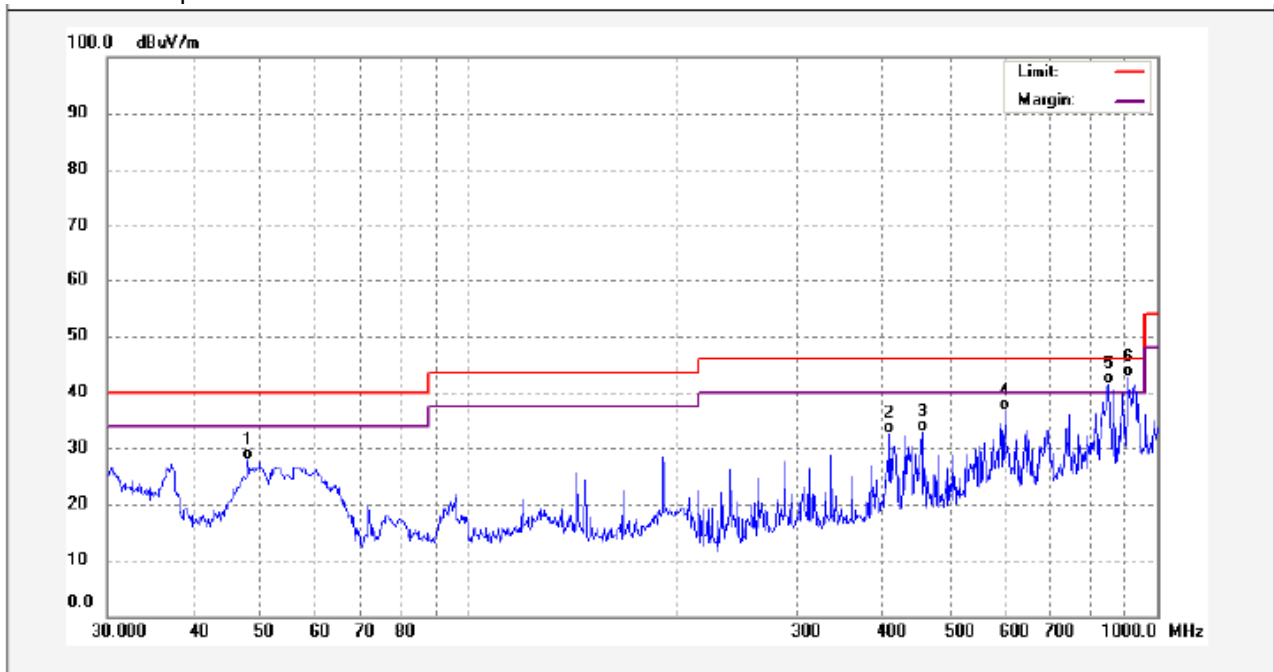

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	47.9940	50.67	-22.67	28.00	40.00	-12.00	QP	
2	408.9460	49.09	-16.52	32.57	46.00	-13.43	QP	
3	455.9058	48.25	-15.36	32.89	46.00	-13.11	QP	
4	601.4265	48.07	-11.41	36.66	46.00	-9.34	QP	
5	851.0353	48.14	-6.65	41.49	46.00	-4.51	QP	
6	906.4824	47.90	-5.38	42.52	46.00	-3.48	QP	




Antenna polarization: Horizontal

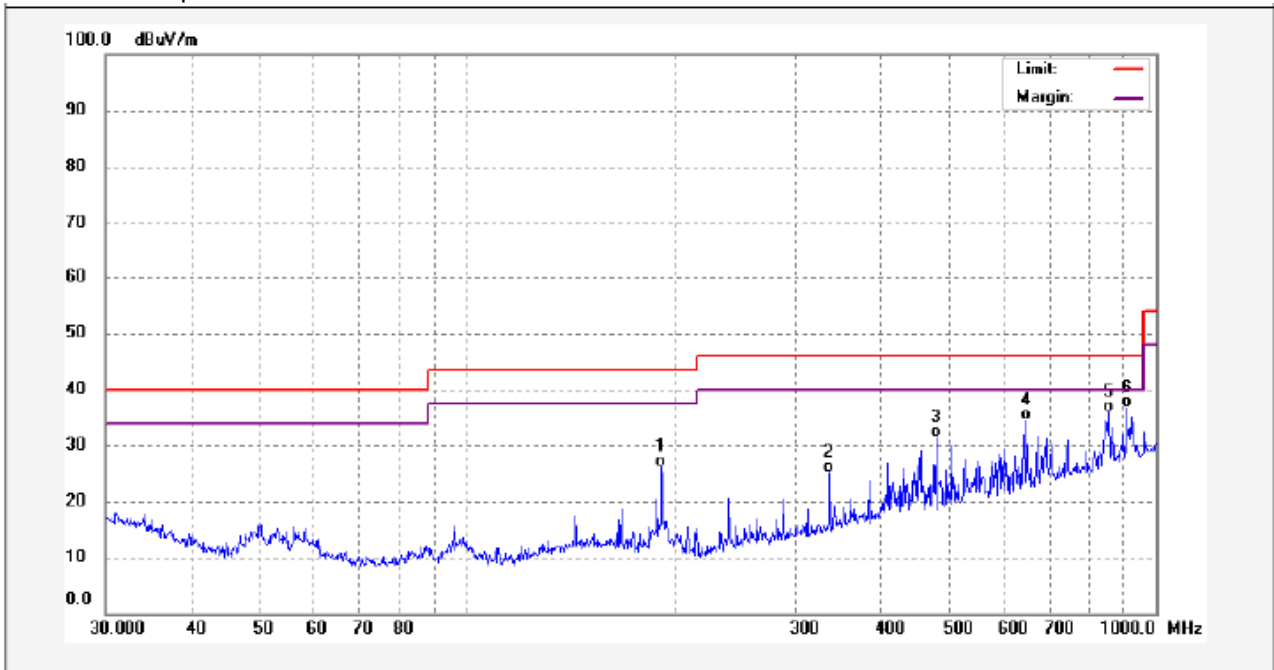

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	191.7450	49.50	-23.33	26.17	43.50	-17.33	QP	
2	336.0352	43.71	-18.54	25.17	46.00	-20.83	QP	
3	480.5276	45.98	-14.62	31.36	46.00	-14.64	QP	
4	649.6597	44.96	-10.62	34.34	46.00	-11.66	QP	
5	854.0247	42.47	-6.71	35.76	46.00	-10.24	QP	
6	906.4824	41.88	-5.34	36.54	46.00	-9.46	QP	


Test mode: Normal Link(battery)

Antenna polarization: Vertical

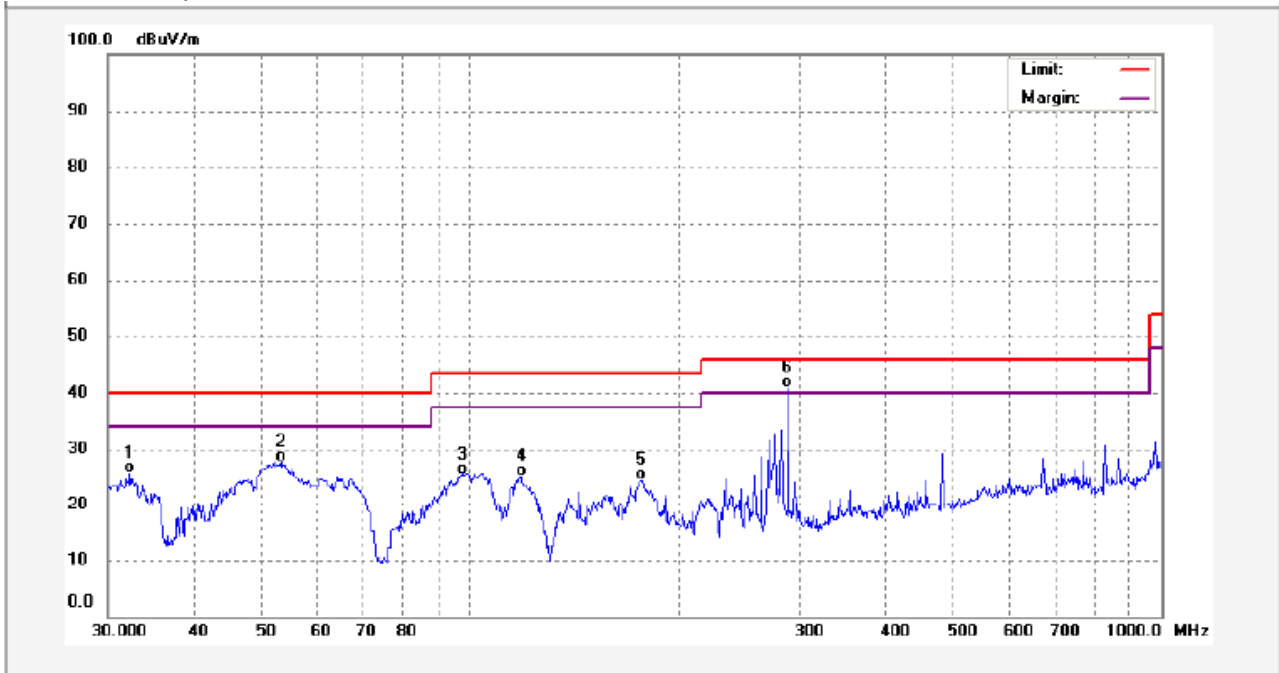

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	32.2925	45.53	-19.97	25.56	40.00	-14.44	QP	
2	53.3179	50.85	-23.16	27.69	40.00	-12.31	QP	
3	97.1148	49.97	-24.54	25.43	43.50	-18.07	QP	
4	118.6014	48.26	-23.22	25.04	43.50	-18.46	QP	
5	176.8878	46.89	-22.39	24.50	43.50	-19.00	QP	
6	287.9904	61.00	-20.13	40.87	46.00	-5.13	QP	

Antenna polarization: Horizontal

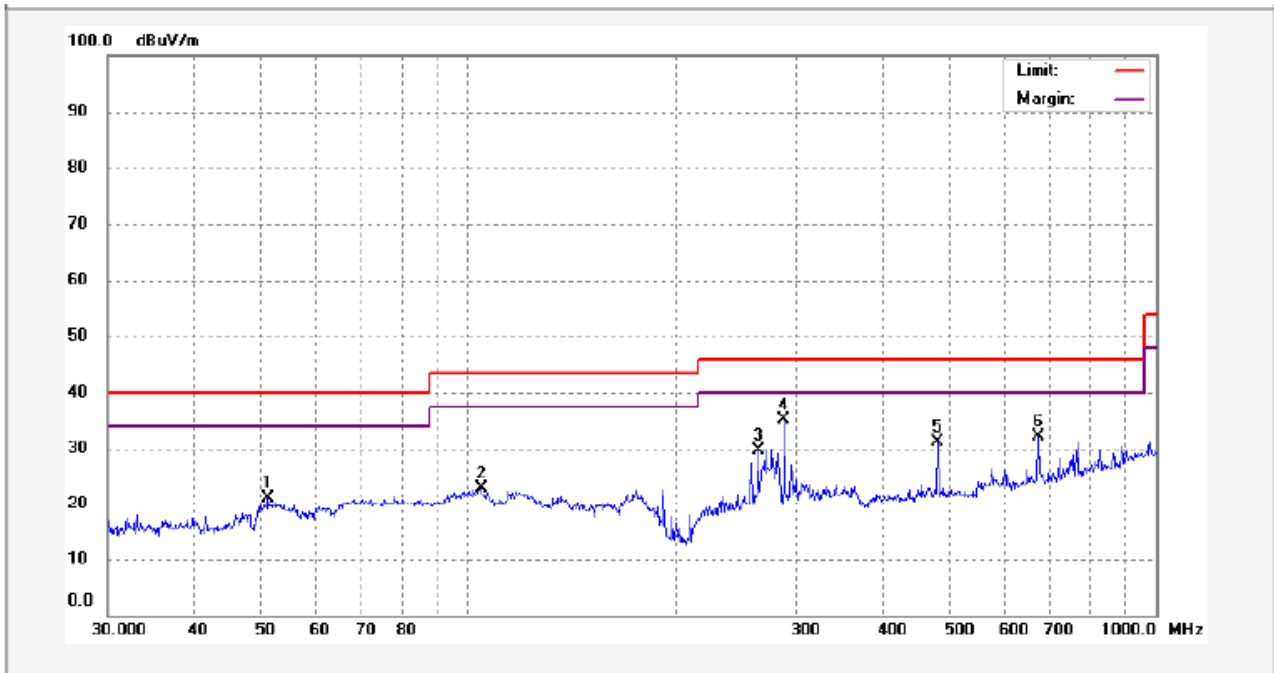


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	51.3005	42.38	-21.22	21.16	40.00	-18.84	peak	
2	104.5361	47.22	-24.27	22.95	43.50	-20.55	peak	
3	263.8190	50.69	-21.03	29.66	46.00	-16.34	peak	
4	287.9904	55.09	-20.03	35.06	46.00	-10.94	peak	
5	480.5276	45.87	-14.62	31.25	46.00	-14.75	peak	
6	672.8444	42.24	-10.21	32.03	46.00	-13.97	peak	

**Test Frequency: 1GHz ~ 18GHz**

AV = Peak +20Log<sub>10</sub>(duty cycle) =PK+(-12)=PK-12 [refer to section 8 for more detail]

Test mode: TX2402MHz(Battery Operation)


Antenna polarization: Vertical

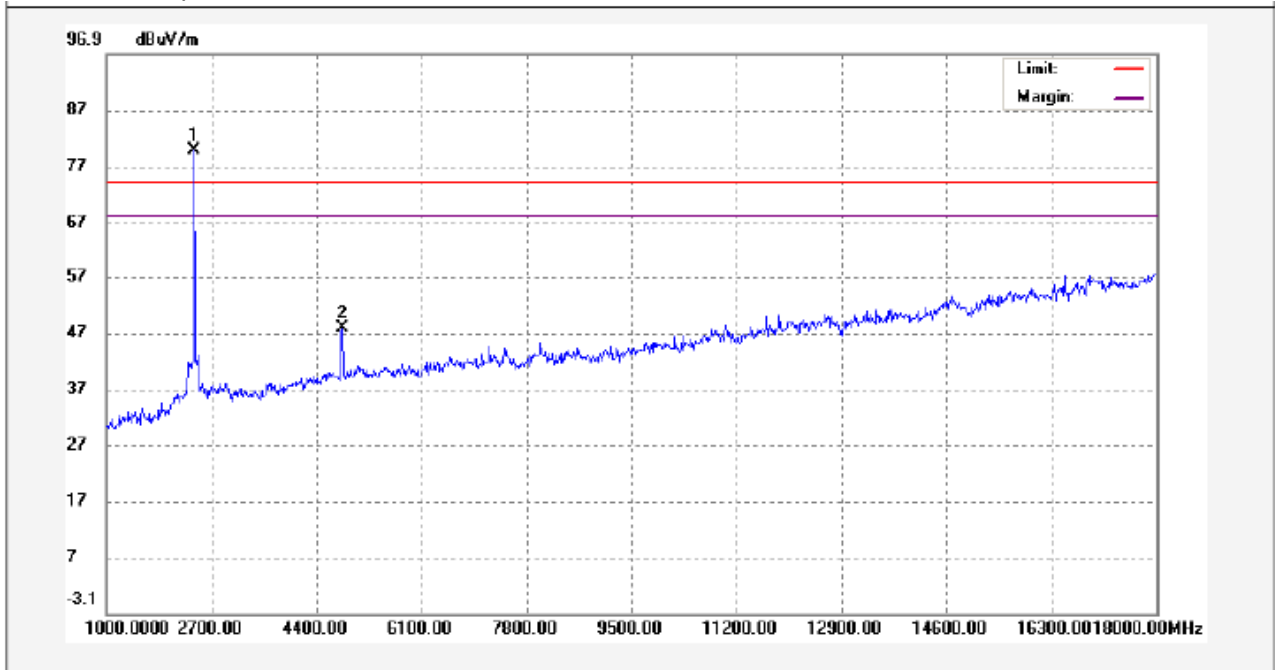

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	88.99	-9.28	79.71	74.00	5.71	peak	
2	4804.000	50.98	-3.17	47.81	74.00	-26.19	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	-12	67.71	54.00	13.71	AV	
2	4804.000	-12	35.81	54.00	-18.19	AV	

Antenna polarization: Horizontal

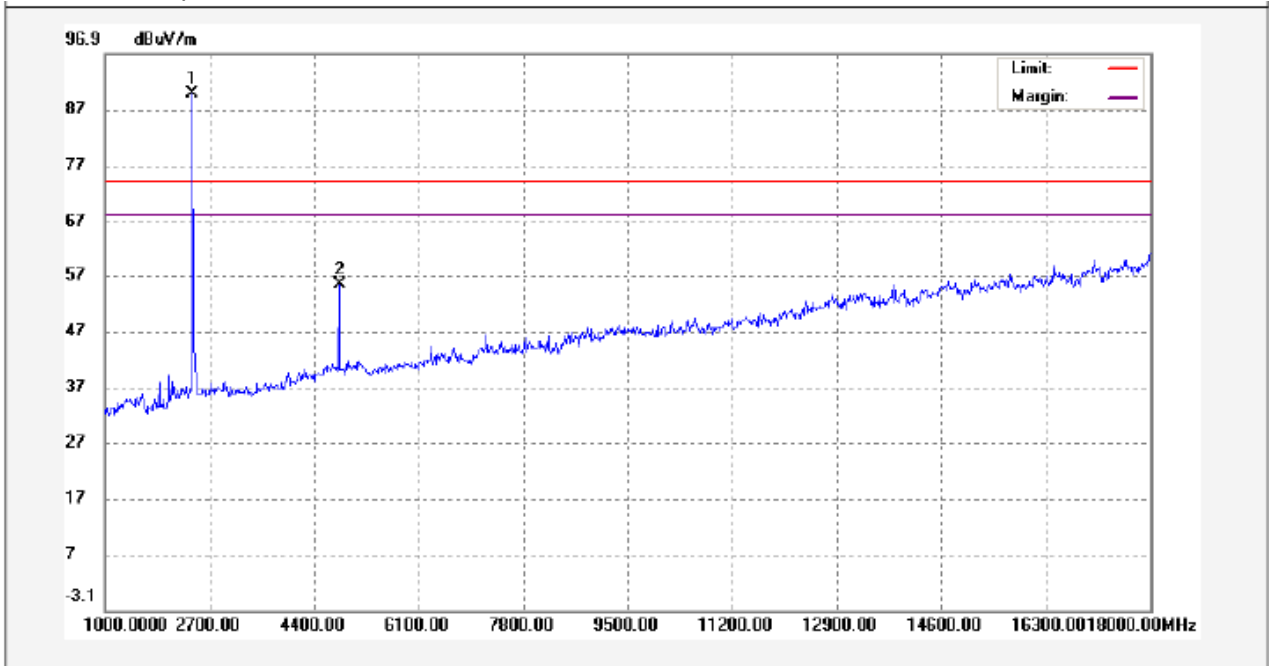


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	99.06	-9.28	89.78	74.00	15.78	peak	
2	4804.000	58.45	-3.17	55.28	74.00	-18.72	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	-12	77.78	54.00	23.78	AV	
2	4804.000	-12	43.28	54.00	-10.72	AV	

Test Frequency: 1GHz ~ 18GHz

Test mode: TX2440MHz(Battery Operation)


Antenna polarization: Vertical

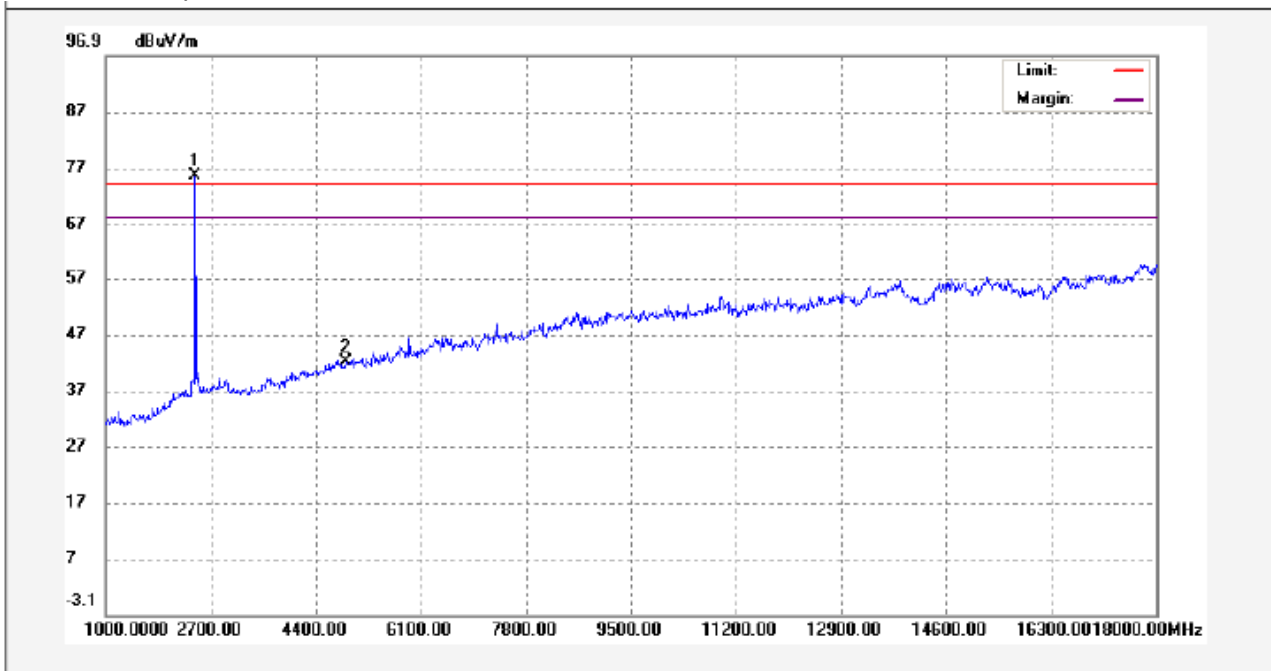

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2440.000	84.91	-9.32	75.59	74.00	1.59	peak	
2	4880.000	45.12	-3.04	42.08	74.00	-31.92	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2440.000	-12	63.59	54.00	9.59	AV	
2	4880.000	-12	30.08	54.00	-23.92	AV	

Antenna polarization: Horizontal

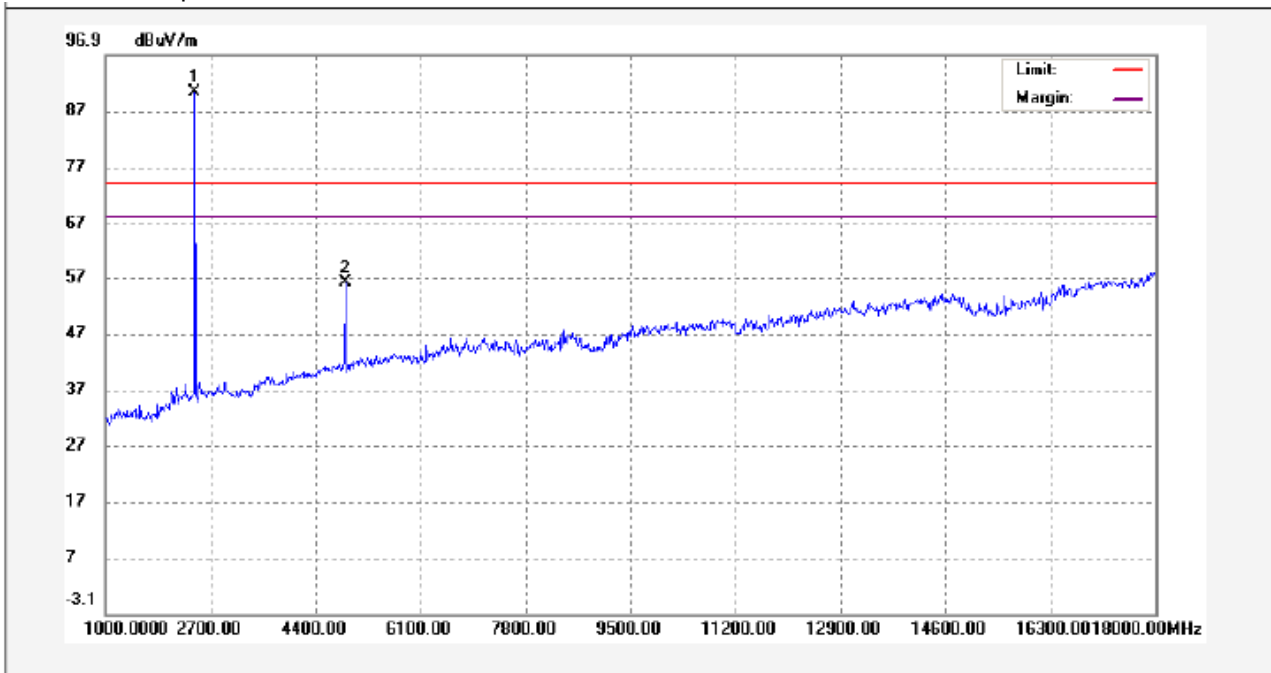


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2440.000	99.60	-9.32	90.28	74.00	16.28	peak	
2	4880.000	59.14	-3.04	56.10	74.00	-17.90	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2440.000	-12	78.28	54.00	24.28	AV	
2	4880.000	-12	44.1	54.00	-9.9	AV	

Test mode: TX2480MHz(Battery Operation)

Antenna polarization: Vertical

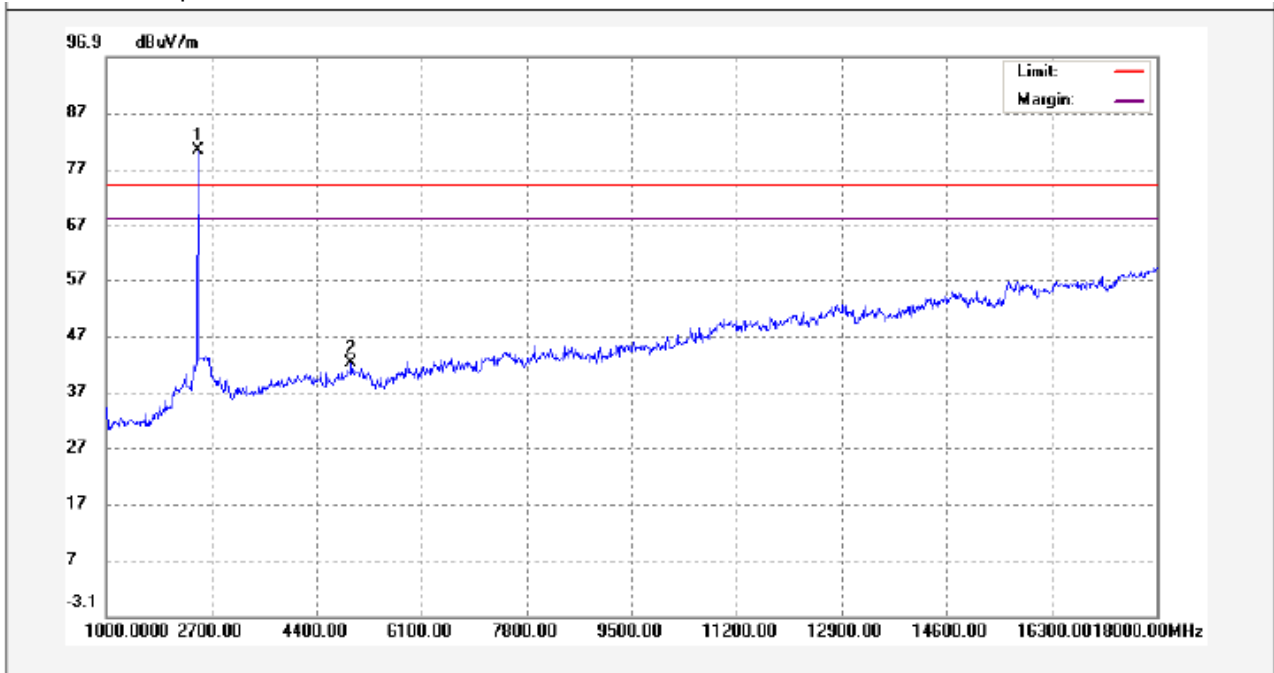


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.000	89.49	-9.22	80.27	74.00	6.27	peak	
2	4960.000	44.75	-2.81	41.94	74.00	-32.06	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.000	-12	68.27	54.00	14.27	AV	
2	4960.000	-12	29.94	54.00	-24.06	AV	



Antenna polarization: Horizontal

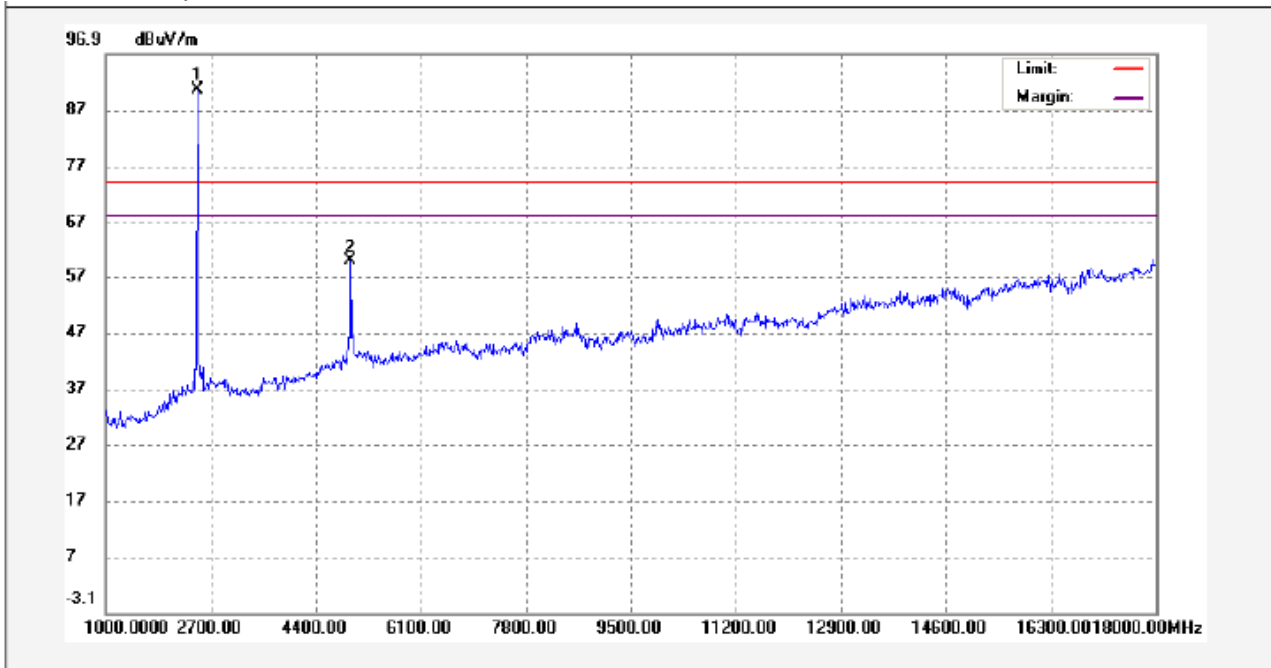

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.000	99.65	-9.22	90.43	74.00	16.43	peak	
2	4960.000	62.61	-2.81	59.80	74.00	-14.20	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.000	-12	78.43	54.00	24.43	AV	
2	4960.000	-12	47.8	54.00	-6.2	AV	

**Test Frequency :Above 18GHz**

No .	Freq (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	226530	62.29	-16.18	46.11	74.00	-27.89	peak
1	226530	45.62	-15.35	30.27	54.00	-23.73	AV


## 8 Duty Cycle


Test Requirement: FCC Part 15.35  
 Test Method: ANSI C63.4:2003  
 Test Status: TX mode.

### 8.1 Test Procedure

1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Set EUT as normal working mode
3. Set SPA center frequency = fundamental frequency, RBW = 100 kHz, VBW = 100 kHz, Span = 0 Hz, Adjacent sweep time.

### 8.2 Test Result

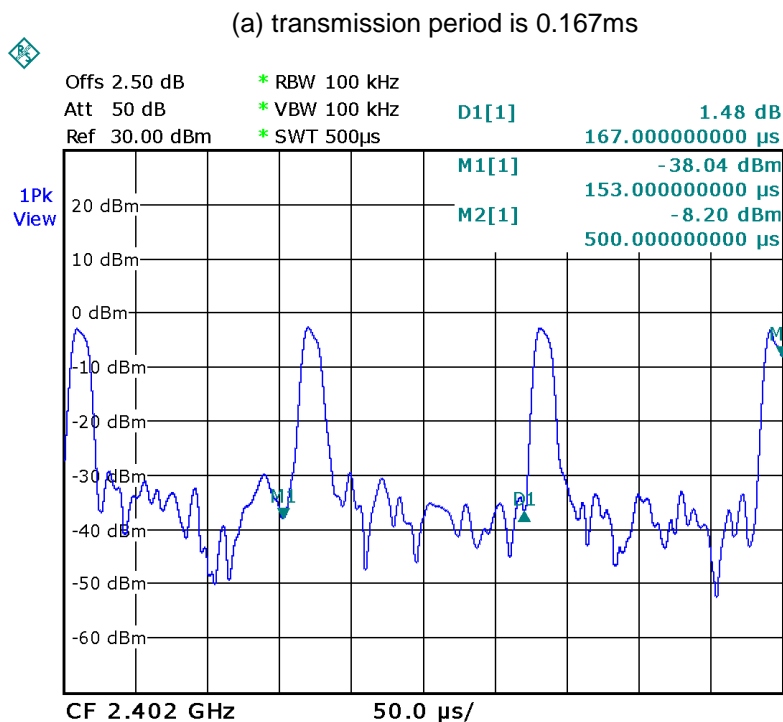

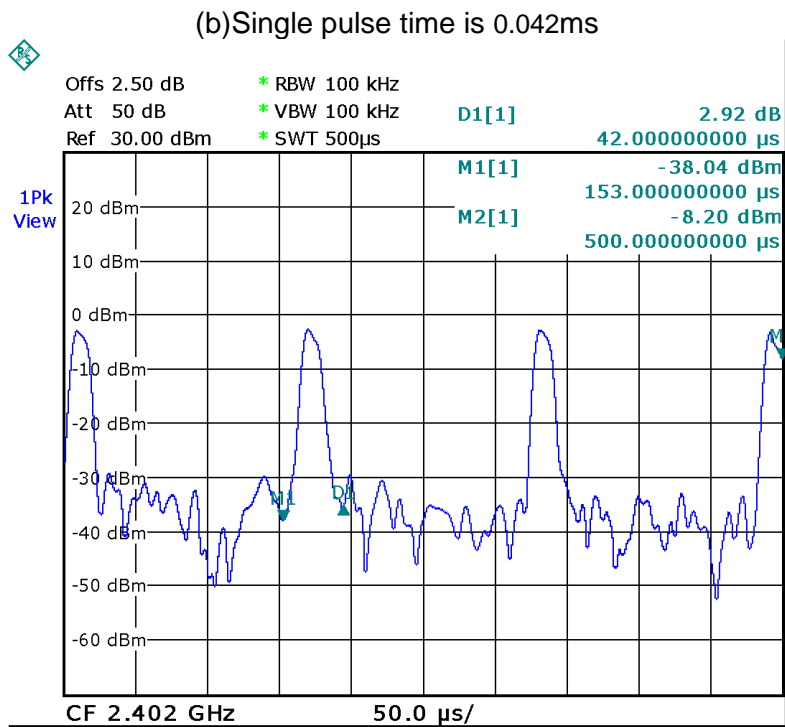

The EUT is auto. operation for transmitter, it is declared by the manufacturer as a duty cycle ratio of less than 100%.

The EUT's work time :  $T_{on} = \text{pulse time} = 0.042 \text{ ms}$

The EUT's work period :  $T = T_{ON} + T_{OFF} = \text{transmission period} = 0.167 \text{ ms}$

The EUT's duty cycle :  $D = T_{on} / T = 0.042 / 0.167 * 100\% = 25.15\%$

Duty Cycle Correction Factor(dB) =  $20 * \text{Log}_{10}(\text{Duty Cycle}) = 20 * \text{Log}_{10}(25.15\%)$


= -12dB

## 9 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	DA 00-705
Measurement Distance:	3m
Limit:	40.0 dBuV/m between 30MHz & 88MHz; 43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz; 54.0 dBuV/m above 960MHz. 74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz
Detector:	For Peak value: RBW = 1 MHz for $f \geq 1$ GHz VBW $\geq$ RBW; Sweep = auto Detector function = peak Trace = max hold For AVG value: RBW = 1 MHz for $f \geq 1$ GHz VBW = 10Hz; Sweep = auto Detector function d= AVG Trace = max hold
Test mode:	Continuous transmitting

### 9.1 Test Result:


Lower Channel – Peak, Vertical

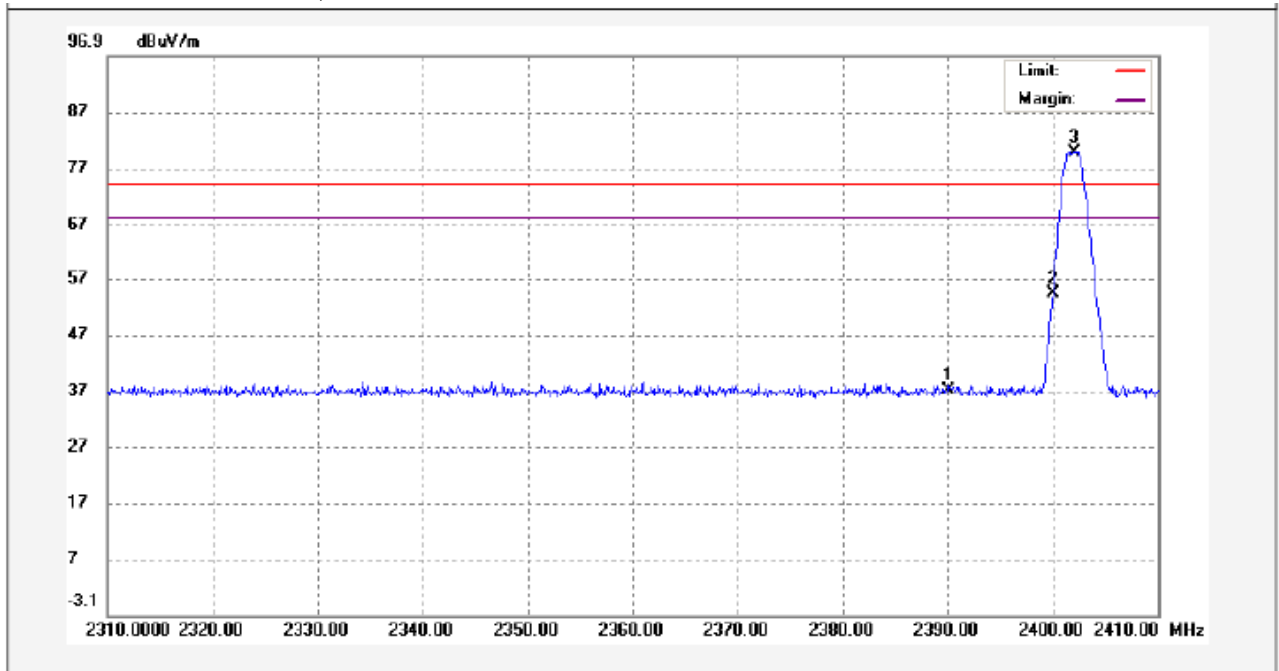

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	46.28	-9.27	37.01	74.00	-36.99	peak	
2	2400.000	63.51	-9.28	54.23	74.00	-19.77	peak	
3	2402.000	89.15	-9.28	79.87	74.00	5.87	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	-12	25.01	54.00	-28.99	AV	
2	2400.000	-12	42.23	54.00	-11.77	AV	
3	2402.000	-12	67.87	54.00	13.87	AV	


Lower Channel – Peak, Horizontal

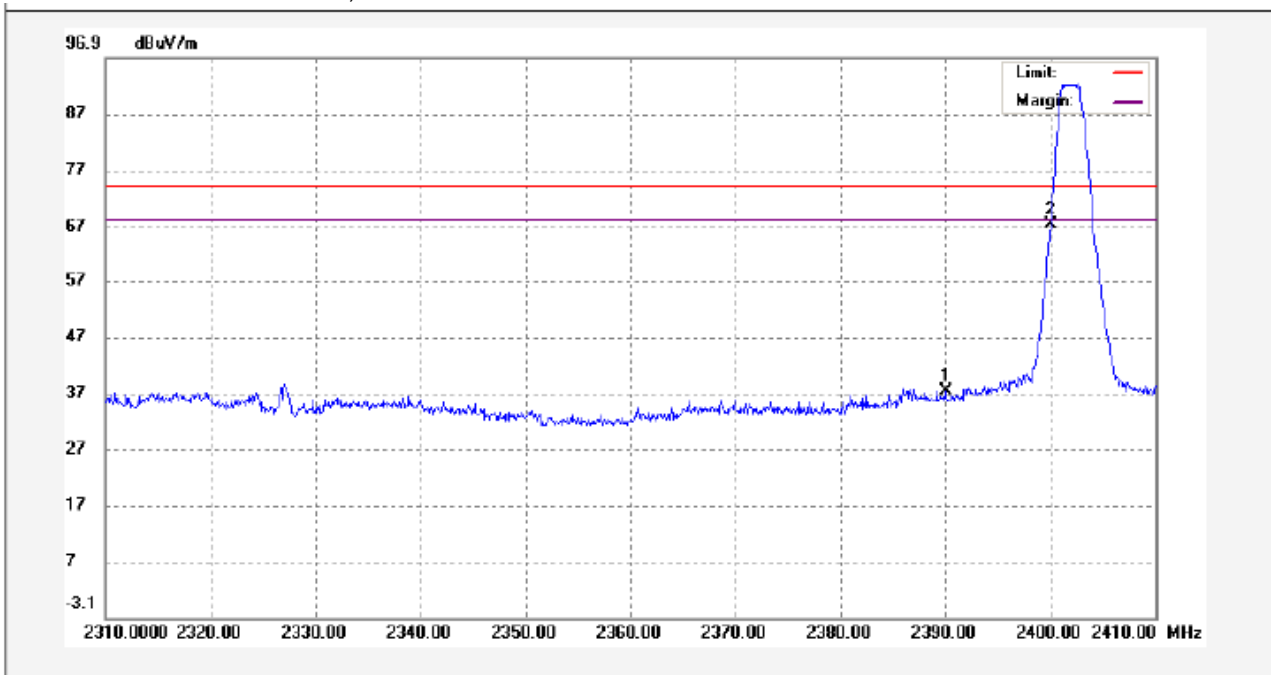

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	46.56	-9.27	37.29	74.00	-36.71	peak	
2	2400.000	76.47	-9.28	67.19	74.00	-6.81	peak	
3	2402.700	101.60	-9.28	92.32	74.00	18.32	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	-12	25.29	54.00	-28.71	AV	
2	2400.000	-12	55.19	54.00	1.19	AV	
3	2402.000	-12	80.32	54.00	26.32	AV	


Upper Channel – Peak, Vertical

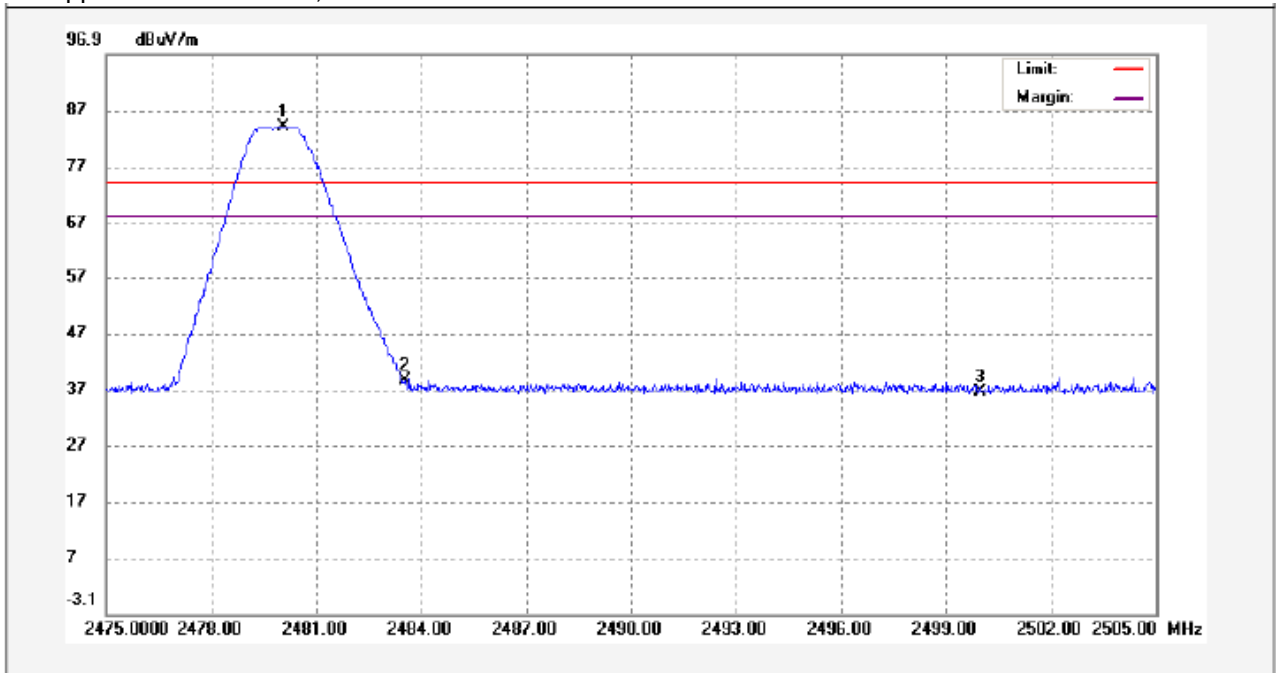

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.040	93.18	-9.22	83.96	74.00	9.96	peak	
2	2483.500	47.65	-9.20	38.45	74.00	-35.55	peak	
3	2500.000	45.74	-9.15	36.59	74.00	-37.41	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.040	-12	71.96	54.00	17.96	AV	
2	2483.500	-12	26.45	54.00	-27.55	AV	
3	2500.000	-12	24.59	54.00	-29.41	AV	

Upper Channel – Peak, Horizontal

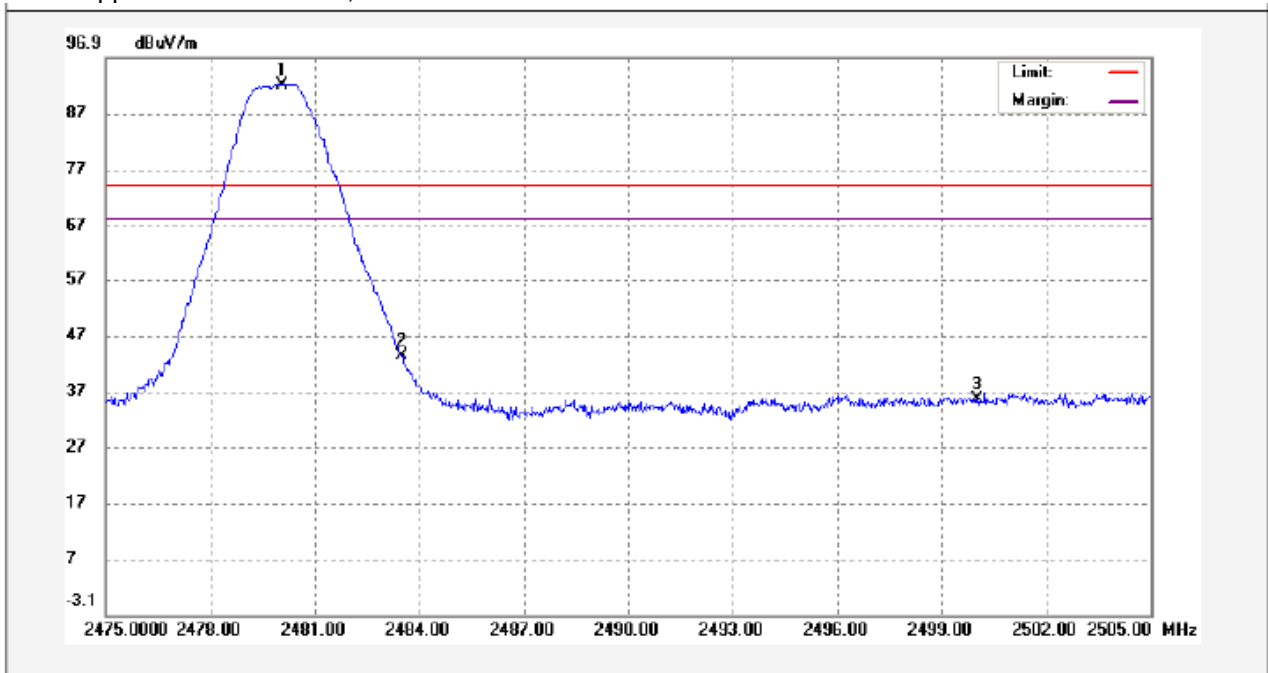

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.040	101.33	-9.22	92.11	74.00	18.11	peak	
2	2483.500	52.49	-9.20	43.29	74.00	-30.71	peak	
3	2500.000	44.75	-9.15	35.60	74.00	-38.40	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.040	-12	80.11	54.00	26.11	AV	
2	2483.500	-12	31.29	54.00	-22.71	AV	
3	2500.000	-12	23.6	54.00	-30.4	AV	



## 10 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247  
 Test Method: DA 00-705  
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.


### 10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 100kHz


### 10.2 Test Result:

Test Channel	Bandwidth
Low	2.355MHz
Middle	2.295MHz
High	2.295MHz


Test result plot as follows:

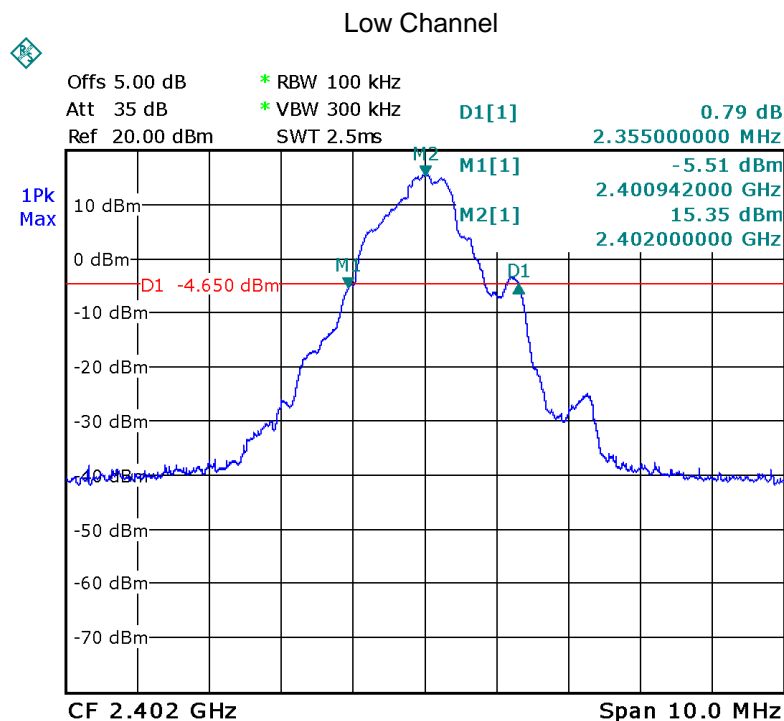

Date: 24.APR.2013 20:29:16

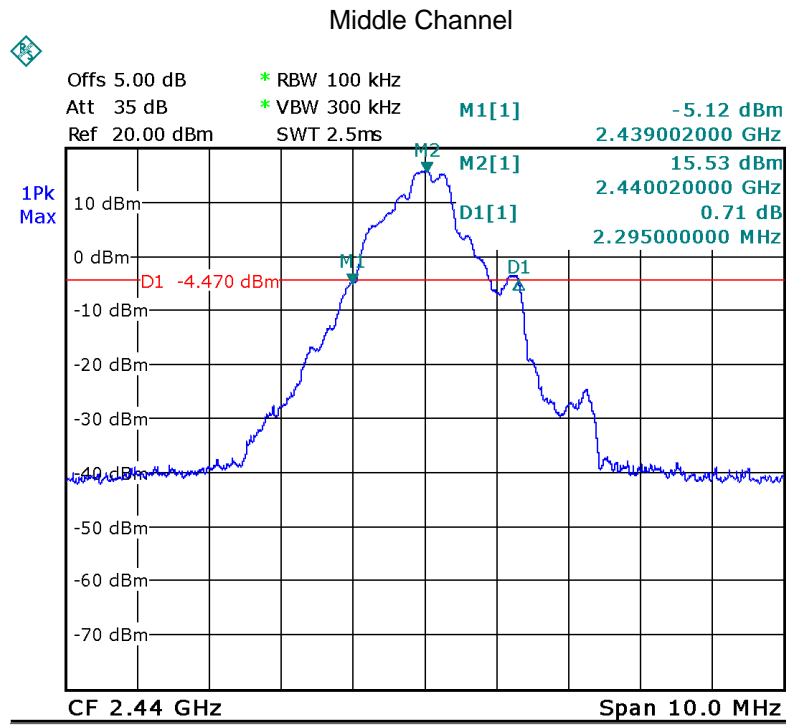

Date: 24.APR.2013 20:31:13

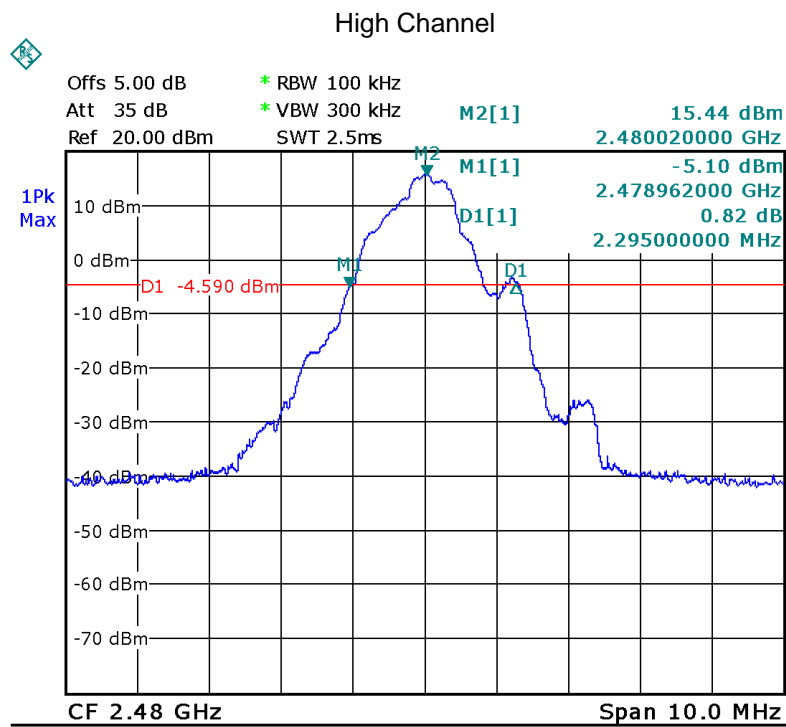

Date: 24.APR.2013 20:27:21

## 11 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.


### 11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 10 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


### 11.2 Test Result:

Test Channel	Output Power (dBm)	Limit (dBm)
Low	14.64	20.97
Middle	15.02	20.97
High	16.07	20.97


### Low Channel

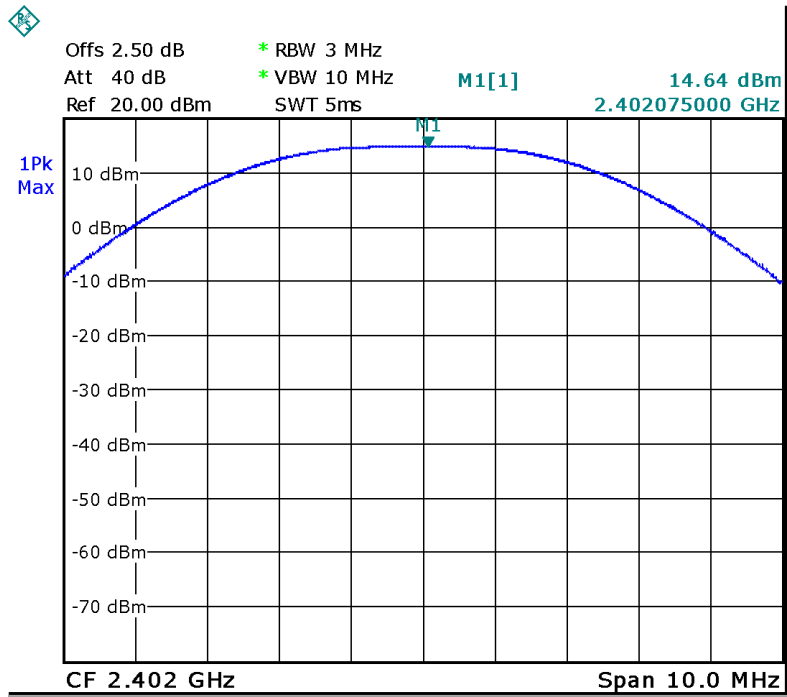

### Middle Channel

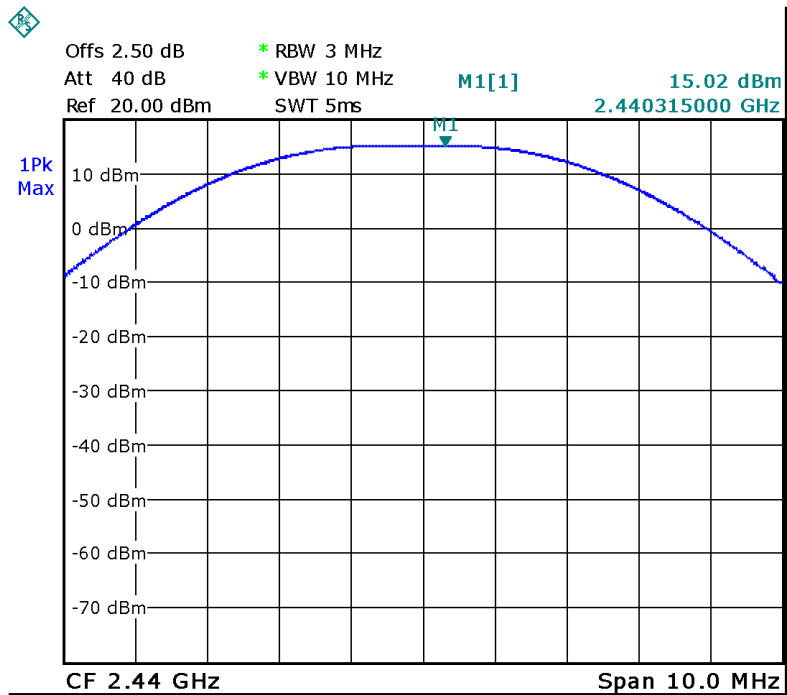

High Channel

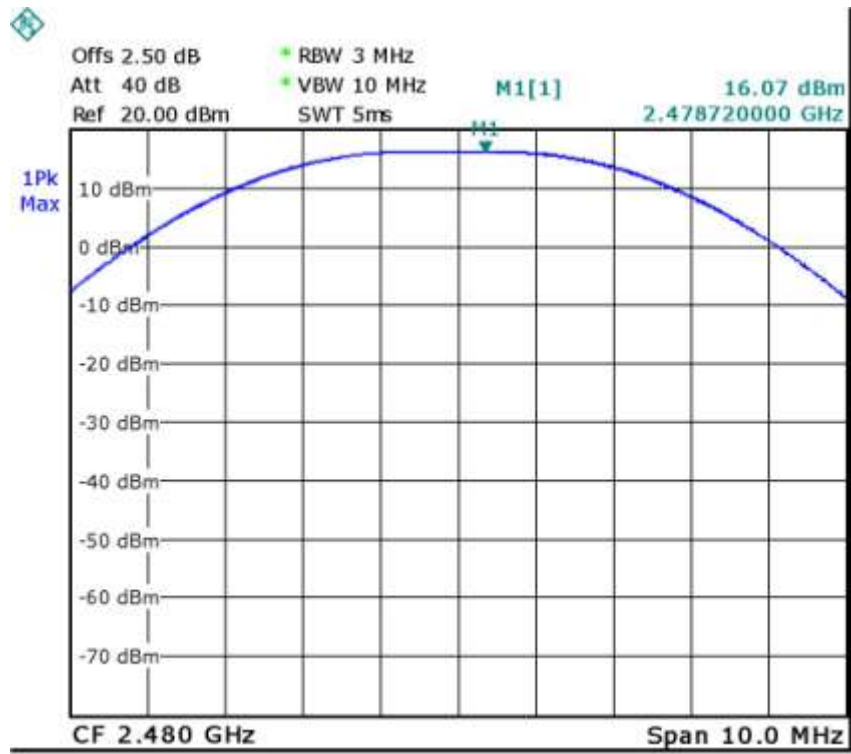

## 12 Hopping Channel Separation

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.

Test Mode: Test in hopping transmitting operating mode.

### 12.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 4MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 12.2 Test Result:

Test Channel	Separation (MHz)	Result
Low	2.022	PASS
Middle	2.004	PASS
High	2.020	PASS


Test result plot as follows:

Low Channel

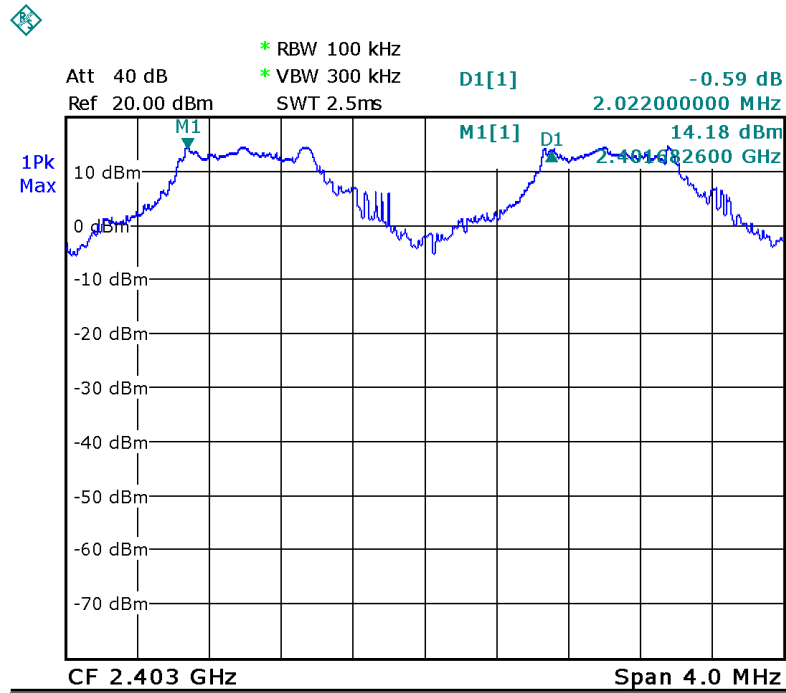


Date: 25.APR.2013 23:04:03

Middle Channel

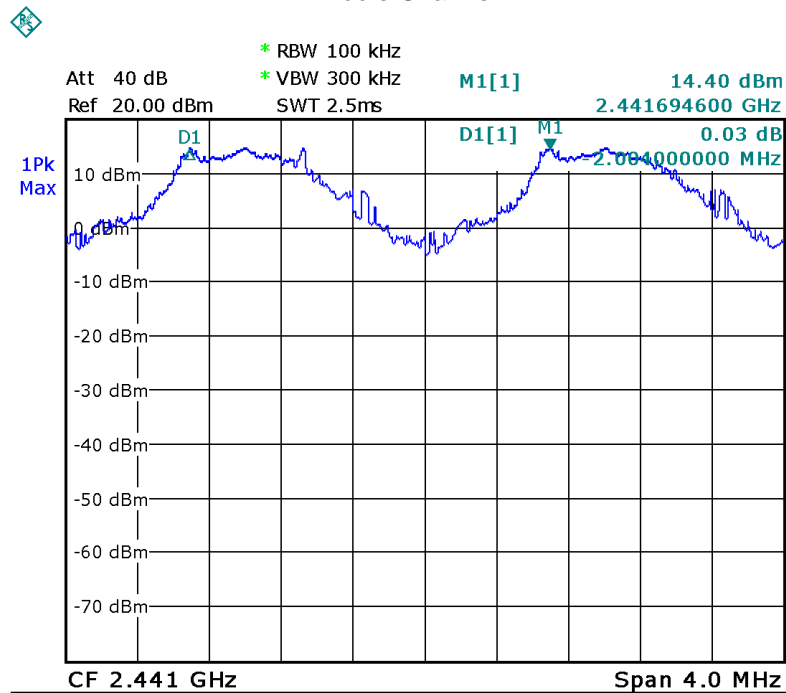

Date: 25.APR.2013 23:25:03

### High Channel

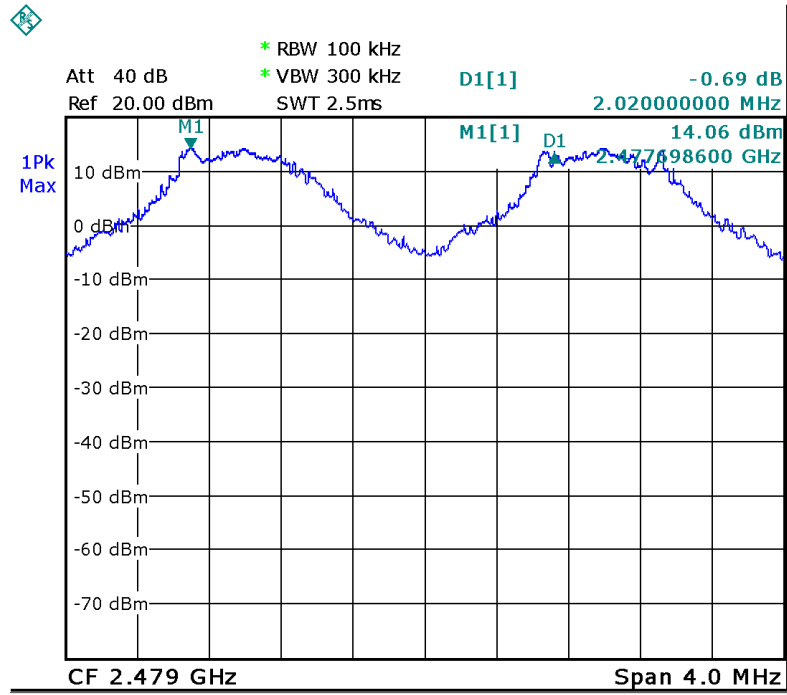

Date: 25.APR.2013 23:33:13



### 13 Number of Hopping Frequency


Test Requirement: FCC CFR47 Part 15 Section 15.247  
 Test Method: DA 00-705  
 Test Limit: Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.  
 Test Mode: Test in hopping transmitting operating mode.

#### 13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

#### 13.2 Test Result:

Total Channels are 40 Channels.

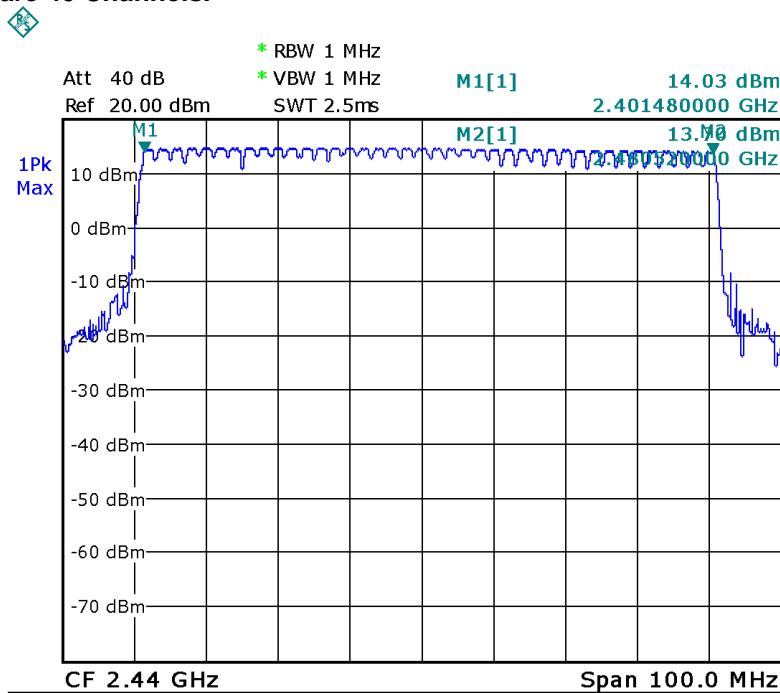

Date: 25.APR.2013 22:10:50

## 14 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

### 14.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centered on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 1MHz.Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

### 14.2 Test Result:

The test period:  $T = 0.4(s) * 40 = 16 (s)$

So, the Dwell Time can be calculated as follows:

Low channel: slot time= $12(\text{times})/1(s) * 0.210(\text{ms}) * 16(s) = 0.040(s)$



Middle channel: slot time= $15(\text{times})/1(s) * 0.209(\text{ms}) * 16(s) = 0.050(s)$

High channel: slot time= $15(\text{times})/1(s) * 0.212(\text{ms}) * 16(s) = 0.051(s)$



Note : Mkr Delta is once pulse time.

Frequency	Mkr Delta(ms)	Dwell Time(s)	Limits(s)	Result
2402 MHz	0.210	0.040	0.400	Pass
2440 MHz	0.209	0.050	0.400	Pass
2480 MHz	0.212	0.051	0.400	Pass



### Low Channel

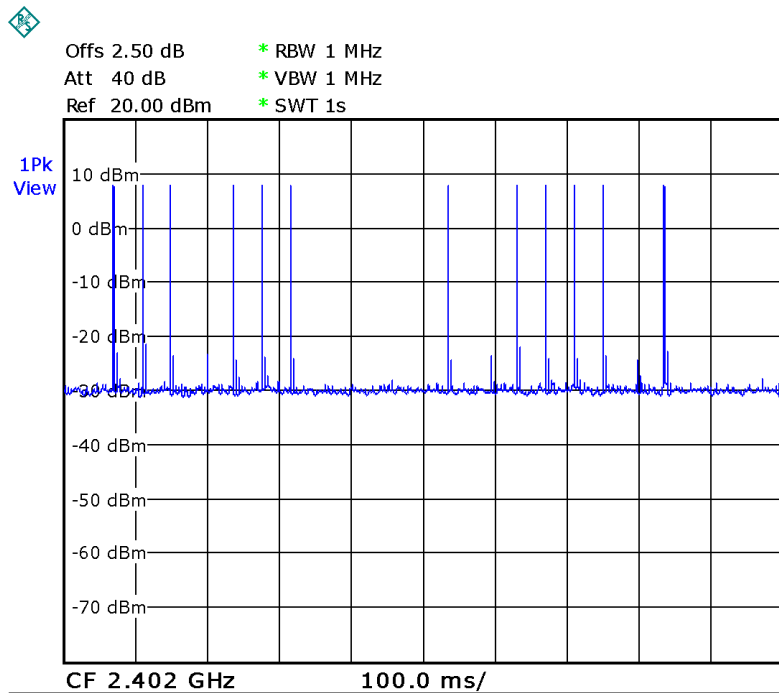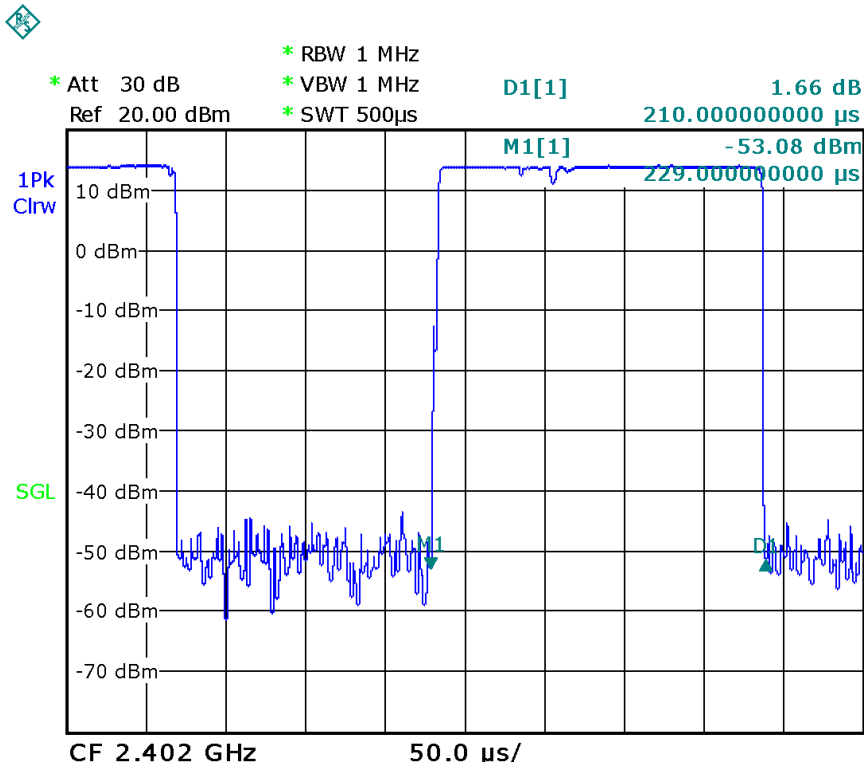

### Middle Channel

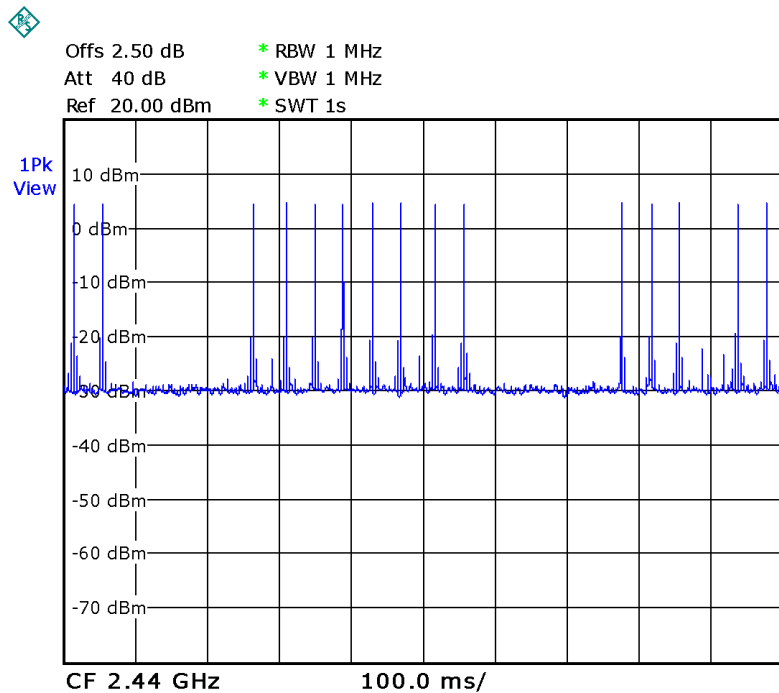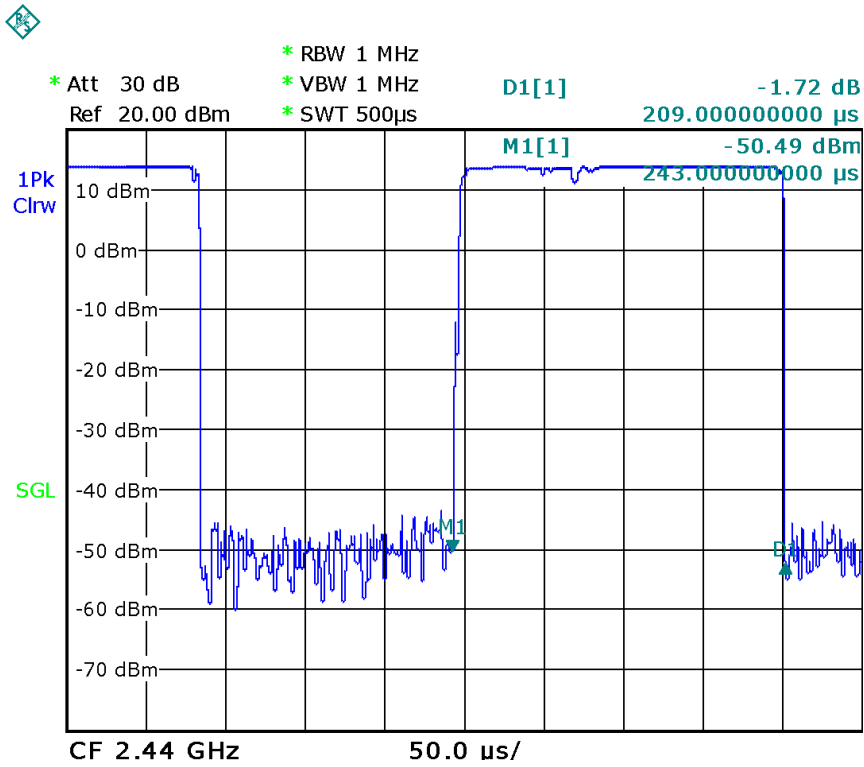

### High Channel

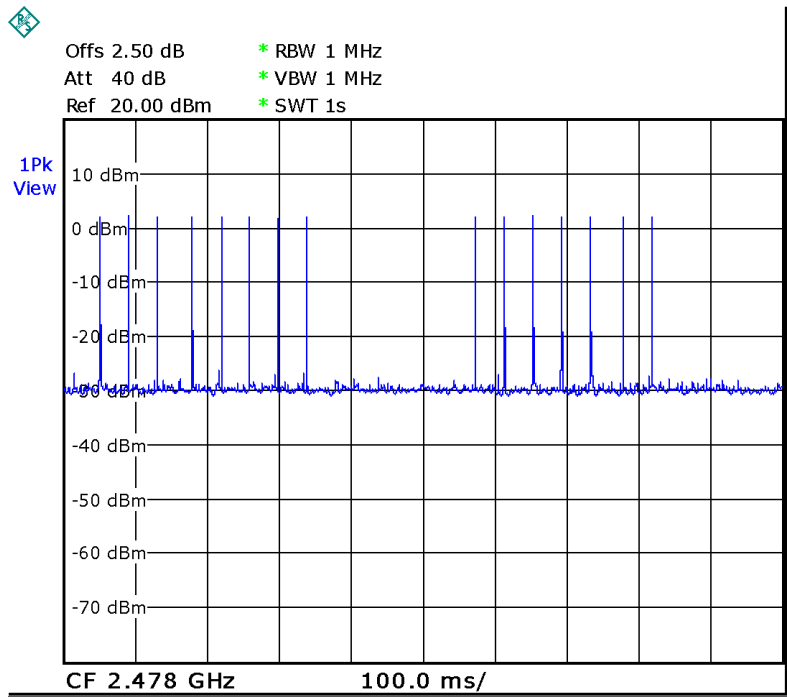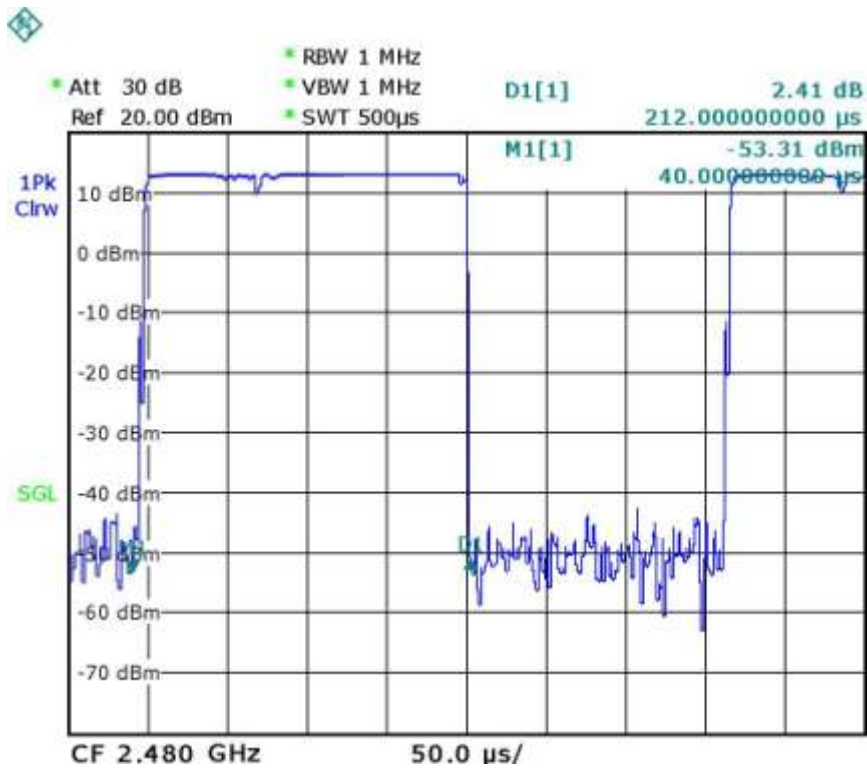

## **15 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a permanent antenna, fulfill the requirement of this section.

## 16 RF Exposure

Test Requirement: FCC Part 1.1307

Test Mode: The EUT work in test mode(Tx).

### 16.1 Requirments:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

### 16.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 16.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance,  $d=0.2\text{m}$ , as well as the gain of the used antenna, the RF power density can be obtained



Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm <sup>2</sup> )	Limit of Power Density (mW/cm <sup>2</sup> )
1.585	16.07	40.46	0.013	1



## 17 Photographs – Test Setup

### 17.1 Photograph – Radiation Spurious Emission Test Setup

Below 30MHz

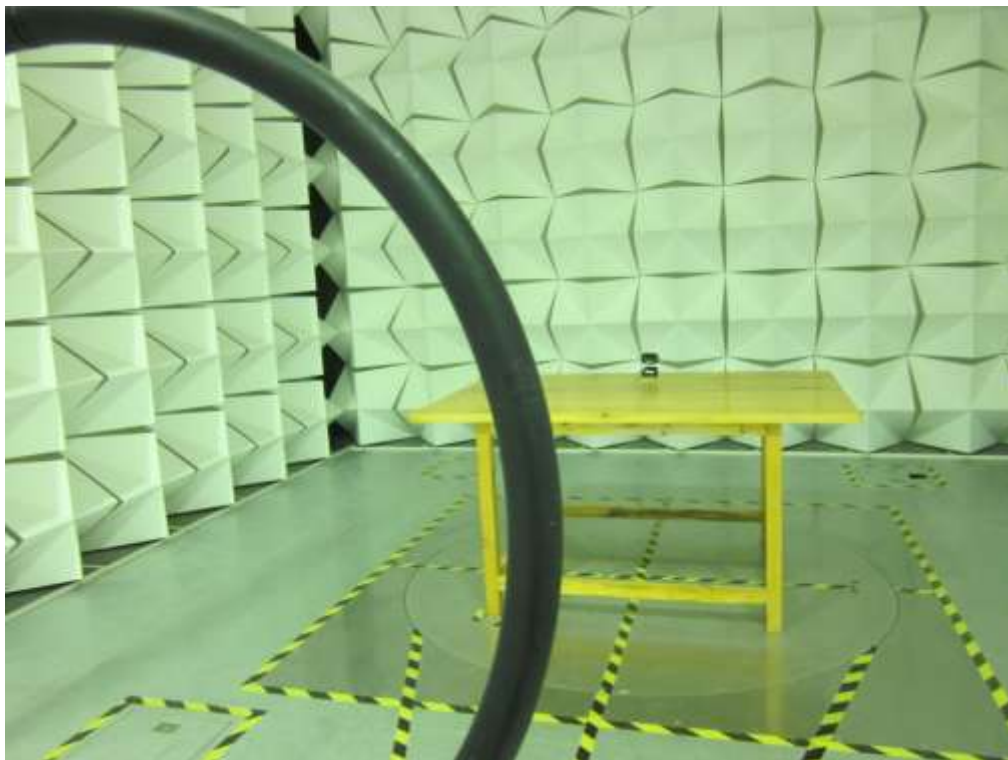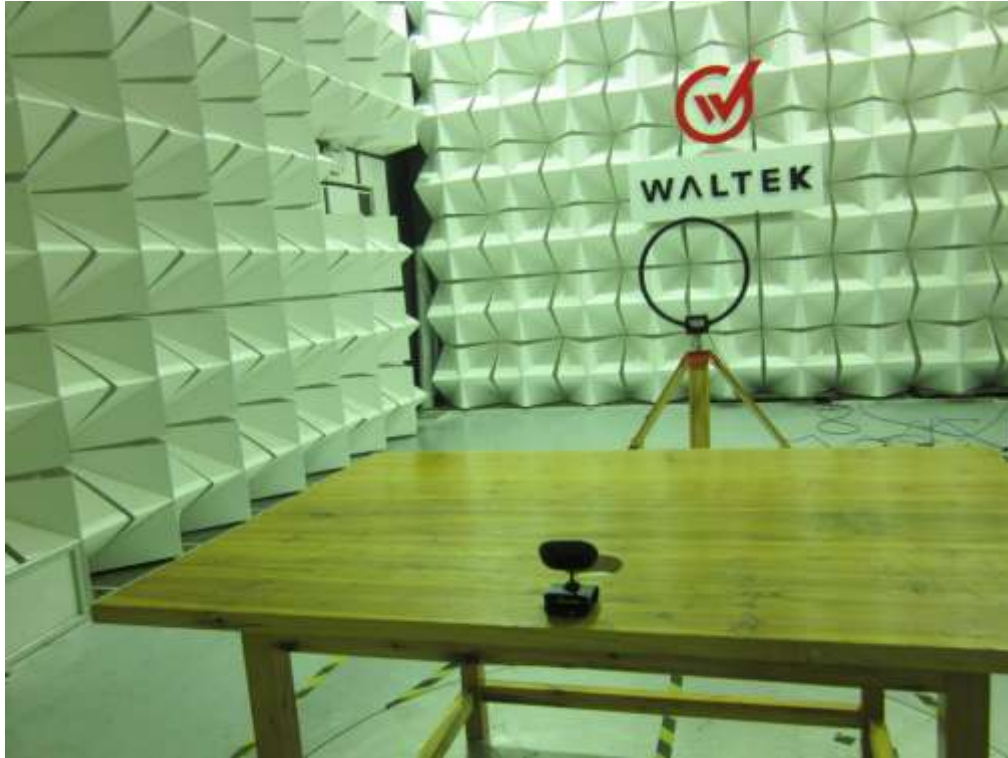

30MHz-1GHz



Above 1GHz



**17.2 Photograph – Conducted Emission Test Setup**



## 18 Photographs - Constructional Details

### 18.1 External View









### 18.2 EUT - Internal View







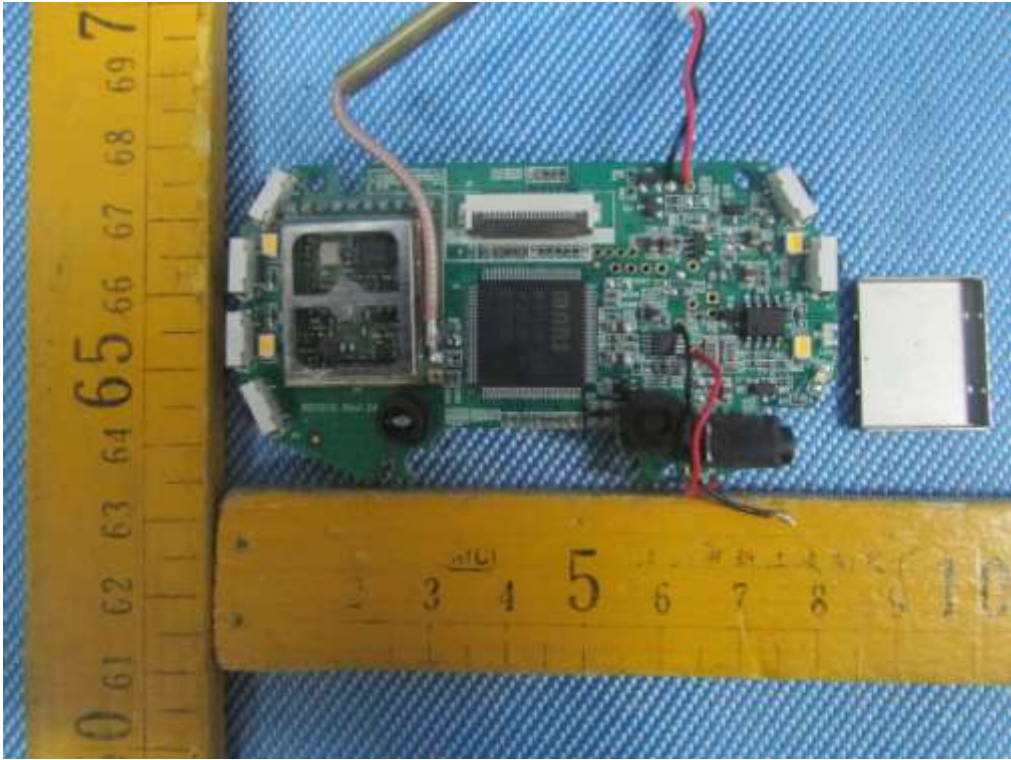

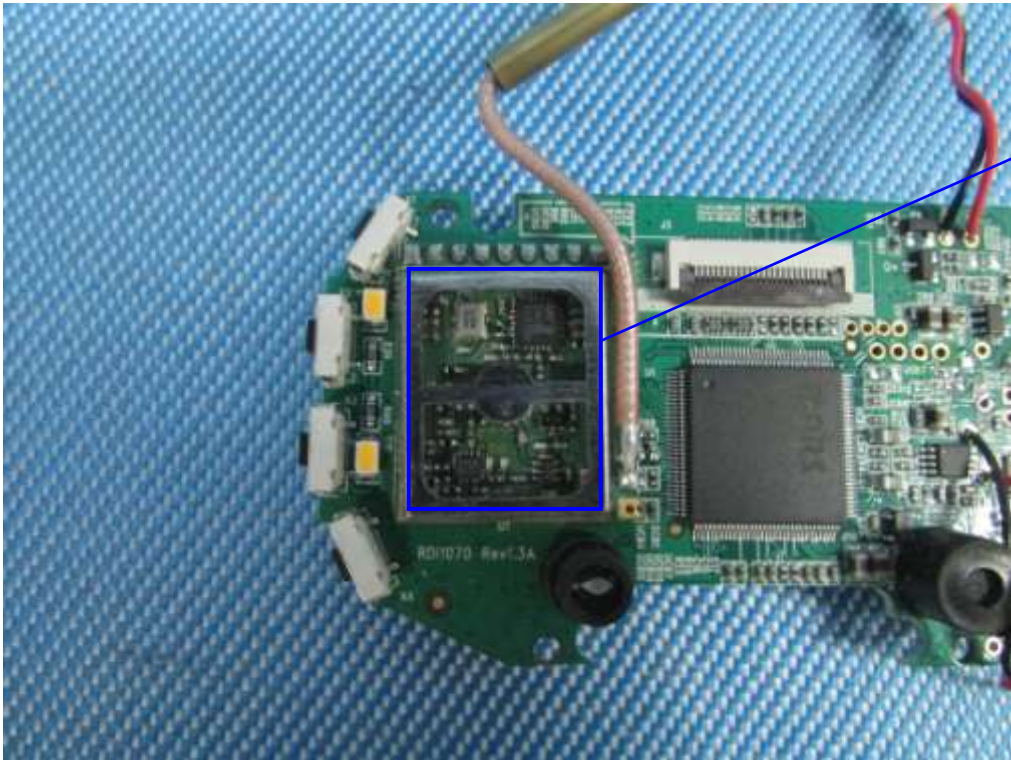

RF module

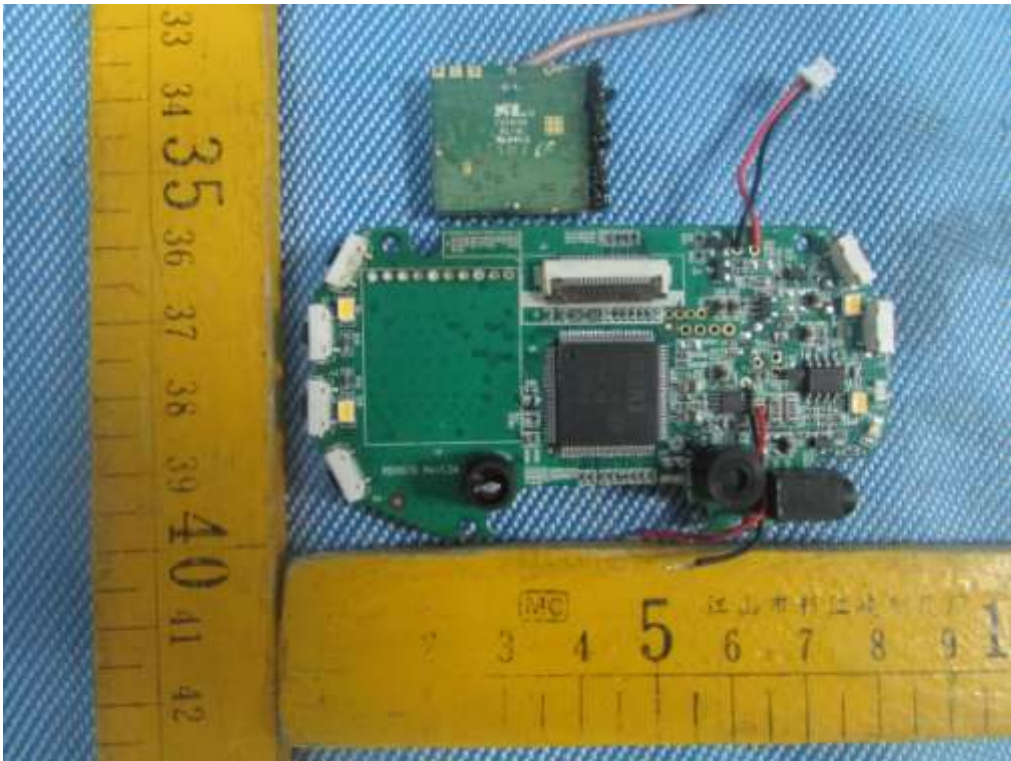

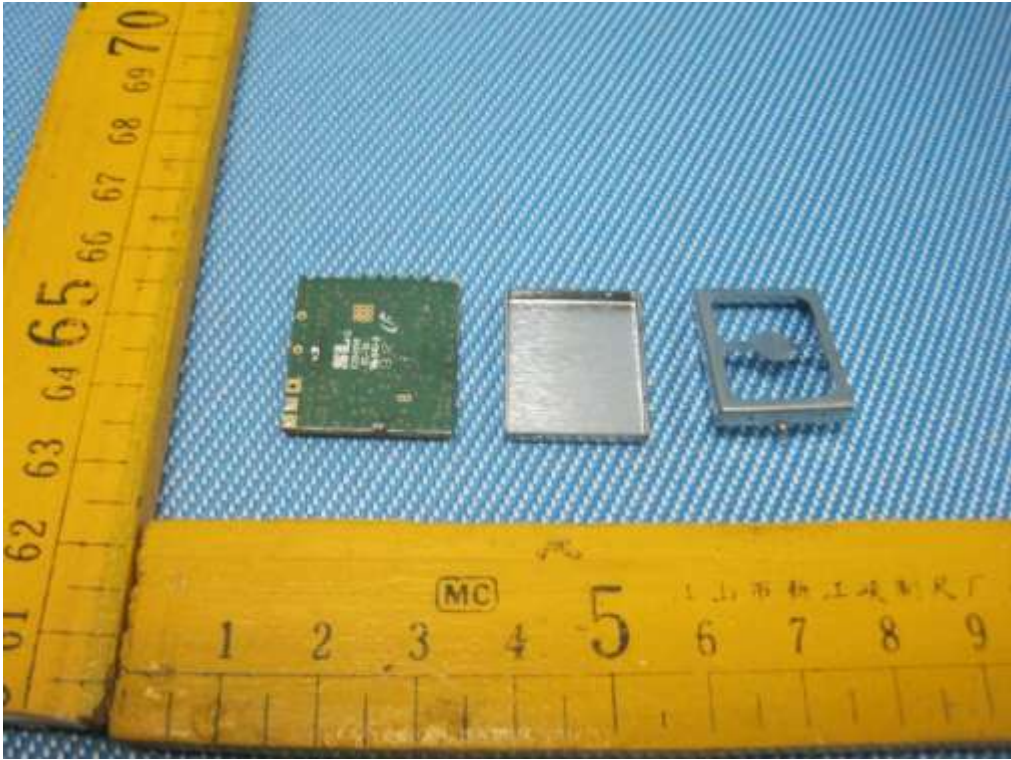

**18.3 Adapter - External View**





## **19 FCC Label**

FCC Label Sample for model: UDRC13

FCC ID: SJ8-UBRC13

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

## FCC Label Location for model: UDRC13

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.



=End of report=