

FCC TEST REPORT

FCC ID : SJ8CA190

Applicant : **RDI Technology (Shenzhen) Co., Ltd.**
Building C1 Xingtang Industrial Park, East Baishixia, Fuyong, Baoan,
Shenzhen, P.R.C.

Equipment Under Test (EUT) :


Product description : Wireless Camera

Model No. : CA190

Standards : FCC 15 Paragraph 15.249

Date of Test : August 18,2008

Test Engineer : **Nunu Deng**

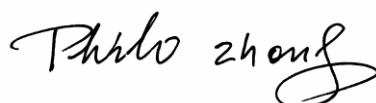Reviewed By : 

PERPARED BY:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen
518105, China

Tel: 86-755-27553488

Fax: 86-755-27553686

2 Contents

| | Page |
|---|-----------|
| 1 COVER PAGE..... | 1 |
| 2 CONTENTS | 2 |
| 3 TEST SUMMARY..... | 4 |
| 4 GENERAL INFORMATION..... | 5 |
| 4.1 CLIENT INFORMATION | 5 |
| 4.2 GENERAL DESCRIPTION OF E.U.T. | 5 |
| 4.3 DETAILS OF E.U.T..... | 5 |
| 4.4 DESCRIPTION OF SUPPORT UNITS | 5 |
| 4.5 STANDARDS APPLICABLE FOR TESTING | 5 |
| 4.6 TEST FACILITY | 6 |
| 4.7 TEST LOCATION | 6 |
| 5 EQUIPMENT USED DURING TEST..... | 7 |
| 5.1 EQUIPMENT USED DURING (EMISSION AND IMMUNITY TEST) | 7 |
| 6 CONDUCTED EMISSION TEST..... | 8 |
| 6.1 TEST EQUIPMENT | 8 |
| 6.2 TEST PROCEDURE..... | 8 |
| 6.3 CONDUCTED TEST SETUP..... | 9 |
| 6.4 EUT OPERATING CONDITION..... | 9 |
| 6.5 CONDUCTED EMISSION LIMITS..... | 10 |
| 6.6 CONDUCTED EMISSION TEST RESULT | 11 |
| 6.7 CONDUCTED EMISSION TEST DATA | 12 |
| 7 RADIATION EMISSION TEST | 13 |
| 7.1 TEST EQUIPMENT | 13 |
| 7.2 MEASUREMENT UNCERTAINTY | 13 |
| 7.3 TEST PROCEDURE..... | 13 |
| 7.4 RADIATED TEST SETUP | 14 |
| 7.5 SPECTRUM ANALYZER SETUP | 14 |
| 7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION..... | 15 |
| 7.7 SUMMARY OF TEST RESULTS | 15 |
| 7.8 EUT OPERATING CONDITION..... | 16 |
| 7.9 RADIATED EMISSIONS LIMIT | 16 |
| 7.10 RADIATED EMISSIONS TEST RESULT | 17 |
| 8 ANTENNA REQUIREMENT..... | 20 |
| 9 BAND EDGE..... | 21 |
| 9.1 TEST PROCEDURE..... | 21 |
| 9.2 BAND EDGE..... | 21 |
| 9.3 BAND EDGE TEST RESULT | 22 |
| 10 PHOTOGRAPHS OF TESTING | 23 |
| 10.1 RADIATION EMISSION TEST VIEW FOR 30MHZ-1000MHZ..... | 23 |
| 10.2 RADIATION EMISSION TEST VIEW FOR 1GHZ-25GHZ..... | 23 |
| 10.3 CONDUCTED EMISSION TEST VIEW | 24 |

| | | |
|-----------|--|-----------|
| 11 | PHOTOGRAPHS - CONSTRUCTIONAL DETAILS..... | 25 |
| 11.1 | EUT - FRONT VIEW..... | 25 |
| 11.2 | EUT - BACK VIEW | 25 |
| 11.3 | PCB1 - FRONT VIEW..... | 26 |
| 11.4 | PCB1 - BACK VIEW | 26 |
| 11.5 | PCB2 - FRONT VIEW..... | 27 |
| 11.6 | PCB2 - BACK VIEW | 27 |
| 11.7 | PCB3 - FRONT VIEW..... | 28 |
| 11.8 | PCB3 - BACK VIEW | 28 |
| 12 | FCC ID LABEL | 29 |

3 Test Summary

| Test | Test Requirement | Test Method | Class / Severity | Result |
|---|-------------------------|--------------------|-------------------------|---------------|
| Radiated Emission (30MHz to 25GHz) | FCC PART 15: 2003 | ANSI C63.4: 2003 | N/A | PASS |
| Conducted Emission (150KHz to 30MHz) | FCC PART 15: 2003 | ANSI C63.4: 2003 | N/A | PASS |

4 General Information

4.1 Client Information

Applicant: **RDI Technology (Shenzhen) Co., Ltd.**
Address of Applicant: Building C1 Xingtang Industrial Park, East Baishixia, Fuyong, Baoan, Shenzhen, P.R.C.
Manufacturer: **RDI Technology (Shenzhen) Co., Ltd.**
Address: Building C1 Xingtang Industrial Park, East Baishixia, Fuyong, Baoan, Shenzhen, P.R.C.

4.2 General Description of E.U.T.

Product description: Wireless Camera
Model No.: CA190

4.3 Details of E.U.T.

Power Supply: Adapter input: 120V AC 60Hz
Adapter output: 9V DC

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a Wireless Camera. The standards used were FCC 15 Paragraph 15.249, Paragraph 15.207, Paragraph 15.209, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **IC – Registration No.: IC7760**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration IC7760, July 24,2008.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, June 24, 2008.

4.7 Test Location

All Emissions test were performed at:-

1/F, Fukangtai Building, West Baima Rd., Songgang Street,
Baoan District, Shenzhen 518105, China.

5 Equipment Used during Test

5.1 Equipment Used during (Emission and Immunity Test)

| Equipment | Brand Name | Model | Cal.Int Months | LastCal. Date |
|---|---------------------------|-----------|----------------|---------------|
| 3m Anechoic chamber | | | | |
| EMC Analyzer | Agilent | E7405A | 12 | Jan-08 |
| Active Loop Antenna | Beijing Dazhi | ZN30900A | 12 | Jan-08 |
| Trilog Broadband Antenna | SCHWARZBECK MESS-ELEKTROM | VULB9163 | 12 | Jan-08 |
| Broadband Preamplifier | SCHWARZBECK MESS-ELEKTROM | BBV 9718 | 12 | Jan-08 |
| 10m Coaxial Cable with N-maleConnectors usable, | SCHWARZBECK MESS-ELEKTROM | AK 9515 H | 12 | Jan-08 |
| 10m 50 Ohm Coaxial Cable with N-plug,individual length,usable up to 3(5)GHz, Connectors | SCHWARZBECK MESS-ELEKTROM | AK 9513 | 12 | Jan-08 |
| Positioning Controller | C&C LAB | CC-C-IF | 12 | Jan-08 |
| Color Monitor | SUNSP0 | SP-14C | 12 | Jan-08 |
| EMI Shielded Room | | | | |
| Test Receiver | ROHDE&SCHWARZ | ESPI | 12 | Jan-08 |
| Two-Line V-Network | ROHDE&SCHWARZ | ENV216 | 12 | Jan-08 |
| Absorbing Clamp | ROHDE&SCHWARZ | MDS-21 | 12 | Jan-08 |
| 10m 50 Ohm Coaxial Cable with N-plugindividual length,usable up to 3(5)GHz, Connectors | SCHWARZBECK MESS-ELEKTROM | AK 9514 | 12 | Jan-08 |

6 Conducted Emission Test

| | |
|-------------------|---|
| Product Name: | Wireless Camera |
| Test Requirement: | FCC Part15 Paragraph 15.207 |
| Test Method: | Based on FCC Part15 Paragraph 15.207 |
| Test Date: | August 18, 2008 |
| Frequency Range: | 150 kHz to 30MHz |
| Class: | Class B |
| Detector: | Peak for pre-scan (9 kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit |

6.1 Test Equipment


Please refer to Section 5 this report.

6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4: 2003. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

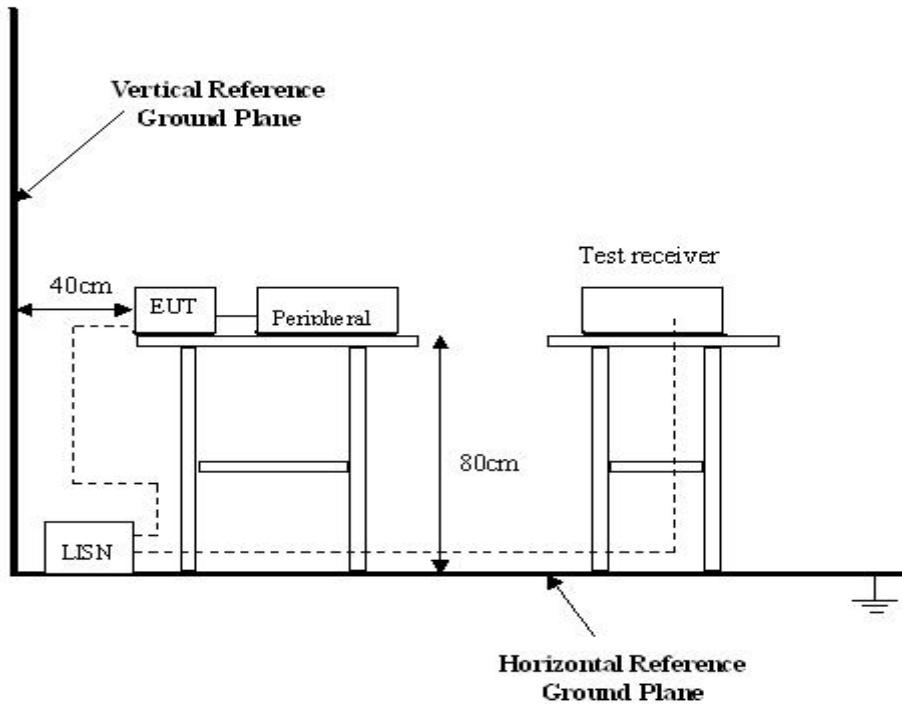

6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4: 2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

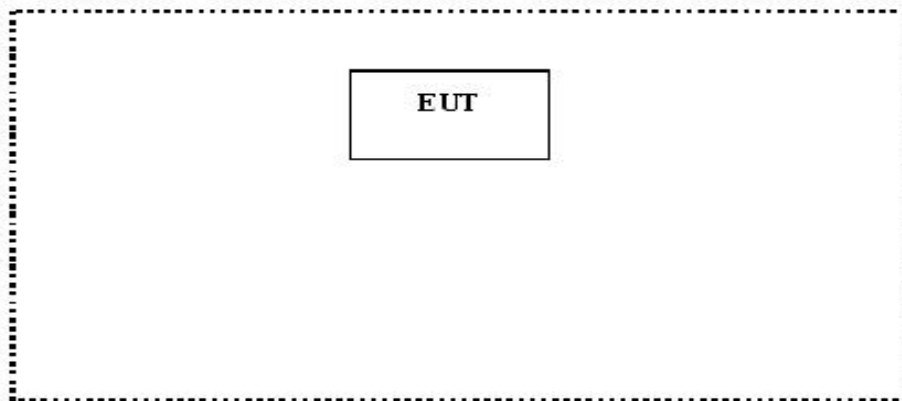

6.5 Conducted Emission Limits

66-56 dB μ V/m between 0.15MHz & 0.5MHz


56 dB μ V/m between 0.5MHz & 5MHz

60 dB μ V/m between 5MHz & 30MHz


Note: In the above limits, the tighter limit applies at the band edges.

6.6 Conducted Emission Test Result

Live Line

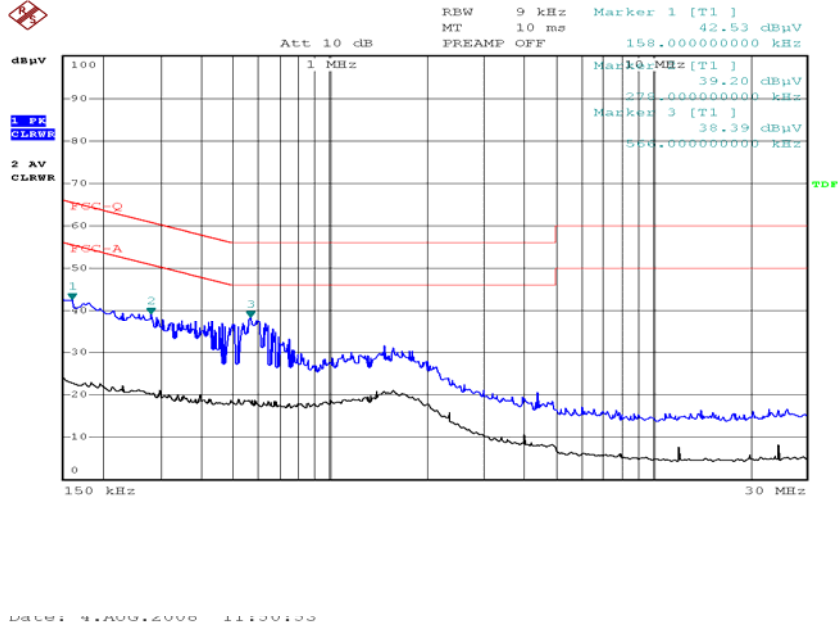

Neutral Line

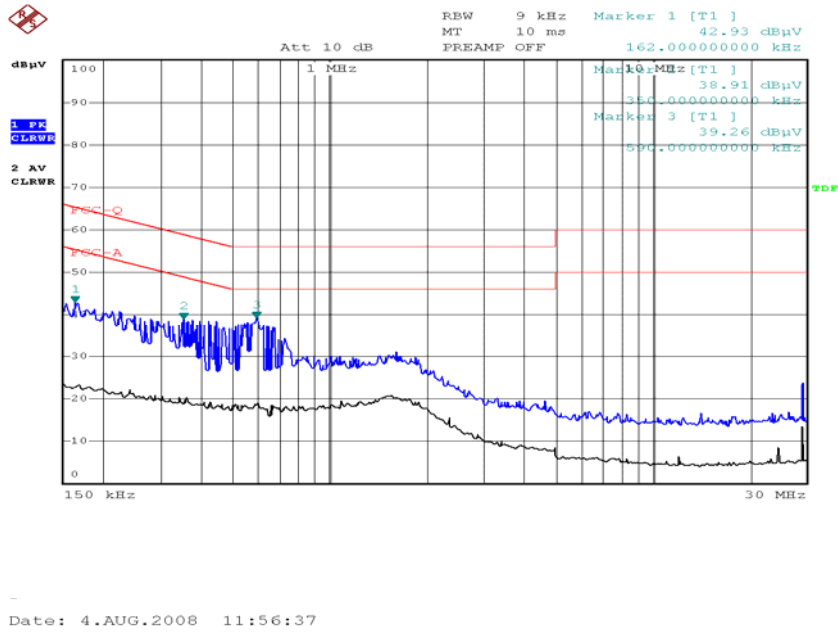

6.7 Conducted Emission Test Data

| Freq. MHz | Line | QP Reading dBuV | Limit dBuV | Margin dB | AV Reading dBuV | Limit dBuV | Margin dB |
|--------------|---------|-----------------------|---------------|--------------|-----------------------|---------------|--------------|
| 0.158 | Live | 42.53 | 65.57 | -23.04 | 34.76 | 55.57 | -20.81 |
| 0.278 | Live | 39.20 | 60.91 | -21.71 | 32.18 | 50.91 | -18.73 |
| 0.566 | Live | 38.39 | 56.00 | -17.61 | 30.27 | 46.00 | -15.73 |
| 0.162 | Neutral | 42.98 | 65.36 | -22.38 | 35.04 | 55.36 | -20.32 |
| 0.350 | Neutral | 38.91 | 59.01 | -20.1 | 33.29 | 49.01 | -15.72 |
| 0.590 | Neutral | 39.26 | 56.00 | -16.74 | 33.67 | 46.00 | -12.33 |

7 Radiation Emission Test

| | |
|-----------------------|---|
| Product Name: | Wireless Camera |
| Test Requirement: | FCC Part15 Paragraph 15.249 |
| Test Method: | Based on FCC Part15 Paragraph 15.31 and Paragraph 15.33 |
| Test Date: | August 18, 2008 |
| Frequency Range: | 30MHz to 25GHz |
| Measurement Distance: | 3m |
| Detector: | Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit |

7.1 Test Equipment

Please refer to Section 5 this report.

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase centre variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4: 2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Waltek EMC Lab is +2.9dB.

7.3 Test Procedure

1. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
2. All data was recorded in the peak and average detection mode.
3. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003, The specification used in this report was the FCC Part15 Paragraph 15.249 and Paragraph 15.209 limits.

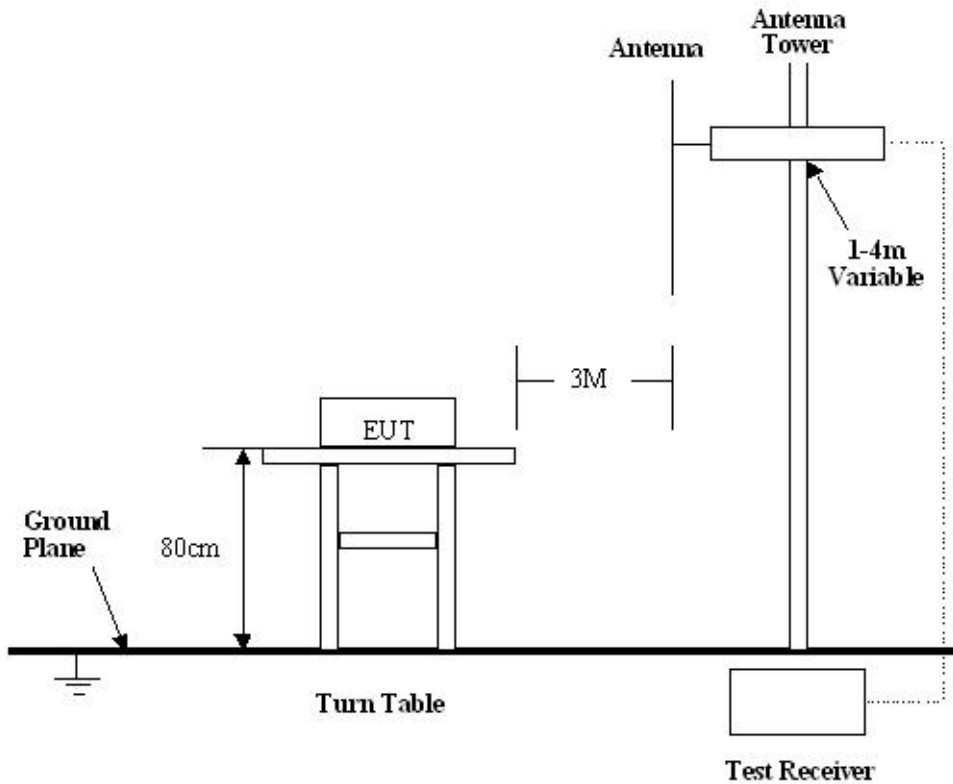

7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.249 Rules, the system was tested to 25000 MHz.

| | |
|------------------------------------|-----------|
| Start Frequency..... | 30 MHz |
| Stop Frequency..... | 25000 MHz |
| Sweep Speed | Auto |
| IF Bandwidth..... | 100 kHz |
| Video Bandwidth..... | 1 MHz |
| Quasi-Peak Adapter Bandwidth | 120 kHz |
| Quasi-Peak Adapter Mode | Normal |
| Resolution Bandwidth | 1MHz |

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-7\text{dB}\mu\text{V}$ means the emission is $7\text{dB}\mu\text{V}$ below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.249 standards.

7.8 EUT Operating Condition

Same as section 6.4 of this report.

7.9 Radiated Emissions Limit

A. FCC Part 15 subpart C Paragraph 15.249 Limit

| Fundamental Frequency | Field Strength of Fundamental | | Field Strength of Harmonics | |
|-----------------------|-------------------------------|--------|-----------------------------|--------|
| | mV/m | dBuV/m | uV/m | dBuV/m |
| 902-928MHz | 50 | 94 | 500 | 54 |
| 2400-2483.5 MHz | 50 | 94 | 500 | 54 |
| 5725-5875 MHz | 50 | 94 | 500 | 54 |
| 24.0-24.25GHz | 250 | 108 | 2500 | 68 |

- Note:**
- (1) RF Voltage(dBuV)=20 log RF Voltage(uV)
 - (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (3)The emission limit in this paragraph is based on measurement instrumentaion employing an average detector.Measurement using instrumentation with a peak detector function,corresponding to 20dB above the maximum permitted average limit.
 - (4) Above 1GHz,do a Peak and average measurements for all emissions,Limit for peak is 94dBuvV/m,According to Part15.35(b) and average is 54BuvV/m.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209

| Frequency(MHZ) | Distance(m) | Field strength(dBuV/m) |
|----------------|-------------|------------------------|
| 30-88 | 3 | 40.0 |
| 88-216 | 3 | 43.5 |
| 216-960 | 3 | 46.0 |
| Above 960 | 3 | 54.0 |

- Note:**
- (1) RF Voltage(dBuV)=20 log RF Voltage(uV)
 - (2) In the Above Table,the tighter limit applies at the band edges.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna.

7.10 Radiated Emissions Test Result

Formula of conversion factors: the field strength at 3m was established by adding
The meter reading of the spectrum analyzer (which is set to read in units of dBuV)
To the antenna correction factor supplied by the antenna manufacturer. The antenna
Correction factors are stated in terms of dB. The gain of the pressletor was accounted
For in the spectrum analyser meter reading.

Example:

| | |
|-----------|--------------------------------|
| Freq(MHz) | Meter Reading +ACF=FS |
| 33 | 20dBuV+10.36dB=30.36dBuV/m @3m |

Radiated Emission Test Data

| | |
|---------------|-------|
| Test Voltage: | DC 9V |
| Test Mode: | TX On |
| Temperature: | 24 °C |
| Humidity: | 52%RH |
| Test Result: | PASS |

Remarks: 30-1000MHz radiation test no significant emissions above the equipment noise floor were detected.

1GHZ-25GHZ Radiated Emission Data

| Frequency(MHz) | Detector | Antenna Polarization | Emission Level (dBuV/m) | FCC 15 Subpart C Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Turntable Angle (°) |
|----------------|----------|----------------------|-------------------------|---------------------------------|-------------|--------------------|---------------------|
| Low frequency | | | | | | | |
| 910 | AV | Vertical | 71.74 | 94.00 | -22.26 | 1.5 | 90 |
| 1820 | AV | Vertical | 50.53 | 54.00 | -3.47 | 1.5 | 90 |
| 2730 | AV | Vertical | 34.45 | 54.00 | -19.55 | 1.8 | 45 |
| 3640 | AV | Vertical | 30.12 | 54.00 | -23.88 | 1.5 | 90 |
| 4575 | AV | Vertical | 31.12 | 54.00 | -22.8 | 1.5 | 76 |
| 5460 | AV | Vertical | 32.41 | 54.00 | -21.59 | 1.8 | 45 |
| 910 | AV | Horizontal | 70.39 | 94.00 | -23.61 | 1.5 | 98 |
| 1820 | AV | Horizontal | 49.90 | 54.00 | -4.10 | 1.6 | 60 |
| 2730 | AV | Horizontal | 40.48 | 54.00 | -13.52 | 1.5 | 180 |
| 3640 | AV | Horizontal | 28.97 | 54.00 | -25.73 | 1.8 | 45 |
| 4575 | AV | Horizontal | 30.14 | 54.00 | -23.86 | 1.5 | 90 |
| 5460 | AV | Horizontal | 32.10 | 54.00 | -21.9 | 1.8 | 90 |
| 910 | PK | Vertical | 74.42 | 114.00 | -39.58 | 1.5 | 100 |
| 1820 | PK | Vertical | 58.80 | 74.00 | -15.20 | 1.6 | 90 |
| 2730 | PK | Vertical | 39.44 | 74.00 | -34.56 | 1.5 | 90 |
| 3640 | PK | Vertical | 33.88 | 74.00 | -40.12 | 1.5 | 90 |
| 4575 | PK | Vertical | 32.27 | 74.00 | -41.73 | 1.5 | 100 |
| 5460 | PK | Vertical | 33.46 | 74.00 | -40.54 | 1.8 | 85 |
| 910 | PK | Horizontal | 74.18 | 114.00 | -39.82 | 1.5 | 90 |
| 1820 | PK | Horizontal | 59.76 | 74.00 | -14.24 | 1.5 | 60 |
| 2730 | PK | Horizontal | 44.01 | 74.00 | -29.99 | 1.8 | 80 |
| 3640 | PK | Horizontal | 33.46 | 74.00 | -40.54 | 1.6 | 90 |
| 4575 | PK | Horizontal | 32.84 | 74.00 | -41.16 | 1.5 | 90 |
| 5460 | PK | Horizontal | 34.12 | 74.00 | -39.88 | 1.5 | 90 |
| High frequency | | | | | | | |
| 920 | AV | Vertical | 70.09 | 94.00 | -23.91 | 1.5 | 120 |
| 1840 | AV | Vertical | 49.19 | 54.00 | -4.81 | 1.5 | 60 |
| 2760 | AV | Vertical | 28.50 | 54.00 | -25.50 | 1.5 | 80 |
| 3680 | AV | Vertical | 50.11 | 54.00 | -3.89 | 1.5 | 90 |
| 4600 | AV | Vertical | 27.83 | 54.00 | -26.17 | 1.6 | 180 |

| | | | | | | | |
|------|----|------------|-------|--------|--------|-----|-----|
| 5520 | AV | Vertical | 29.16 | 54.00 | -24.84 | 1.8 | 90 |
| 920 | AV | Horizontal | 71.74 | 94.00 | -22.26 | 1.5 | 120 |
| 1840 | AV | Horizontal | 49.19 | 54.00 | -4.81 | 1.5 | 45 |
| 2760 | AV | Horizontal | 28.50 | 54.00 | -25.50 | 1.5 | 210 |
| 3680 | AV | Horizontal | 29.10 | 54.00 | -24.9 | 1.5 | 230 |
| 4600 | AV | Horizontal | 28.96 | 54.00 | -25.04 | 1.6 | 250 |
| 5520 | AV | Horizontal | 30.12 | 54.00 | -23.88 | 1.5 | 60 |
| 920 | PK | Vertical | 73.90 | 114.00 | -40.1 | 1.5 | 80 |
| 1840 | PK | Vertical | 59.02 | 74.00 | -14.98 | 1.5 | 70 |
| 2760 | PK | Vertical | 33.49 | 74.00 | -40.51 | 1.5 | 90 |
| 3680 | PK | Vertical | 32.14 | 74.00 | -41.86 | 1.5 | 80 |
| 4600 | PK | Vertical | 32.95 | 74.00 | -41.05 | 1.6 | 70 |
| 5520 | PK | Vertical | 30.84 | 74.00 | -43.16 | 1.5 | 90 |
| 920 | PK | Horizontal | 72.23 | 114.00 | -41.77 | 1.5 | 45 |
| 1840 | PK | Horizontal | 60.39 | 74.00 | -13.61 | 1.8 | 250 |
| 2760 | PK | Horizontal | 34.94 | 74.00 | -39.06 | 1.5 | 80 |
| 3680 | PK | Horizontal | 33.79 | 74.00 | -40.21 | 1.5 | 230 |
| 4600 | PK | Horizontal | 32.91 | 74.00 | -41.09 | 1.6 | 90 |
| 5520 | PK | Horizontal | 33.07 | 74.00 | -40.93 | 1.5 | 60 |

Note: Above 1GHz,do a Peak and average measurements for all emissions, According to Part15.35(b), Limit for average is 54BuvV/m.

8 Antenna Requirement.

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product has a permanent antenna, fulfill the requirement of this section

9 Band Edge

9.1 Test Procedure



1. The transmitter output (antenna port) was connected to the spectrum analyzer. EUT and its simulators are placed on a table, let EUT working in test mode, then test it.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyser using 100kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power 20dB.

9.2 Band Edge

Requirements: FCC 15.249(d), the emission power at the START and STOP frequencies shall be at least 50dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209.

9.3 Band Edge Test Result


Product Name: Wireless Camera
 Test Item: Band Edge Test
 Test Voltage: DC 9V
 Test Mode: TX On
 Temperature: 24 °C
 Humidity: 52%RH

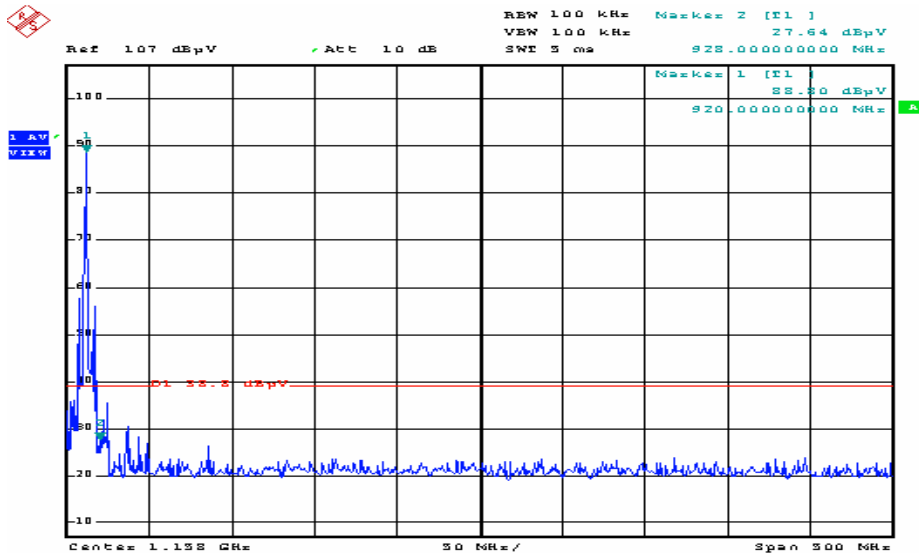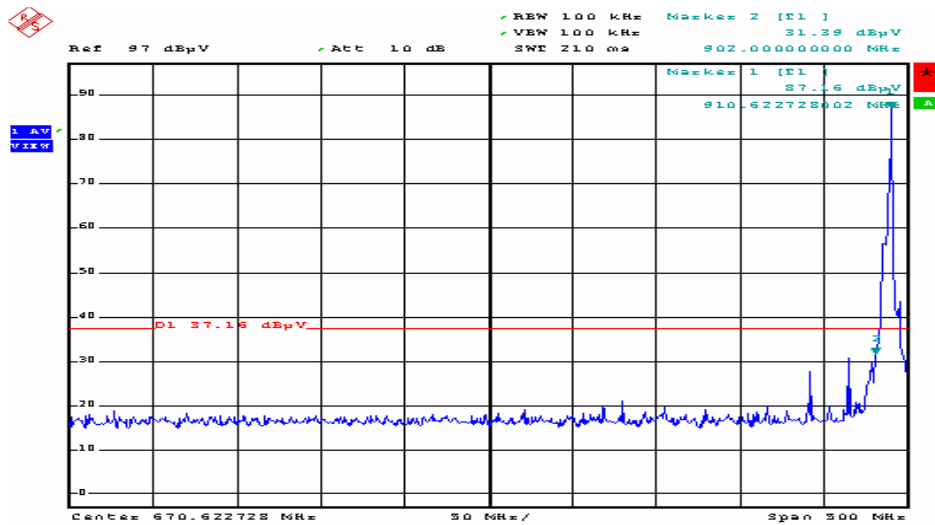


- Note:**
- (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.249.
 - (2) This device does meet the FCC requirement.

10 Photographs of Testing

10.1 Radiation Emission Test View For 30MHz-1000MHz

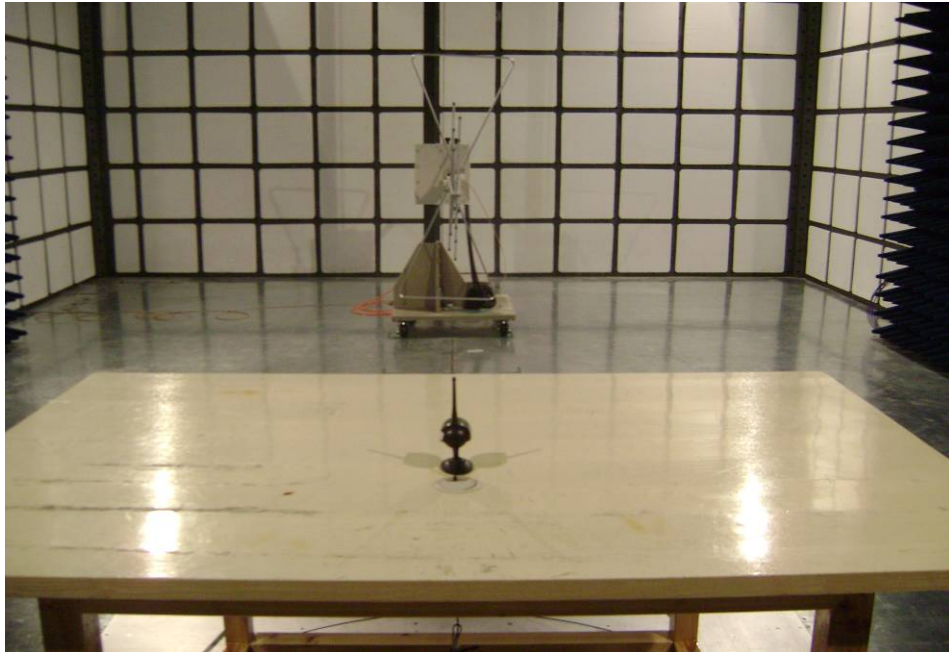

10.2 Radiation Emission Test View For 1GHz-25GHz

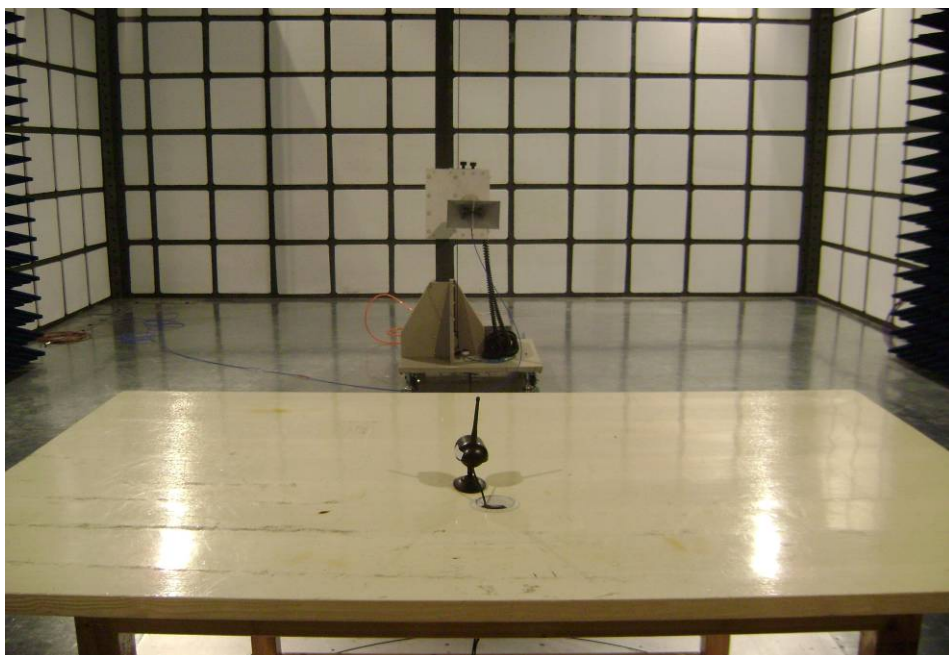

10.3 Conducted Emission Test View



11 Photographs - Constructional Details


11.1 EUT - Front View




11.2 EUT - Back View




11.3 PCB1 - Front View

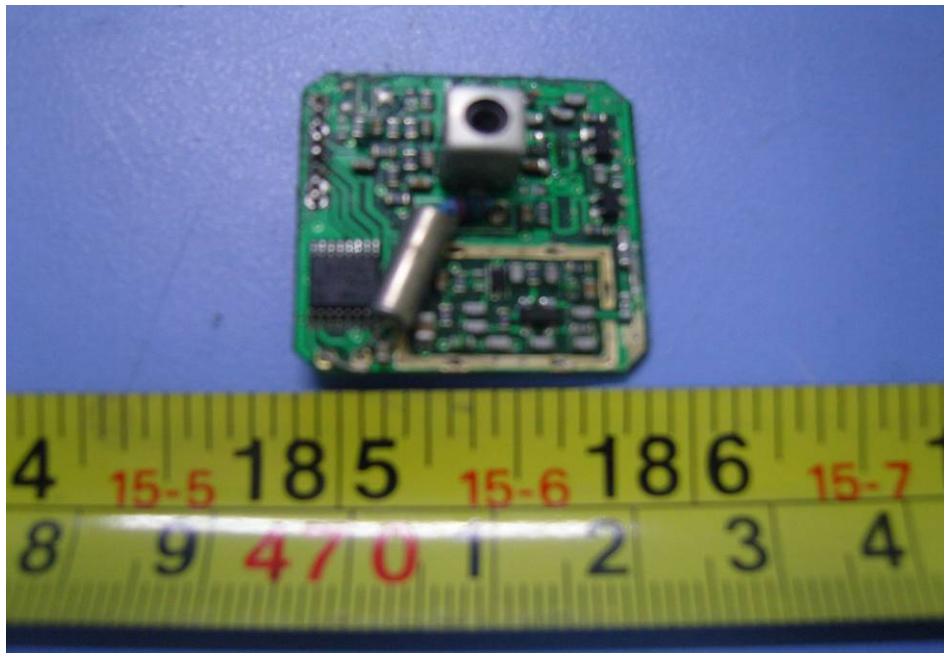


11.4 PCB1 - Back View

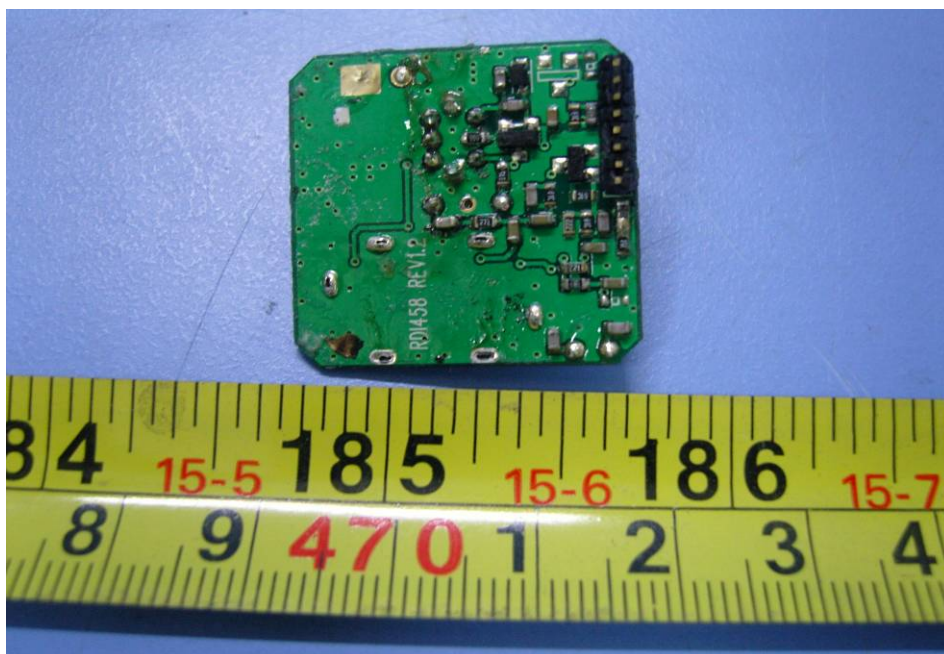

11.5 PCB2 - Front View

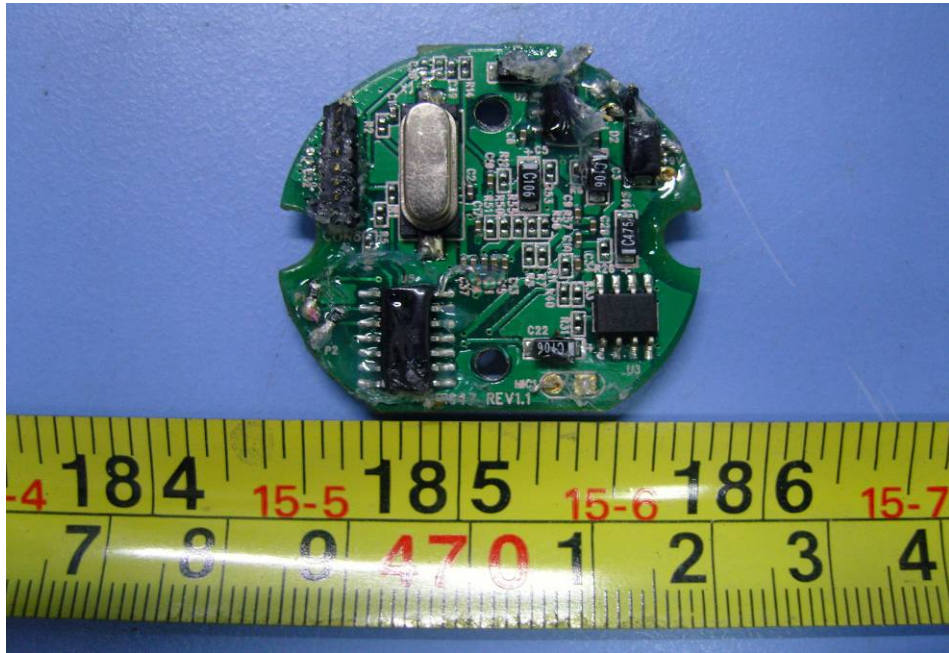


11.6 PCB2 - Back View

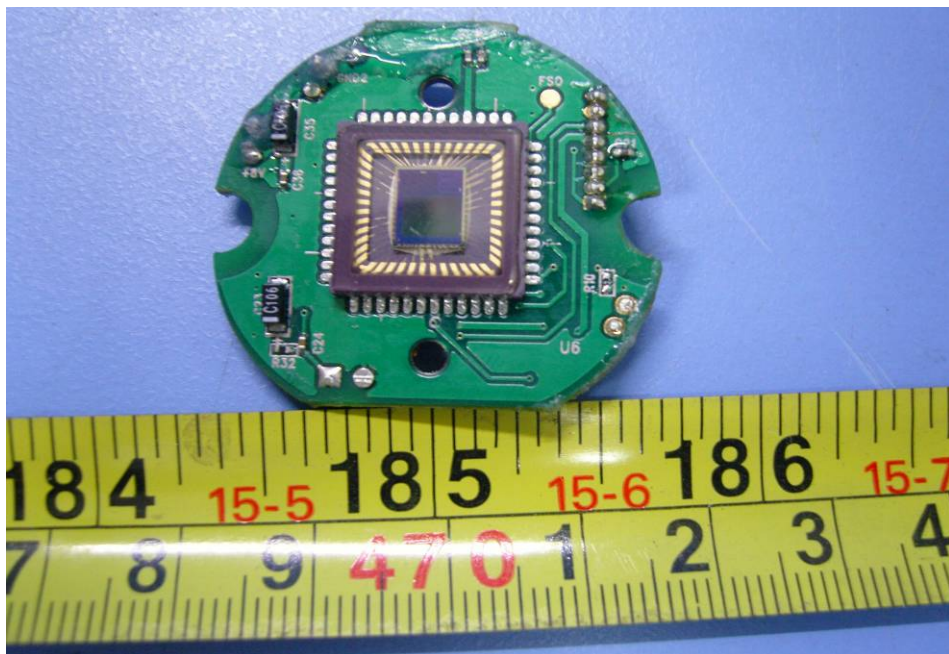

11.7 PCB3 - Front View



11.8 PCB3 - Back View

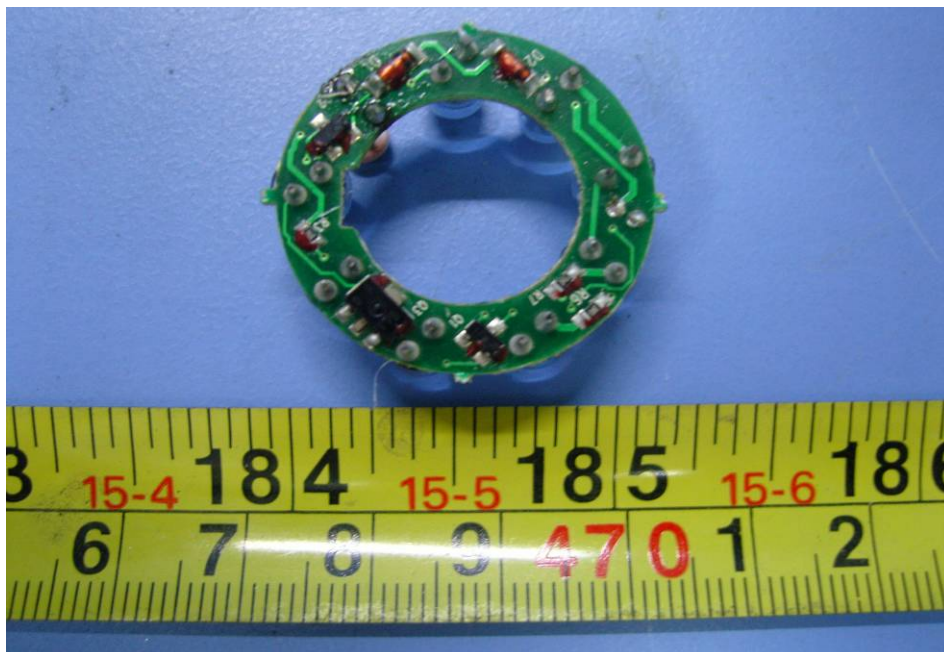

12 FCC ID Label

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Label Location

