

# ***FCC TEST REPORT***

**FCC ID** : SJ8CA200

**Applicant** : **Shenzhen RDI Electronics & Plastics Co., Ltd.**  
Building C2 Xingtang Industrial Park, East Baishixia, Fuyong, Baoan,  
Shenzhen, PRC

**Equipment Under Test (EUT) :**


Product description : Wireless Camera

Model No. : CA200

**Standards** : FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.31,  
Paragraph 15.33, Paragraph 15.35, Paragraph 15.249

**Date of Test** : August 04, 2005

**Test Engineer** : Tiger Su

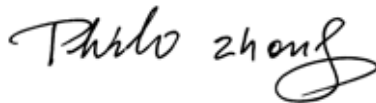**Reviewed By** : 

PERPARED BY:  
**Shenzhen Huatongwei International Inspection Co., Ltd**  
Keji S,12th,Road, Hi-tech Industrial Park, Shenzhen, Guangdong, China

FCC Registration Number: 662850

## 2 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 CONTENTS.....</b>	<b>2</b>
<b>3 TEST SUMMARY.....</b>	<b>5</b>
<b>4 GENERAL INFORMATION.....</b>	<b>6</b>
4.1 CLIENT INFORMATION .....	6
4.2 GENERAL DESCRIPTION OF E.U.T.....	6
4.3 DETAILS OF E.U.T. ....	6
4.4 DESCRIPTION OF SUPPORT UNITS .....	6
4.5 STANDARDS APPLICABLE FOR TESTING.....	6
4.6 TEST FACILITY.....	7
4.7 TEST LOCATION.....	7
<b>5 EQUIPMENT USED DURING TEST .....</b>	<b>8</b>
<b>6 CONDUCTED EMISSION TEST .....</b>	<b>9</b>
6.1 TEST EQUIPMENT.....	9
6.2 TEST PROCEDURE .....	9
6.3 CONDUCTED TEST SETUP .....	10
6.4 EUT OPERATING CONDITION .....	10
6.5 CONDUCTED EMISSION LIMITS .....	11
6.6 CONDUCTED EMISSION TEST RESULT.....	12
6.6.1 <i>Conducted Emissions Test Data</i> .....	13
<b>7 RADIATION EMISSION TEST.....</b>	<b>14</b>
7.1 TEST EQUIPMENT.....	14
7.2 MEASUREMENT UNCERTAINTY.....	14
7.3 TEST PROCEDURE .....	14
7.4 RADIATED TEST SETUP.....	15
7.5 SPECTRUM ANALYZER SETUP.....	15
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	16
7.7 SUMMARY OF TEST RESULTS.....	16
7.8 EUT OPERATING CONDITION .....	17
7.9 RADIATED EMISSIONS LIMIT.....	17
7.10 RADIATED EMISSIONS TEST RESULT.....	18
<b>8 BAND EDGE .....</b>	<b>22</b>
8.1 TEST EQUIPMENT.....	22
8.2 TEST PROCEDURE .....	22
8.3 EUT OPERATION .....	22
8.4 BAND EDGE .....	22
8.5 BAND EDGE TEST RESULT .....	23
<b>9 PHOTOGRAPHS OF TESTING.....</b>	<b>24</b>
9.1 CONDUCTED EMISSION TEST SETUP VIEW.....	24
9.2 RADIATION EMISSION TEST SETUP VIEW.....	25

- 10 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS .....26**
- 10.1 EUT - FRONT VIEW .....26
- 10.2 EUT - BACK VIEW .....26
- 10.3 PCB 1- FRONT VIEW .....27
- 10.4 PCB1 - BACKVIEW .....27
- 10.5 PCB 2- FRONT VIEW .....28
- 10.6 PCB 2 - BACKVIEW .....28
- 10.7 PCB 3- FRONT VIEW .....29
- 10.8 PCB 3 - BACKVIEW .....29
- 10.9 PCB 4- FRONT VIEW .....30
- 10.10 PCB 4 - BACKVIEW .....30
- 11 FCC ID LABEL .....31**

### 3 Test Summary

<b>Test</b>	<b>Test Requirement</b>	<b>Test Method</b>	<b>Class / Severity</b>	<b>Result</b>
Radiated Emission (30MHz to 25GHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS

## 4 General Information

### 4.1 Client Information

Applicant: **Shenzhen RDI Electronics & Plastics Co., Ltd.**  
Address of Applicant: Building C2 Xingtang Industrial Park, East Baishixia, Fuyong,  
Baoan, Shenzhen, PRC

### 4.2 General Description of E.U.T.

Product description: Wireless Camera  
Model No.: CA200

### 4.3 Details of E.U.T.

Power Supply: Adaptor Input: 120VAC/60Hz

### 4.4 Description of Support Units

The EUT has been tested as an independent unit.

### 4.5 Standards Applicable for Testing

The customer requested FCC tests for a Wireless Camera. The standards used were FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35, Paragraph 15.249.

#### **4.6 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 662850**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 662850, November 17, 2003.

#### **4.7 Test Location**

All Emissions tests were performed at:-Shenzhen Huatongwei International Inspection Co., Ltd. at Keji S, 12th, Road, Hi-tech Industrial Park, Shenzhen, Guangdong, China.

## 5 Equipment Used during Test

<b>Conducted Emission Test</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Due date</b>
1	EMI Test Software	Rohde&schwarz	ESK1	N/A	N/A	N/A
2	Pulse Limiter	Rohde&schwarz	ESHSZ2	100044	05-11-2004	04-11-2005
3	EMI Test Receiver	Rohde & Schwarz	ESCS30	100038	05-11.2004	04-11-2005
4	Artificial Mains	Rohde&schwarz	ENV216	3560655002	05-11-2004	04-11-2005
<b>Radiated Emission Test</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Due date</b>
1	3m Semi- Anechoic Chamber	ETS	N/A	N/A	05-11-2004	04-11-2005
2	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100009	05-11.2004	04-11-2005
3	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100038	05-11.2004	04-11-2005
4	EMI Test Software	ROHDE & SCHWARZ	ES-K1	N/A	N/A	N/A
5	Bilog Type Antenna	ETS	2075	2346	05-11.2004	04-11-2005
6	Horn Antenna	ROHDE & SCHWARZ	HF906	1000029	05-11.2004	04-11-2005
7	Ultra-Broadband Antenna	ROHDE & SCHWARZ	HL562	100015	05-11.2004	04-11-2005
<b>Common Used Equipment</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Series No.</b>	<b>Cal. Date</b>	<b>Due date</b>
1	Temperature, Humidity & Barometer	OREGON SCIENTIFIC	BA-888	EMC0001 to EMC0004	05-11-2004	04-11-2005
2	DMM	FLUKE	73	70681569 or 70671122	05-11.2004	04-11-2005

## 6 Conducted Emission Test

Product:	Wireless Camera / CA200
Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	August 04, 2005
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

### 6.1 Test Equipment

Please refer to Section 5 this report.


### 6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.



### 6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

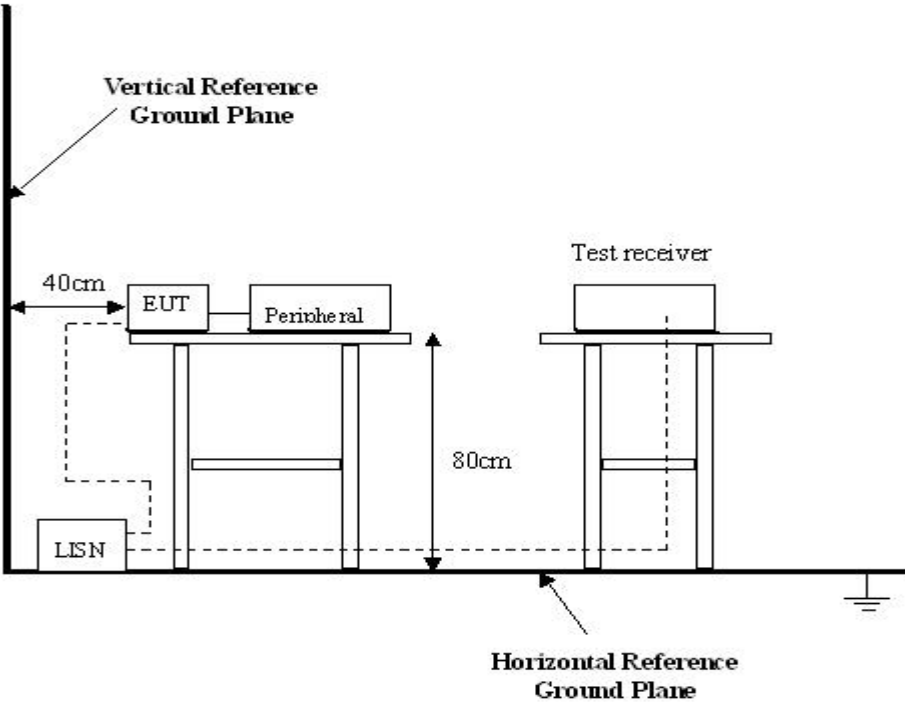

### 6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

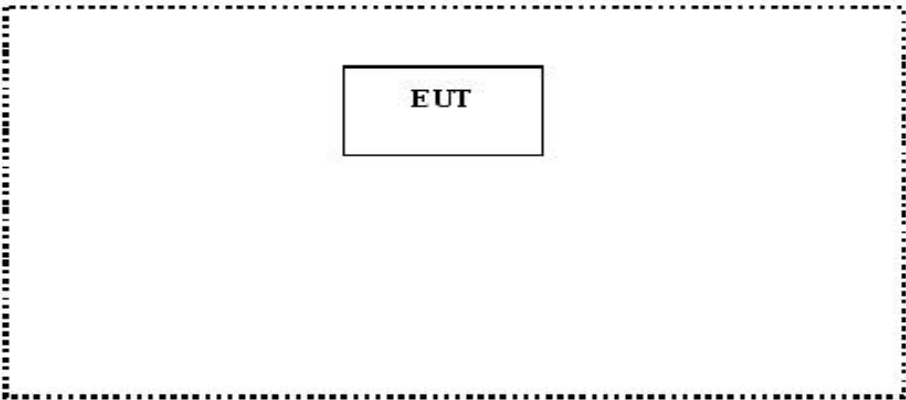

## 6.5 Conducted Emission Limits

66-56 dB $\mu$ V/m between 0.15MHz & 0.5MHz


56 dB $\mu$ V/m between 0.5MHz & 5MHz

60 dB $\mu$ V/m between 5MHz & 30MHz


**Note:** In the above limits, the tighter limit applies at the band edges.

### 6.6 Conducted Emission Test Result

Live Line:

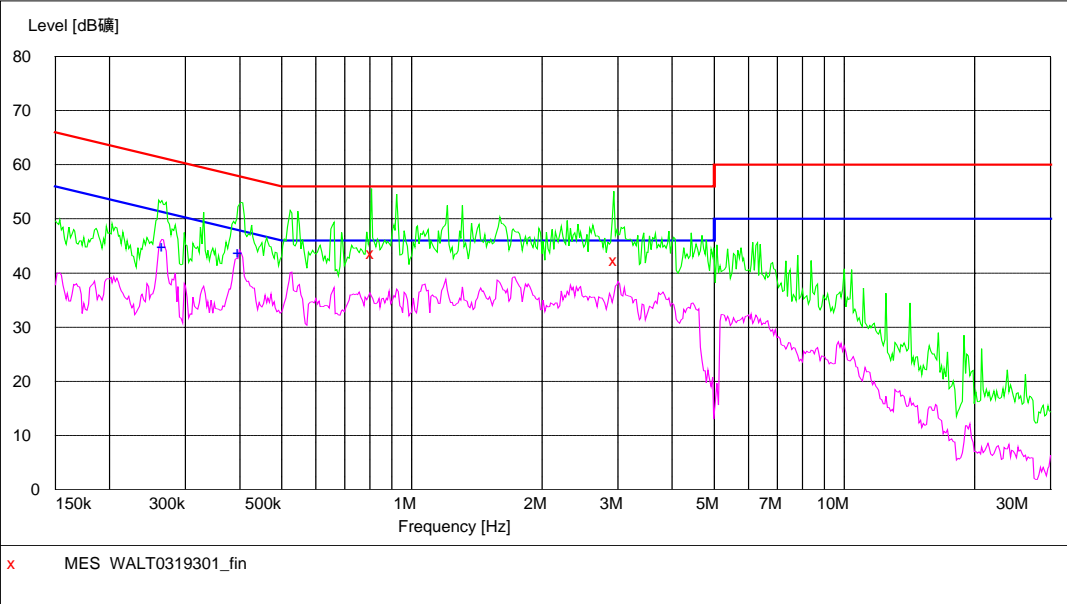

Neutral Line:

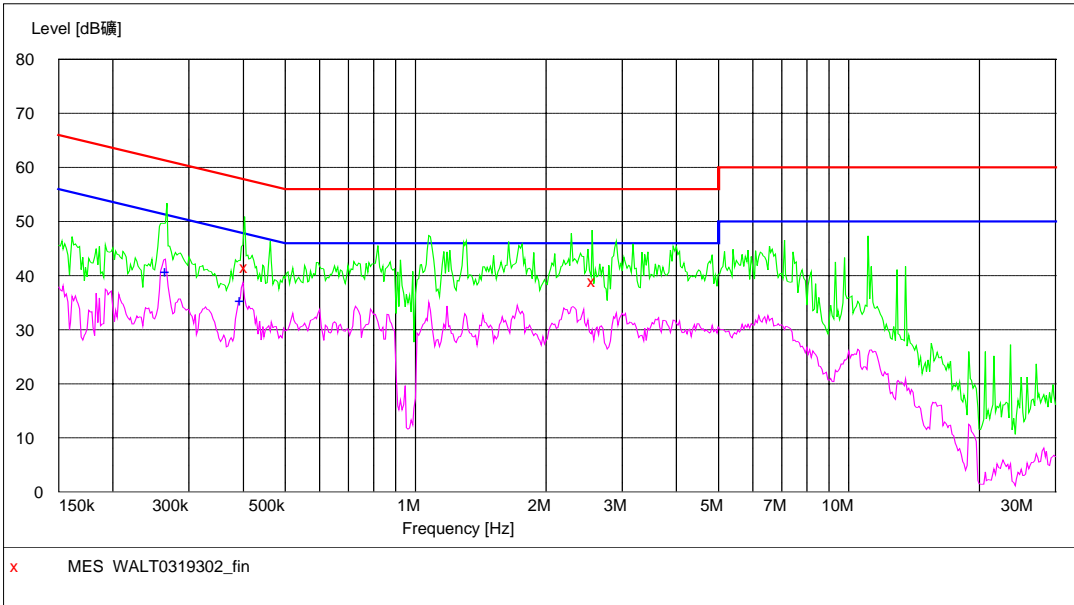

**6.6.1 Conducted Emissions Test Data**

Freq. MHz	Line	QP Reading dBuV	Limit dBuV	Margin dB	AV Reading dBuV	Limit dBuV	Margin dB
0.812310	Live	43.60	56.0	12.4	36.1	46.0	9.9
2.953450	Live	42.40	56.0	13.6	34.2	46.0	11.8
0.461210	Neutral	41.60	58.0	16.4	38.3	48.0	9.7
2.579289	Neutral	38.90	56.0	17.1	29.8	46.0	16.2

## 7 Radiation Emission Test

Product:	Wireless Camera / CA200
Test Requirement:	FCC Part15 Paragraph 15.209 and Paragraph 15.249
Test Method:	Based on FCC Part15 Paragraph 15.33
Test Date:	August 04, 2005
Frequency Range:	30MHz to 25GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

### 7.1 Test Equipment

Please refer to Section 5 this report.

### 7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at SZHTW is +4.0 dB.

### 7.3 Test Procedure

1. For the radiated emissions test, since the EUT does not have a power source, there was no connection to AC outlets.
2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
3. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits), and are distinguished with a "Qp" in the data table.
4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

### 7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209 and Paragraph 15.249 limits.

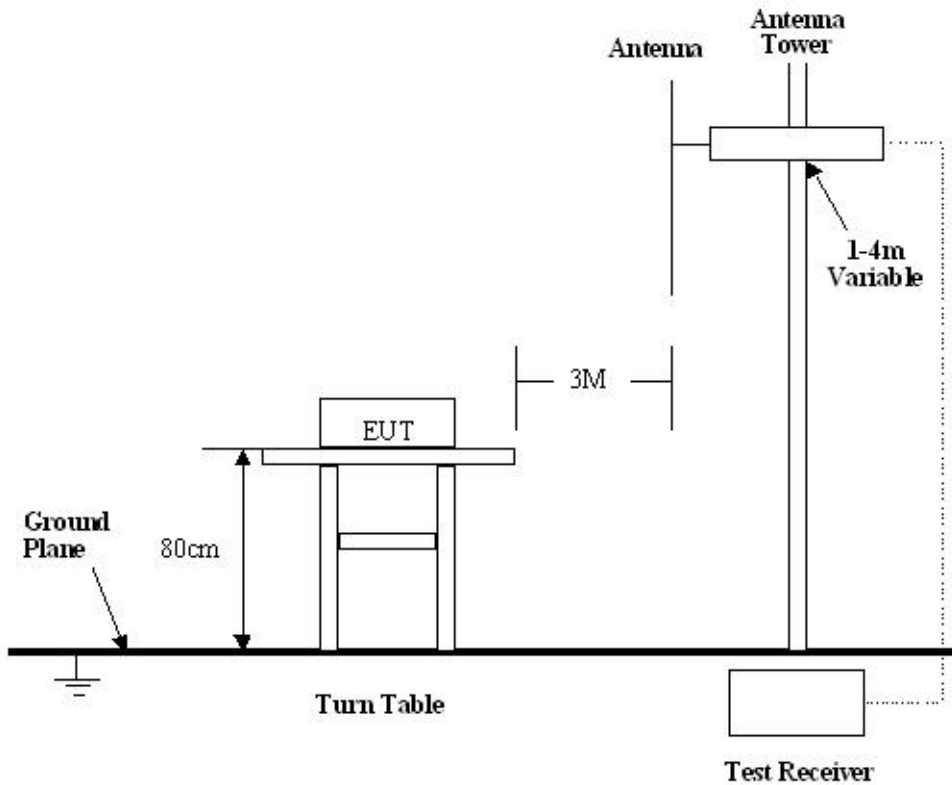

### 7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.209 and Paragraph 15.249 Rules, the system was tested to 25000 MHz.

- Start Frequency .....30 MHz
- Stop Frequency .....25000 MHz
- Sweep Speed Auto
- IF Bandwidth .....100 kHz
- Video Bandwidth .....1 MHz
- Quasi-Peak Adapter Bandwidth .....120 kHz
- Quasi-Peak Adapter Mode.....Normal
- Resolution Bandwidth .....1MHz

## 7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB $\mu$ V means the emission is 7dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

## 7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.209 and Paragraph 15.249 standards.

## 7.8 EUT Operating Condition

Same as section 6.4 of this report.

## 7.9 Radiated Emissions Limit

### A. FCC Part 15 subpart C Paragraph 15.249 Limit

Fundamental Frequency	Field Strength of Fundamental		Field Strength of Harmonics	
	mV/m	dBuV/m	uV/m	dBuV/m
902-928MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25GHz	250	108	2500	68

- Note:**
- (1) RF Voltage(dBuV)=20 log RF Voltage(uV)
  - (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
  - (3)The emission limit in this paragraph is based on measurement instrumentaion employing an average detector.Measurement using instrumentation with a peak detector function,corresponding to 20dB above the maximum permitted average limit.
  - (4) Above 1GHz,do a Peak and average measurements for all emissions,Limit for peak is 74dBuV/m,According to Part15.35(b) and average is 54BuvV/m.

### B. Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:**
- (1) RF Voltage(dBuV)=20 log RF Voltage(uV)
  - (2) In the Above Table,the tighter limit applies at the band edges.
  - (3) Distance refers to the distance in meters between the measuring instrument antenna.



## 7.10 Radiated Emissions Test Result

Formula of conversion factors:the field strength at 3m was established by adding  
The meter reading of the spectrum analyser (which is set to read in units of dBuV)  
To the antenna correction factor supplied by the antenna manufacturer. The antenna  
Correction factors are stated in terms of dB.The gain of the presselector was accounted  
For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33            20dBuV+10.36dB=30.36dBuV/m @3m

### A. Fundamental Radiated Emission Data

Test Item:	Fundamental Radiated Emission Data
Test Voltage:	Adaptor Input:120VAC/60Hz
Test Mode:	TX On
Temperature:	24 °C
Humidity:	52%RH
Test Result:	PASS

**1GHZ-25GHZ Radiated Emission Data**

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
Low frequency						
2410.664592	Vertical	85.50	94.0	8.50	1.5	120
4820.595358	Vertical	40.04	54.0	13.96	1.5	45
7232.920966	Vertical	38.45	54.0	15.55	1.5	90
12170.356713	Vertical	42.45	54.0	11.55	1.5	45
24112.907615	Vertical	44.13	54.0	9.87	1.5	180
2410.664592	Horizontal	86.87	94.0	7.13	1.5	90
4820.595358	Horizontal	43.42	54.0	10.58	1.5	180
7233.7870951	Horizontal	40.85	54.0	13.15	1.5	45
12150.356713	Horizontal	41.55	54.0	12.45	1.5	90
24123.127616	Horizontal	43.45	54.0	10.55	1.5	45
Middle frequency						
2440.345748	Vertical	86.45	94.0	7.55	1.5	60
4881.695391	Vertical	40.94	54.0	13.06	1.5	45
7322.428858	Vertical	39.43	54.0	14.57	1.5	90
12210.356762	Vertical	42.45	54.0	11.55	1.5	270
24403.807623	Vertical	44.83	54.0	9.17	1.5	90
2440.345774	Horizontal	85.80	94.0	8.20	1.5	90
4881.887776	Horizontal	41.21	54.0	12.79	1.5	180
7321.793556	Horizontal	40.10	54.0	13.90	1.5	45
12199.509398	Horizontal	42.53	54.0	11.47	1.5	60
24403.807623	Horizontal	43.23	54.0	10.77	1.5	90

High frequency						
2470.3345786	Vertical	85.35	94.0	8.65	1.5	45
4940.7802137	Vertical	40.46	54.0	13.54	1.5	60
7412.1655398	Vertical	41.69	54.0	12.31	1.5	180
12361.459956	Vertical	43.34	54.0	10.66	1.5	90
24703.891357	Vertical	44.77	54.0	9.23	1.5	180
2470.101887	Horizontal	84.32	94.0	9.68	1.5	90
4940.548321	Horizontal	41.33	54.0	12.67	1.5	90
7413.737182	Horizontal	41.60	54.0	12.40	1.5	45
12360.095834	Horizontal	40.45	54.0	13.55	1.5	60
24717.573659	Horizontal	43.78	54.0	10.22	1.5	180


- Note:** (1) Above 1GHz, do a Peak and average measurements for all emissions, Limit for peak is 74dBuV/m, According to Part 15.35(b) and average is 54BuV/m.  
(2) Emission Level = Reading Level + Probe Factor + Cable Loss.

### B. General Radiated Emission Data


Test Item: General Radiated Emission Data  
Test Voltage: Adaptor Input: 120VAC/60Hz  
Test Mode: TX On  
Temperature: 24 °C  
Humidity: 52%RH  
Test Result: PASS

Remarks: No significant emissions above the equipment noise floor were detected.

#### Horizontal:

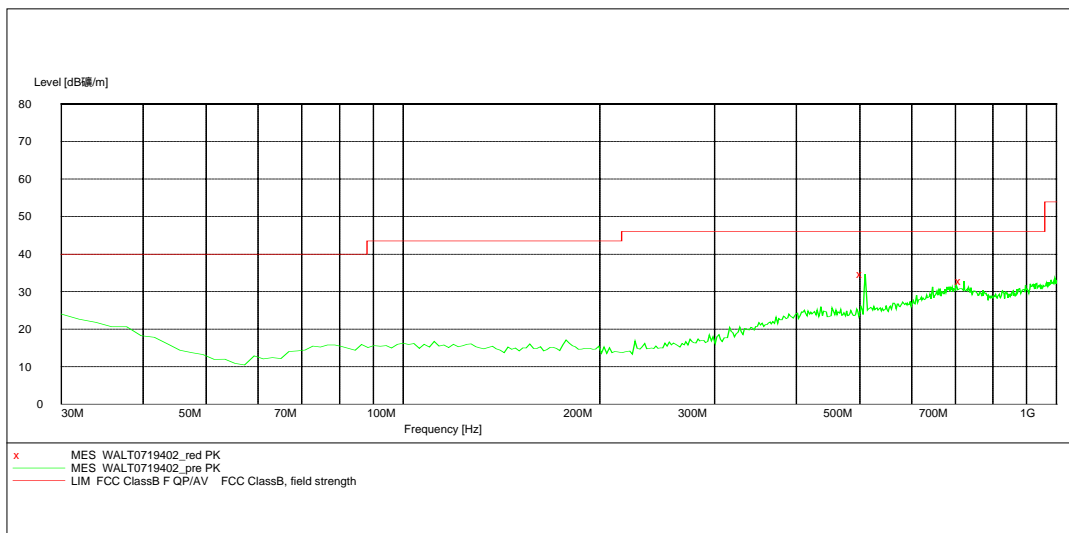

#### Vertical:

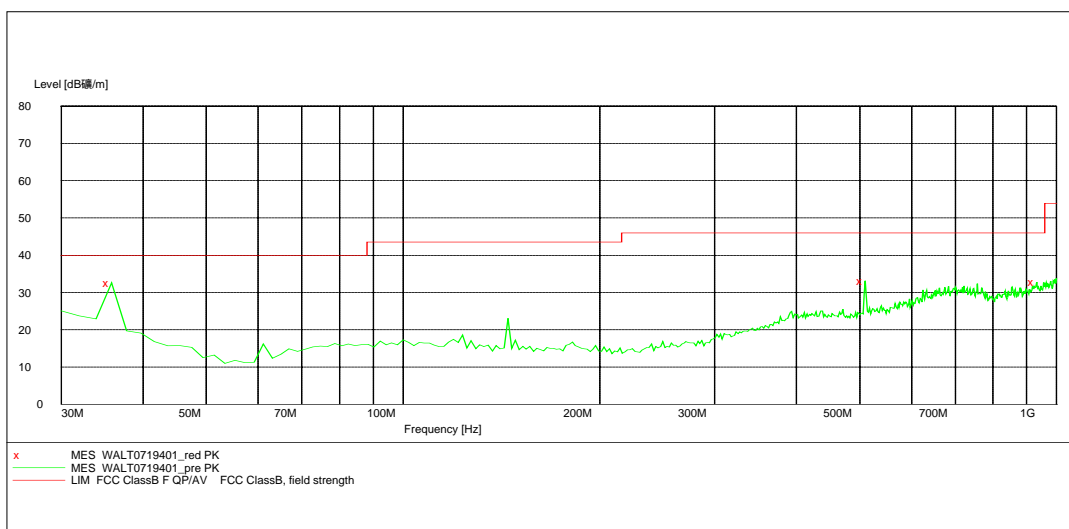

## **8 Band Edge**

### **8.1 Test Equipment**

Please refer to Section 5 this report.

### **8.2 Test Procedure**

1. The EUT, peripherals were put on the turntable which table size is 1mX1.5m, table high 0.8m. All set up is according to ANSI C63.4:2003.
2. With the EUT's antenna attached, The EUT's radiated emission power was received by the test antenna which was connected to the spectrum analyser with the START and STOP frequencies set to the EUT's operation band. Measurements were made at 3 meters.
3. The antenna high were varied from 1m to 4m high to find the maximum emission for each frequency.
4. Maximizing procedure was performed on the highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak reading was performed only when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits), and are distinguished with a "QP" in the data table.
5. The antenna polarization: Vertical polarization and horizontal polarization.

### **8.3 EUT Operation**

Same as section 6.4 of this report.

### **8.4 Band Edge**

Requirements: FCC 15.249(c), The emission power at the START and STOP frequencies shall be at least 50dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209.

### 8.5 Band Edge Test Result

Product: Wireless Camera / CA200  
Test Item: Band Edge Test  
Test Voltage: Adaptor Input:120VAC/60Hz  
Test Mode: TX On  
Temperature: 24 °C  
Humidity: 52%RH



**Note:** (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.249.

## 9 Photographs of Testing

### 9.1 Conducted Emission Test Setup View



**9.2 Radiation Emission Test Setup View**





# 10 Photographs - Constructional Details


## 10.1 EUT - Front View



## 10.2 EUT - Back View



10.3 PCB 1- Front View

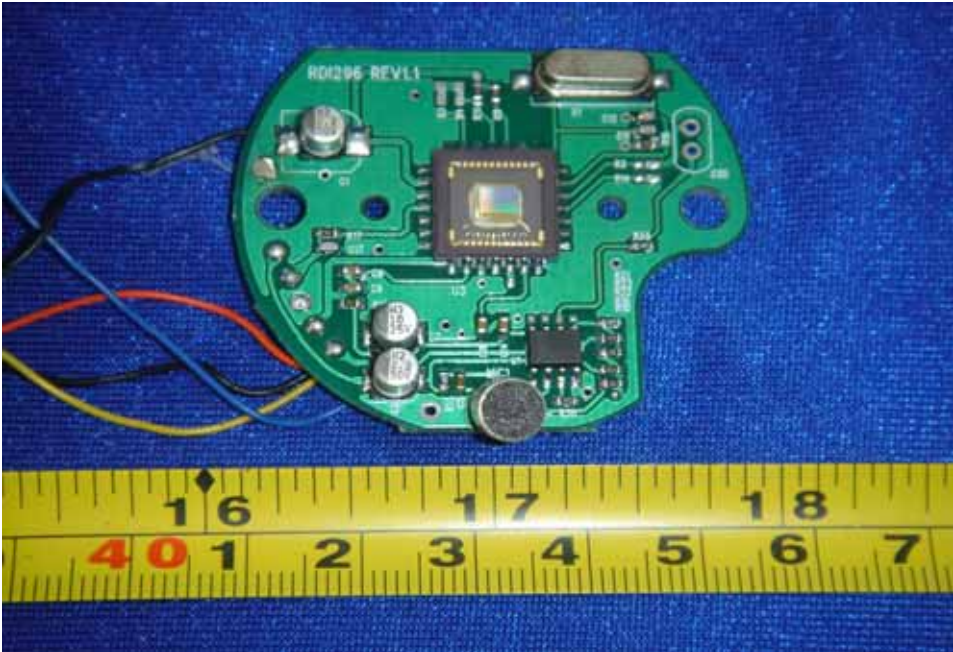

10.4 PCB1 - BackView



10.5 PCB 2- Front View




10.6 PCB 2 - BackView






10.7 PCB 3- Front View

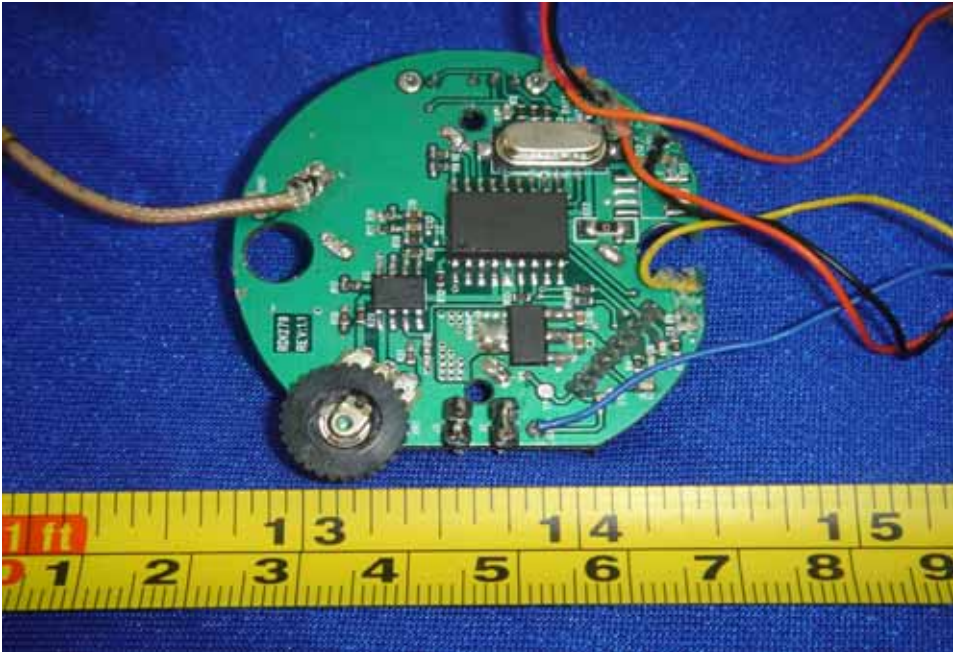


10.8 PCB 3 - BackView

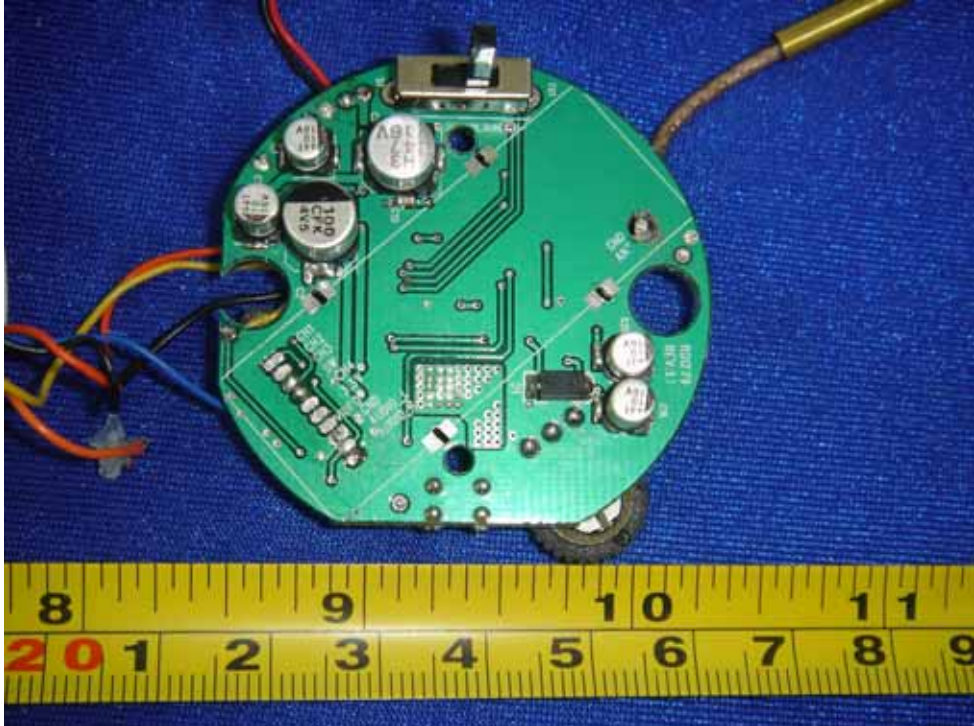

**10.9 PCB 4- Front View**



**10.10 PCB 4 - BackView**

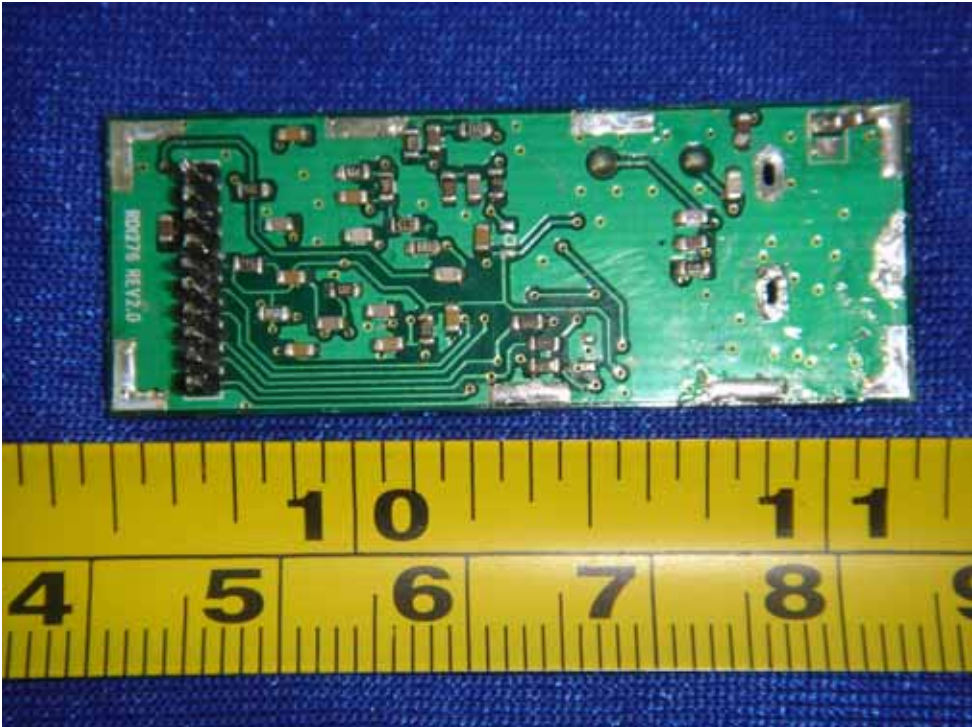

### 11 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT  
EUT Bottom View/proposed FCC Mark Location

