

FCC TEST REPORT

FCC ID : SJ8WL24G

Applicant : **Shenzhen RDI Electronics & Plastics Co., Ltd.**
Building C2 Xingtang Industrial Park, East Baishixia, Fuyong, Baoan,
Shenzhen, PRC

Equipment Under Test (EUT) :


Product description : Game Link

Model No. : Wireless Link

Standards : FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.31,
Paragraph 15.33, Paragraph 15.35, Paragraph 15.249

Date of Test : November 08, 2004

Test Engineer : Jimmy Lee

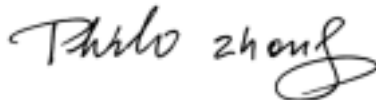Reviewed By : 

PERPARED BY:
Shenzhen Huatongwei International Inspection Co., Ltd
Keji S,12th,Road, Hi-tech Industrial Park, Shenzhen, Guangdong, China

FCC Registration Number: 662850

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 TEST SUMMARY.....	5
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF E.U.T.....	5
4.3 DETAILS OF E.U.T.	5
4.4 DESCRIPTION OF SUPPORT UNITS	5
4.5 STANDARDS APPLICABLE FOR TESTING.....	5
4.6 TEST FACILITY.....	6
4.7 TEST LOCATION.....	6
5 EQUIPMENT USED DURING TEST	7
6 CONDUCTED EMISSION TEST	8
6.1 TEST EQUIPMENT.....	8
6.2 TEST PROCEDURE	8
6.3 CONDUCTED TEST SETUP	9
6.4 EUT OPERATING CONDITION	9
6.5 CONDUCTED EMISSION LIMITS	10
6.6 CONDUCTED EMISSION TEST RESULT.....	10
7 RADIATION EMISSION TEST.....	11
7.1 TEST EQUIPMENT.....	11
7.2 MEASUREMENT UNCERTAINTY.....	11
7.3 TEST PROCEDURE	11
7.4 RADIATED TEST SETUP.....	12
7.5 SPECTRUM ANALYZER SETUP.....	12
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	13
7.7 SUMMARY OF TEST RESULTS.....	13
7.8 EUT OPERATING CONDITION	14
7.9 RADIATED EMISSIONS LIMIT.....	14
7.10 RADIATED EMISSIONS TEST RESULT.....	15
8 BAND EDGE	19
8.1 TEST EQUIPMENT.....	19
8.2 TEST PROCEDURE	19
8.3 RADIATED TEST SETUP.....	20
8.4 EUT OPERATION	20
8.5 BAND EDGE	20
8.6 BAND EDGE TEST RESULT.....	21
9 PHOTOGRAPHS OF TESTING.....	22
9.1 RADIATION EMISSION TEST VIEW	22

- 10 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS23**
- 10.1 EUT - FRONT VIEW23
- 10.2 EUT - BACK VIEW23
- 10.3 EUT – COMPONENT VIEW24
- 10.4 PCB - COMPONENT VIEW25
- 10.5 PCB - SOLDER VIEW25
- 11 FCC ID LABEL26**

3 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 25GHz)	FCC PART 15: 2003	ANSI C63.4: 1992	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 1992	Class B	N/A

4 General Information

4.1 Client Information

Applicant: **Shenzhen RDI Electronics & Plastics Co., Ltd.**
 Address of Applicant: Building C2 Xingtang Industrial Park, East Baishixia, Fuyong,
 Baoan, Shenzhen, PRC

4.2 General Description of E.U.T.

Product description: Game Link
 Model No.: Wireless link

4.3 Details of E.U.T.

Power Supply: 3.3 VDC (Power From Game Boy Serial Port)

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a Game Link. The standards used were FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35, Paragraph 15.249.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 662850**

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 662850, November 17, 2003.

4.7 Test Location

All Emissions tests were performed at:-Shenzhen Huatongwei International Inspection Co., Ltd. at Keji S,12th,Road, Hi-tech Industrial Park, Shenzhen, Guangdong, China.

5 Equipment Used during Test

Conducted Emission Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	Shielding Room	ETS	8 x 4 x 4 m ³	N0.2	N/A	N/A
2	LISN	Schaffner Chase	MNZ050D11	1421	06-11-2004	05-11-2005
3	EMI Test Receiver	Rohde & Schwarz	ESCS30	100038	18-11-2003	17-11-2004
Radiated Emission Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	3m Semi- Anechoic Chamber	ETS	N/A	N/A	05-11-2004	04-11-2005
2	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100009	05-11.2004	04-11-2005
3	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100038	05-11.2004	04-11-2005
4	EMI Test Software	ROHDE & SCHWARZ	ES-K1	N/A	N/A	N/A
5	Bilog Type Antenna	ETS	2075	2346	02-12-2003	01-12-2004
6	Horn Antenna	ROHDE & SCHWARZ	HF906	1000029	05-11.2004	04-11-2005
7	Ultra-Broadband Antenna	ROHDE & SCHWARZ	HL562	100015	02-12-2003	01-12-2004
Common Used Equipment						
Item	Test Equipment	Manufacturer	Model No.	Series No.	Cal. Date	Due date
1	Temperature, Humidity & Barometer	OREGON SCIENTIFIC	BA-888	EMC0001 to EMC0004	25-07-2004	25-07-2005
2	DMM	FLUKE	73	70681569 or 70671122	23-07-2004	23-07-2005
3	Nintendo	Game boy	AGS-001	XU12232530	N/A	N/A

6 Conducted Emission Test

Product:	Game Link / Wireless Link
Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	-----
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 Test Equipment


Please refer to Section 5 this report.

6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

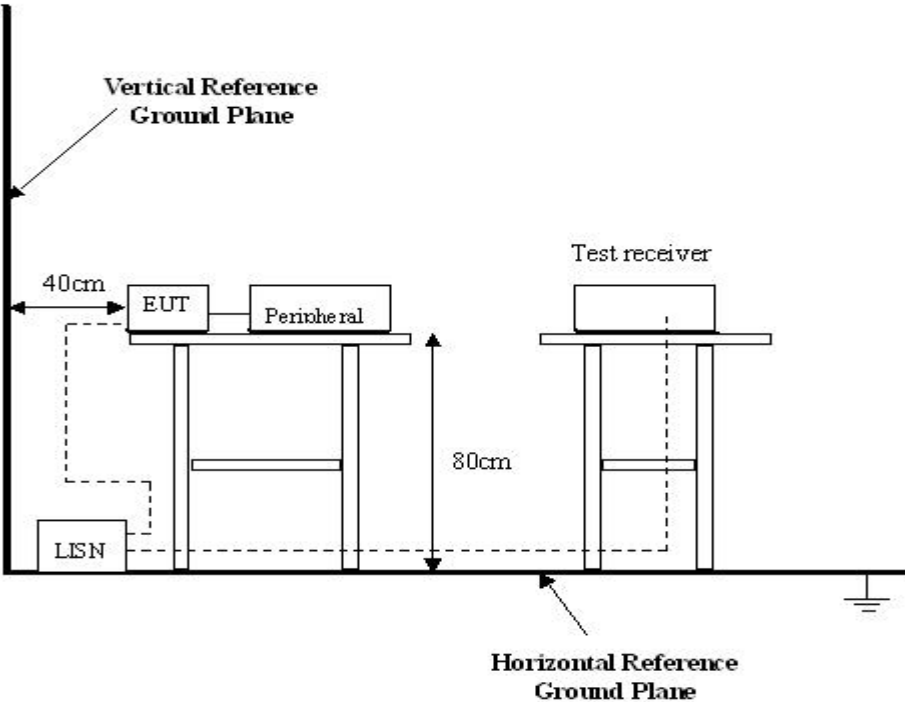

6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

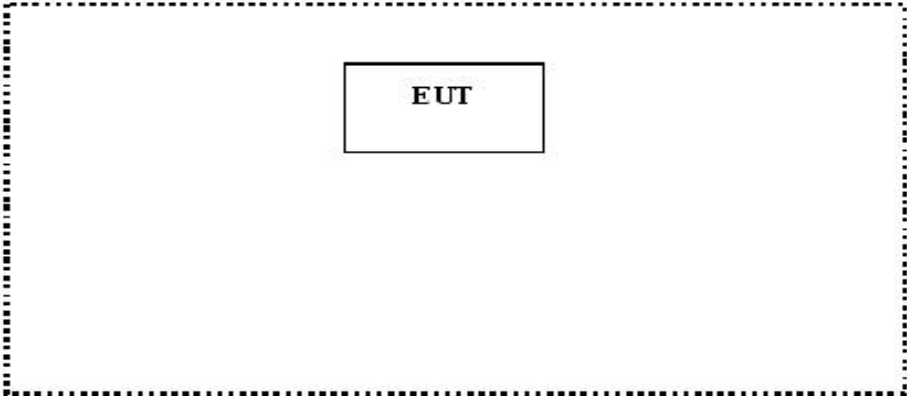

6.5 Conducted Emission Limits

66-56 dB μ V/m between 0.15MHz & 0.5MHz

56 dB μ V/m between 0.5MHz & 5MHz

60 dB μ V/m between 5MHz & 30MHz

Note: In the above limits, the tighter limit applies at the band edges.

6.6 Conducted Emission Test Result

Owing to the DC operation of EUT, this test is not performed.

7 Radiation Emission Test

Product:	Game Link / Wireless Link
Test Requirement:	FCC Part15 Paragraph 15.209 and Paragraph 15.249
Test Method:	Based on FCC Part15 Paragraph 15.31 and Paragraph 15.33
Test Date:	November 08, 2004
Frequency Range:	30MHz to 25GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

7.1 Test Equipment

Please refer to Section 5 this report.

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at SZHTW is +4.0 dB.

7.3 Test Procedure

1. For the radiated emissions test, since the EUT does not have a power source, there was no connection to AC outlets.
2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
3. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.
4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4, The specification used in this report was the FCC Part15 Paragraph 15.209 and Paragraph 15.249 limits.

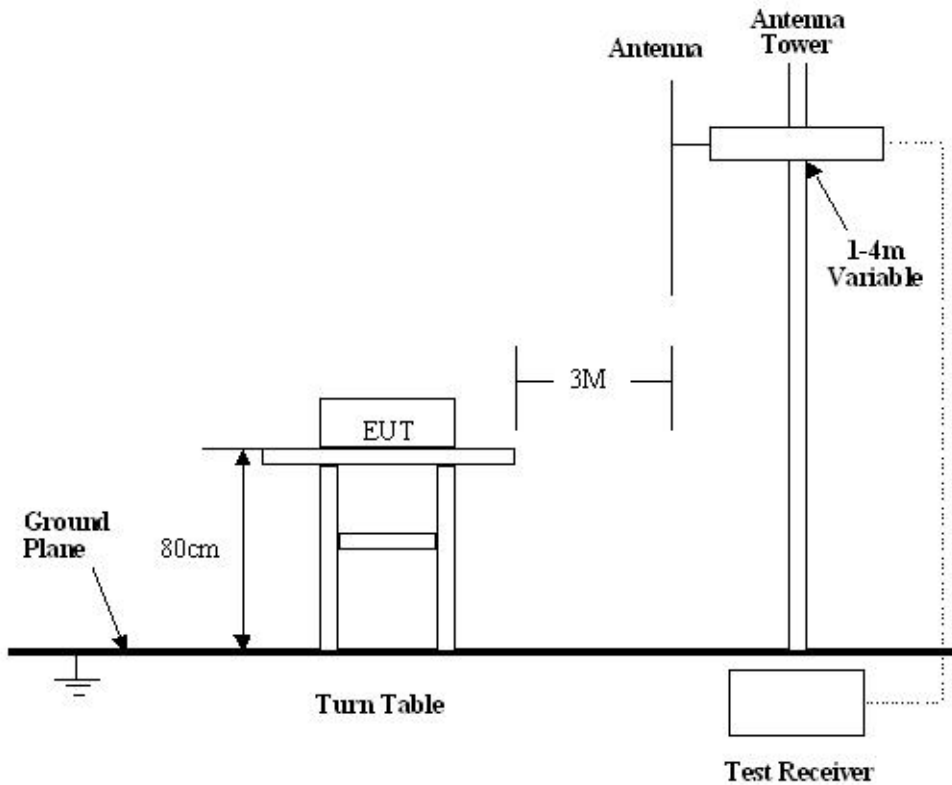

7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.209 and Paragraph 15.249 Rules, the system was tested to 25000 MHz.

- Start Frequency30 MHz
- Stop Frequency25000 MHz
- Sweep Speed Auto
- IF Bandwidth100 kHz
- Video Bandwidth1 MHz
- Quasi-Peak Adapter Bandwidth120 kHz
- Quasi-Peak Adapter Mode.....Normal
- Resolution Bandwidth1MHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.209 and Paragraph 15.249 standards.

7.8 EUT Operating Condition

Same as section 6.4 of this report.

7.9 Radiated Emissions Limit

A. FCC Part 15 subpart C Paragraph 15.249 Limit

Fundamental Frequency	Field Strength of Fundamental		Field Strength of Harmonics	
	mV/m	dBuV/m	uV/m	dBuV/m
902-928MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25GHz	250	108	2500	68

- Note:**
- (1) $RF\ Voltage(dBuV) = 20 \log RF\ Voltage(uV)$
 - (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (3) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
 - (4) Above 1GHz, do a Peak and average measurements for all emissions, Limit for peak is 74dBuV/m, According to Part 15.35(b) and average is 54BuV/m.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:**
- (1) $RF\ Voltage(dBuV) = 20 \log RF\ Voltage(uV)$
 - (2) In the Above Table, the tighter limit applies at the band edges.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna.

7.10 Radiated Emissions Test Result

Formula of conversion factors: the field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the presselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

A. Fundamental Radiated Emission Data

Test Item:	Fundamental Radiated Emission Data
Test Voltage:	DC 3.3V (Power From Game Boy Serial Port)
Test Mode:	On
Temperature:	24 °C
Humidity:	52%RH
Test Result:	PASS

1GHZ-25GHZ Radiated Emission Data

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
Low frequency						
2404.664592	Vertical	86.60	94.0	7.40	2.0	180
4807.595368	Vertical	48.04	54.0	5.96	2.0	45
7212.920953	Vertical	38.45	54.0	15.55	2.0	90
12278.356713	Vertical	42.45	54.0	11.55	1.5	45
24103.907615	Vertical	47.16	54.0	6.84	1.8	180
2404.664592	Horizontal	88.79	94.0	5.21	1.2	90
4807.778363	Horizontal	43.42	54.0	10.58	2.0	180
7212.7870951	Horizontal	40.85	54.0	13.15	1.8	45
12279.356713	Horizontal	41.74	54.0	12.26	1.3	90
24123.127616	Horizontal	47.61	54.0	6.39	1.8	45
Middle frequency						
2425.885772	Vertical	86.21	94.0	7.79	2.0	90
4847.695391	Vertical	47.94	54.0	6.06	1.8	45
7368.428858	Vertical	39.43	54.0	14.57	1.5	90
12278.356713	Vertical	42.45	54.0	11.55	2.5	270
24303.907615	Vertical	46.83	54.0	7.17	2.0	90
2425.885772	Horizontal	89.14	94.0	4.86	1.5	90
4863.887776	Horizontal	44.21	54.0	9.79	2.0	180
7376.793587	Horizontal	40.10	54.0	13.90	1.5	45
12254.509018	Horizontal	42.53	54.0	11.47	1.6	60
24303.807615	Horizontal	47.23	54.0	6.77	2.0	180


High frequency						
2480.3345786	Vertical	85.45	94.0	8.55	2.0	90
4960.7802137	Vertical	45.36	54.0	8.64	2.0	60
7441.1655398	Vertical	41.69	54.0	12.31	2.0	45
12401.459956	Vertical	43.34	54.0	10.66	1.5	90
24803.891442	Vertical	46.33	54.0	7.67	1.8	180
2480.101887	Horizontal	87.68	94.0	6.32	1.2	90
4952.548321	Horizontal	44.84	54.0	9.16	2.0	90
7433.737182	Horizontal	41.45	54.0	12.55	1.8	45
12385.095834	Horizontal	43.78	54.0	10.22	1.3	60
2497.573176	Horizontal	45.78	54.0	8.22	1.8	180

- Note:** (1) Above 1GHz, do a Peak and average measurements for all emissions, Limit for peak is 74dBuV/m, According to Part 15.35(b) and average is 54BuV/m.
(2) Emission Level = Reading Level + Probe Factor + Cable Loss.


B. General Radiated Emission Data

Test Item: General Radiated Emission Data
Test Voltage: DC 3.3V (Power From Game Boy Serial Port)
Test Mode: On
Temperature: 24 °C
Humidity: 52%RH
Test Result: PASS
Remarks: No significant emissions above the equipment noise floor were detected.

Horizontal:

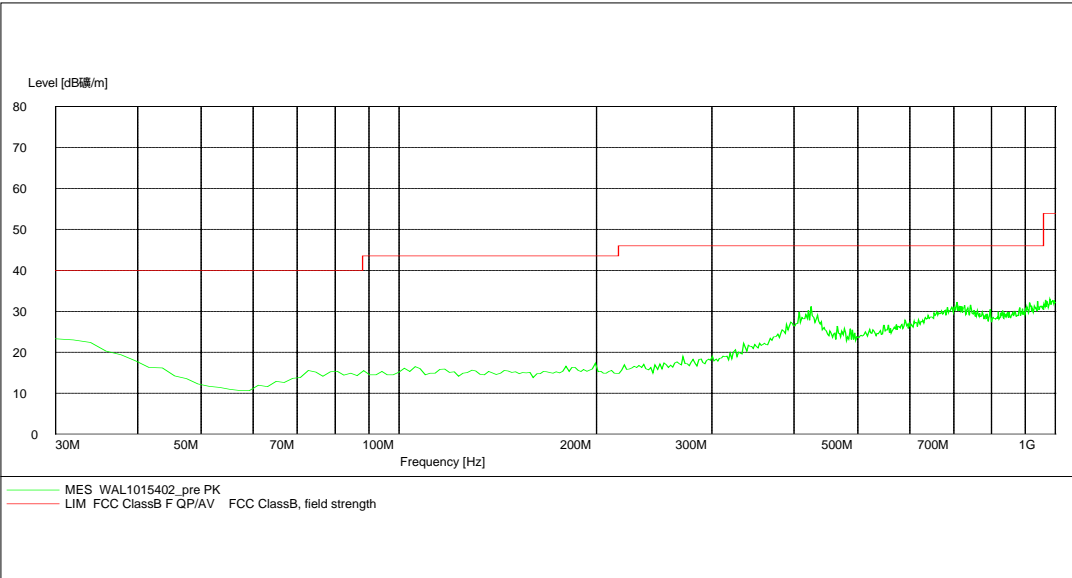

Vertical:

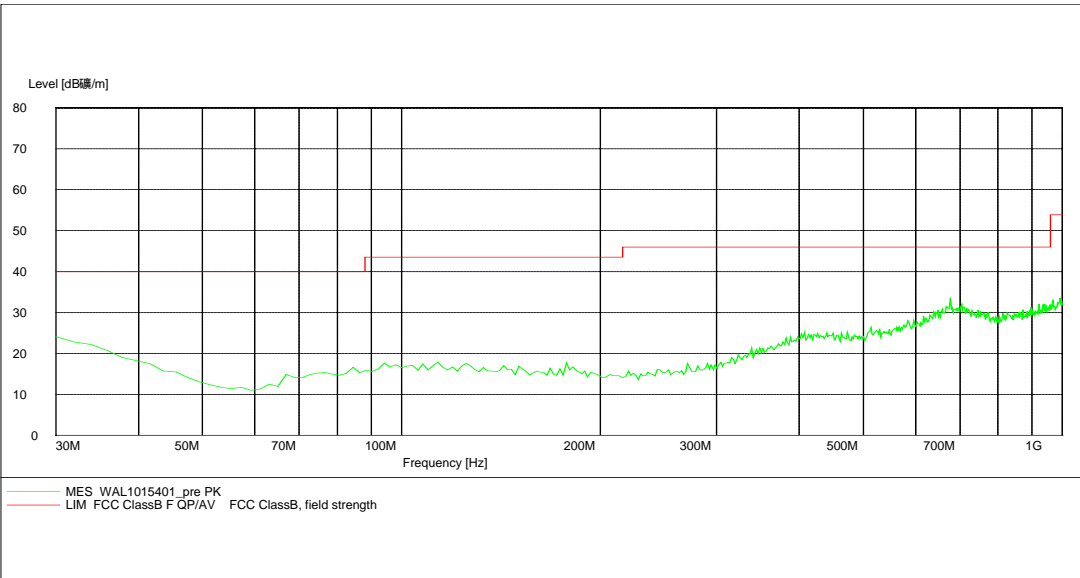

8 Band Edge


8.1 Test Equipment

Please refer to Section 5 this report.

8.2 Test Procedure

1. The EUT was tested according to ANSI C63.4. The radiated test was performed at Shenzhen Huatongwei International Inspection Co., Ltd. This lab has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 662850, November 17, 2003.
2. The EUT, peripherals were put on the turntable which table size is 1mX1.5m, table high 0.8m. All set up is according to ANSI C63.4.
3. With the EUT's antenna attached, The EUT's radiated emission power was received by the test antenna which was connected to the spectrum analyser with the START and STOP frequencies set to the EUT's operation band. Measurements were made at 3 meters.
4. The antenna high were varied from 1m to 4m high to find the maximum emission for each frequency.
5. Maximizing procedure was performed on the highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak reading was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "QP" in the data table.
6. The antenna polarization: Vertical polarization and horizontal polarization.

8.3 Radiated Test Setup

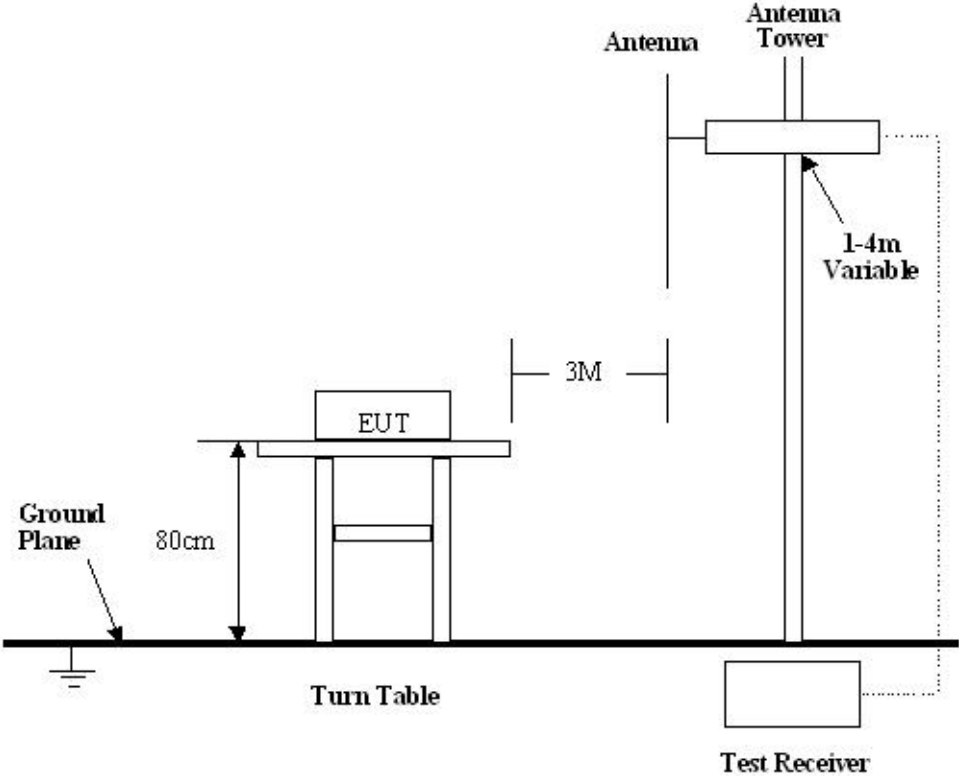

8.4 EUT Operation


Same as section 6.4 of this report.

8.5 Band Edge

Requirements:FCC 15.249(c),The emission power at the START and STOP frequencies shall be at least 50dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209.

8.6 Band Edge Test Result

Product: Game Link / Wireless Link
 Test Item: Band Edge Test
 Test Voltage: DC 3.3V (Power From Game Boy Serial Port)
 Test Mode: On
 Temperature: 24 °C
 Humidity: 52%RH

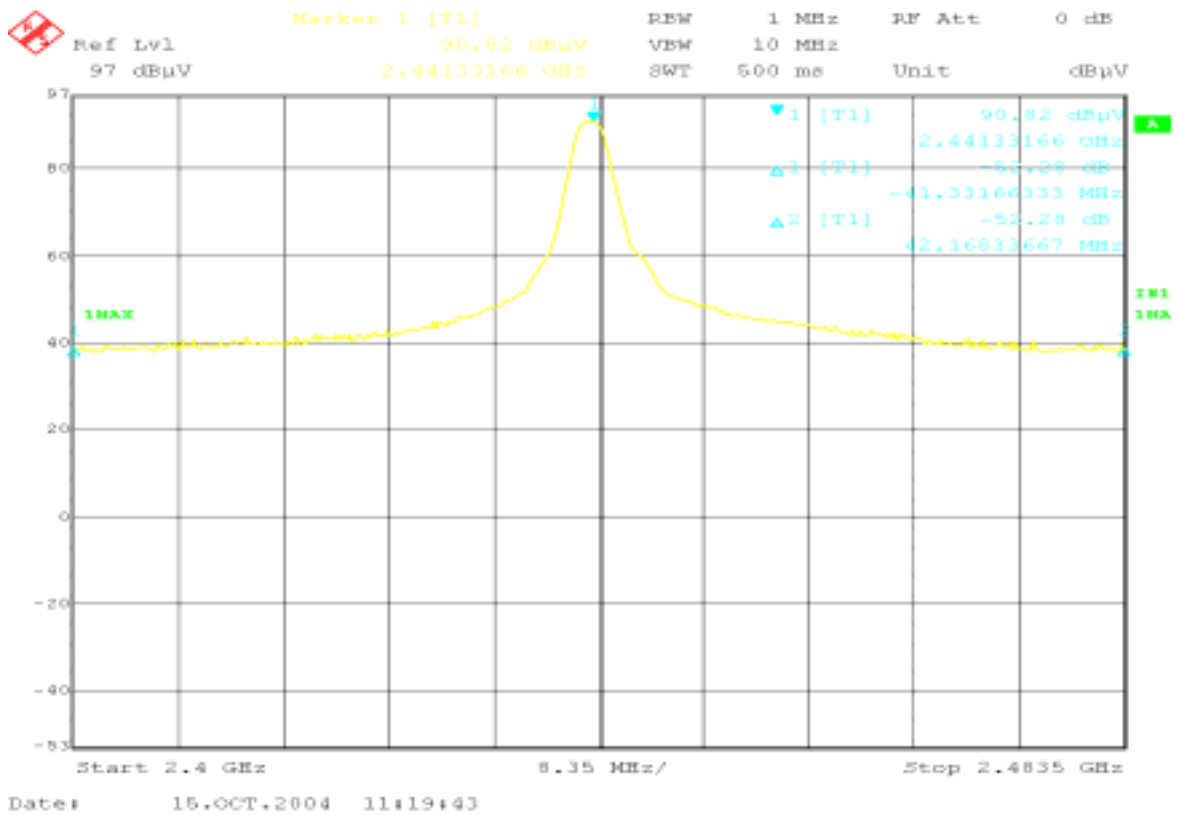

Note: (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.249.


9 Photographs of Testing

9.1 Radiation Emission Test View



10 Photographs - Constructional Details

10.1 EUT - Front View

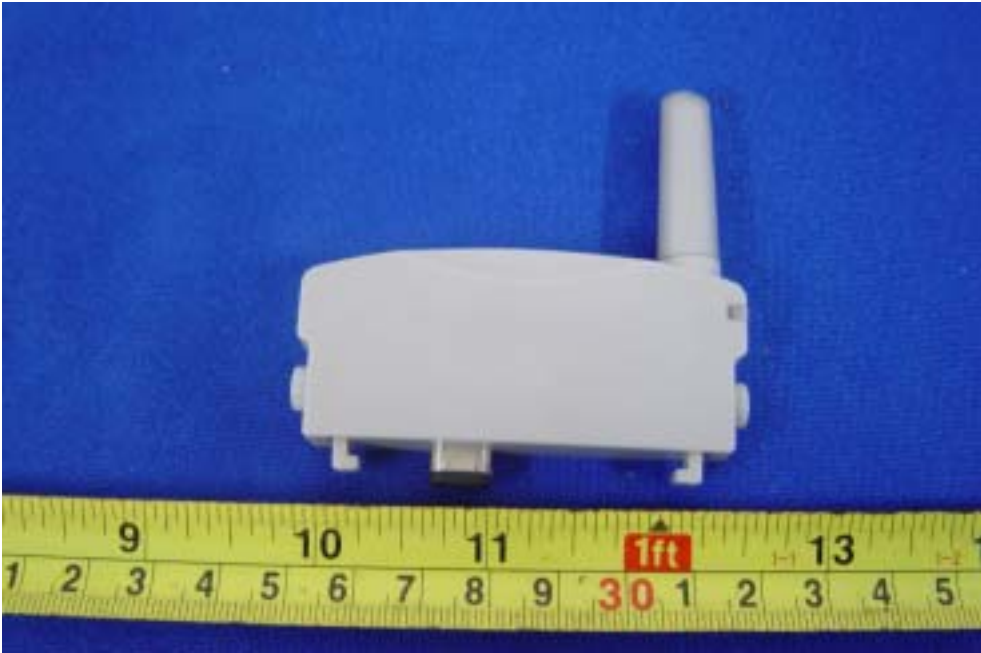


10.2 EUT - Back View




10.3 EUT – Component View



10.4 PCB - Component View

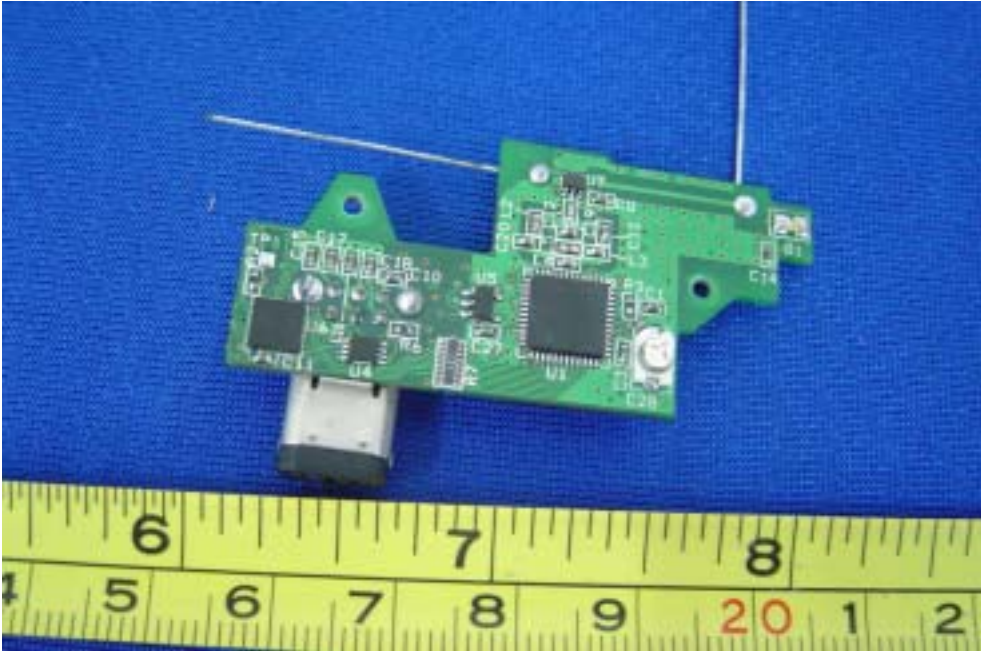

10.5 PCB - Solder View

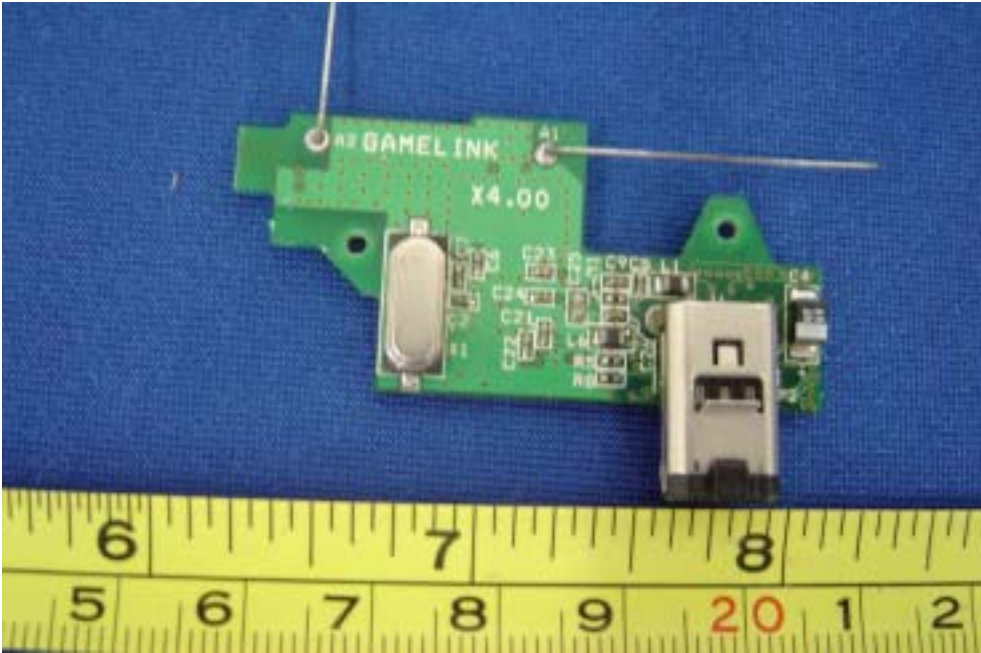

11 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

