



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page: 1 of 55
Date: Nov. 08, 2007

Product Name: Bluetooth Ver2.0+EDR USB
Model Number: BT-MicroEDR2
Applicant: Planex Communications Inc.
5F, No.7, Alley 6, Lane 235, Baociao Rd., Sindian City,
Taipei County 231, Taiwan, R.O.C.

Date of Receipt: Nov. 06, 2007
Finished date of Test: Jul. 17, 2007
Applicable Standards: 47 CFR Part 15, Subpart C
ANSI C63.4:2003

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Tested By: Jeff Yu, Date: Nov/08/2007
(Jeff Yu)

Approved By: JH, Date: 11/8/2007
(Johnson Ho, Director)



TABLE OF CONTENTS

1. DOCUMENT POLICY AND TEST STATEMENT.....	4
1.1 DOCUMENT POLICY	4
1.2 TEST STATEMENT	4
1.3 EUT MODIFICATION.....	4
2. DESCRIPTION OF EUT AND TEST MODE	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF SUPPORT UNIT.....	5
2.3 DESCRIPTION OF TEST MODE	6
3. DESCRIPTION OF APPLIED STANDARDS	6
4. TECHNICAL CHARACTERISTICS TEST	7
4.1 CHANNEL SEPARATION TEST	7
4.1.1 LIMIT	7
4.1.2 TEST EQUIPMENT	7
4.1.3 TEST SET-UP.....	7
4.1.4 TEST PROCEDURE.....	7
4.1.5 EUT OPERATING CONDITION.....	8
4.1.6 TEST RESULT.....	8
4.2 20DB BANDWIDTH.....	12
4.2.1 LIMIT	12
4.2.2 TEST EQUIPMENT	12
4.2.3 TEST SET-UP.....	12
4.2.4 TEST PROCEDURE.....	12
4.2.5 TEST RESULT.....	13
4.3 QUANTITY OF HOPPING CHANNEL TEST	16
4.3.1 LIMIT.....	16
4.3.2 TEST EQUIPMENT	16
4.3.3 TEST SET-UP.....	16
4.3.4 TEST PROCEDURE.....	16
4.3.5 EUT OPERATING CONDITION.....	16
4.3.6 TEST RESULT.....	17
4.4 TIME OF OCCUPANCY (DWELL TIME).....	18
4.4.1 LIMIT	18
4.4.2 TEST EQUIPMENT	18
4.4.3 TEST SET-UP.....	18
4.4.4 TEST PROCEDURE.....	18
4.4.5 EUT OPERATING CONDITION.....	18
4.4.6 TEST RESULT.....	19
4.5 CONDUCTED EMISSION	23
4.5.1 LIMIT	23
4.5.2 TEST EQUIPMENT	23
4.5.3 TEST SETUP	24



TEST REPORT

4.5.4 TEST PROCEDURE	24
4.5.5 EUT OPERATING CONDITION	25
4.5.6 TEST RESULT	26
4.6 RADIATED EMISSION TEST	29
4.6.1 LIMIT	29
4.6.2 TEST EQUIPMENT	30
4.6.3 TEST SET-UP	31
4.6.4 TEST PROCEDURE	32
4.6.5 EUT OPERATING CONDITION	32
4.6.6 RADIATED EMISSION TEST RESULT	33
4.7 PEAK POWER TEST	41
4.7.1 LIMIT	41
4.7.2 TEST EQUIPMENT	41
4.7.3 TEST SET-UP	42
4.7.4 TEST PROCEDURE	42
4.7.5 EUT OPERATING CONDITION	42
4.7.6 TEST RESULT	42
4.8 BAND EDGE TEST	46
4.8.1 LIMIT	46
4.8.2 TEST EQUIPMENT	46
4.8.3 TEST SET-UP	47
4.8.4 TEST PROCEDURE	48
4.8.5 EUT OPERATING CONDITION	48
4.8.6 TEST RESULT	48
5 ANTENNA APPLICATION	51
5.1 ANTENNA REQUIREMENT	51
5.2 RESULT	51
6. PHOTOS OF TESTING	52
7. TERMS OF ABBREVIATION	55



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:4 of 55
Date: Nov. 08, 2007

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- AC power source, 120 VAC/60 Hz, was used during the test.

1.3 EUT MODIFICATION

- No modification in SRT Lab.



2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth Ver2.0+EDR USB
MODEL NO.	BT-MicroEDR2
POWER SUPPLY	DC 5 V, 0.1A
FREQUENCY BAND	2.401GHz ~2.483GHz
CARRIER FREQUENCY	2.402GHz ~2.480GHz
NUMBER OF CHANNEL	79
CHANNEL SPACING	1 MHz
RATED RF OUTPUT POWER	4dBm
MODULATION TYPE	GFSK
DUTY CYCLE	50%
MODE OF OPERATION	duplex
BIT RATE OF TRANSMISSION	2.1 Mbps
ANTENNA TYPE	PCB print
ANTENNA GAIN	-2 dBi
OPERATING TEMPERATURE	-10~55°C
CHANNEL BANDWIDTH	1MHz

NOTE :

For more detailed information, please refer to the EUT's specification or user's manual provided by manufacturer.

2.2 DESCRIPTION OF SUPPORT UNIT

The transmitter part of EUT was tested with a PC system and configured by the requirement of ANSI C63.4. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

No	Device	Brand	Model #	FCC ID/DoC	Cable
1	NOTEBOOK	COMPAQ	Presario 2100	DOC	2.0m unshielded power cord
2	BlueICE Headset	Macsense	BTi-660	UZ5-BHS110 0001	N/A

NOTE : For the actual test configuration, please refer to the photos of testing.



2.3 DESCRIPTION OF TEST MODE

79 channels are provided by EUT. Three channels of lower, medium and higher were chosen for test.

Channel	Frequency (MHz)
0	2402
39	2448
78	2480

NOTE :

1. Below 1 GHz, the channel 0, 39 and 78 were pre-tested in chamber. The channel 78, worst case one, was chosen for radiated emission test.
2. Above 1 GHz, the channel 0, 39 and 78 were tested individually.

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of wireless product and to be connected with a PC system for normal use. According to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C
ANSI C63.4: 2003

All tests have been performed and recorded as the above standards.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A07110603 Report No.: FCCA07070402-04 FCCID: SJ9-BTMicroEDR2 Page:7 of 55 Date: Nov. 08, 2007
---	----------------------	--

4. TECHNICAL CHARACTERISTICS TEST

4.1 CHANNEL SEPARATION TEST

4.1.1 LIMIT

FCC Part15, Subpart C Section 15.247(a)(1). Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz


4.1.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test :

Equipment/ Facilities	Specifications	Manufacturer	Model#/ Serial#	Due Date of Cal. & Cal. Center
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR. 2008 ETC

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.1.3 TEST SET-UP



The EUT was connected to a spectrum through a 50Ω RF cable.

4.1.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:8 of 55
Date: Nov. 08, 2007

4.1.5 EUT OPERATING CONDITION

1. Set the EUT under transmission condition continuously at a specific channel frequency.
2. The EUT was set to the highest available power level.

4.1.6 TEST RESULT

Temperature:	22°C	Humidity:	63%RH
Spectrum Detector:	PK	Tested by:	Jeff Yu
Test Result:	PASS	Tested Date:	Jul. 13, 2007

Channel Number	Channel Frequency (MHz)	Separation Read Value (kHz)	Minimum Limit(20dB Bandwidth) (kHz)
0	2402	1008.000	25
39	2441	1000.000	25
78	2480	1016.000	25



Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
 Report No.: FCCA07070402-04
 FCCID: SJ9-BTMicroEDR2
 Page:9 of 55
 Date: Nov. 08, 2007

CH0:




*RBW 100 kHz Marker 1 [T1]
 *VBW 100 kHz -1.15 dBm
 *SWT 100 ms 2.403024000 GHz

Ref 10 dBm

*Att 20 dB

1 PK
VIEW

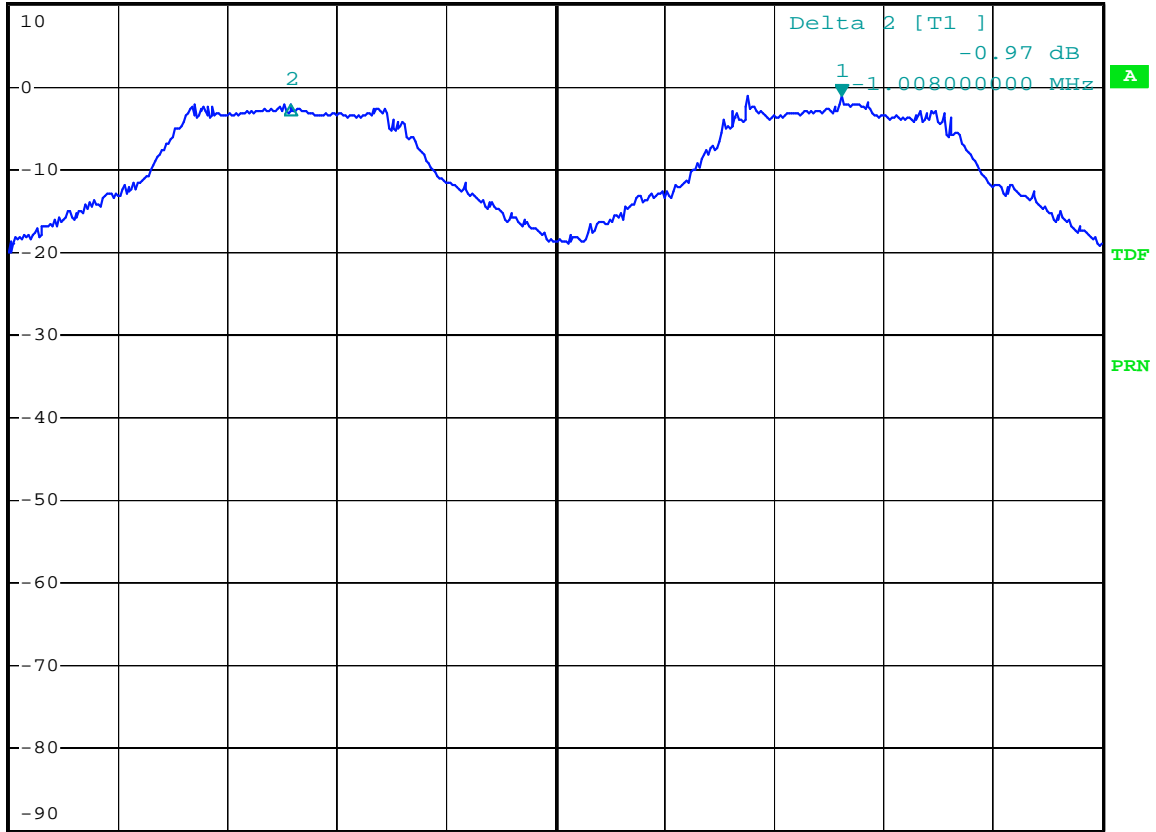

Center 2.4025 GHz

200 kHz/

Span 2 MHz

Date: 13.JUL.2007 12:07:18



Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
 Report No.: FCCA07070402-04
 FCCID: SJ9-BTMicroEDR2
 Page:10 of 55
 Date: Nov. 08, 2007

CH39:




*RBW 100 kHz Delta 2 [T1]
 *VBW 100 kHz -0.05 dB
 *SWT 100 ms -1.000000000 MHz

Ref 20 dBm

*Att 30 dB

1 PK
VIEW

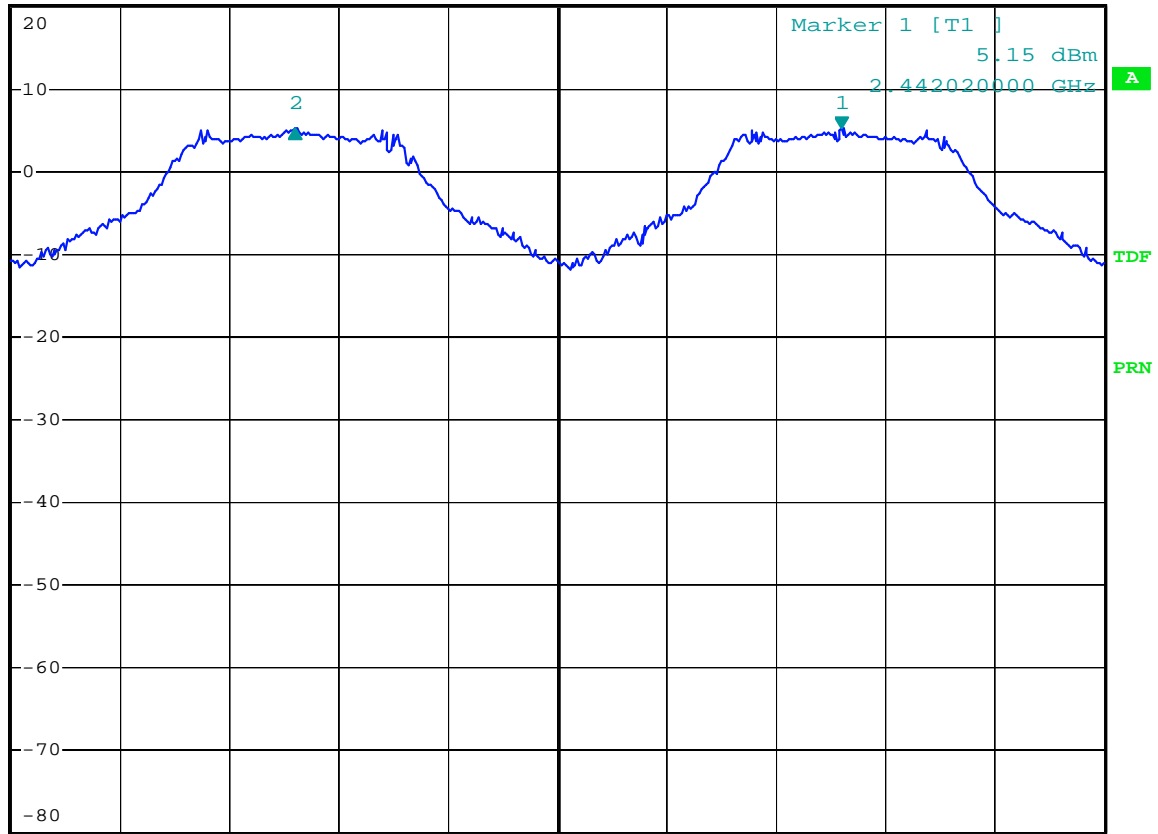

Center 2.4415 GHz

200 kHz/

Span 2 MHz

Date: 13.JUL.2007 12:15:03




Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:11 of 55
Date: Nov. 08, 2007

CH78:

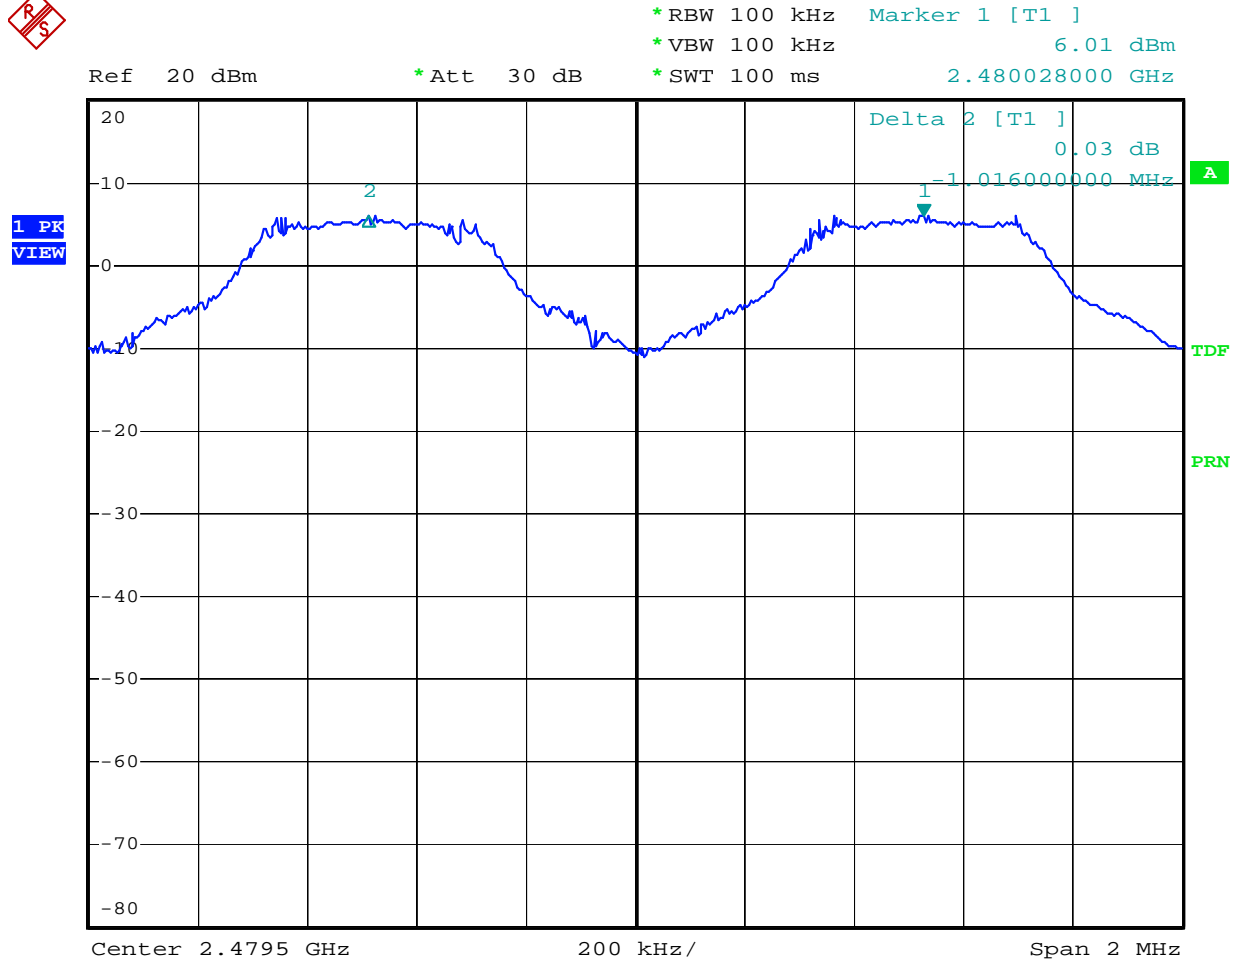

Date: 13.JUL.2007 12:22:35

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A07110603 Report No.: FCCA07070402-04 FCCID: SJ9-BTMicroEDR2 Page:12 of 55 Date: Nov. 08, 2007
---	----------------------	---

4.2 20dB Bandwidth

4.2.2 LIMIT

Frequency Range (MHz)	Quantity of Hopping Channel	Limit(kHz)			
		50	25	15	75
902-928		<250	>250	NA	NA
2400-2483.5		NA	NA	>1000	<1000


4.2.2 TEST EQUIPMENT

The following test equipment was used during the test:

Equipment/Facilities	Specifications	Manufacturer	Model#/Serial#	Due Date of Cal. & Cal. center
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	APR. 2008 R&S

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST SET-UP



The EUT was connected to a spectrum through a 50Ω RF cable.

4.2.4 TEST PROCEDURE

The EUT was operated in hopping mode or any specific channel.
 Printed out the test result from the spectrum by hard copy function.



Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT


Reference No.: A07110603
 Report No.: FCCA07070402-04
 FCCID: SJ9-BTMicroEDR2
 Page:13 of 55
 Date: Nov. 08, 2007

4.2.5 TEST RESULT

Temperature:	<u>22°C</u>	Humidity:	<u>63%RH</u>
Spectrum Detector:	<u>PK</u>	Tested by:	<u>Jeff Yu</u>
Test Result:	<u>PASS</u>	Tested Date:	<u>Jul.13, 2007</u>

Channel Number	Channel Frequency (MHz)	20dB Down Bandwidth (kHz)
0	2402	948
39	2441	920
78	2480	974

CH0:

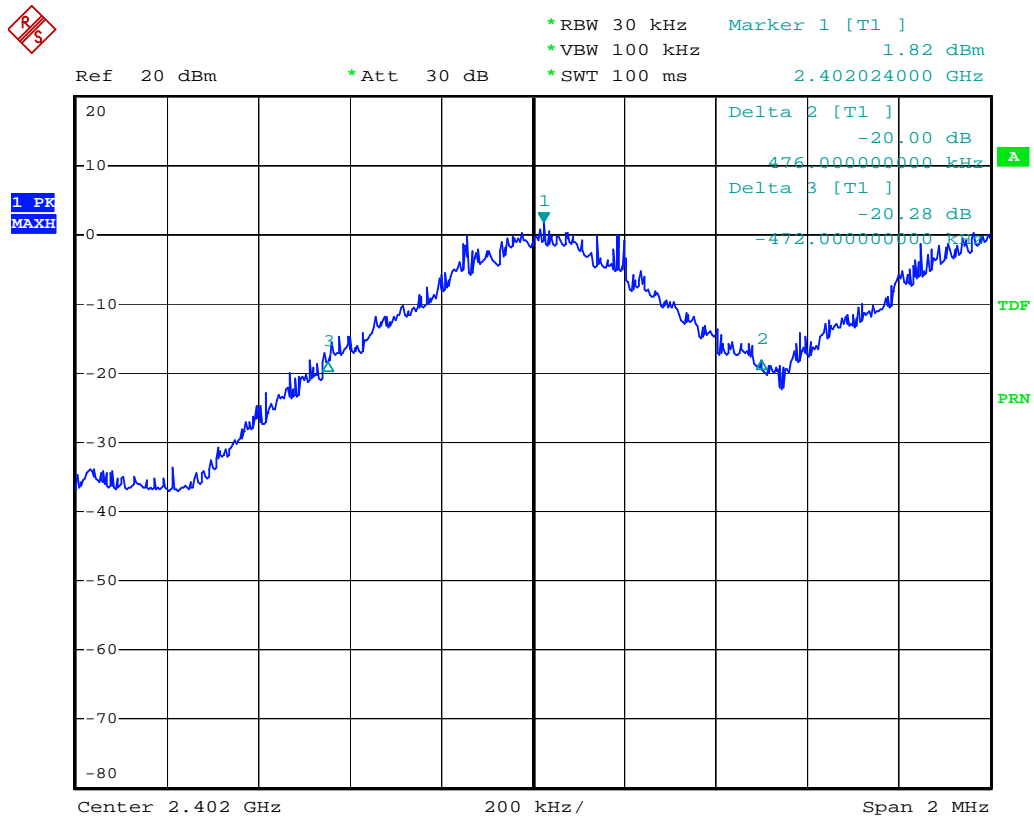

Date: 13.JUL.2007 13:58:23




Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:14 of 55
Date: Nov. 08, 2007

CH39:

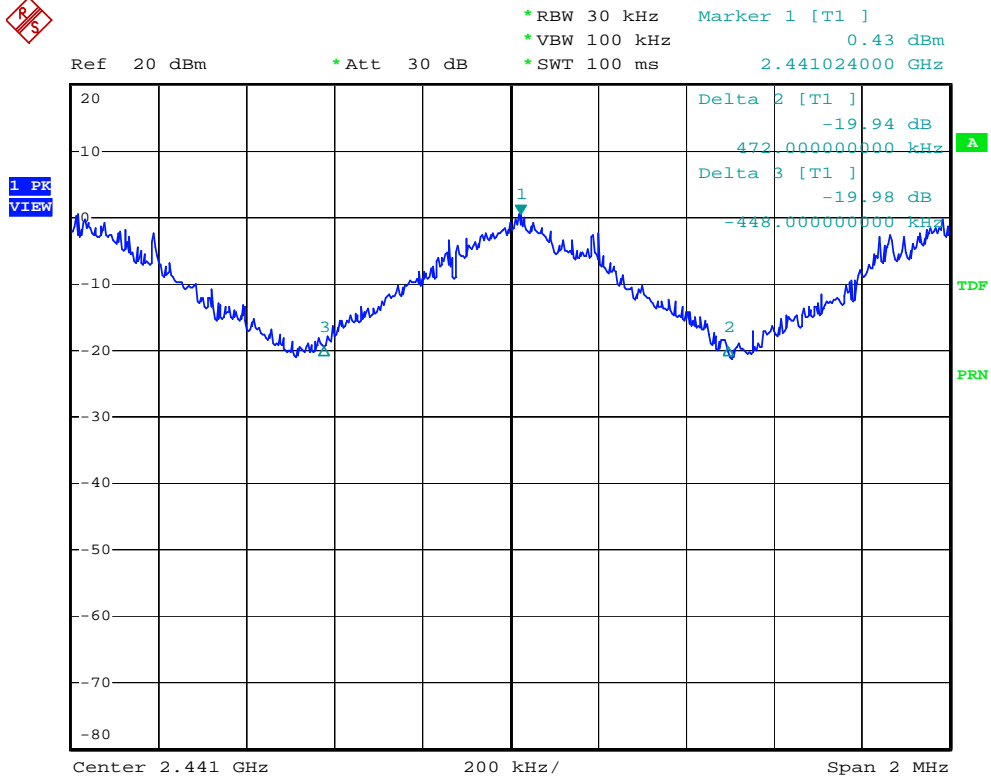

Date: 13.JUL.2007 14:02:03



Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
 Report No.: FCCA07070402-04
 FCCID: SJ9-BTMicroEDR2
 Page:15 of 55
 Date: Nov. 08, 2007

CH78:




*RBW 30 kHz Marker 1 [T1]
 *VBW 100 kHz 0.02 dBm
 *SWT 100 ms 2.480028000 GHz

Ref 20 dBm

*Att 30 dB

1 PK
VIEW

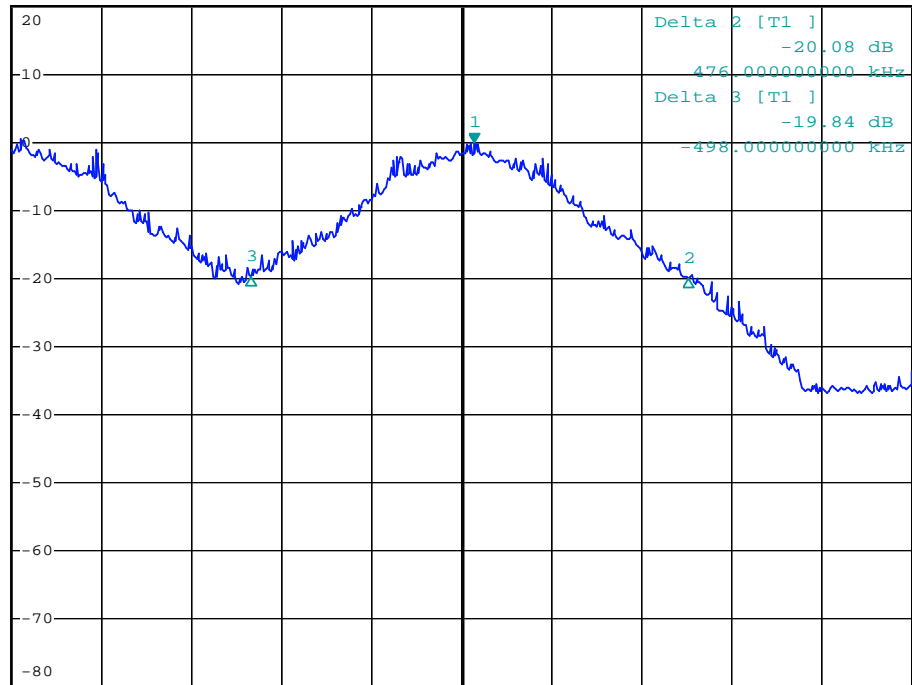

Center 2.48 GHz

200 kHz/

Span 2 MHz

Date: 13.JUL.2007 14:19:20

4.3 QUANTITY OF HOPPING CHANNEL TEST

4.3.1 LIMIT

FCC Part15, Subpart C Section 15.247.

Frequency Range (MHz)	Limit (Quantity of Hopping Channel)			
	20dB Bandwidth <250kHz	20dB Bandwidth >250kHz	20dB Bandwidth <1MHz	20dB Bandwidth >1MHz
902-928	50	25	N/A	N/A
2400-2483.5	N/A	N/A	75	15
5725-5850	N/A	N/A	75	N/A


4.3.2 TEST EQUIPMENT

The following test equipment was used during the test:

Equipment/Facilities	Specifications	Manufacturer	Model#/Serial#	Due Date of Cal. & Cal. Center
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR. 2008 ETC

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST SET-UP



The EUT was connected to a spectrum through a 50Ω RF cable.

4.3.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

4.3.5 EUT OPERATING CONDITION

1. Set the EUT under frequency hopping transmission condition.
2. The EUT was set to the highest available power level.



Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT


Reference No.: A07110603
 Report No.: FCCA07070402-04
 FCCID: SJ9-BTMicroEDR2
 Page:17 of 55
 Date: Nov. 08, 2007

4.3.6 TEST RESULT

Temperature:	<u>24°C</u>	Humidity:	<u>60%RH</u>
Spectrum Detector:	<u>PK</u>	Tested by:	<u>Jeff Yu</u>
Test Result:	<u>PASS</u>	Tested Date:	<u>Jul.13,2007</u>

Hopping Channel Frequency Range(MHz)	Quantity of Hopping Channel Read Value	Quantity of Hopping Channel Limit
2402~2480	79	75

CH0-CH78

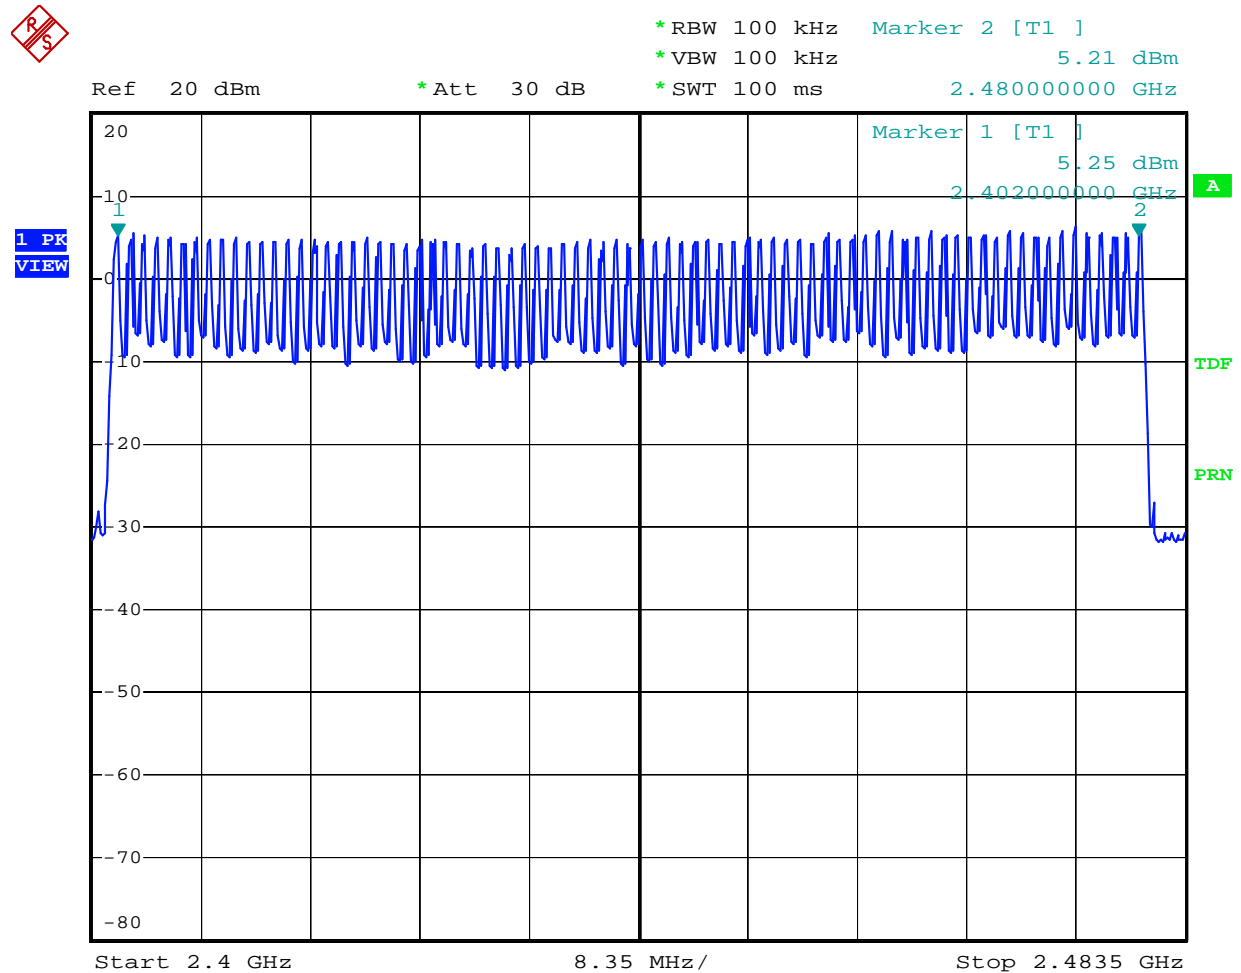

Date: 13.JUL.2007 12:30:04

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	<h1>TEST REPORT</h1>	Reference No.: A07110603 Report No.: FCCA07070402-04 FCCID: SJ9-BTMicroEDR2 Page:18 of 55 Date: Nov. 08, 2007
---	----------------------	---

4.4 TIME OF OCCUPANCY (Dwell Time)

4.4.1 LIMIT

FCC Part15, Subpart C Section 15.247.

Frequency Range (MHz)	Limit (ms)		
	20dB Bandwidth <250kHz(50Channel)	20dB Bandwidth >250kHz(25Channel)	20dB Bandwidth <1MHz(75Channel)
902-928	400(20s)	400(10s)	NA
2400-2483.5	NA	NA	400(30s)
5725-5850	NA	NA	400(30s)

NOTE: The “()” is all channel's average time of occupancy.


4.4.2 TEST EQUIPMENT

The following test equipment was used during the test:

Equipment/Facilities	Specifications	Manufacturer	Model#/Serial#	Due Date of Cal. & Cal. Center
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR. 2008 ETC

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST SET-UP



The EUT was connected to a spectrum through a 50Ω RF cable.

4.4.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

4.4.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan


TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:19 of 55
Date: Nov. 08, 2007



4.4.6 TEST RESULT

Temperature: 22°C Humidity: 60%RH
Spectrum Detector: PK Tested by: Jeff Yu
Test Result: PASS Tested Date: Jul. 9,2007

Channel Number	Channel Frequency (MHz)	Pulse Time (µs)	Period Time (s)	Time of Occupancy (Dwell Time) (ms)	Average Time of Occupancy Limit (ms)
0	2402.00	152	31.6	48.032	400
39	2441.00	210	31.6	66.36	400
78	2480.00	152	31.6	48.032	400

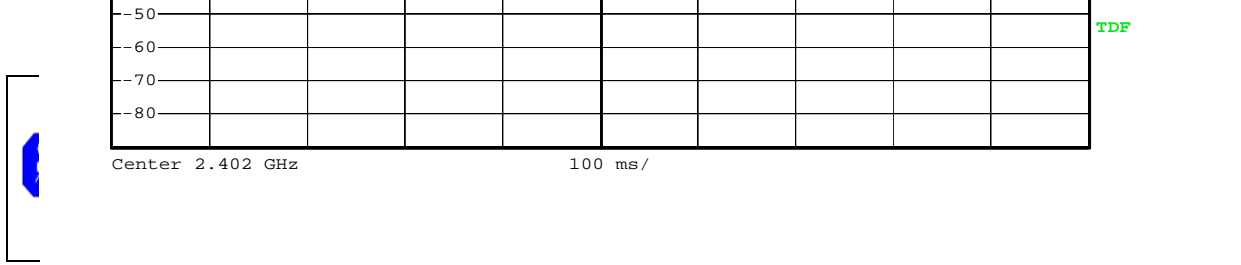

Date: 16.APR.2007 20:43:04

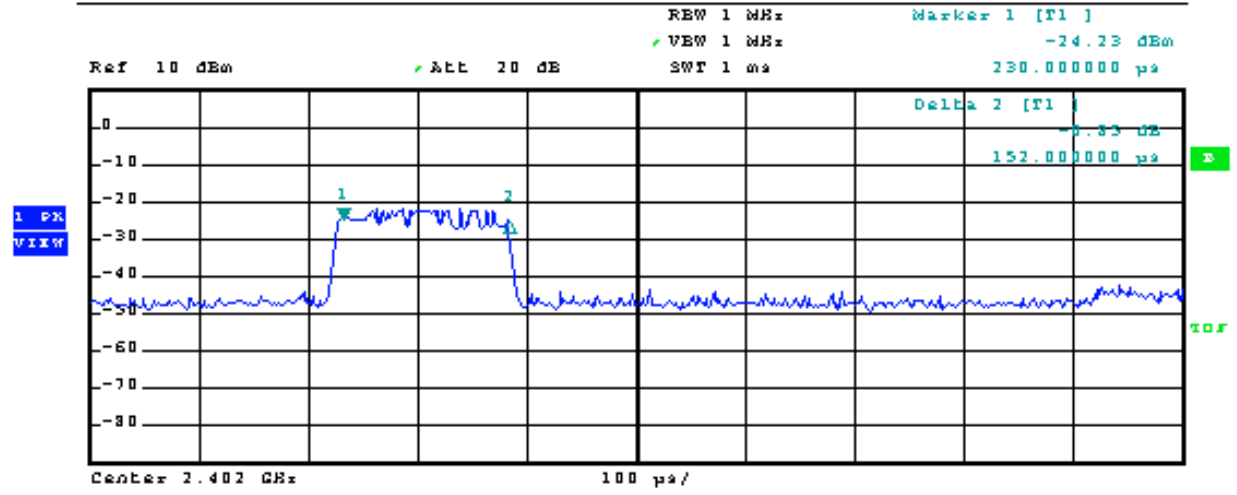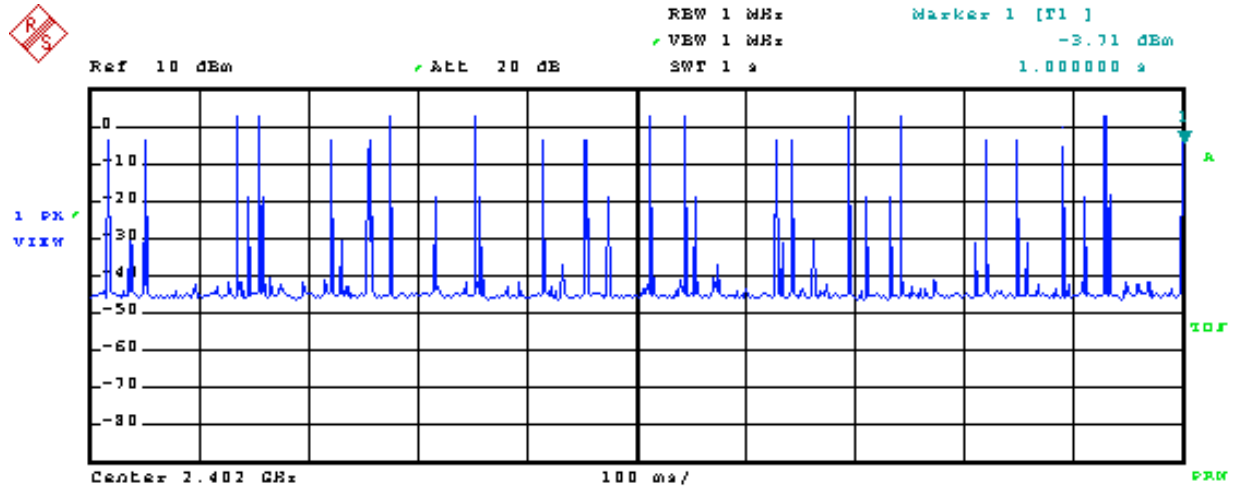

Date: 9.JUL.2007 17:03:36





Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
 Report No.: FCCA07070402-04
 FCCID: SJ9-BTMicroEDR2
 Page:21 of 55
 Date: Nov. 08, 2007


Ch39:

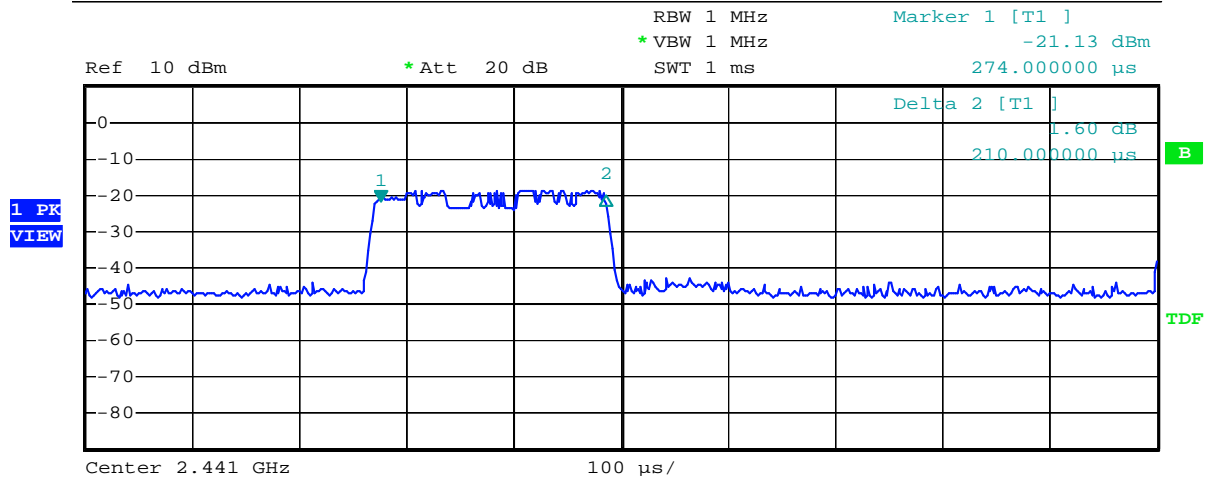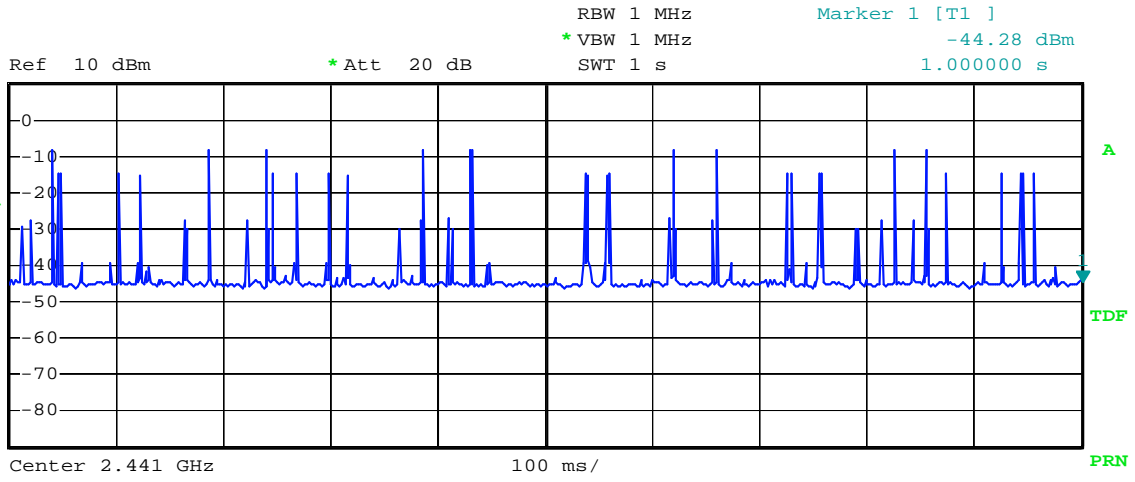

Date: 9.JUL.2007 17:10:11



CH78:

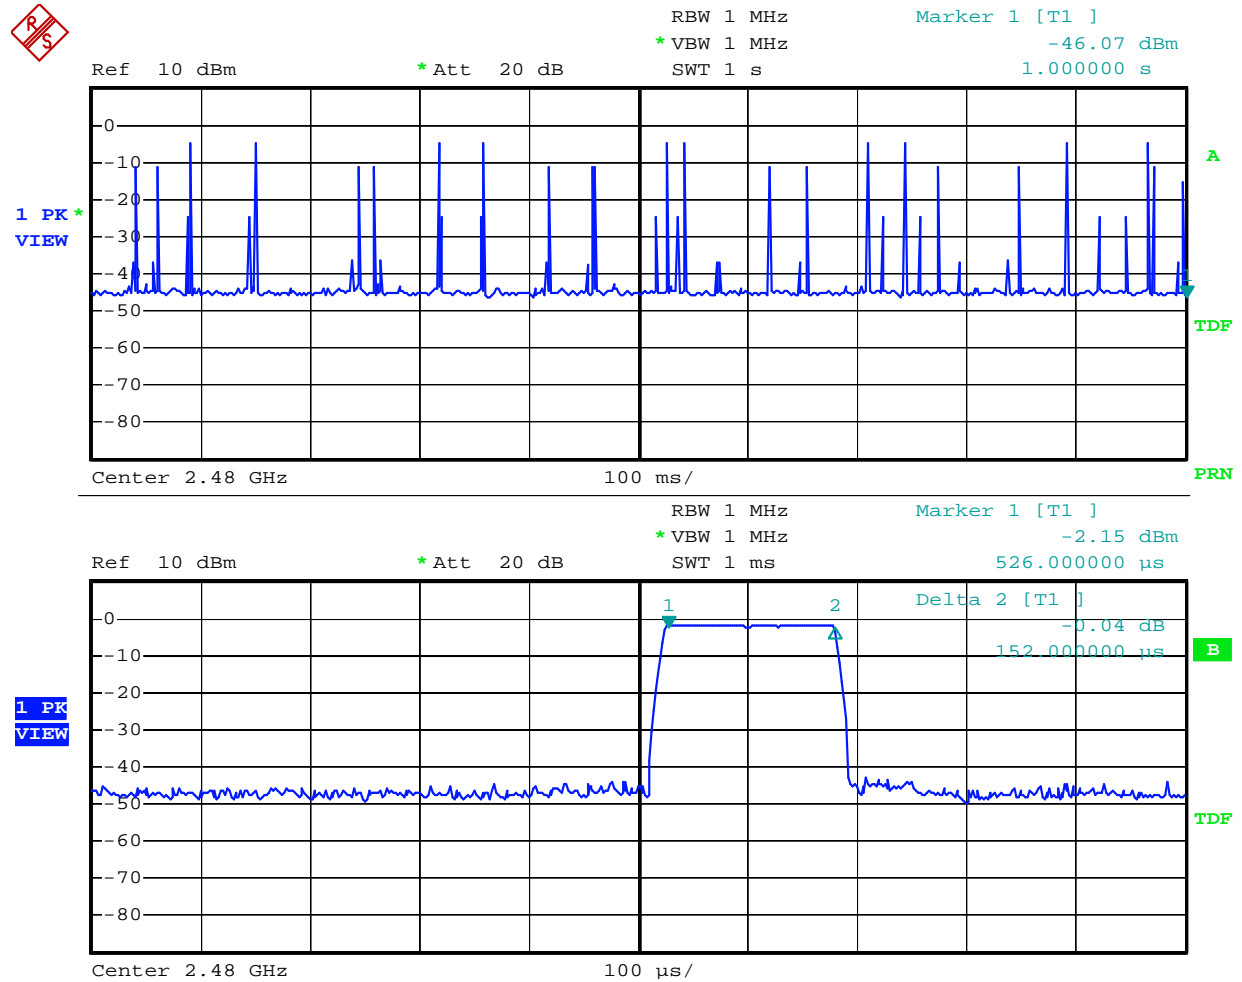

Date: 9.JUL.2007 17:13:39



4.5 CONDUCTED EMISSION

4.5.1 LIMIT

FREQUENCY (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.5.2 TEST EQUIPMENT


The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 KHZ TO 30 MHZ	ROHDE & SCHWARZ	ESHS30/ 826003/008	OCT. 2007 ETC
LISN (for EUT)	50 μ H, 50 ohm	FCC	FCC-LISN-50-25-2/ 01017	OCT. 2007 ETC
LISN (for Peripheral)	50 μ H, 50 ohm	FCC	FCC-LISN-50-25-2/ 01018	NOV. 2007 ETC
50 ohm TERMINATOR	50 ohm	HP	11593A/ 2	OCT. 2007 ETC
COAXIAL CABLE	5m	SUNCITY	CABLE 05/ #5-5M	NOV. 2007 SRT
ISOLATION TRANSFORMER	N/A	APC	AFC-11015/ F102040016	N/A
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 771	N/A
GROUND PLANE	2.3M (H) x 2.4M (W)	SRT	N/A	N/A
GROUND PLANE	2.4M (H) x 2.4M (W)	SRT	N/A	N/A

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



4.5.3 TEST SETUP

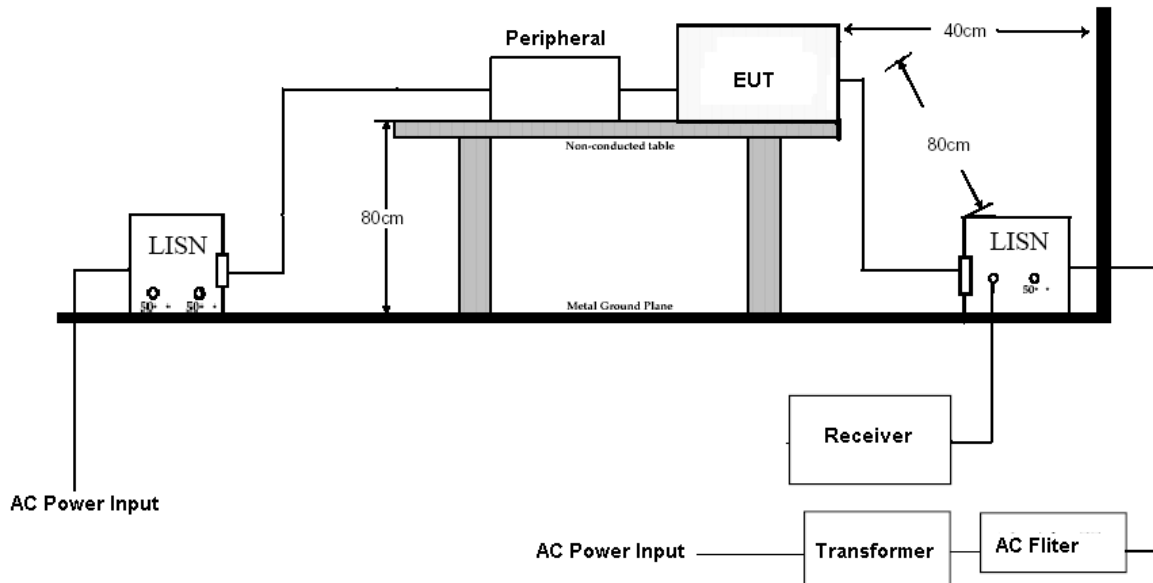

NOTE:

1. The EUT was put on a wooden table with 0.8m height above ground plane, and 0.4m away from reference ground plane (> 2mx2m).
2. For the actual test configuration, please refer to the photos of testing.
3. The serial no. of the LISN connected to EUT is 951318.
4. The serial no. of the LISN connected to support units is 924839.

4.5.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4: 2003 and CISRP22:2006. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50 μ H as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:25 of 55
Date: Nov. 08, 2007

4.5.5 EUT OPERATING CONDITION

Set the EUT under transmission condition continuously at a specific channel frequency.

Under Windows XP ran “EMI TEST” program, PC sent “H” pattern or accessed the following peripherals:

- HDD



TEST REPORT

4.5.6 TEST RESULT

Temperature:	<u>25°C</u>	Humidity:	<u>62%RH</u>
Frequency Range:	<u>0.15 – 30 MHz</u>	Tested Mode:	<u>CH0</u>
Receiver Detector:	<u>Q.P. and AV.</u>	Tested By:	<u>Jeff Yu</u>
		Tested Date:	<u>Jul. 14, 2007</u>

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.201	0.28	45.84	35.24	46.12	35.52	64.54	54.54	-18.70	-19.30
0.204	0.28	46.38	34.85	46.66	35.13	64.46	54.46	-18.08	-19.61
0.5	0.24	36.18	19.50	36.42	19.74	56.00	46.00	-19.82	-26.50
2.329	0.17	29.34	17.15	29.51	17.32	56.00	46.00	-26.66	-28.85
14.308	0.25	30.84	24.35	31.09	24.60	60.00	50.00	-29.16	-25.65
16.199	0.28	29.36	21.20	29.64	21.48	60.00	50.00	-30.64	-28.80

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.186	0.30	44.52	26.40	44.82	26.70	64.97	54.97	-20.45	-28.57
0.207	0.28	45.04	30.76	45.32	31.04	64.37	54.37	-19.33	-23.61
0.500	0.24	35.52	15.45	35.76	15.69	56.00	46.00	-20.48	-30.55
3.368	0.19	29.30	15.16	29.49	15.35	56.00	46.00	-26.70	-30.84
14.003	0.25	30.14	22.33	30.39	22.58	60.00	50.00	-29.86	-27.67
16.138	0.26	29.02	21.43	29.28	21.69	60.00	50.00	-30.98	-28.57

NOTE :

1. Measurement uncertainty is +/-2dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



TEST REPORT

Temperature:	<u>25°C</u>	Humidity:	<u>62%RH</u>
Frequency Range:	<u>0.15 – 30 MHz</u>	Tested Mode:	<u>CH39</u>
Receiver Detector:	<u>Q.P. and AV.</u>	Tested By:	<u>Jeff Yu</u>
		Tested Date:	<u>Jul. 14, 2007</u>

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.204	0.28	45.20	33.81	45.48	34.09	64.46	54.46	-19.26	-20.65
0.495	0.25	36.64	18.48	36.89	18.73	56.14	46.14	-19.50	-27.66
0.538	0.24	34.52	24.23	34.76	24.47	56.00	46.00	-21.48	-21.77
3.348	0.19	29.42	17.69	29.61	17.88	56.00	46.00	-26.58	-28.31
14.155	0.25	30.44	22.95	30.69	23.20	60.00	50.00	-29.56	-27.05
16.63	0.29	29.32	21.07	29.61	21.36	60.00	50.00	-30.68	-28.93

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.495	0.25	36.64	19.18	36.89	19.43	56.14	46.14	-19.50	-26.97
0.498	0.25	35.56	16.96	35.81	17.21	56.06	46.06	-20.50	-29.10
0.500	0.24	34.70	15.29	34.94	15.53	56.00	46.00	-21.30	-30.71
2.645	0.17	28.52	15.67	28.69	15.84	56.00	46.00	-27.48	-30.33
14.216	0.25	29.98	22.81	30.23	23.06	60.00	50.00	-30.02	-27.19
16.712	0.28	28.80	20.77	29.08	21.05	60.00	50.00	-31.20	-29.23

NOTE :

1. Measurement uncertainty is +/-2dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



TEST REPORT

Temperature:	<u>25°C</u>	Humidity:	<u>62%RH</u>
Frequency Range:	<u>0.15 – 30 MHz</u>	Tested Mode:	<u>CH78</u>
Receiver Detector:	<u>Q.P. and AV.</u>	Tested By:	<u>Jeff Yu</u>
		Tested Date:	<u>Jul. 14, 2007</u>

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.183	0.30	42.78	25.77	43.08	26.07	65.06	55.06	-22.28	-29.28
0.492	0.25	37.06	18.60	37.31	18.85	56.23	46.23	-19.17	-27.63
0.543	0.24	34.42	24.08	34.66	24.32	56.00	46.00	-21.58	-21.92
3.348	0.19	30.34	20.15	30.53	20.34	56.00	46.00	-25.66	-25.85
13.82	0.25	30.42	22.33	30.67	22.58	60.00	50.00	-29.58	-27.67
15.554	0.26	26.94	20.48	27.20	20.74	60.00	50.00	-33.06	-29.52

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.489	0.25	36.12	17.90	36.37	18.15	56.31	46.31	-20.19	28.42
0.492	0.25	36.86	19.80	37.11	20.05	56.23	46.23	-19.37	-26.43
0.500	0.24	34.84	15.48	35.08	15.72	56.00	46.00	-21.16	-30.52
1.982	0.16	29.98	20.19	30.14	20.35	56.00	46.00	-26.02	-25.81
14.297	0.25	29.92	22.81	30.17	23.06	60.00	50.00	-30.08	-27.19
16.138	0.26	30.56	21.60	30.82	21.86	60.00	50.00	-29.44	-28.40

NOTE :

1. Measurement uncertainty is +/-2dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



4.6 RADIATED EMISSION TEST

4.6.1 LIMIT

FCC Part15, Subpart C Section 15.209 limit of radiated emission measurement for frequency below 1000 MHz. The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FREQUENCY (MHz)	DISTANCE(m)	FIELD STRENGTH (dB μ V/m)
30 – 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
ABOVE 960	3	54.0

NOTE:

1. In the emission tables above, the tighter limit applies at the band edges.
2. Distance refers to the distance between measuring instrument, antenna, and the closest point of any part of the device or system.

FCC Part 15, Subpart 15.35(b) limit of radiated emission for frequency above 1000MHz

FREQUENCY (MHz)	Class A (dB μ V/m) (at 3m)		Class B (dB μ V/m) (at 3m)	
	PK.	AV.	PK.	AV.
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

FUNDAMENTAL FREQUENCY (MHz)	FILED STRENGTH OF FUNDAMENTAL (dB μ V/m) (at 3m)		FIELD STRENGTH OF HARMONICS (dB μ V/m) (at 3m)	
	PK.	AV.	PK.	AV.
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88	68



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:30 of 55
Date: Nov. 08, 2007

4.6.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test:


EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9kHz TO 2.75 GHz	ROHDE & SCHWARZ	ESCS30/ 830245/012	OCT. 2007 ETC
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3143/ 9509-1152	JUN. 2008 SRT
PRE-AMPLIFIER	1 GHz TO 26.5 GHz	HP	8449B/ 3008A01019	AUG. 2007 ETC
HORN ANTENNA	1 GHz TO 18 GHz	EMCO	3115/ 9602-4681	DEC. 2007 ETC
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	DEC. 2007 SRT
COAXIAL CABLE	25M	SUNCITY	J400-25M-2NP/ #153-25M	JUN. 2008 SRT
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 869	N/A
FREQUENCY CONVERTER	N/A	APC	AFC-2KBB/ F100030031	AUG. 2007 SRT

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.



4.6.3 TEST SET-UP

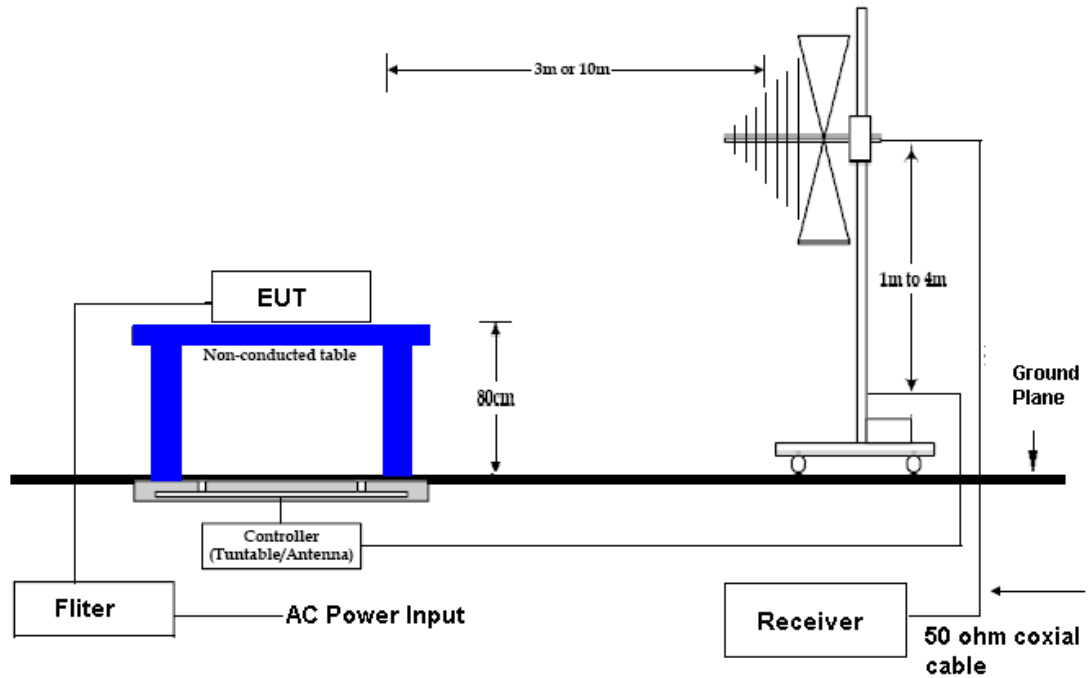

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:32 of 55
Date: Nov. 08, 2007

4.6.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISPR 22:2006. The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

First, Find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

4.6.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:33 of 55
Date: Nov. 08, 2007

4.6.6 RADIATED EMISSION TEST RESULT

Temperature:	26°C	Humidity:	57%RH
Frequency Range:	30M – 1GHz	Measured Distance:	3m
Receiver Detector:	Q.P. or AV.	Tested Mode:	CH0-Link
Tested By:	Jeff Yu	Tested Date:	Jul. 11, 2007

Antenna Polarization: Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
97.2350	1.80	8.36	23.1	33.3	43.5	-10.2
109.5480	1.84	7.73	16.8	26.4	43.5	-17.1
286.7130	2.95	13.08	15.2	31.2	46.0	-14.8
319.2900	3.12	14.12	13.5	30.7	46.0	-15.3
496.0180	4.10	16.09	11.6	31.8	46.0	-14.2
566.2610	4.44	16.96	9.8	31.2	46.0	-14.8

Antenna Polarization: Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
97.2350	1.80	8.36	22.4	32.6	43.5	-10.9
109.5480	1.84	7.73	15.3	24.9	43.5	-18.6
286.7130	2.95	13.08	13.8	29.8	46.0	-16.2
319.2900	3.12	14.12	11.7	28.9	46.0	-17.1
496.0180	4.10	16.09	9.8	30.0	46.0	-16.0
566.2610	4.44	16.96	8.1	29.5	46.0	-16.5

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "**": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:34 of 55
Date: Nov. 08, 2007

Temperature:	26°C	Humidity:	57%RH
Frequency Range:	30M – 1GHz	Measured Distance:	3m
Receiver Detector:	Q.P. or AV.	Tested Mode:	CH0-RX
Tested By:	Jeff Yu	Tested Date:	Jul. 11, 2007

Antenna Polarization: Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
97.2350	1.80	7.51	22.1	31.4	43.5	-12.1
109.5480	1.84	6.25	15.4	23.5	43.5	-20.0
286.7130	2.95	12.68	13.7	29.3	46.0	-16.7
319.2900	3.12	14.37	11.5	29.0	46.0	-17.0
496.0180	4.10	18.00	10.1	32.2	46.0	-13.8
566.2610	4.44	19.34	9.3	33.1	46.0	-12.9

Antenna Polarization: Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
97.2350	1.80	7.51	21.2	30.5	43.5	-13.0
109.5480	1.84	6.25	12.5	20.6	43.5	-22.9
286.7130	2.95	12.68	10.8	26.4	46.0	-19.6
319.2900	3.12	14.37	10.2	27.7	46.0	-18.3
496.0180	4.10	18.00	9.7	31.8	46.0	-14.2
566.2610	4.44	19.34	8.1	31.9	46.0	-14.1

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "**": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:35 of 55
Date: Nov. 08, 2007

Temperature:	<u>26°C</u>	Humidity:	<u>57%RH</u>
Frequency Range:	<u>30M – 1GHz</u>	Measured Distance:	<u>3m</u>
Receiver Detector:	<u>Q.P. or AV.</u>	Tested Mode:	<u>CH39-Link</u>
Tested By:	<u>Jeff Yu</u>	Tested Date:	<u>Jul. 11, 2007</u>

Antenna Polarization: Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
94.8200	1.78	7.42	21.5	30.7	43.5	-12.8
108.6600	1.84	6.40	15.2	23.4	43.5	-20.1
284.1250	2.95	12.62	14.7	30.3	46.0	-15.7
493.2840	4.09	18.00	12.4	34.5	46.0	-11.5
568.7310	4.45	19.32	10.3	34.1	46.0	-11.9
640.8340	4.73	19.90	9.4	34.0	46.0	-12.0

Antenna Polarization: Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
94.8200	1.78	7.42	22.6	31.8	43.5	-11.7
108.6600	1.84	6.40	15.7	23.9	43.5	-19.6
284.1250	2.95	12.62	12.3	27.9	46.0	-18.1
493.2840	4.09	18.00	10.9	33.0	46.0	-13.0
568.7310	4.45	19.32	9.2	33.0	46.0	-13.0
640.8340	4.73	19.90	7.6	32.2	46.0	-13.8

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "**": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:36 of 55
Date: Nov. 08, 2007

Temperature:	<u>26°C</u>	Humidity:	<u>57%RH</u>
Frequency Range:	<u>30M – 1GHz</u>	Measured Distance:	<u>3m</u>
Receiver Detector:	<u>Q.P. or AV.</u>	Tested Mode:	<u>CH78-Link</u>
Tested By:	<u>Jeff Yu</u>	Tested Date:	<u>Jul. 11, 2007</u>

Antenna Polarization: Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
96.7540	1.80	7.48	22.1	31.4	43.5	-12.1
107.0250	1.83	6.55	16.7	25.1	43.5	-18.4
285.3650	2.95	12.65	15.4	31.0	46.0	-15.0
318.6420	3.11	14.34	11.9	29.4	46.0	-16.7
494.8270	4.09	18.00	10.5	32.6	46.0	-13.4
564.4600	4.43	19.36	8.3	32.1	46.0	-13.9

Antenna Polarization: Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
96.7540	1.80	7.48	21.8	31.1	43.5	-12.4
107.0250	1.83	6.55	13.1	21.5	43.5	-22.0
285.3650	2.95	12.65	11.7	27.3	46.0	-18.7
318.6420	3.11	14.34	10.3	27.8	46.0	-18.3
494.8270	4.09	18.00	9.0	31.1	46.0	-14.9
564.4600	4.43	19.36	7.5	31.3	46.0	-14.7

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "**": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



TEST REPORT

Temperature:	26°C	Humidity:	57%RH
Frequency Range:	1 – 12.5GHz	Measured Distance:	3m
Receiver Detector:	PK. or AV.	Tested Mode:	CH0-Link
Tested By:	Jeff Yu	Tested Date:	Jul. 11, 2007

Antenna Polarization: Horizontal

Frequency (MHz)	Corret Factor (dB)	Antenna Factor (dB/m)	Reading (dBμV)		Emission (dBμV/m)		Limit (dBμV/m)		Margin (dB)	
			PK	AV	PK	AV	PK	AV	PK	AV
2402	-32.16	28.54	86.5	63.8	82.9	60.2	N/A	N/A	N/A	N/A
2458.37	-32.23	28.12	33.8	*	29.7	*	74.0	54.0	-44.3	*
3655.18	-30.92	32.44	35.1	*	36.6	*	74.0	54.0	-37.4	*
4582.15	-30.44	33.47	32.8	*	35.8	*	74.0	54.0	-38.2	*
4804	-30.47	33.64	32.5	*	35.7	*	74.0	54.0	-38.3	*
7462.8	-28.97	36.47	33.4	*	40.9	*	74.0	54.0	-33.1	*

Antenna Polarization: Vertical

Frequency (MHz)	Corret Factor (dB)	Antenna Factor (dB/m)	Reading (dBμV)		Emission (dBμV/m)		Limit (dBμV/m)		Margin (dB)	
			PK	AV	PK	AV	PK	AV	PK	AV
2402	-32.16	28.00	88.7	52.8	84.5	48.6	N/A	N/A	N/A	N/A
2458.37	-32.23	28.12	36.4	*	32.3	*	74.0	54.0	-41.7	*
3655.18	-30.92	32.44	36	*	37.5	*	74.0	54.0	-36.5	*
4582.15	-30.44	33.47	35.7	*	38.7	*	74.0	54.0	-35.3	*
4804	-30.47	33.64	32.9	*	36.1	*	74.0	54.0	-37.9	*
7462.8	-28.97	36.47	33.1	*	40.6	*	74.0	54.0	-33.4	*

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:38 of 55
Date: Nov. 08, 2007

Temperature:	<u>26°C</u>	Humidity:	<u>57%RH</u>
Frequency Range:	<u>1 – 12.5GHz</u>	Measured Distance:	<u>3m</u>
Receiver Detector:	<u>PK. Or AV.</u>	Tested Mode:	<u>CH0-RX</u>
Tested By:	<u>Jeff Yu</u>	Tested Date:	<u>Jul. 11, 2007</u>

Antenna Polarization: Horizontal

Frequency (MHz)	Corret Factor (dB)	Antenna Factor (dB/m)	Reading (dBμV)		Emission (dBμV/m)		Limit (dBμV/m)		Margin (dB)	
			PK	AV	PK	AV	PK	AV	PK	AV
2402	-32.16	28.54	82.4	60.8	78.8	57.2	N/A	N/A	N/A	N/A
2458.37	-32.23	28.12	30.2	*	26.1	*	74.0	54.0	-47.9	*
3655.18	-30.92	32.44	30.8	*	32.3	*	74.0	54.0	-41.7	*
4582.15	-30.44	33.47	28.7	*	31.7	*	74.0	54.0	-42.3	*
4804	-30.47	33.64	28	*	31.2	*	74.0	54.0	-42.8	*
7462.8	-28.97	36.47	26.8	*	34.3	*	74.0	54.0	-39.7	*

Antenna Polarization: Vertical

Frequency (MHz)	Corret Factor (dB)	Antenna Factor (dB/m)	Reading (dBμV)		Emission (dBμV/m)		Limit (dBμV/m)		Margin (dB)	
			PK	AV	PK	AV	PK	AV	PK	AV
2402	-32.16	28.00	87.5	62.3	83.3	58.1	N/A	N/A	N/A	N/A
2458.37	-32.23	28.12	33.5	*	29.4	*	74.0	54.0	-44.6	*
3655.18	-30.92	32.44	32.8	*	34.3	*	74.0	54.0	-39.7	*
4582.15	-30.44	33.47	32.1	*	35.1	*	74.0	54.0	-38.9	*
4804	-30.47	33.64	29.6	*	32.8	*	74.0	54.0	-41.2	*
7462.8	-28.97	36.47	28.5	*	36.0	*	74.0	54.0	-38.0	*

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:39 of 55
Date: Nov. 08, 2007

Temperature:	<u>26°C</u>	Humidity:	<u>57%RH</u>
Frequency Range:	<u>1 – 12.5GHz</u>	Measured Distance:	<u>3m</u>
Receiver Detector:	<u>PK. Or AV.</u>	Tested Mode:	<u>CH39-Link</u>
Tested By:	<u>Jeff Yu</u>	Tested Date:	<u>Jul. 11, 2007</u>

Antenna Polarization: Horizontal

Frequency (MHz)	Corret Factor (dB)	Antenna Factor (dB/m)	Reading (dBμV)		Emission (dBμV/m)		Limit (dBμV/m)		Margin (dB)	
			PK	AV	PK	AV	PK	AV	PK	AV
2441	-32.23	28.62	83.9	62.1	80.3	58.5	N/A	N/A	N/A	N/A
2378.7395	-32.24	27.96	34.5	*	30.2	*	74.0	54.0	-43.8	*
2578.374	-31.96	28.64	34.8	*	31.5	*	74.0	54.0	-42.5	*
3745.427	-30.82	32.40	33.2	*	34.8	*	74.0	54.0	-39.2	*
4882	-30.26	33.71	33.7	*	37.1	*	74.0	54.0	-36.9	*
7482.724	-28.99	36.49	32.5	*	40.0	*	74.0	54.0	-34.0	*

Antenna Polarization: Vertical

Frequency (MHz)	Corret Factor (dB)	Antenna Factor (dB/m)	Reading (dBμV)		Emission (dBμV/m)		Limit (dBμV/m)		Margin (dB)	
			PK	AV	PK	AV	PK	AV	PK	AV
2441	-32.16	28.00	85.2	50.8	81.1	46.7	N/A	N/A	N/A	N/A
2378.7395	-32.51	27.66	35.8	*	31.5	*	74.0	54.0	-42.5	*
2578.374	-32.21	28.07	34.1	*	30.8	*	74.0	54.0	-43.2	*
3745.427	-31.73	30.01	35.3	*	36.9	*	74.0	54.0	-37.1	*
4882	-30.30	33.69	33.8	*	37.2	*	74.0	54.0	-36.8	*
7482.724	-29.03	36.30	35.8	*	43.3	*	74.0	54.0	-30.7	*

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
 Report No.: FCCA07070402-04
 FCCID: SJ9-BTMicroEDR2
 Page:40 of 55
 Date: Nov. 08, 2007

Temperature:	<u>26°C</u>	Humidity:	<u>57%RH</u>
Frequency Range:	<u>1 – 12.5GHz</u>	Measured Distance:	<u>3m</u>
Receiver Detector:	<u>PK. Or AV.</u>	Tested Mode:	<u>CH78-Link</u>
Tested By:	<u>Jeff Yu</u>	Tested Date:	<u>Jul. 11, 2007</u>

Antenna Polarization: Horizontal

Frequency (MHz)	Corret Factor (dB)	Antenna Factor (dB/m)	Reading (dBμV)		Emission (dBμV/m)		Limit (dBμV/m)		Margin (dB)	
			PK	AV	PK	AV	PK	AV	PK	AV
2480	-32.19	28.73	85.7	63.1	82.2	59.6	N/A	N/A	N/A	N/A
2456.2854	-32.23	28.11	33.1	*	29.0	*	74.0	54.0	-45.0	*
3368.653	-31.46	32.10	35.4	*	36.0	*	74.0	54.0	-38.0	*
4583.834	-30.45	33.47	34.2	*	37.2	*	74.0	54.0	-36.8	*
4960	-30.26	33.77	32.8	*	36.3	*	74.0	54.0	-37.7	*
7468.147	-28.98	36.47	34.2	*	41.7	*	74.0	54.0	-32.3	*

Antenna Polarization: Vertical

Frequency (MHz)	Corret Factor (dB)	Antenna Factor (dB/m)	Reading (dBμV)		Emission (dBμV/m)		Limit (dBμV/m)		Margin (dB)	
			PK	AV	PK	AV	PK	AV	PK	AV
2480	-32.19	28.16	87.3	53.7	83.3	49.7	N/A	N/A	N/A	N/A
2456.2854	-32.23	28.11	36.8	*	32.7	*	74.0	54.0	-41.3	*
3368.653	-31.46	32.10	35.2	*	35.8	*	74.0	54.0	-38.2	*
4583.834	-30.45	33.47	36.1	*	39.1	*	74.0	54.0	-34.9	*
4960	-30.26	33.77	35.1	*	38.6	*	74.0	54.0	-35.4	*
7468.147	-28.98	36.47	34.5	*	42.0	*	74.0	54.0	-32.0	*

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
 Report No.: FCCA07070402-04
 FCCID: SJ9-BTMicroEDR2
 Page:41 of 55
 Date: Nov. 08, 2007

4.7 PEAK POWER TEST

4.7.1 LIMIT

FCC Part15, Subpart C Section 15.247.

Frequency Range (MHz)	Limit(w)				
	Quantity of Hopping Channel	50	25	15	75
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)

4.7.2 TEST EQUIPMENT


The following test equipment was used during the test :

Equipment/Facilities	Specifications	Manufacturer	Model#/Serial#	Due Date of Cal. & Cal. Center
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR. 2008 ETC
POWER METER	N/A	BOONTON	4232A/ 29001	MAY 2008 ETC
POWER SENSOR	DC-18GHz 0.3 μ W-100mW 50 Ω	BOONTON	51011-EMC/ 31184	JUN. 2008 ETC

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



4.7.3 TEST SET-UP

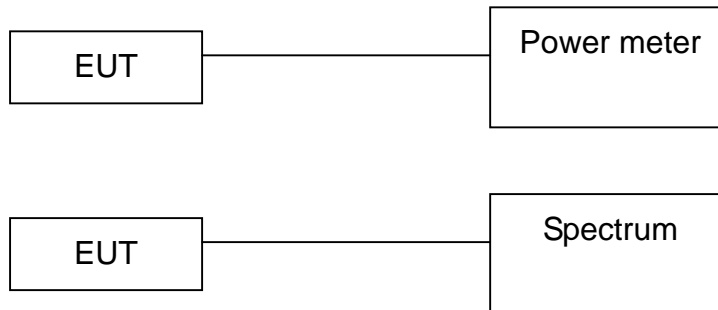

The EUT was connected to a spectrum through a 50Ω RF cable.

4.7.4 TEST PROCEDURE

The EUT was operating in hopping mode or could control its channel.
 Printed out the test result from the spectrum by hard copy function.
 Recorded the read value of the power meter.

4.7.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.

4.7.6 TEST RESULT

Temperature:	<u>24°C</u>	Humidity:	<u>65%RH</u>
Spectrum Detector:	<u>PK</u>	Tested by:	<u>Jeff Yu</u>
Test Result:	<u>PASS</u>	Tested Date:	<u>Jul.13,2007</u>

Channel Number	Channel Frequency (MHz)	Peak Output Power (dBm)	Peak Power Limit (dBm)
0	2402.0000	3.79	30
39	2441.0000	2.74	30
78	2480.0000	3.25	30




Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
 Report No.: FCCA07070402-04
 FCCID: SJ9-BTMicroEDR2
 Page:43 of 55
 Date: Nov. 08, 2007

CH0:

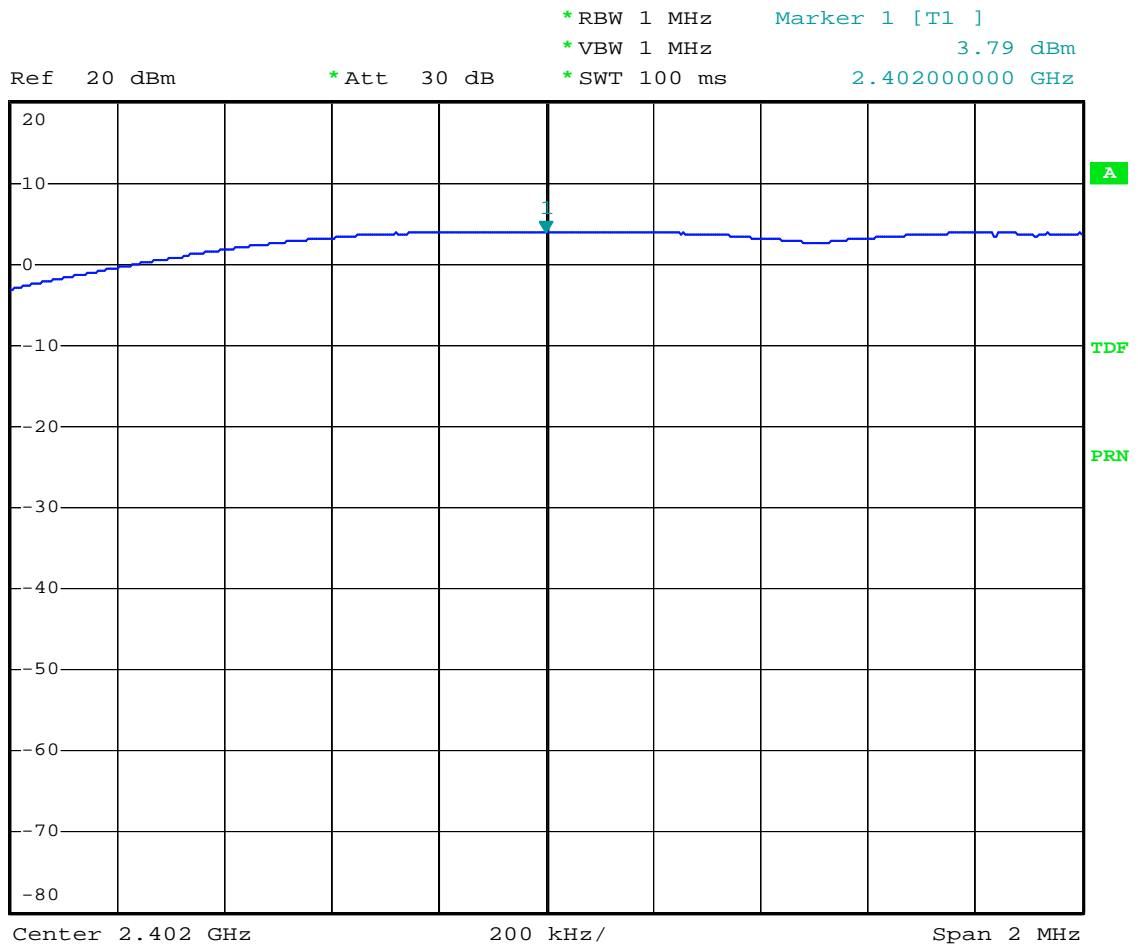

Date: 13.JUL.2007 13:38:52




Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:44 of 55
Date: Nov. 08, 2007

CH39:

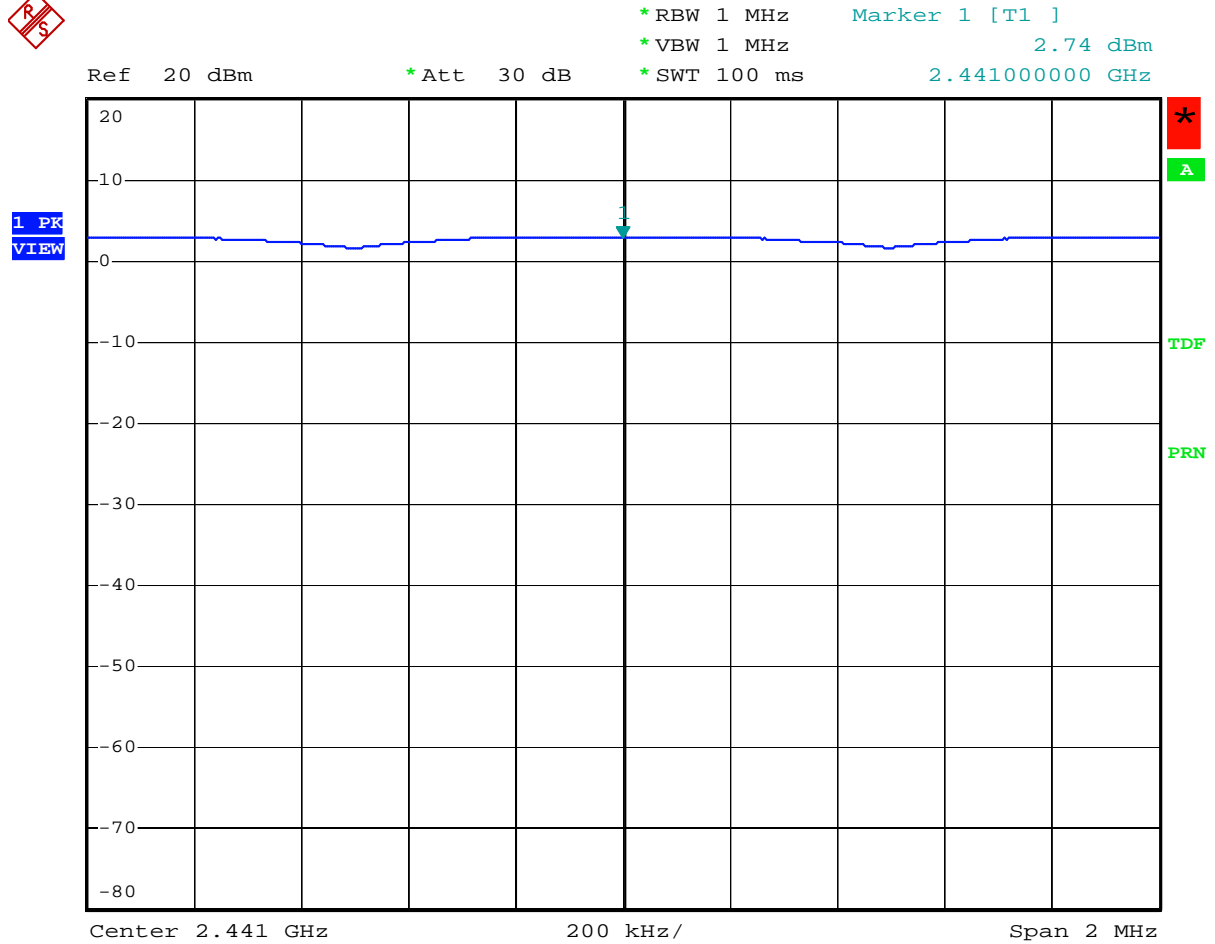

Date: 13.JUL.2007 13:43:18




Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:45 of 55
Date: Nov. 08, 2007

CH78:

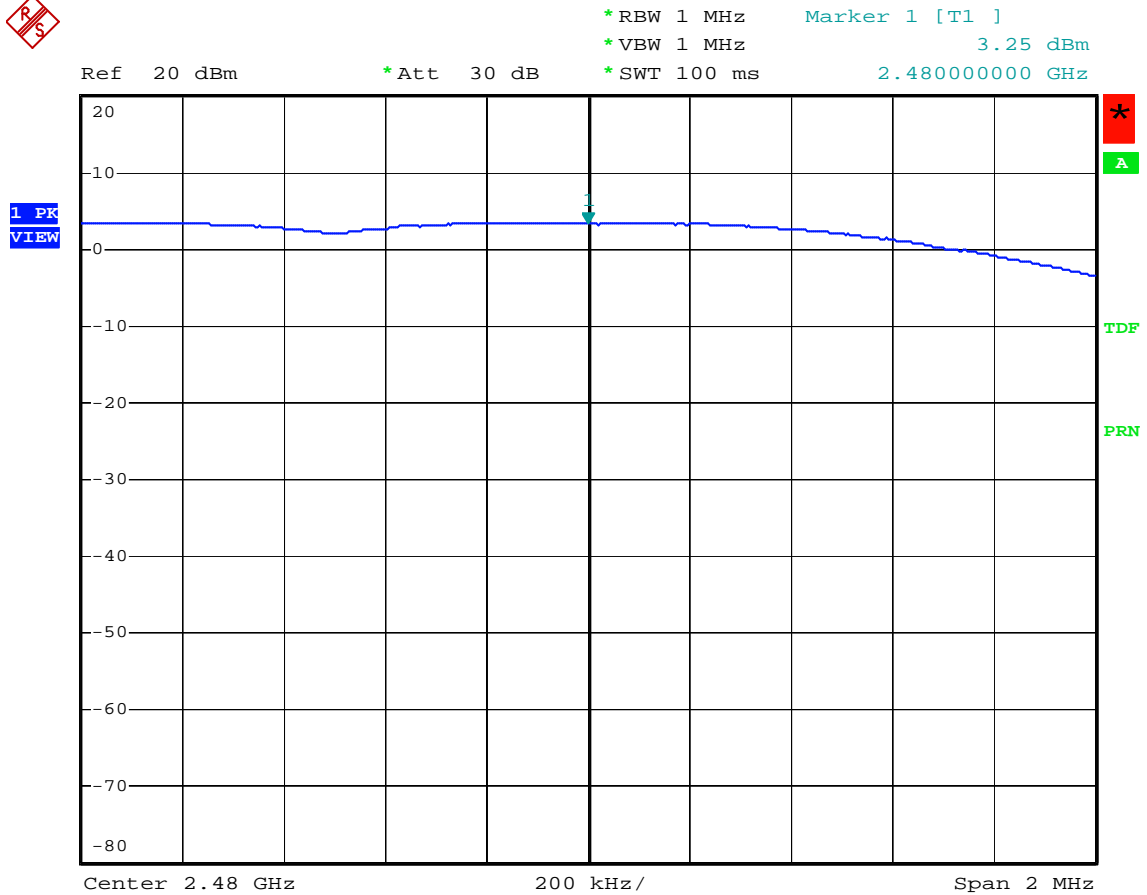

Date: 13.JUL.2007 13:45:32



4.8 BAND EDGE TEST

4.8.1 LIMIT

FCC Part15, Subpart C Section 15.249 (c), Emission radiated outside of the specified frequency bands, except for harmonics, shall attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Operating Frequency Range (MHz)	Limit (dB μ V/m)	
	Peak	Average
902-928	74	54
2400-2483.5		
5725-5850		

4.8.2 TEST EQUIPMENT

The following test equipment was used during the test :


Equipment/Facilities	Specification	Manufacturer	Model#/Serial#	Due Date of Cal. & Cal. Center
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	APR. 2008 R&S
EMI TEST RECEIVER	9 kHz TO 2750 MHz	ROHDE & SCHWARZ	ESCS30/ 830245/012	OCT. 2007 ETC
SPECTRUM	9KHz-26.5GHz	HP	8953E/ 3710A03220	MAY 2008 ETC
PRE-AMPLIFIER	1GHz-26.5GHz Gain:30dB	HP	8449B/ 3008A01019	NOV. 2007 ETC
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/ 9701-1124	FEB. 2008 SRT
HORN ANTENNA	1GHz to 18GHz	EMCO	3115/ 9602-4681	DEC. 2007 ETC
OATS	3 - 10 M measurement	SRT	SRT-1	APR. 2008 SRT

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.




4.8.3 TEST SET-UP

FOR RF CONDUCTED TEST (dBc)



The EUT was connected to the spectrum through a 50 Ω RF cable.

FOR RADIATED EMISSION TEST

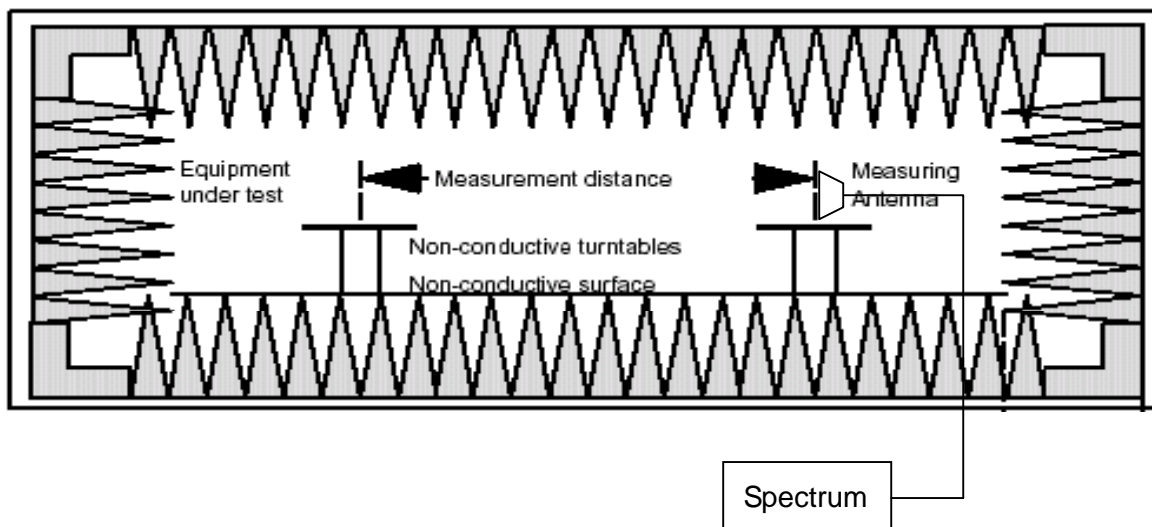

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



4.8.4 TEST PROCEDURE

1. The EUT was operating in hopping mode or could be controlled its channel.
Printed out the test result from the spectrum by hard copy function.
2. The EUT was tested according to the requirement of ANSI C63.4 and CISPR 22. The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz. All readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak and average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

4.8.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.

4.8.6 TEST RESULT

Temperature:	<u>24°C</u>	Humidity:	<u>61%RH</u>
Spectrum Detector:	<u>PK & AV</u>	Tested by:	<u>Jeff Yu</u>
Test Result:	<u>PASS</u>	Tested Date:	<u>Jul. 13, 2007</u>

1. Conducted emission test

Frequency (MHz)	PEAK POWER OUTPUT (dBm)	Emission read Value(dBm)	Result of Band edge (dBc)	Band edge LIMIT (dBc)
<2400	3.79	-31.63	28.53	>20dBc
>2480	3.25	-31.55	30.36	>20dBc

2. Radiated emission test

Frequency (MHz)	Antenna polarization (H/V)	Reading (dBuV)		Emission (dBuV/m)		Band edge Limit (dBuV/m)	
		PK	AV	PK	AV	PK	AV
<2400	H	29.4	*	26.3	*	74.0	54.0
>2483.5	V	27.8	*	25.8	*	74.0	54.0




Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
 Report No.: FCCA07070402-04
 FCCID: SJ9-BTMicroEDR2
 Page:49 of 55
 Date: Nov. 08, 2007

CH0:

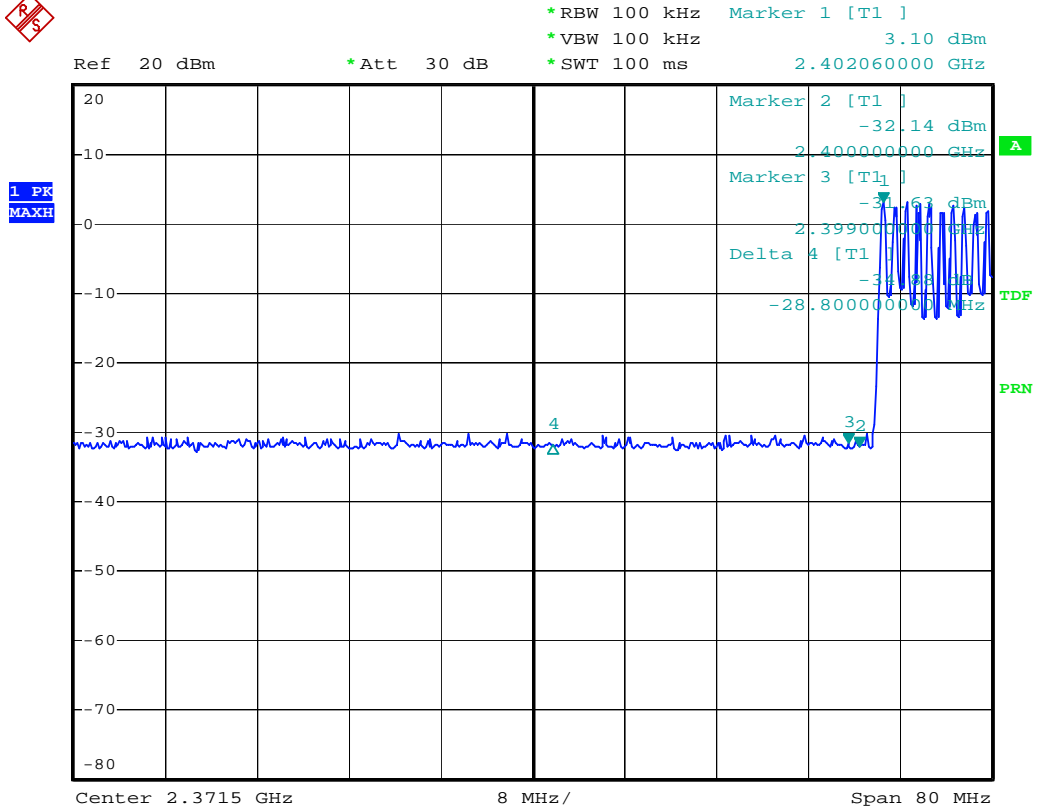

Date: 13.JUL.2007 13:49:38




Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
 Report No.: FCCA07070402-04
 FCCID: SJ9-BTMicroEDR2
 Page:50 of 55
 Date: Nov. 08, 2007

CH78:

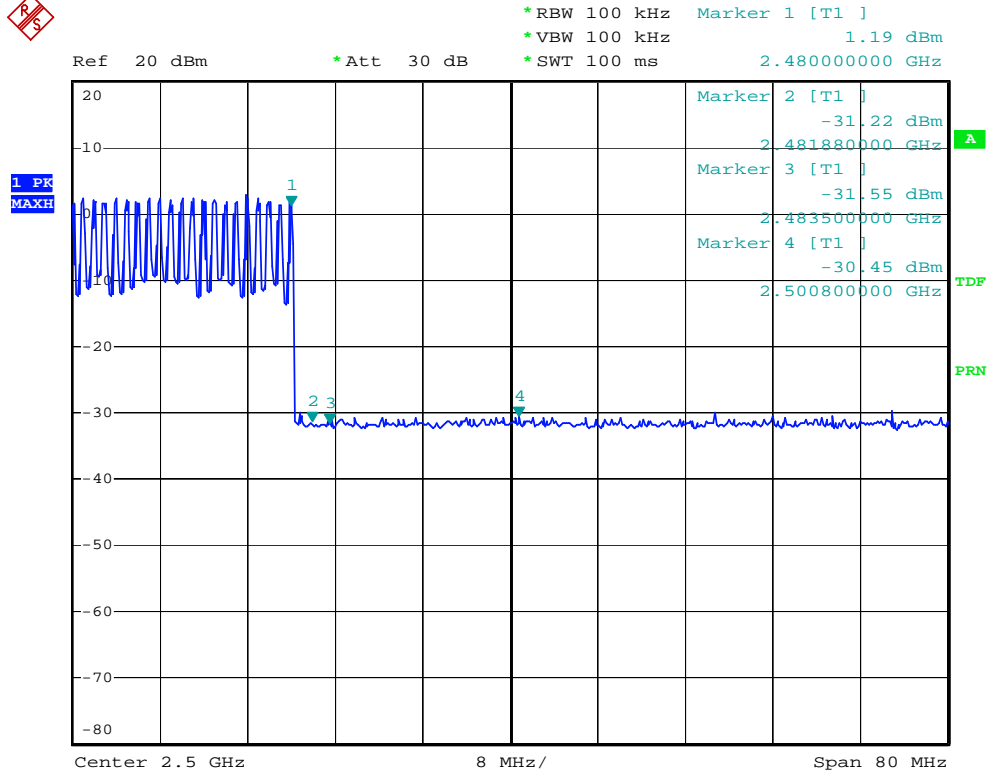

Date: 13.JUL.2007 13:53:44



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:51 of 55
Date: Nov. 08, 2007

5 ANTENNA APPLICATION

5.1 Antenna requirement

The EUT's antenna is met the requirement of FCC part15C section15.203 and 15.204.

5.2 Result

The EUT's antenna used a dipole antenna and integrated on PCB. The antenna's gain is -2 dBi and meets the requirement.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A07110603
Report No.: FCCA07070402-04
FCCID: SJ9-BTMicroEDR2
Page:55 of 55
Date: Nov. 08, 2007

7. TERMS OF ABBREVIATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction