
M2030 Duty Cycle Description

Dust radios operate on a TDMA time schedule that uses 31.25 ms timeslots. A transmit timeslot consists of 5 stages:

- 1. Initialization: radio is prepared for transmit (transmitter is off)
- 2. Ramp: transmitter is ramped to peak power
- 3. Transmit: 128 bytes of data maximum + 5 bytes preamble/SFD
- 4. Turnaround: radio is set to receive
- 5. Receive: radio waits in receive for ACK, then turns off

Total transmit time for a 128 byte packet plus all overhead (SFD / Preamble / Ramp) is 4.34ms, shown in the figure below:

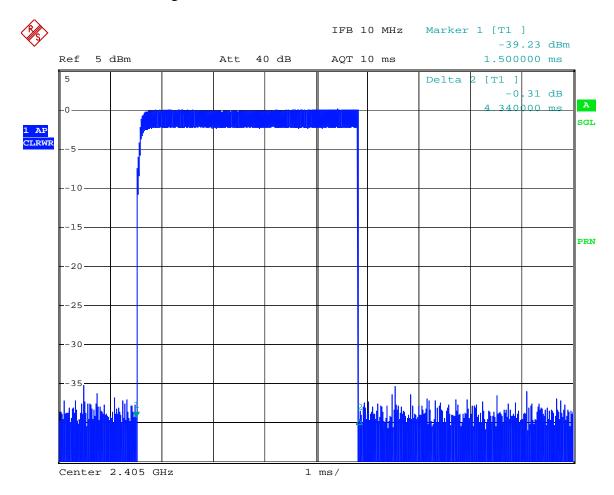

Date: 28.NOV.2006 11:30:46

Maximum duty cycle is therefore:

4.34 ms on / (31.25 ms off) = 13.9 %