




## Appendix B

RF Power Output






Marker 1 [T1] RBW 3 MHz RF Att 50 dB  
Ref Lvl 29.59 dBm VBW 3 MHz  
35 dBm 1.87978958 GHz SWT 5 ms Unit dBm

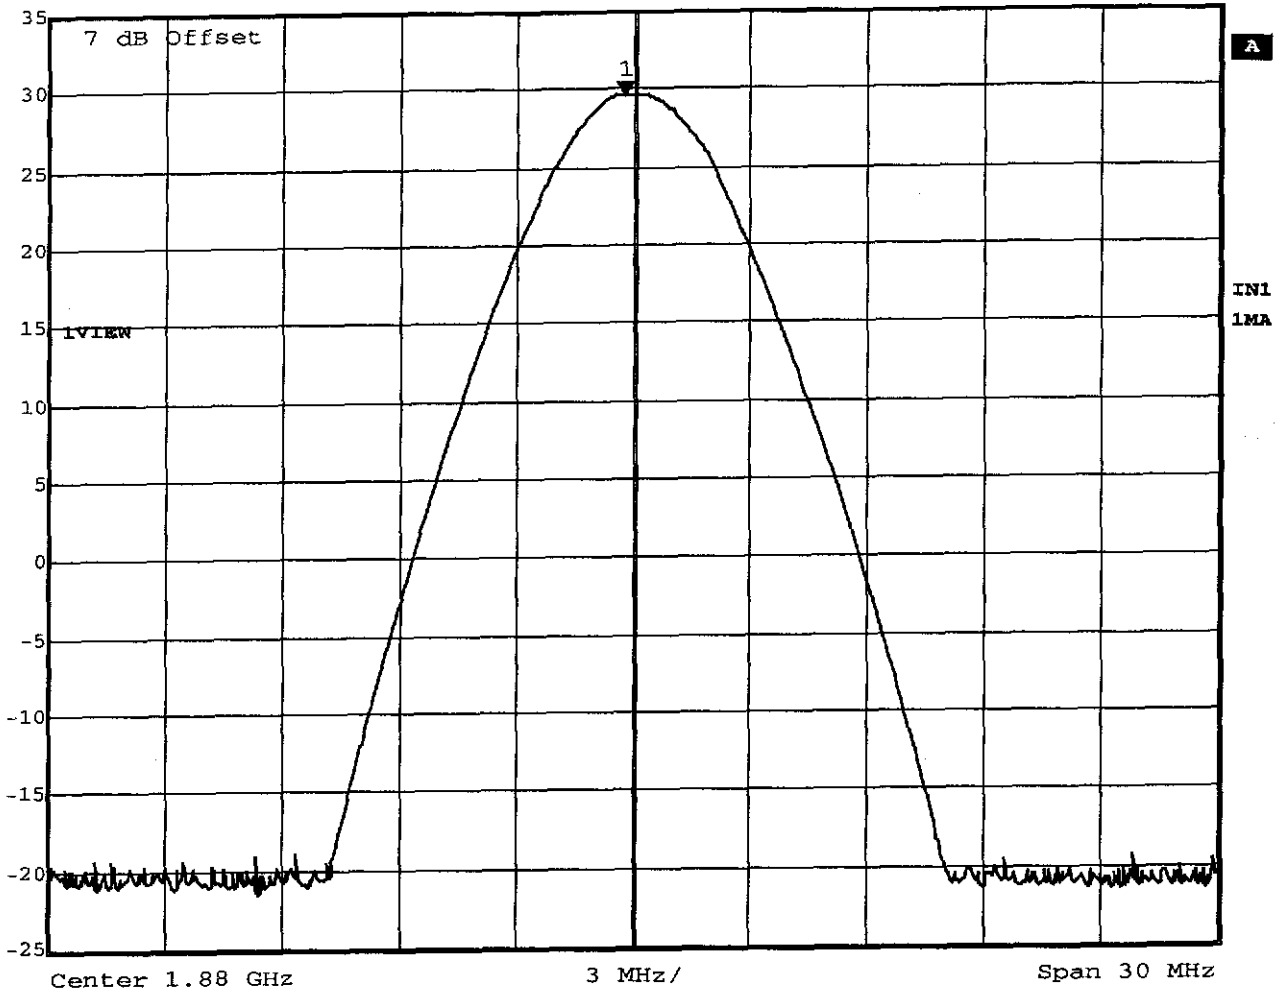

Title: Outputpower conducted Channel 661  
Comment A: Model:Q2426  
Date: 9.APR.2003 13:55:01




Ref Lvl	Marker 1 [T1]	RBW	3 MHz	RF Att	50 dB
35 dBm	29.59 dBm	VBW	3 MHz		
	1.90989018 GHz	SWT	5 ms	Unit	dBm

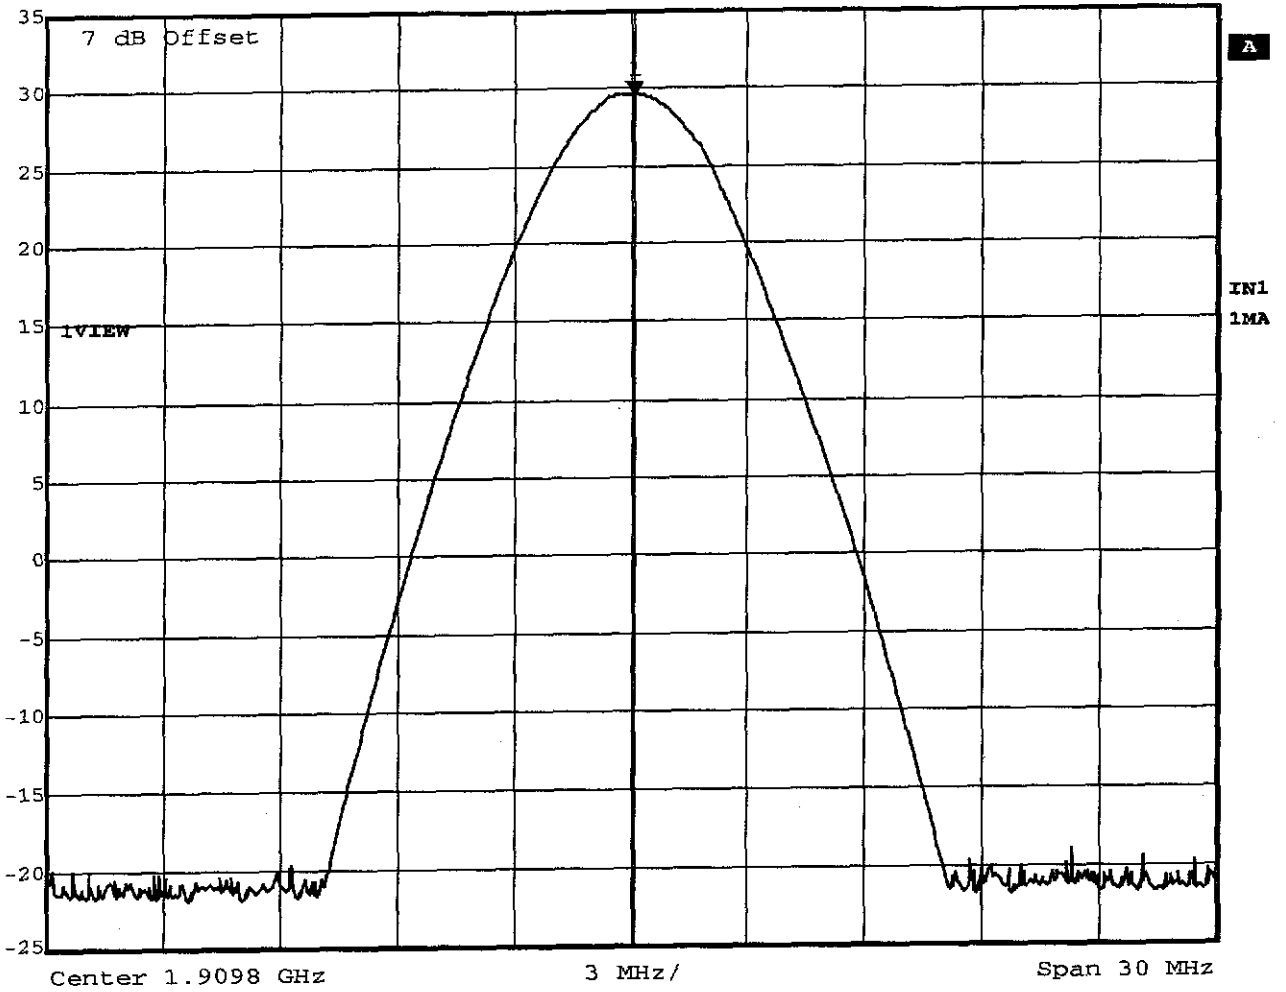

Title:      Outputpower conducted Channel 810  
Comment A: Model:Q2426  
Date:      9.APR.2003 13:58:35




Marker 1 [T1] RBW 3 MHz RF Att 50 dB  
Ref Lvl 32.34 dBm VBW 3 MHz  
35 dBm 824.23006012 MHz SWT 5 ms Unit dBm

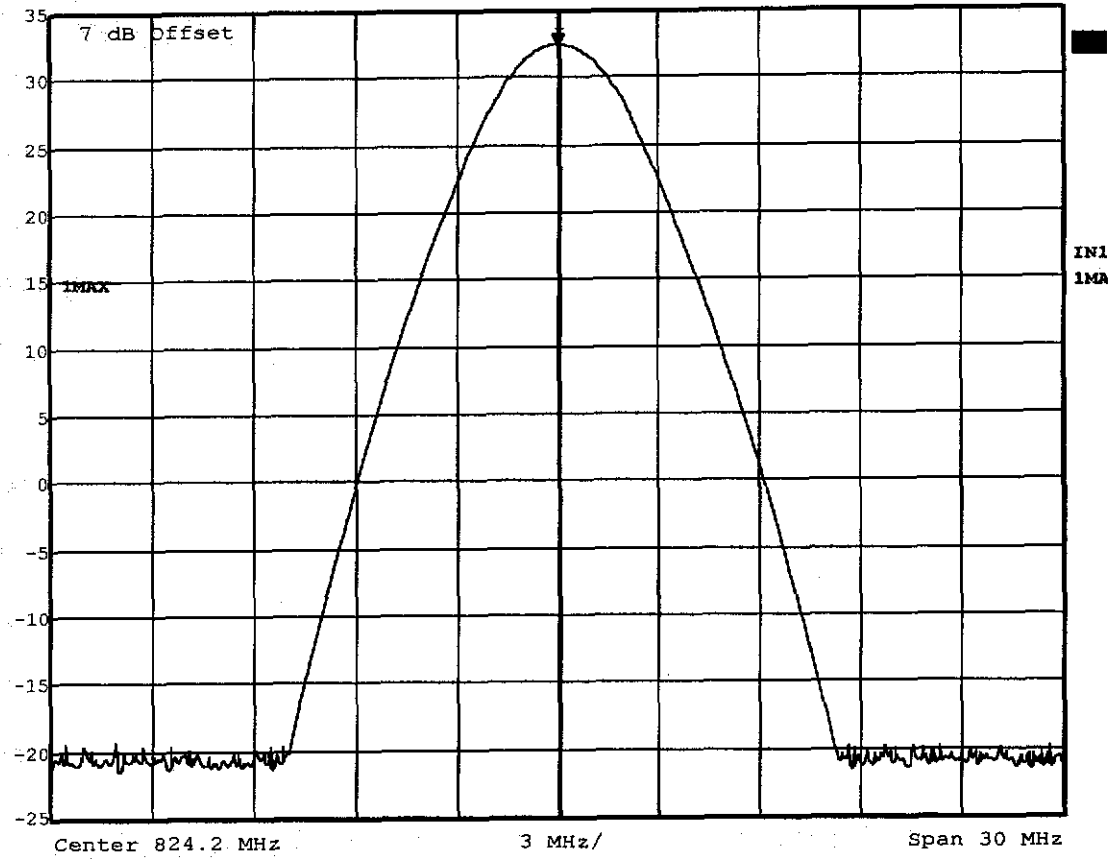

Title: Outputpower conducted Channel 128  
Comment A: Model:Q2426 HW.4.0  
Date: 11.APR.2003 09:06:55




Marker 1 [T1] RBW 3 MHz RF Att 50 dB  
Ref Lvl 32.59 dBm VBW 3 MHz  
35 dBm 836.10981964 MHz SWT 5 ms Unit dBm

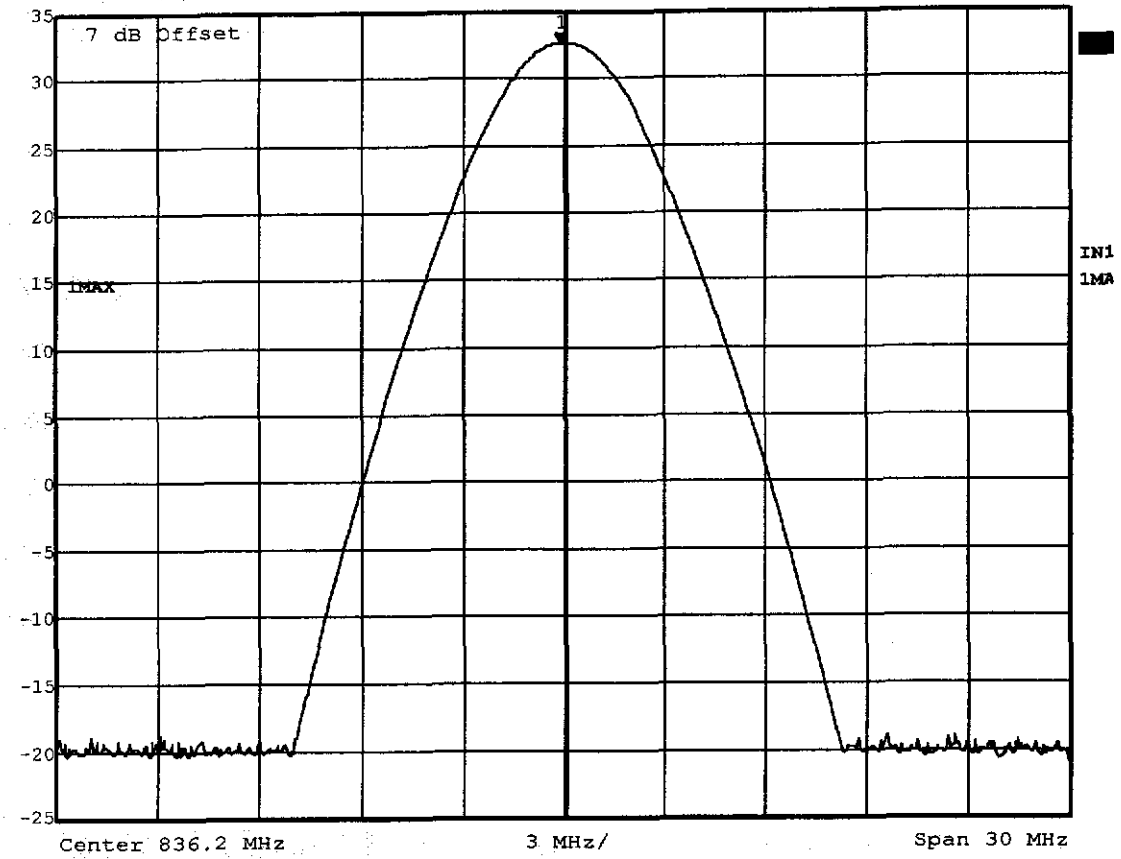

Title: Outputpower conducted Channel 188  
Comment A: Model:Q2426 HW.4.0  
Date: 11.APR.2003 09:04:54



Marker 1 [T1] RBW 3 MHz RF Att 50 dB  
Ref Lvl 32.33 dBm VBW 3 MHz  
35 dBm 848.83006012 MHz SWT 5 ms Unit dBm

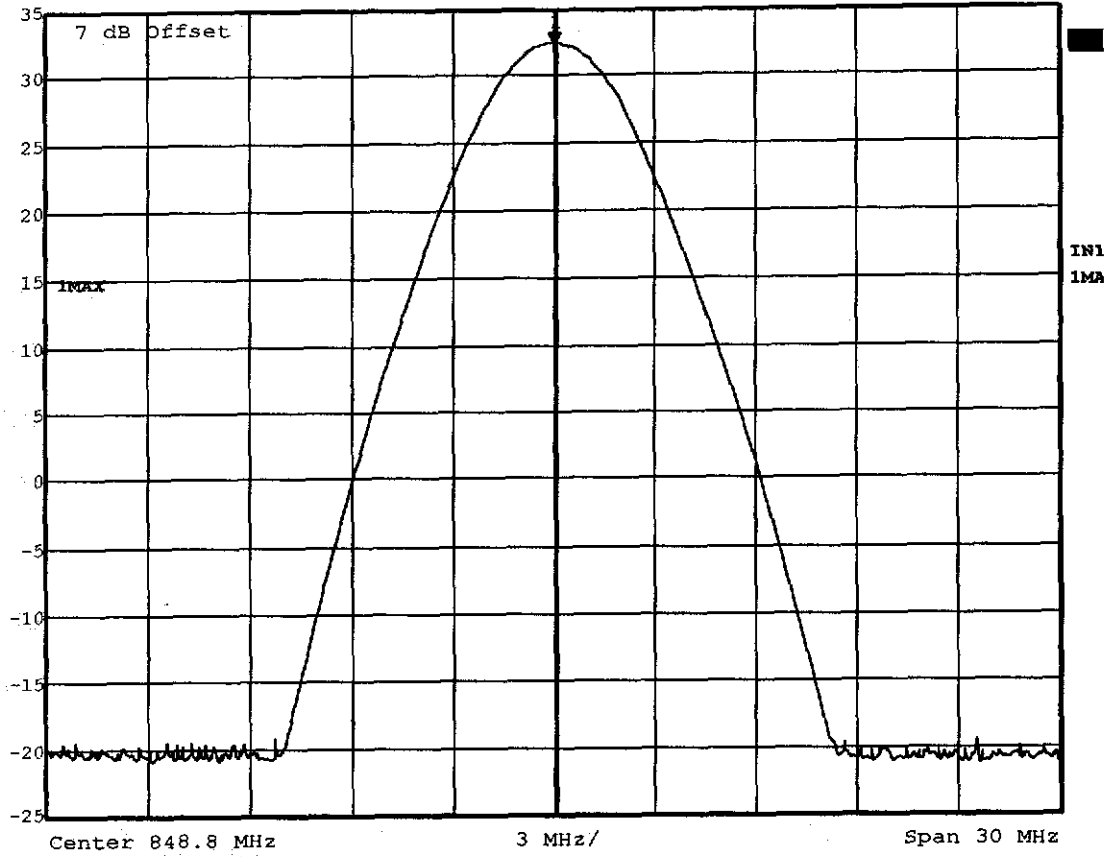

Title: Outputpower conducted Channel 251  
Comment A: Model:Q2426 HW.4.0  
Date: 11.APR.2003 09:08:57




## Appendix C

ERP, EIRP




**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.6 VDC  
Test Specification: according to §24.232  
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0  
Comment 2: Freq: 1.850GHz, Pmax: 28.54dBm, RBW: 3MHz

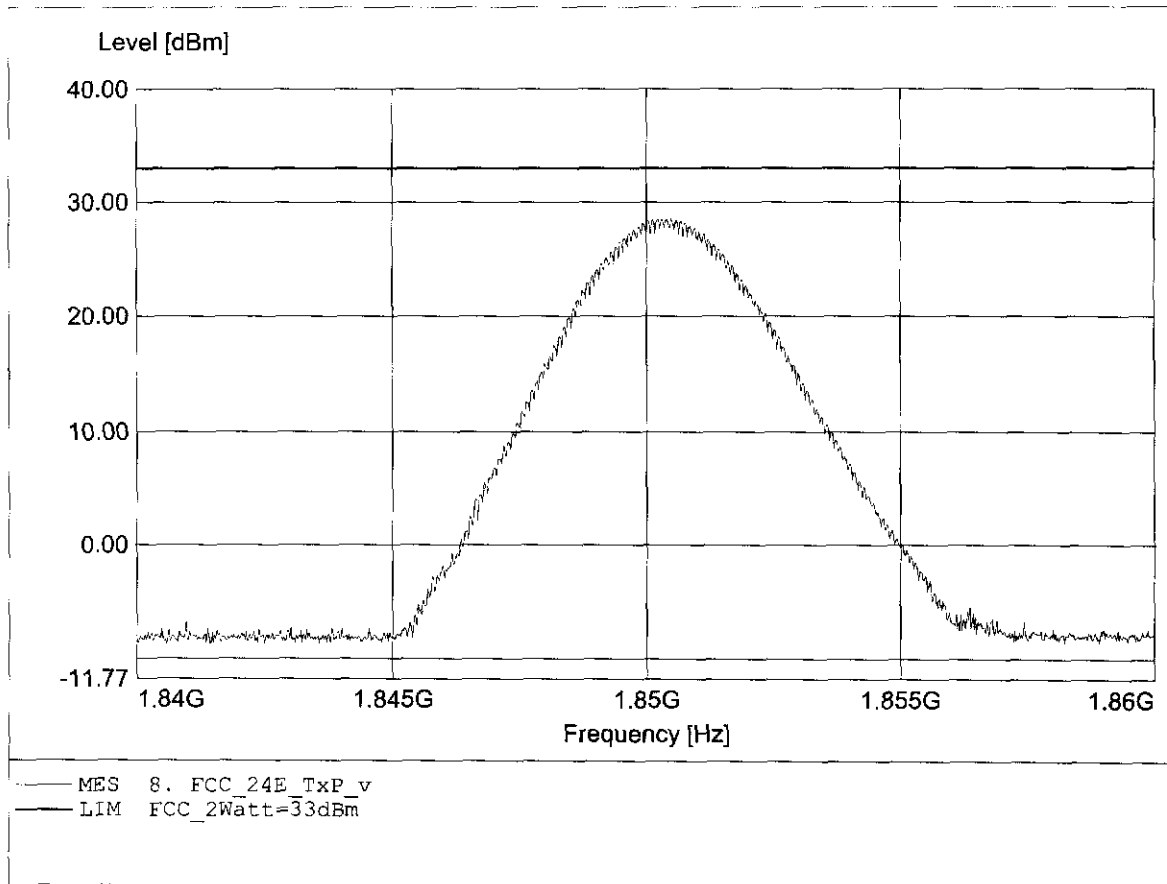


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.6 VDC  
Test Specification: according to §24.232  
Comment 1: Dist.: 3m, Ant.: HI025,PCL 0  
Comment 2: Freq: 1.850GHz, Pmax: 21.61dBm, RBW: 3MHz

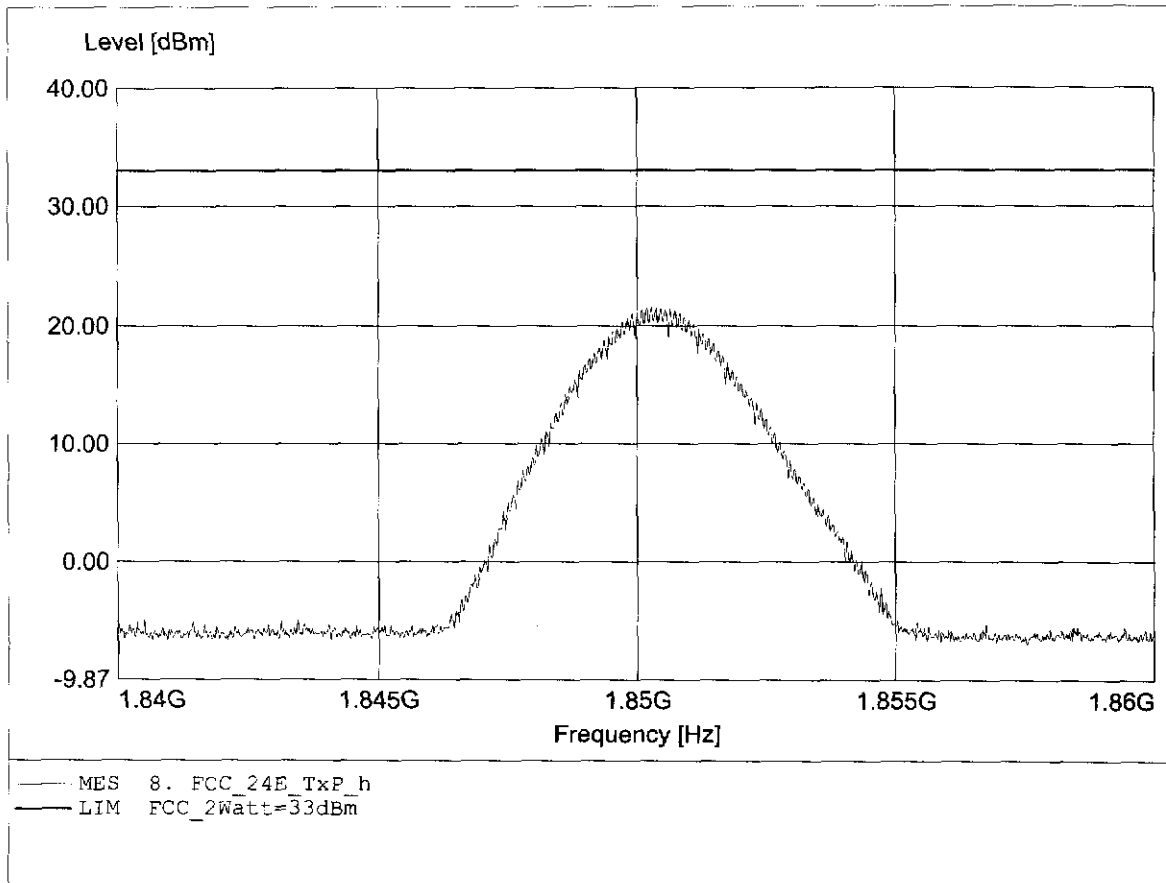


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.6 VDC  
Test Specification: according to S24.232  
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0  
Comment 2: Freq: 1.880GHz, Pmax: 29.16dBm, RBW: 3MHz

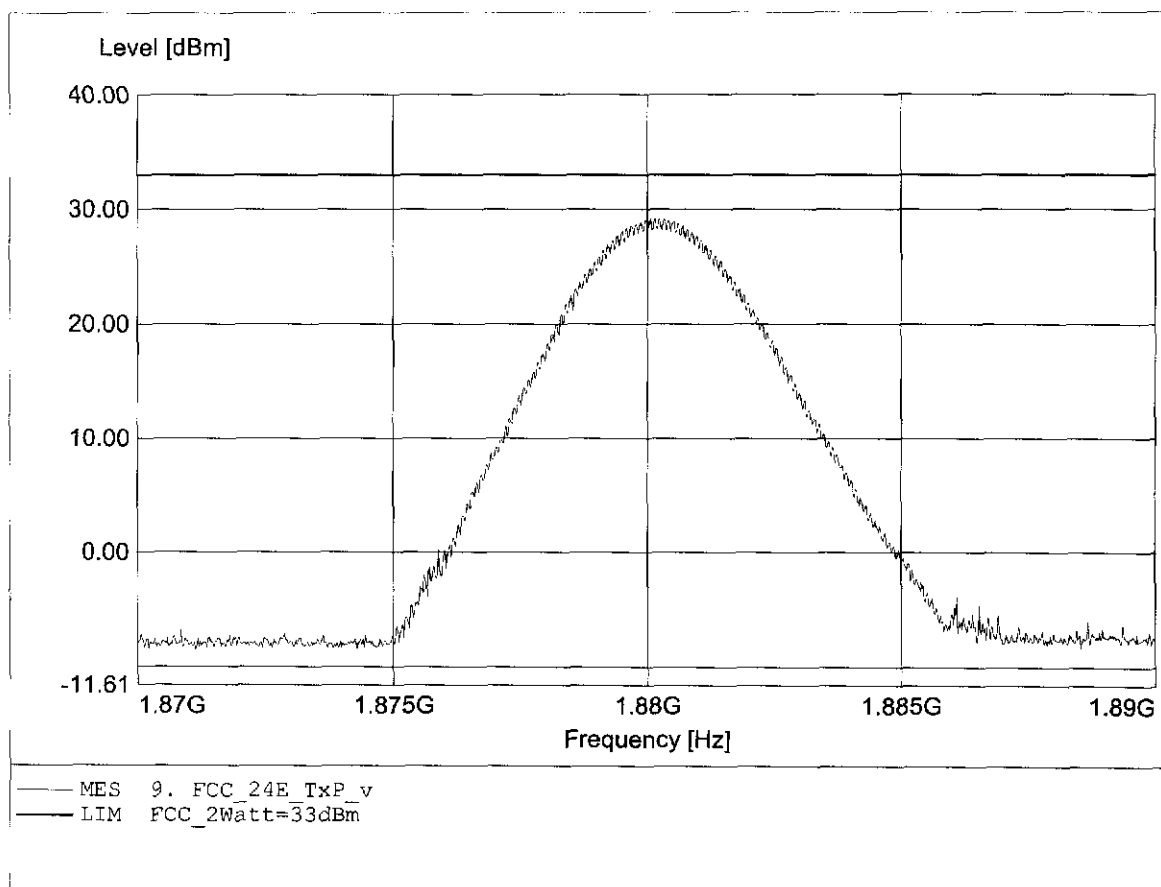


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.6 VDC  
Test Specification: according to §24.232  
Comment 1: Dist.: 3m, Ant.: HLO25,PCL 0  
Comment 2: Freq: 1.880GHz, Pmax: 20.62dBm, RBW: 3MHz

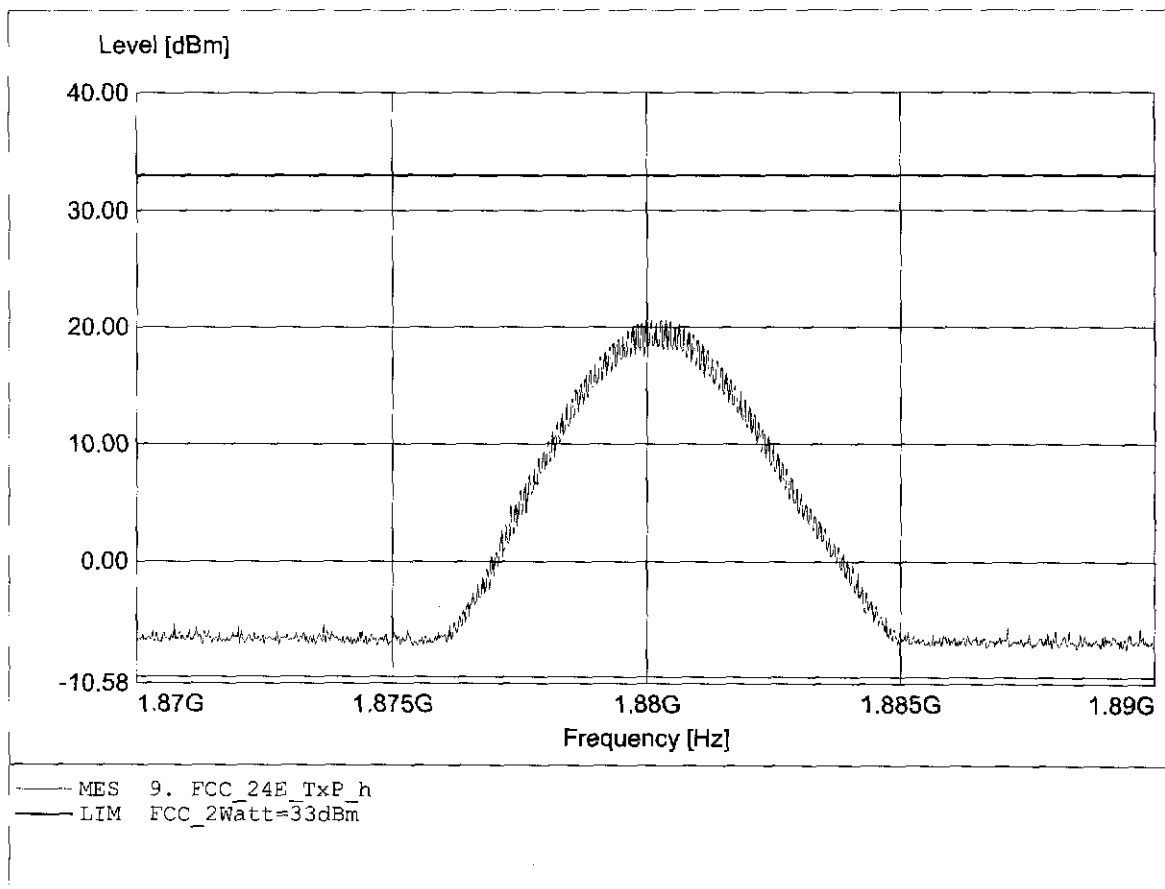


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.6 VDC  
Test Specification: according to §24.232  
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0  
Comment 2: Freq: 1.910GHz, Pmax: 30.67dBm, RBW: 3MHz

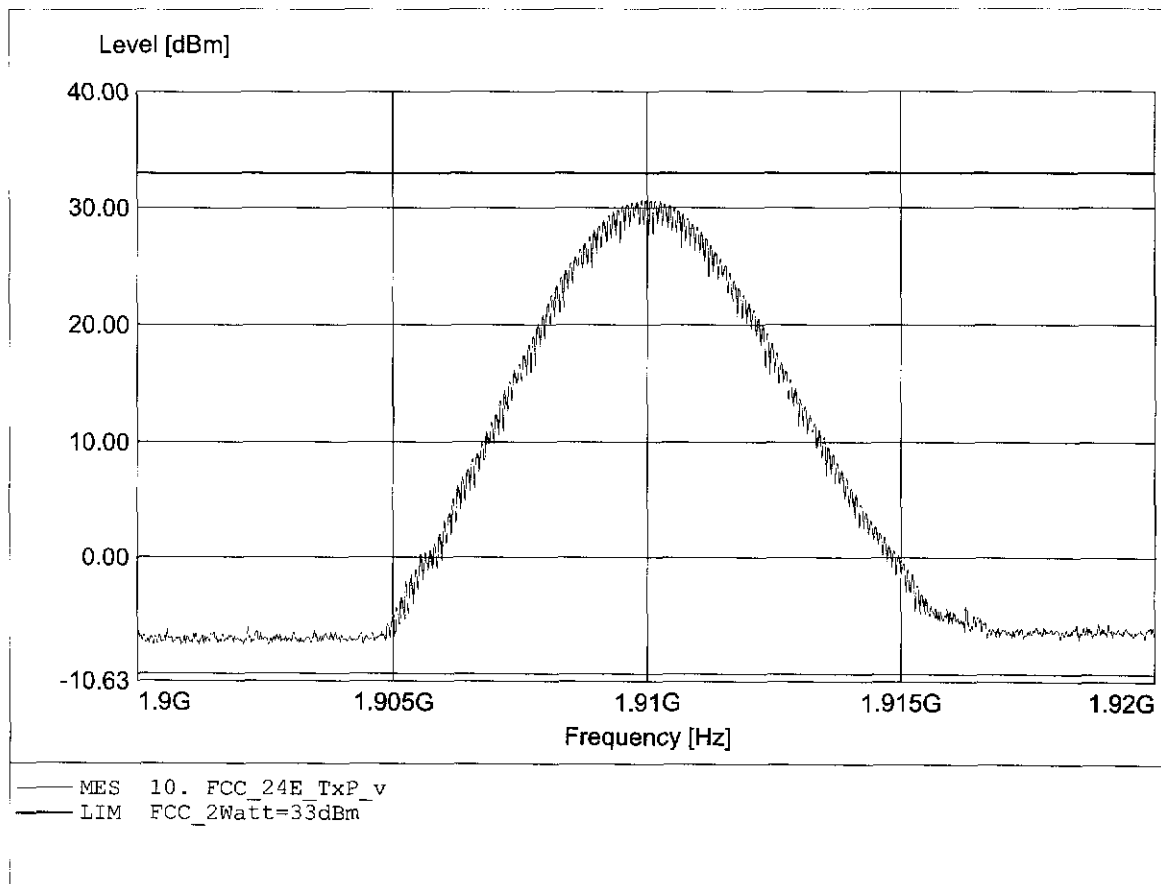


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.6 VDC  
Test Specification: according to §24.232  
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0  
Comment 2: Freq: 1.910GHz, Pmax: 18.80dBm, RBW: 3MHz

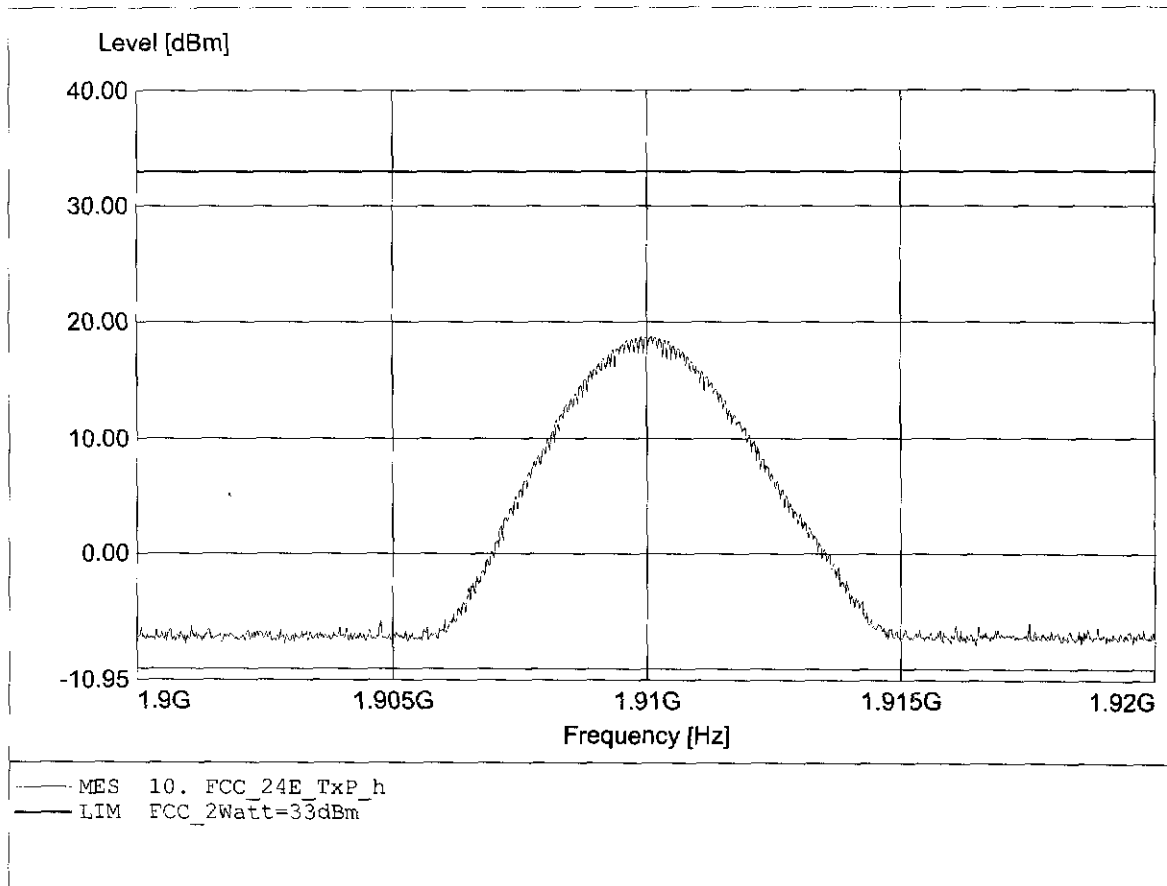


**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426 / HW 4.0  
Approval Holder: Wavecom  
Channel: 128  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 824.472MHz, Pmax: 26.87dBm, RBW: 3MHz

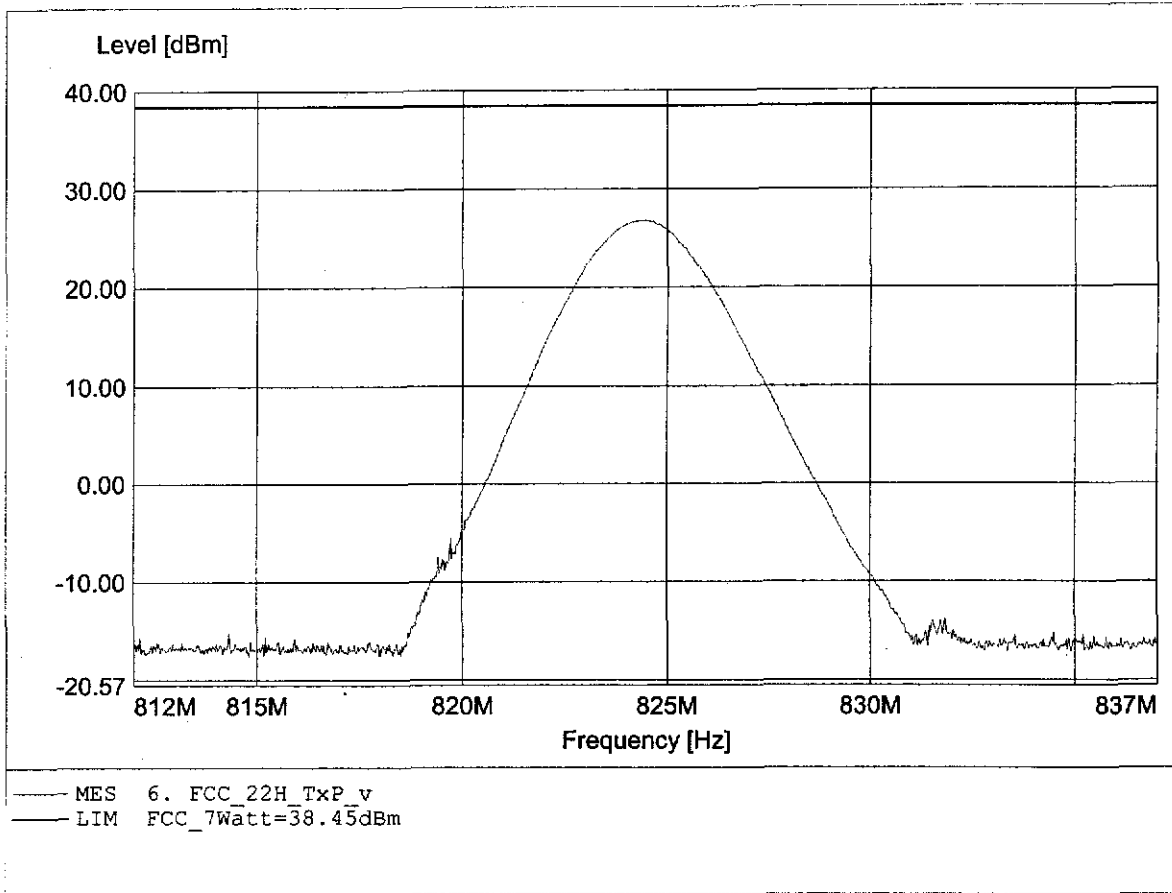

**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**


EUT/Model : GSM/GPRS Module Q2426 / HW 4.0  
Approval Holder: Wavecom  
Channel: 128  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 824.417MHz, Pmax: 21.46dBm, RBW: 3MHz

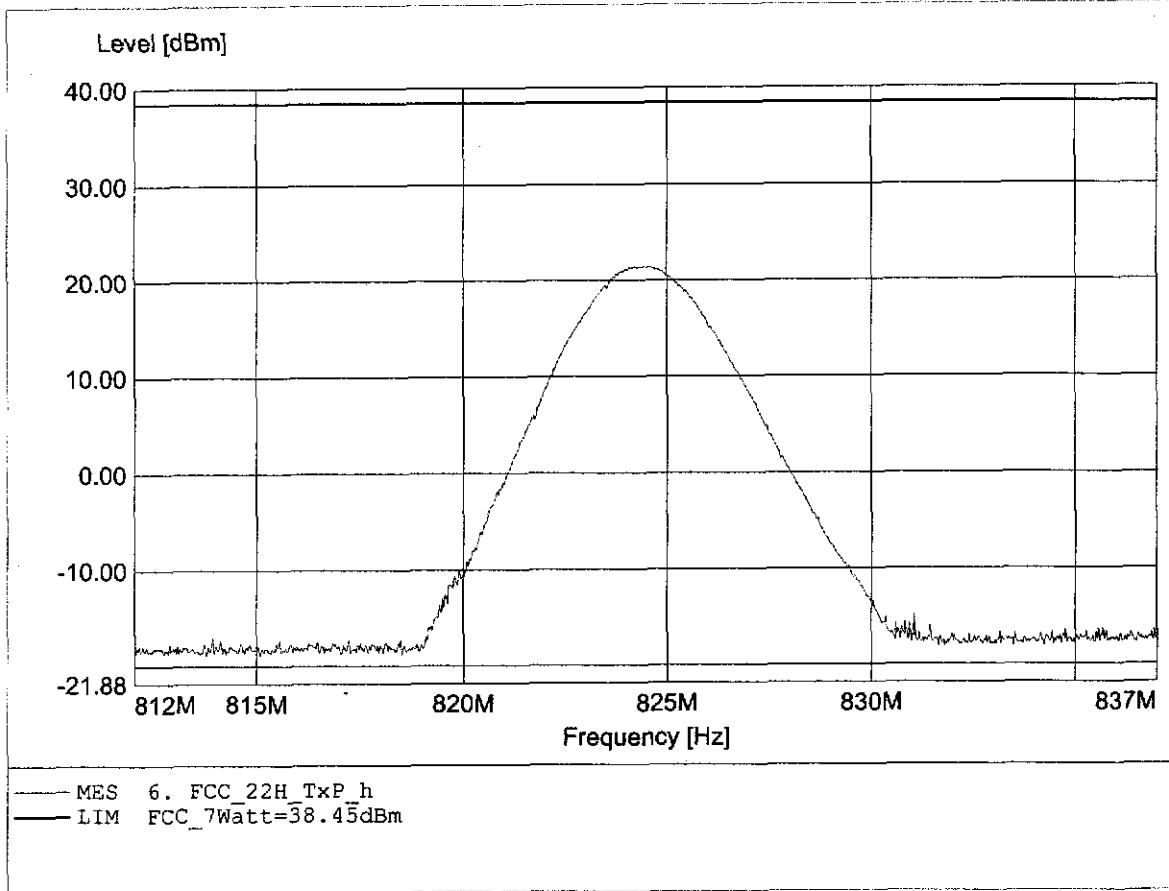




**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426 / HW 4.0  
Approval Holder: Wavecom  
Channel: 188  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 836.400MHz, Pmax: 28.60dBm, RBW: 3MHz

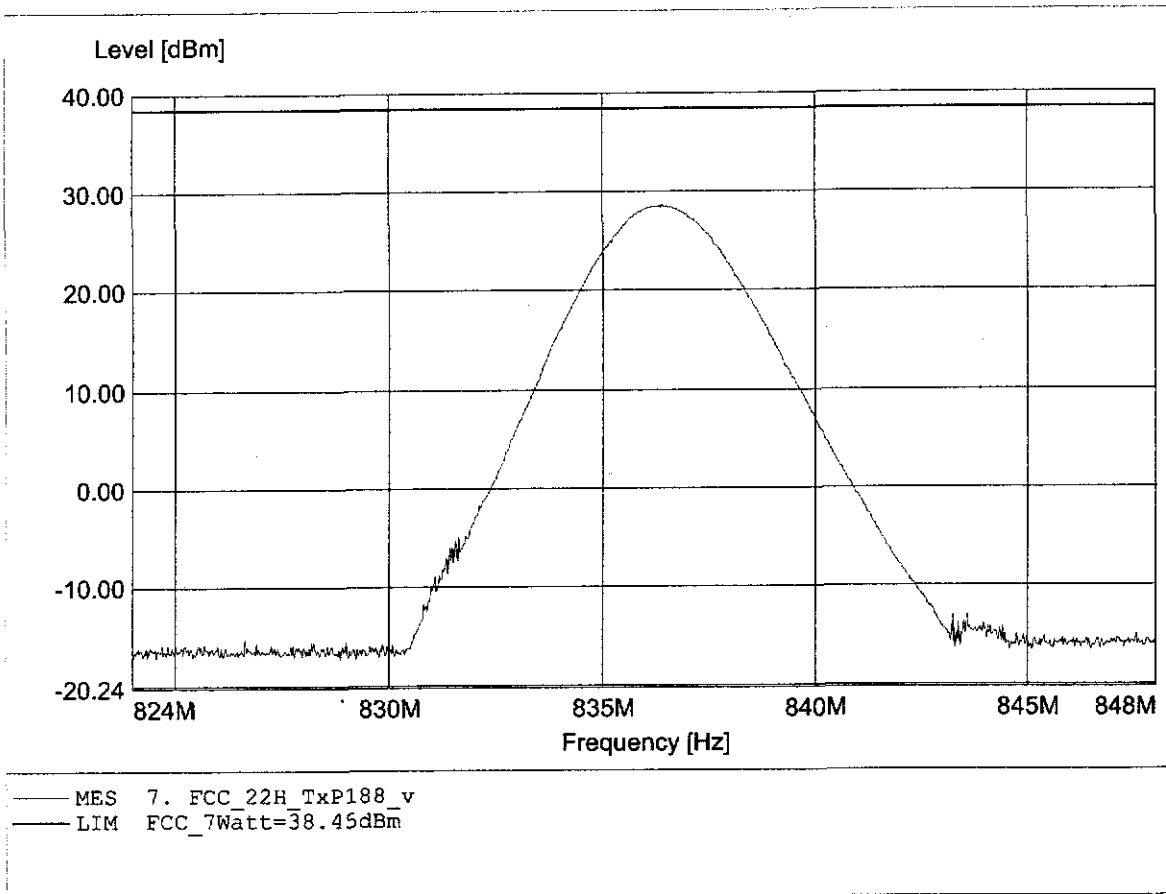


**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426 / HW 4.0  
Approval Holder: Wavecom  
Channel: 188  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to S22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 836.347MHz, Pmax: 21.87dBm, RBW: 3MHz

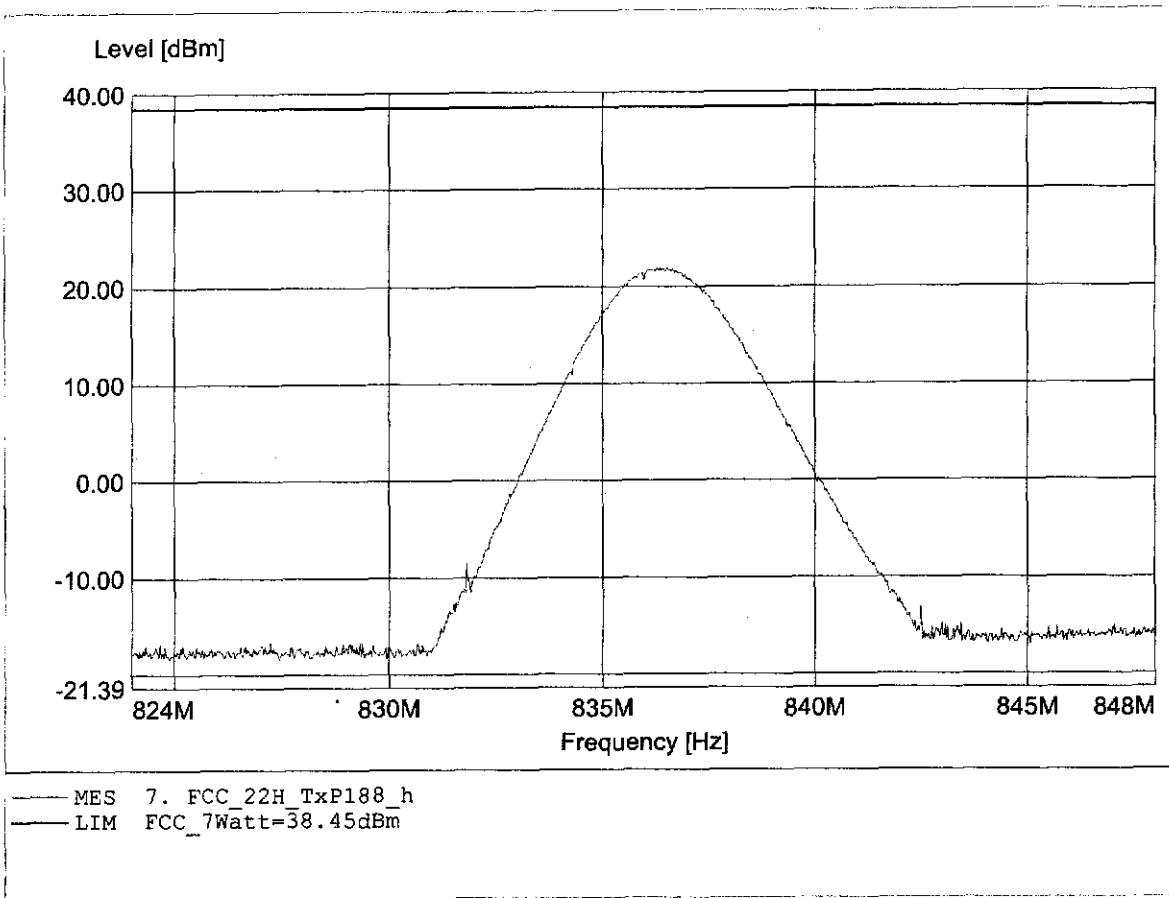


**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426 / HW 4.0  
Approval Holder: Wavecom  
Channel: 251  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 849.000MHz, Pmax: 30.15dBm, RBW: 3MHz

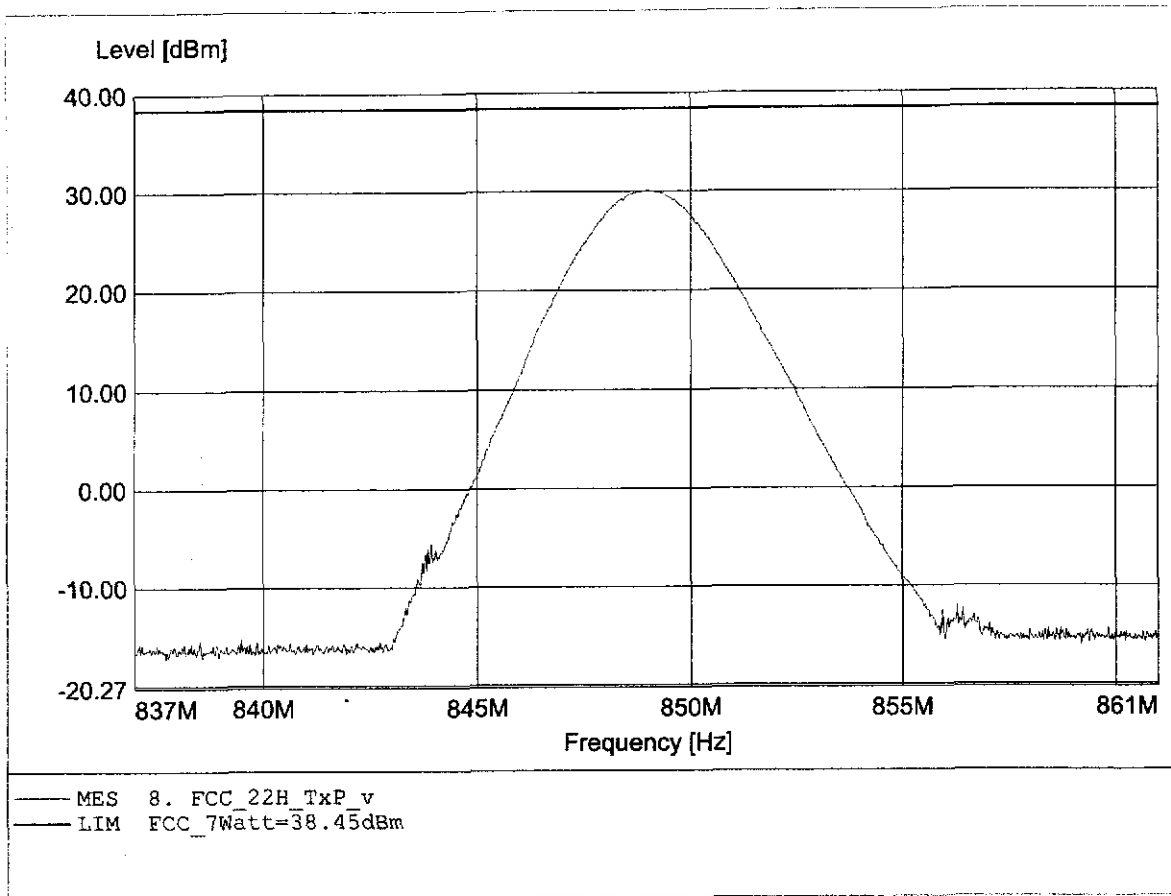

**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426 / HW 4.0  
Approval Holder: Wavecom  
Channel: 251  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 849.0MHz, Pmax: 22.81dBm, RBW: 3MHz

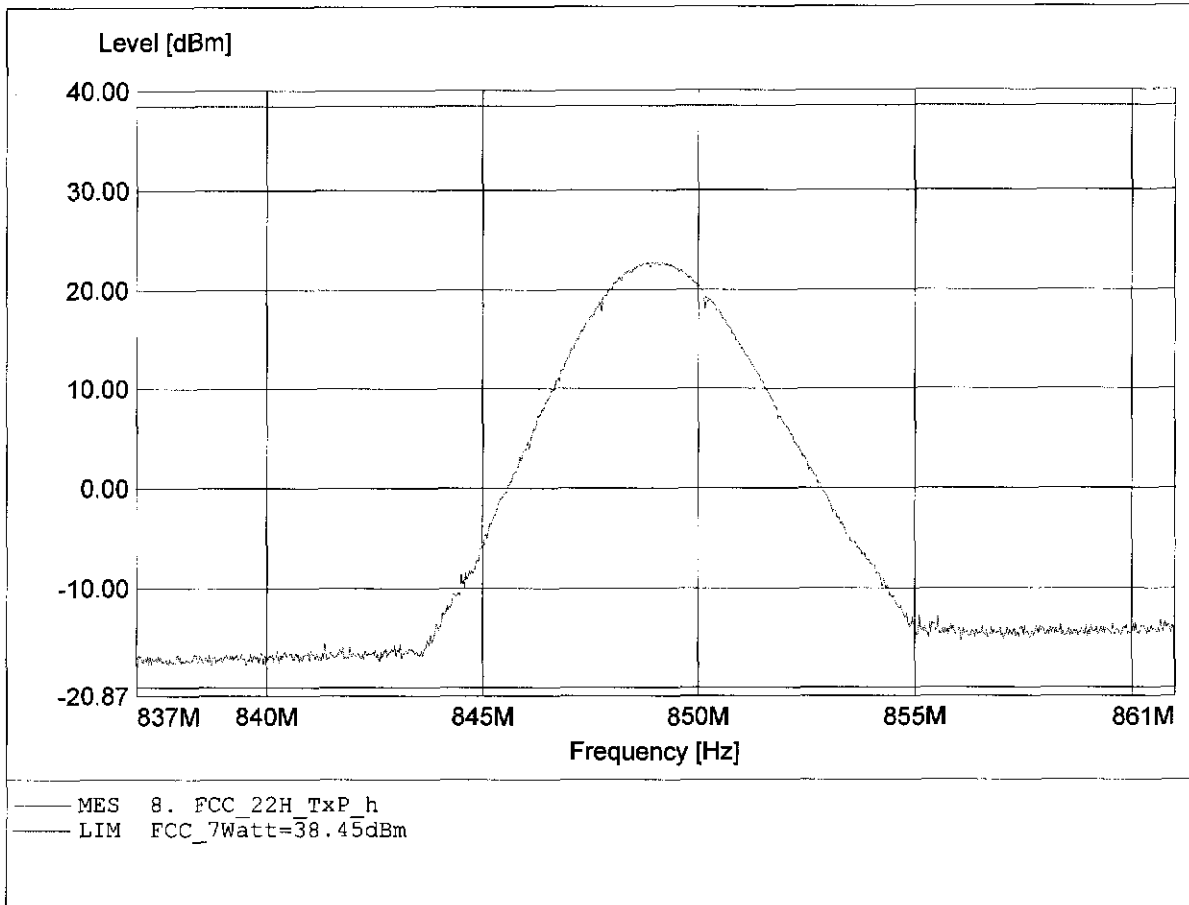



## Appendix D

### Modulation Requirements



## Appendix E

### Audio Filter Characteristics



## Appendix F

Emission Limitation




## Appendix G

Occupied Bandwith






Marker 1 [T1] RBW 3 kHz RF Att 50 dB  
 Ref Lvl 21.42 dBm VBW 3 kHz  
 35 dBm 1.85021503 GHz SWT 280 ms Unit dBm

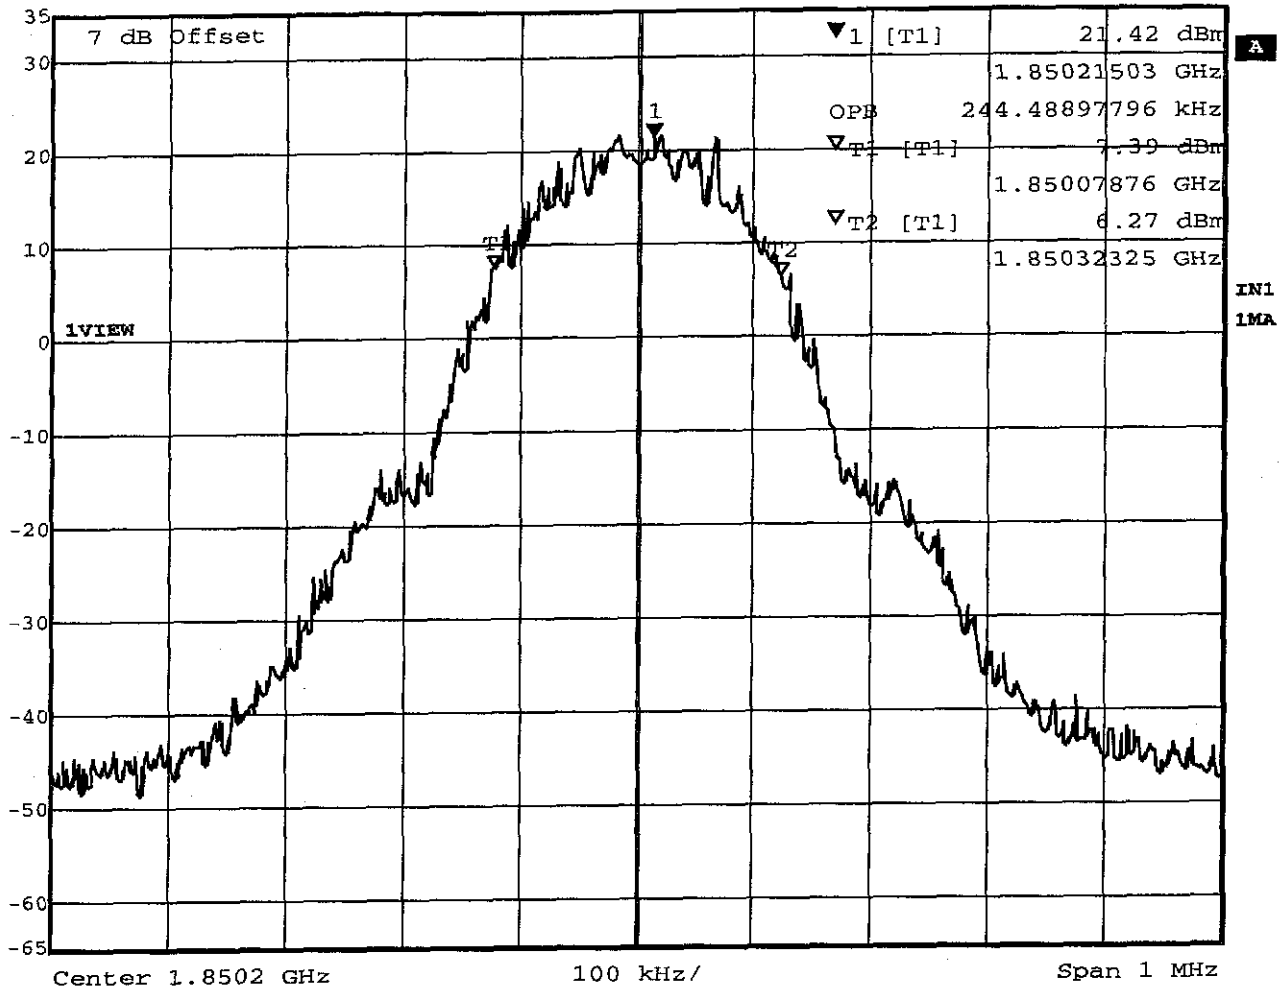

Title: Occupied Bandwidth Channel 512  
 Comment A: Model:Q2426  
 Date: 9.APR.2003 14:12:59




Marker 1 [T1] RBW 3 kHz RF Att 50 dB  
Ref Lvl 21.62 dBm VBW 3 kHz  
35 dBm 1.87998297 GHz SWT 280 ms Unit dBm

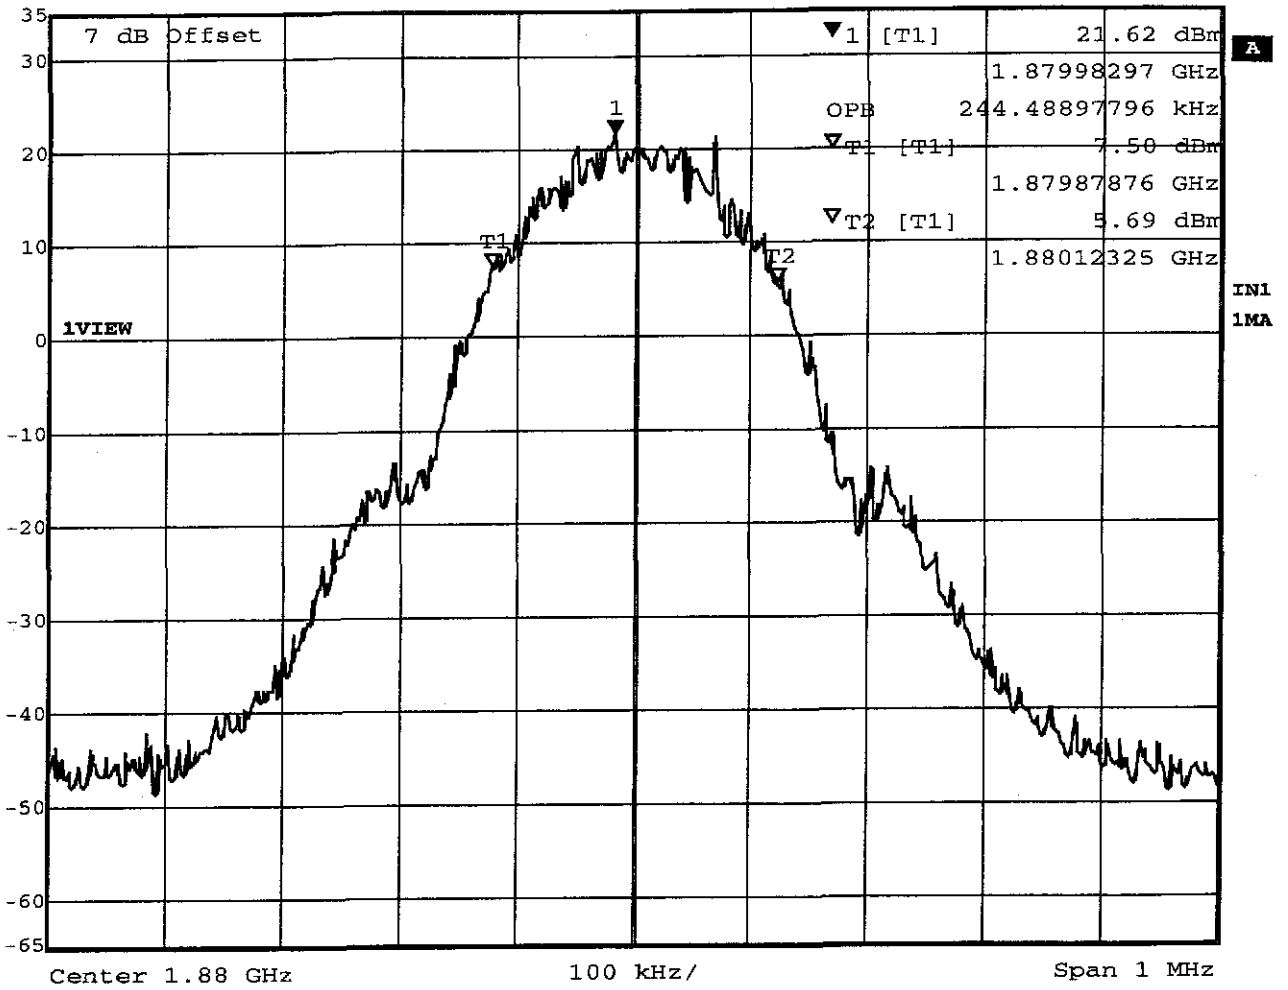

Title: Occupied Bandwidth Channel 661  
Comment A: Model:Q2426  
Date: 9.APR.2003 14:08:47




Marker 1 [T1] RBW 3 kHz RF Att 50 dB  
Ref Lvl 21.35 dBm VBW 3 kHz  
35 dBm 1.90982505 GHz SWT 280 ms Unit dBm

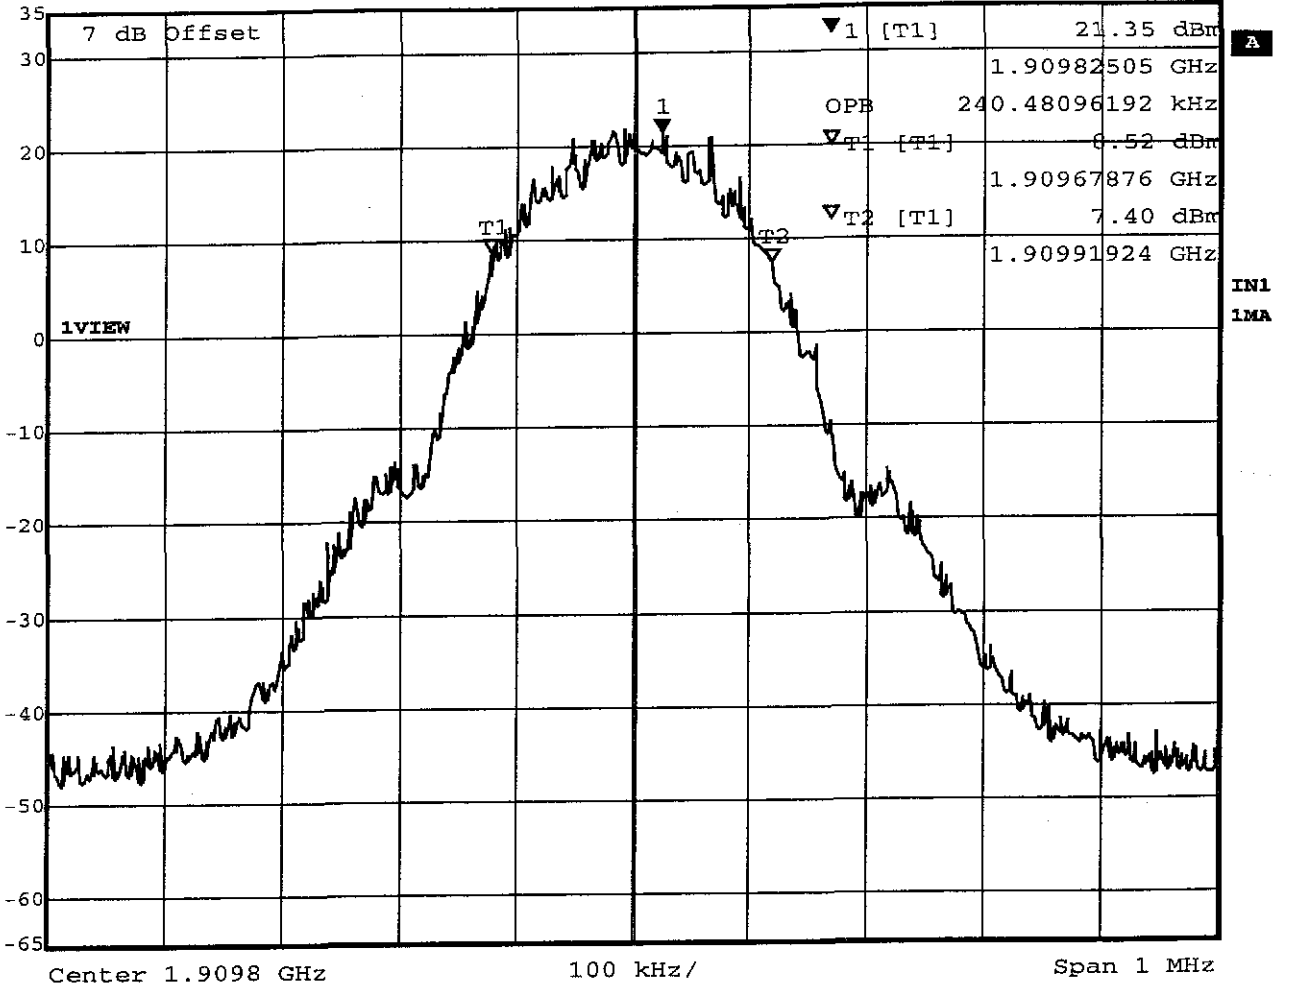

Title: Occupied Bandwidth Channel 810  
Comment A: Model:Q2426  
Date: 9.APR.2003 14:02:44




Marker 1 [T1 ndB]      RBW      3 kHz      RF Att      50 dB  
 Ref Lvl      ndB      26.00 dB      VBW      3 kHz  
 35 dBm      BW      314.62925852 kHz      SWT      280 ms      Unit      dBm

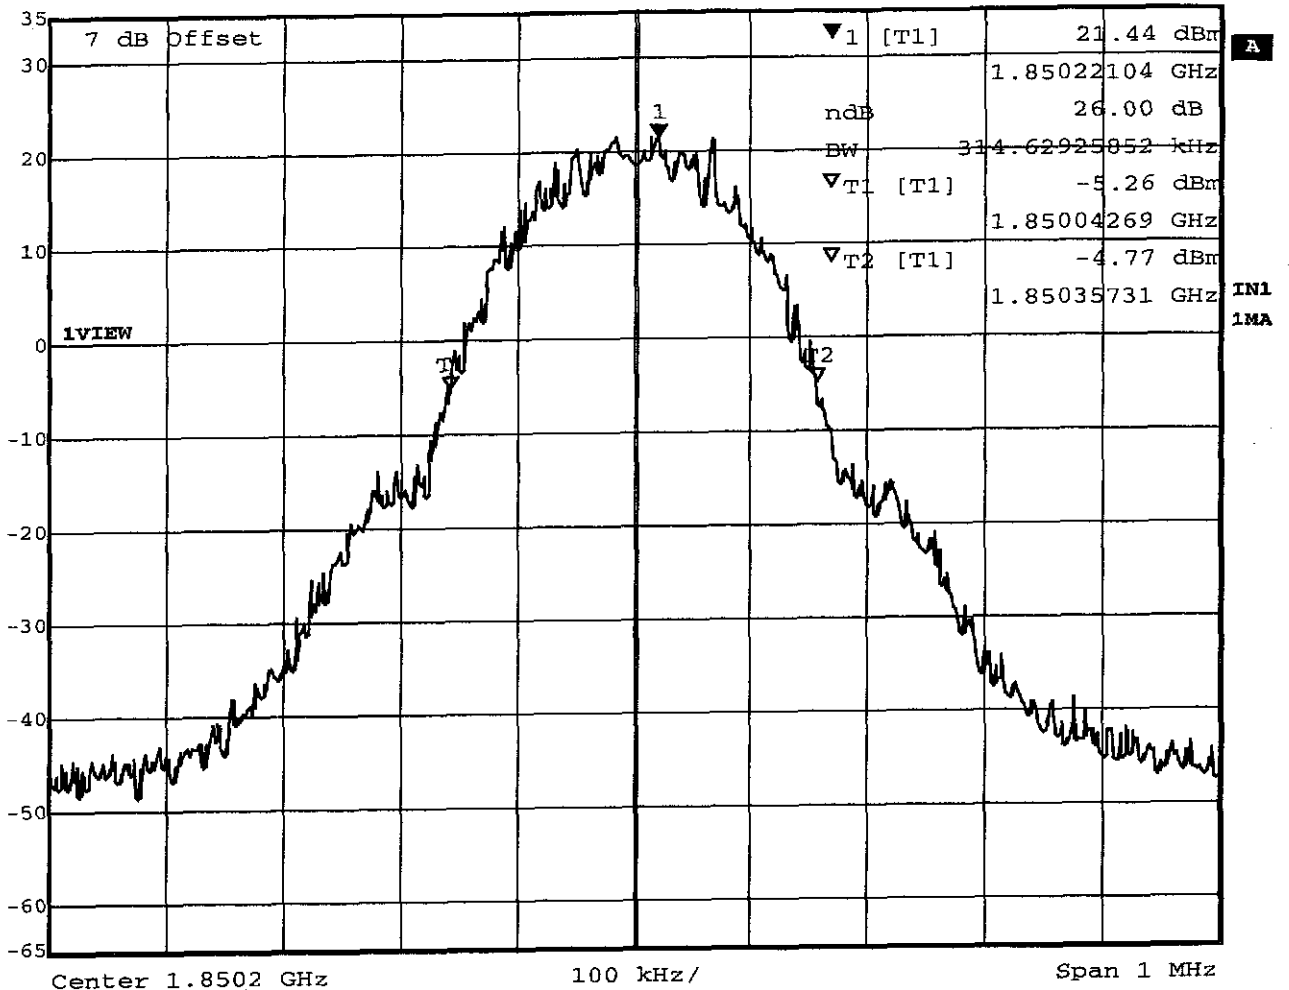

Title:      -26 dBc Bandwidth Channel 512  
 Comment A: Model:Q2426  
 Date:      9.APR.2003 14:14:37




Marker 1 [T1 ndB]      RBW      3 kHz      RF Att      50 dB  
 Ref Lvl      ndB      26.00 dB      VBW      3 kHz  
 35 dBm      BW      312.62525050 kHz      SWT      280 ms      Unit      dBm

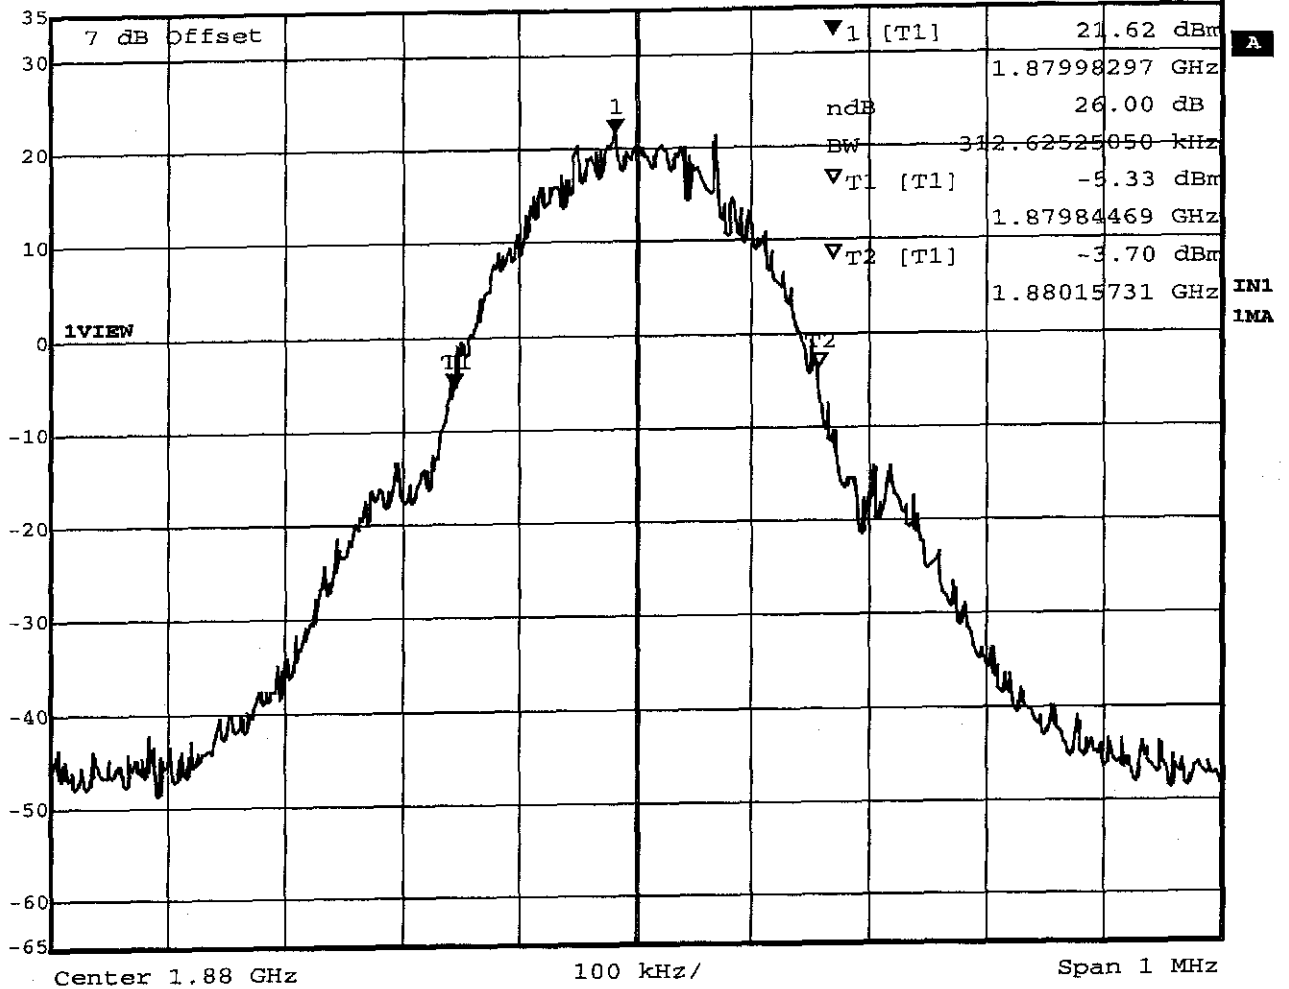

Title:      -26 dBc Bandwidth Channel 661  
 Comment A: Model:Q2426  
 Date:      9.APR.2003 14:10:17




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB  
Ref Lvl ndB 26.00 dB VBW 3 kHz  
35 dBm BW 316.63326653 kHz SWT 280 ms Unit dBm

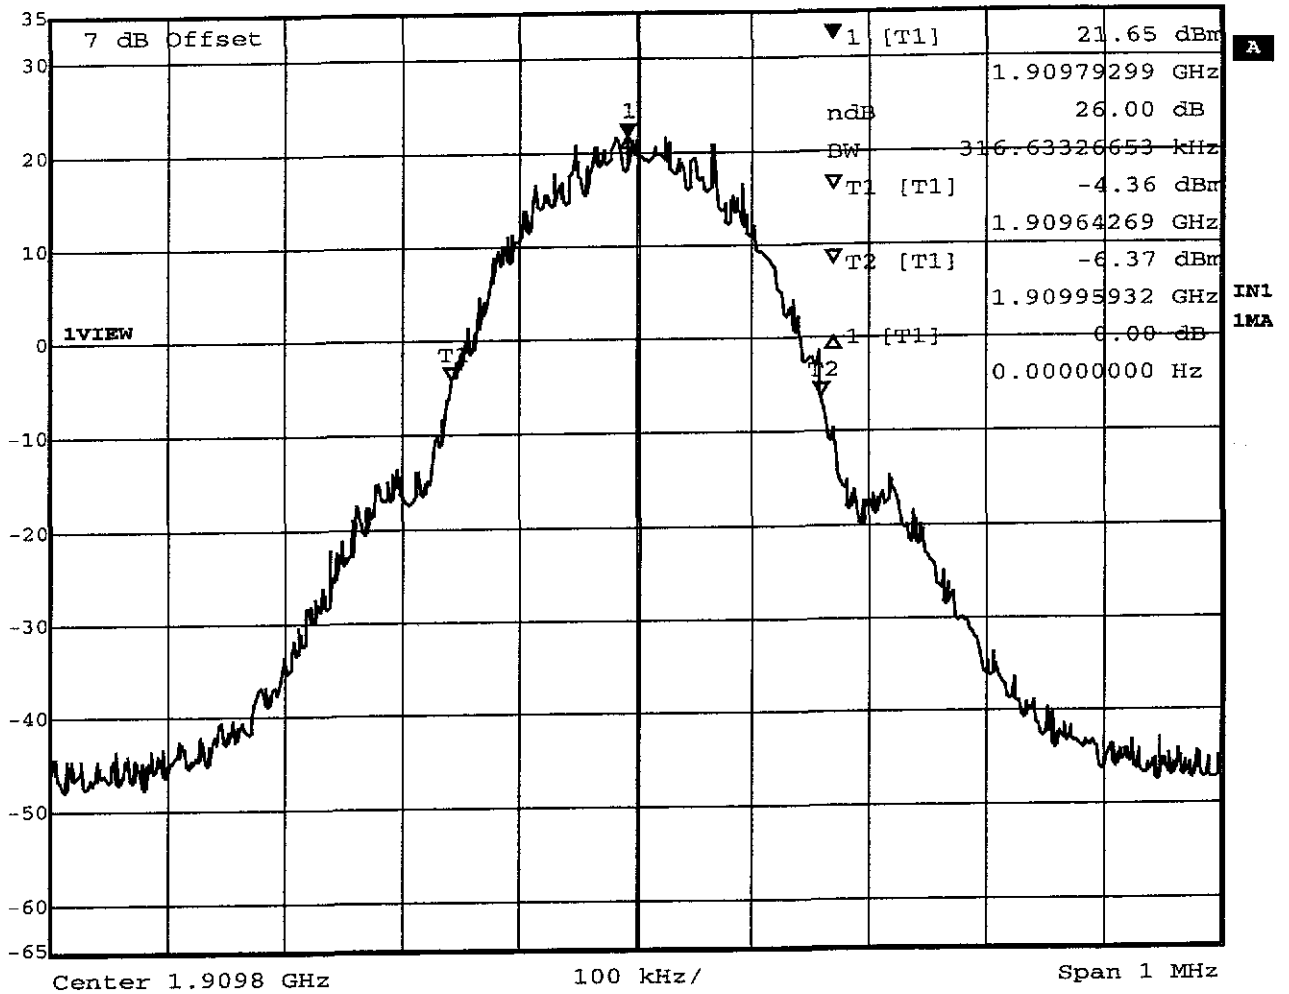

Title: -26 dBc Bandwidth Channel 810  
Comment A: Model:Q2426  
Date: 9.APR.2003 14:05:47




Marker 1 [T1] RBW 3 kHz RF Att 50 dB  
Ref Lvl 24.31 dBm VBW 3 kHz  
35 dBm 824.18496994 MHz SWT 280 ms Unit dBm

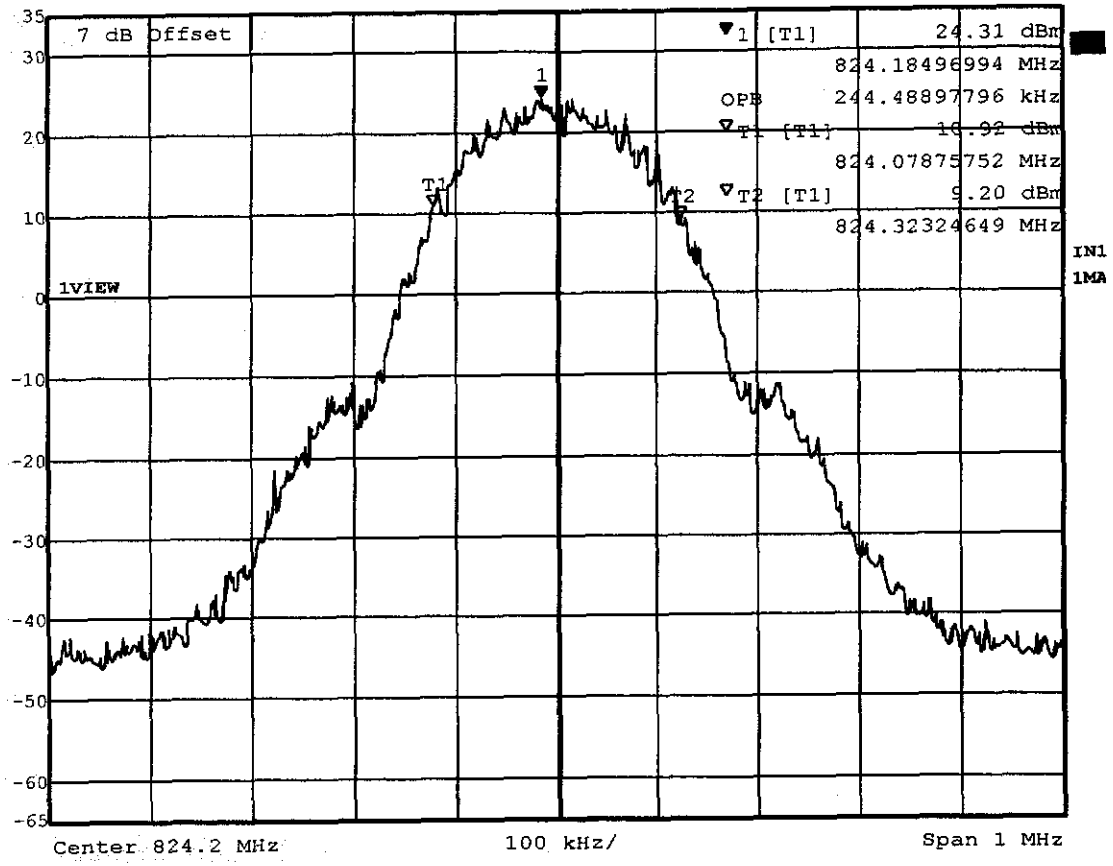

Title: Occupied Bandwidth Channel 128  
Comment A: Model:Q2426 HW.4.0  
Date: 11.APR.2003 09:21:43



Marker 1 [T1] RBW 3 kHz RF Att 50 dB  
Ref Lvl 24.58 dBm VBW 3 kHz  
35 dBm 836.20300601 MHz SWT 280 ms Unit dBm

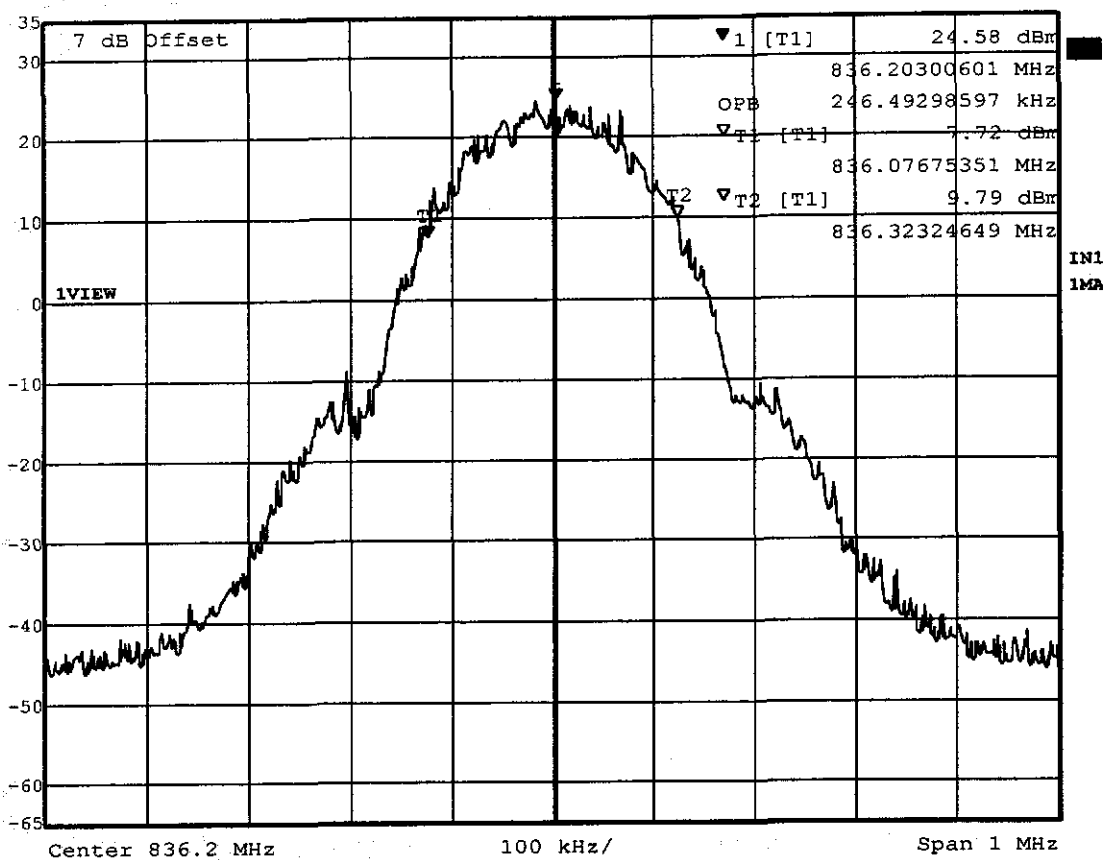


Title: Occupied Bandwidth Channel 188  
Comment A: Model:Q2426 HW.4.0  
Date: 11.APR.2003 09:17:15






Marker 1 [T1] RBW 3 kHz RF Att 50 dB  
Ref Lvl 25.37 dBm VBW 3 kHz  
35 dBm 848.82505010 MHz SWT 280 ms Unit dBm

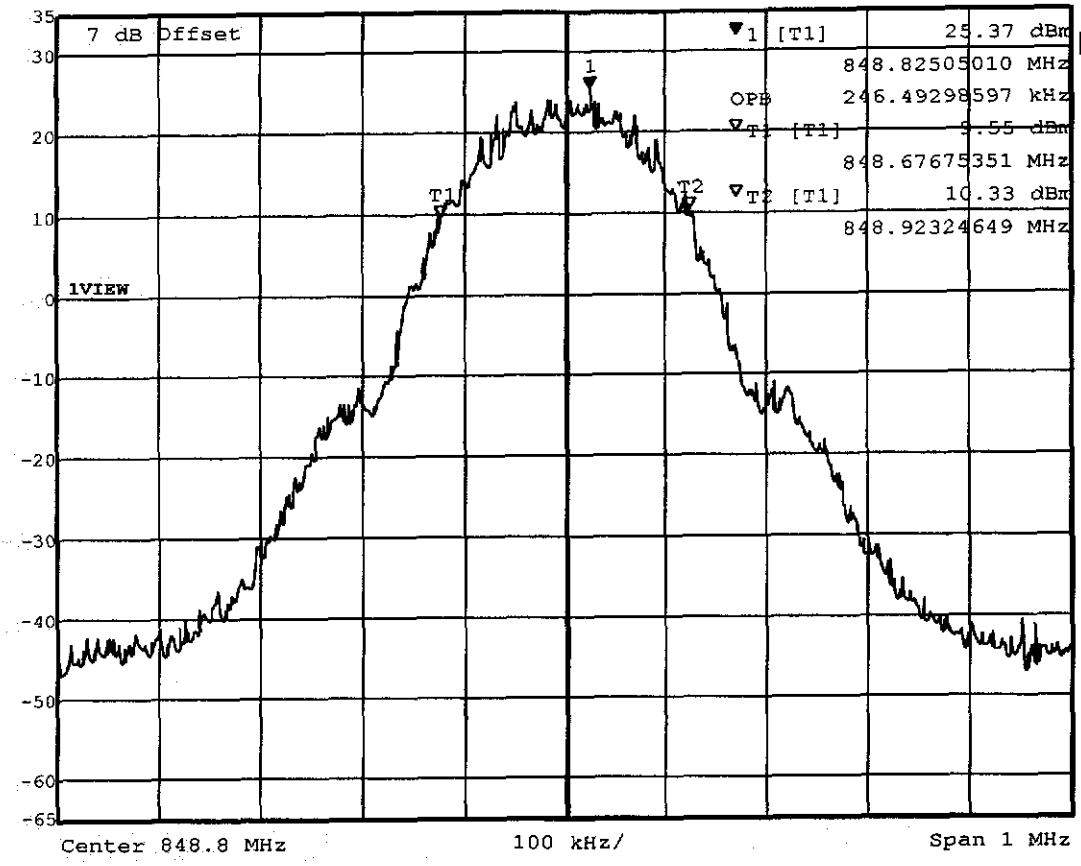

Title: Occupied Bandwidth Channel 251  
Comment A: Model:Q2426 HW.4.0  
Date: 11.APR.2003 09:12:08




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB  
Ref Lvl ndB 26.00 dB VBW 3 kHz  
35 dBm BW 316.63326653 kHz SWT 280 ms Unit dBm

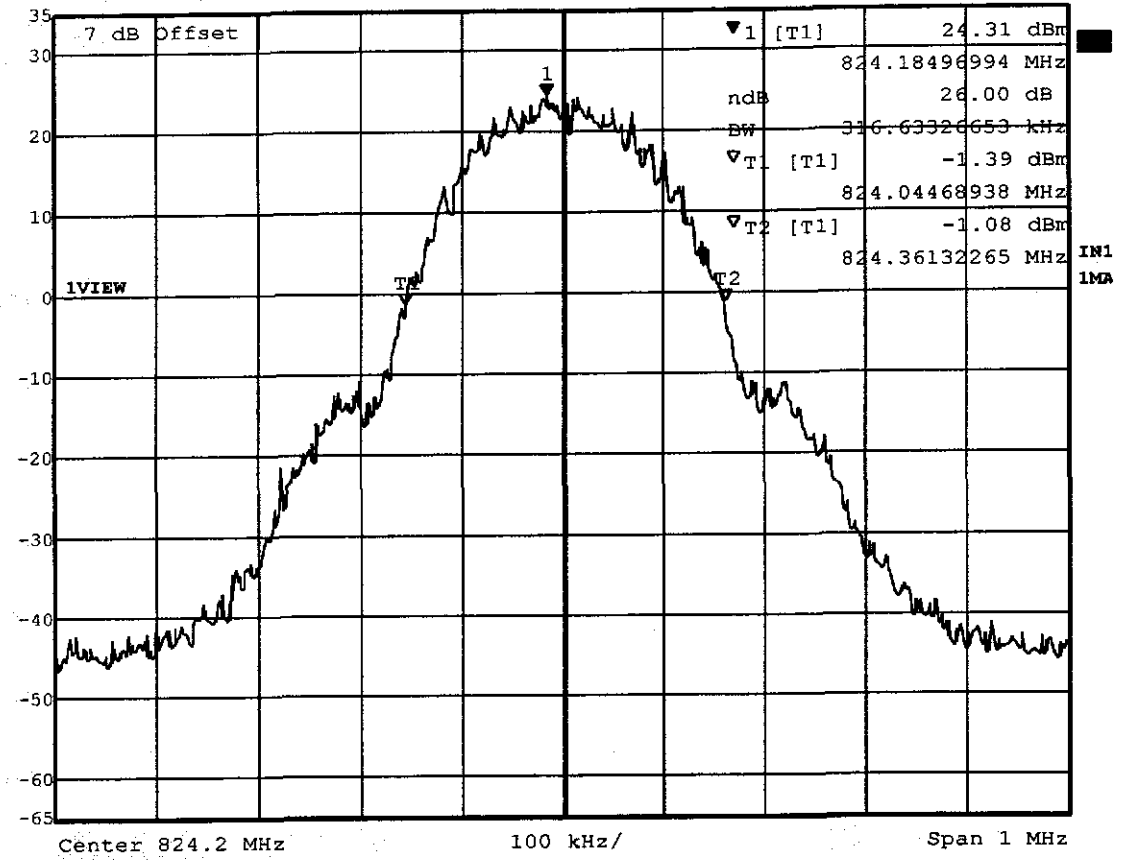

Title: - 26 dBc Bandwidth Channel 128  
Comment A: Model:Q2426 HW.4.0  
Date: 11.APR.2003 09:23:17




Marker 1 [T1 ndB]      RBW    3 kHz    RF Att    50 dB  
 Ref Lvl            ndB            26.00 dB    VBW    3 kHz  
 35 dBm            BW    316.63326653 kHz    SWT    280 ms    Unit            dBm

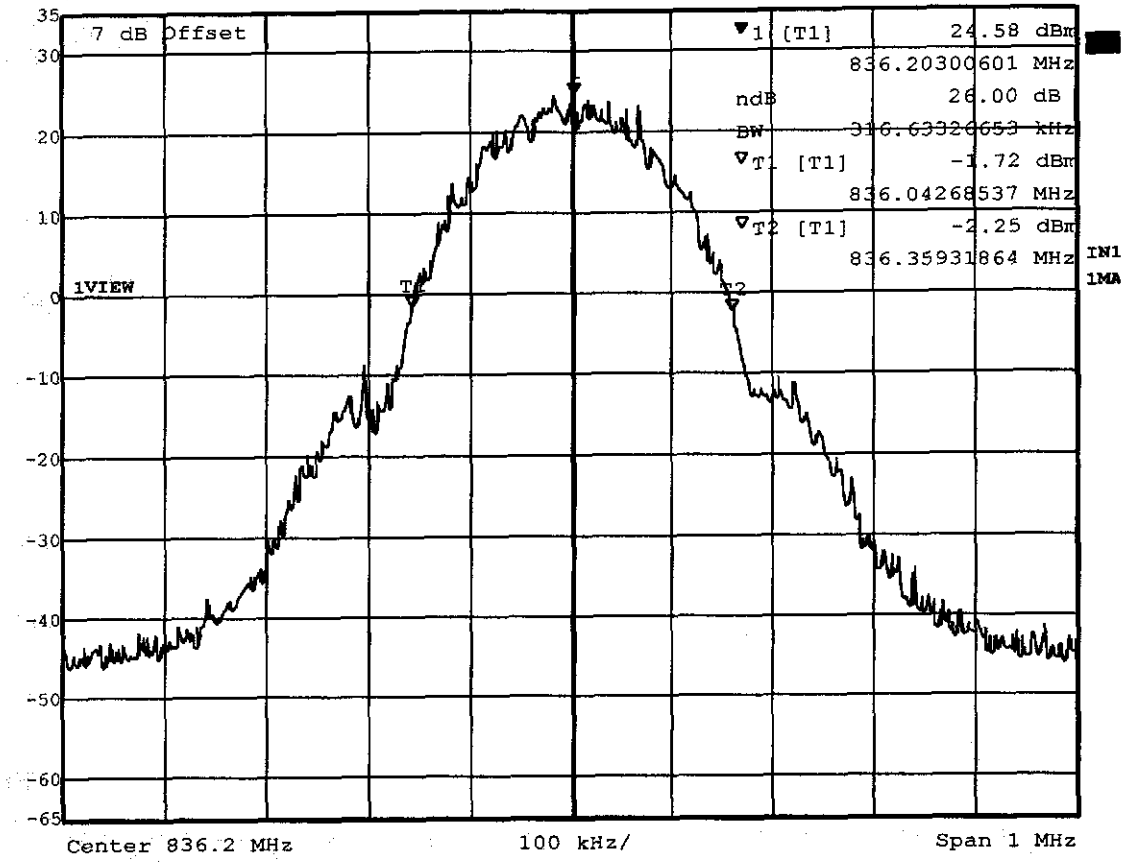

Title:            - 26 dBc Bandwidth Channel 188  
 Comment A:      Model:Q2426 HW.4.0  
 Date:            11.APR.2003 09:18:47



Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB  
 Ref Lvl ndB 26.00 dB VBW 3 kHz  
 35 dBm BW 314.62925852 kHz SWT 280 ms Unit dBm

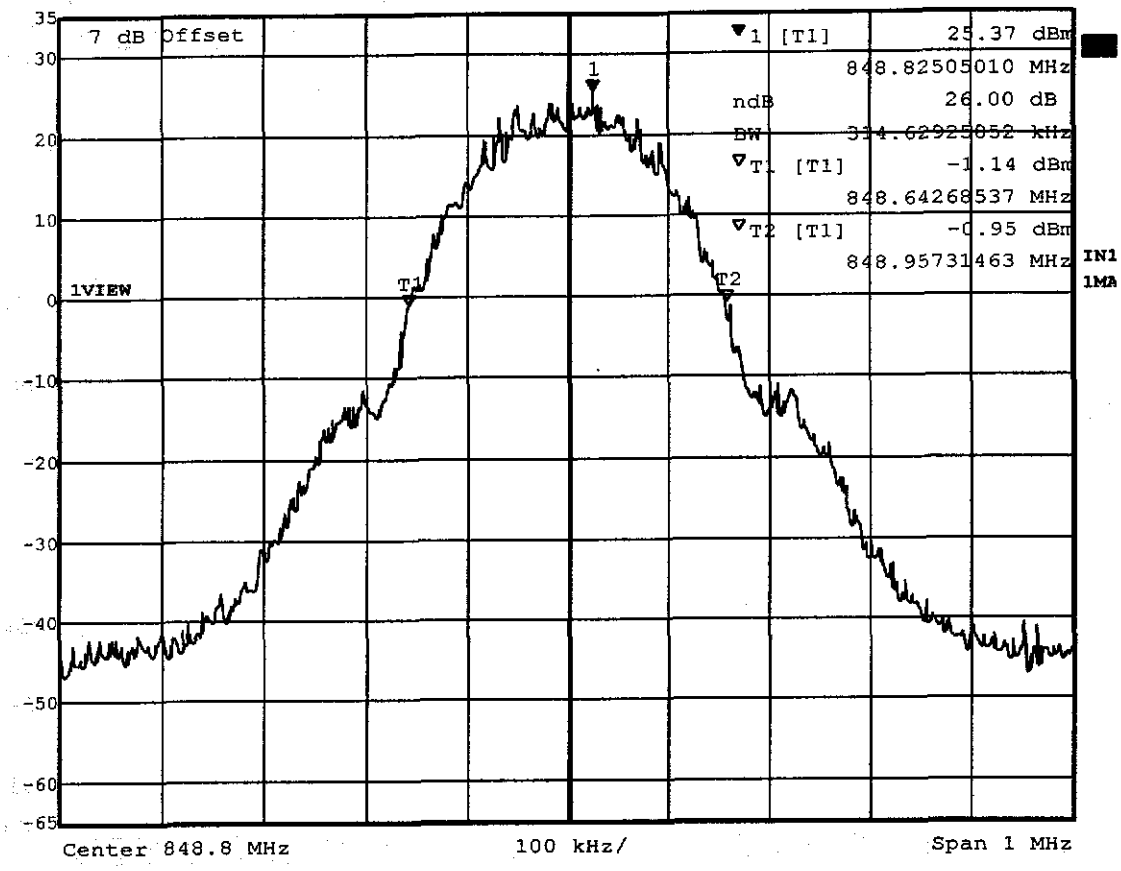

Title: -26 dBc Bandwidth Channel 251  
 Comment A: Model:Q2426 HW.4.0  
 Date: 11.APR.2003 09:14:52




## Appendix H

### Emissions in Receiver Critical Band




OVLD      Marker 1 [T1]      RBW    30 kHz    RF Att    0 dB  
Ref Lvl                    -85.08 dBm    VBW    30 kHz    Mixer    -20 dBm  
-10 dBm                    882.07615230 MHz    SWT    70 ms    Unit       dBm

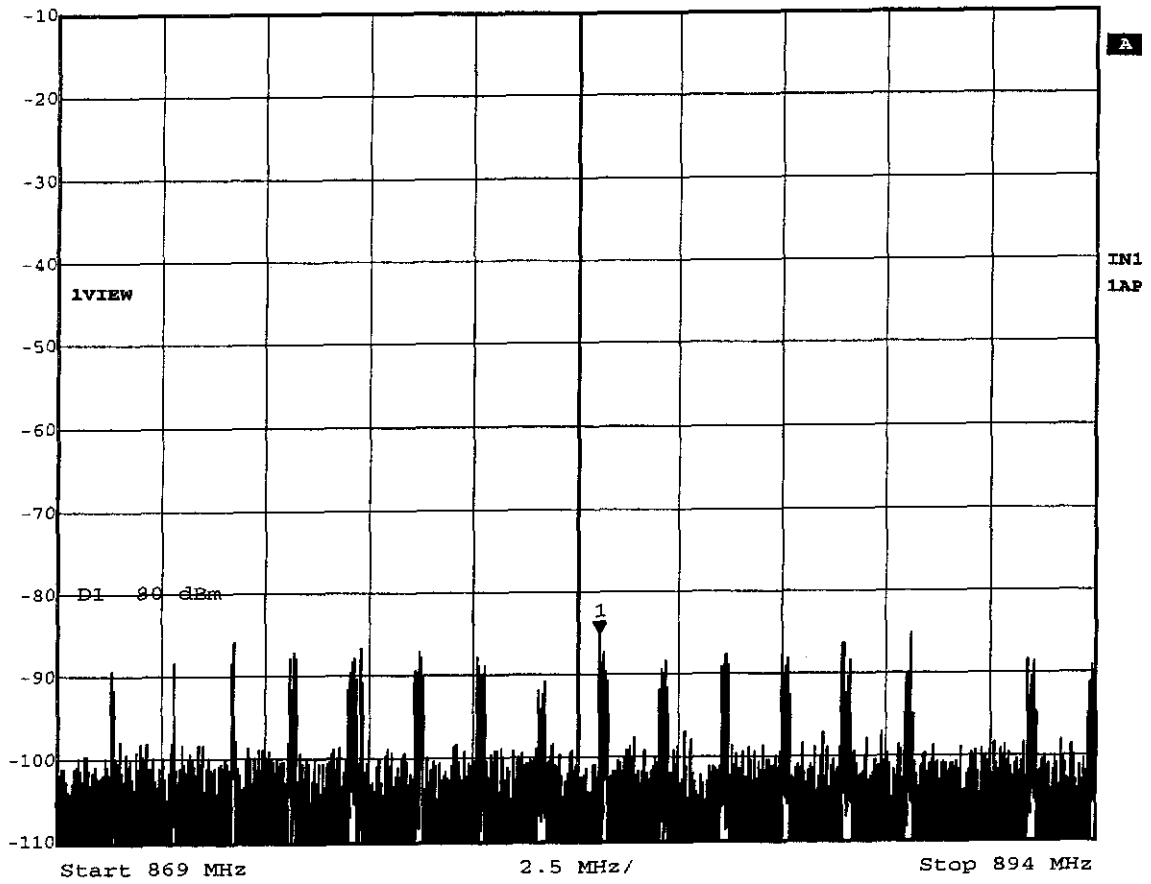

Title:      Channel 128  
Comment A: Model:Q2426 HW:4.0  
Date:      14.APR.2003 08:58:01




OVLD      Marker 1 [T1]      RBW    30 kHz    RF Att    0 dB  
Ref Lvl                    -84.47 dBm    VBW    30 kHz    Mixer    -20 dBm  
-10 dBm                    882.32665331 MHz    SWT    70 ms    Unit    dBm

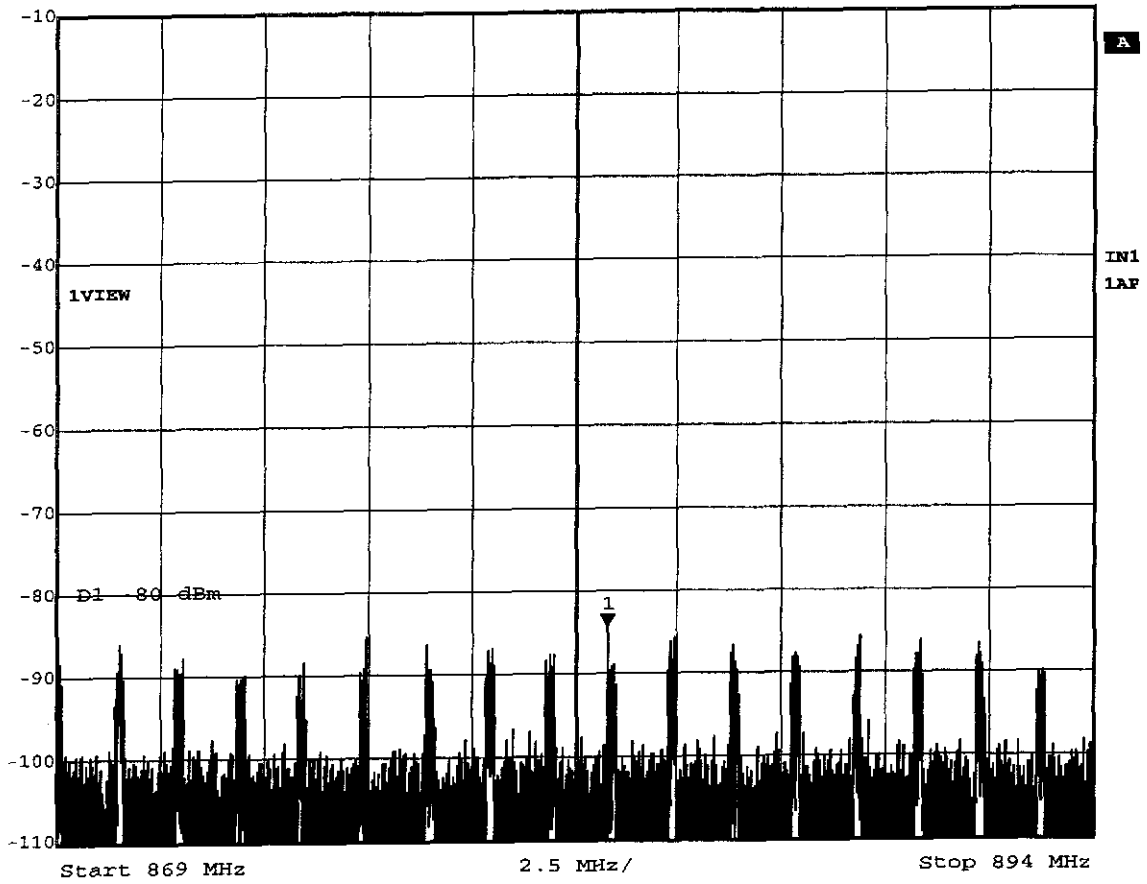

Title:      Channel 188  
Comment A: Model:Q2426 HW:4.0  
Date:      14.APR.2003 08:44:26



OVLD Marker 1 [T1] RBW 30 kHz RF Att 0 dB  
Ref Lvl -84.72 dBm VBW 30 kHz Mixer -20 dBm  
-10 dBm 891.74549098 MHz SWT 70 ms Unit dBm

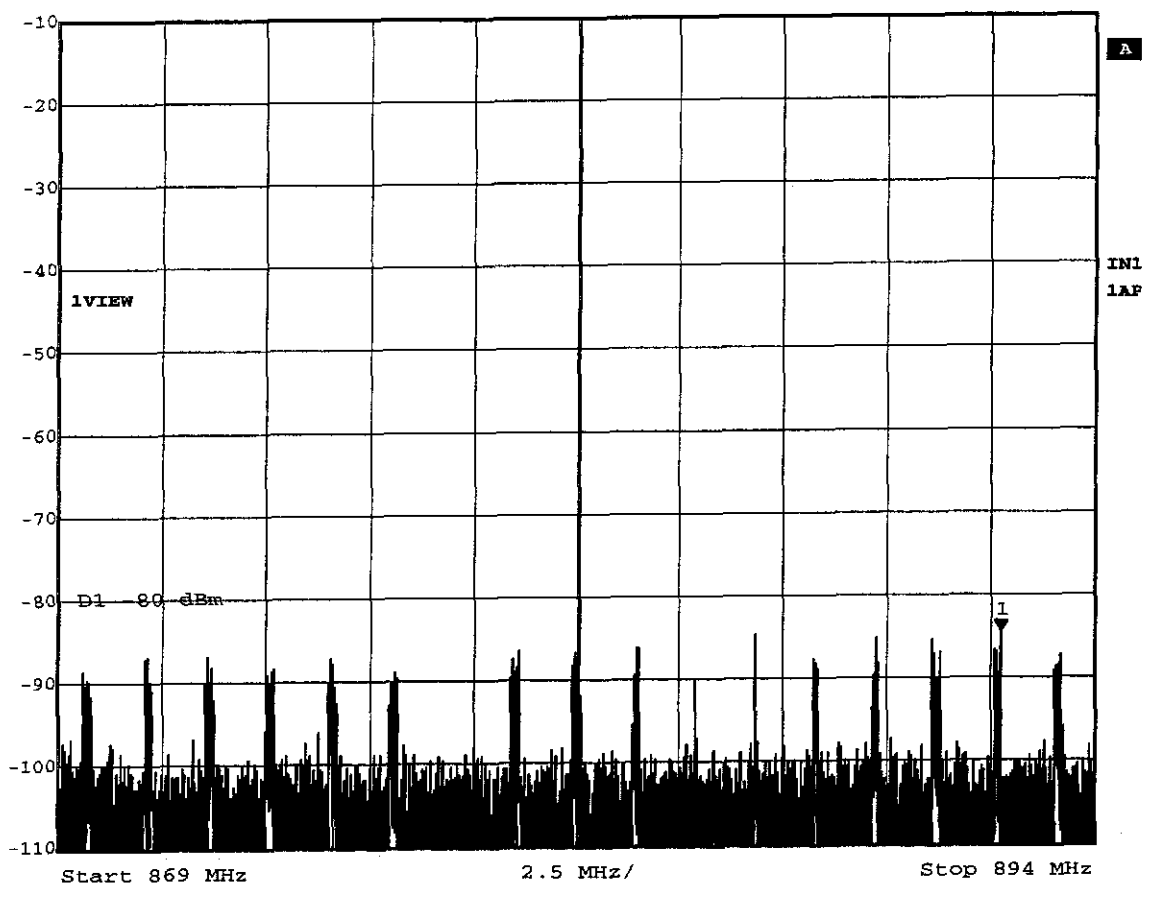

Title: Channel 251  
Comment A: Model:Q2426 HW:4.0  
Date: 14.APR.2003 09:01:18





## Appendix I

Out of Band Emission at Antenna Terminals Mobile Emissions In Base Frequency Range




## Appendix J

### Field Strength of Spurious Radiation




Marker 1 [T1] RBW 3 MHz RF Att 50 dB  
Ref Lvl 29.59 dBm VBW 3 MHz  
35 dBm 1.90983768 GHz SWT 5 ms Unit dBm

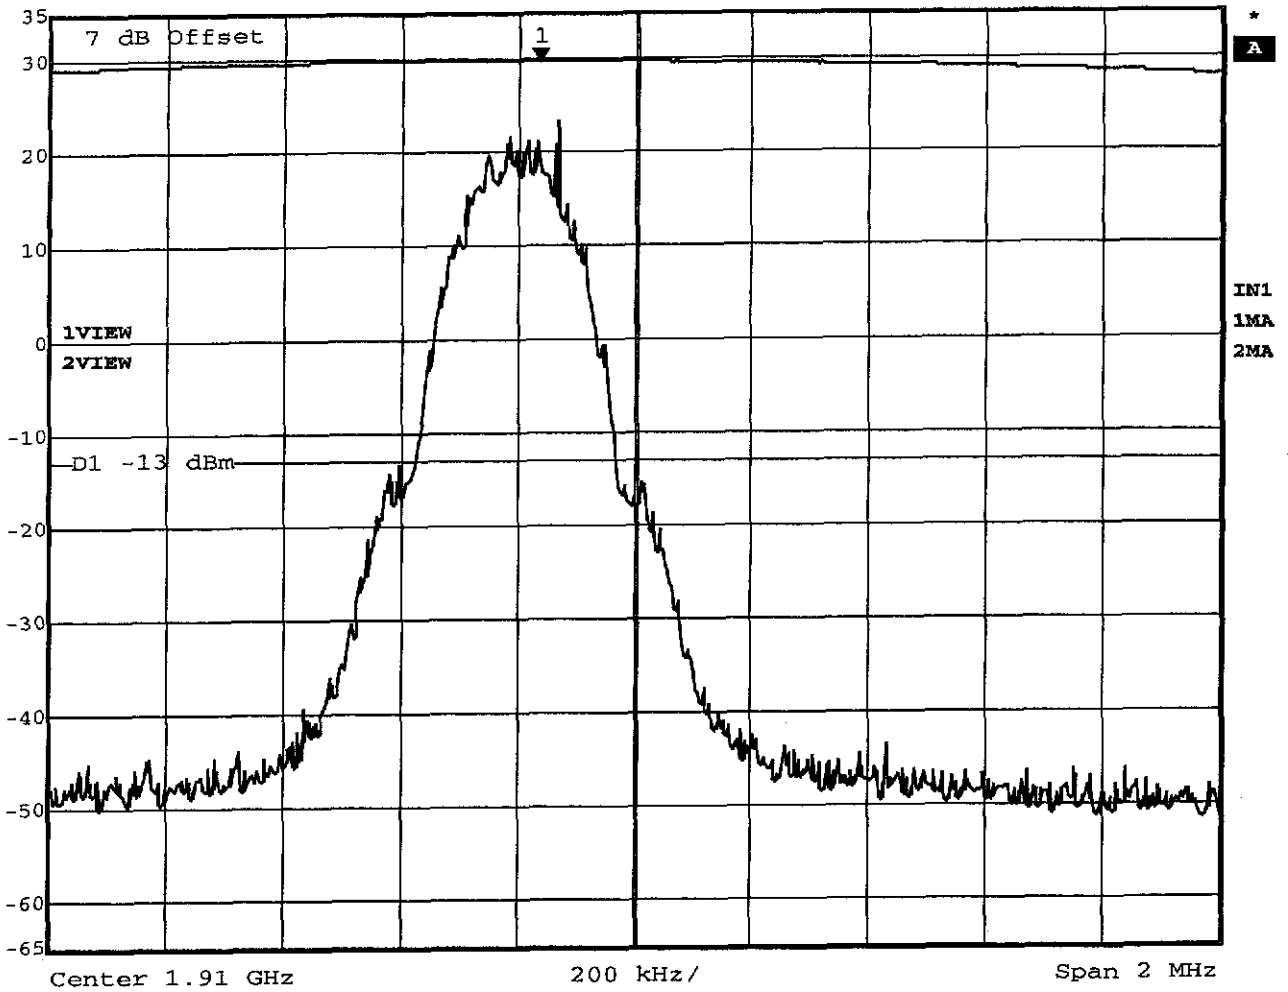

Title: Higher Band Edge  
Comment A: Model:Q2426  
Date: 9.APR.2003 14:23:16




Marker 1 [T1] RBW 3 kHz RF Att 50 dB  
Ref Lvl 29.80 dBm VBW 3 kHz  
35 dBm 1.85017435 GHz SWT 560 ms Unit dBm

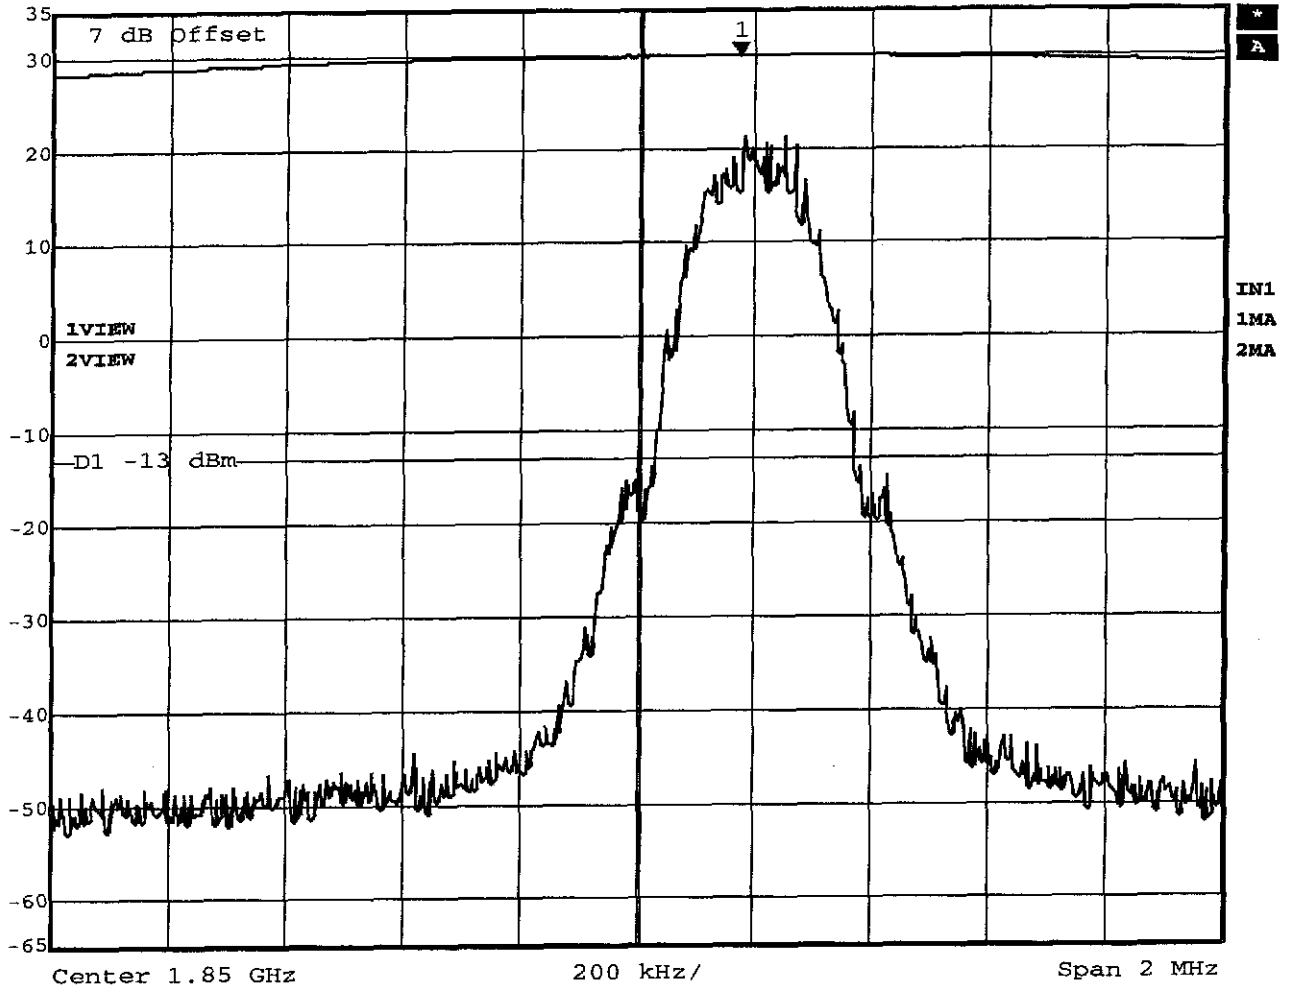

Title: Lower Band Edge  
Comment A: Model:Q2426  
Date: 9.APR.2003 14:20:11


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 197.922MHz, Pmax: -50.58dBm, RBW: 1MHz

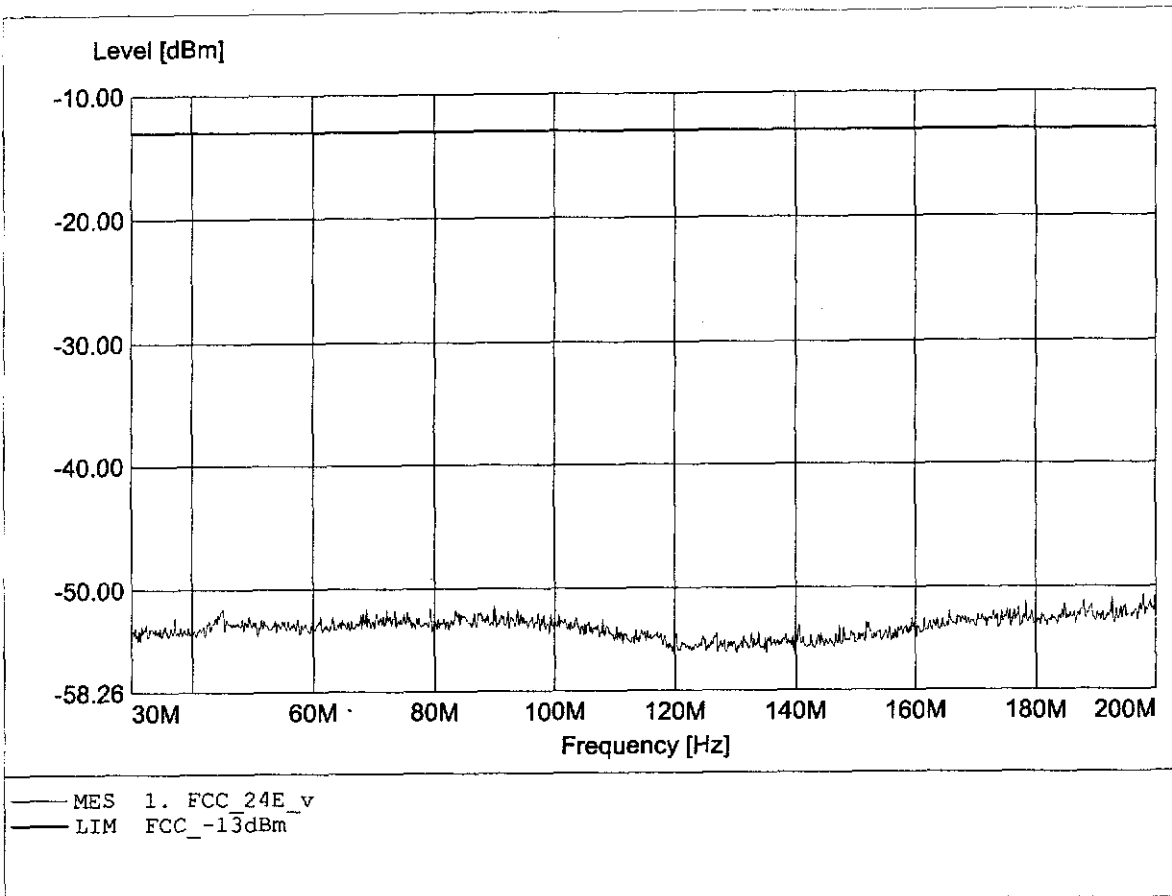


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 45.111MHz, Pmax: -50.17dBm, RBW: 1MHz

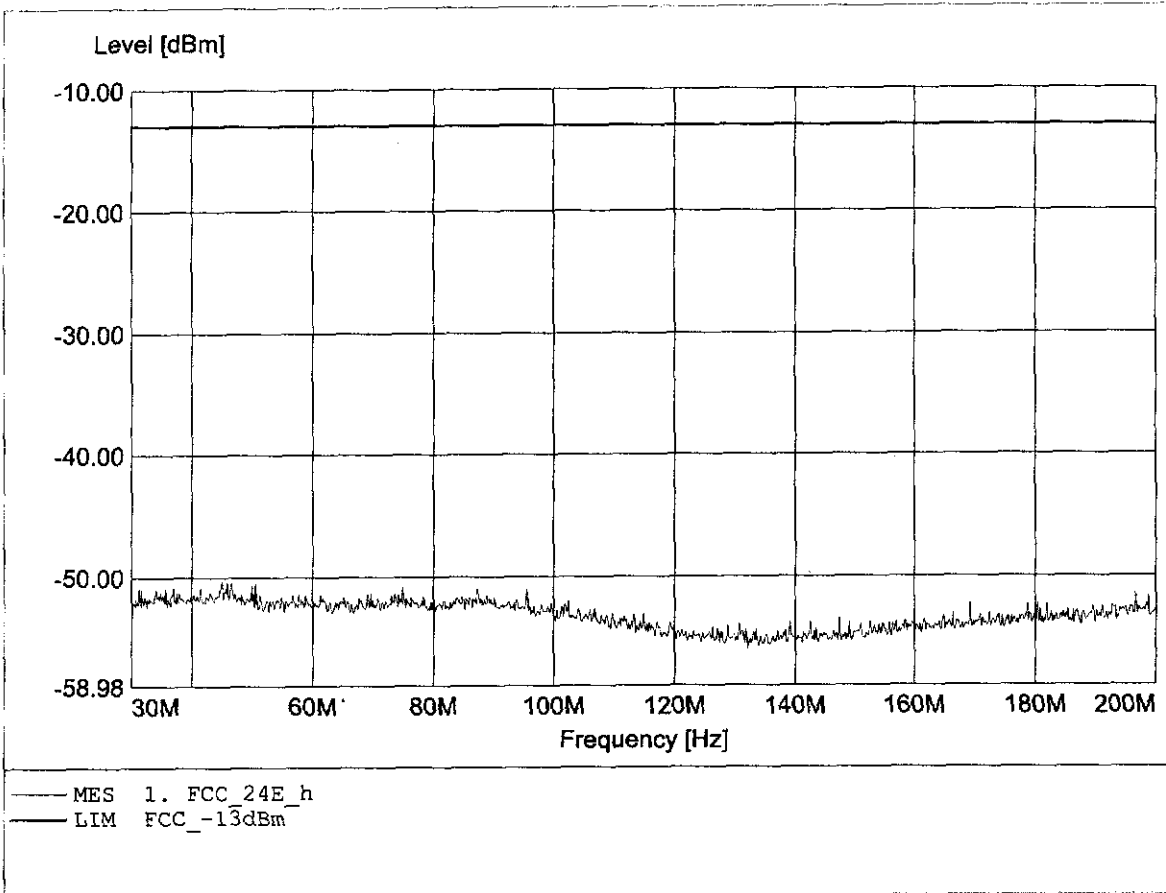


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 988.444MHz, Pmax: -38.42dBm, RBW: 1MHz

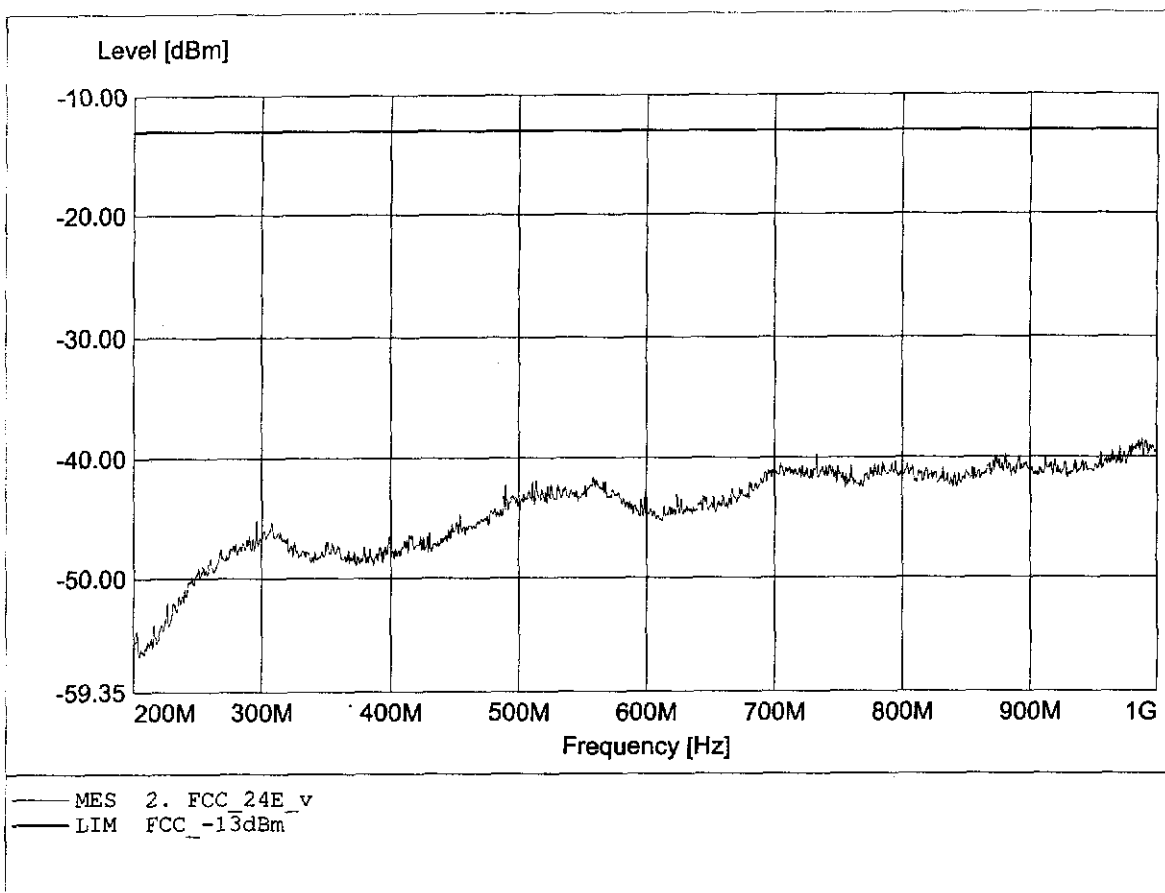

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 855.111MHz, Pmax: -36.56dBm, RBW: 1MHz

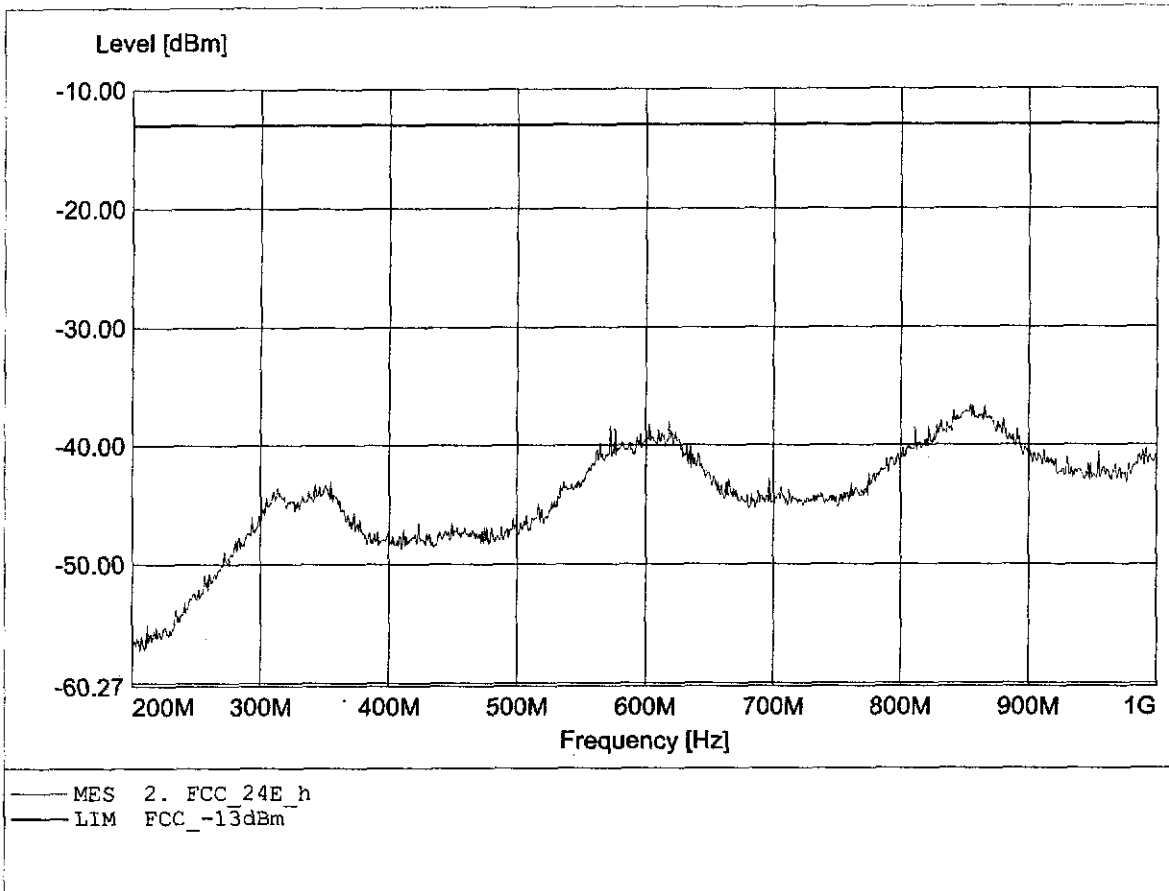




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.947GHz, Pmax: -21.74dBm, RBW: 1MHz/3kHz

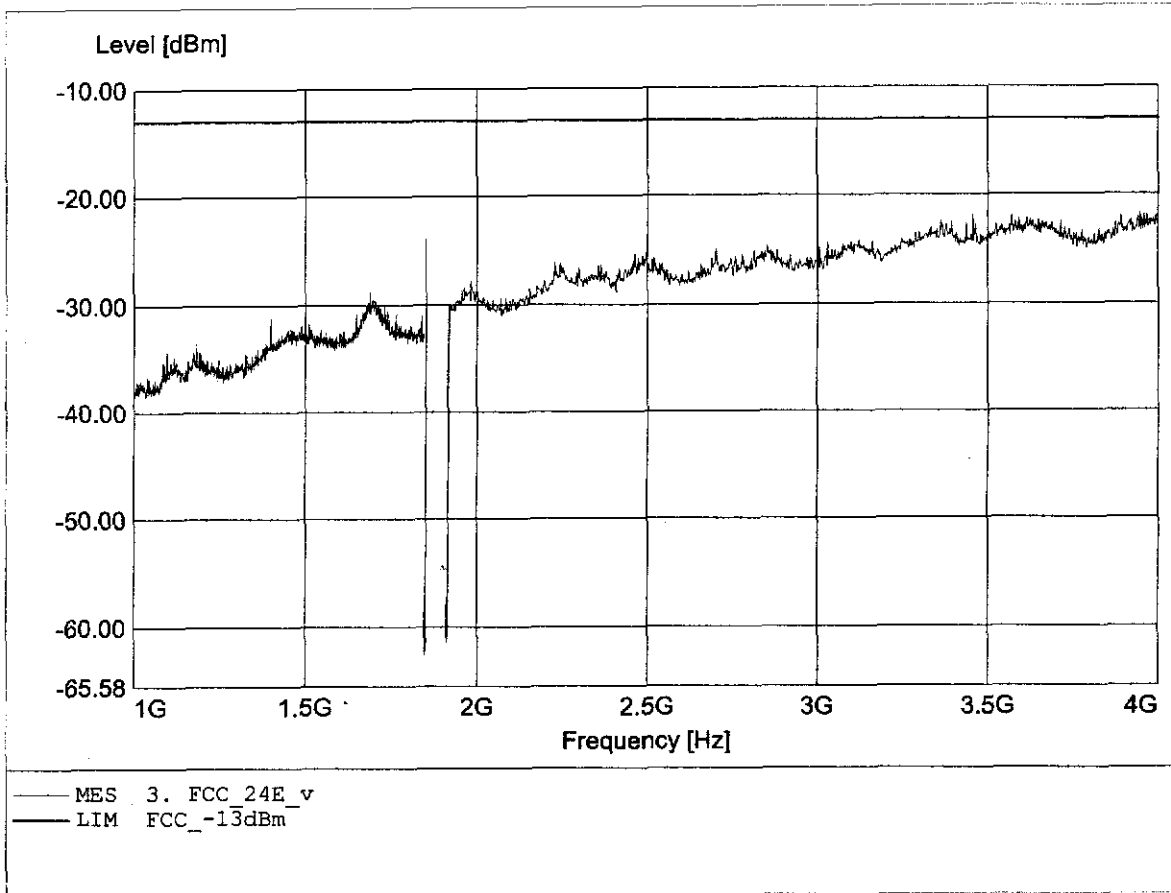


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HLO25  
Comment 2: Freq: 4.000GHz, Pmax: -21.62dBm, RBW: 1MHz/3kHz

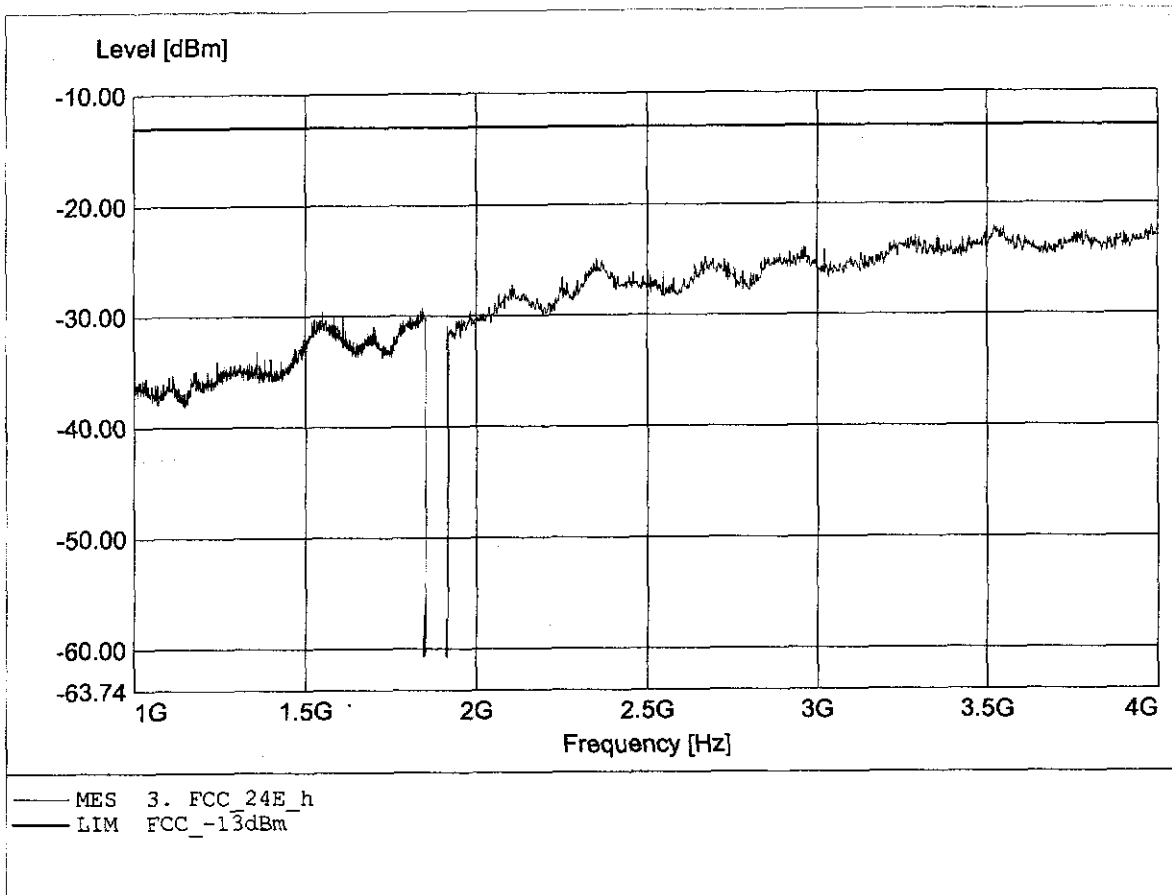


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.404GHz, Pmax: -22.09dBm, RBW: 1MHz

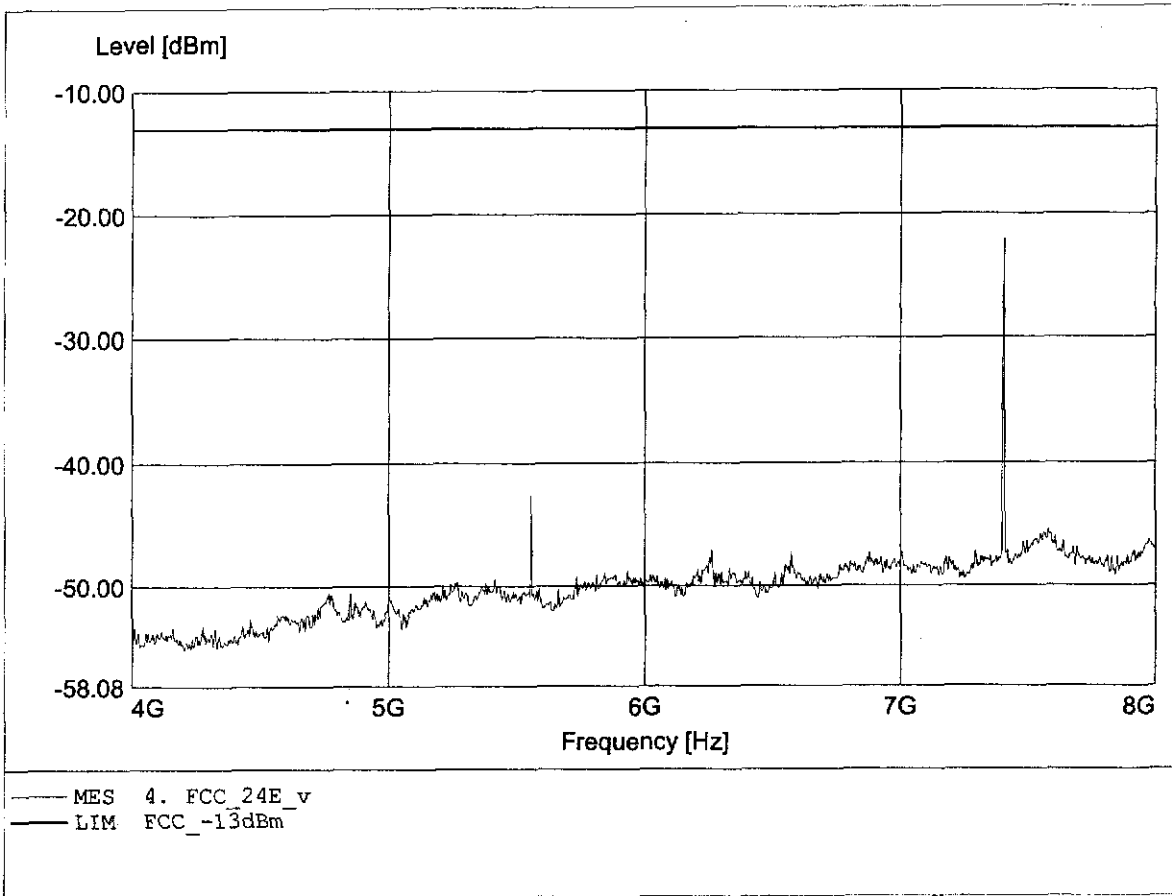


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.404GHz, Pmax: -23.29dBm, RBW: 1MHz

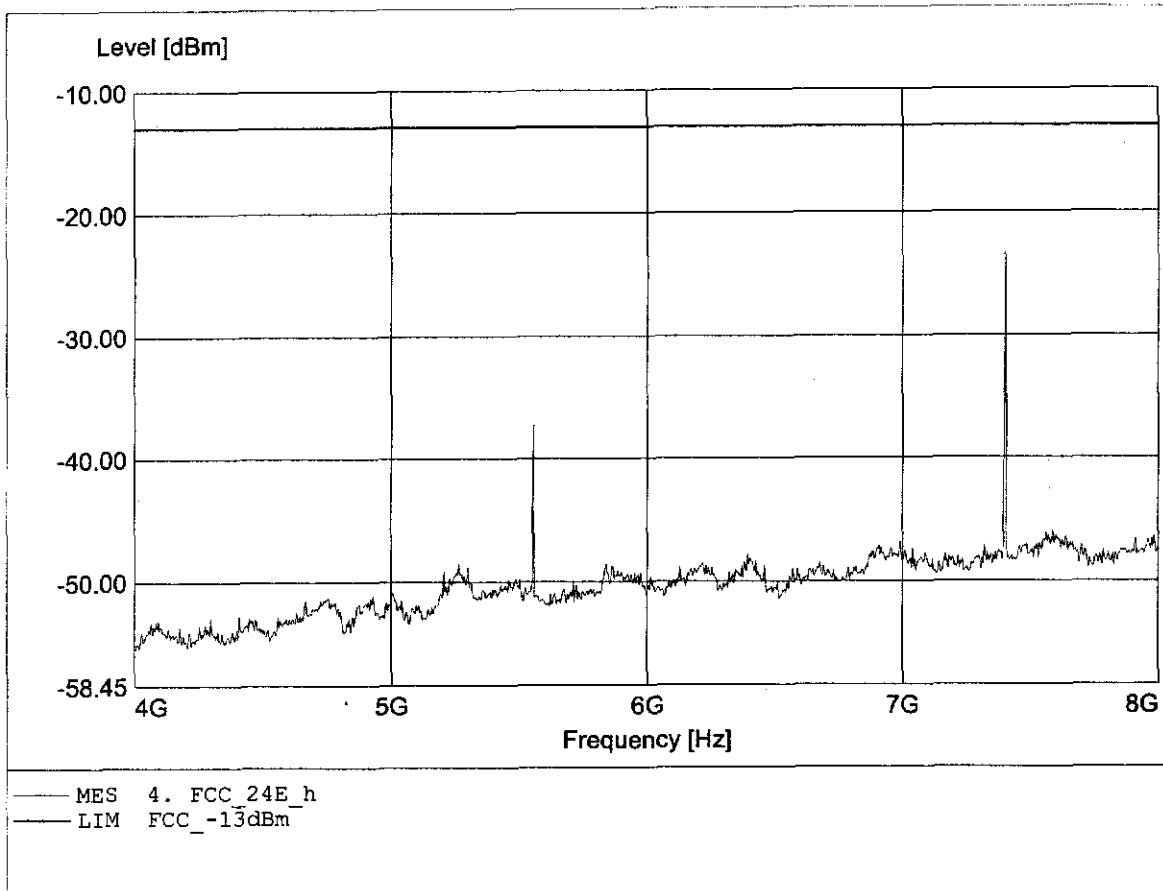


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.253GHz, Pmax: -33.90dBm, RBW: 1MHz

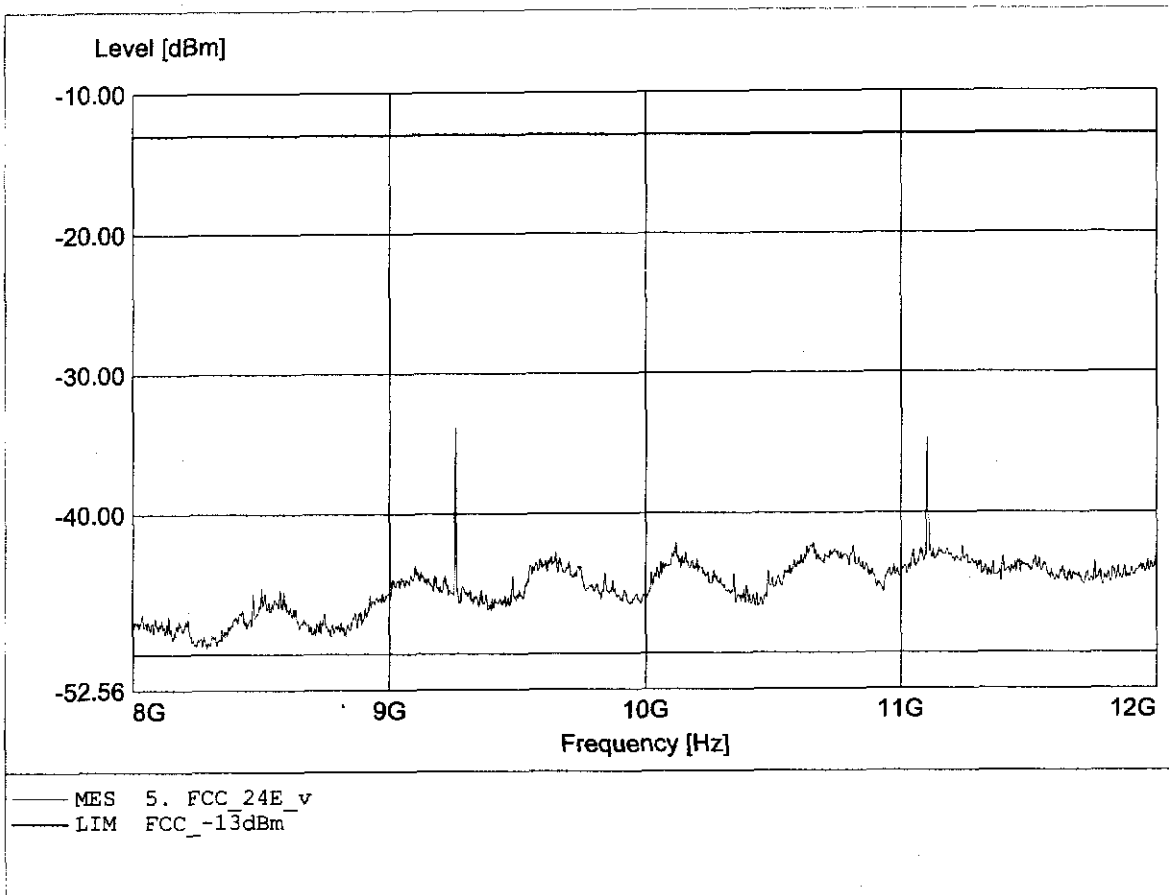


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 11.102GHz, Pmax: -39.03dBm, RBW: 1MHz

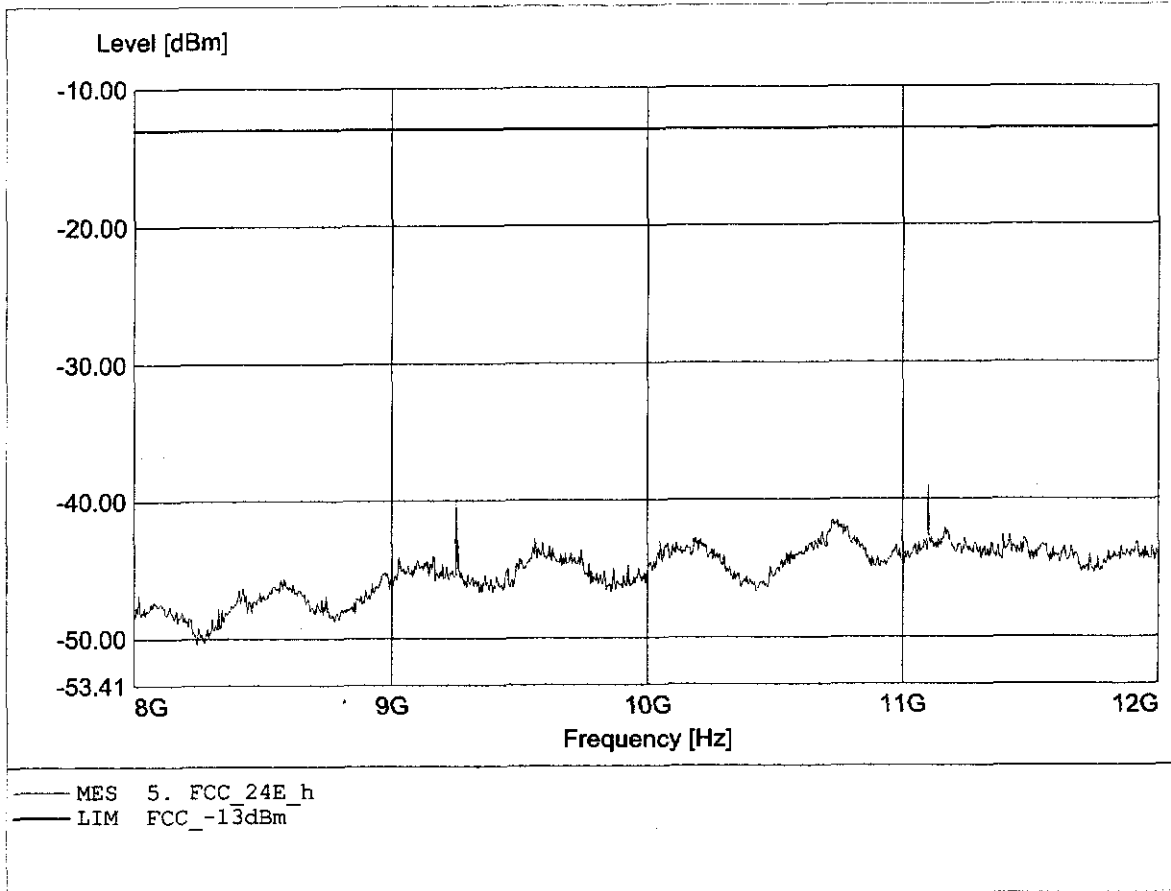


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 14.807GHz, Pmax: -21.48dBm, RBW: 1MHz

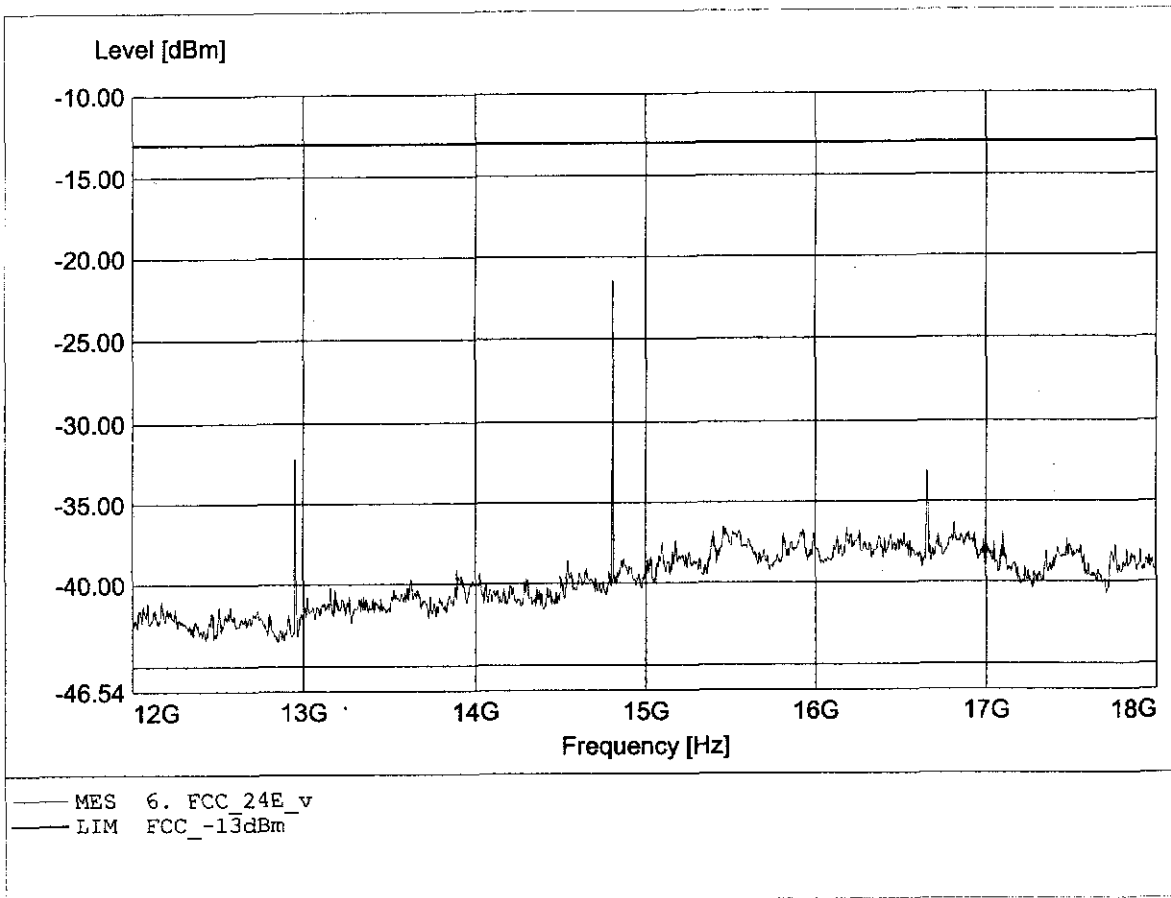

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 14.807GHz, Pmax: -24.33dBm, RBW: 1MHz

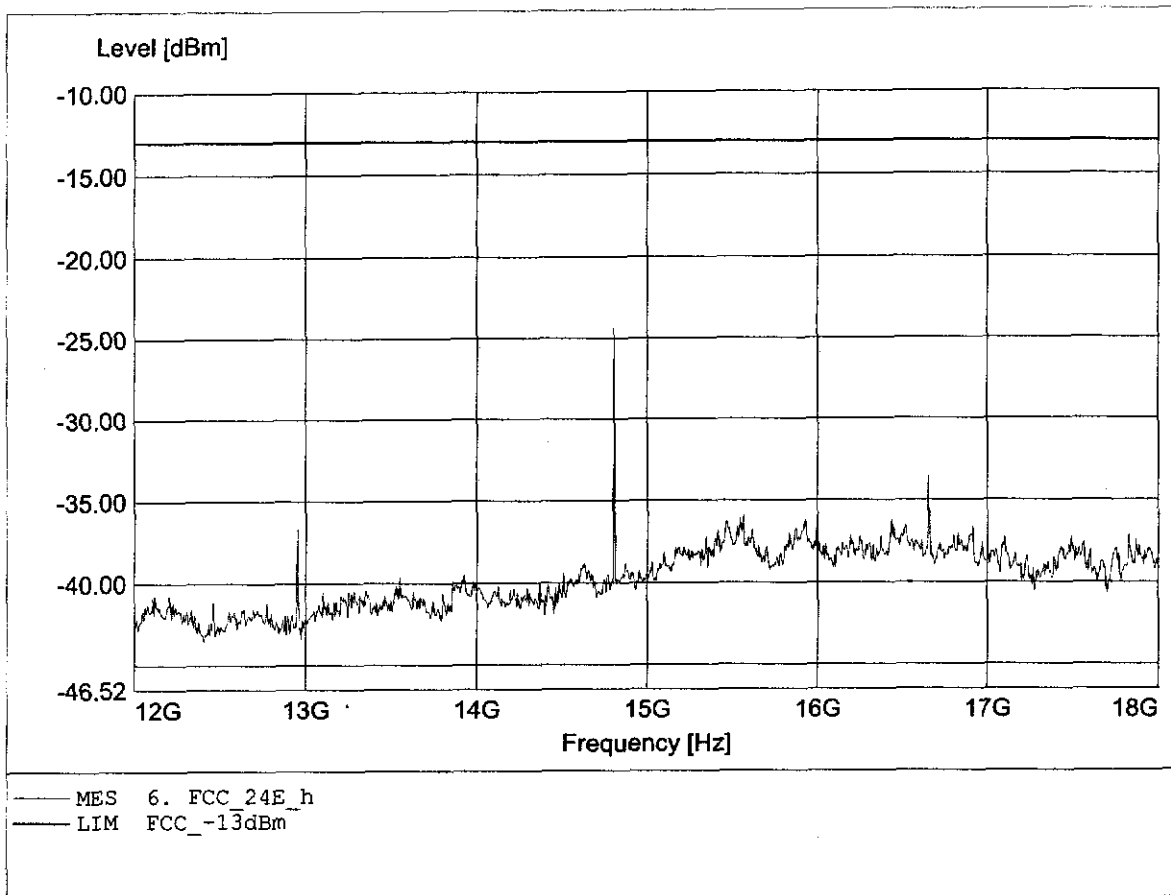




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 26.500GHz, Pmax: -28.00dBm, RBW: 1MHz

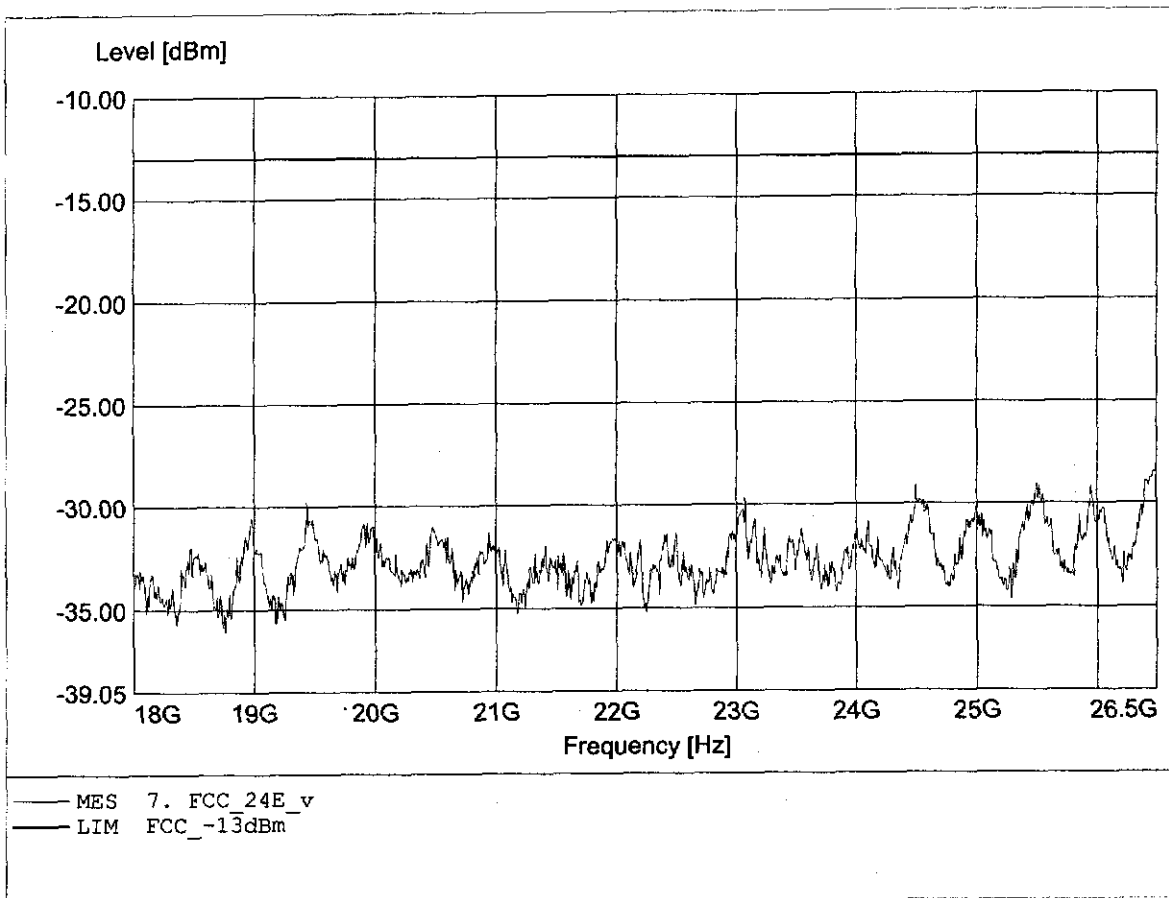


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 512  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 24.526GHz, Pmax: -28.97dBm, RBW: 1MHz

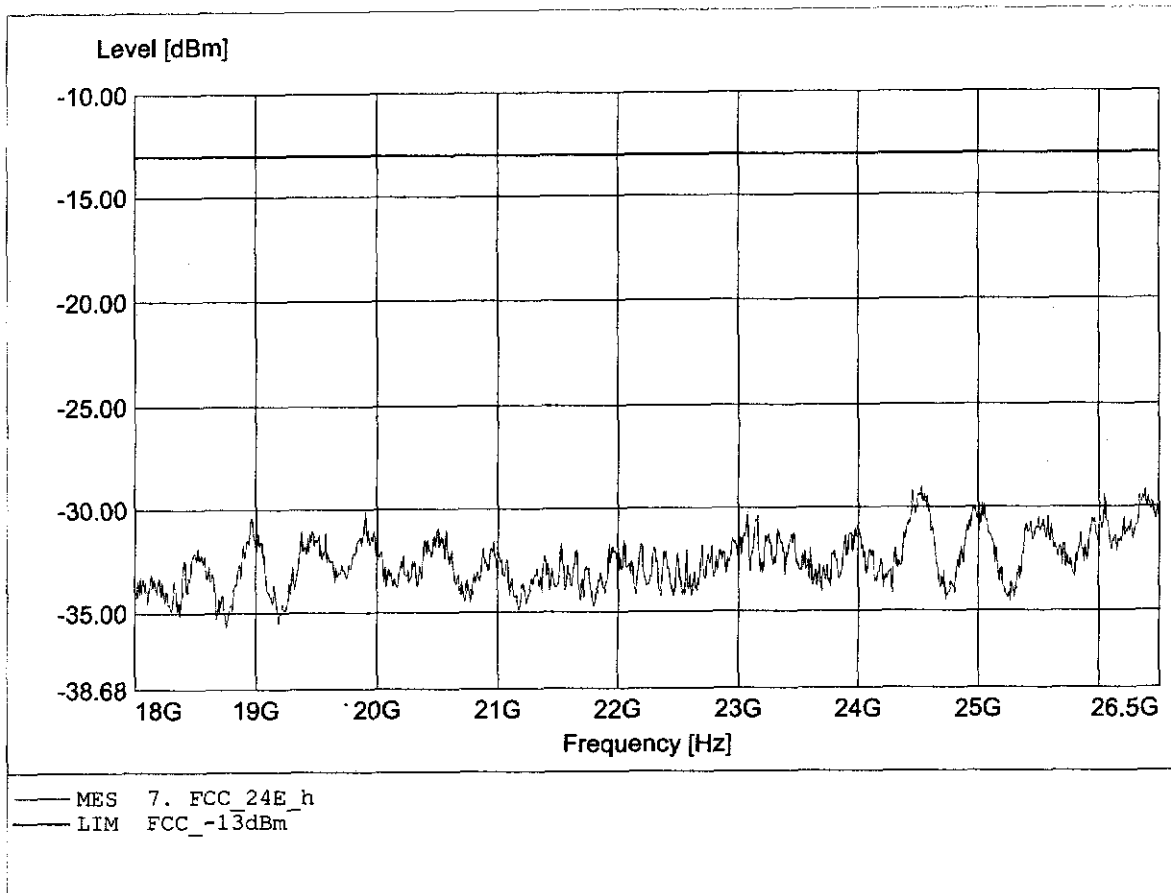


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 192.444MHz, Pmax: -50.87dBm, RBW: 1MHz

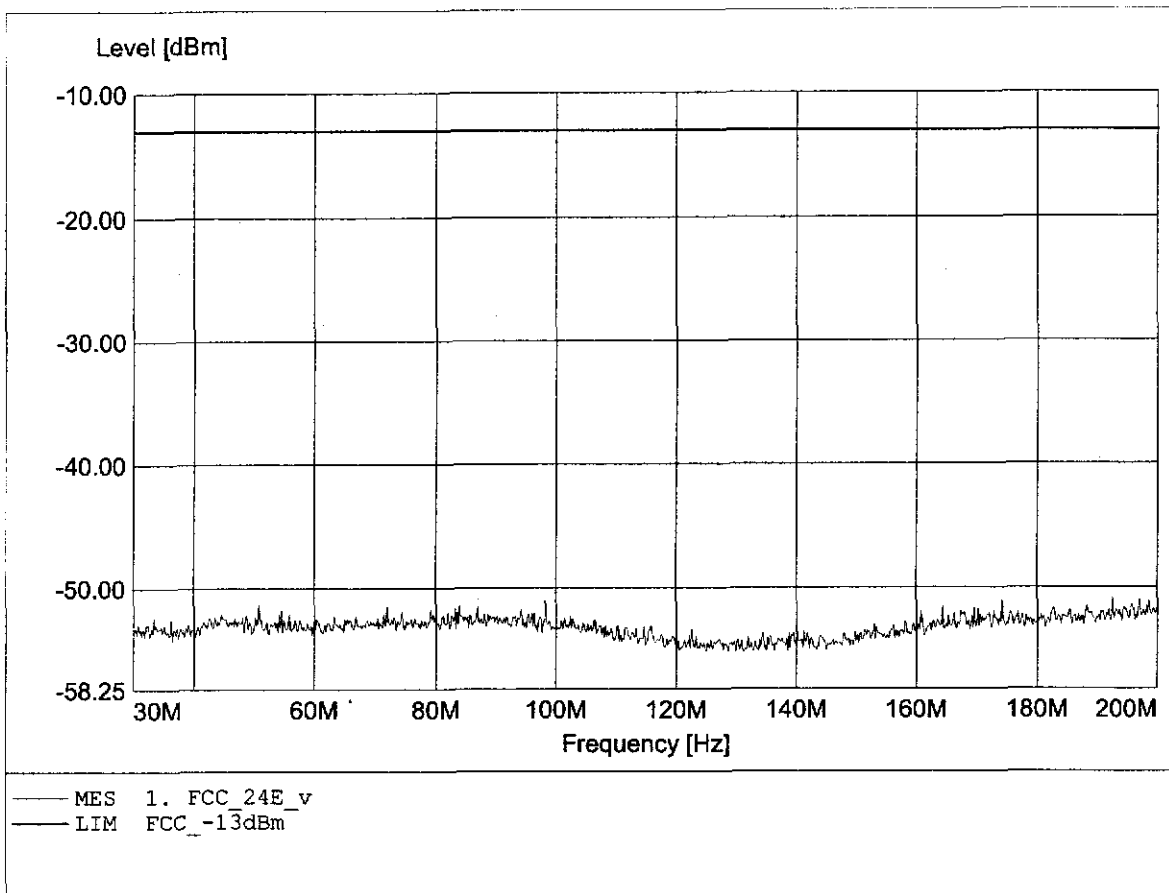


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 36.422MHz, Pmax: -49.58dBm, RBW: 1MHz

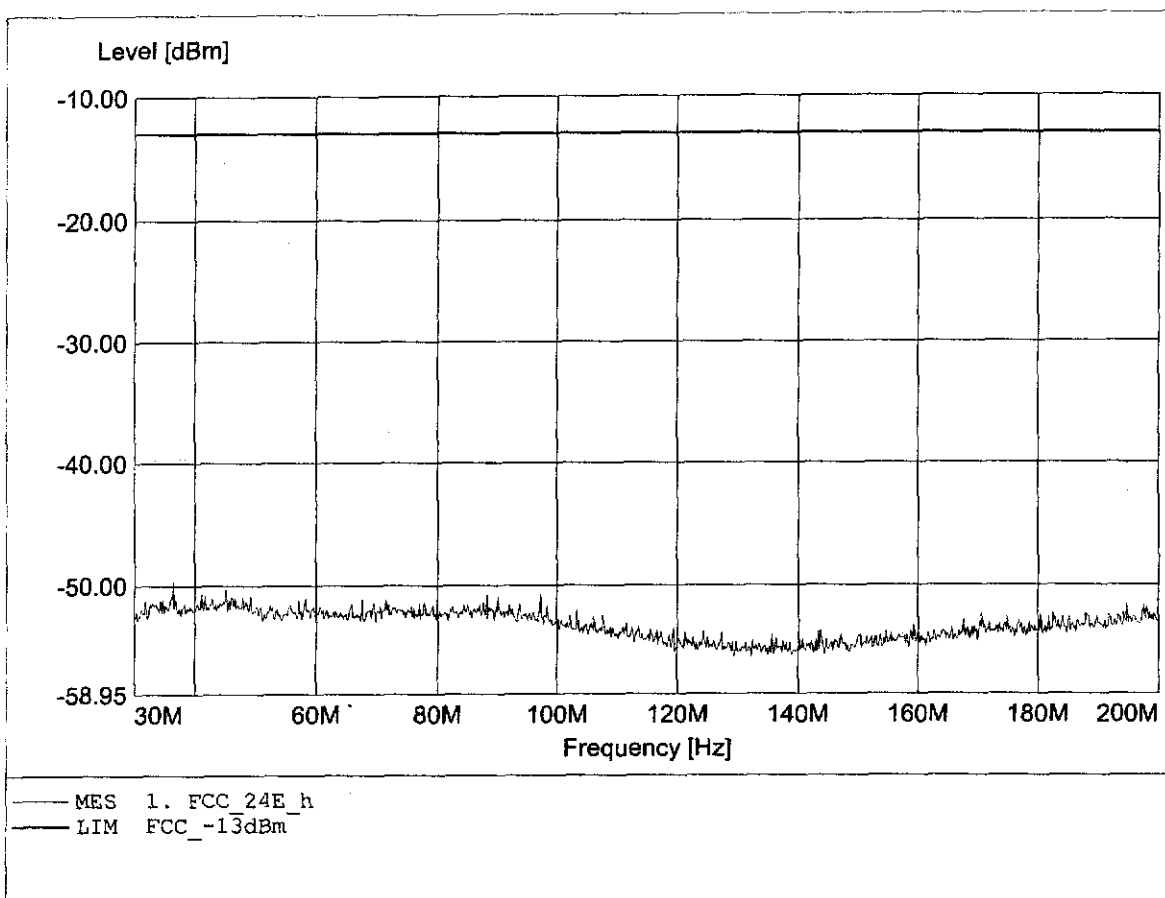


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 978.667MHz, Pmax: -37.88dBm, RBW: 1MHz

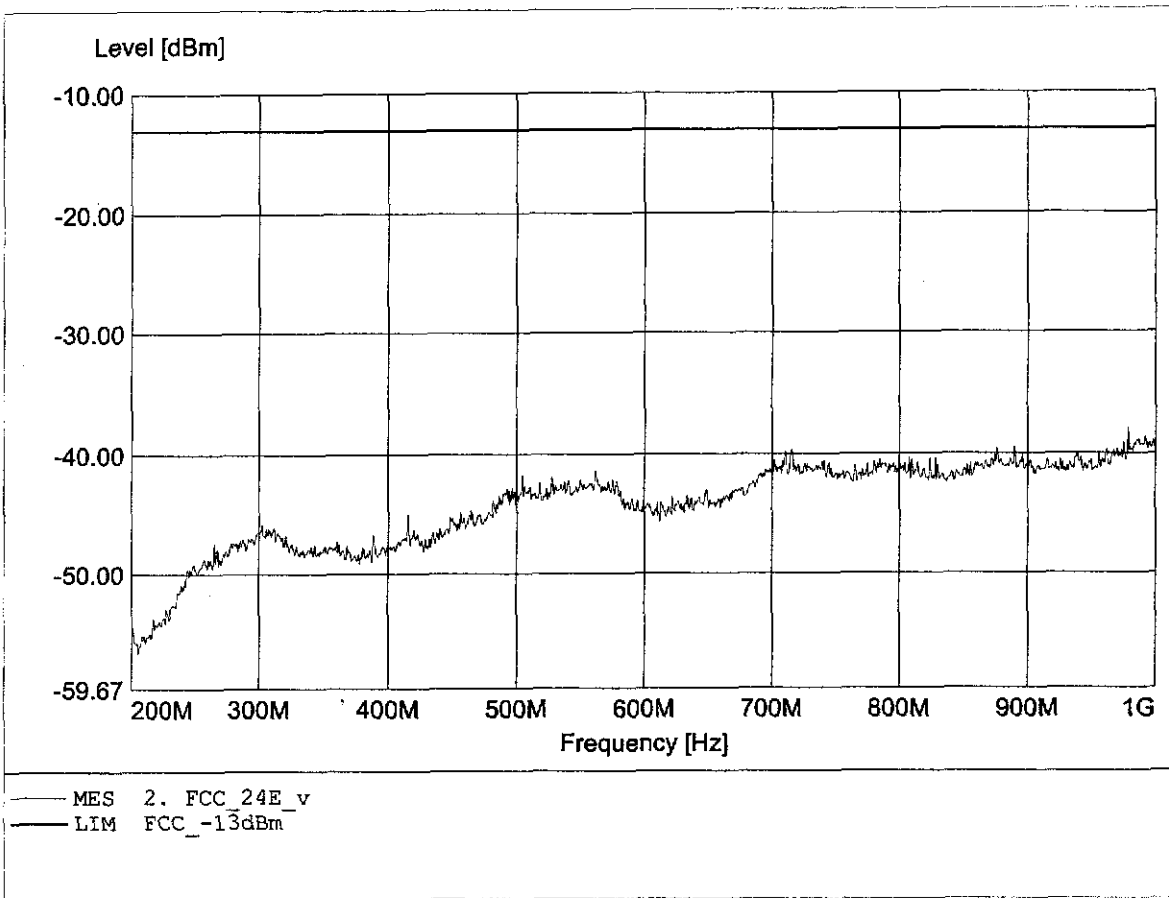


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 857.778MHz, Pmax: -36.07dBm, RBW: 1MHz

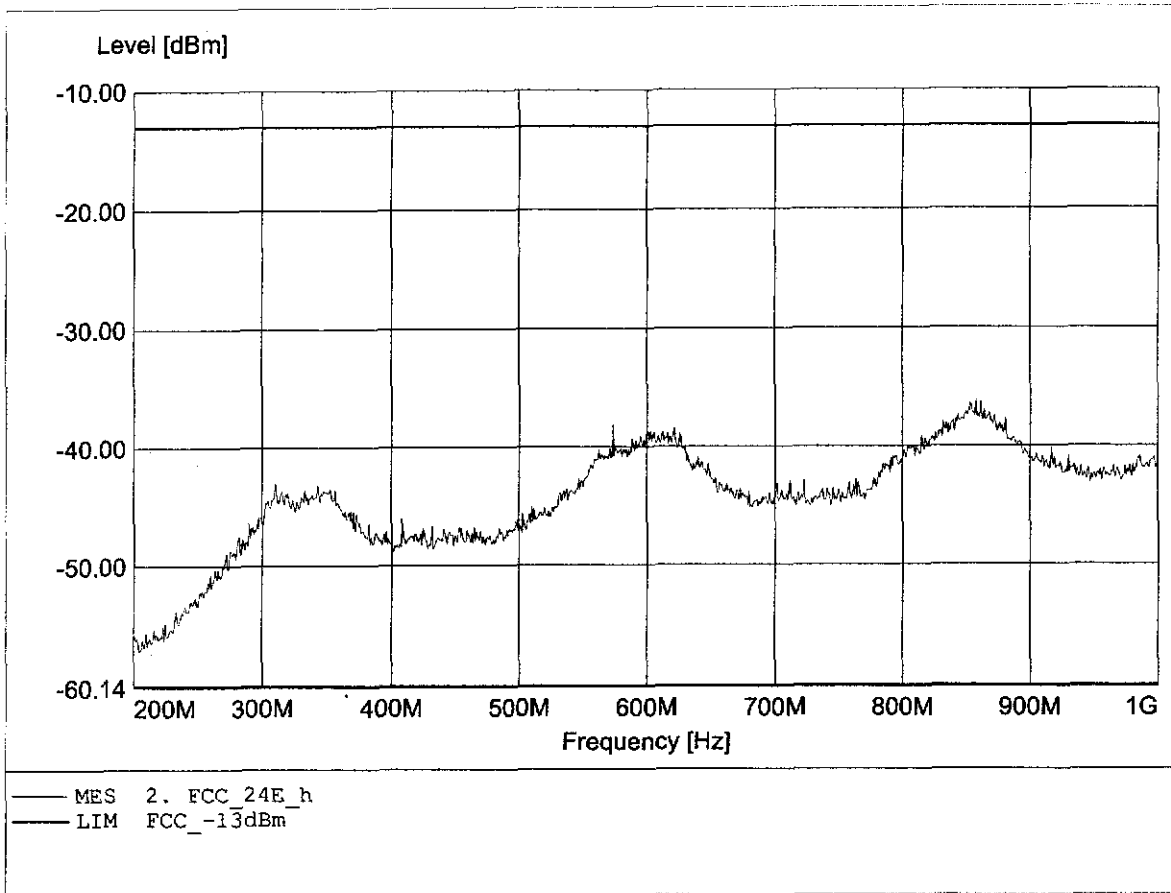


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.995GHz, Pmax: -20.41dBm, RBW: 1MHz/3kHz

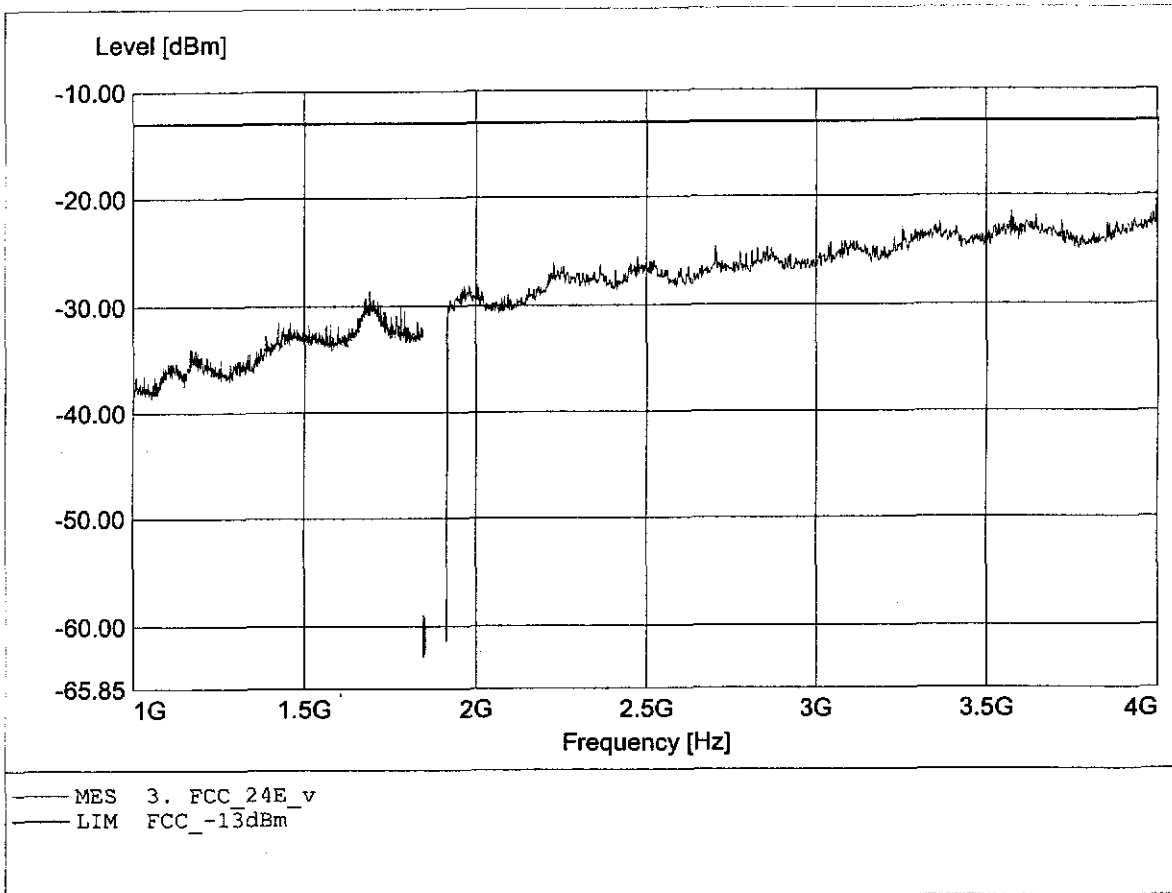

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.530GHz, Pmax: -21.45dBm, RBW: 1MHz/3kHz

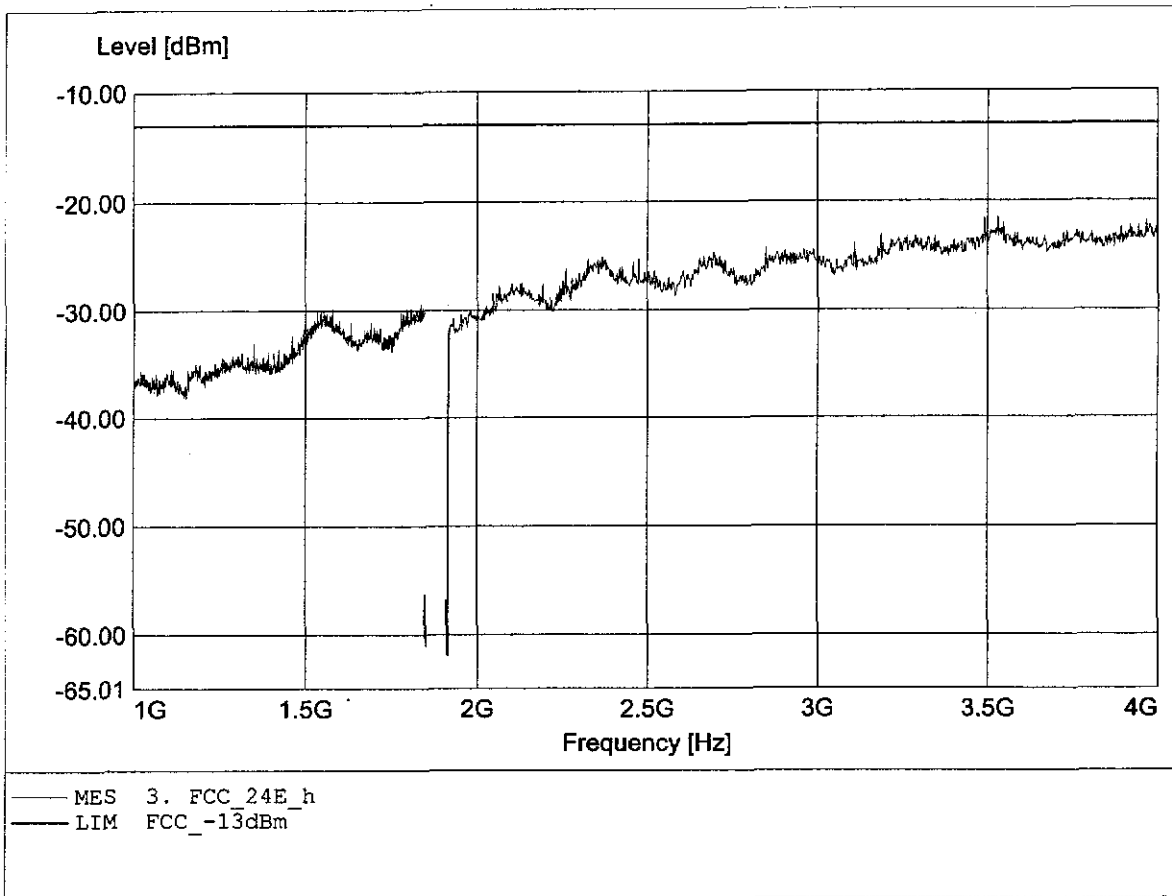




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.520GHz, Pmax: -25.59dBm, RBW: 1MHz

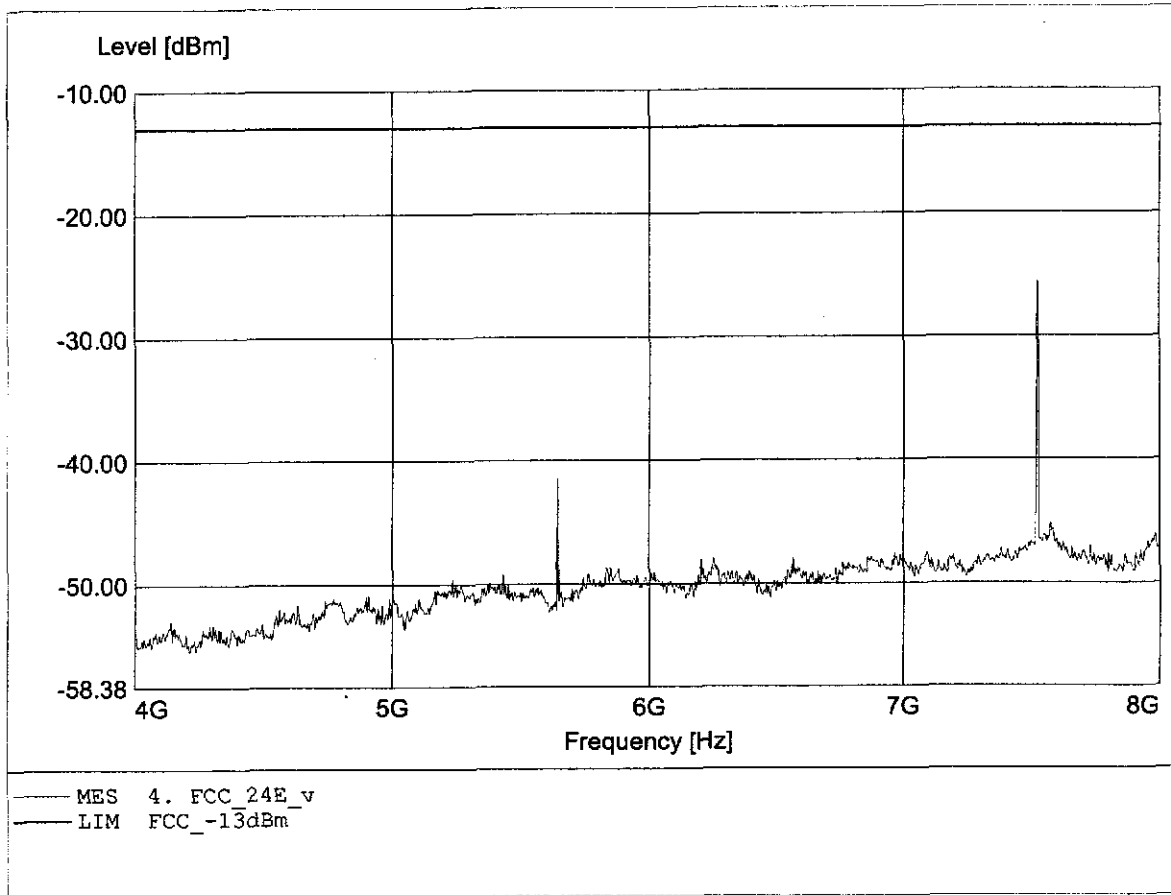


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.520GHz, Pmax: -23.94dBm, RBW: 1MHz

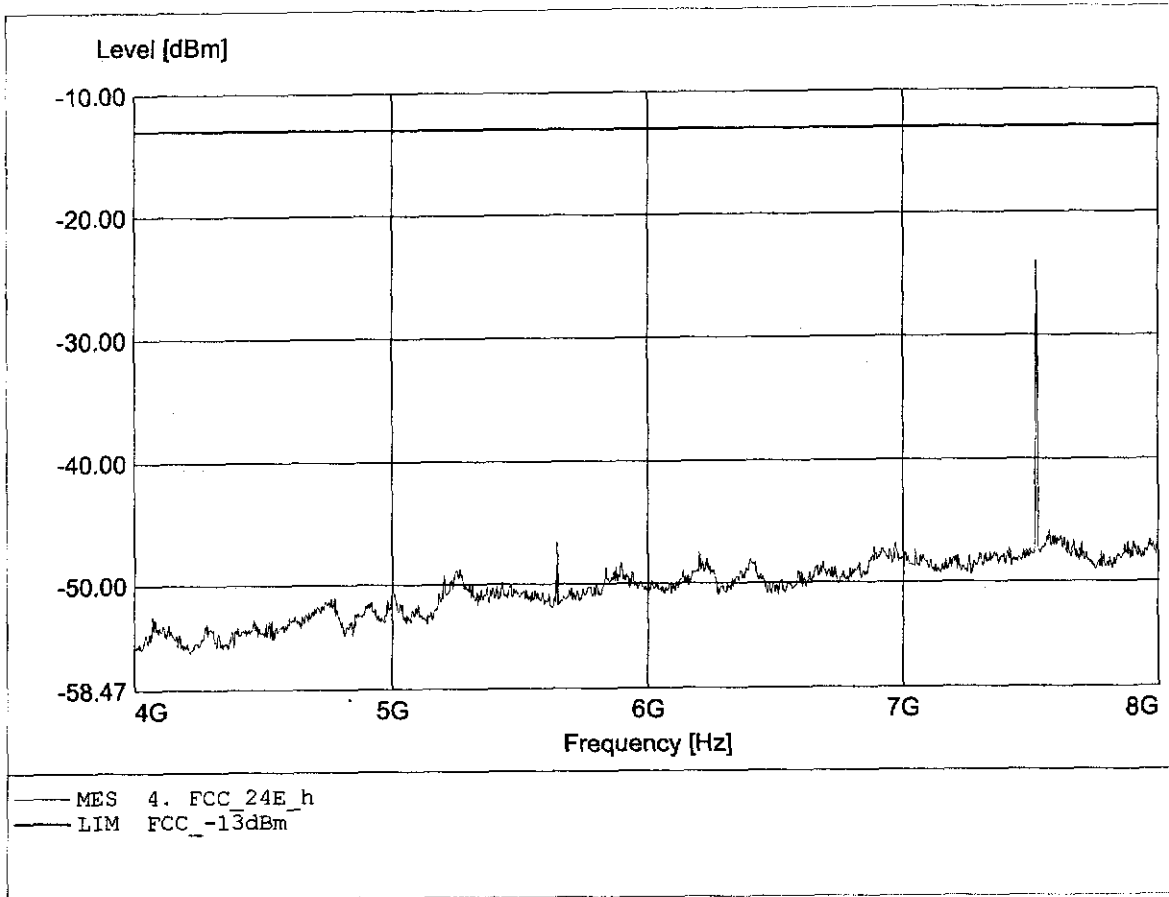


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 11.280GHz, Pmax: -32.82dBm, RBW: 1MHz

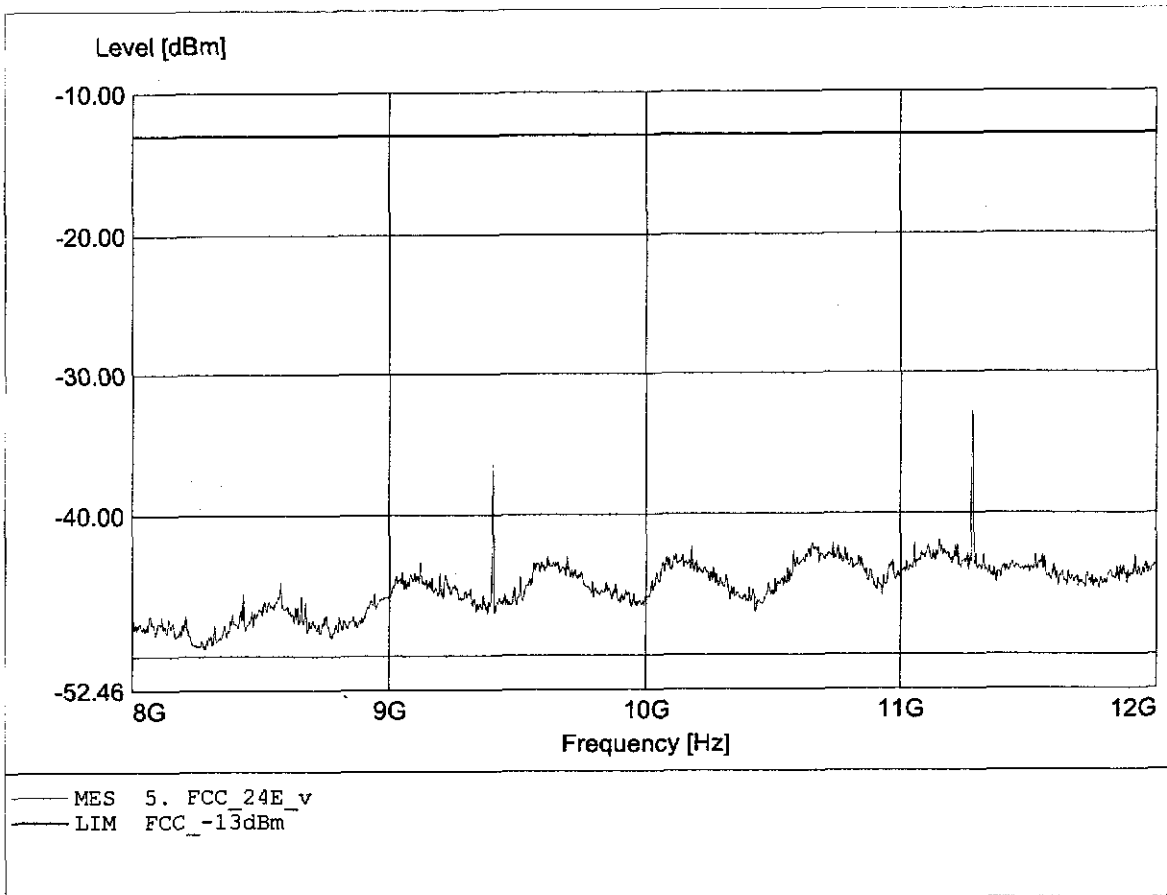


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 11.280GHz, Pmax: -39.37dBm, RBW: 1MHz

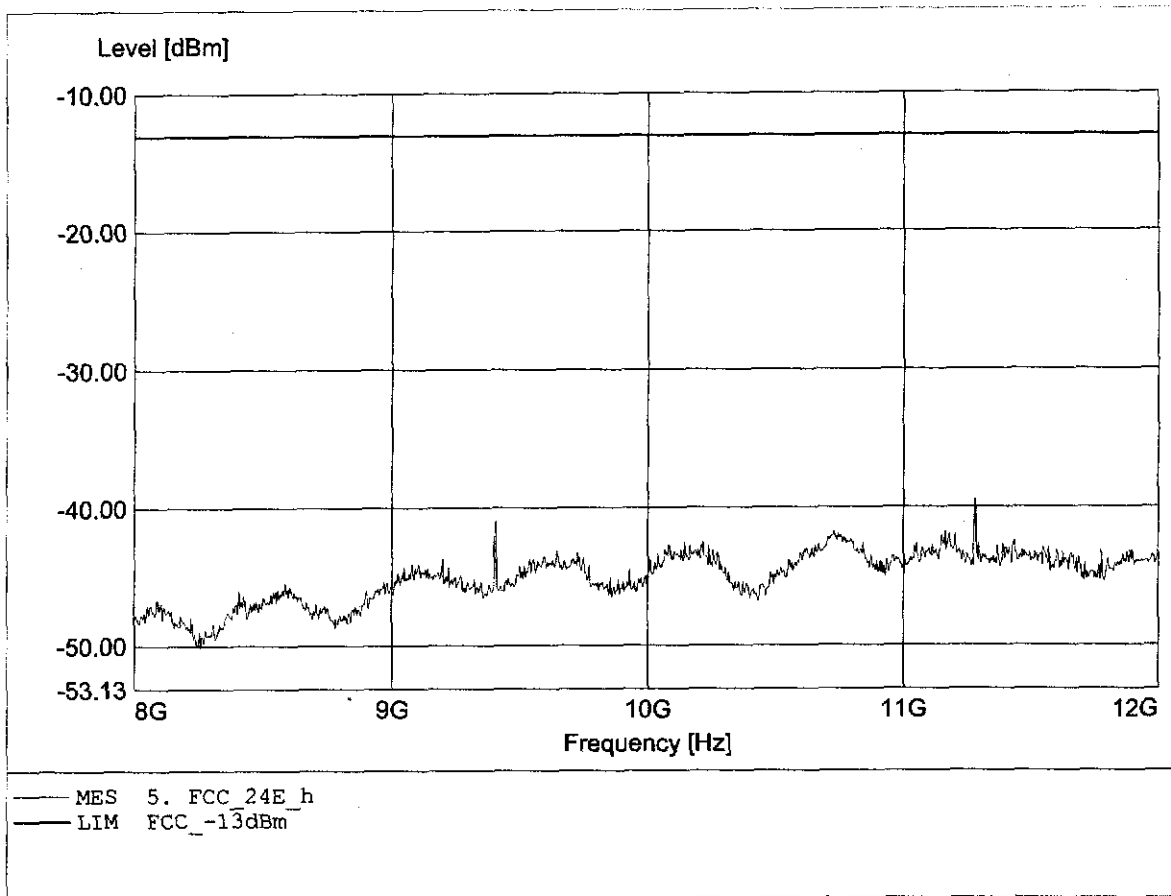


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 15.040GHz, Pmax: -23.08dBm, RBW: 1MHz

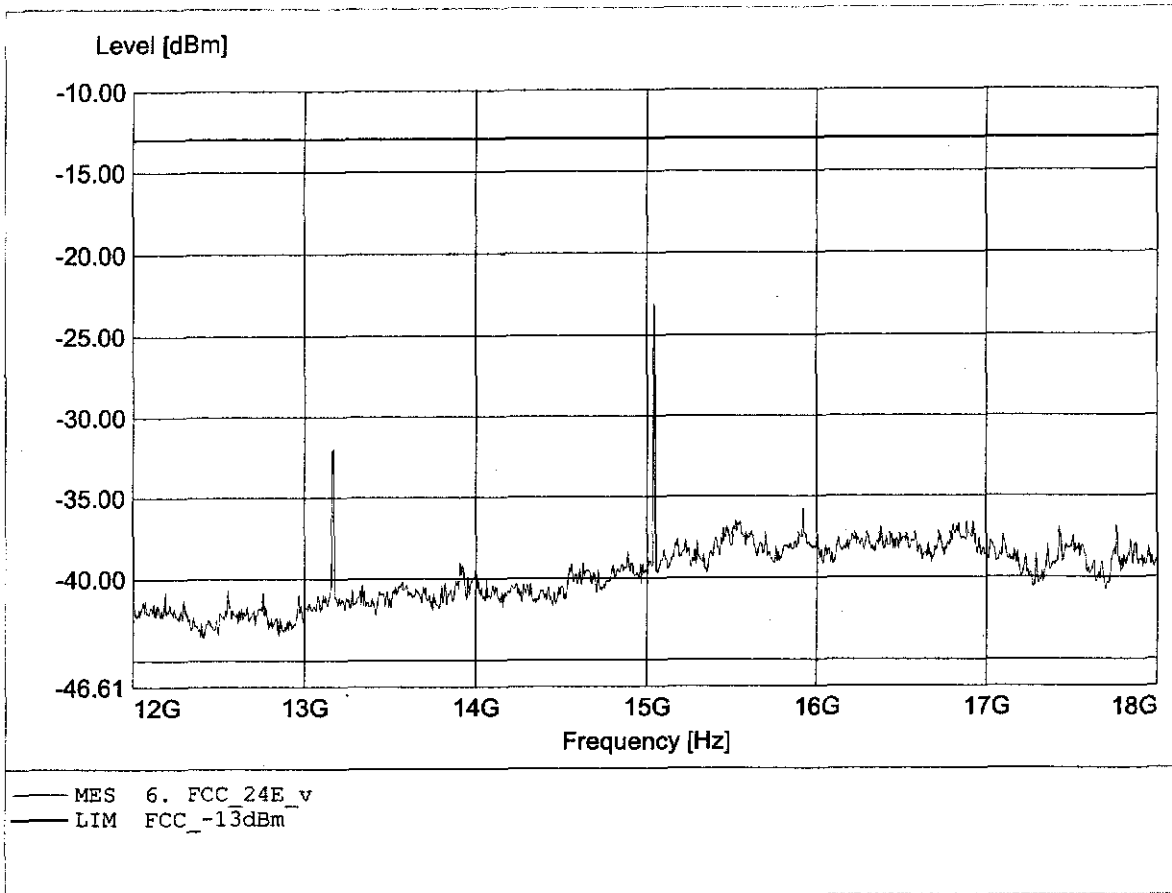


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.3 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 15.040GHz, Pmax: -22.24dBm, RBW: 1MHz

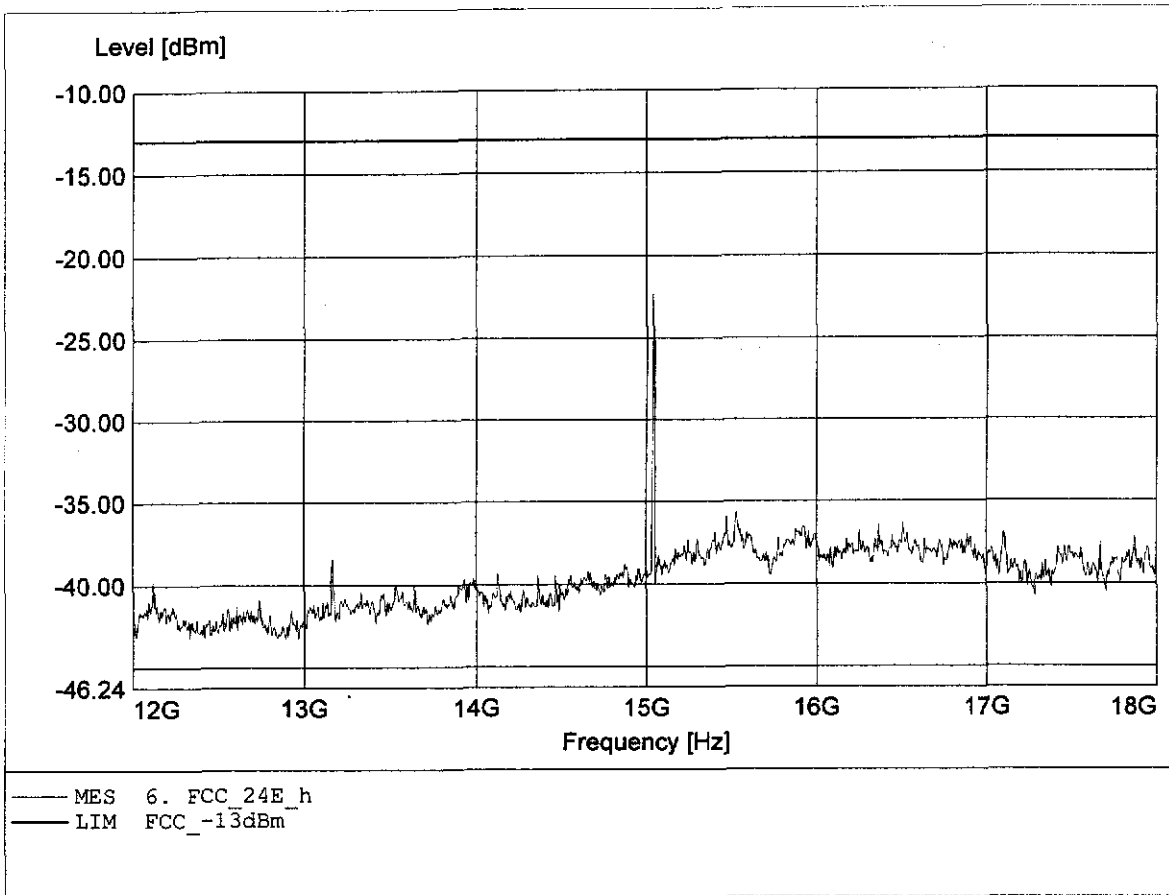


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 26.481GHz, Pmax: -27.75dBm, RBW: 1MHz

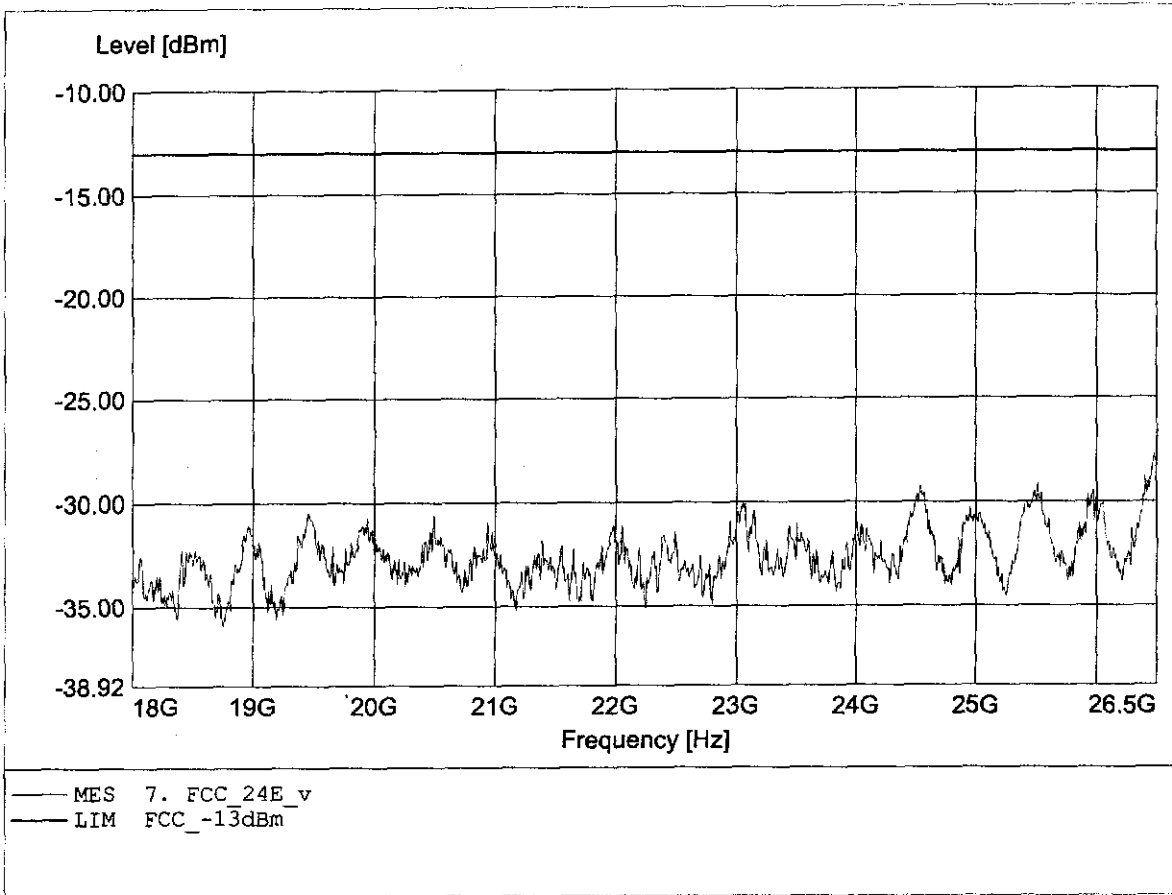

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 661  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.6 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 24.479GHz, Pmax: -28.03dBm, RBW: 1MHz

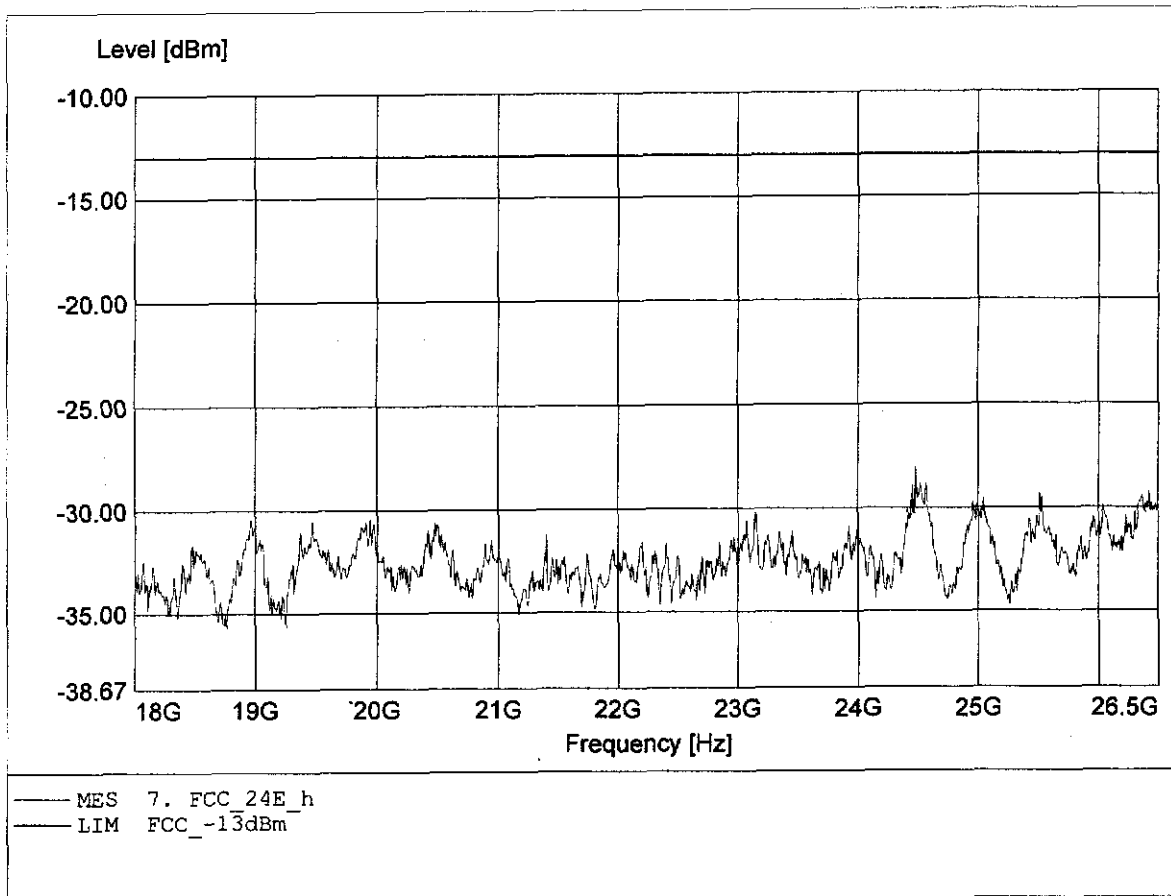




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 198.867MHz, Pmax: -50.95dBm, RBW: 1MHz

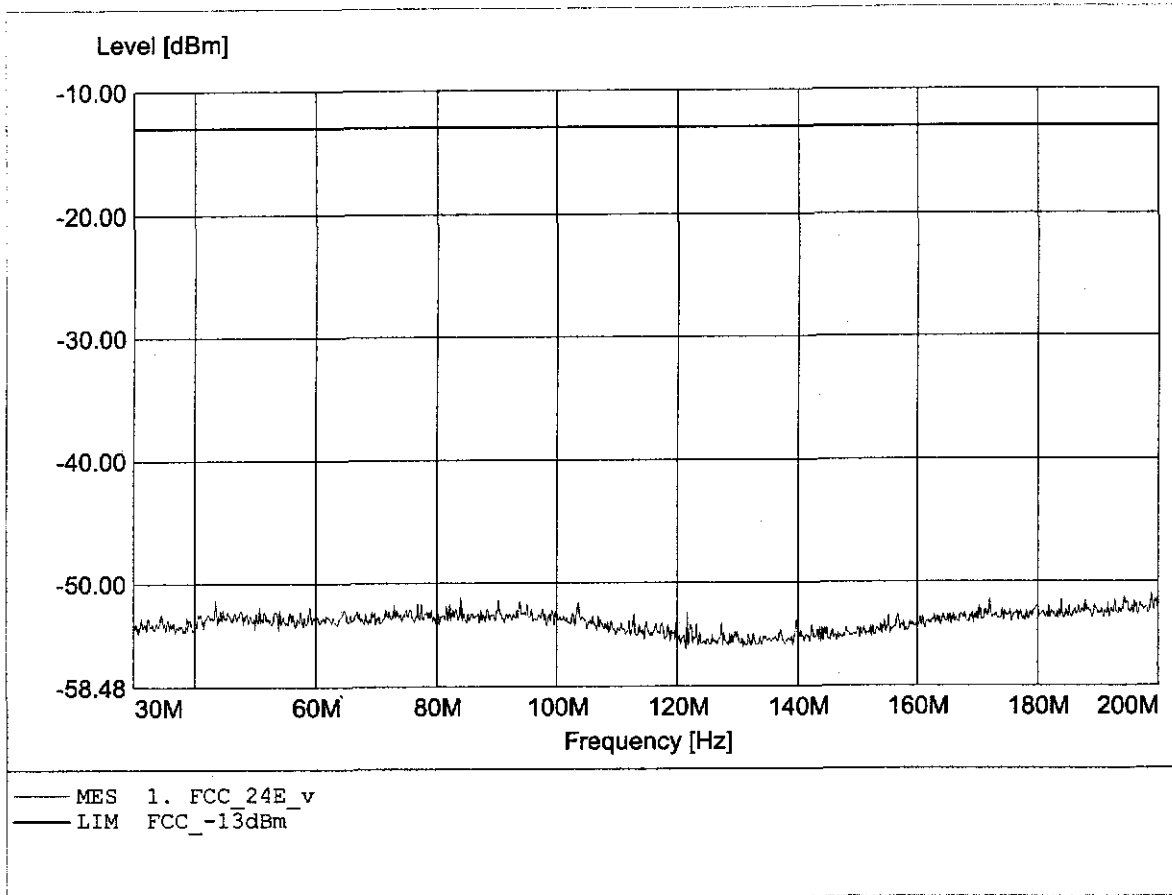


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 45.867MHz, Pmax: -50.24dBm, RBW: 1MHz

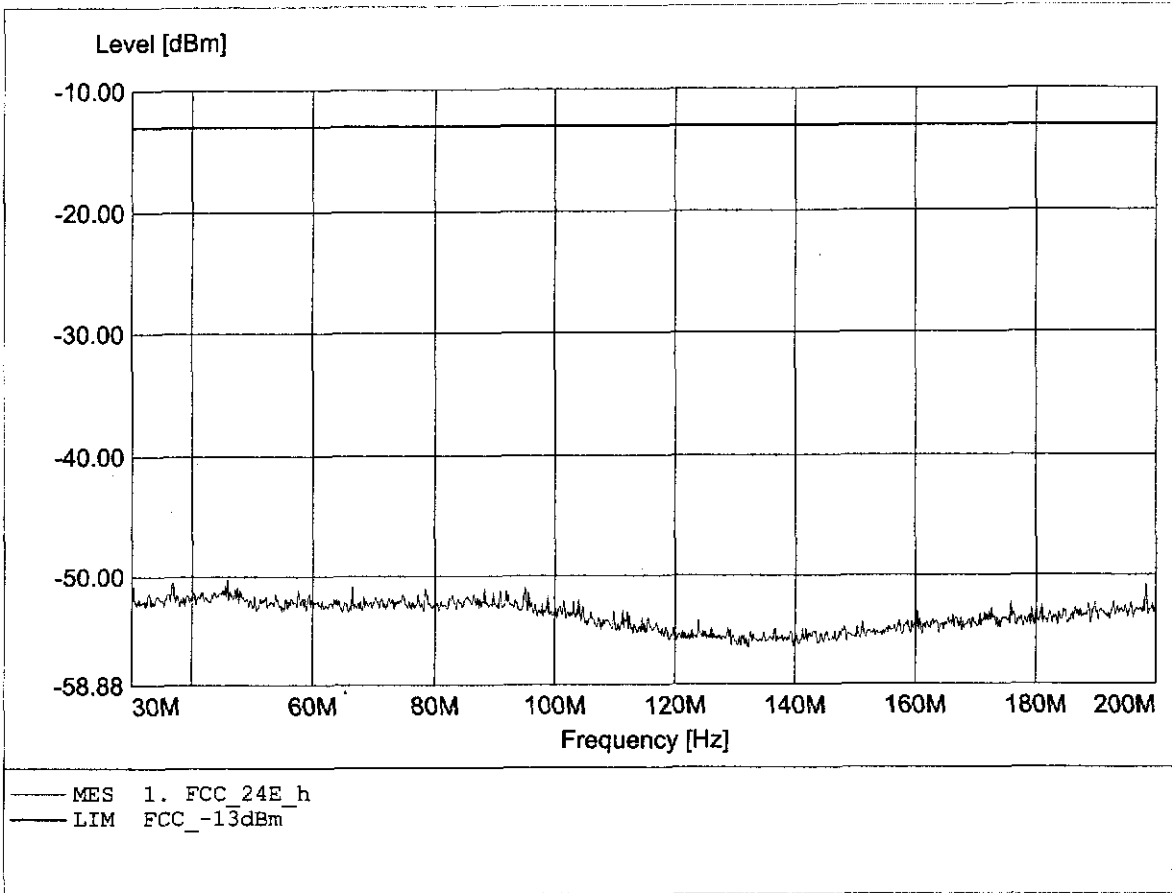


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 982.222MHz, Pmax: -38.12dBm, RBW: 1MHz

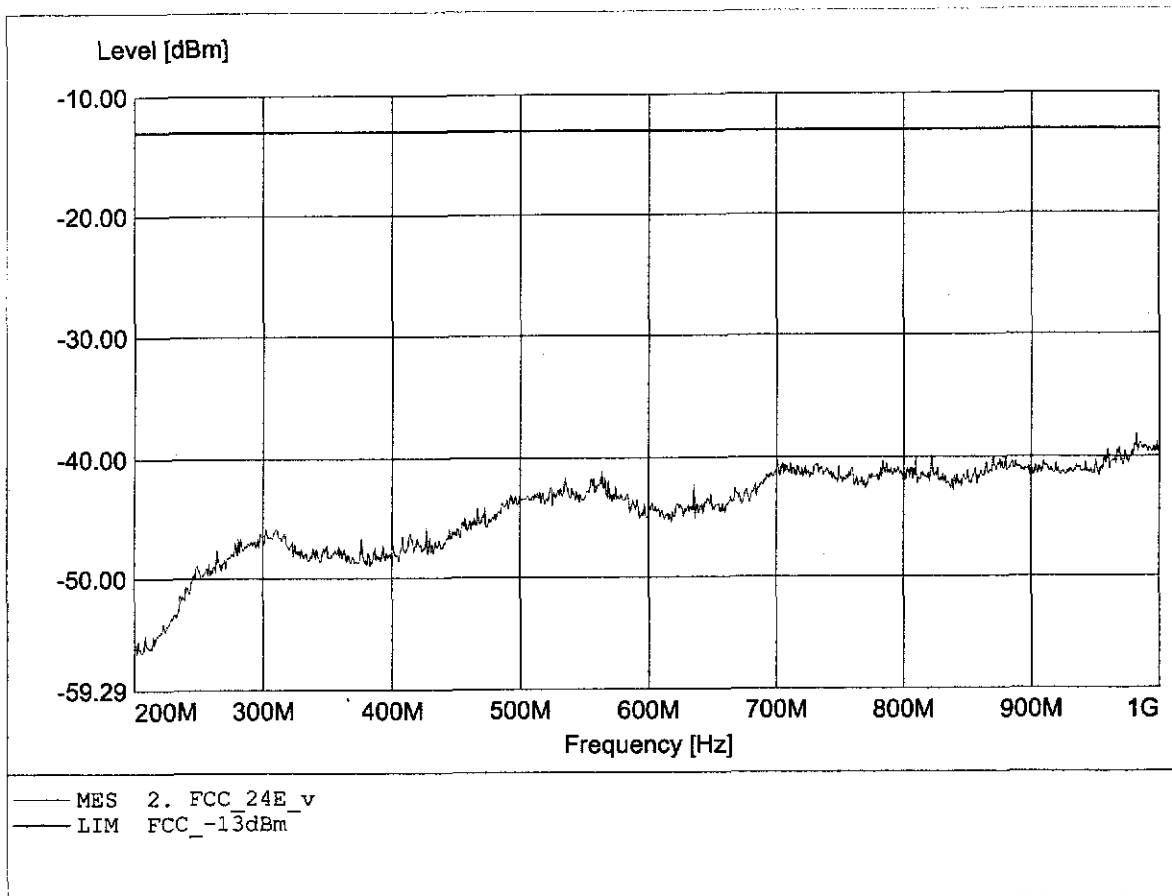


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 835.556MHz, Pmax: -35.85dBm, RBW: 1MHz

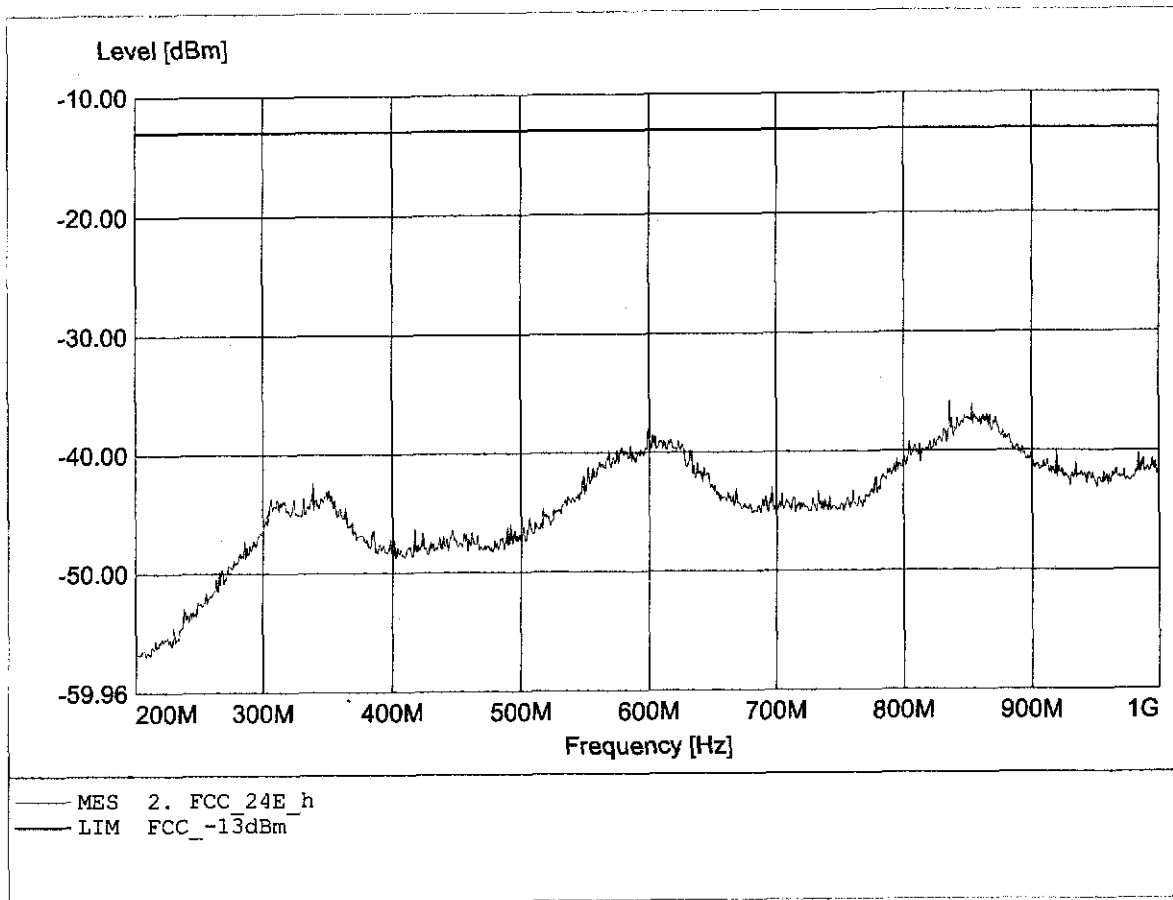


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.993GHz, Pmax: -20.98dBm, RBW: 1MHz/3kHz

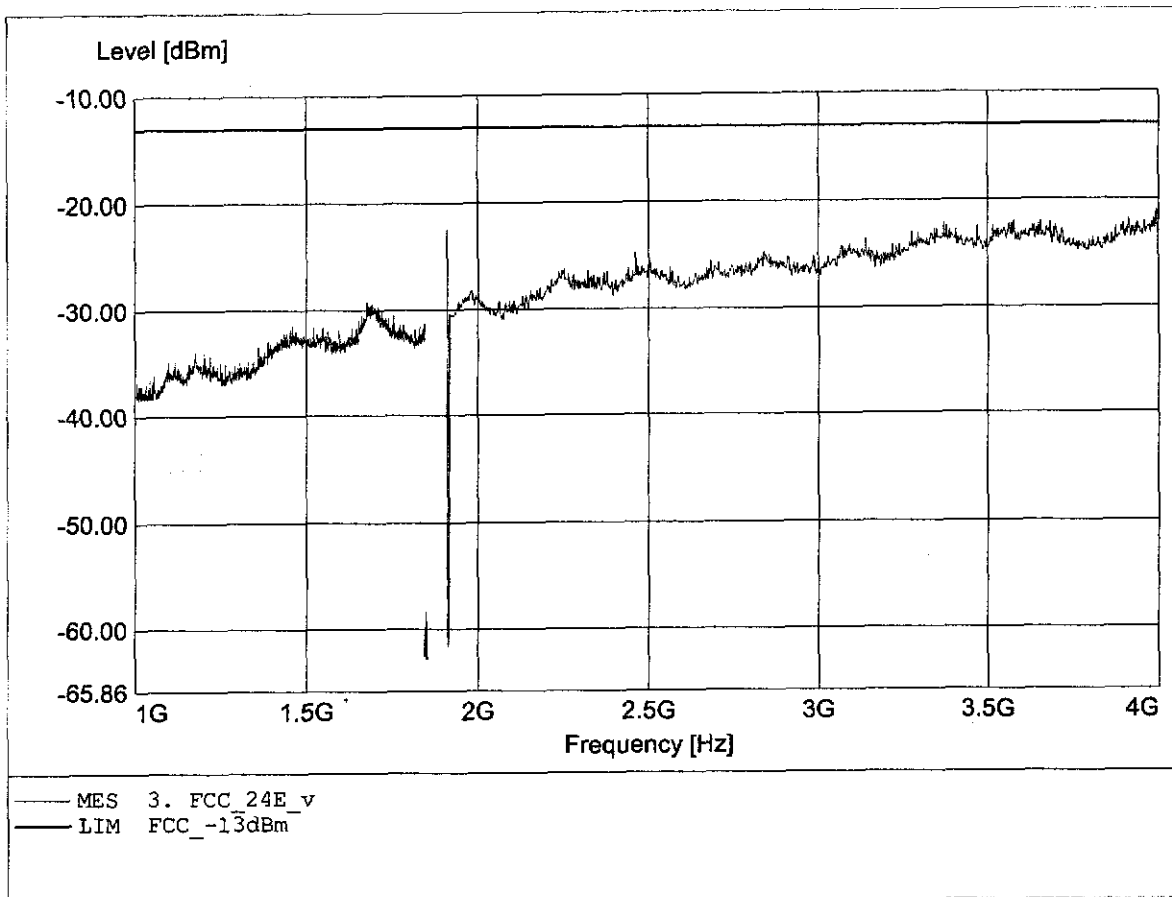


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.534GHz, Pmax: -21.55dBm, RBW: 1MHz/3kHz

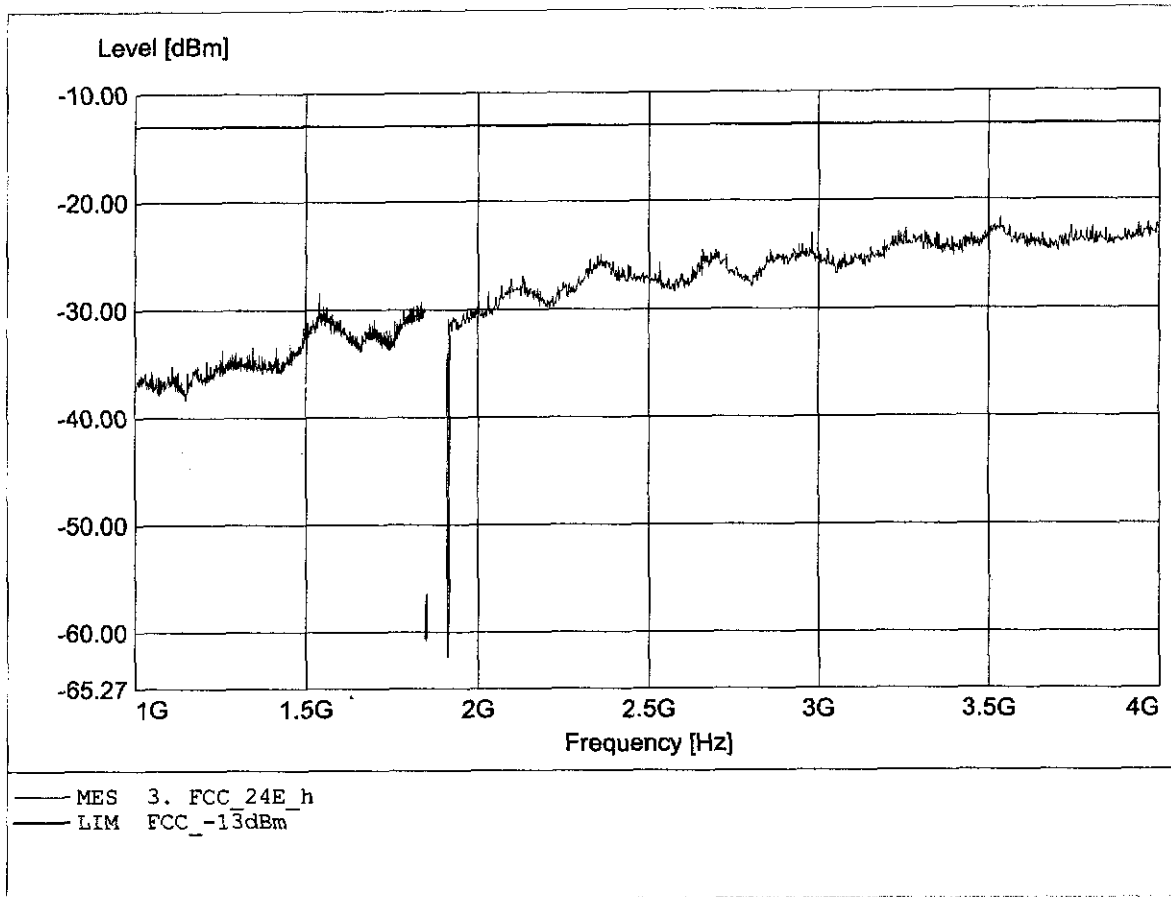


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.640GHz, Pmax: -15.10dBm, RBW: 1MHz

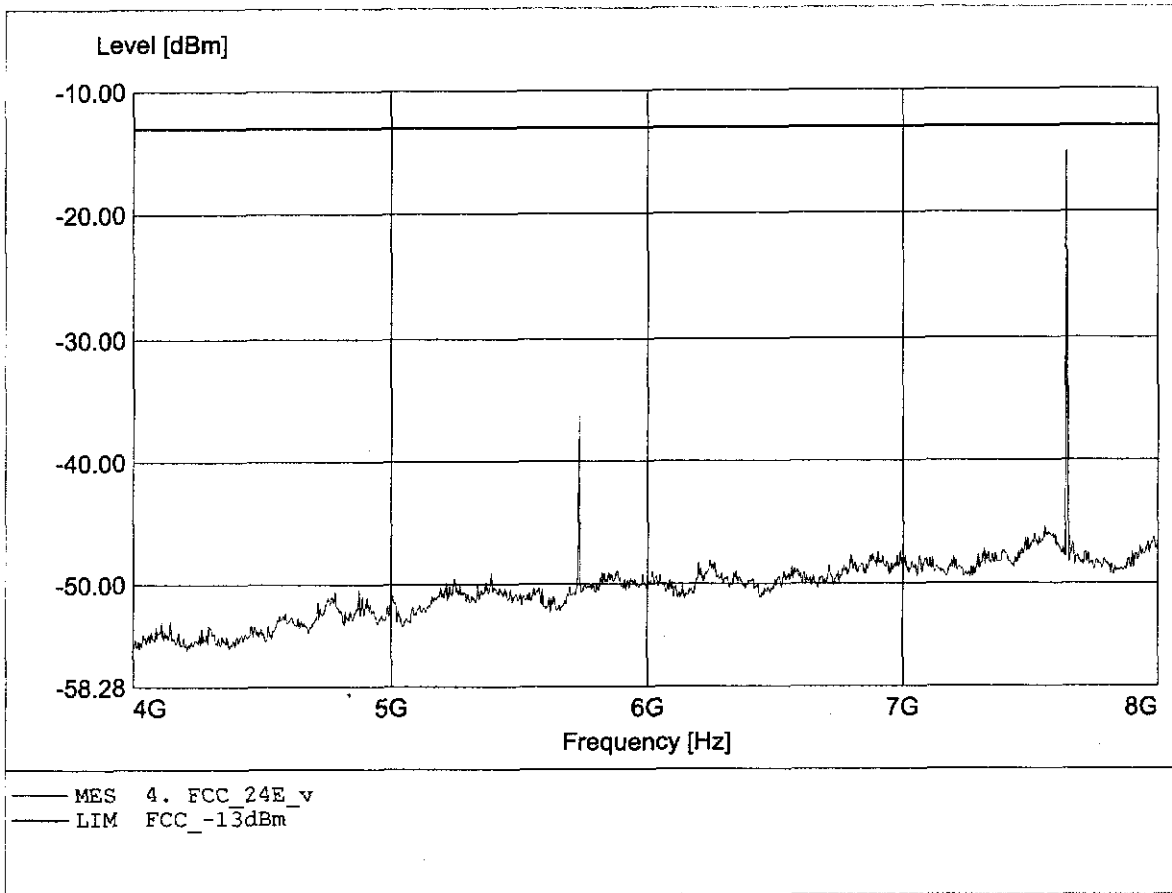

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.640GHz, Pmax: -20.44dBm, RBW: 1MHz

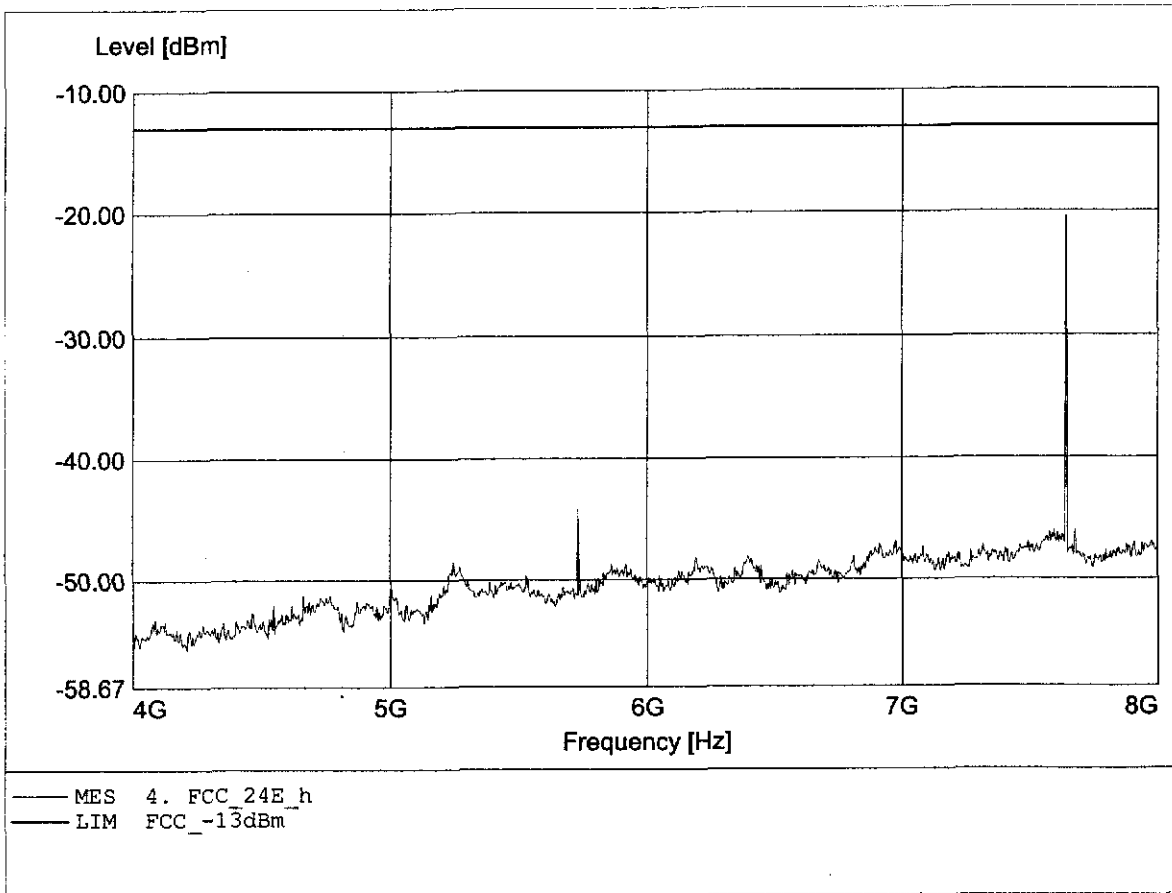




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.551GHz, Pmax: -33.32dBm, RBW: 1MHz

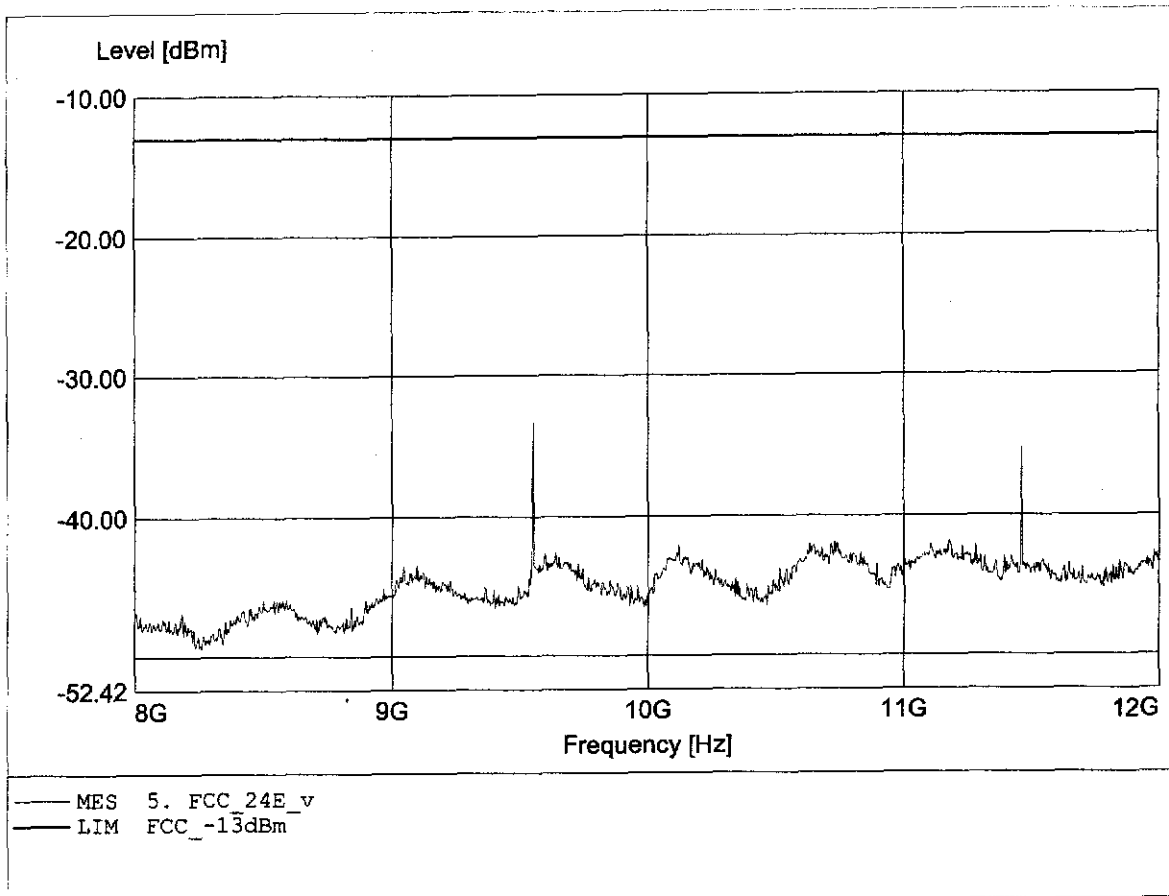


**Radiated Emissions Tx  
FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 11.462GHz, Pmax: -35.42dBm, RBW: 1MHz

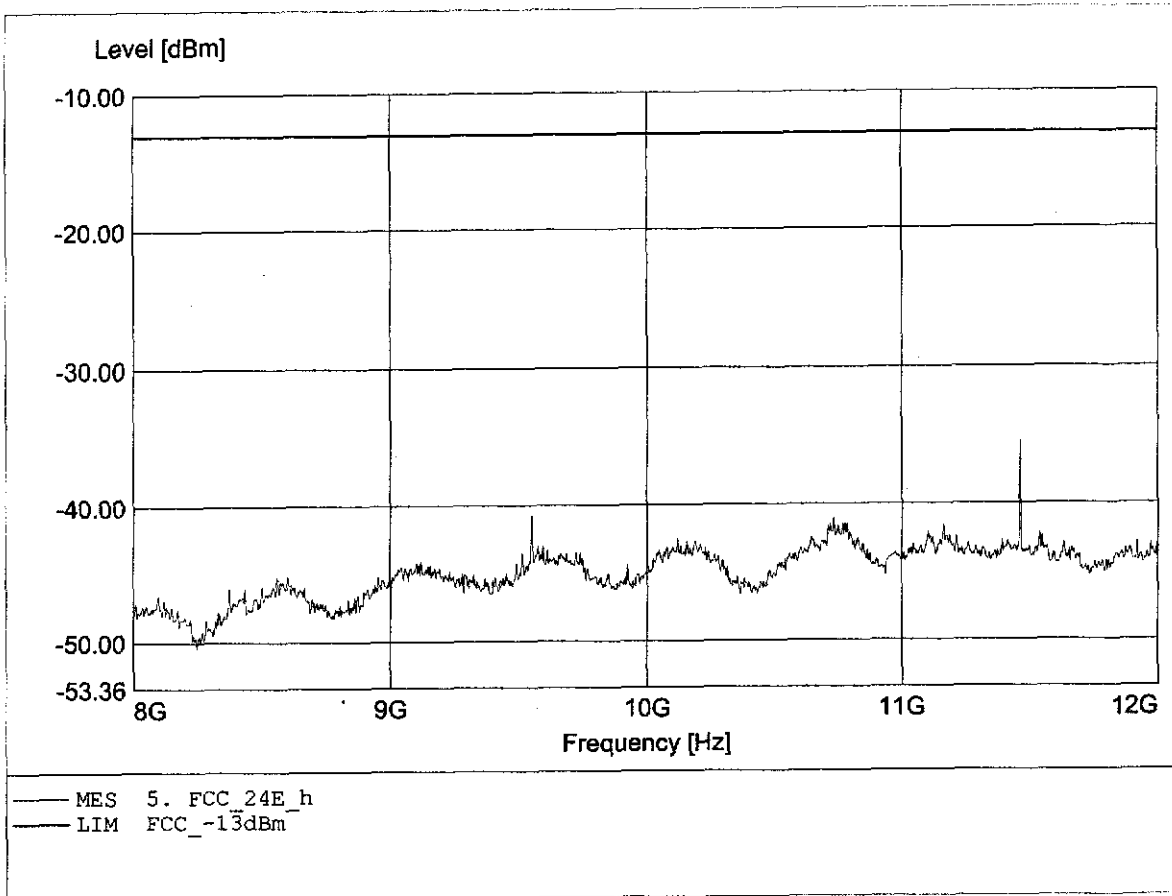


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 15.280GHz, Pmax: -29.50dBm, RBW: 1MHz

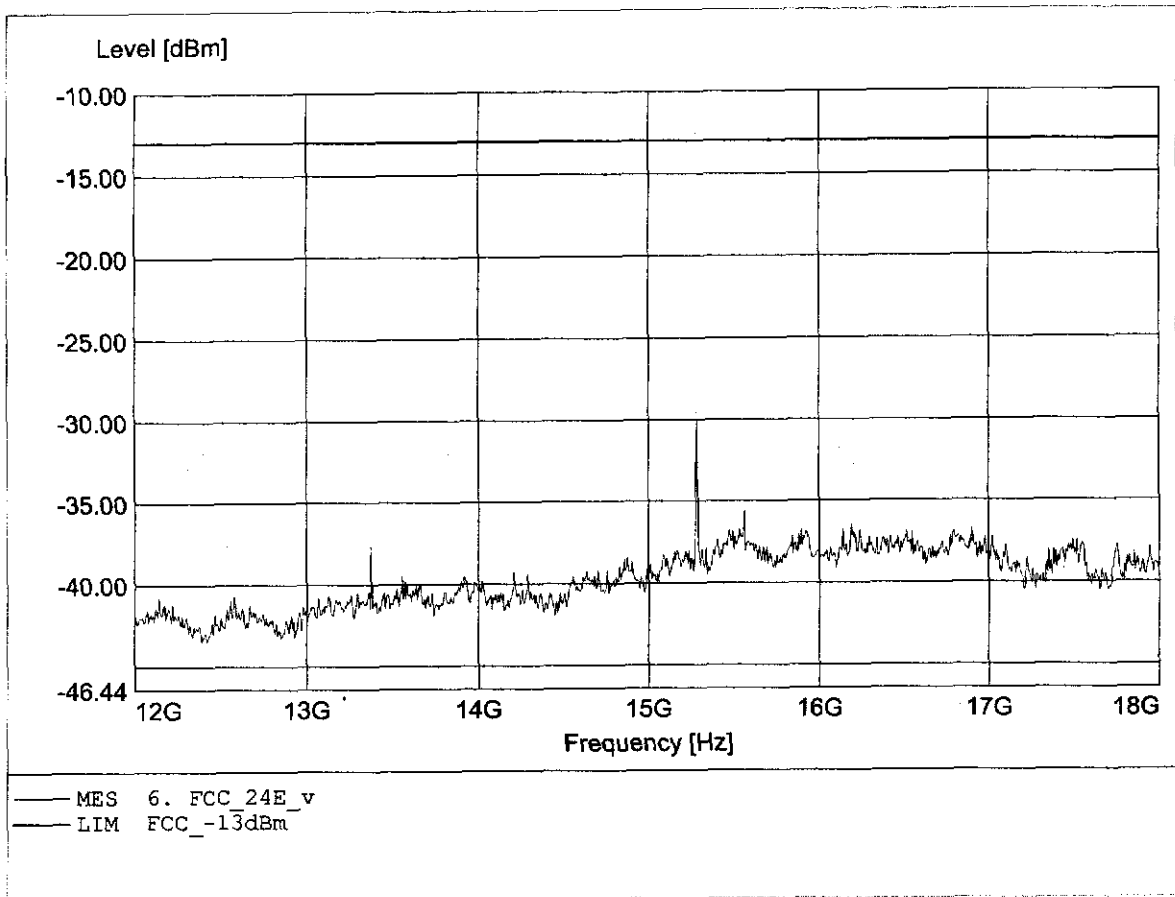


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 15.280GHz, Pmax: -30.49dBm, RBW: 1MHz

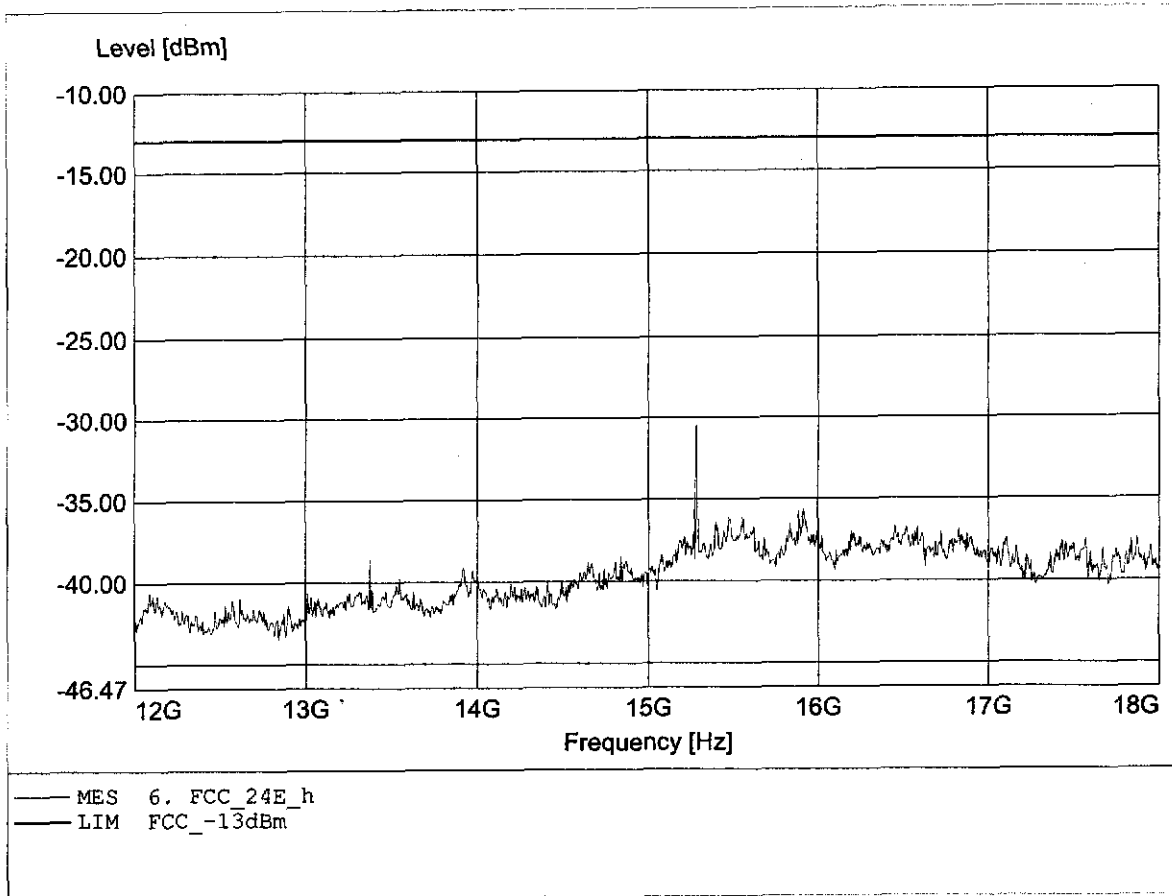


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 26.500GHz, Pmax: -27.21dBm, RBW: 1MHz

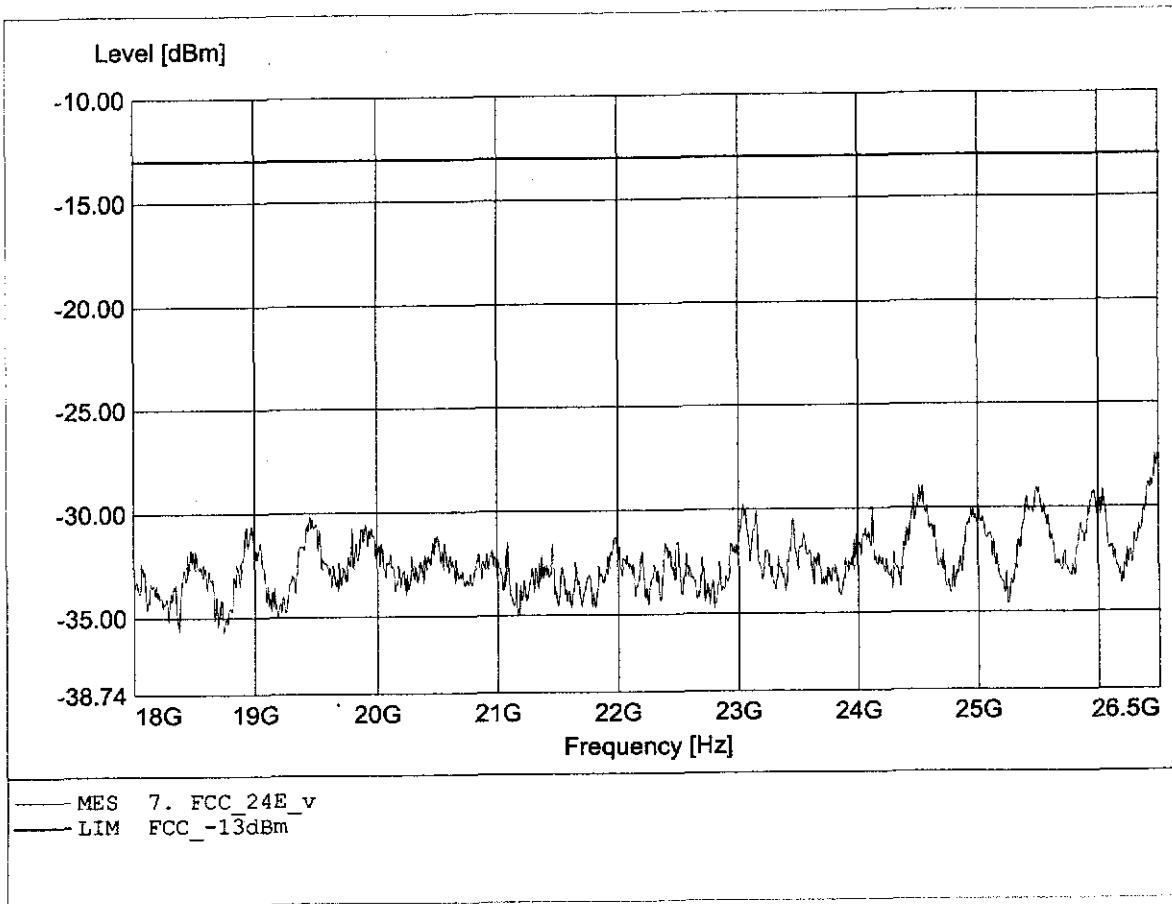


**Radiated Emissions Tx  
FCC RULES PART 24 SUBPART E**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 810  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 24.536GHz, Pmax: -28.59dBm, RBW: 1MHz

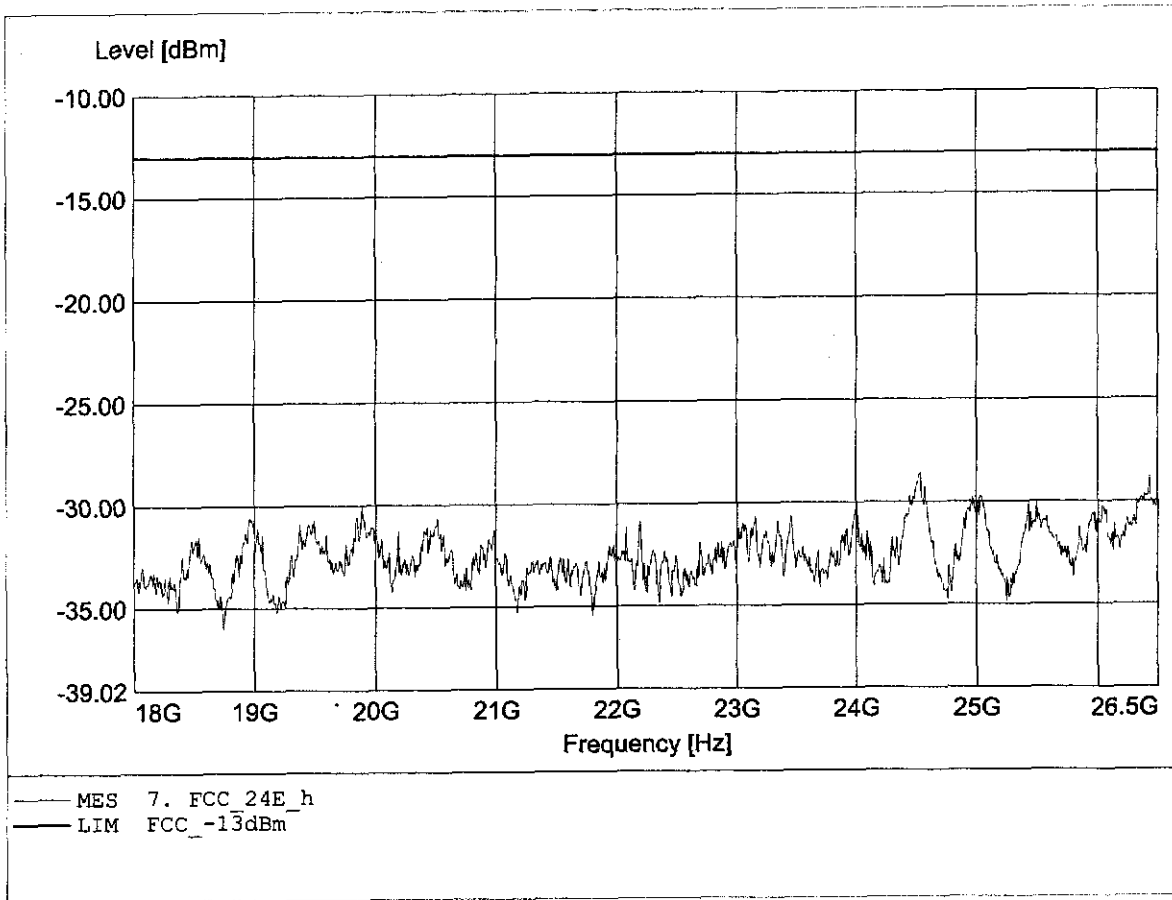




Marker 1 [T1] RBW 3 kHz RF Att 50 dB  
Ref Lvl 32.41 dBm VBW 3 kHz  
35 dBm 848.81362725 MHz SWT 560 ms Unit dBm

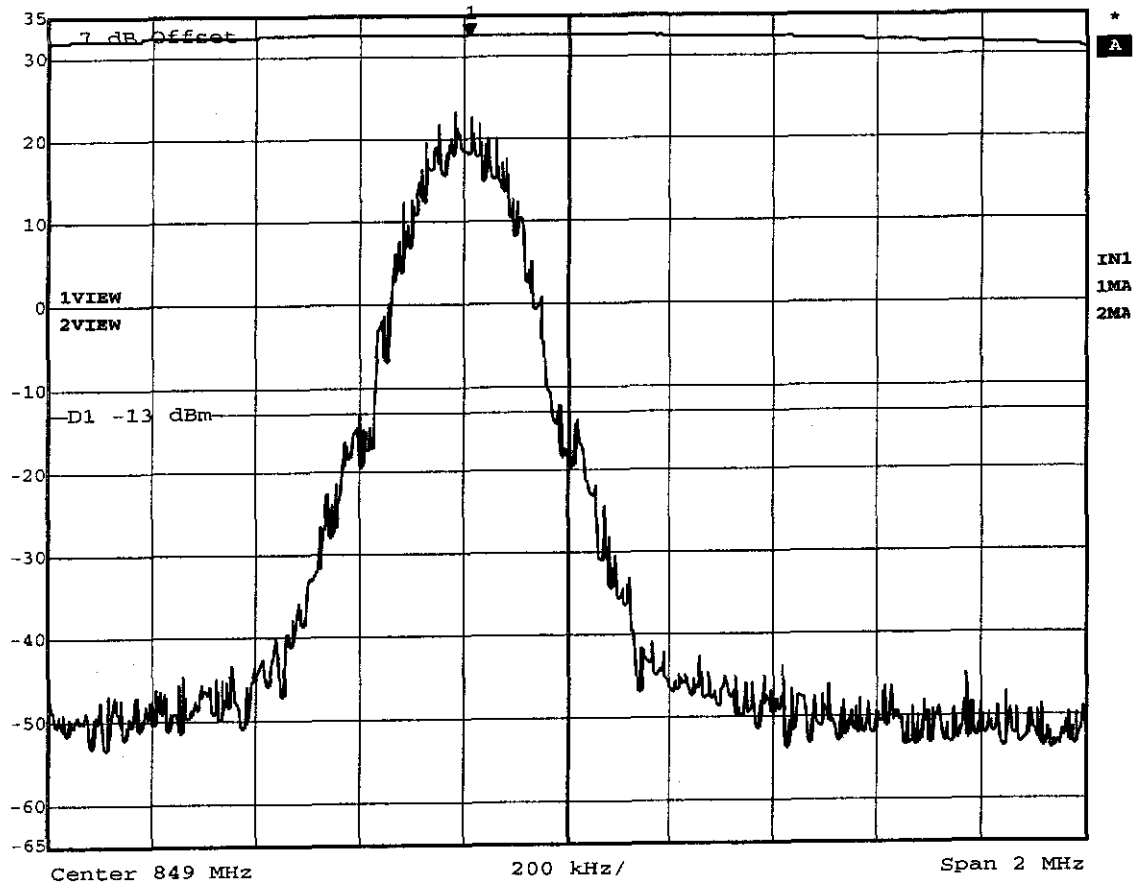

Title: Higher Band Edge  
Comment A: Model:Q2426 HW:4.0  
Date: 14.APR.2003 08:35:10



Marker 1 [T1] RBW 10 kHz RF Att 50 dB  
Ref Lvl 32.42 dBm VBW 10 kHz  
35 dBm 824.12625251 MHz SWT 50 ms Unit dBm

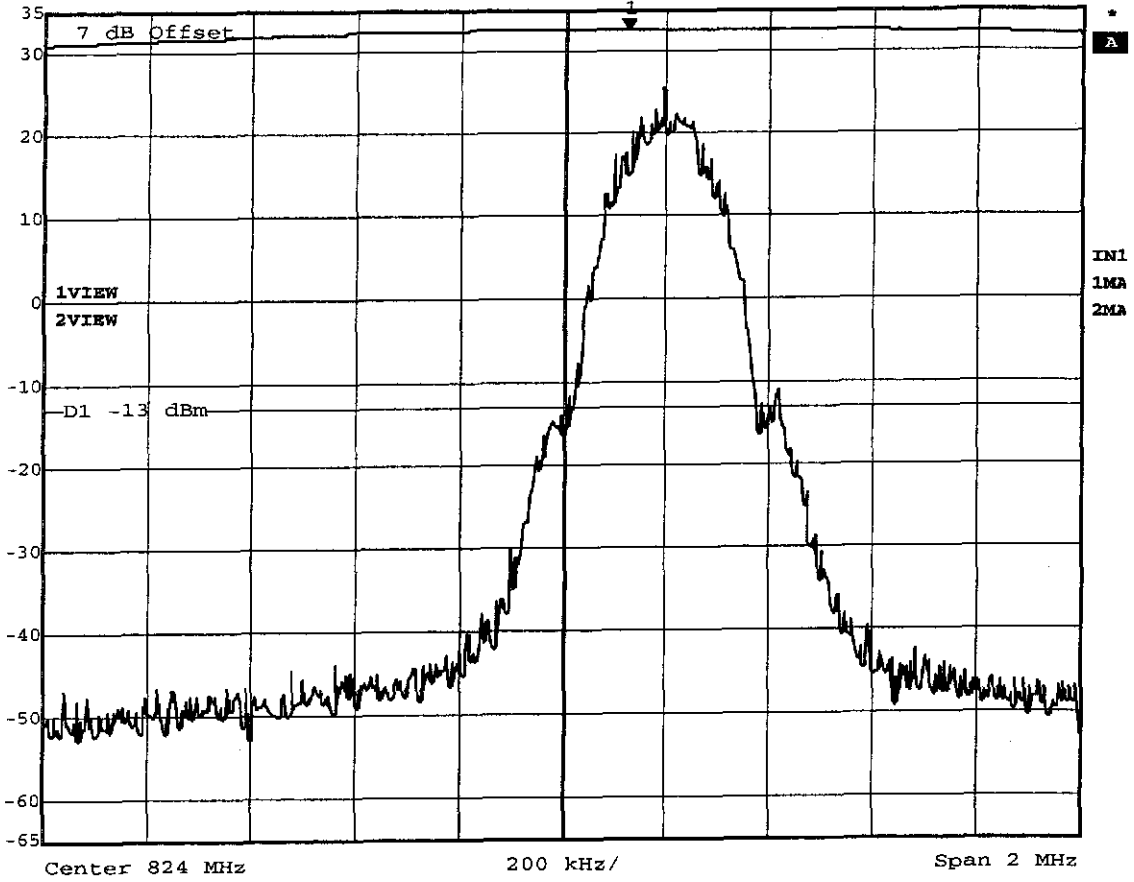


Title: Lower Band Edge  
Comment A: Model:Q2426 HW:4.0  
Date: 14.APR.2003 08:30:34




**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 128  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 194.711MHz, Pmax: -51.75dBm, RBW: 1MHz

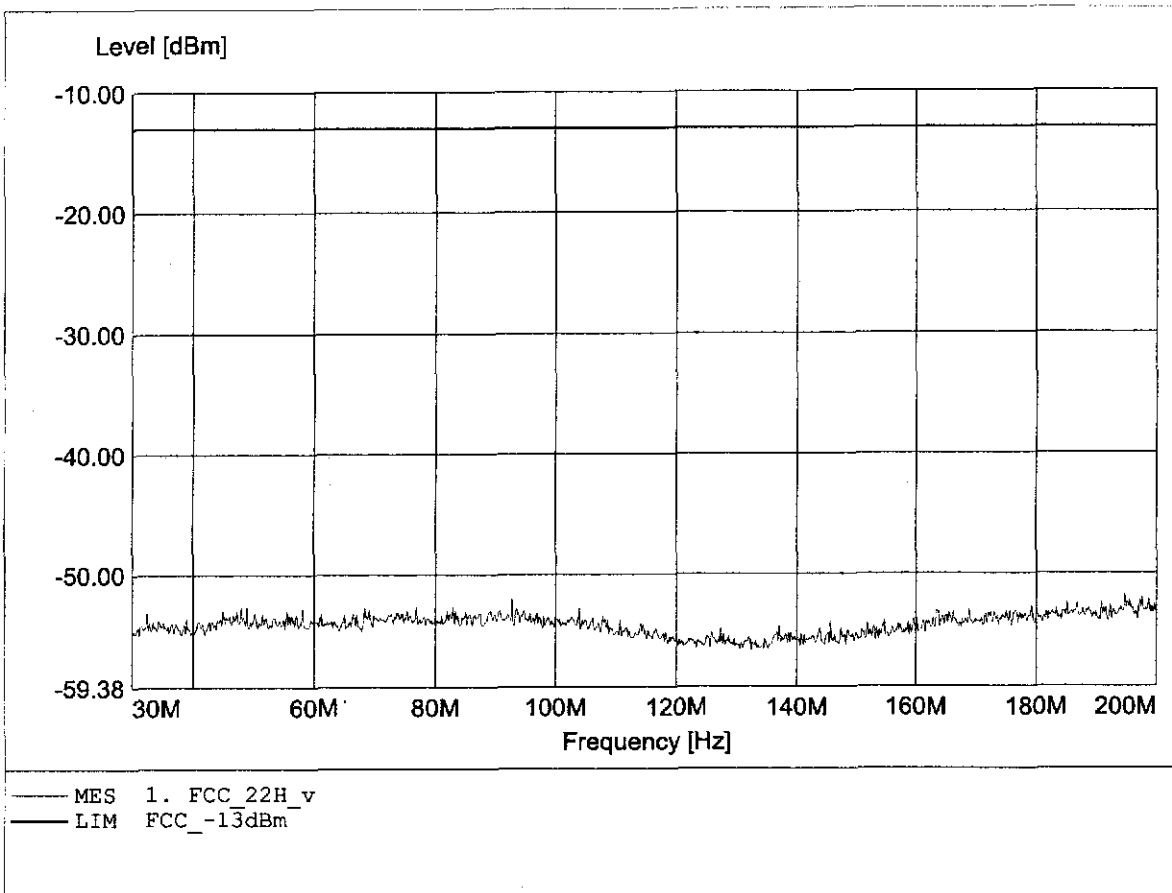


**Radiated Emissions Tx  
FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 128  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 43.600MHz, Pmax: -50.42dBm, RBW: 1MHz

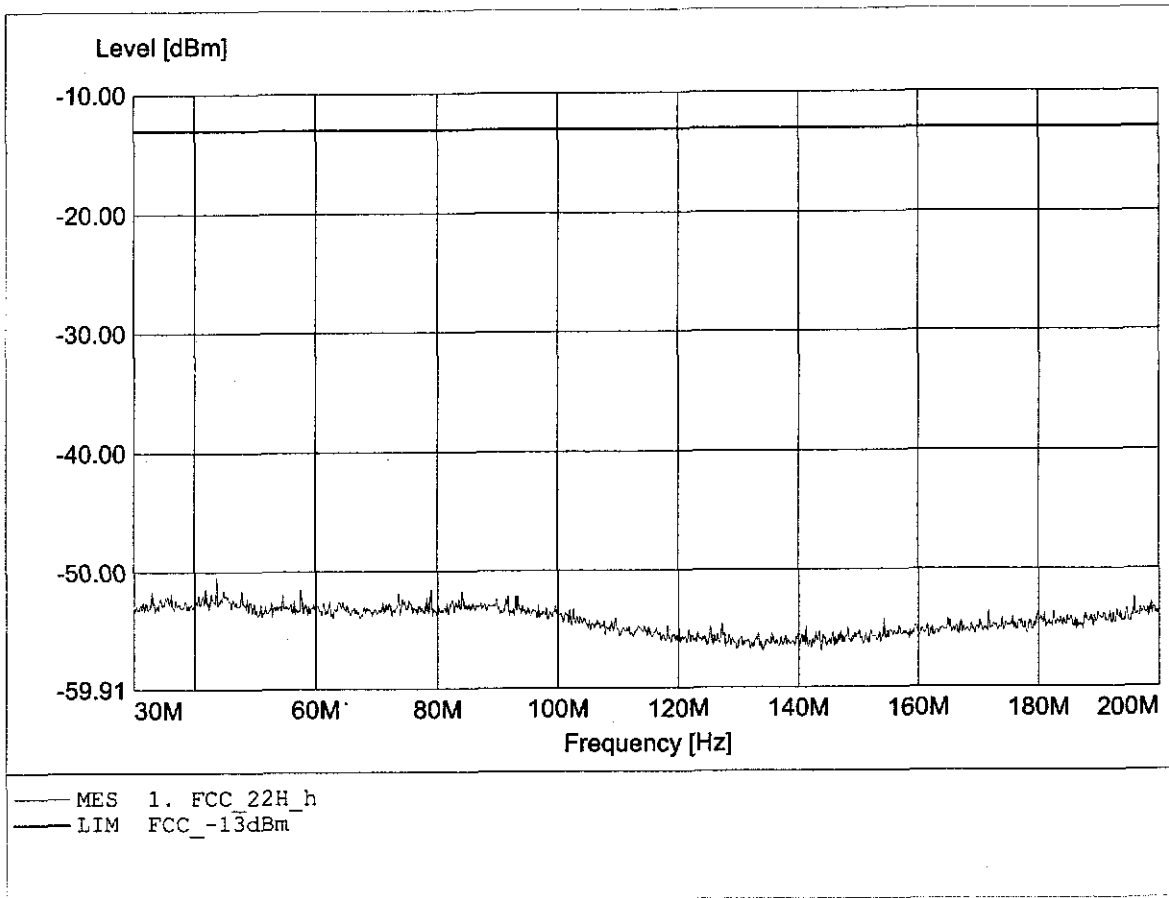


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 128  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 824.000MHz, Pmax: -17.08dBm, RBW: 1MHz

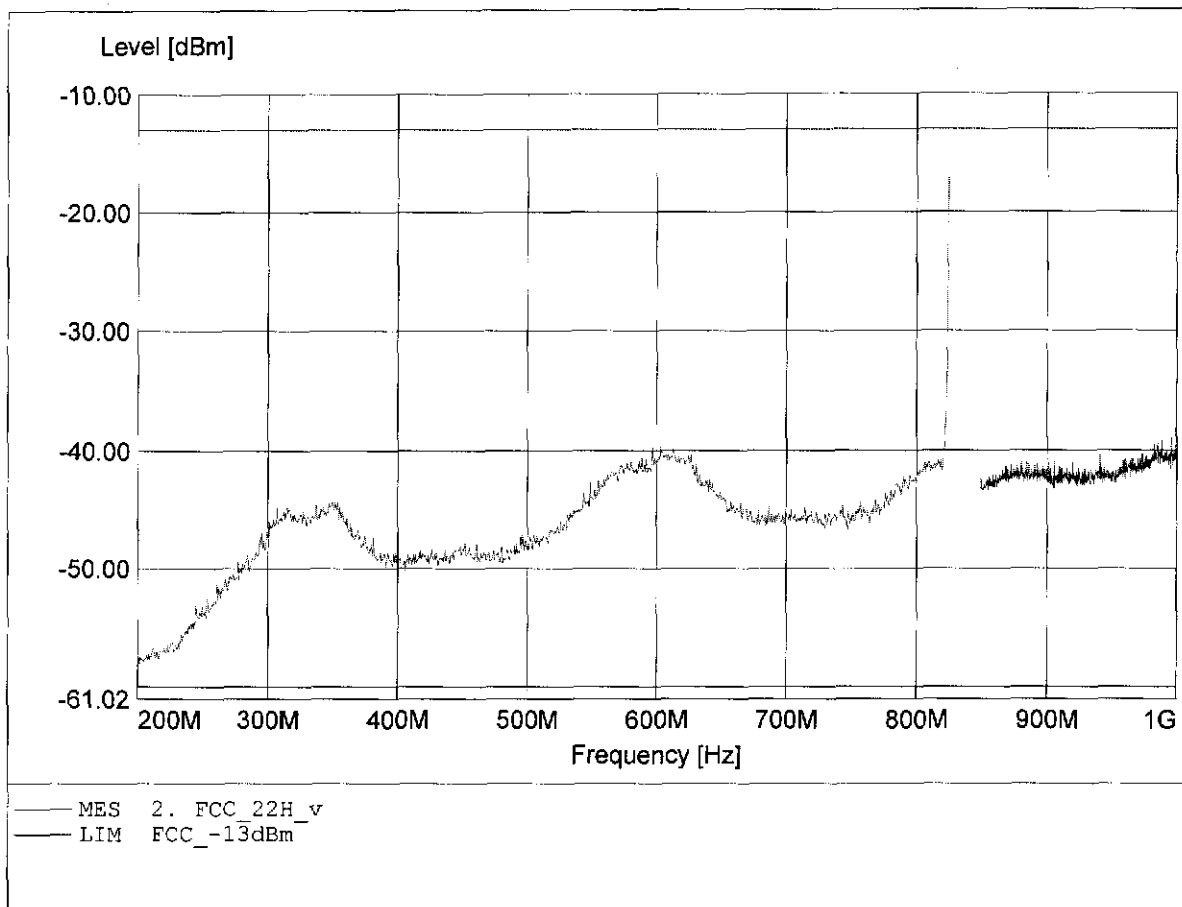


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 128  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 824.000MHz, Pmax: -25.98dBm, RBW: 1MHz

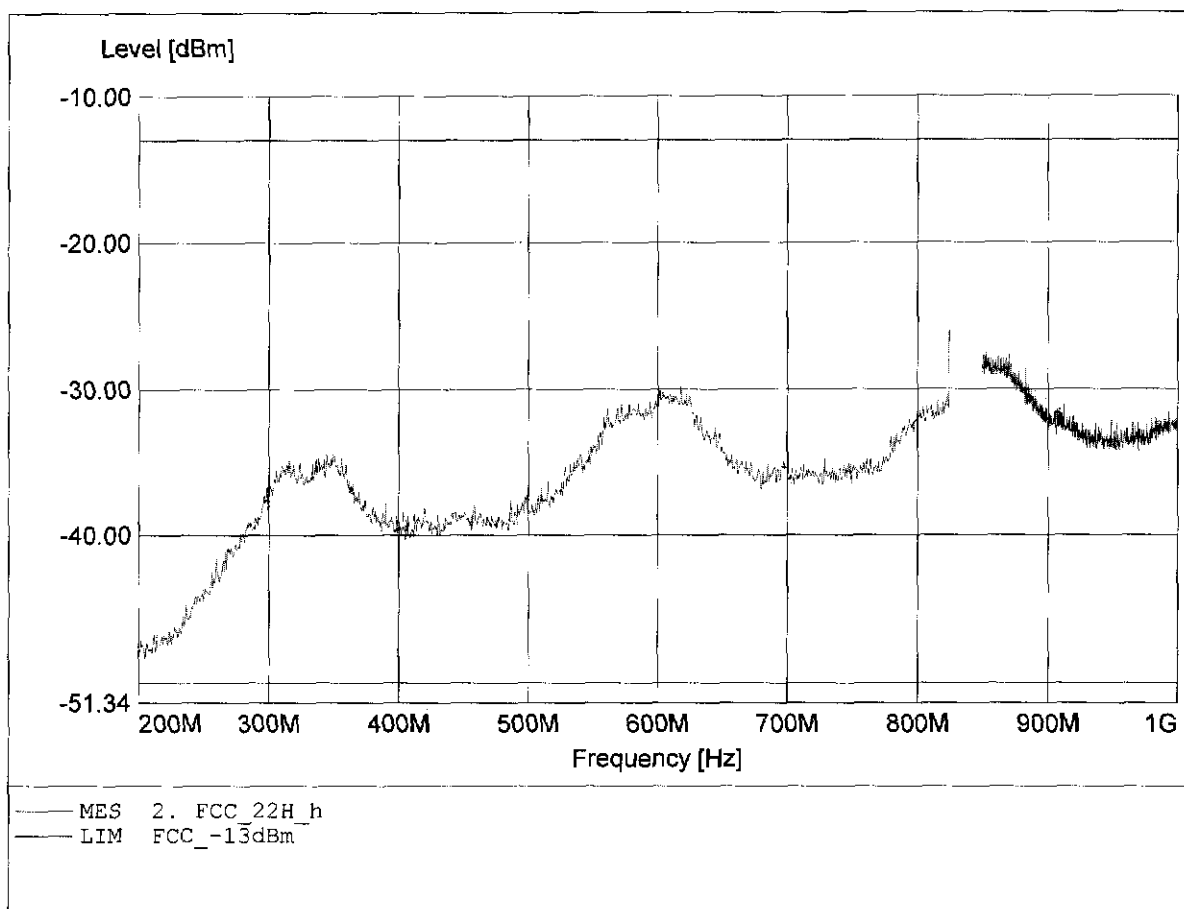


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 128  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 1.653GHz, Pmax: -18.68dBm, RBW: 1MHz

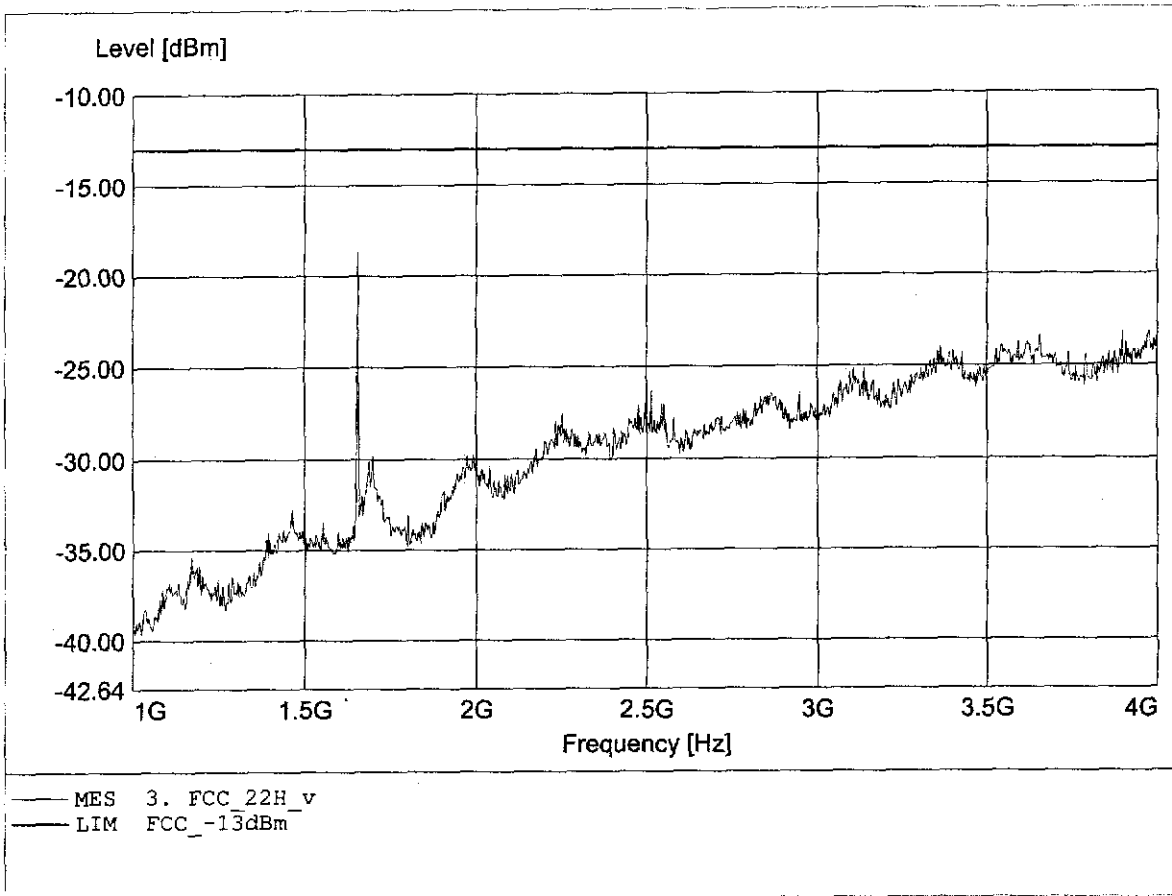


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 128  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.530GHz, Pmax: -22.62dBm, RBW: 1MHz

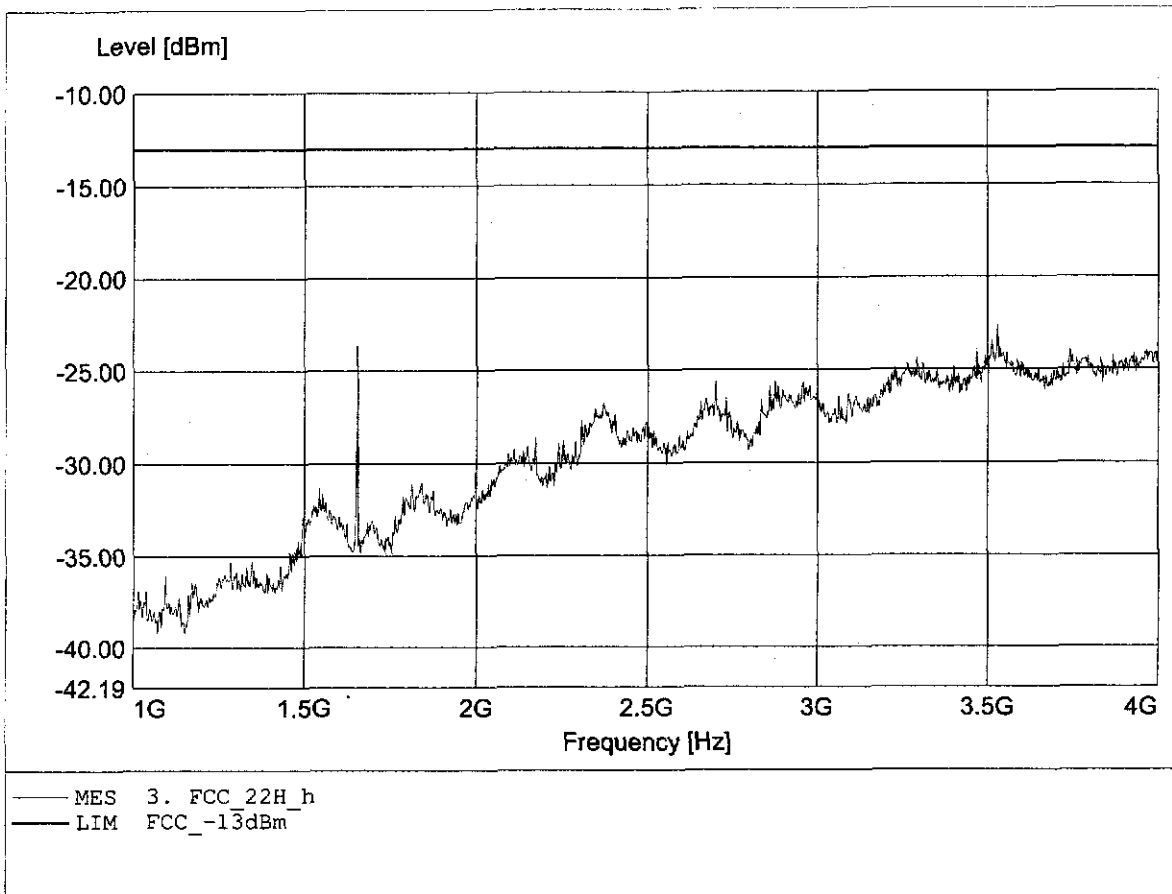


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 128  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.622GHz, Pmax: -46.10dBm, RBW: 1MHz

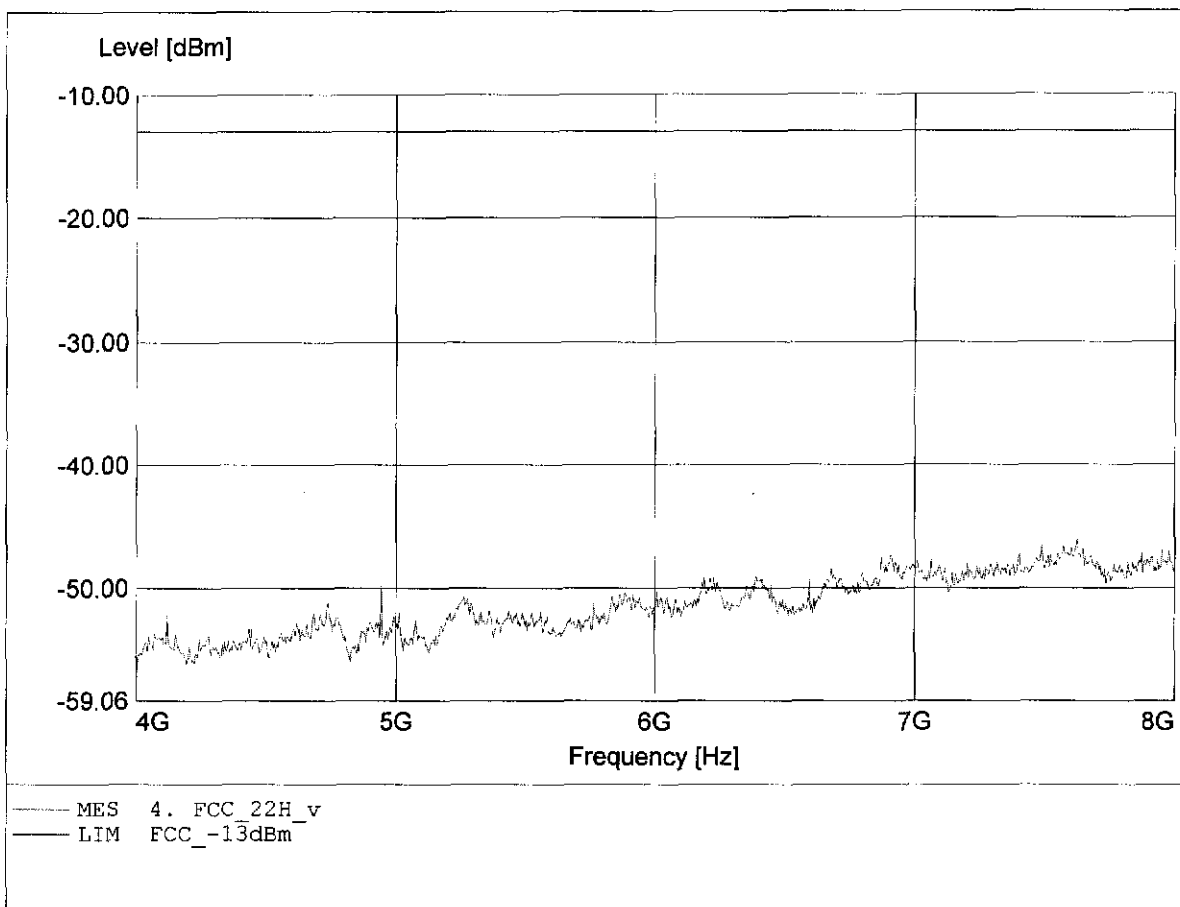

**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**


EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 128  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.547GHz, Pmax: -45.78dBm, RBW: 1MHz

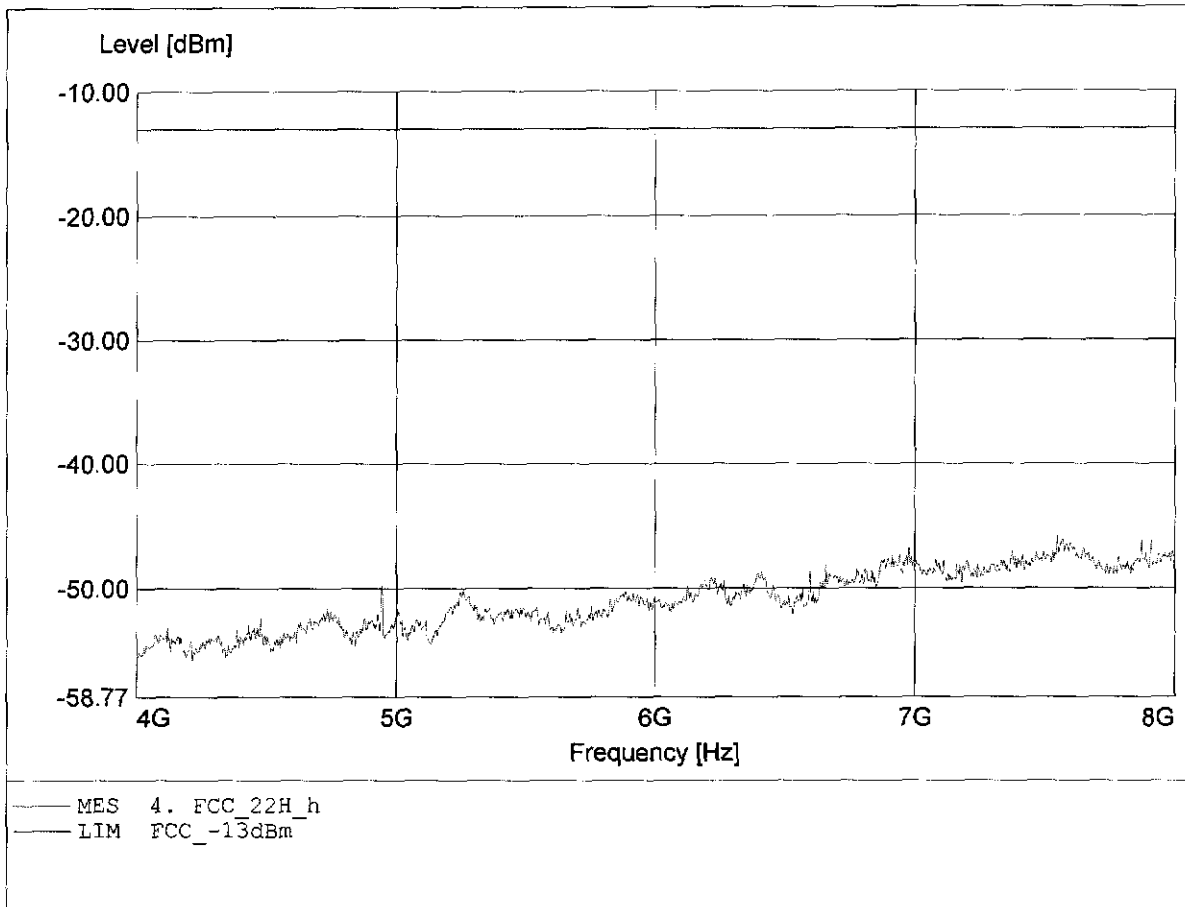




**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 128  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 11.173GHz, Pmax: -40.84dBm, RBW: 1MHz

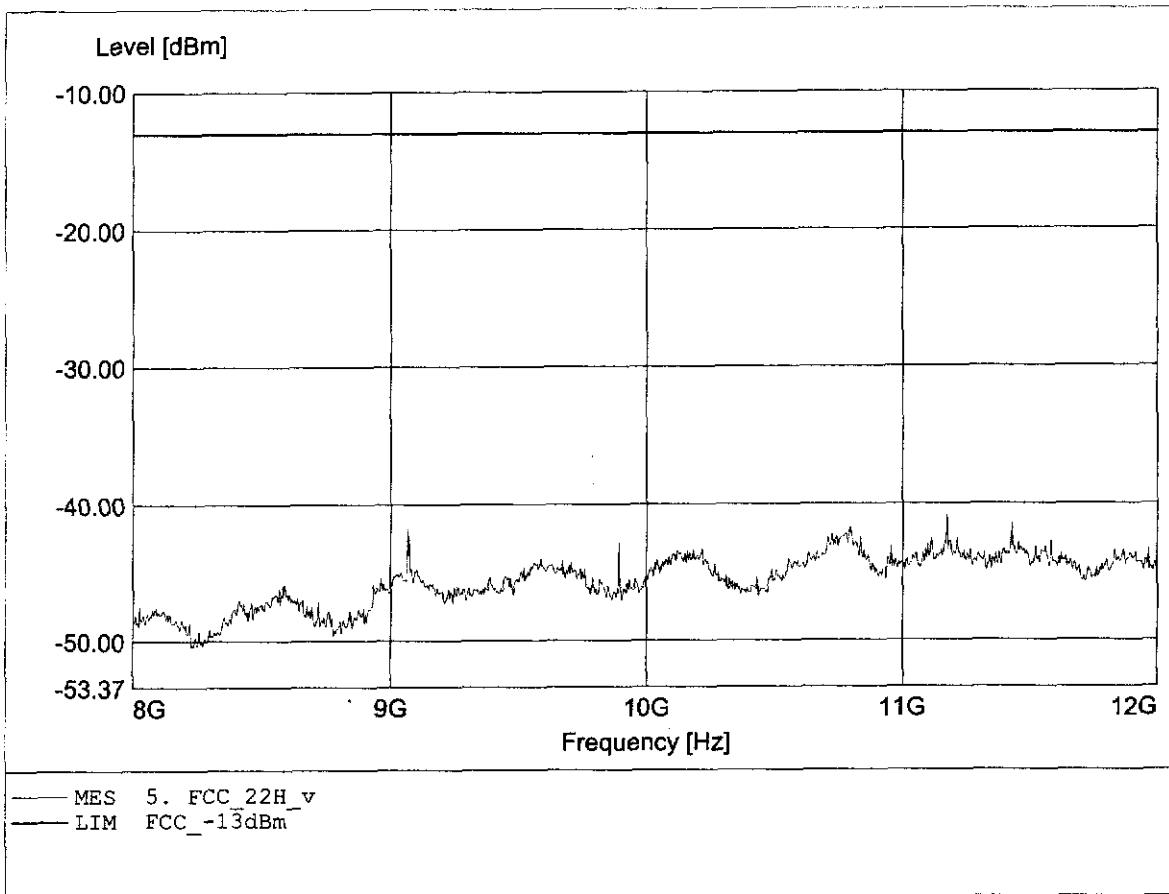


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 128  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 10.742GHz, Pmax: -41.55dBm, RBW: 1MHz

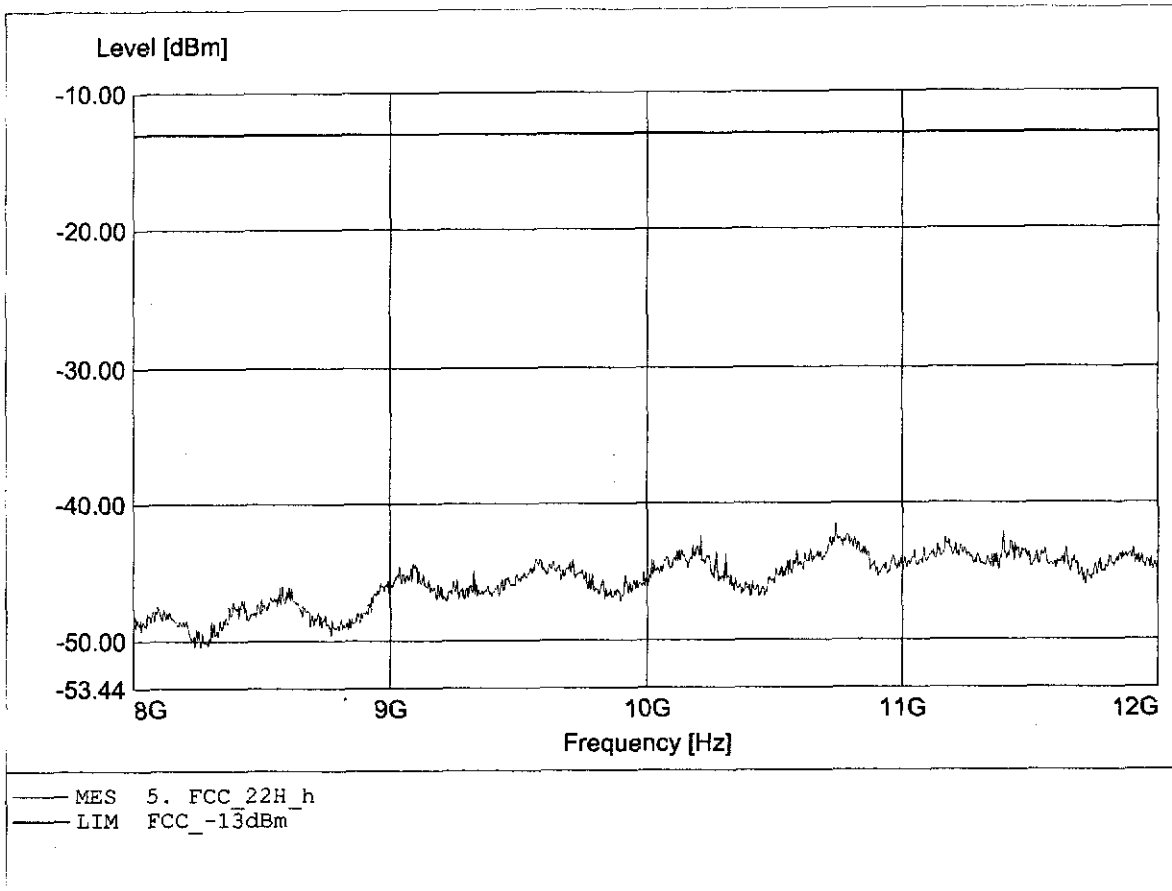


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 188  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 188.856MHz, Pmax: -52.28dBm, RBW: 1MHz

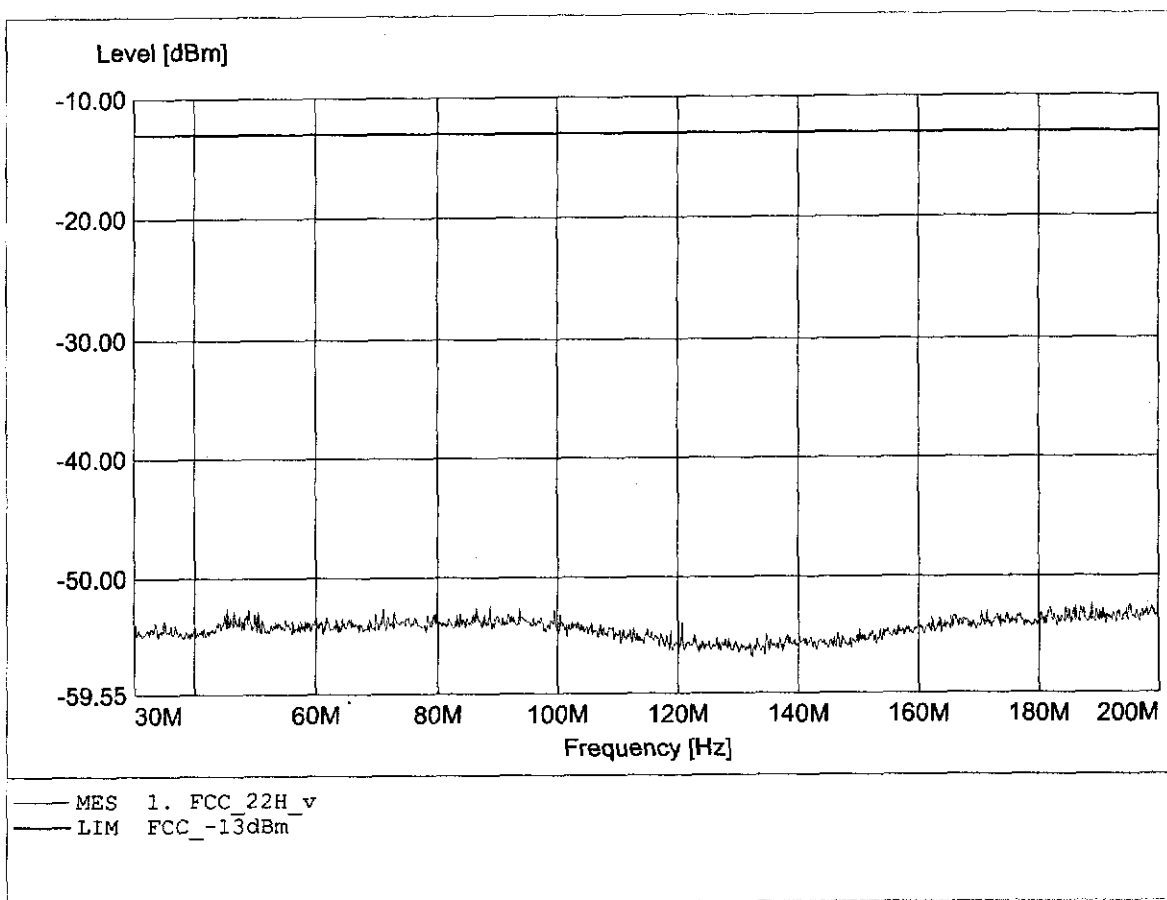


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 188  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 47.378MHz, Pmax: -50.84dBm, RBW: 1MHz

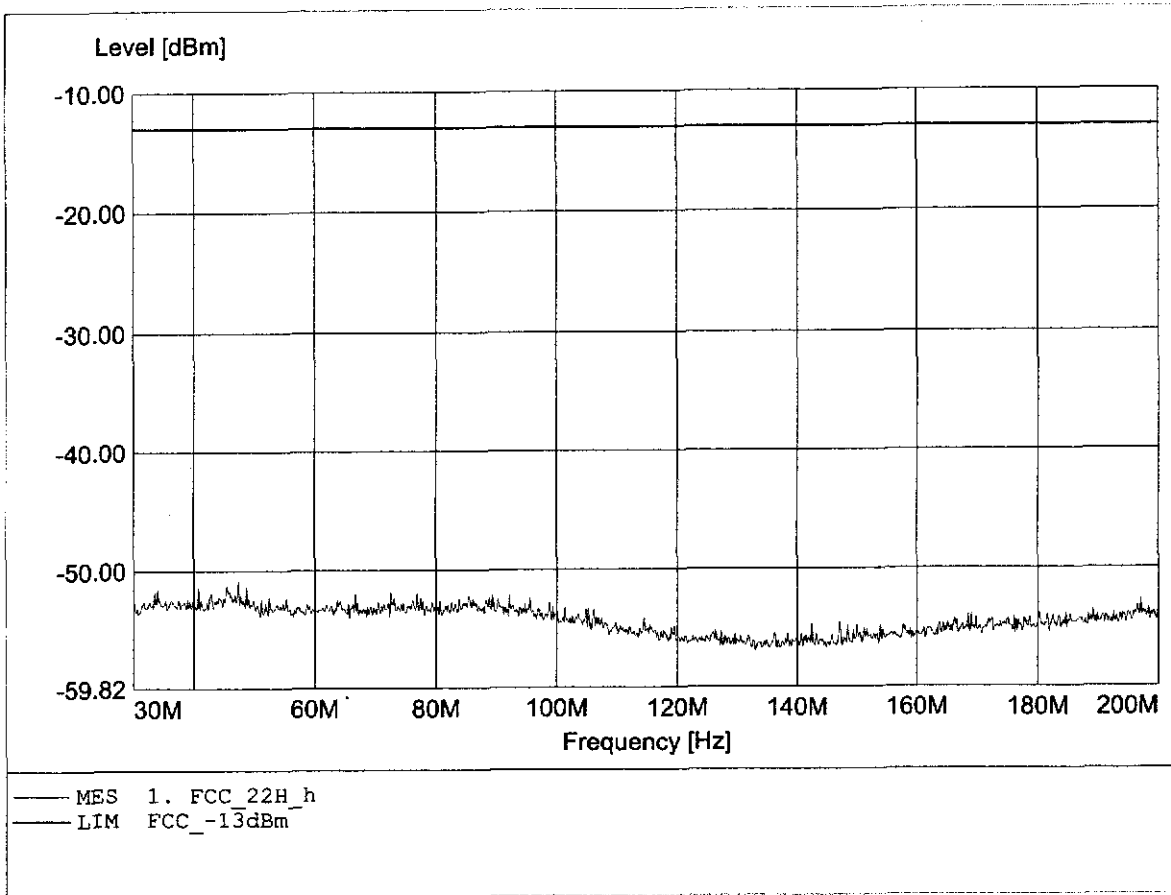


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 188  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 996.644MHz, Pmax: -39.10dBm, RBW: 1MHz

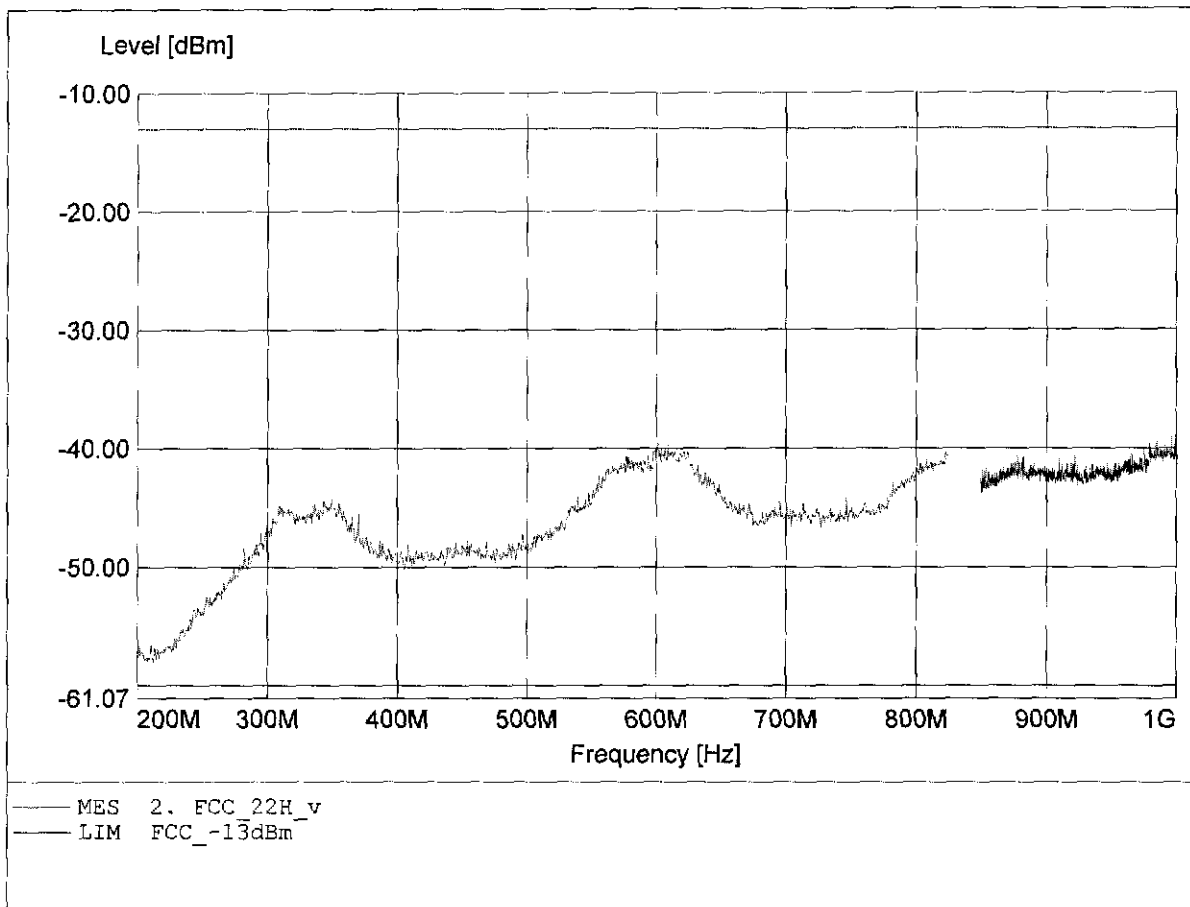


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 188  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 850.510MHz, Pmax: -27.49dBm, RBW: 1MHz

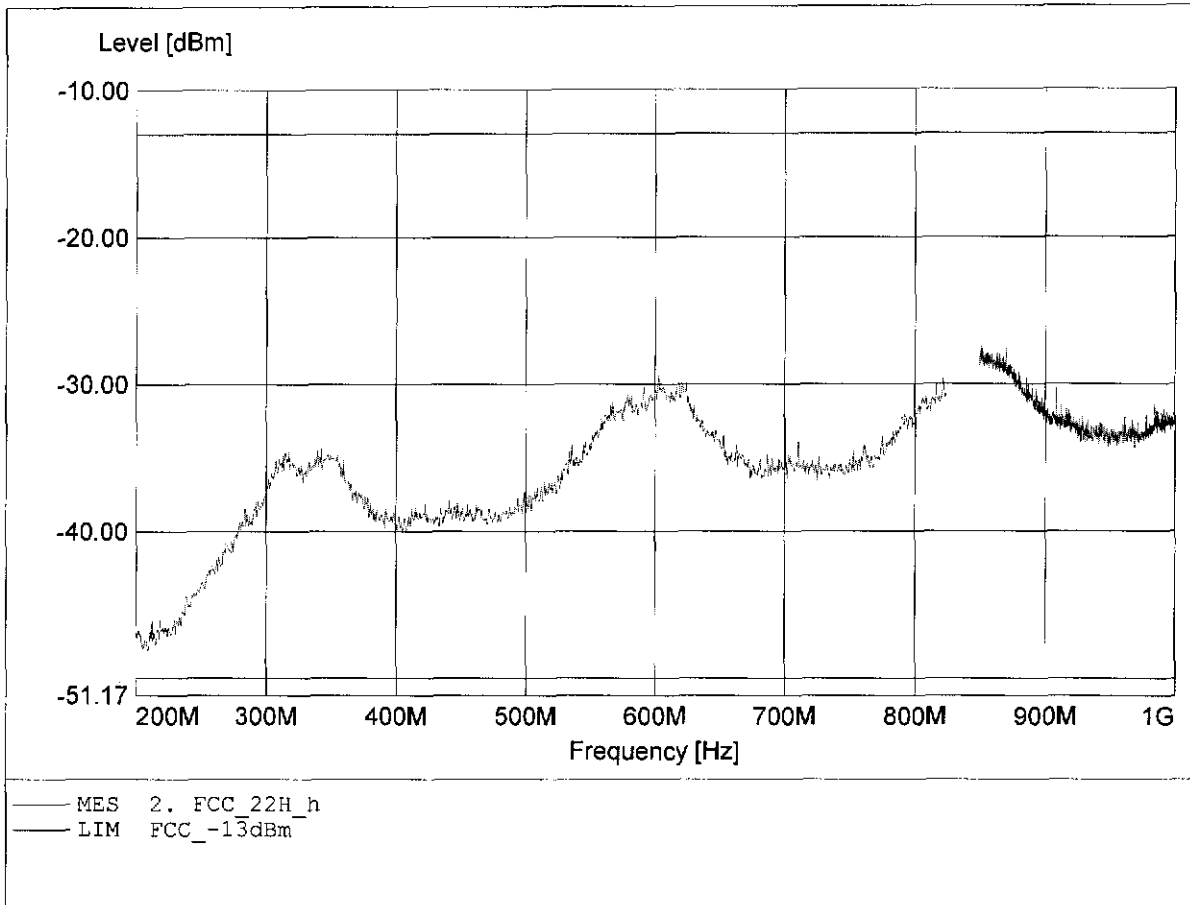


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 188  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 1.677GHz, Pmax: -13.55dBm, RBW: 1MHz

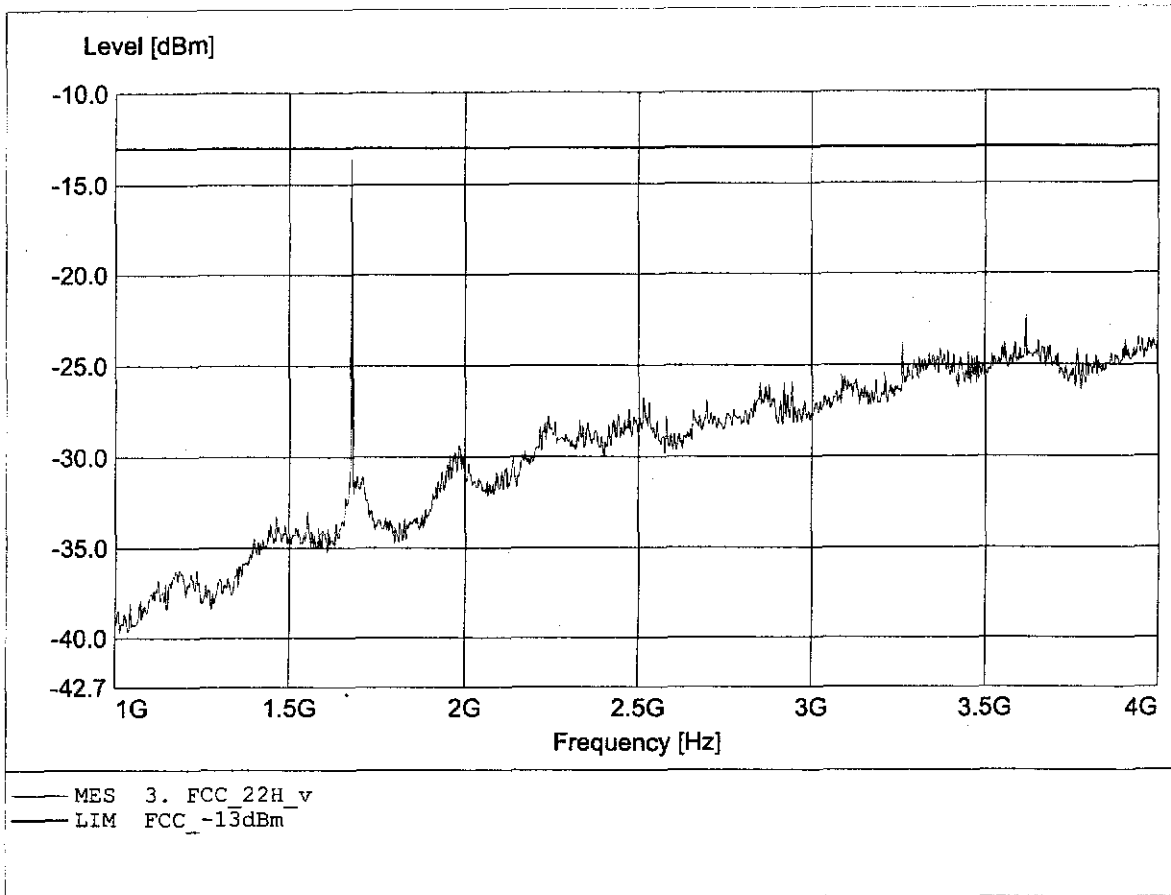

**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**


EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 188  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 1.677GHz, Pmax: -23.05dBm, RBW: 1MHz

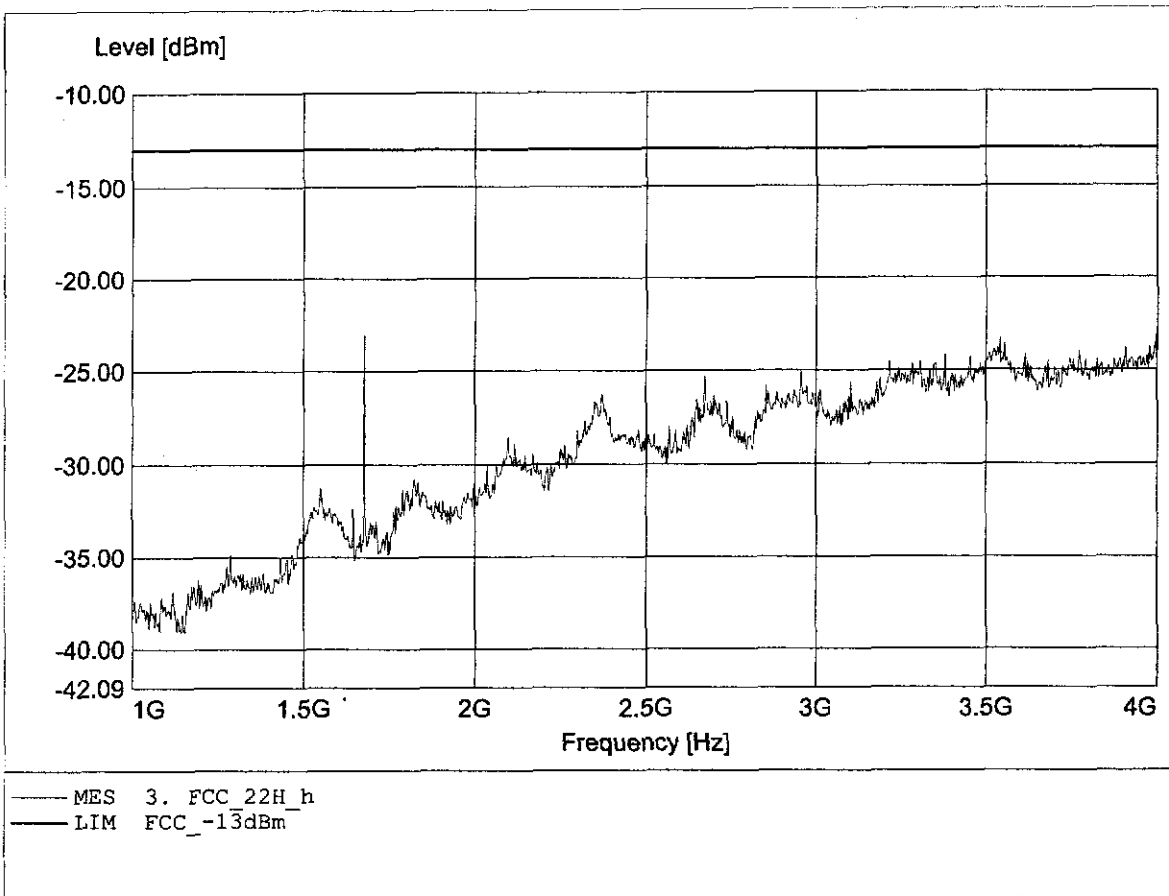




**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 188  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.529GHz, Pmax: -45.95dBm, RBW: 1MHz

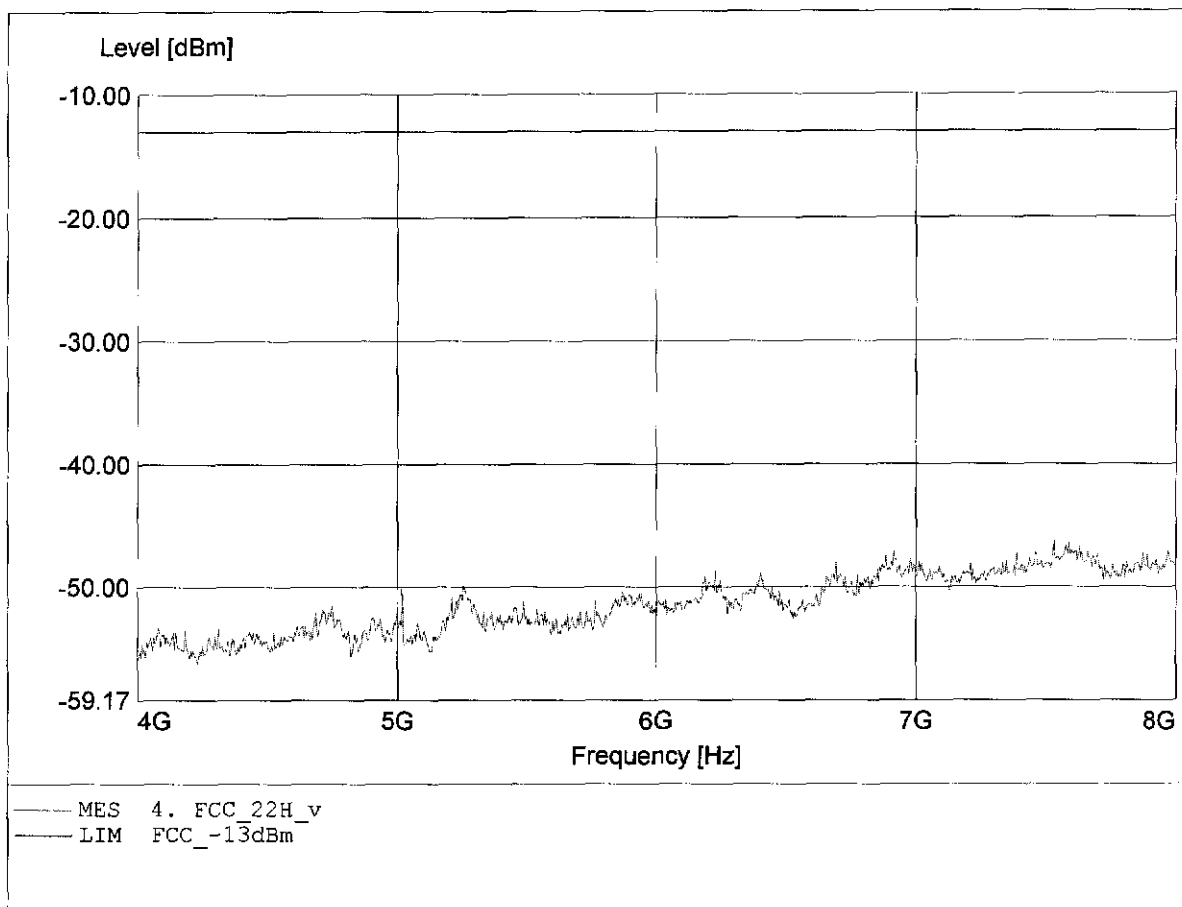


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 188  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.569GHz, Pmax: -46.54dBm, RBW: 1MHz

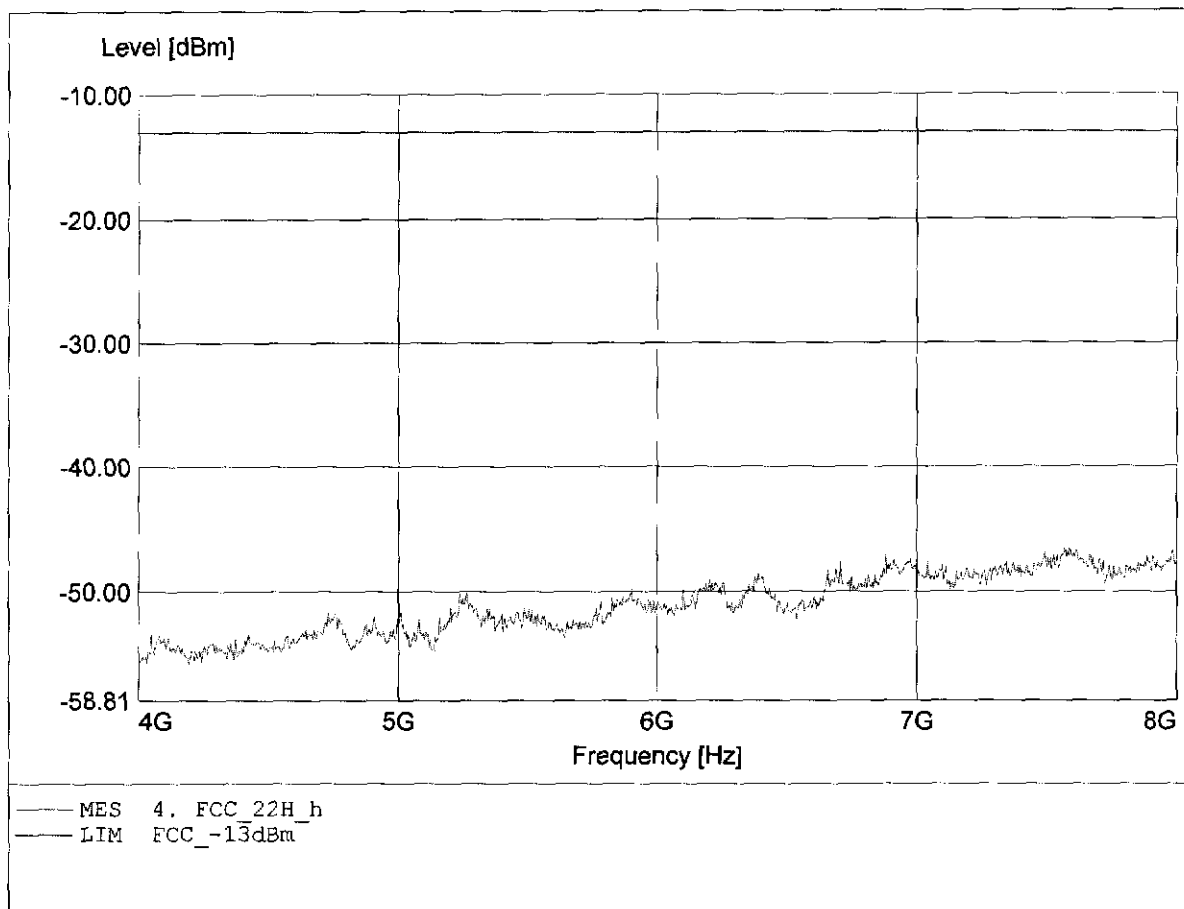


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 188  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 10.787GHz, Pmax: -41.68dBm, RBW: 1MHz

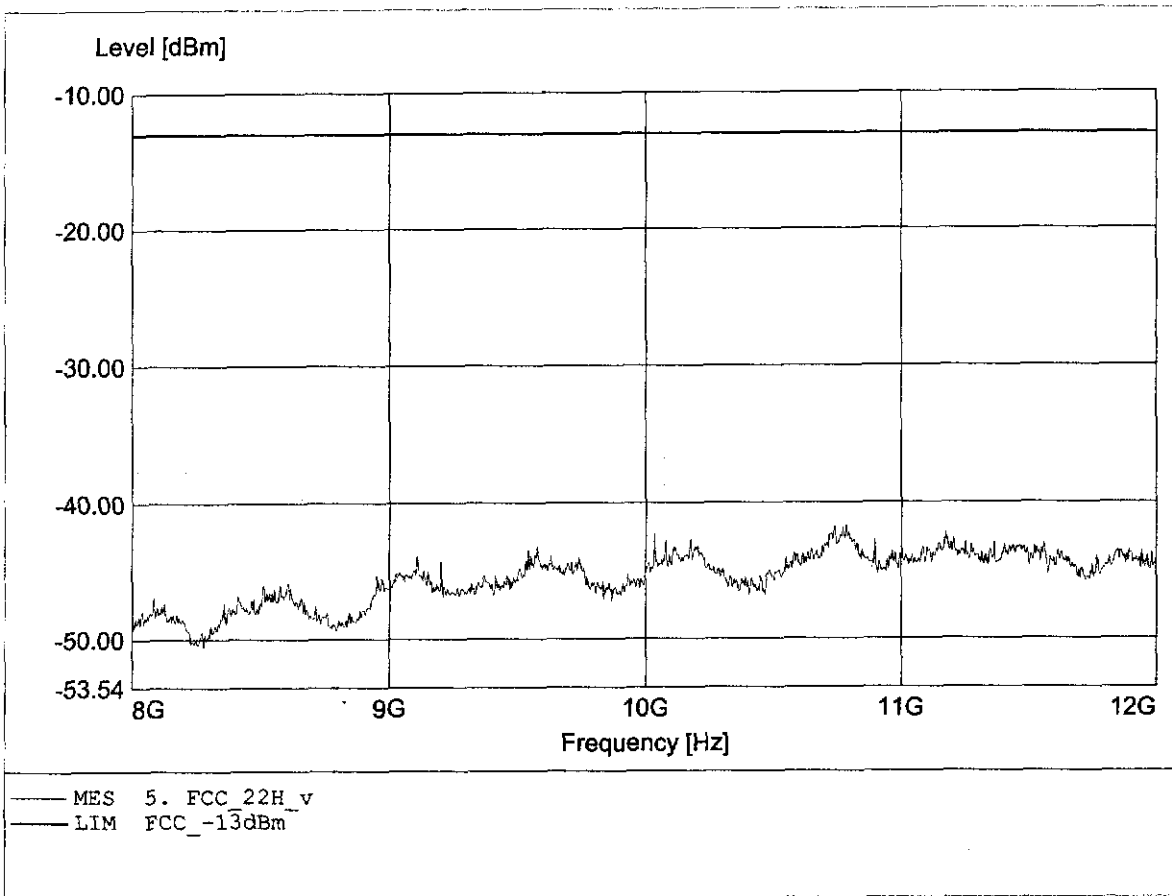


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 188  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 10.800GHz, Pmax: -41.18dBm, RBW: 1MHz

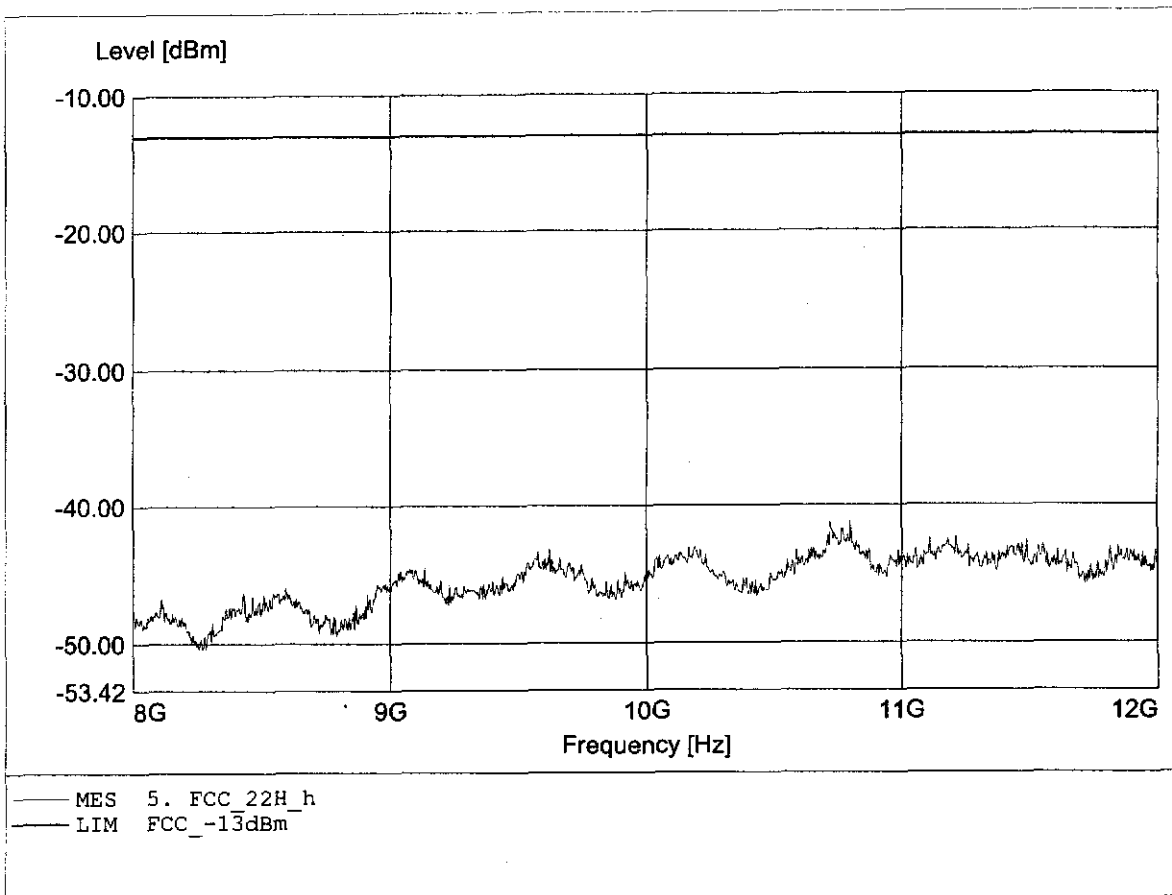


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 251  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 83.644MHz, Pmax: -51.98dBm, RBW: 1MHz

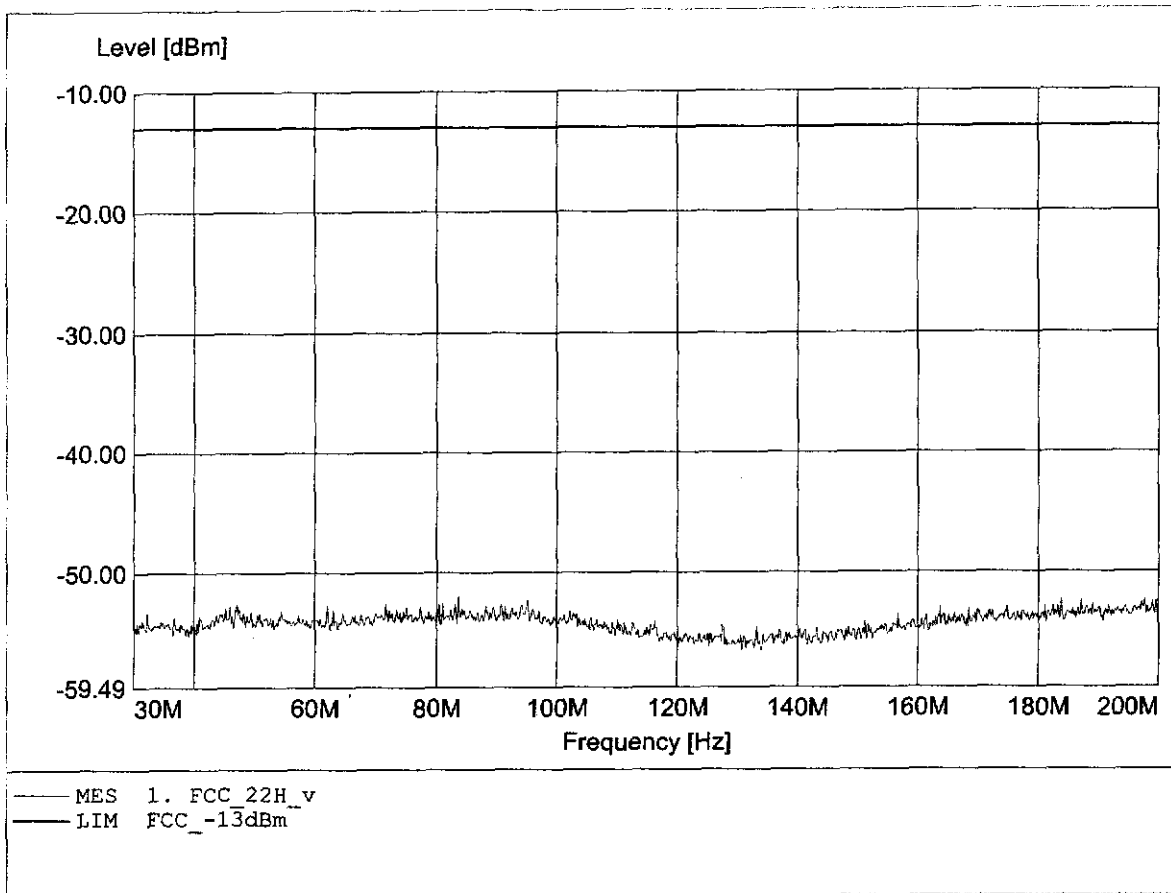


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 251  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 37.556MHz, Pmax: -51.56dBm, RBW: 1MHz

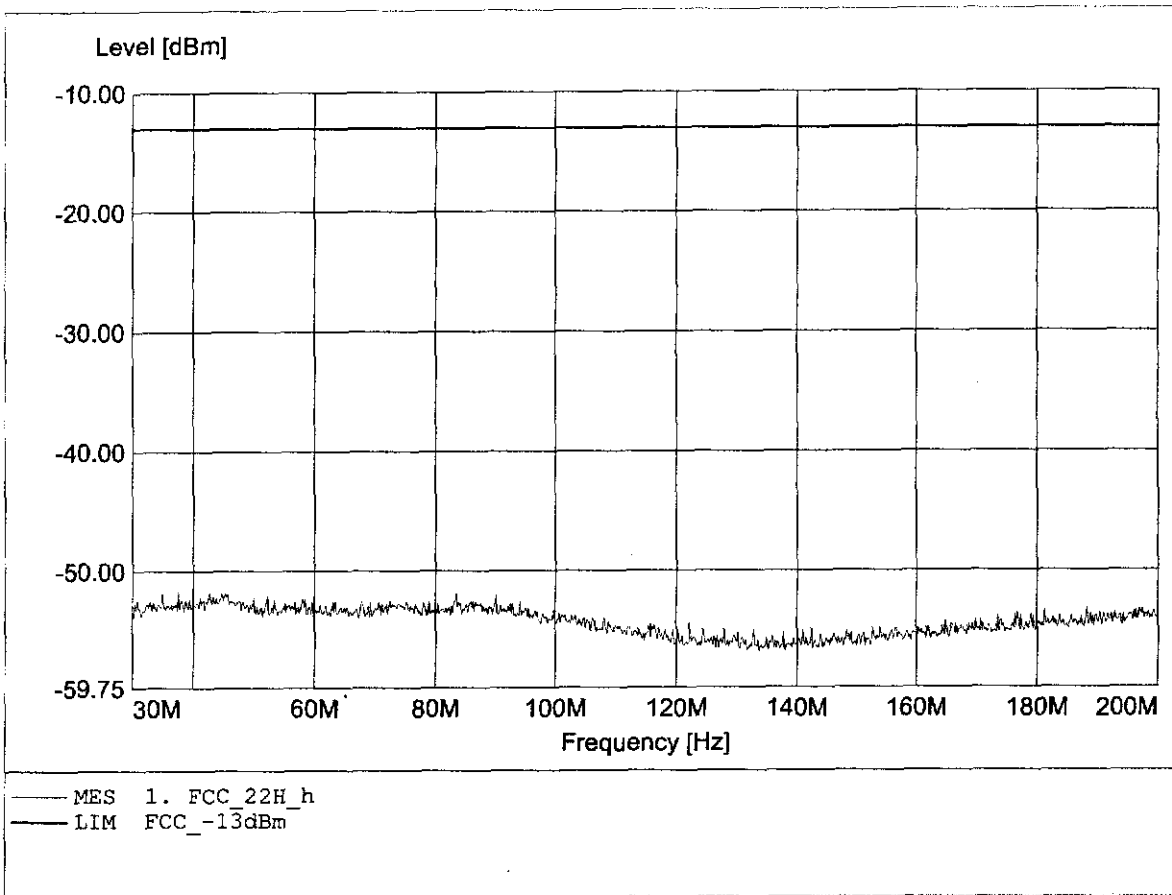


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 251  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 849.000MHz, Pmax: -15.89dBm, RBW: 1MHz

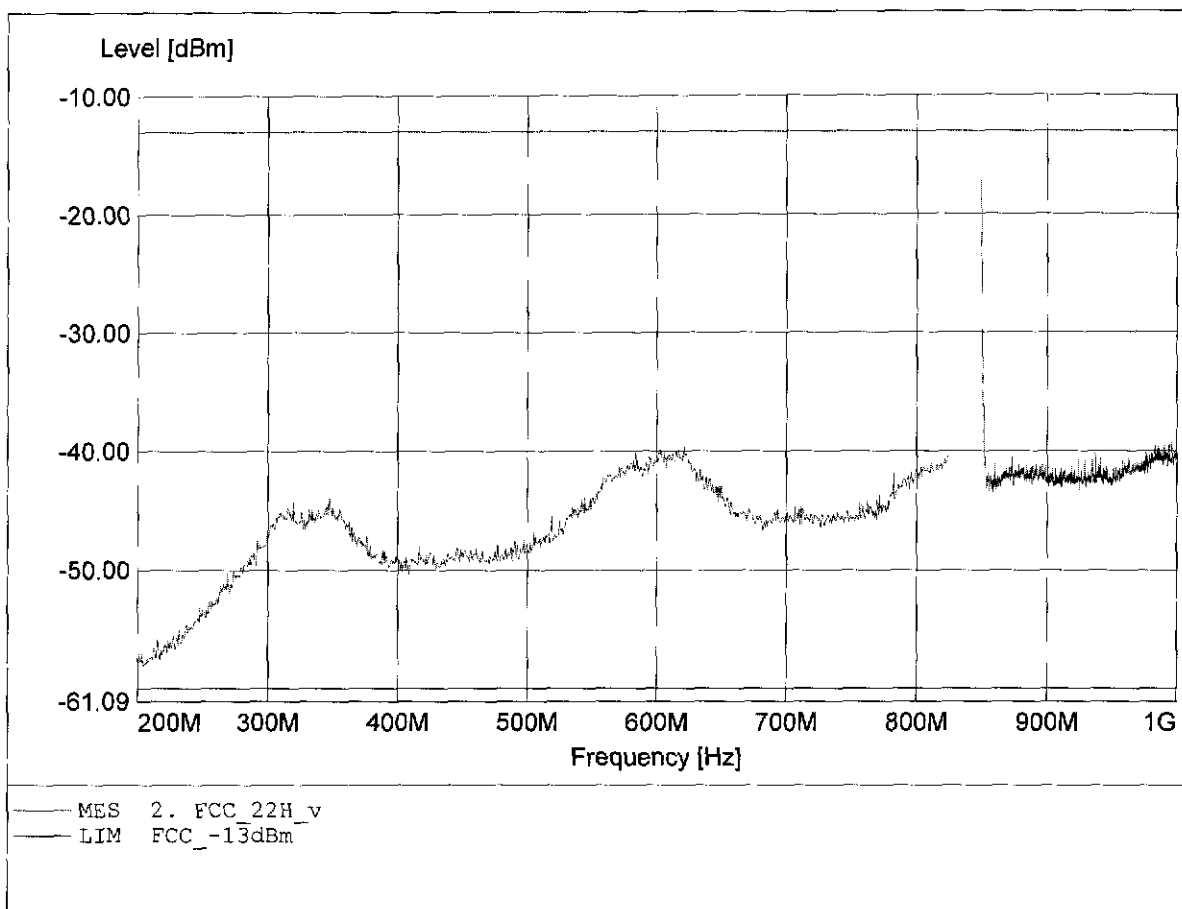

**Radiated Emissions Tx  
FCC RULES PART 22 SUBPART H**


EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 251  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 849.000MHz, Pmax: -18.43dBm, RBW: 1MHz

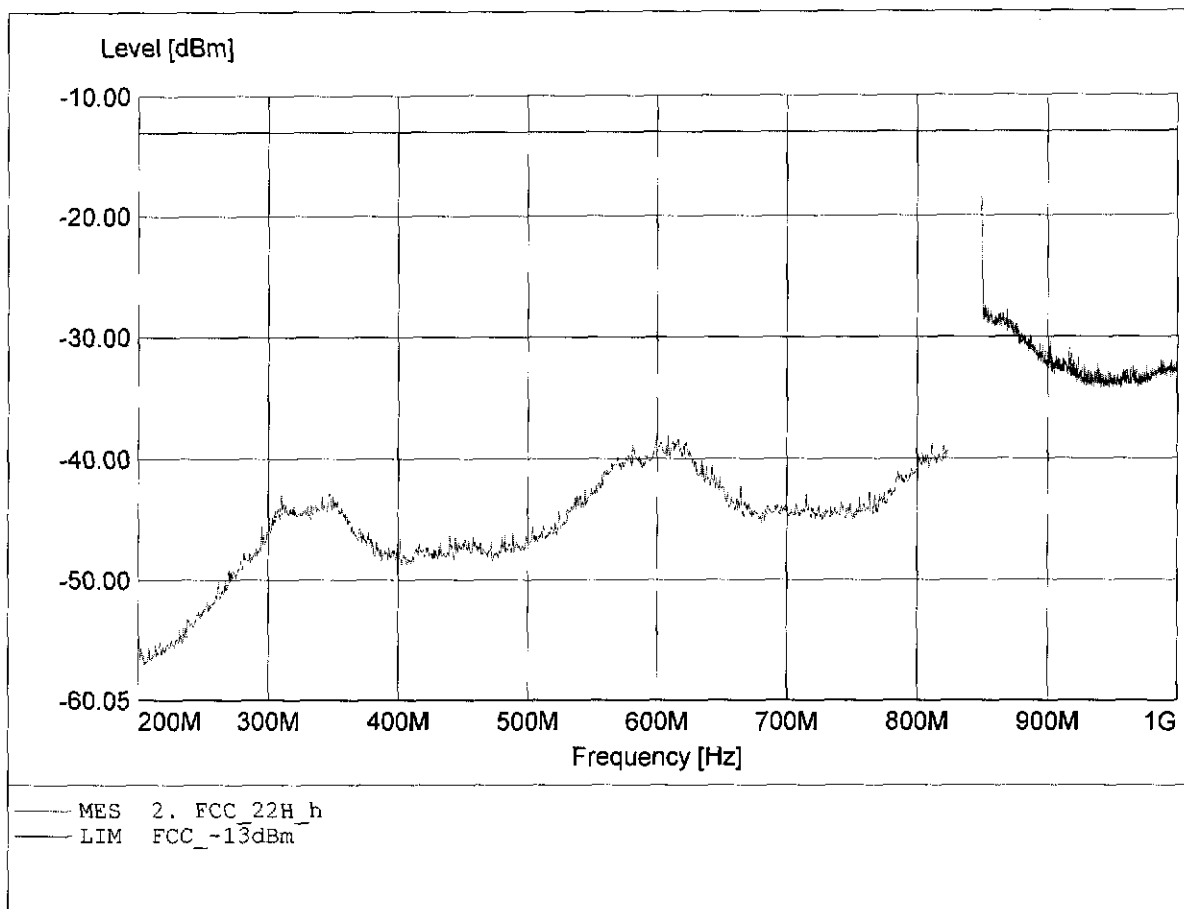




**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 251  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 1.703GHz, Pmax: -16.11dBm, RBW: 1MHz

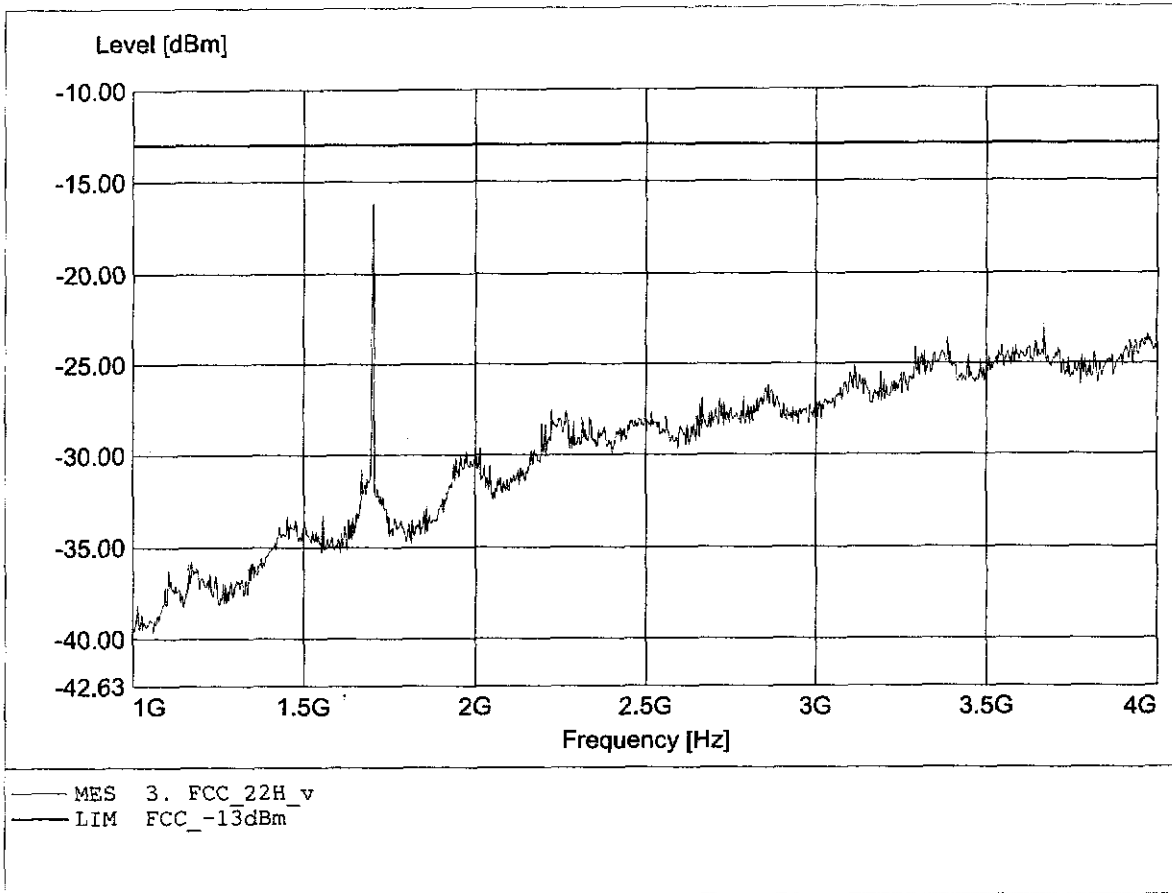


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 251  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.973GHz, Pmax: -22.91dBm, RBW: 1MHz

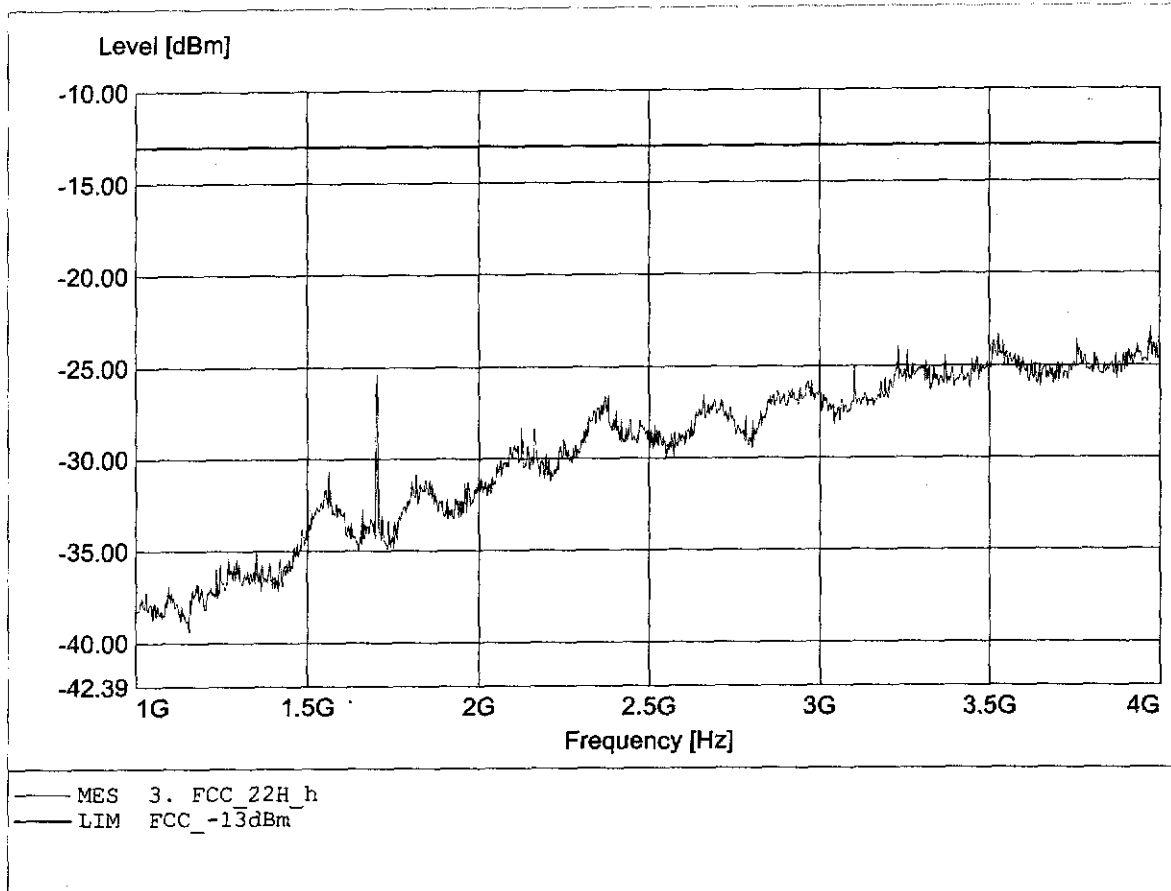


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 251  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.564GHz, Pmax: -46.67dBm, RBW: 1MHz

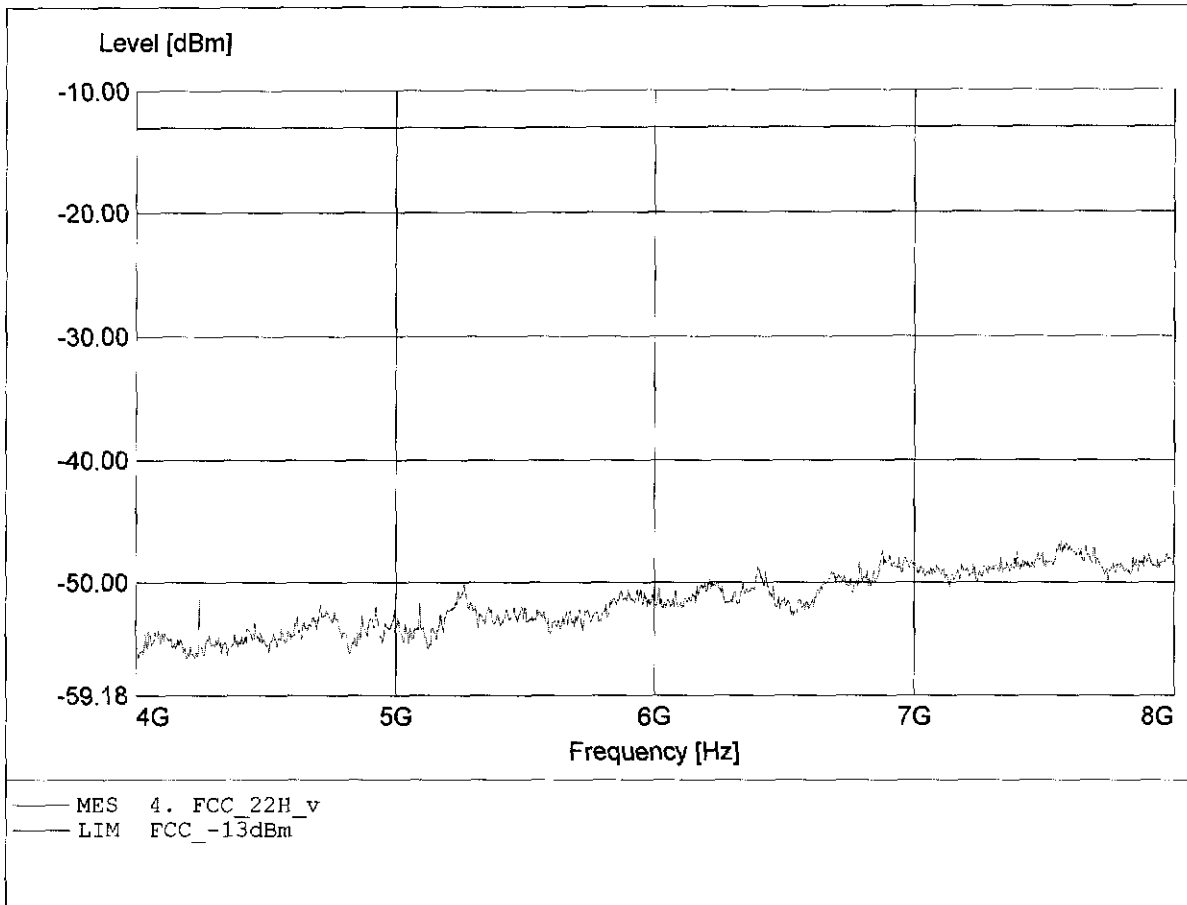


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 251  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.564GHz, Pmax: -46.18dBm, RBW: 1MHz

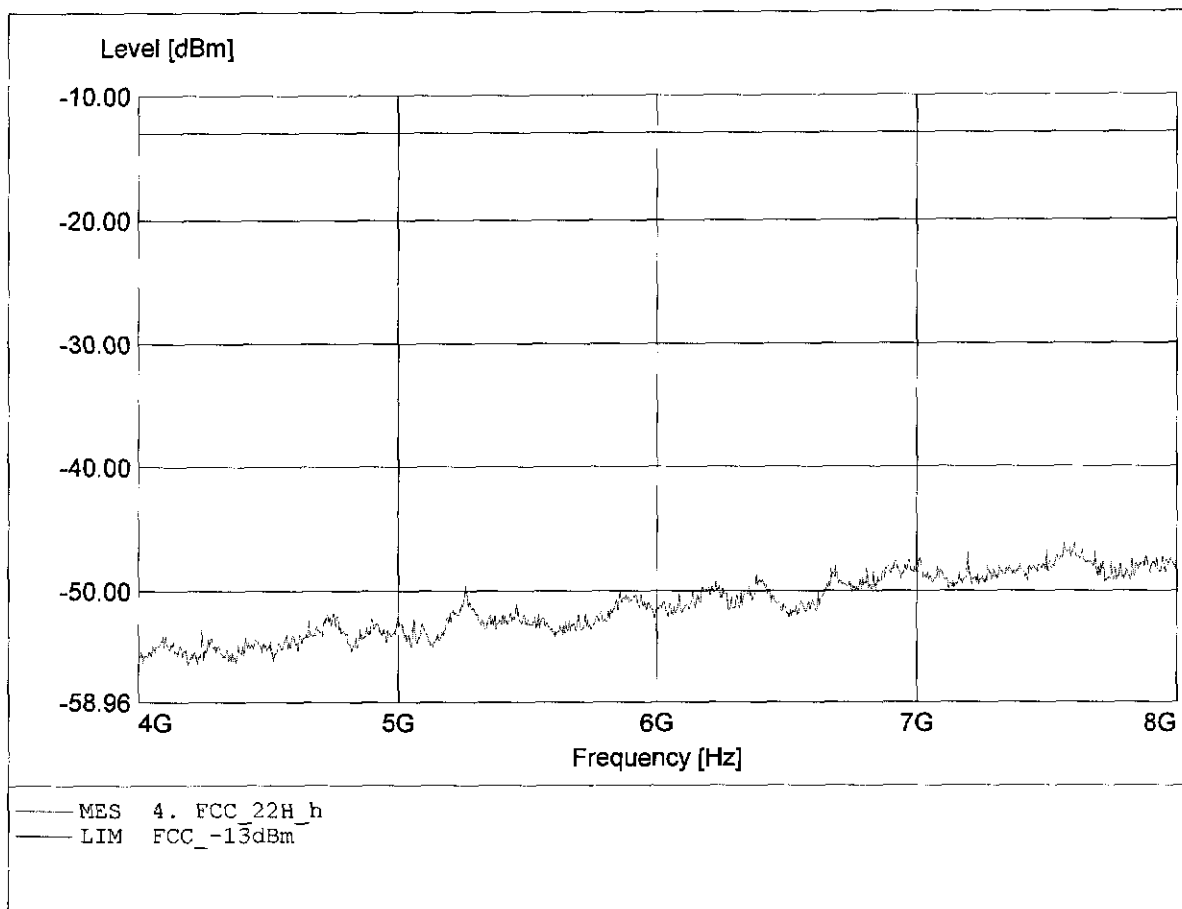

**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

EUT/Model : GSM/GPRS Module Q2426  
Approval Holder: Wavecom  
Channel: 251  
Test Site / Operator: ETS /MR. F. SCHULZ  
Temperature/ Voltage: 23°C / Unom. : 3.7 VDC  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 10.738GHz, Pmax: -41.23dBm, RBW: 1MHz

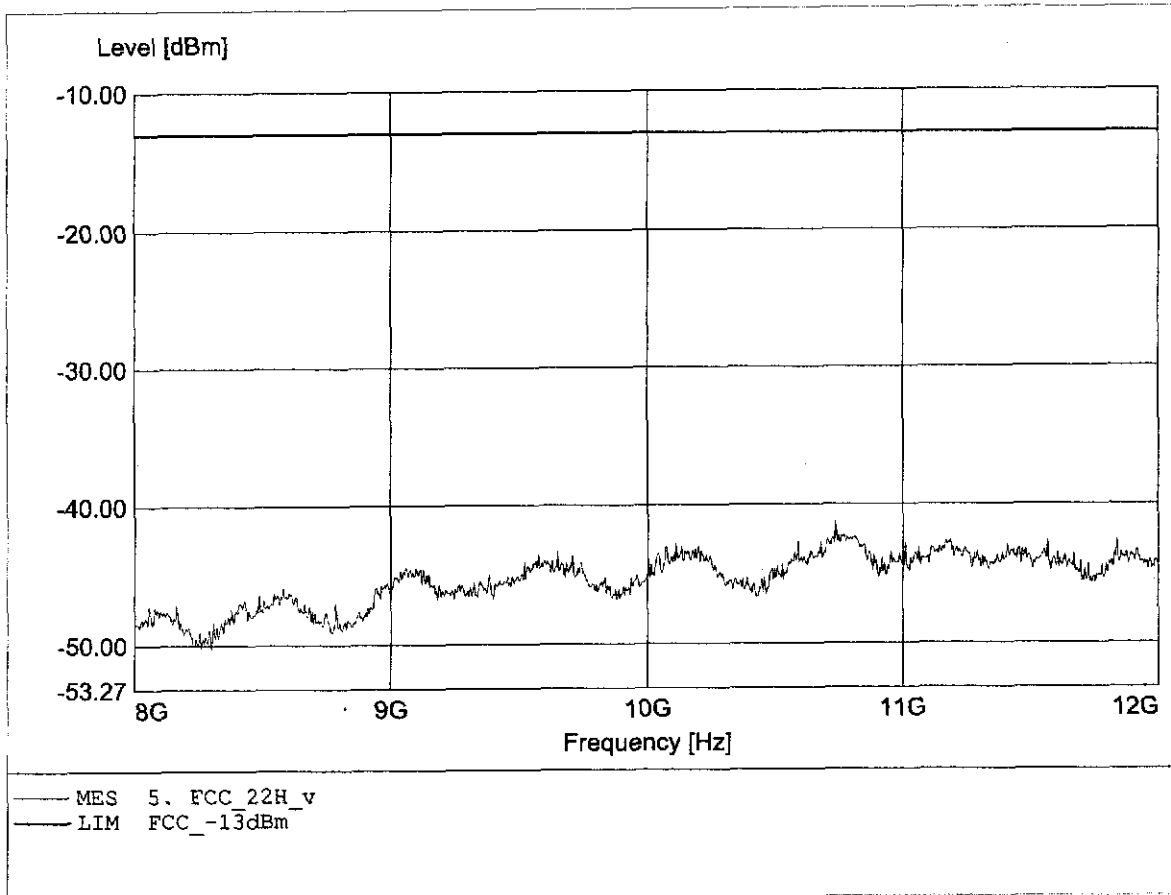




## Appendix K

Line Conducted Emissions

**EMI voltage test in the ac-mains according to FCC part 15**

EUT: GSM/GPRS MODULE  
 Manufacturer: Wavecom  
 Operating Condition: Unom: 3.7 VDC, Tnom: 23°C  
 Test Site: ETS  
 Operator: Mr. Pflug  
 Test Specification: V-Network: ESH2-Z5  
 Comment: model: Q2426 VER. 4.0

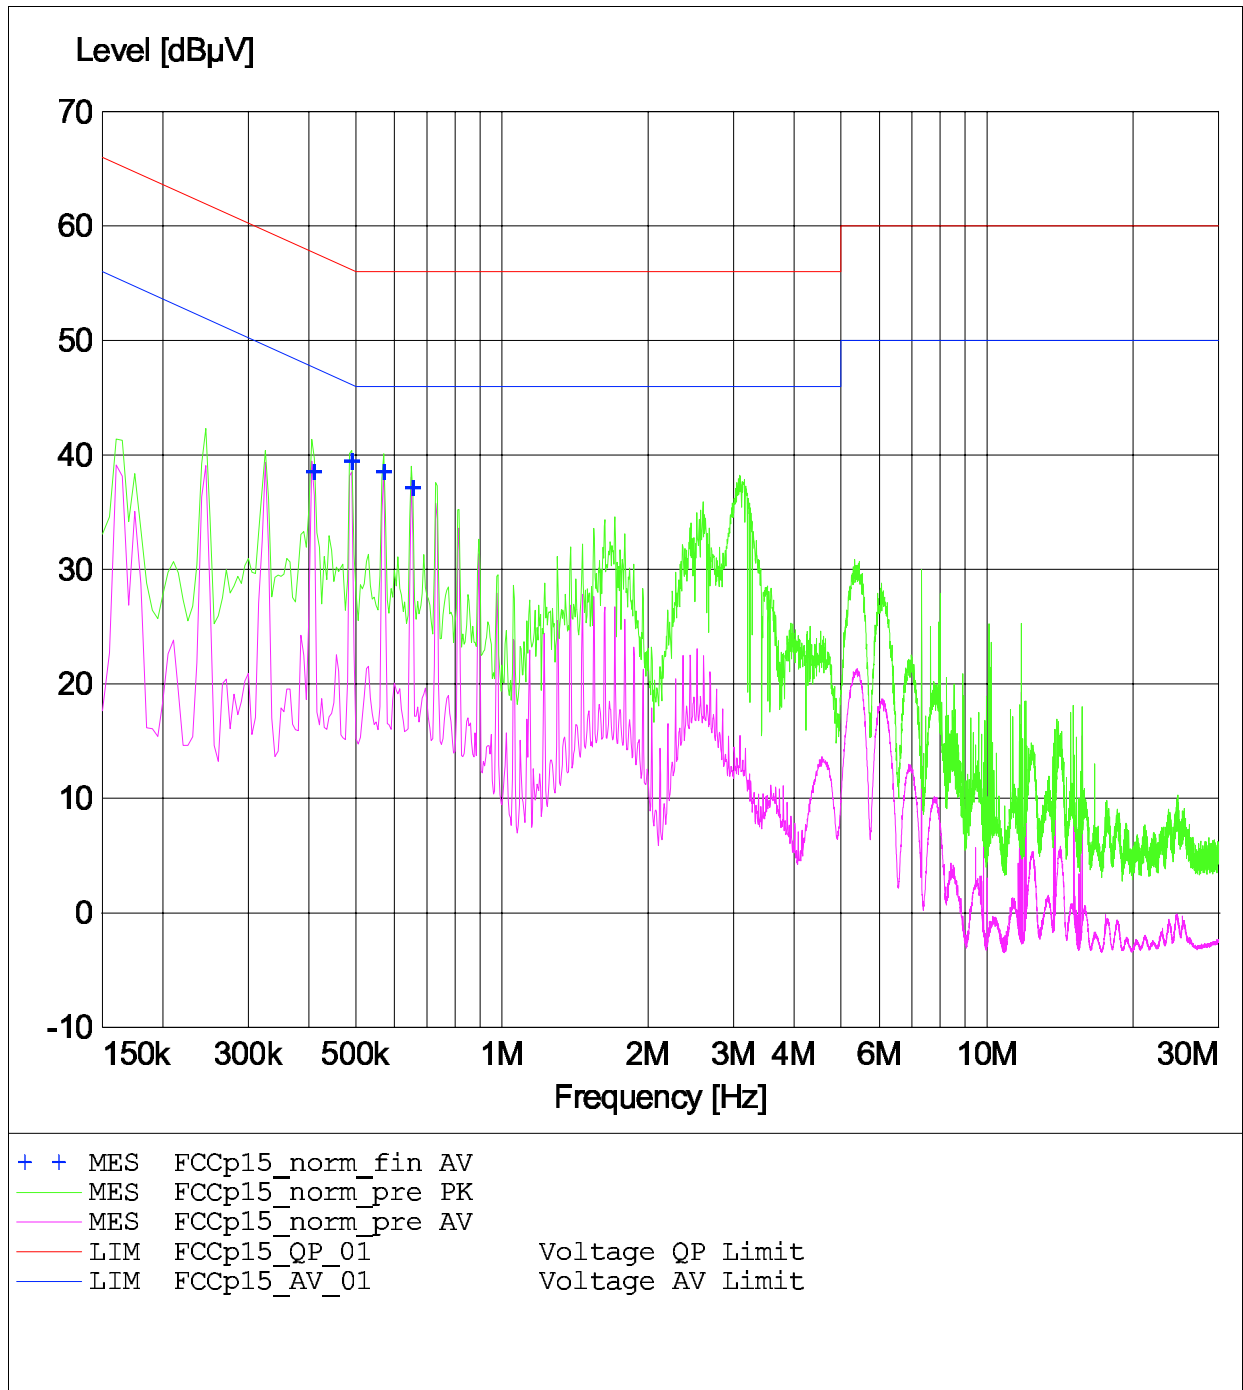



## Appendix L

### Frequency Stability vs. Temperature

No diagrams  
Refer to point 14.2





## Appendix M

### Frequency Stability vs. Voltage

No diagrams  
Refer to point 15.2