



Excellence in Compliance Testing

## FCC Part 15.249 Transmitter Certification

### Test Report

FCC ID: SJS-380117HP

FCC Rule Part: 15.249

ACS Report Number: 07-0088-15C

Manufacturer: MARS Company  
Model: 380117HP

Test Begin Date: February 28, 2007  
Test End Date: February 28, 2007

Report Issue Date: March 28, 2007



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report is not be used to claim certification, approval, or endorsement by NVLAP, NIST or any government agency.

Prepared by: \_\_\_\_\_  
Ken Rivers  
Wireless Certifications Technician  
ACS, Inc.

Reviewed by: \_\_\_\_\_  
J. Kirby Munroe  
Manager Wireless Certifications  
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 15 pages

# Table of Contents

---

<b>1.0 General</b>	3
1.1 Purpose	3
1.2 Product Description	3
1.2.1 General	3
1.2.2 Intended Use	3
1.3 Test Methodology and Considerations	3
<b>2.0 Test Facilities</b>	4
2.1 Location	4
2.2 Laboratory Accreditations/Recognitions/Certifications	4
2.3 Radiated Emissions Test Site Description	5
2.3.1 Semi-Anechoic Chamber Test Site	5
2.3.2 Open Area Tests Site (OATS)	6
2.4 Conducted Emissions Test Site Description	7
<b>3.0 Applicable Standards and References</b>	7
<b>4.0 List of Test Equipment</b>	8
<b>5.0 Support Equipment</b>	9
<b>6.0 EUT Setup Block Diagram</b>	9
<b>7.0 Summary of Tests</b>	10
7.1 Section 15.203 - Antenna Requirement	10
7.2 Section 15.207 – Power Line Conducted Emissions	10
7.3 Section 15.109 - Radiated Emissions (Unintentional Radiation)	10
7.3.1 Test Methodology	10
7.3.2 Test Results	10
7.4 Section 15.249(a) Fundamental Field Strength	11
7.4.1 Test Methodology	11
7.4.2 Test Results	11
7.5 Section 15.249(a)(d)(e) Radiated Spurious Emissions	11
7.5.1 Test Methodology	11
7.5.2 Duty Cycle Correction	11
7.5.3 Test Results	12
7.5.4 Sample Calculations	13
7.6 Section 15.215 - 20dB Bandwidth	13
7.6.1 Test Methodology	13
7.6.2 Test Results	13
7.7 Section 15.249(d)(e) – Band-edge Compliance and Spurious Emissions	15
7.7.1 Test Methodology	15
7.7.2 Test Results	15
<b>8.0 CONCLUSION</b>	15

**Additional Exhibits Included In Filing**

**Internal Photographs**

**Installation/Users Guide**

**External Photographs**

**Theory of Operation**

**Test Setup Photographs**

**BOM (Parts List)**

**Product Labeling**

**System Block Diagram**

**Schematics**

## 1.0 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15, Subpart C of the FCC's Code of Federal Regulations.

### 1.2 Product Description

#### 1.2.1 General

The Mars Company 380117HP is a transmitter to be used in the utility industry to transmit meter-reading data from a utility meter to a mobile data-collecting device.

The device operates in a 'regular transmit' mode. The utility meter is interrogated every 30 minutes to 1 hour, and the reading taken is transmitted every 4 seconds (maximum, in some instances the unit will transmit less often).

Applicant Information:  
MARS Company  
3925 SW 13<sup>th</sup> Stl  
Ocala, FL 34477-2887

Detailed photographs of the EUT are filed separately with this filing.

#### 1.2.2 Intended Use

The unit is intended to be used to transmit meter-reading data from a utility meter to a mobile data-collecting device.

### 1.3 Test Methodology and Considerations

The 380117HP utility meter transmitter is intended for meter pit installation at or below ground level. Therefore testing was performed as typically installed in a meter pit as described in section 6.0.

The device was modified for continuous transmission for testing purposes.

## 2.0 TEST FACILITIES

### 2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions  
5015 B.U. Bowman Drive  
Buford, GA 30518  
Phone: (770) 831-8048  
Fax: (770) 831-8598

### 2.2 Laboratory Accreditations/Recognitions/Certifications

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment. In addition, ACS is compliant to ISO 17025 as certified by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program. The following certification numbers have been issued in recognition of these accreditations and certifications:

FCC Registration Number: 89450

Industry Canada Lab Code: IC 4175

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

NVLAP Lab Code: 200612-0

## 2.3 Radiated Emissions Test Site Description

### 2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

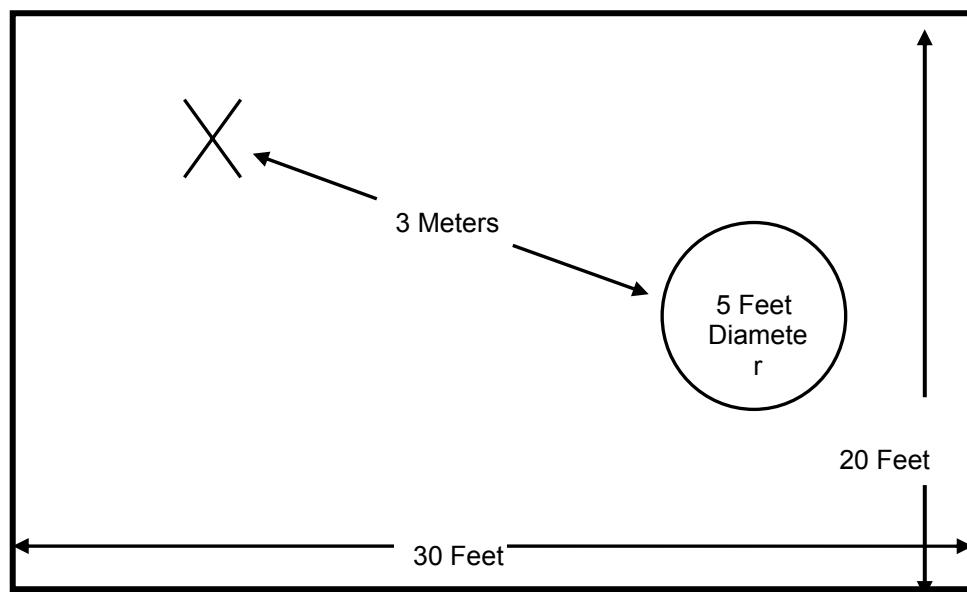


Figure 2.3-1: Semi-Anechoic Chamber Test Site

### 2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

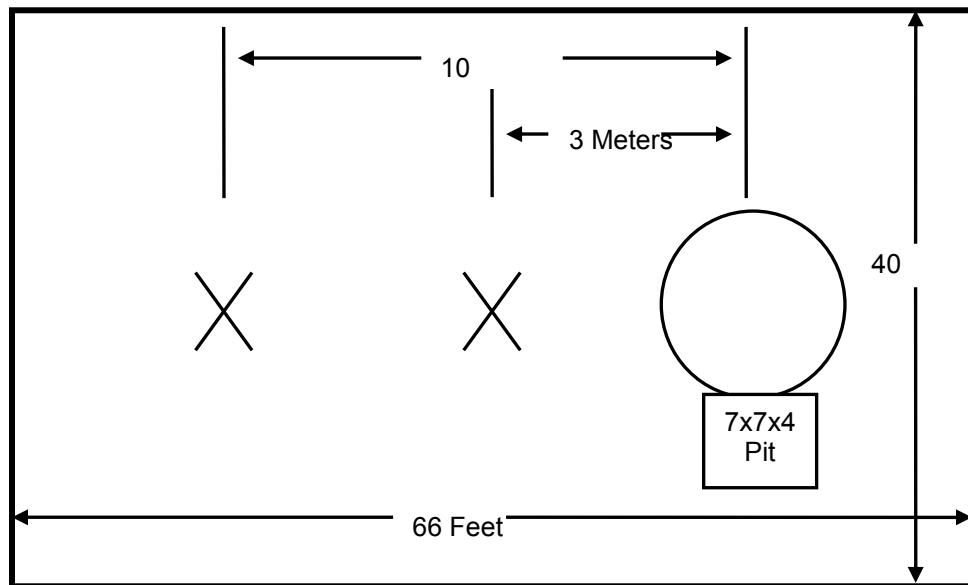


Figure 2.3-2: Open Area Test Site

## 2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal group reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

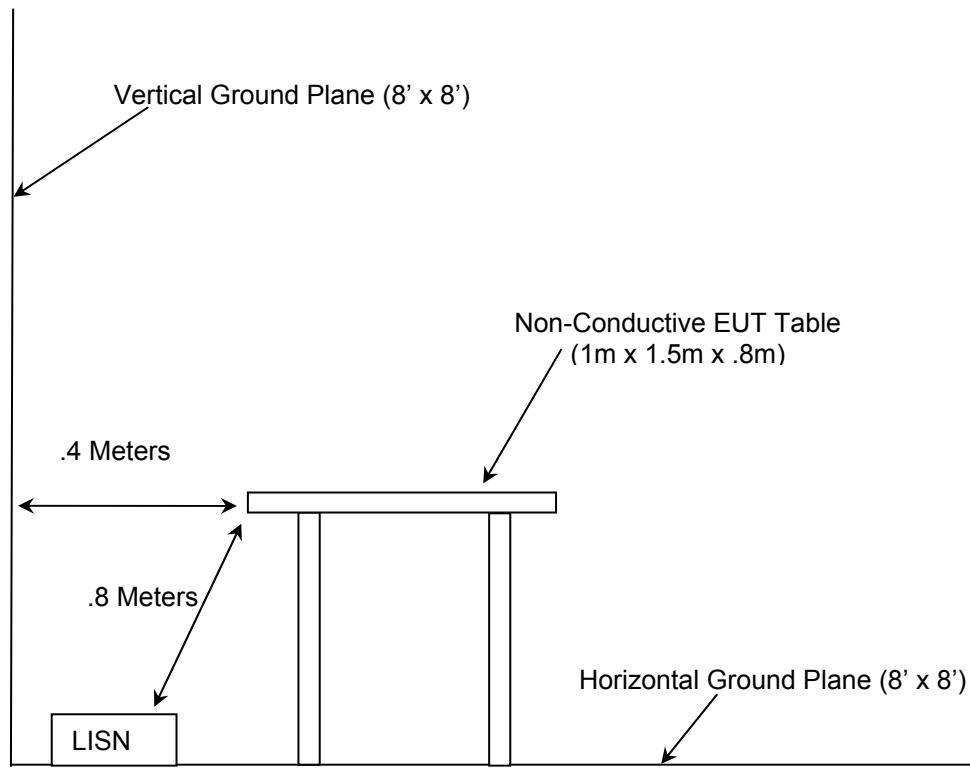


Figure 2.4-1: AC Mains Conducted EMI Site

## 3.0 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2006
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2006

**4.0 LIST OF TEST EQUIPMENT**

All test equipment used for regulatory testing is calibrated yearly or according to manufacturer's specifications.

**Table 4-1: Test Equipment**

Asset ID	Manufacturer	Model Number	Serial Number	Cal Due
22	Agilent	8449B	3008A00526	07-Apr-07
30	Technologies	DRH-0118	970102	09-May-07
213	Corp.	PA-102	44927	27-Feb-08
90	Electro-Metrics	LPA25	1476	17-May-07
225	Andrew	Heliax	225	09-Jan-08
345	Suhner Sucoflex	102A	1077/2A	19-Dec-07
344	Florida RF Cables	SMS-290AW-480.0-SMR	N/A	01-Sep-07
343	Florida RF Cables	SMRE-200W-12.0-SMRE	N/A	01-Sep-07
211	Eagle	C7RFM3NFM	HLC-700	08-Jan-08
331	Microwave Circuits	H1G513G1	31417	29-Aug-07
NA	Agilent	E7405A	MY42000128	26-Oct-07
1	Rohde & Schwarz	ESMI - Display	833771/007	01-Mar-07
2	Rohde & Schwarz	ESMI-Receiver	839587/003	01-Mar-07
167	ACS	Chamber EMI Cable Set	167	15-Feb-08
283	Rohde & Schwarz	FSP40	1000033	24-Mar-07
73	HP	8447D	272A05624	18-May-07

## 5.0 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number	FCC ID
<b>The EUT was tested as a stand alone device and no support equipment was utilized.</b>					

## 6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

The EUT was tested in a stand alone configuration which utilized an internal battery for operation. Consistent with the typical installation, all measurements were made in a cast iron meter box buried in a 4'x4'x44", measured from the outer dimensions, wooden fixture surrounded by soil. The meter box consists of a solid cast iron frame and lid. The meter box lid was installed flush with the top of the soil grade. The specific meter box used for this test is Model W3F-000, manufactured by Ford Meter Box Company. The top of the meter box was measured to be approximately 80 cm from the ground plane of the test site.

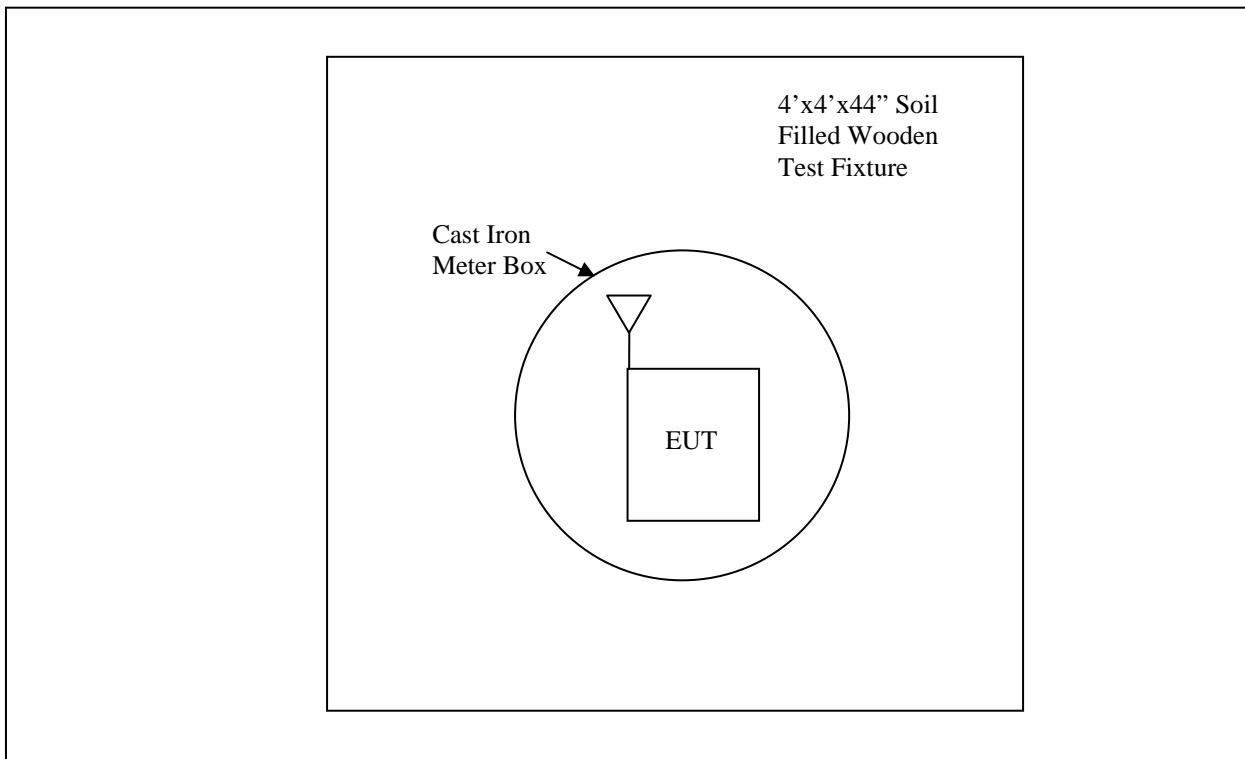


Figure 6-1: EUT Test Setup

\*See Test Setup photographs for additional detail.

## 7.0 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### 7.1 Antenna Requirement - FCC Section 15.203

The EUT employs a permanently attached internal integral antenna which can not be modified. The product uses a quarter wave 0dBi gain antenna.

### 7.2 Power Line Conducted Emissions - FCC Section 15.207

The EUT is powered by an internal battery and is therefore not designed to be connected to the public utility (AC) power line. No Power line conducted emissions testing was performed.

### 7.3 Radiated Emissions - FCC Section 15.109(Unintentional Radiation)

#### 7.3.1 Test Methodology

Radiated emissions tests were performed over the frequency range of 30MHz to 1000 MHz. Measurements of the radiated field strength were made at a distance of 3m from the boundary of the equipment under test (EUT) and the receiving antenna. The antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. A Quasi-peak detector was enabled and measurements were taken with the Spectrum Analyzer's resolution bandwidth set to 120 KHz.

#### 7.3.2 Test Results

Results of the test are given in Table 7.3-1 below:

Table 7.3-1 – Radiated Emissions (Unintentional)

Frequency MHz	Level dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarization (H/V)
30	20.92	40.0	26.08	100	0	H
267.11	34.33	46.0	23.14	100	0	V
354.41	29.58	46.0	24.90	100	0	V
591.52	29.25	46.0	20.69	324	184	V
869.58	33.03	46.0	12.97	256	0	V
887.91	31.41	46.0	14.31	100	182	V
907.31	32.37	46.0	12.49	174	175	V
946.11	31.03	46.0	12.09	371	77	V
964.43	30.14	54.0	20.66	100	0	V
983.83	33.87	54.0	17.03	100	58	V

\* Note: All emissions above 983.83 MHz were attenuated below the permissible limit.

## 7.4 Fundamental Field Strength – FCC Section 15.249(a)

### 7.4.1 Test Methodology

Radiated emissions tests were made on the 3 channels in the 902MHz to 928MHz frequency range, the low channel being 905 MHz, the middle channel being 915 MHz, and the high channel being 925 MHz.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. Quasi-peak measurements were made using a resolution bandwidth (RBW) of 120 kHz and a video bandwidth (VBW) of 300 kHz.

### 7.4.2 Test Results

Results are shown below in table 7.4.2-1 below:

Table 7.4.2-1: Fundamental Field Strength

Frequency [MHz]	Uncorrected Level [dBuV/m]	Correction Factors [dB]	Corrected Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]
905	62.39	2.60	64.99	94	29.01
915	55.37	3.15	58.52	94	35.48
925	61.59	3.75	65.34	94	28.66

## 7.5 Radiated Spurious Emissions – FCC Section 15.249(a)(d)(e)

### 7.5.1 Test Methodology

Radiated emissions tests were made over the frequency range of 30MHz to 10 GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth (RBW) of 120 kHz and a video bandwidth (VBW) of 300 kHz. For frequencies above 1000MHz, average measurements were made using an RBW of 1 MHz and a VBW of 10 Hz and peak measurements were made with RBW of 1 MHz and a VBW of 1 MHz.

### 7.5.2 Duty Cycle Correction

Under normal operation the unit will transmit its data every 4 seconds. The Radio transmitter is only turned on during this transmission, and is in power down state at all other times. The maximum duration of the RF transmission is 4ms (Nominally 3.5ms, but have added 0.5ms to allow for any tolerances, power up / power down delays).

For average radiated measurements, the measured level was reduced by a factor 27.95dB to account for the duty cycle of the EUT. The EUT transmits for 4mS on a channel followed by a 4 second rest period before the next transmission. Therefore the duty cycle is 4%. The duty cycle correction factor is determined using the formula:  $20\log (.04)=-27.95$  dB.

### 7.5.3 Test Results

Results are shown below in Table 7.5.3-1.

**Table 7.5.3-1 - Radiated Spurious Emissions**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Antenna Height (cm)	Turntable Position (o)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg					pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>Spurious Emissions - Low Channel</b>												
1810	61.71	59.66	H	250	134	-9.11	52.60	22.59	74.0	54.0	21.40	31.41
1810	64.01	62.77	V	250	212	-9.00	55.01	25.81	74.0	54.0	18.99	28.19
2715	48.57	36.65	H	275	29	-5.38	43.19	3.31	74.0	54.0	30.81	50.69
2715	50.79	43.18	V	150	308	-5.61	45.18	9.61	74.0	54.0	28.82	44.39
4525	55.03	50.75	H	220	223	-0.96	54.07	21.83	74.0	54.0	19.93	32.17
4525	64.90	63.25	V	200	263	-0.86	64.04	34.43	74.0	54.0	9.96	19.57
5430	53.13	47.29	H	215	208	1.27	54.40	20.60	74.0	54.0	19.60	33.40
5430	61.94	59.86	V	200	259	1.47	63.41	33.37	74.0	54.0	10.59	20.63
6335	49.31	36.68	H	215	61	2.88	52.19	11.60	74.0	54.0	21.81	42.40
6335	50.35	38.43	V	200	103	2.84	53.19	13.32	74.0	54.0	20.81	40.68
7240	51.05	40.05	V	180	113	5.25	56.30	17.34	74.0	54.0	17.70	36.66
<b>Spurious Emissions - Mid Channel</b>												
1830	59.74	57.09	H	240	142	-9.58	50.16	19.55	74.0	54.0	23.84	34.45
1830	63.00	61.55	V	250	279	-9.48	53.52	24.11	74.0	54.0	20.48	29.89
2745	51.81	46.30	H	170	305	-5.71	46.10	12.63	74.0	54.0	27.90	41.37
2745	54.29	50.26	V	260	127	-5.92	48.37	16.38	74.0	54.0	25.63	37.62
3660	51.45	41.30	V	250	183	-2.85	48.60	10.49	74.0	54.0	25.40	43.51
4575	57.99	54.59	H	175	330	-1.20	56.79	25.43	74.0	54.0	17.21	28.57
4575	67.60	66.41	V	195	253	-1.09	66.51	37.36	74.0	54.0	7.49	16.64
5490	48.96	38.08	H	185	153	1.51	50.47	11.63	74.0	54.0	23.53	42.37
5490	53.54	48.73	V	210	67	1.71	55.25	22.48	74.0	54.0	18.75	31.52
6405	49.67	38.18	V	180	186	2.90	52.57	13.12	74.0	54.0	21.43	40.88
7320	53.49	45.82	V	160	116	4.86	58.35	22.72	74.0	54.0	15.65	31.28
8235	48.69	36.30	V	160	123	5.33	54.02	13.67	74.0	54.0	19.98	40.33
<b>Spurious Emissions - High Channel</b>												
1850	51.35	44.90	H	125	110	-9.47	41.88	7.47	74.0	54.0	32.12	46.53
1850	57.26	54.65	V	240	30	-9.38	47.88	17.31	74.0	54.0	26.12	36.69
2775	50.28	43.45	H	205	317	-5.64	44.64	9.85	74.0	54.0	29.36	44.15
2775	54.36	50.33	V	210	136	-5.82	48.54	16.55	74.0	54.0	25.46	37.45
3700	57.77	54.75	V	240	28	-2.65	55.12	24.14	74.0	54.0	18.88	29.86
4625	55.88	51.90	H	190	250	-1.04	54.84	22.90	74.0	54.0	19.16	31.10
4625	64.99	63.65	V	190	70	-0.91	64.08	34.78	74.0	54.0	9.93	19.22
5550	48.70	36.02	H	180	135	1.56	50.26	9.63	74.0	54.0	23.74	44.37
5550	53.39	47.76	V	195	249	1.75	55.14	21.56	74.0	54.0	18.86	32.44
6475	50.80	42.28	V	200	222	3.07	53.87	17.39	74.0	54.0	20.13	36.61
7400	50.97	39.63	V	160	249	4.86	55.83	16.53	74.0	54.0	18.17	37.47
8325	49.93	36.78	V	150	261	5.43	55.36	14.26	74.0	54.0	18.64	39.74
9250	48.90	36.56	V	160	267	5.65	54.55	14.25	74.0	54.0	19.45	39.75

The magnitude of all emissions not reported were below the noise floor of the measurement system.

#### 7.5.4 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

$CF_T$	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
$R_U$	=	Uncorrected Reading
$R_C$	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

#### Example Calculation

PEAK:

Corrected Level:  $61.71 - 9.11 = 52.60\text{dBuV}$

Margin:  $74\text{dBuV} - 52.60\text{dBuV} = 21.40\text{dB}$

AVERAGE:

Corrected Level:  $59.66 - 9.11 - 27.95 = 22.60\text{dBuV}$

Margin:  $54\text{dBuV} - 22.60\text{dBuV} = 31.40\text{dB}$

### 7.6 20dB Bandwidth FCC Section 15.215

#### 7.6.1 Test Methodology

The spectrum analyzer span was set to 2 to 3 times the estimated 20 dB bandwidth of the emission. The RBW was to  $\geq 1\%$  of the estimated 20 dB bandwidth. The trace was set to max hold with a peak detector active. The Delta function of the analyzer was utilized to determine the 20 dB bandwidth of the emission. The span and RBW were examined and re-adjusted if necessary to meet the requirements of 2 to 3 times the 20 bandwidth for the span and  $\geq 1\%$  of the 20 dB bandwidth for the RBW.

#### 7.6.2 Test Results

The maximum 20dB bandwidth was found to be approximately 146.25kHz. Results are shown below in Table 7.6.2-1 and Figures 7.6.2-1 through 7.6.2-3.

Table 7.6.2-1

Frequency (MHz)	20dB Bandwidth (kHz)
905	136.25
915	143.75
925	146.25

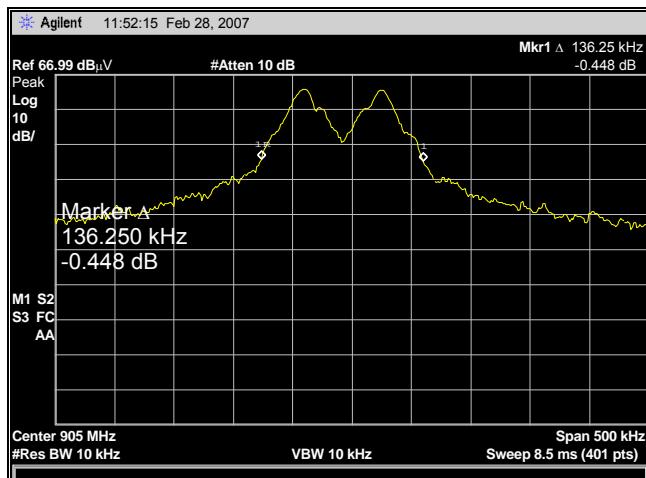


Figure 7.6.2-1: 20dB Bandwidth Low Channel

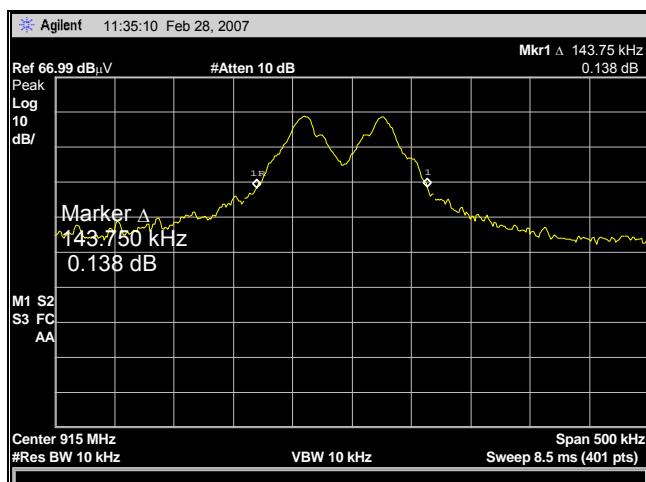


Figure 7.6.2-2: 20dB Bandwidth Mid Channel

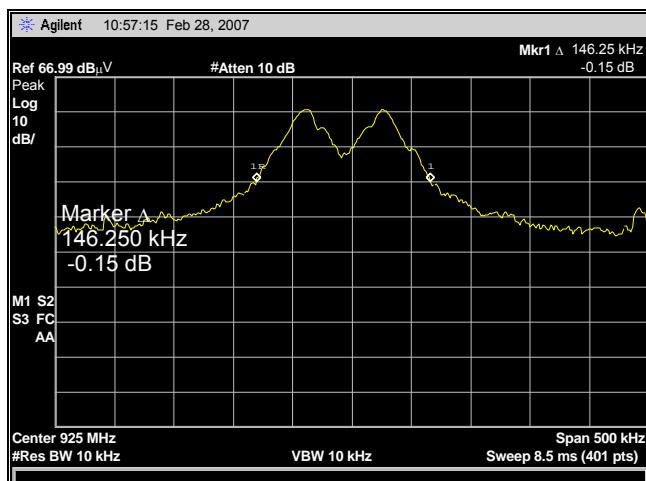


Figure 7.6.2-3: 20dB Bandwidth High Channel

## 7.7 Band-Edge Compliance and Spurious Emissions - FCC Section 15.249(d)(e)

### 7.7.1 Test Methodology

The EUT was investigated at the low and high channels of operation to determine band-edge compliance. Band-edge compliance for the lower and upper band-edge was determined using the radiated mark-delta method as outlined in FCC DA 00-705. The radiated field strength of the fundamental emission was first determined and then the mark-delta method was used to determine the field strength of the band-edge emissions as compared to the emission limits of 15.209.

### 7.7.2 Test Results

Band-edge compliance is displayed in Tables 7.7.2-1 to 7.7.2-2 and Figures 7.7.2-1 – 7.7.2-2.

Table 7.7.2-1: Lower Band-edge Marker Delta Method

Frequency (MHz)	Level (dBuV)	Antenna Polarity (H/V)	Correction Factors (dB)	Fundamental Field Strength (dBuV/m)	Delta-Marker (dB)	Band-edge Field Strength (dBuV/m)	Band-edge Margin to Limit (dBuV/m)
Fundamental Frequency							
905	62.39	H	2.60	64.99	34.52	30.47	15.53

Table 7.7.2-2: Upper Band-edge Marker Delta Method

Frequency (MHz)	Level (dBuV)	Antenna Polarity (H/V)	Correction Factors (dB)	Fundamental Field Strength (dBuV/m)	Delta-Marker (dB)	Band-edge Field Strength (dBuV/m)	Band-edge Margin to Limit (dBuV/m)
Fundamental Frequency							
925	61.59	H	3.75	65.34	25.89	39.45	6.55

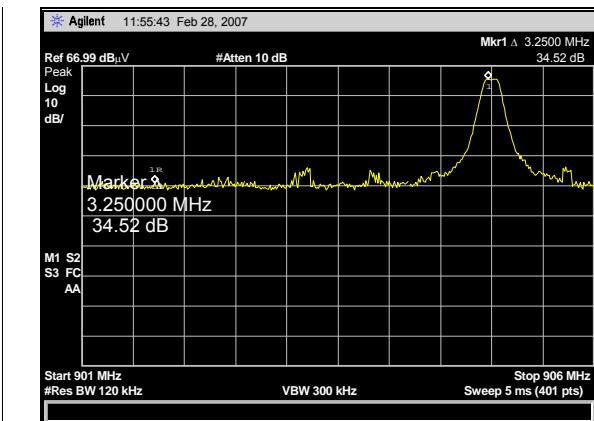


Figure 7.7.2-1: Lower Band-edge

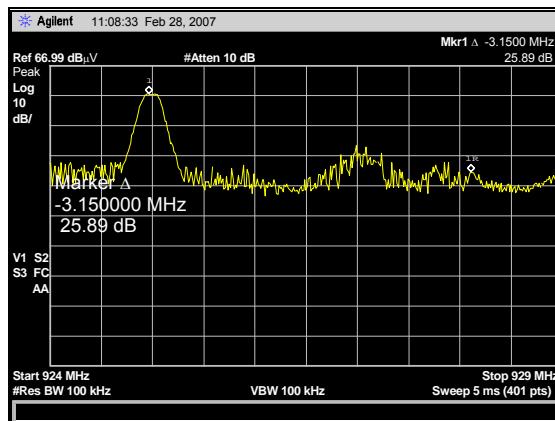


Figure 7.7.2-2: Upper Band-edge

## 8.0 CONCLUSION

In the opinion of ACS, Inc. the 380117HP, manufactured by MARS Company meets the requirements of FCC Part 15 subpart C.

## END REPORT