


## Appendix B. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


|               |          |                |           |
|---------------|----------|----------------|-----------|
| Temperature   | 24°C     | Humidity       | 57%       |
| Test Engineer | Alvin Li | Configurations | 2.4G + 5G |

### Horizontal

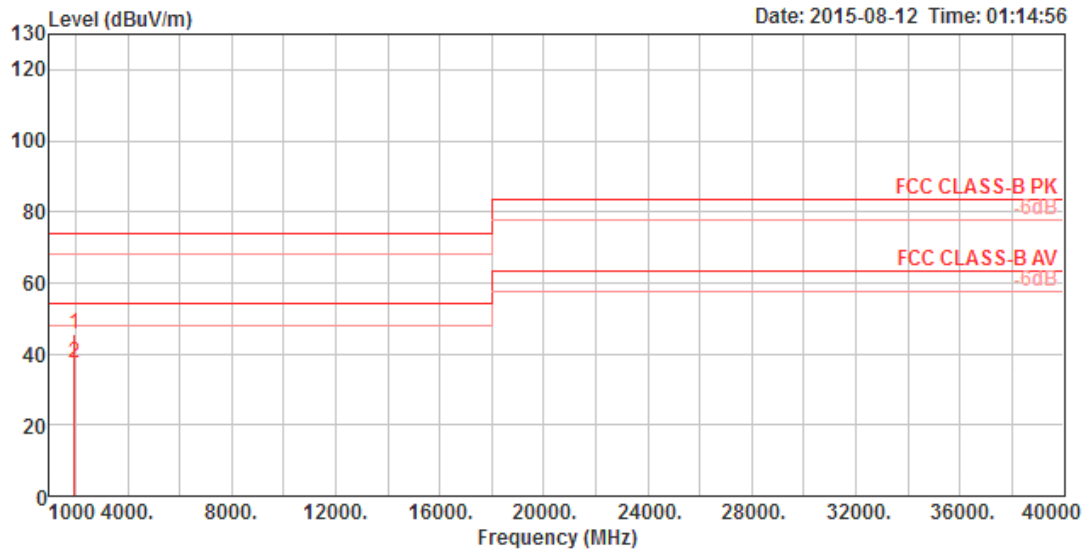

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | A/Pos | T/Pos | Remark     | Pol/Phase  |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|------------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | cm    | deg        |            |
| 1 | 1949.85 | 45.37  | 74.00  | -28.63 | 51.14 | 3.45         | 25.95  | 35.17 | 192   | 62 Peak    | HORIZONTAL |
| 2 | 1949.97 | 37.31  | 54.00  | -16.69 | 43.08 | 3.45         | 25.95  | 35.17 | 192   | 62 Average | HORIZONTAL |

Vertical

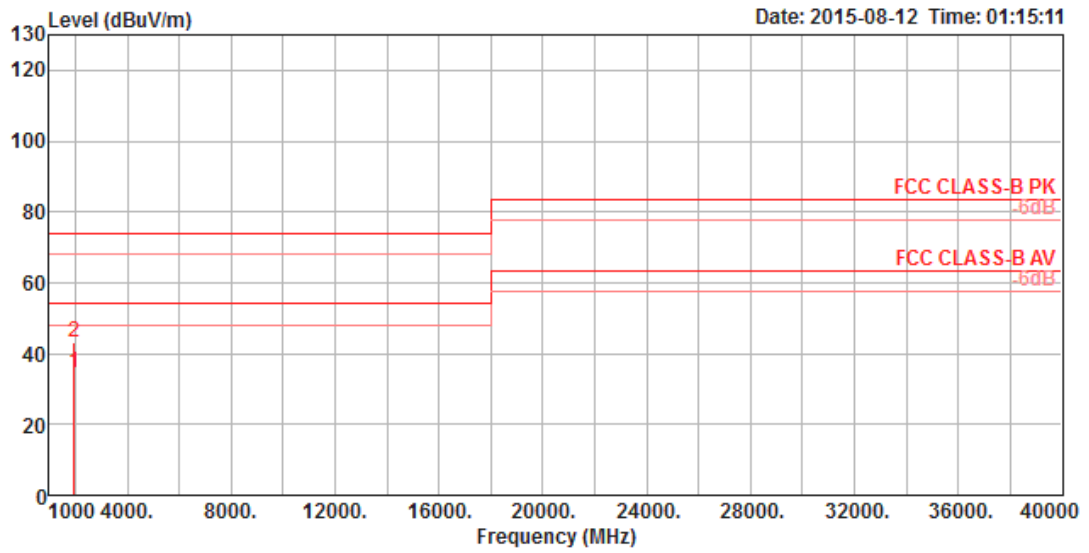

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Preamp Factor | A/Pos | T/Pos | Remark    | Pol/Phase |
|---|---------|--------|------------|------------|------------|-------------------|---------------|-------|-------|-----------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m          | dB    | cm    | deg       |           |
| 1 | 1949.96 | 34.70  | 54.00      | -19.30     | 40.47      | 3.45              | 25.95         | 35.17 | 172   | 2 Average | VERTICAL  |
| 2 | 1950.27 | 43.08  | 74.00      | -30.92     | 48.85      | 3.45              | 25.95         | 35.17 | 172   | 2 Peak    | VERTICAL  |