


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


| | | | |
|---------------|------------|----------------|-----------|
| Temperature | 26°C | Humidity | 68% |
| Test Engineer | Gino Huang | Configurations | 2.4G + 5G |

Horizontal

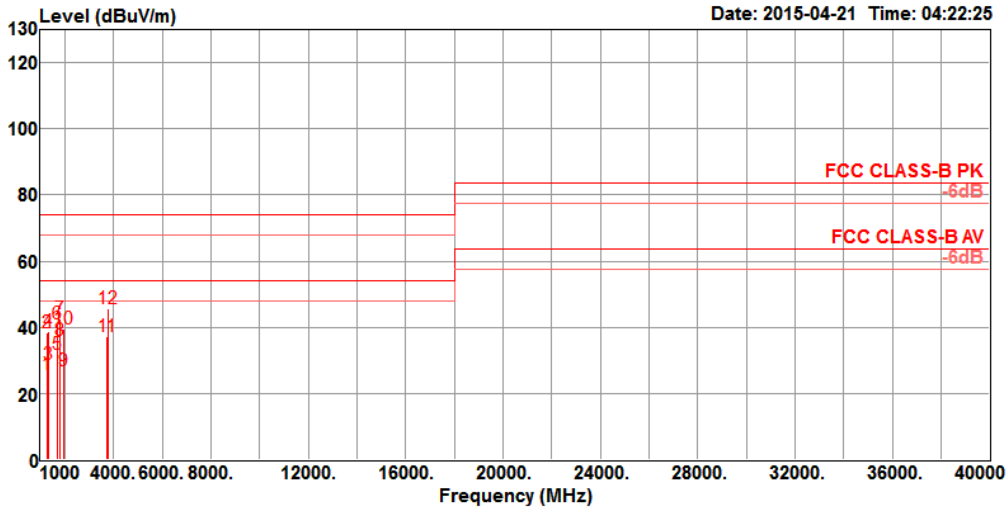

| | Freq | Level | Limit | Over | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Pol/Phase | Remark |
|----|---------|--------|--------|--------|-------------|-------|--------|-------|-------|-----------|--------------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 1249.95 | 25.88 | 54.00 | -28.12 | 34.39 | 24.85 | 3.52 | 36.88 | 101 | 150 | HORIZONTAL Average |
| 2 | 1250.19 | 38.24 | 74.00 | -35.76 | 46.75 | 24.85 | 3.52 | 36.88 | 101 | 150 | HORIZONTAL Peak |
| 3 | 1333.34 | 28.59 | 54.00 | -25.41 | 36.57 | 25.01 | 3.63 | 36.62 | 101 | 177 | HORIZONTAL Average |
| 4 | 1333.57 | 38.68 | 74.00 | -35.32 | 46.66 | 25.01 | 3.63 | 36.62 | 101 | 177 | HORIZONTAL Peak |
| 5 | 1699.96 | 31.93 | 54.00 | -22.07 | 37.87 | 25.60 | 4.10 | 35.64 | 102 | 190 | HORIZONTAL Average |
| 6 | 1700.03 | 40.94 | 74.00 | -33.06 | 46.88 | 25.60 | 4.10 | 35.64 | 102 | 190 | HORIZONTAL Peak |
| 7 | 1799.93 | 42.68 | 74.00 | -31.32 | 48.12 | 25.74 | 4.23 | 35.41 | 103 | 174 | HORIZONTAL Peak |
| 8 | 1799.96 | 36.17 | 54.00 | -17.83 | 41.61 | 25.74 | 4.23 | 35.41 | 103 | 174 | HORIZONTAL Average |
| 9 | 1937.71 | 26.82 | 54.00 | -27.18 | 31.62 | 25.92 | 4.39 | 35.11 | 104 | 173 | HORIZONTAL Average |
| 10 | 1940.18 | 39.51 | 74.00 | -34.49 | 44.29 | 25.93 | 4.39 | 35.10 | 104 | 173 | HORIZONTAL Peak |
| 11 | 3749.94 | 37.08 | 54.00 | -16.92 | 35.85 | 29.11 | 6.25 | 34.13 | 105 | 253 | HORIZONTAL Average |
| 12 | 3750.33 | 45.75 | 74.00 | -28.25 | 44.52 | 29.11 | 6.25 | 34.13 | 105 | 253 | HORIZONTAL Peak |

Vertical

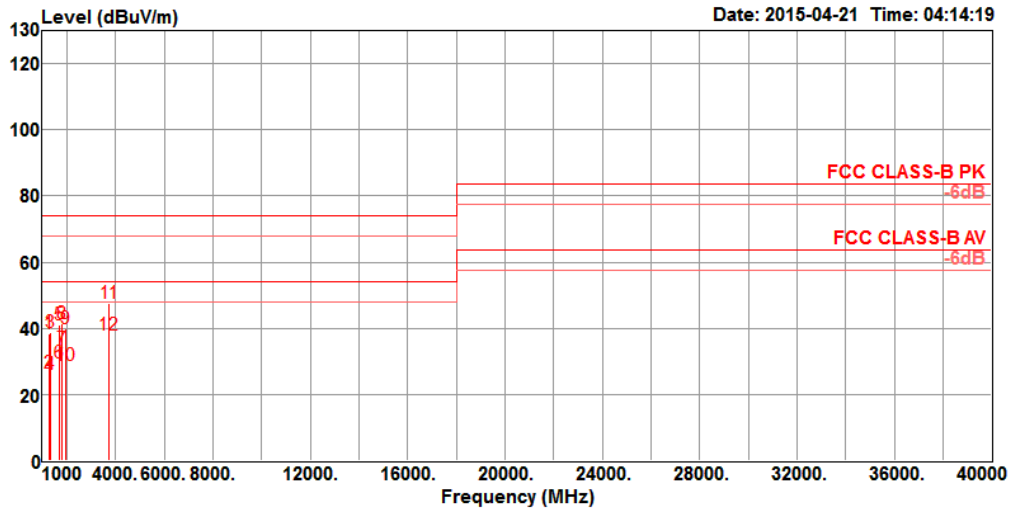

| | Freq | Level | Limit Line | Over Limit | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | A/Pos | T/Pos | Pol/Phase | Remark |
|----|---------|--------|------------|------------|-------------------|----------------|------------|---------------|-------|-------|-----------|---------|
| | MHz | dBUV/m | dBUV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | |
| 1 | 1249.90 | 38.21 | 74.00 | -35.79 | 46.72 | 24.85 | 3.52 | 36.88 | 100 | 190 | VERTICAL | Peak |
| 2 | 1250.05 | 26.43 | 54.00 | -27.57 | 34.94 | 24.85 | 3.52 | 36.88 | 100 | 190 | VERTICAL | Average |
| 3 | 1333.04 | 38.89 | 74.00 | -35.11 | 46.87 | 25.01 | 3.63 | 36.62 | 103 | 181 | VERTICAL | Peak |
| 4 | 1333.35 | 26.15 | 54.00 | -27.85 | 34.13 | 25.01 | 3.63 | 36.62 | 103 | 181 | VERTICAL | Average |
| 5 | 1699.90 | 41.04 | 74.00 | -32.96 | 46.97 | 25.61 | 4.10 | 35.64 | 101 | 207 | VERTICAL | Peak |
| 6 | 1699.90 | 29.70 | 54.00 | -24.30 | 35.63 | 25.61 | 4.10 | 35.64 | 101 | 207 | VERTICAL | Average |
| 7 | 1799.99 | 33.71 | 54.00 | -20.29 | 39.15 | 25.74 | 4.23 | 35.41 | 101 | 208 | VERTICAL | Average |
| 8 | 1800.14 | 41.61 | 74.00 | -32.39 | 47.05 | 25.74 | 4.23 | 35.41 | 101 | 208 | VERTICAL | Peak |
| 9 | 1937.48 | 39.80 | 74.00 | -34.20 | 44.60 | 25.92 | 4.39 | 35.11 | 101 | 182 | VERTICAL | Peak |
| 10 | 1937.49 | 28.66 | 54.00 | -25.34 | 33.46 | 25.92 | 4.39 | 35.11 | 101 | 182 | VERTICAL | Average |
| 11 | 3749.94 | 47.64 | 74.00 | -26.36 | 46.41 | 29.11 | 6.25 | 34.13 | 100 | 203 | VERTICAL | Peak |
| 12 | 3750.02 | 37.92 | 54.00 | -16.08 | 36.69 | 29.11 | 6.25 | 34.13 | 100 | 203 | VERTICAL | Average |