



FCC TEST REPORT (15.407)

REPORT NO.: RF130104C26

MODEL NO.: XR500

FCC ID: SK6-XR520

RECEIVED: Jan. 04, 2013

TESTED: Jan. 10 ~ Jan. 26, 2013

ISSUED: Jan. 30, 2013

APPLICANT: Xirrus, INC

ADDRESS: 2101 Corporate Center Drive Thousand Oaks,
California 91320

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



A D T

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES.....	8
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
3.3 DUTY CYCLE OF TEST SIGNAL.....	11
3.4 DESCRIPTION OF SUPPORT UNITS.....	12
3.4.1 CONFIGURATION OF SYSTEM UNDER TEST	13
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
4. TEST TYPES AND RESULTS	15
4.1 RADIATED EMISSION AND BANDEdge MEASUREMENT	15
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEdge MEASUREMENT.....	15
4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	15
4.1.3 TEST INSTRUMENTS.....	16
4.1.4 TEST PROCEDURES	17
4.1.5 DEVIATION FROM TEST STANDARD	17
4.1.6 TEST SETUP.....	18
4.1.7 EUT OPERATING CONDITION	18
4.1.8 TEST RESULTS	19
4.2 CONDUCTED EMISSION MEASUREMENT	37
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	37
4.2.2 TEST INSTRUMENTS.....	37
4.2.3 TEST PROCEDURES	38
4.2.4 DEVIATION FROM TEST STANDARD	38
4.2.5 TEST SETUP.....	38
4.2.6 EUT OPERATING CONDITIONS	38
4.2.7 TEST RESULTS	39
4.3 PEAK TRANSMIT POWER MEASUREMENT	43
4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	43
4.3.2 TEST SETUP.....	43
4.3.3 TEST INSTRUMENTS.....	43
4.3.4 TEST PROCEDURE.....	44



A D T

4.3.5	DEVIATION FROM TEST STANDARD	44
4.3.6	EUT OPERATING CONDITIONS.....	44
4.3.7	TEST RESULTS (A).....	45
4.3.8	TEST RESULTS (B).....	47
4.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT	49
4.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	49
4.4.2	TEST SETUP.....	49
4.4.3	TEST INSTRUMENTS.....	49
4.4.4	TEST PROCEDURES	49
4.4.5	DEVIATION FROM TEST STANDARD	49
4.4.6	EUT OPERATING CONDITIONS	49
4.4.7	TEST RESULTS (A).....	50
4.4.8	TEST RESULTS (B).....	51
4.5	PEAK POWER EXCURSION MEASUREMENT	52
4.5.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	52
4.5.2	TEST SETUP.....	52
4.5.3	TEST INSTRUMENTS.....	52
4.5.4	TEST PROCEDURE.....	52
4.5.5	DEVIATION FROM TEST STANDARD	52
4.5.6	EUT OPERATING CONDITIONS	52
4.5.7	TEST RESULTS (A).....	53
4.5.8	TEST RESULTS (B).....	56
4.6	FREQUENCY STABILITY	59
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	59
4.6.2	TEST SETUP.....	59
4.6.3	TEST INSTRUMENTS.....	59
4.6.4	TEST PROCEDURE.....	60
4.6.5	DEVIATION FROM TEST STANDARD	60
4.6.6	EUT OPERATING CONDITION	60
4.6.7	TEST RESULTS	61
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	62
6.	INFORMATION ON THE TESTING LABORATORIES.....	63
7.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	64



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130104C26	Original release	Jan. 30, 2013



A D T

1. CERTIFICATION

PRODUCT: Xirrus Wireless Array

MODEL: XR500

BRAND: Xirrus

APPLICANT: Xirrus, INC

TESTED: Jan. 10 ~ Jan. 26, 2013

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10-2009

The above equipment (model: XR500) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Jemma Yang , **DATE :** Jan. 30, 2013

Jemma Yang / Specialist

APPROVED BY : Ken Liu , **DATE :** Jan. 30, 2013

Ken Liu / Manager



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -15.79dB at 26.27734MHz.
15.407(b/1/2/3) (b)(6)	Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 5150.00MHz.
15.407(a/1/2)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is I - PEX not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Xirrus Wireless Array
MODEL NO.	XR500
POWER SUPPLY	55Vdc (from POE)
MODULATION TYPE	64QAM, 16QAM, QPSK, BPSK
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps
OPERATING FREQUENCY	5180.0 ~ 5240.0MHz
NUMBER OF CHANNEL	4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
OUTPUT POWER	43.975mW
ANTENNA TYPE	PCB antenna with 4dBi gain
ANTENNA CONNECTOR	I - PEX
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	NA

NOTE:

1. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	2TX
802.11a	2TX
802.11n (20MHz)	2TX
802.11n (40MHz)	2TX

2. The EUT contains two modules and would not transmitter simultaneously on the same band.

NO	TYPE
A	2.4G+5G combo
B	5G only



A D T

3. The EUT consumes power from the following POE.

POE	
BRAND:	PowerDsine
MODEL:	PD-9001G
INPUT:	100-250Vac, 50/60Hz, 0.8A
OUTPUT:	55Vdc, 0.6A

* POE was supplied for optional accessory.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190MHz	46	5230MHz



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	2.4G + 5G combo card
B	√	√	√	√	5G only card

Where

RE≥1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE:The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.**RADIATED EMISSION TEST (ABOVE 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A, B	802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
A, B	802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	13.5

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11n (40MHz)	38 to 46	38	OFDM	BPSK	13.5
B	802.11n (40MHz)	38 to 46	46	OFDM	BPSK	13.5



A D T

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11n (40MHz)	38 to 46	38	OFDM	BPSK	13.5
B	802.11n (40MHz)	38 to 46	46	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A, B	802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
A, B	802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	13.5

TEST CONDITION:


APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE>1G	25deg. C, 60%RH	55Vdc	Chris Lin
RE<1G	23deg. C, 69%RH	55Vdc	Chris Lin
PLC	24deg. C, 64%RH	55Vdc	Match Tsui
APCM	25deg. C, 60%RH	55Vdc	Frank Liu



A D T

3.3 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is 100 %, duty factor is not required.

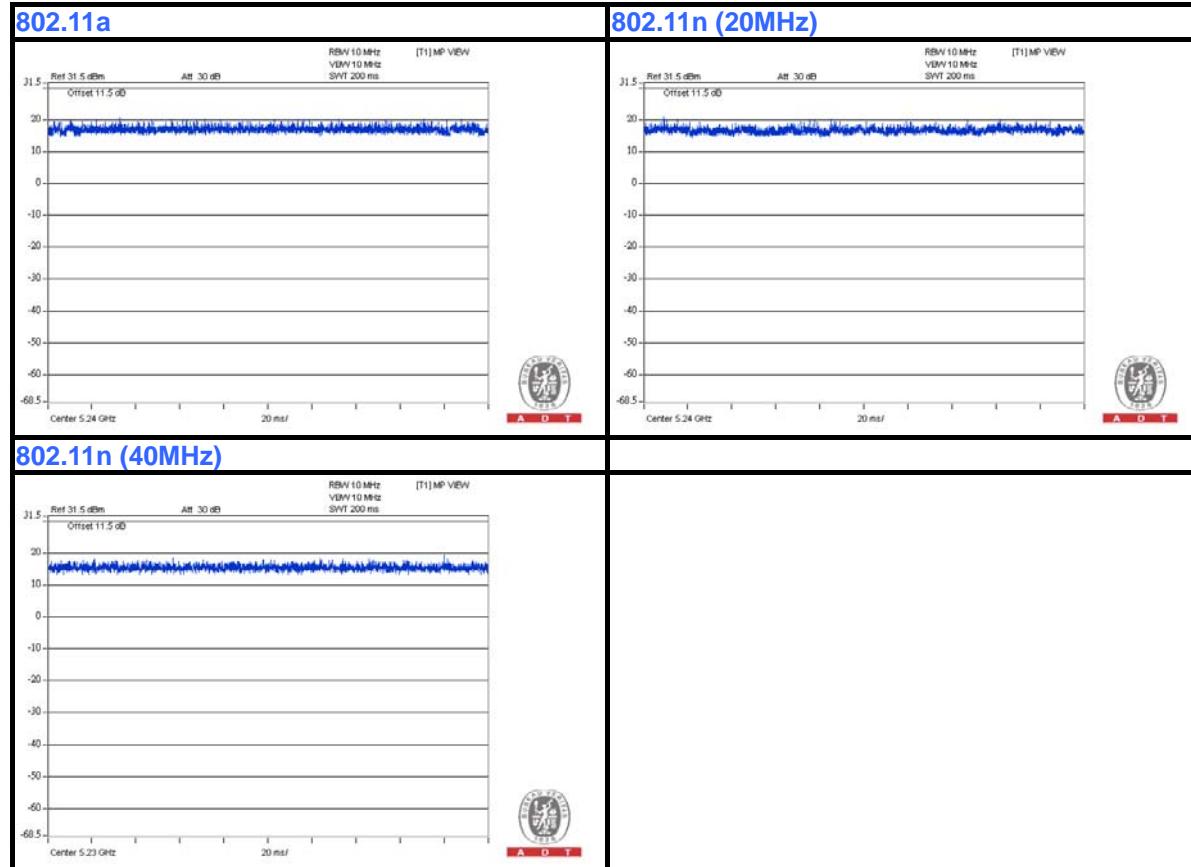



A D T

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	POE	POWERDSINE	PD-9001G	NA	NA
2	Notebook	DELL	E5420	33MKMQ1	FCC Doc Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m non-shielded RJ45 Cable, without core
2	1.8m non-shielded RJ45 Cable, without core.


NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 2 acted as communication partner to transfer data.



A D T

3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

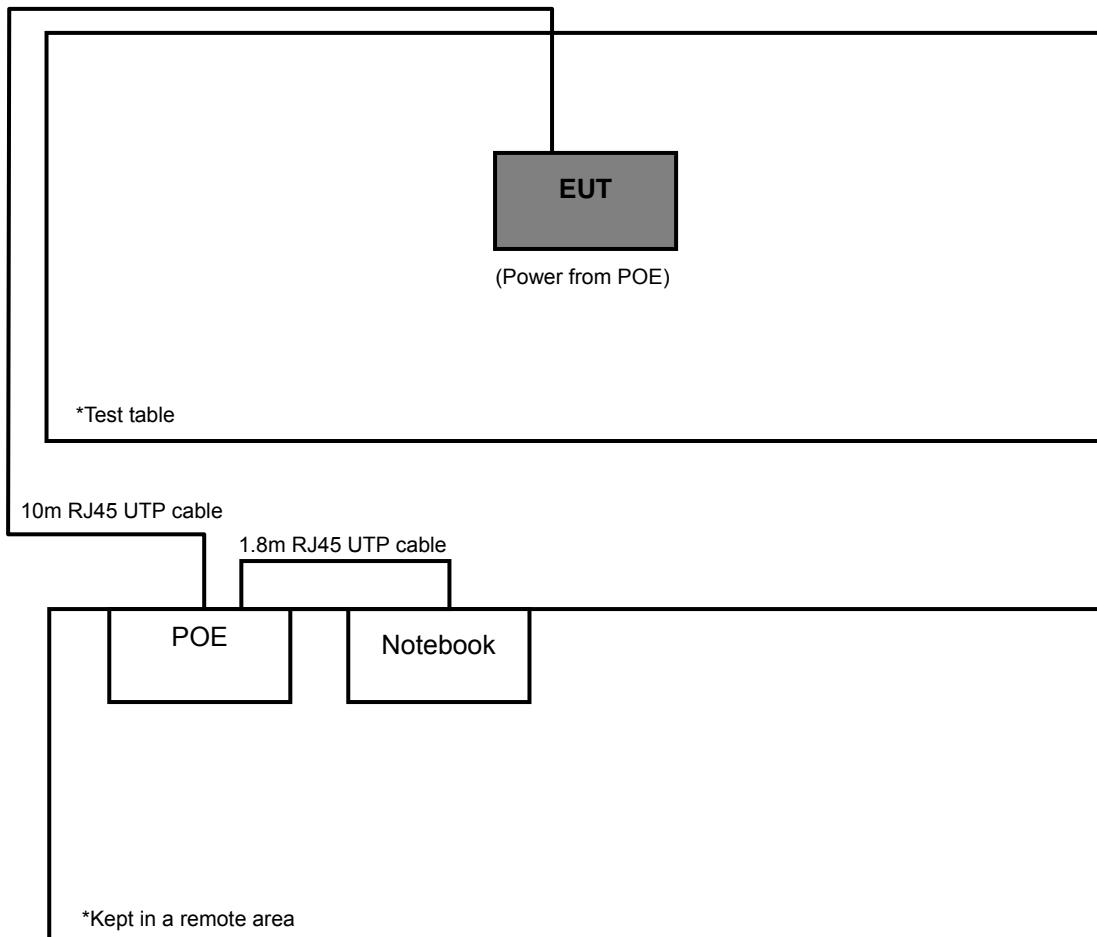



A D T

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D01 General UNII Test Procedures v01 r02

662911 D01 Multiple Transmitter Output v01 r02

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
	FIELD STRENGTH AT 3m (dB μ V/m)	
PK	AV	
74	54	
√	EIRP LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dB μ V/m)
	PK	PK
	-27	68.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m}, \text{ where } P \text{ is the eirp (Watts).}$$



A D T

4.1.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUe DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	Aug. 06, 2012	Aug. 05, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Feb. 03, 2012	Feb. 02, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Apr. 06, 2012	Apr. 05, 2013
HORN Antenna SCHWARZBECK	9120D	209	Sep. 03, 2012	Sep. 02, 2013
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 11, 2012	Jul. 10, 2013
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier Agilent	8447D	2944A10633	Oct. 25, 2012	Oct. 24, 2013
Preamplifier Agilent	8449B	3008A01964	Oct. 25, 2012	Oct. 24, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/4	Aug. 28, 2012	Aug. 27, 2013
Software ADT.	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100	TT93021703	NA	NA
Turn Table Controller ADT.	SC100	SC93021703	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 25, 2012	Oct. 24, 2013
High Speed Peak Power Meter	ML2495A	0842014	Apr. 28, 2012	Apr. 27, 2013
Power Sensor	MA2411B	0738404	Apr. 28, 2012	Apr. 27, 2013

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.



A D T

4.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.5 DEVIATION FROM TEST STANDARD

No deviation.

4.1.6 TEST SETUP

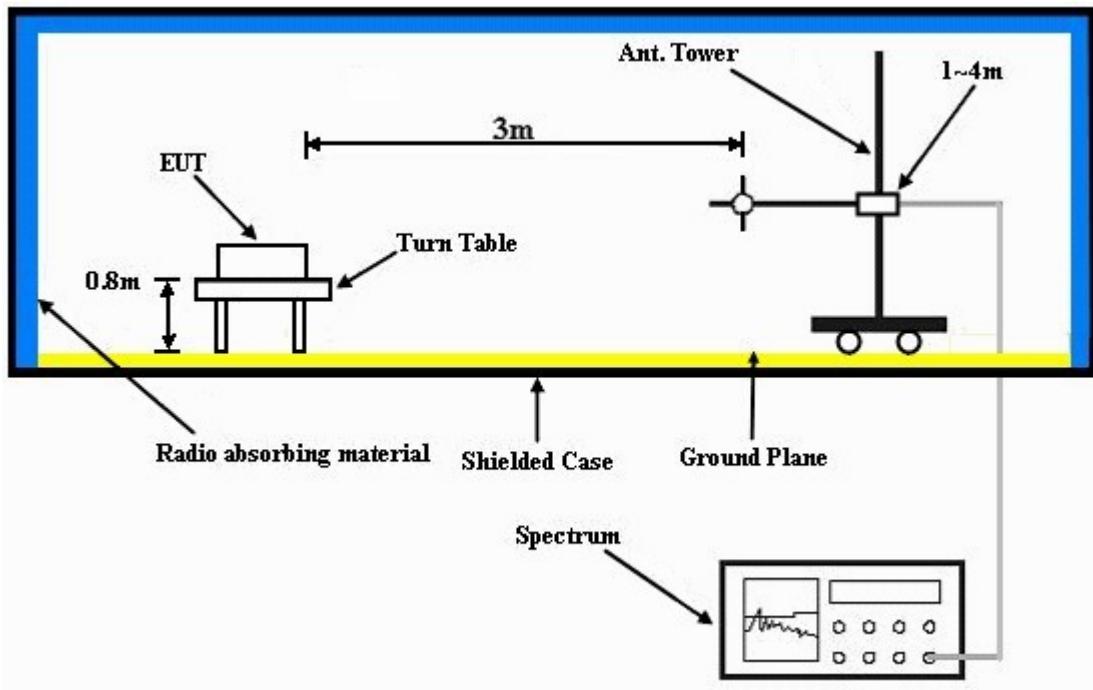

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.7 EUT OPERATING CONDITION

- a. Placed the EUT on the testing table.
- b. Prepared notebook to act as communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via a RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".



A D T

4.1.8 TEST RESULTS

802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 36		FREQUENCY RANGE 1 ~ 40GHz
INPUT POWER		55Vdc		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Chris Lin
TEST MODE		A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.1 PK	74.0	-15.9	1.56 H	74	18.50	39.60
2	5150.00	45.8 AV	54.0	-8.2	1.56 H	74	6.20	39.60
3	*5180.00	100.9 PK			1.01 H	80	61.30	39.60
4	*5180.00	91.5 AV			1.01 H	80	51.90	39.60
5	#10360.00	53.1 PK	74.0	-20.9	1.39 H	54	6.30	46.80
6	#10360.00	41.4 AV	54.0	-12.6	1.39 H	54	-5.40	46.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.6 PK	74.0	-13.4	1.42 V	181	21.00	39.60
2	5150.00	48.7 AV	54.0	-5.3	1.42 V	181	9.10	39.60
3	*5180.00	111.5 PK			1.00 V	360	71.90	39.60
4	*5180.00	102.2 AV			1.00 V	360	62.60	39.60
5	#10360.00	55.1 PK	74.0	-18.9	1.28 V	96	8.30	46.80
6	#10360.00	45.2 AV	54.0	-8.8	1.28 V	96	-1.60	46.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 40		FREQUENCY RANGE 1 ~ 40GHz
INPUT POWER		55Vdc		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Chris Lin
TEST MODE		A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	102.5 PK			1.20 H	174	62.80	39.70
2	*5200.00	92.8 AV			1.20 H	174	53.10	39.70
3	#10400.00	54.0 PK	74.0	-20.0	1.10 H	23	7.20	46.80
4	#10400.00	41.0 AV	54.0	-13.0	1.10 H	23	-5.80	46.80
5	15600.00	55.5 PK	74.0	-18.5	1.28 H	55	6.50	49.00
6	15600.00	44.0 AV	54.0	-10.0	1.28 H	55	-5.00	49.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	112.4 PK			1.11 V	360	72.70	39.70
2	*5200.00	102.7 AV			1.11 V	360	63.00	39.70
3	#10400.00	56.2 PK	74.0	-17.8	1.39 V	65	9.40	46.80
4	#10400.00	43.6 AV	54.0	-10.4	1.39 V	65	-3.20	46.80
5	15600.00	58.0 PK	74.0	-16.0	1.26 V	74	9.00	49.00
6	15600.00	45.6 AV	54.0	-8.4	1.26 V	74	-3.40	49.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 48		FREQUENCY RANGE 1 ~ 40GHz
INPUT POWER		55Vdc		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Chris Lin
TEST MODE		A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	100.4 PK			1.25 H	169	60.70	39.70
2	*5240.00	91.2 AV			1.25 H	169	51.50	39.70
3	5350.00	58.6 PK	74.0	-15.4	1.55 H	63	18.70	39.90
4	5350.00	46.3 AV	54.0	-7.7	1.55 H	63	6.40	39.90
5	#10480.00	53.3 PK	74.0	-20.7	1.16 H	32	6.40	46.90
6	#10480.00	40.8 AV	54.0	-13.2	1.16 H	32	-6.10	46.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	112.1 PK			1.09 V	360	72.40	39.70
2	*5240.00	102.3 AV			1.09 V	360	62.60	39.70
3	5350.00	60.8 PK	74.0	-13.2	1.47 V	85	20.90	39.90
4	5350.00	48.8 AV	54.0	-5.2	1.47 V	85	8.90	39.90
5	#10480.00	55.5 PK	74.0	-18.5	1.36 V	85	8.60	46.90
6	#10480.00	45.6 AV	54.0	-8.4	1.36 V	85	-1.30	46.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	55Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.0 PK	74.0	-17.0	1.16 H	43	17.40	39.60
2	5150.00	43.5 AV	54.0	-10.5	1.16 H	43	3.90	39.60
3	*5180.00	100.2 PK			1.63 H	297	60.60	39.60
4	*5180.00	91.2 AV			1.63 H	297	51.60	39.60
5	#10360.00	54.0 PK	74.0	-20.0	1.15 H	97	7.20	46.80
6	#10360.00	42.1 AV	54.0	-11.9	1.15 H	97	-4.70	46.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.2 PK	74.0	-16.8	1.54 V	214	17.60	39.60
2	5150.00	45.3 AV	54.0	-8.7	1.54 V	214	5.70	39.60
3	*5180.00	110.1 PK			1.00 V	360	70.50	39.60
4	*5180.00	99.9 AV			1.00 V	360	60.30	39.60
5	#10360.00	56.3 PK	74.0	-17.7	1.00 V	137	9.50	46.80
6	#10360.00	43.7 AV	54.0	-10.3	1.00 V	137	-3.10	46.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 40		FREQUENCY RANGE 1 ~ 40GHz
INPUT POWER		55Vdc		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Chris Lin
TEST MODE		B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	100.1 PK			1.23 H	42	60.40	39.70
2	*5200.00	89.7 AV			1.23 H	42	50.00	39.70
3	#10400.00	55.0 PK	74.0	-19.0	1.09 H	47	8.20	46.80
4	#10400.00	41.2 AV	54.0	-12.8	1.09 H	47	-5.60	46.80
5	15600.00	58.2 PK	74.0	-15.8	1.13 H	27	9.20	49.00
6	15600.00	46.2 AV	54.0	-7.8	1.13 H	27	-2.80	49.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	110.1 PK			1.00 V	360	70.40	39.70
2	*5200.00	100.7 AV			1.00 V	360	61.00	39.70
3	#10400.00	57.5 PK	74.0	-16.5	1.16 V	37	10.70	46.80
4	#10400.00	44.5 AV	54.0	-9.5	1.16 V	37	-2.30	46.80
5	15600.00	61.1 PK	74.0	-12.9	1.19 V	62	12.10	49.00
6	15600.00	48.2 AV	54.0	-5.8	1.19 V	62	-0.80	49.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 48		FREQUENCY RANGE 1 ~ 40GHz
INPUT POWER		55Vdc		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Chris Lin
TEST MODE		B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	101.1 PK			1.04 H	360	61.40	39.70
2	*5240.00	91.9 AV			1.04 H	360	52.20	39.70
3	5350.00	57.2 PK	74.0	-16.8	1.34 H	56	17.30	39.90
4	5350.00	44.0 AV	54.0	-10.0	1.34 H	56	4.10	39.90
5	#10480.00	54.0 PK	74.0	-20.0	1.09 H	152	7.10	46.90
6	#10480.00	41.7 AV	54.0	-12.3	1.09 H	152	-5.20	46.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	110.4 PK			1.00 V	360	70.70	39.70
2	*5240.00	100.2 AV			1.00 V	360	60.50	39.70
3	5350.00	60.1 PK	74.0	-13.9	1.25 V	63	20.20	39.90
4	5350.00	47.0 AV	54.0	-7.0	1.25 V	63	7.10	39.90
5	#10480.00	56.2 PK	74.0	-17.8	1.14 V	67	9.30	46.90
6	#10480.00	44.6 AV	54.0	-9.4	1.14 V	67	-2.30	46.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 36		FREQUENCY RANGE 1 ~ 40GHz
INPUT POWER		55Vdc		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Chris Lin
TEST MODE		A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.4 PK	74.0	-15.6	1.63 H	45	18.80	39.60
2	5150.00	44.4 AV	54.0	-9.6	1.63 H	45	4.80	39.60
3	*5180.00	102.1 PK			1.04 H	343	62.50	39.60
4	*5180.00	92.8 AV			1.04 H	343	53.20	39.60
5	#10360.00	52.8 PK	74.0	-21.2	1.34 H	58	6.00	46.80
6	#10360.00	41.1 AV	54.0	-12.9	1.34 H	58	-5.70	46.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	1.18 V	36	19.70	39.60
2	5150.00	48.4 AV	54.0	-5.6	1.18 V	36	8.80	39.60
3	*5180.00	112.5 PK			1.00 V	360	72.90	39.60
4	*5180.00	102.9 AV			1.00 V	360	63.30	39.60
5	#10360.00	55.2 PK	74.0	-18.8	1.18 V	23	8.40	46.80
6	#10360.00	42.8 AV	54.0	-11.2	1.18 V	23	-4.00	46.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	55Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	102.0 PK			1.17 H	172	62.30	39.70
2	*5200.00	92.3 AV			1.17 H	172	52.60	39.70
3	#10400.00	53.6 PK	74.0	-20.4	1.22 H	128	6.80	46.80
4	#10400.00	42.8 AV	54.0	-11.2	1.22 H	128	-4.00	46.80
5	15600.00	53.9 PK	74.0	-20.1	1.02 H	81	4.90	49.00
6	15600.00	43.9 AV	54.0	-10.1	1.02 H	81	-5.10	49.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	112.1 PK			1.00 V	13	72.40	39.70
2	*5200.00	102.3 AV			1.00 V	13	62.60	39.70
3	#10400.00	55.6 PK	74.0	-18.4	1.33 V	52	8.80	46.80
4	#10400.00	42.9 AV	54.0	-11.1	1.33 V	52	-3.90	46.80
5	15600.00	55.9 PK	74.0	-18.1	1.44 V	63	6.90	49.00
6	15600.00	45.5 AV	54.0	-8.5	1.44 V	63	-3.50	49.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL	Channel 48	FREQUENCY RANGE		1 ~ 40GHz	
INPUT POWER	55Vdc	DETECTOR FUNCTION		Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY		Chris Lin	
TEST MODE	A				

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	101.6 PK			1.00 H	169	61.90	39.70
2	*5240.00	91.4 AV			1.00 H	169	51.70	39.70
3	5350.00	58.1 PK	74.0	-15.9	1.88 H	56	18.20	39.90
4	5350.00	46.5 AV	54.0	-7.5	1.88 H	56	6.60	39.90
5	#10480.00	53.0 PK	74.0	-21.0	1.48 H	20	6.10	46.90
6	#10480.00	41.2 AV	54.0	-12.8	1.48 H	20	-5.70	46.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	110.5 PK			1.00 V	12	70.80	39.70
2	*5240.00	100.9 AV			1.00 V	12	61.20	39.70
3	5350.00	58.3 PK	74.0	-15.7	1.13 V	68	18.40	39.90
4	5350.00	48.3 AV	54.0	-5.7	1.13 V	68	8.40	39.90
5	#10480.00	55.6 PK	74.0	-18.4	1.29 V	56	8.70	46.90
6	#10480.00	43.4 AV	54.0	-10.6	1.29 V	56	-3.50	46.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	55Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.3 PK	74.0	-17.7	1.16 H	42	16.70	39.60
2	5150.00	43.6 AV	54.0	-10.4	1.16 H	42	4.00	39.60
3	*5180.00	102.1 PK			1.04 H	0	62.50	39.60
4	*5180.00	92.0 AV			1.04 H	0	52.40	39.60
5	#10360.00	53.8 PK	74.0	-20.2	1.16 H	37	7.00	46.80
6	#10360.00	42.1 AV	54.0	-11.9	1.16 H	37	-4.70	46.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.8 PK	74.0	-14.2	1.11 V	0	20.20	39.60
2	5150.00	48.6 AV	54.0	-5.4	1.11 V	0	9.00	39.60
3	*5180.00	110.7 PK			1.00 V	360	71.10	39.60
4	*5180.00	100.4 AV			1.00 V	360	60.80	39.60
5	#10360.00	57.4 PK	74.0	-16.6	1.03 V	55	10.60	46.80
6	#10360.00	44.4 AV	54.0	-9.6	1.03 V	55	-2.40	46.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL	Channel 40	FREQUENCY RANGE		1 ~ 40GHz	
INPUT POWER	55Vdc	DETECTOR FUNCTION		Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY		Chris Lin	
TEST MODE	B				

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	100.6 PK			1.23 H	43	60.90	39.70
2	*5200.00	90.7 AV			1.23 H	43	51.00	39.70
3	#10400.00	54.7 PK	74.0	-19.3	1.29 H	58	7.90	46.80
4	#10400.00	41.5 AV	54.0	-12.5	1.29 H	58	-5.30	46.80
5	15600.00	59.8 PK	74.0	-14.2	1.16 H	37	10.80	49.00
6	15600.00	46.2 AV	54.0	-7.8	1.16 H	37	-2.80	49.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	110.0 PK			1.00 V	360	70.30	39.70
2	*5200.00	100.3 AV			1.00 V	360	60.60	39.70
3	#10400.00	54.3 PK	74.0	-19.7	1.09 V	66	7.50	46.80
4	#10400.00	45.5 AV	54.0	-8.5	1.09 V	66	-1.30	46.80
5	15600.00	61.1 PK	74.0	-12.9	1.23 V	108	12.10	49.00
6	15600.00	48.1 AV	54.0	-5.9	1.23 V	108	-0.90	49.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	55Vdc	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	100.3 PK			1.00 H	360	60.60	39.70
2	*5240.00	90.1 AV			1.00 H	360	50.40	39.70
3	5350.00	56.4 PK	74.0	-17.6	1.19 H	62	16.50	39.90
4	5350.00	43.9 AV	54.0	-10.1	1.19 H	62	4.00	39.90
5	#10480.00	53.7 PK	74.0	-20.3	1.19 H	44	6.80	46.90
6	#10480.00	42.1 AV	54.0	-11.9	1.19 H	44	-4.80	46.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	110.4 PK			1.00 V	360	70.70	39.70
2	*5240.00	100.7 AV			1.00 V	360	61.00	39.70
3	5350.00	61.9 PK	74.0	-12.1	1.09 V	12	22.00	39.90
4	5350.00	49.0 AV	54.0	-5.0	1.09 V	12	9.10	39.90
5	#10480.00	57.1 PK	74.0	-16.9	1.18 V	23	10.20	46.90
6	#10480.00	45.1 AV	54.0	-8.9	1.18 V	23	-1.80	46.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 40GHz
INPUT POWER		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Chris Lin
TEST MODE				

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	47.0 PK	74.0	-27.0	1.06 H	54	7.40	39.60
2	5150.00	34.4 AV	54.0	-19.6	1.06 H	54	-5.20	39.60
3	*5190.00	102.0 PK			1.08 H	177	62.40	39.60
4	*5190.00	93.1 AV			1.08 H	177	53.50	39.60
5	#10380.00	53.2 PK	74.0	-20.8	1.68 H	42	6.40	46.80
6	#10380.00	40.9 AV	54.0	-13.1	1.68 H	42	-5.90	46.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	1.10 V	350	20.00	39.60
2	5150.00	48.0 AV	54.0	-6.0	1.10 V	350	8.40	39.60
3	*5190.00	109.6 PK			1.00 V	360	70.00	39.60
4	*5190.00	99.9 AV			1.00 V	360	60.30	39.60
5	#10380.00	62.8 PK	74.0	-11.2	1.16 V	42	16.00	46.80
6	#10380.00	48.6 AV	54.0	-5.4	1.16 V	42	1.80	46.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 46		FREQUENCY RANGE 1 ~ 40GHz
INPUT POWER		55Vdc		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Chris Lin
TEST MODE		A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	100.4 PK			1.41 H	170	60.70	39.70
2	*5230.00	89.8 AV			1.41 H	170	50.10	39.70
3	5350.00	57.9 PK	74.0	-16.1	1.88 H	47	18.00	39.90
4	5350.00	44.9 AV	54.0	-9.1	1.88 H	47	5.00	39.90
5	#10460.00	52.9 PK	74.0	-21.1	1.26 H	63	6.00	46.90
6	#10460.00	40.8 AV	54.0	-13.2	1.26 H	63	-6.10	46.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	108.7 PK			1.00 V	360	69.00	39.70
2	*5230.00	99.8 AV			1.00 V	360	60.10	39.70
3	5350.00	58.2 PK	74.0	-15.8	1.48 V	32	18.30	39.90
4	5350.00	46.4 AV	54.0	-7.6	1.48 V	32	6.50	39.90
5	#10460.00	55.5 PK	74.0	-18.5	1.18 V	69	8.60	46.90
6	#10460.00	43.2 AV	54.0	-10.8	1.18 V	69	-3.70	46.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 38		FREQUENCY RANGE 1 ~ 40GHz
INPUT POWER		55Vdc		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Chris Lin
TEST MODE		B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.4 PK	74.0	-17.6	1.19 H	65	16.80	39.60
2	5150.00	44.5 AV	54.0	-9.5	1.19 H	65	4.90	39.60
3	*5190.00	100.0 PK			1.06 H	360	60.40	39.60
4	*5190.00	90.6 AV			1.06 H	360	51.00	39.60
5	#10380.00	53.3 PK	74.0	-20.7	1.12 H	46	6.50	46.80
6	#10380.00	42.2 AV	54.0	-11.8	1.12 H	46	-4.60	46.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.5 PK	74.0	-2.5	1.00 V	360	31.90	39.60
2	5150.00	53.0 AV	54.0	-1.0	1.00 V	360	13.40	39.60
3	*5190.00	108.4 PK			1.00 V	14	68.80	39.60
4	*5190.00	97.8 AV			1.00 V	14	58.20	39.60
5	#10380.00	57.6 PK	74.0	-16.4	1.13 V	74	10.80	46.80
6	#10380.00	44.2 AV	54.0	-9.8	1.13 V	74	-2.60	46.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 46		FREQUENCY RANGE 1 ~ 40GHz	
INPUT POWER		55Vdc		DETECTOR FUNCTION Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY Chris Lin	
TEST MODE		B			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	100.1 PK			1.03 H	2	60.40	39.70
2	*5230.00	90.5 AV			1.03 H	2	50.80	39.70
3	5350.00	56.6 PK	74.0	-17.4	1.09 H	66	16.70	39.90
4	5350.00	47.1 AV	54.0	-6.9	1.09 H	66	7.20	39.90
5	#10460.00	53.5 PK	74.0	-20.5	1.16 H	37	6.60	46.90
6	#10460.00	41.1 AV	54.0	-12.9	1.16 H	37	-5.80	46.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	108.2 PK			1.00 V	360	68.50	39.70
2	*5230.00	97.6 AV			1.00 V	360	57.90	39.70
3	5350.00	60.1 PK	74.0	-13.9	1.11 V	211	20.20	39.90
4	5350.00	47.8 AV	54.0	-6.2	1.11 V	211	7.90	39.90
5	#10460.00	58.6 PK	74.0	-15.4	1.15 V	78	11.70	46.90
6	#10460.00	44.6 AV	54.0	-9.4	1.15 V	78	-2.30	46.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

BELOW 1GHZ WORST-CASE DATA: 802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		Below 1000MHz
INPUT POWER		DETECTOR FUNCTION		Quasi-Peak
ENVIRONMENTAL CONDITIONS		TESTED BY		Chris Lin
TEST MODE		A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dB _u V/m)	LIMIT (dB _u V/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dB _u V)	CORRECTION FACTOR (dB/m)
1	167.94	31.7 QP	43.5	-11.8	1.50 H	244	18.20	13.50
2	374.04	32.3 QP	46.0	-13.7	1.00 H	104	15.40	16.90
3	533.47	36.7 QP	46.0	-9.3	1.50 H	12	15.80	20.90
4	599.58	44.8 QP	46.0	-1.2	1.25 H	5	22.30	22.50
5	667.63	44.3 QP	46.0	-1.7	1.25 H	5	21.00	23.30
6	933.99	41.9 QP	46.0	-4.1	1.50 H	231	14.60	27.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dB _u V/m)	LIMIT (dB _u V/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dB _u V)	CORRECTION FACTOR (dB/m)
1	51.29	37.8 QP	40.0	-2.2	1.00 V	5	24.10	13.70
2	160.17	29.1 QP	43.5	-14.4	1.00 V	170	15.10	14.00
3	374.04	31.3 QP	46.0	-14.7	1.00 V	126	14.40	16.90
4	599.58	39.2 QP	46.0	-6.8	1.00 V	82	16.70	22.50
5	667.63	38.6 QP	46.0	-7.4	1.00 V	91	15.30	23.30
6	867.89	36.8 QP	46.0	-9.2	1.50 V	296	10.30	26.50

REMARKS:

1. Emission level (dB_uV/m) = Raw Value (dB_uV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	55Vdc	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	30.5 QP	40.0	-9.5	2.00 H	174	16.90	13.60
2	224.33	28.6 QP	46.0	-17.4	1.25 H	232	16.50	12.10
3	599.58	43.8 QP	46.0	-2.2	1.25 H	10	21.30	22.50
4	667.63	43.9 QP	46.0	-2.1	1.25 H	346	20.60	23.30
5	741.51	40.4 QP	46.0	-5.6	1.00 H	348	16.00	24.40
6	1000.00	51.6 QP	54.0	-2.4	1.25 H	314	23.60	28.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	51.29	38.9 QP	40.0	-1.1	1.24 V	345	25.20	13.70
2	160.17	25.1 QP	43.5	-18.4	1.00 V	130	11.10	14.00
3	399.31	28.6 QP	46.0	-17.4	1.00 V	224	11.10	17.50
4	533.47	31.3 QP	46.0	-14.7	1.00 V	123	10.40	20.90
5	599.58	37.8 QP	46.0	-8.2	1.00 V	90	15.30	22.50
6	1000.00	48.4 QP	54.0	-5.6	1.00 V	6	20.40	28.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 16, 2012	Nov. 15, 2013
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 28, 2012	Dec. 27, 2013
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 02, 2012	Jul. 01, 2013
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 07, 2012	Feb. 06, 2013
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

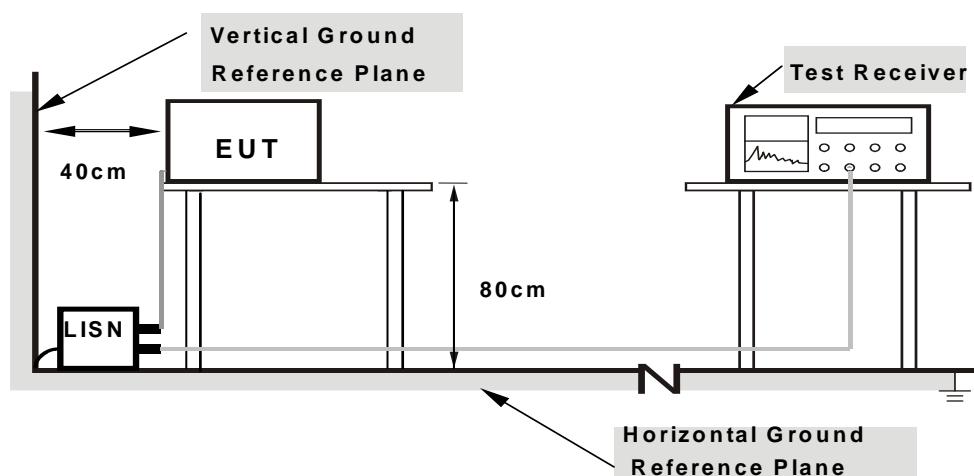

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



A D T


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : 802.11n (40MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.22812	0.18	40.73	27.39	40.91	27.57	62.52	52.52	-21.61	-24.95
2	0.34531	0.20	28.05	19.43	28.25	19.63	59.07	49.07	-30.83	-29.45
3	2.83594	0.32	30.59	22.29	30.91	22.61	56.00	46.00	-25.09	-23.39
4	3.57031	0.35	28.89	20.34	29.24	20.69	56.00	46.00	-26.76	-25.31
5	18.44531	0.64	35.63	30.62	36.27	31.26	60.00	50.00	-23.73	-18.74
6	27.17969	0.63	36.90	31.86	37.53	32.49	60.00	50.00	-22.47	-17.51


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

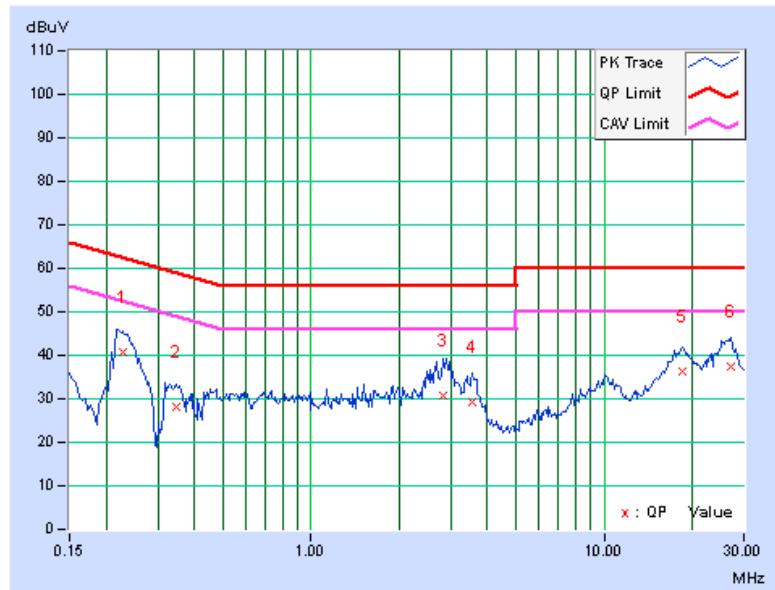

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.22540	0.17	37.25	27.16	37.42	27.33	62.62	52.62	-25.20	-25.29
2	0.34141	0.19	26.81	18.63	27.00	18.82	59.17	49.17	-32.17	-30.35
3	2.93359	0.33	33.48	25.66	33.81	25.99	56.00	46.00	-22.19	-20.01
4	3.66406	0.36	28.18	22.09	28.54	22.45	56.00	46.00	-27.46	-23.55
5	18.53906	0.73	34.84	29.89	35.57	30.62	60.00	50.00	-24.43	-19.38
6	26.27734	0.69	38.37	33.52	39.06	34.21	60.00	50.00	-20.94	-15.79

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

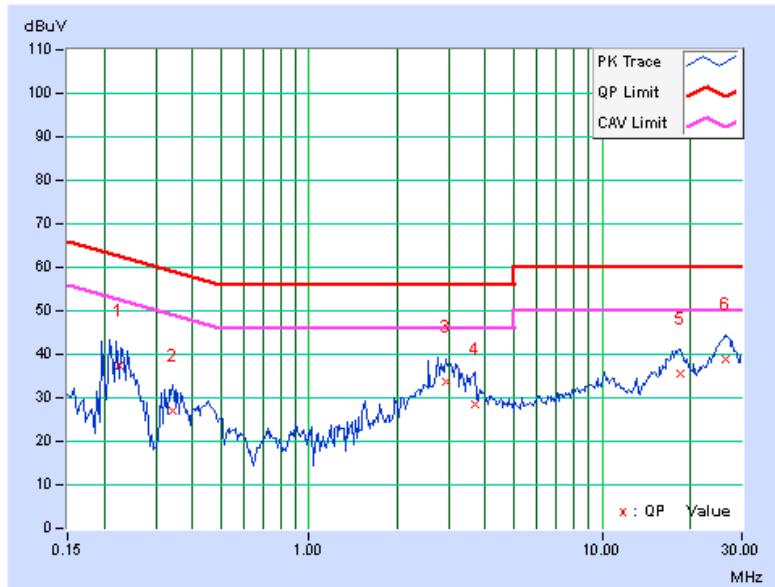




A D T

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.22812	0.18	38.42	22.06	38.60	22.24	62.52	52.52	-23.92	-30.28
2	0.36094	0.20	29.92	25.90	30.12	26.10	58.71	48.71	-28.58	-22.60
3	0.72422	0.24	28.91	28.07	29.15	28.31	56.00	46.00	-26.85	-17.69
4	1.32813	0.27	25.23	25.15	25.50	25.42	56.00	46.00	-30.50	-20.58
5	10.16016	0.44	27.72	22.90	28.16	23.34	60.00	50.00	-31.84	-26.66
6	19.88672	0.68	28.01	24.52	28.69	25.20	60.00	50.00	-31.31	-24.80


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

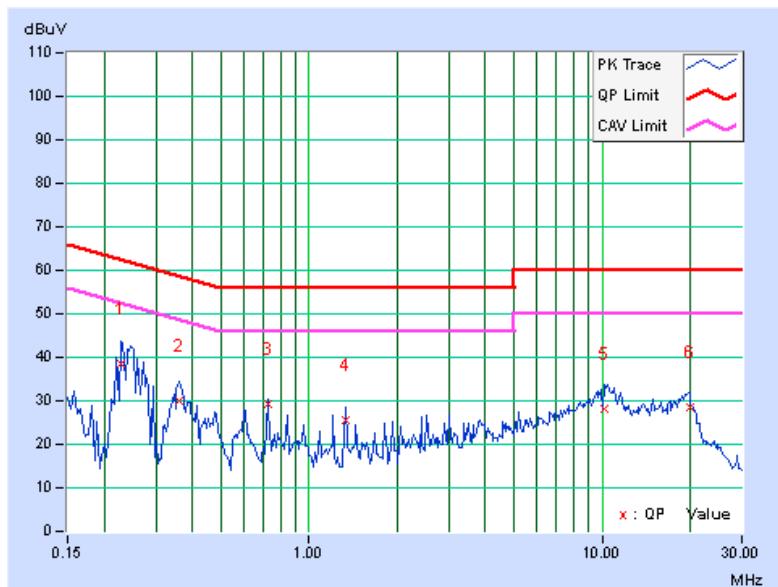

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.23984	0.17	37.87	30.36	38.04	30.53	62.10	52.10	-24.06	-21.57
2	0.48594	0.21	28.69	23.15	28.90	23.36	56.24	46.24	-27.34	-22.88
3	0.72422	0.23	31.14	29.31	31.37	29.54	56.00	46.00	-24.63	-16.46
4	1.32422	0.27	27.89	25.94	28.16	26.21	56.00	46.00	-27.84	-19.79
5	10.51172	0.50	27.79	22.77	28.29	23.27	60.00	50.00	-31.71	-26.73
6	19.28906	0.75	29.23	25.80	29.98	26.55	60.00	50.00	-30.02	-23.45

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

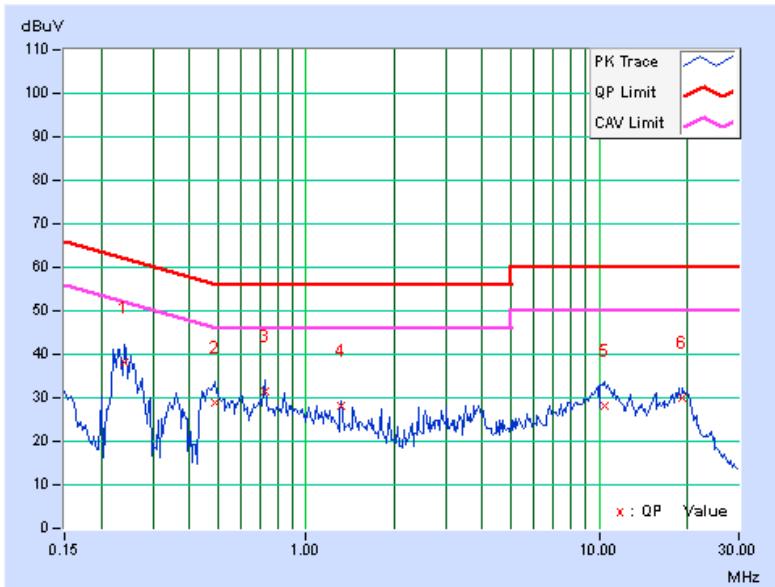

4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;


Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(\text{NANT}/\text{NSS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with NANT ≥ 5.


For power measurements on all other devices: Array Gain = $10 \log(\text{NANT}/\text{NSS})$ dB.

4.3.2 TEST SETUP

FOR POWER OUTPUT MEASUREMENT

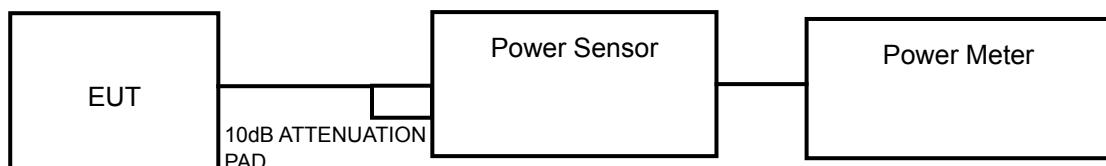

FOR 26dB BANDWIDTH

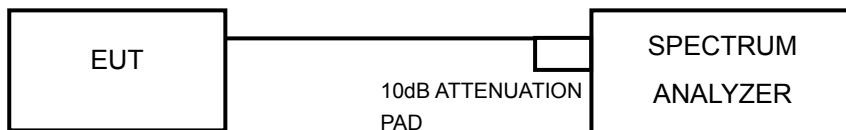

4.3.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.



A D T

4.3.4 TEST PROCEDURE

FOR AVERAGE POWER MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.3.7 TEST RESULTS (A)

POWER OUTPUT: 802.11a

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	12.60	12.10	34.415	15.37	17	PASS
40	5200	12.70	12.60	36.818	15.66	17	PASS
48	5240	12.10	12.00	32.067	15.06	17	PASS

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	12.50	12.10	34.001	15.31	17	PASS
40	5200	12.30	12.00	32.831	15.16	17	PASS
48	5240	11.80	11.60	29.590	14.71	17	PASS

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	13.30	13.50	43.767	16.41	17	PASS
46	5230	13.00	13.20	40.846	16.11	17	PASS



A D T

26dB BANDWIDTH: 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBC BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
36	5180	25.63	24.51	PASS
40	5200	25.84	25.38	PASS
48	5240	25.78	24.55	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBC BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
36	5180	26.87	26.21	PASS
40	5200	26.31	26.29	PASS
48	5240	26.38	26.36	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBC BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
38	5190	52.87	66.88	PASS
46	5230	53.16	51.03	PASS



A D T

4.3.8 TEST RESULTS (B)

POWER OUTPUT: 802.11a

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	11.92	12.78	34.527	15.38	17	PASS
40	5200	12.43	12.63	35.821	15.54	17	PASS
48	5240	12.22	11.82	31.877	15.03	17	PASS

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	12.09	12.81	35.280	15.48	17	PASS
40	5200	12.48	12.66	36.151	15.58	17	PASS
48	5240	12.06	11.60	30.523	14.85	17	PASS

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	13.33	13.47	43.761	16.41	17	PASS
46	5230	13.73	13.09	43.975	16.43	17	PASS



A D T

26dB BANDWIDTH: 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBC BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
36	5180	21.65	21.54	PASS
40	5200	20.66	21.43	PASS
48	5240	21.52	21.02	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBC BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
36	5180	21.42	21.16	PASS
40	5200	21.81	21.83	PASS
48	5240	21.56	21.72	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBC BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
38	5190	51.01	50.64	PASS
46	5230	51.83	50.50	PASS




A D T

4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	4dBm

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.4.4 TEST PROCEDURES

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 30 KHz, Set VBW \geq 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to “free run”.
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value
- 6) Record the max value

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6.



A D T

4.4.7 TEST RESULTS (A)

802.11a

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
36	5180	-0.01	-0.37	2.82	2.99	PASS
40	5200	-0.04	-0.52	2.74	2.99	PASS
48	5240	-0.40	-0.21	2.71	2.99	PASS

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $4\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4-(7.01-6) = 2.99\text{dBm}$.

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
36	5180	0.14	-0.58	2.81	2.99	PASS
40	5200	-0.68	-0.64	2.35	2.99	PASS
48	5240	-0.73	-0.69	2.30	2.99	PASS

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $4\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4-(7.01-6) = 2.99\text{dBm}$.

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
38	5190	-2.21	-2.60	0.61	2.99	PASS
46	5230	-2.46	-2.78	0.39	2.99	PASS

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $4\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4-(7.01-6) = 2.99\text{dBm}$.



A D T

4.4.8 TEST RESULTS (B)

802.11a

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
36	5180	-0.08	-1.09	2.45	2.99	PASS
40	5200	-0.03	-0.87	2.58	2.99	PASS
48	5240	-0.27	-0.56	2.60	2.99	PASS

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $4\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4-(7.01-6) = 2.99\text{dBm}$.

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
36	5180	0.03	-0.80	2.65	2.99	PASS
40	5200	0.23	-0.68	2.81	2.99	PASS
48	5240	-0.69	-0.89	2.22	2.99	PASS

- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $4\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4-(7.01-6) = 2.99\text{dBm}$.

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
38	5190	-2.35	-3.14	0.28	2.99	PASS
46	5230	-2.53	-3.21	0.15	2.99	PASS


- NOTE:** 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $4\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4-(7.01-6) = 2.99\text{dBm}$.

4.5 PEAK POWER EXCURSION MEASUREMENT

4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.5.4 TEST PROCEDURE

- 1) Set RBW = 1 MHz, VBW \geq 3 MHz, Detector = peak.
- 2) Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
- 3) Use the peak search function to find the peak of the spectrum.
- 4) Measure the PPSD.
- 5) Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.


4.5.6 EUT OPERATING CONDITIONS

Same as 4.2.6

4.5.7 TEST RESULTS (A)

802.11a

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)		PPSD (dBm)		PEAK EXCURSION (dB)		LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
36	5180	11.81	11.86	-0.01	-0.37	11.82	12.23	13	PASS
40	5200	11.48	12.25	-0.04	-0.52	11.52	12.77	13	PASS
48	5240	11.07	12.11	-0.40	-0.21	11.47	12.32	13	PASS

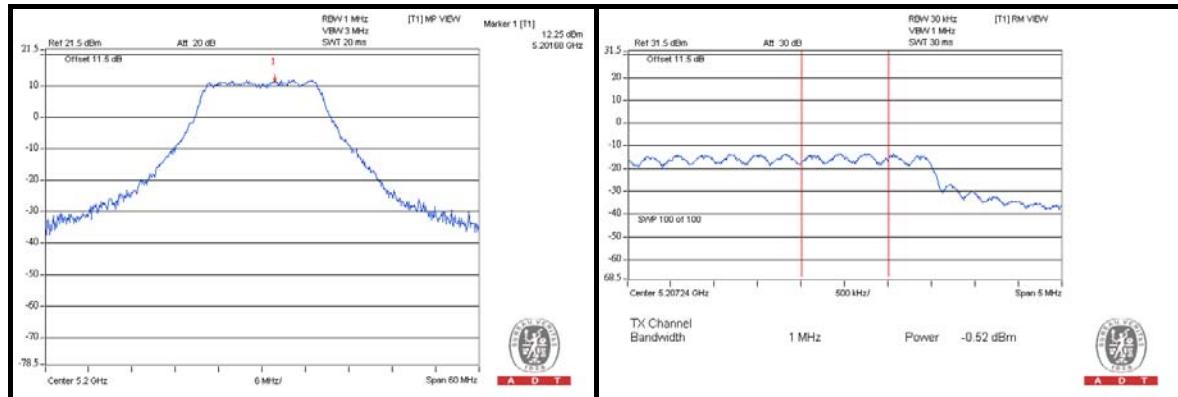




A D T

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)		PPSD (dBm)		PEAK EXCURSION (dB)		LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
36	5180	11.84	12.08	0.14	-0.58	11.70	12.66	13	PASS
40	5200	11.01	11.74	-0.68	-0.64	11.69	12.38	13	PASS
48	5240	10.47	11.47	-0.73	-0.69	11.20	12.16	13	PASS

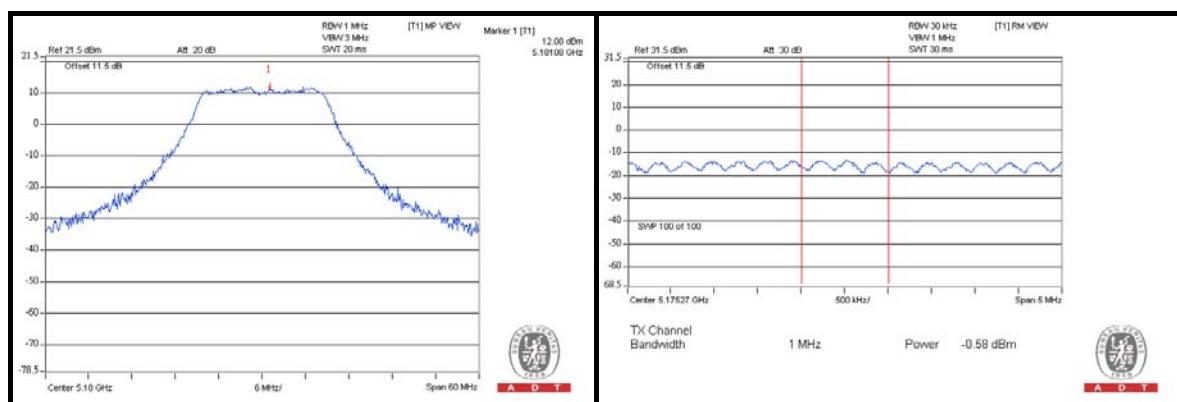




A D T

802.11n (40MHz)


CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)		PPSD (dBm)		PEAK EXCURSION (dB)		LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
38	5190	10.11	10.31	-2.21	-2.60	12.32	12.91	13	PASS
46	5230	9.05	10.19	-2.46	-2.78	11.51	12.97	13	PASS

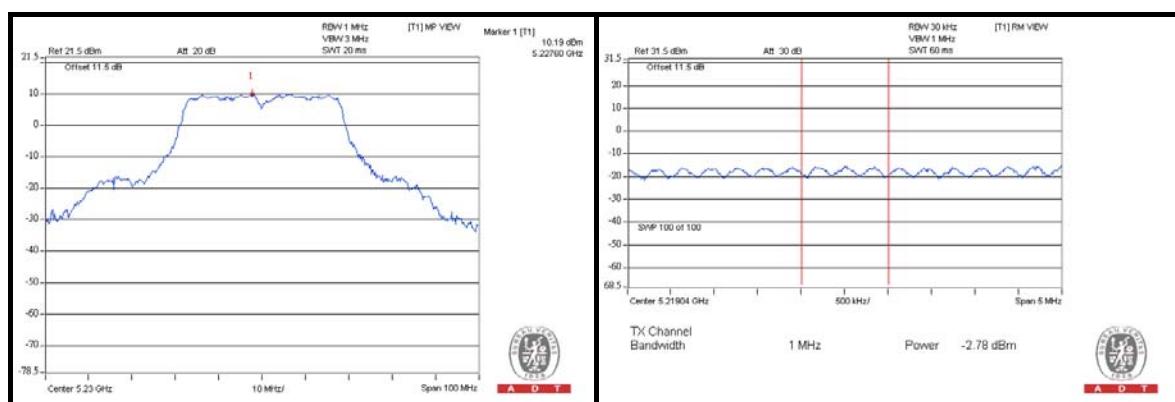

4.5.8 TEST RESULTS (B)

802.11a

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)		PPSD (dBm)		PEAK EXCURSION (dB)		LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
36	5180	9.35	8.83	-0.08	-1.09	9.43	9.92	13	PASS
40	5200	9.10	9.10	-0.03	-0.87	9.13	9.97	13	PASS
48	5240	8.51	10.11	-0.27	-0.56	8.78	10.67	13	PASS

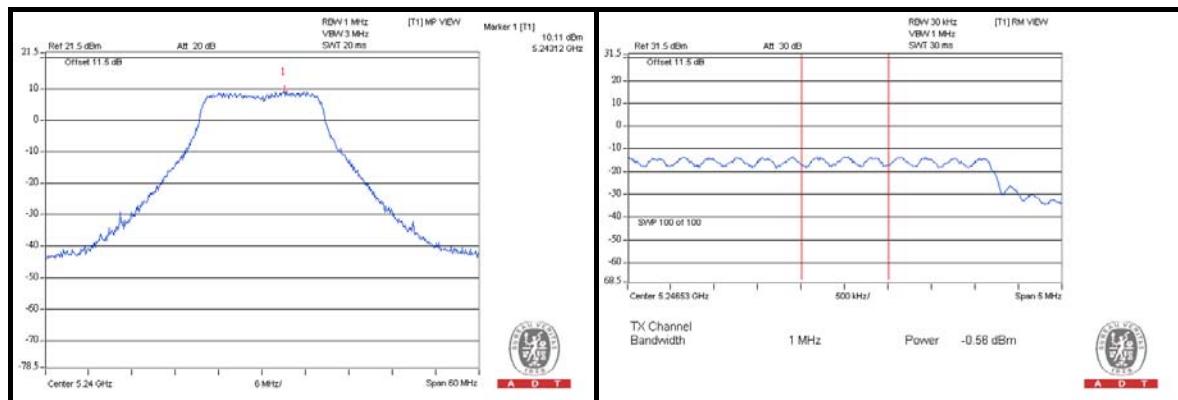




A D T

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)		PPSD (dBm)		PEAK EXCURSION (dB)		LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
36	5180	9.12	8.02	0.03	-0.80	9.09	8.82	13	PASS
40	5200	9.16	8.18	0.23	-0.68	8.93	8.86	13	PASS
48	5240	8.34	8.01	-0.69	-0.89	9.03	8.90	13	PASS

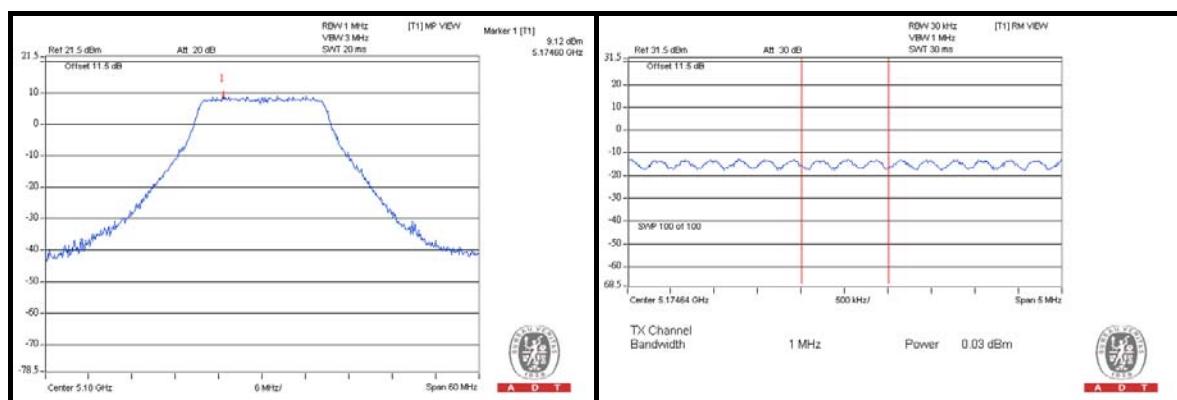




A D T

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)		PPSD (dBm)		PEAK EXCURSION (dB)		LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
38	5190	7.05	5.36	-2.35	-3.14	9.40	8.50	13	PASS
46	5230	6.68	5.97	-2.53	-3.21	9.21	9.18	13	PASS

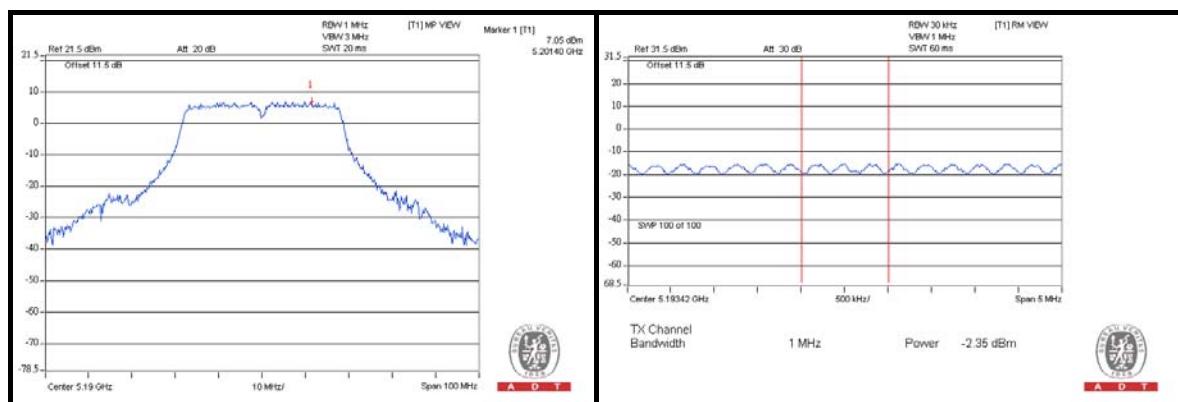


4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 TEST SETUP

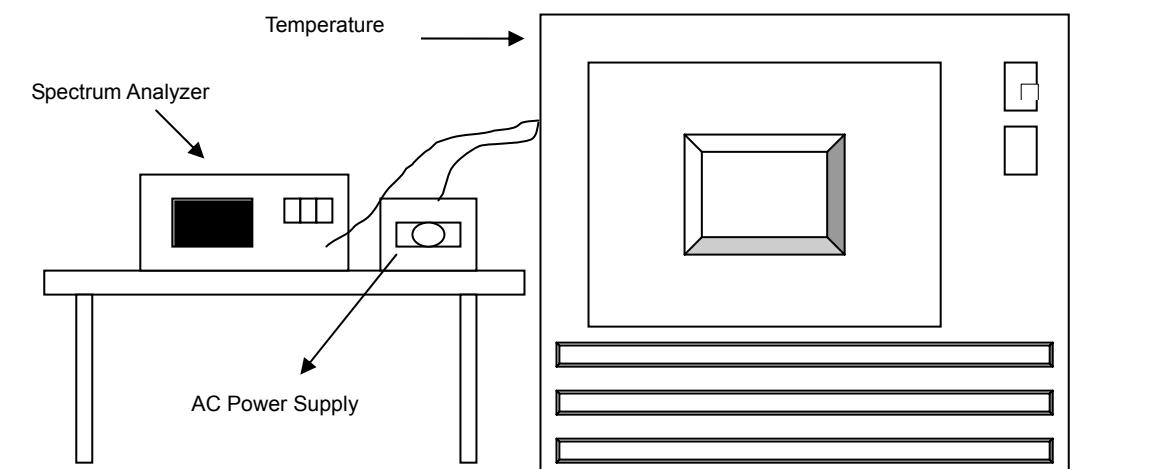

4.6.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.



A D T

4.6.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



A D T

4.6.7 TEST RESULTS

FREQUEMCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5190MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)						
60	120	5190.0214	0.00041	5189.9746	0.00038	5190.0261	0.00050	5189.9741	0.00046
50	120	5189.9814	0.00039	5189.9756	0.00037	5189.9835	0.00051	5189.9744	0.00043
40	120	5189.9955	-0.00036	5189.9887	-0.00049	5189.9935	-0.00033	5189.9883	-0.00050
30	120	5189.9877	-0.00036	5189.9975	-0.00047	5189.992	-0.00032	5189.9887	-0.00049
20	120	5190.0204	-0.00034	5190.0199	-0.00050	5190.0205	-0.00032	5190.0182	-0.00049
10	120	5189.9793	-0.00008	5189.9733	-0.00021	5189.9746	-0.00013	5189.9801	-0.00024
0	120	5190.0023	-0.00009	5190.0025	-0.00022	5190.0104	-0.00013	5190.008	-0.00023
-10	120	5189.9896	-0.00011	5189.9956	-0.00022	5189.9986	-0.00015	5189.9947	-0.00024
-20	120	5190.0205	-0.00025	5190.0254	-0.00003	5190.0171	-0.00017	5190.0181	-0.00019
-30	120	5190.0132	-0.00024	5190.0203	-0.00005	5190.0205	-0.00015	5190.0189	-0.00022

FREQUEMCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5190MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)						
20	138	5190.0208	0.00040	5190.0184	0.00035	5190.0211	0.00041	5190.0188	0.00036
	120	5190.0204	0.00039	5190.0199	0.00038	5190.0205	0.00039	5190.0182	0.00035
	102	5190.02	0.00039	5190.019	0.00037	5190.02	0.00039	5190.019	0.00037



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---