

EMC Test Report

*Application for Grant of Equipment Authorization
Class II Permissive Change/Reassessment*

*Industry Canada RSS-Gen Issue 3 / RSS 210 Issue 8
FCC Part 15 Subpart C*

Model: XI-N300 in the XR1000 and XR2000

IC CERTIFICATION #: 5428A-XIN300
FCC ID: SK6XI-N300

APPLICANT: Xirrus, Inc.
2101 Corporate Center Dr.
Newbury Park, CA 91320

TEST SITE(S): Elliott Laboratories
41039 Boyce Road.
Fremont, CA. 94538-2435

IC SITE REGISTRATION #: 2845B-3; 2845B-4, 2845B-5, 2845B-7

REPORT DATE: May 21, 2012

FINAL TEST DATES: February 21, 22, 23, 24, and 27, and March 7, 8,
9 and 16, 2012


TOTAL NUMBER OF PAGES: 112

PROGRAM MGR /
TECHNICAL REVIEWER:



Mark E Hill
Staff Engineer

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:

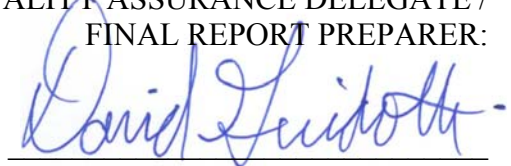

David Guidotti
Senior Technical Writer



Elliott Laboratories is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

| Rev# | Date | Comments | Modified By |
|------|------------|---------------|-------------|
| - | 05-21-2012 | First release | |

TABLE OF CONTENTS

| | |
|------------------------------------------------------------------------------------|------------|
| REVISION HISTORY | 2 |
| TABLE OF CONTENTS | 3 |
| SCOPE..... | 4 |
| OBJECTIVE | 4 |
| STATEMENT OF COMPLIANCE..... | 5 |
| DEVIATIONS FROM THE STANDARDS..... | 5 |
| TEST RESULTS SUMMARY | 6 |
| DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHz) | 6 |
| DIGITAL TRANSMISSION SYSTEMS (5725 –5850 MHz) | 6 |
| GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS | 7 |
| MEASUREMENT UNCERTAINTIES | 8 |
| EQUIPMENT UNDER TEST (EUT) DETAILS..... | 9 |
| GENERAL..... | 9 |
| ANTENNA SYSTEM | 9 |
| ENCLOSURE | 9 |
| MODIFICATIONS..... | 9 |
| SUPPORT EQUIPMENT | 10 |
| EUT INTERFACE PORTS | 10 |
| EUT OPERATION | 10 |
| TEST SITE..... | 12 |
| GENERAL INFORMATION | 12 |
| CONDUCTED EMISSIONS CONSIDERATIONS | 12 |
| RADIATED EMISSIONS CONSIDERATIONS | 12 |
| MEASUREMENT INSTRUMENTATION | 13 |
| RECEIVER SYSTEM | 13 |
| INSTRUMENT CONTROL COMPUTER | 13 |
| LINE IMPEDANCE STABILIZATION NETWORK (LISN) | 13 |
| FILTERS/ATTENUATORS | 14 |
| ANTENNAS..... | 14 |
| ANTENNA MAST AND EQUIPMENT TURNTABLE | 14 |
| INSTRUMENT CALIBRATION..... | 14 |
| TEST PROCEDURES | 15 |
| EUT AND CABLE PLACEMENT | 15 |
| CONDUCTED EMISSIONS..... | 15 |
| RADIATED EMISSIONS..... | 16 |
| CONDUCTED EMISSIONS FROM ANTENNA PORT | 18 |
| BANDWIDTH MEASUREMENTS | 18 |
| SPECIFICATION LIMITS AND SAMPLE CALCULATIONS | 19 |
| CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN | 19 |
| GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS | 20 |
| RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS | 20 |
| OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS | 21 |
| TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS..... | 21 |
| SAMPLE CALCULATIONS - CONDUCTED EMISSIONS | 21 |
| SAMPLE CALCULATIONS - RADIATED EMISSIONS..... | 22 |
| SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION..... | 23 |
| APPENDIX A TEST EQUIPMENT CALIBRATION DATA | 24 |
| APPENDIX B TEST DATA | 27 |
| END OF REPORT | 112 |

SCOPE

An electromagnetic emissions test has been performed on the Xirrus, Inc. model XI-N300 in the XR1000 and XR2000, pursuant to the following rules:

Industry Canada RSS-Gen Issue 3
RSS 210 Issue 8 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"
FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in Elliott Laboratories test procedures:

ANSI C63.4:2003
FCC DTS Measurement Procedure KDB558074, March 2005

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of Xirrus, Inc. model XI-N300 in the XR1000 and XR2000 complied with the requirements of the following regulations:

Industry Canada RSS-Gen Issue 3
RSS 210 Issue 8 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"
FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Xirrus, Inc. model XI-N300 in the XR1000 and XR2000 and therefore apply only to the tested sample. The sample was selected and prepared by Steve Smith of Xirrus, Inc.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY**DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHz)**

| FCC Rule Part | RSS Rule Part | Description | Measured Value / Comments | Limit / Requirement | Result |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|----------|
| 15.247(a) | RSS 210 A8.2 | Digital Modulation | Testing not performed, no changes from the original filing. Output power of test sample confirmed to be with 0.5dB of the original filing. Note 1 | | |
| 15.247 (a) (2) | RSS 210 A8.2 (1) | 6dB Bandwidth | | | |
| 15.247 (b) (3) | RSS 210 A8.2 (4) | Output Power (multipoint systems) | | | |
| 15.247(d) | RSS 210 A8.2 (2) | Power Spectral Density | | | |
| 15.247(c) | RSS 210 A8.5 | Antenna Port Spurious Emissions 30MHz – 25 GHz | | | |
| 15.247(c) / 15.209 | RSS 210 A8.5 | Radiated Spurious Emissions 30MHz – 25 GHz | 73.8 dB μ V/m @ 7313.7 MHz (-0.2 dB) | 15.207 in restricted bands, all others <-30dBc ^{Note 2} | Complies |
| Note 1: In some cases power had to be reduced from the level of the original certification to comply with the spurious emissions requirements. These are noted in the test data. | | | | | |
| Note 2: Limit of -30dBc used because the power was measured using the UNII test procedure (maximum power averaged over a transmission burst). | | | | | |

DIGITAL TRANSMISSION SYSTEMS (5725 –5850 MHz)

| FCC Rule Part | RSS Rule Part | Description | Measured Value / Comments | Limit / Requirement | Result |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|----------|
| 15.247(a) | RSS 210 A8.2 | Digital Modulation | Testing not performed, no changes from the original filing. Output power of test sample confirmed to be with 0.5dB of the original filing. Note 1 | | |
| 15.247 (a) (2) | RSS 210 A8.2 (1) | 6dB Bandwidth | | | |
| 15.247 (b) | RSS 210 A8.2 (4) | Output Power (multipoint systems) | | | |
| 15.247(d) | RSS 210 A8.2 (2) | Power Spectral Density | | | |
| 15.247(c) | RSS 210 A8.5 | Antenna Port Spurious Emissions – 30MHz – 40 GHz | | | |
| 15.247(c) / 15.209 | RSS 210 A8.5 Table 2, 3 | Radiated Spurious Emissions 30MHz – 40 GHz | 54.0 dB μ V/m @ 11491.5 MHz (0.0 dB) | 15.207 in restricted bands, all others < -20dBc <-30dBc ^{Note 2} | Complies |
| Note 1: In some cases power had to be reduced from the level of the original certification to comply with the spurious emissions requirements. These are noted in the test data. | | | | | |
| Note 2: Limit of -30dBc used because the power was measured using the UNII test procedure (maximum power averaged over a transmission burst). | | | | | |

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

| FCC Rule Part | RSS Rule part | Description | Measured Value / Comments | Limit / Requirement | Result (margin) |
|------------------------------|--------------------------|--------------------------|---------------------------------------|---------------------|-----------------|
| 15.203 | - | RF Connector | Unchanged from original filing. | | |
| 15.207 | RSS GEN Table 2 | AC Conducted Emissions | 57.4 dB μ V @ 4.716 MHz (-2.6 dB) | Refer to page 19 | Complies |
| 15.247 (b) (5) 15.407 (f) | RSS 102 | RF Exposure Requirements | Unchanged from original filing. | | |
| - | RSP 100 RSS GEN 7.1.5 | User Manual | Unchanged from original filing. | | |
| - | RSP 100 RSS GEN 7.1.5 | User Manual | Unchanged from original filing. | | |
| - | RSP 100 RSS GEN 4.4.1 | 99% Bandwidth | Unchanged from original filing. | | |

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

| Measurement Type | Measurement Unit | Frequency Range | Expanded Uncertainty |
|-----------------------------------------|------------------|-------------------|----------------------|
| RF power, conducted (power meter) | dBm | 25 to 7000 MHz | ± 0.52 dB |
| RF power, conducted (Spectrum analyzer) | dBm | 25 to 7000 MHz | ± 0.7 dB |
| Conducted emission of transmitter | dBm | 25 to 26500 MHz | ± 0.7 dB |
| Conducted emission of receiver | dBm | 25 to 26500 MHz | ± 0.7 dB |
| Radiated emission (substitution method) | dBm | 25 to 26500 MHz | ± 2.5 dB |
| Radiated emission (field strength) | dB μ V/m | 25 to 1000 MHz | ± 3.6 dB |
| | | 1000 to 40000 MHz | ± 6.0 dB |
| Conducted Emissions (AC Power) | dB μ V | 0.15 to 30 MHz | ± 2.4 dB |

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Xirrus, Inc. model XI-N300 in the XR1000 and XR2000 is an 802.11abgn 2x2 module intended to be installed in Xirrus Wireless Access Points. The module supports 802.11bgn 2x2 in the 2400-2483.5MHz, 5725-5850MHz, 5150-5250MHz, 5250-5350MHz and 5470-5725MHz bands. It additionally supports 802.11a SISO mode in the 5150-5250MHz, 5250-5350MHz and 5470-5725MHz bands at a higher per chain power. SISO modes in the other bands operate at the same output power per chain as the equivalent MIMO mode. It can operate in both 20- and 40-MHz channels in 802.11n mode. The XR1000 supports two XI-N300 modules. The XR2000 supports 4 XI-N300 modules.

For testing purposes one sample of the XI-N300 2x2 module, and one sample of a 3x3 version of the module (model number XI-N450) were installed into a Xirrus XR1000 host system. Two samples of the XI-N300 2x2 module and two samples of a 3x3 version of the module (model number XI-N450) were installed into a Xirrus XR2000 host system. During normal operation, the host system would be limited to one variety of module.

The sample was received on February 7, 2012 and tested on February 21, 22, 23, 24, and 27, and March 7, 8, 9 and 16, 2012. The EUT consisted of the following component(s):

| Company | Model | Description | Serial Number | FCC ID |
|---------|-------|-----------------|---------------|------------|
| Xirrus | N/A | 2x2 Wifi module | Various | SK6XI-N300 |

ANTENNA SYSTEM

The antenna system is integrated into the module with two antennas per module (one for each transmit-receive chain). The nominal antenna gains are 2dBi in the 2.4GHz band and 4dBi in the 5GHz bands. As the legacy modes (802.11abg) and the lower data rates in the 802.11n modes use CDD there is correlation between the transmit chains so the effective gain for MIMO operation becomes 5dBi and 7dBi in the 2.4GHz and 5GHz bands respectively.

ENCLOSURE

The EUT has no enclosure. It is designed to be installed within the enclosure of a host computer.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at Elliott.

SUPPORT EQUIPMENT

The following equipment was used as support equipment for testing:

| Company | Model | Description | Serial Number | FCC ID |
|---------|--------|----------------------|---------------|--------|
| Xirrus | XR1000 | 2 radio Access Point | - | - |
| Xirrus | XR2000 | 4 radio Access Point | - | - |

The following equipment was used as remote support equipment for emissions testing:

| Company | Model | Description | Serial Number | FCC ID |
|---------|--------------|------------------------|---------------|--------|
| HP | Compaq 6910P | PC Laptop | n/a | DoC |
| Xirrus | XP2-MSI-95M | Dual Port POE Injector | P12400043B1 | N/A |

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

| Port | Connected To | Description | Cable(s) Shielded or Unshielded | Length(m) |
|-----------------|---------------------|-------------|------------------------------------|-----------|
| POE1 | Remote POE Injector | CAT5 | Unshielded | 10 |
| Laptop Ethernet | PoE Injector | Cat 5 | Unshielded | 1 |

EUT OPERATION

The modules were installed into a host system for spurious emissions tests.

To evaluate the radiated spurious emissions related to the transmitter the module was evaluated in all operating modes (802.11b, 802.11g, 802.11a, 802.11n in both 20- and 40-MHz channels) using ART software utility to place the module(s) under test in continuous transmit modes. Both transmit chains were active for the DTS tests, NII tests were repeated in 802.11a mode with a single chain active.

For measurements at the restricted band edges one module was operating on the channel closest to the band edge. The worse case operating mode from the original filing was tested for each band. For other spurious emissions measurements multiple radios were operating simultaneously. As the host system can also house a second module, during radiated spurious emissions tests there were two radios active simultaneously during the spurious measurements. When installed into host systems the host system firmware will not allow multiple radios to operate on the same or overlapping channels, so if signals were above the limit with multiple radios active, and those signals were related to harmonics of the transmitted signal, then the measurements were repeated with only one of radio or one mode active because these harmonic emissions would only be present from one radio at any specific time.

Measurements on the host system for the frequency range 30 – 1000 MHz demonstrated that all significant emissions were from the host system. Digital device emissions from the host system above 1GHz (occurring at 2.5GHz, 5.0GHz and 7.5GHz) were excluded from the scope of this test report and will be evaluated as a part of the host system digital device tests.

AC conducted emissions measurements were made on the AC input to the Power-Over-Ethernet (PoE) injector used to power the host system. For these measurements all both radios were in a transmit/receive mode with all chains active.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

| Site | Registration Numbers | | Location |
|-----------|----------------------|---------|-----------------------------------------------|
| | FCC | Canada | |
| Chamber 3 | 769238 | 2845B-3 | 41039 Boyce Road Fremont, CA 94538-2435 |
| Chamber 4 | 211948 | 2845B-4 | |
| Chamber 5 | 211948 | 2845B-5 | |

ANSI C63.4:2003 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4:2003.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4:2003. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4:2003 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4:2003.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.4:2003 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4:2003, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

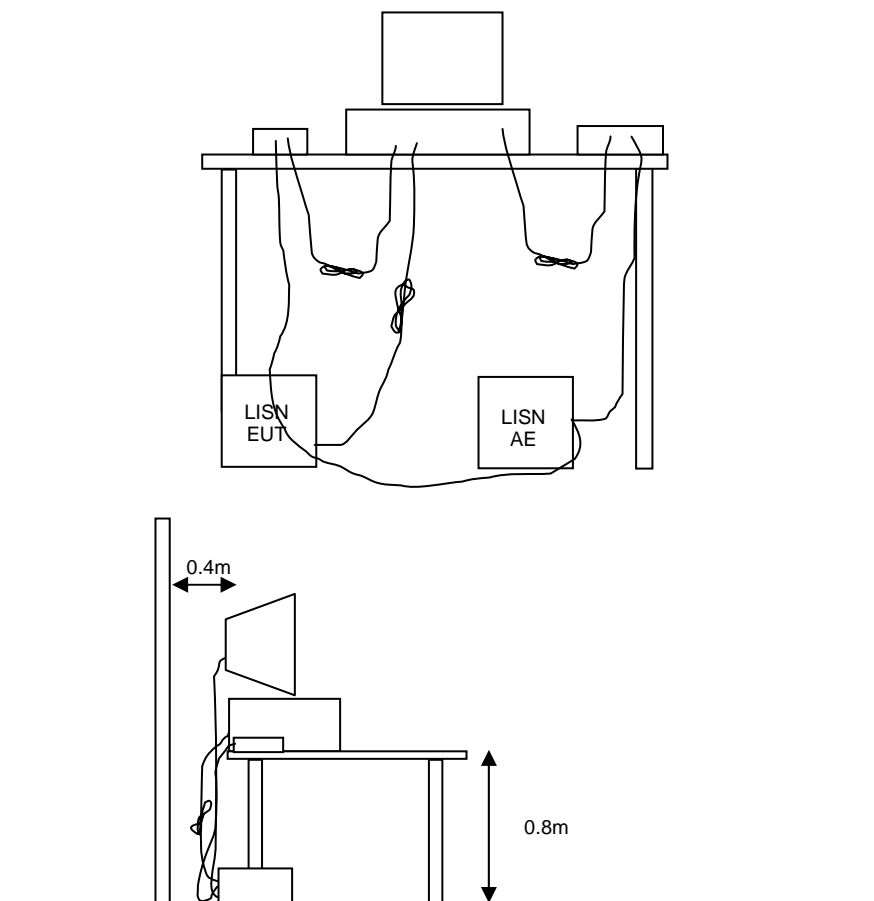


Figure 1 Typical Conducted Emissions Test Configuration


RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

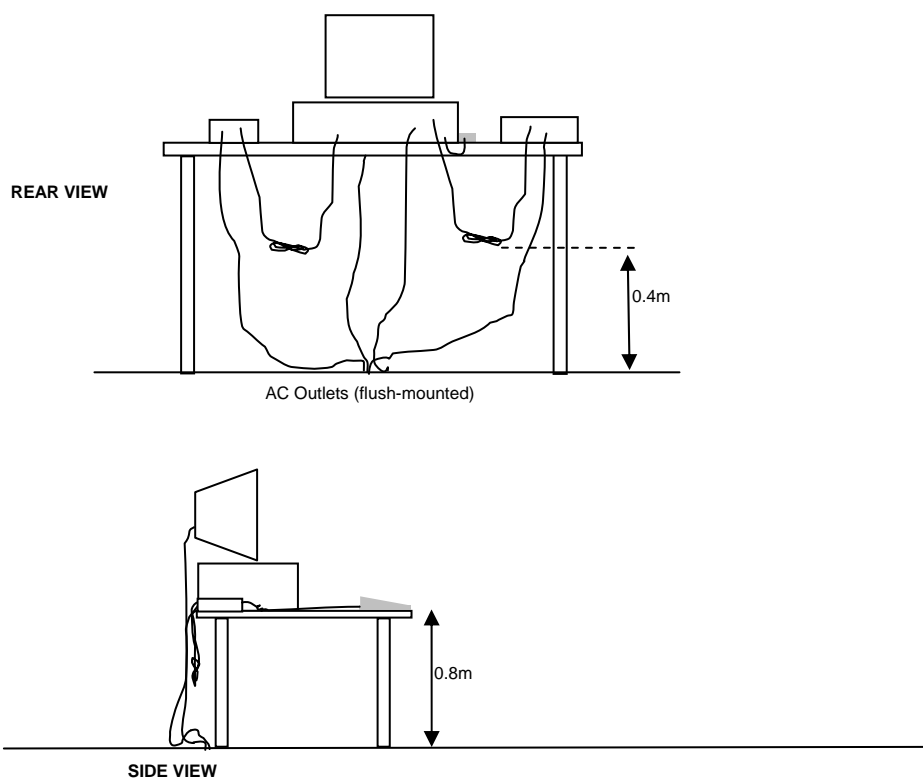


Typical Test Configuration for Radiated Field Strength Measurements

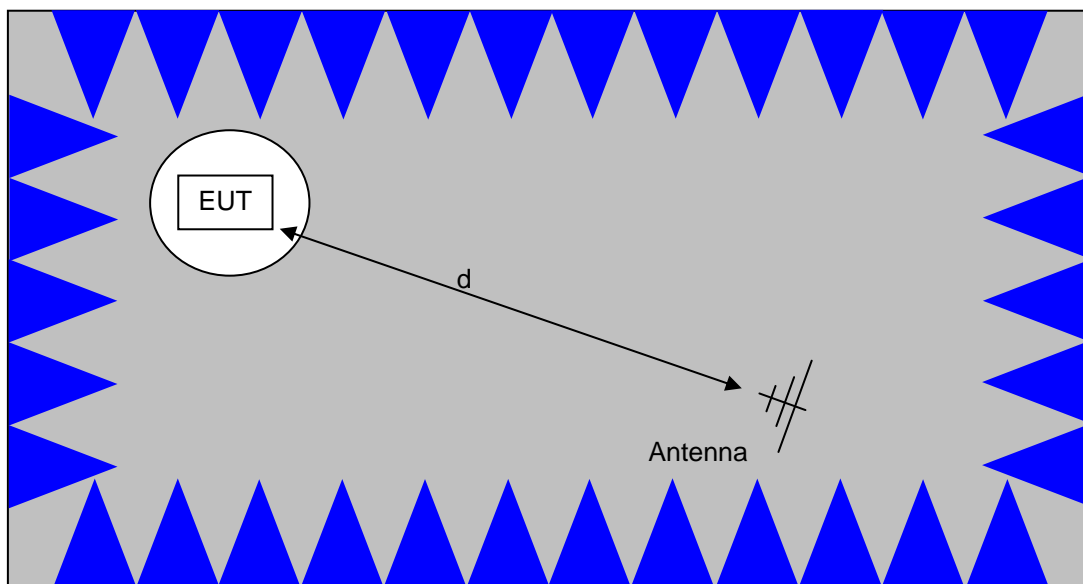

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

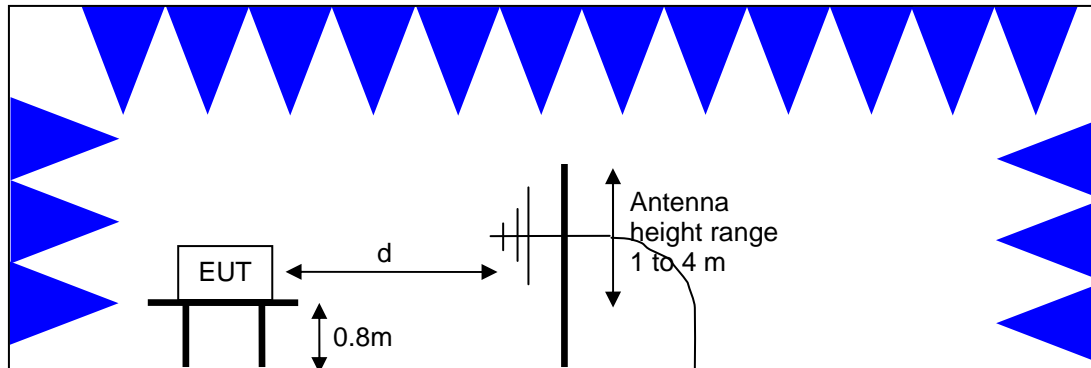

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

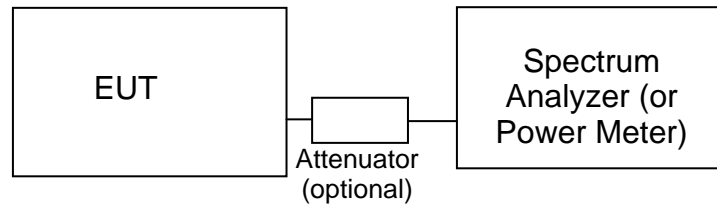**Test Configuration for Antenna Port Measurements**

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and Elliott's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB and/or 26dB signal bandwidth is measured in using the bandwidths recommended by ANSI C63.4. When required, the 99% bandwidth is measured using the methods detailed in RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

| Frequency (MHz) | Average Limit (dBuV) | Quasi Peak Limit (dBuV) |
|--------------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| 0.150 to 0.500 | Linear decrease on logarithmic frequency axis between 56.0 and 46.0 | Linear decrease on logarithmic frequency axis between 66.0 and 56.0 |
| 0.500 to 5.000 | 46.0 | 56.0 |
| 5.000 to 30.000 | 50.0 | 60.0 |

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹ (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

| Frequency Range (MHz) | Limit (uV/m) | Limit (dBuV/m @ 3m) |
|-----------------------|------------------------------|------------------------------------------------------|
| 0.009-0.490 | 2400/F _{KHz} @ 300m | 67.6-20*log ₁₀ (F _{KHz}) @ 300m |
| 0.490-1.705 | 24000/F _{KHz} @ 30m | 87.6-20*log ₁₀ (F _{KHz}) @ 30m |
| 1.705 to 30 | 30 @ 30m | 29.5 @ 30m |
| 30 to 88 | 100 @ 3m | 40 @ 3m |
| 88 to 216 | 150 @ 3m | 43.5 @ 3m |
| 216 to 960 | 200 @ 3m | 46.0 @ 3m |
| Above 960 | 500 @ 3m | 54.0 @ 3m |

RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

| Frequency Range (MHz) | Limit (uV/m @ 3m) | Limit (dBuV/m @ 3m) |
|-----------------------|-------------------|---------------------|
| 30 to 88 | 100 | 40 |
| 88 to 216 | 150 | 43.5 |
| 216 to 960 | 200 | 46.0 |
| Above 960 | 500 | 54.0 |

¹ The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

| Operating Frequency (MHz) | Output Power | Power Spectral Density |
|---------------------------|-----------------|------------------------|
| 902 – 928 | 1 Watt (30 dBm) | 8 dBm/3kHz |
| 2400 – 2483.5 | 1 Watt (30 dBm) | 8 dBm/3kHz |
| 5725 – 5850 | 1 Watt (30 dBm) | 8 dBm/3kHz |

The maximum permitted output power is reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5850 MHz band are not subject to this restriction.

TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 210. All other unwanted (spurious) emissions shall be at least 20dB below the level of the highest in-band signal level (30dB if the power is measured using the sample detector/power averaging method).

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

R_r = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{d} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

Appendix A Test Equipment Calibration Data

T86381

Radio Antenna Port (Power and Spurious Emissions), 09-Feb-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|---------------------------------|--------------------------|----------------|----------------|
| Rohde & Schwarz | EMI Test Receiver, 20 Hz-40 GHz | ESIB40 (1088.7490.40) | 2493 | 12/9/2012 |

Radio Antenna Port (Power and Spurious Emissions), 17-Feb-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|--------------------------------|--------------|----------------|----------------|
| Rohde & Schwarz | EMI Test Receiver, 20 Hz-7 GHz | ESIB7 | 1756 | 4/6/2012 |

Radiated Emissions, 1000 - 18,000 MHz, 22-Feb-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|-------------------------------------|----------------|----------------|----------------|
| Hewlett Packard | Microwave Preamplifier, 1-26.5GHz | 8449B | 263 | 12/9/2012 |
| EMCO | Antenna, Horn, 1-18GHz | 3115 | 868 | 6/8/2012 |
| Hewlett Packard | SpecAn 30 Hz -40 GHz, SV (SA40) Red | 8564E (84125C) | 1148 | 8/15/2012 |
| Micro-Tronics | Band Reject Filter, 2400-2500 MHz | BRM50702-02 | 2249 | 10/11/2012 |

Radiated Emissions, 1000 - 18,000 MHz, 25-Feb-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|--------------------------------------|----------------|----------------|----------------|
| EMCO | Antenna, Horn, 1-18 GHz (SA40-Red) | 3115 | 1142 | 8/2/2012 |
| Micro-Tronics | Band Reject Filter, 5725-5875 MHz | BRC50705-02 | 1682 | 3/23/2012 |
| Hewlett Packard | Microwave Preamplifier, 1-26.5GHz | 8449B | 2199 | 2/23/2013 |
| Hewlett Packard | SpecAn 9 kHz - 40 GHz, (SA40) Purple | 8564E (84125C) | 2415 | 7/28/2012 |

Radiated Emissions, 1000 - 18,000 MHz, 28-Feb-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|---------------------------------------|----------------|----------------|----------------|
| Hewlett Packard | Microwave Preamplifier, 1-26.5GHz | 8449B | 785 | 5/18/2012 |
| Hewlett Packard | SpecAn 9 kHz - 40 GHz, FT (SA40) Blue | 8564E (84125C) | 1393 | 8/9/2012 |
| EMCO | Antenna, Horn, 1-18 GHz | 3115 | 1561 | 6/22/2012 |
| Micro-Tronics | Band Reject Filter, 5150-5350 MHz | BRC50703-02 | 2251 | 10/11/2012 |

Radiated Emissions, 1000 - 18,000 MHz, 29-Feb-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|----------------------------------------|--------------------------|----------------|----------------|
| Hewlett Packard | Microwave Preamplifier, 1-26.5GHz | 8449B | 263 | 12/9/2012 |
| EMCO | Antenna, Horn, 1-18GHz | 3115 | 868 | 6/8/2012 |
| Hewlett Packard | SpecAn 30 Hz -40 GHz, SV (SA40) Red | 8564E (84125C) | 1148 | 8/15/2012 |
| Hewlett Packard | High Pass filter, 8.2 GHz (Blu System) | P/N 84300-80039 (84125C) | 1392 | 5/3/2012 |
| Micro-Tronics | Band Reject Filter, 5150-5350 MHz | BRC50703-02 | 2251 | 10/11/2012 |

Radiated Emissions, 1000 - 18,000 MHz, 01-Mar-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|---------------------------------------|----------------|----------------|----------------|
| Hewlett Packard | Microwave Preamplifier, 1-26.5GHz | 8449B | 785 | 5/18/2012 |
| Hewlett Packard | SpecAn 9 kHz - 40 GHz, FT (SA40) Blue | 8564E (84125C) | 1393 | 8/9/2012 |
| EMCO | Antenna, Horn, 1-18 GHz | 3115 | 1561 | 6/22/2012 |
| Micro-Tronics | Band Reject Filter, 5150-5350 MHz | BRC50703-02 | 2239 | 10/4/2012 |
| Micro-Tronics | Band Reject Filter, 5470-5725 MHz | BRC50704-02 | 2240 | 10/4/2012 |

Radiated Emissions, 1000 - 40,000MHz, 07-Mar-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|-------------------------------------|----------------|----------------|----------------|
| Hewlett Packard | Microwave Preamplifier, 1-26.5GHz | 8449B | 263 | 12/9/2012 |
| EMCO | Antenna, Horn, 1-18 GHz (SA40-Red) | 3115 | 1142 | 8/2/2012 |
| Hewlett Packard | SpecAn 30 Hz -40 GHz, SV (SA40) Red | 8564E (84125C) | 1148 | 8/15/2012 |

Radio Antenna Port (Power and Spurious Emissions), 15-Mar-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|---------------------------------------------------------------------------|--------------|----------------|----------------|
| Rohde & Schwarz | Power Meter, Single Channel | NRVS | 1422 | 12/13/2012 |
| Rohde & Schwarz | Power Sensor 100 uW - 2 Watts use with 20dB attenuator sn:100059 only | NRV-Z32 | 1423 | 9/1/2012 |
| Agilent | PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYX, | E4446A | 2139 | 2/23/2013 |

T86500

Radio Antenna Port (Power and Spurious Emissions), 09-Feb-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|---------------------------------|-----------------------|----------------|----------------|
| Rohde & Schwarz | EMI Test Receiver, 20 Hz-40 GHz | ESIB40 (1088.7490.40) | 2493 | 12/9/2012 |

Radiated Emissions, 1,000 - 6,000 MHz, 21-Feb-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|--------------------------------|--------------|----------------|----------------|
| EMCO | Antenna, Horn, 1-18 GHz | 3115 | 487 | 7/6/2012 |
| Rohde & Schwarz | EMI Test Receiver, 20 Hz-7 GHz | ESIB7 | 1756 | 4/6/2012 |

Radiated Emissions, 1000 - 18,000 MHz, 23-Feb-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|--------------------------------------|----------------|----------------|----------------|
| EMCO | Antenna, Horn, 1-18 GHz | 3115 | 1561 | 6/22/2012 |
| Micro-Tronics | Band Reject Filter, 2400-2500 MHz | BRM50702-02 | 1683 | 8/3/2012 |
| Hewlett Packard | Microwave Preamplifier, 1-26.5GHz | 8449B | 2199 | 2/23/2012 |
| Hewlett Packard | SpecAn 9 kHz - 40 GHz, (SA40) Purple | 8564E (84125C) | 2415 | 7/28/2012 |

Radiated Emissions, 1,000 - 26,500 MHz, 23-Feb-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|-----------------------------------|----------------|----------------|----------------|
| Hewlett Packard | Microwave Preamplifier, 1-26.5GHz | 8449B | 785 | 5/18/2012 |
| Hewlett Packard | SpecAn 9 kHz - 40 GHz, FT | 8564E (84125C) | 1393 | 8/9/2012 |

| | | | | |
|-----------------|------------------------------------------|--------------------|------|-----------|
| EMCO | (SA40) Blue Antenna, Horn, 1-18 GHz | 3115 | 1561 | 6/22/2012 |
| Micro-Tronics | Band Reject Filter, 2400-2500 MHz | BRM50702-02 | 1683 | 8/3/2012 |
| Hewlett Packard | HF Amplifier, 45 MHz -50 GHz (with 1620) | 83051A (84125C) | 1742 | 5/9/2012 |
| Hewlett Packard | HF Amplifier, 45 MHz -50 GHz (with 1620) | 83051A (84125C) | 1743 | 5/9/2012 |
| A.H. Systems | Blue System Horn, 18-40GHz | SAS-574, p/n: 2581 | 2159 | 3/23/2012 |

Radiated Emissions, 1,000 - 18,000 MHz, 24-Feb-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|--------------------------------------|----------------|----------------|----------------|
| EMCO | Antenna, Horn, 1-18 GHz (SA40-Red) | 3115 | 1142 | 8/2/2012 |
| Micro-Tronics | Band Reject Filter, 5725-5875 MHz | BRC50705-02 | 1682 | 3/23/2012 |
| Hewlett Packard | Microwave Preamplifier, 1-26.5GHz | 8449B | 2199 | 2/23/2013 |
| Micro-Tronics | Band Reject Filter, 2400-2500 MHz | BRM50702-02 | 2249 | 10/11/2012 |
| Hewlett Packard | SpecAn 9 kHz - 40 GHz, (SA40) Purple | 8564E (84125C) | 2415 | 7/28/2012 |

Radiated Spurious Emissions, 1000 - 18,000 MHz, 08-Mar-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|-------------------------------------|----------------|----------------|----------------|
| Hewlett Packard | Microwave Preamplifier, 1-26.5GHz | 8449B | 263 | 12/9/2012 |
| EMCO | Antenna, Horn, 1-18GHz | 3115 | 868 | 6/8/2012 |
| Hewlett Packard | SpecAn 30 Hz -40 GHz, SV (SA40) Red | 8564E (84125C) | 1148 | 8/15/2012 |
| Micro-Tronics | Band Reject Filter, 5725-5875 MHz | BRC50705-02 | 1728 | 3/21/2012 |

Radiated Spurious Emissions, 1 - 18 GHz, 09-Mar-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|---------------------------------------|----------------|----------------|----------------|
| Hewlett Packard | Microwave Preamplifier, 1-26.5GHz | 8449B | 785 | 5/18/2012 |
| EMCO | Antenna, Horn, 1-18 GHz (SA40-Red) | 3115 | 1142 | 8/2/2012 |
| Hewlett Packard | SpecAn 9 kHz - 40 GHz, FT (SA40) Blue | 8564E (84125C) | 1393 | 8/9/2012 |
| Micro-Tronics | Band Reject Filter, 5725-5875 MHz | BRC50705-02 | 2241 | 10/4/2012 |

T86343

Conducted Emissions - AC Power Ports, 06-Apr-12

| <u>Manufacturer</u> | <u>Description</u> | <u>Model</u> | <u>Asset #</u> | <u>Cal Due</u> |
|---------------------|-------------------------------------|---------------------|----------------|----------------|
| Rohde & Schwarz | Pulse Limiter | ESH3 Z2 | 1594 | 5/17/2012 |
| Rohde & Schwarz | EMI Test Receiver, 20 Hz-7 GHz | ESIB7 | 1630 | 4/13/2012 |
| Fischer Custom Comm | LISN, 25A, 150kHz to 30MHz, 25 Amp, | FCC-LISN-50-25-2-09 | 2001 | 2/15/2013 |

Appendix B Test Data

T86381 Pages 28 – 79
T86500 Pages 80 – 107
T86343 Pages 108 - 111



EMC Test Data

| | | | |
|------------------------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| | | Account Manager: | Michelle Kim |
| Contact: | Steve Smith | | - |
| Emissions Standard(s): | FCC 15.247/15.E/RSS-210 | Class: | - |
| Immunity Standard(s): | - | Environment: | - |

EMC Test Data

For The

Xirrus

Model

XI-N300 (2x2 radio module) in XR1000

Date of Last Test: 5/21/2012

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XL-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions - Band Edges

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

| Run # | Mode | Channel | Power Setting | Measured Power | Test Performed | Limit | Result / Margin |
|-------|---------|-----------------|---------------|----------------|--------------------------------------|---------------------------------|---------------------------------------|
| 1 | 802.11g | low 2412MHz | 28.0 | - | Restricted Band Edge (2390 MHz) | FCC Part 15.209 / 15.247(c) | 52.8 dBµV/m @ 2389.3 MHz (-1.2 dB) |
| | | high 2462MHz | 24.0 | - | Restricted Band Edge (2483.5 MHz) | FCC Part 15.209 / 15.247(c) | 53.0 dBµV/m @ 2483.6 MHz (-1.0 dB) |

Testing was performed on the worse case mode from the original filing. - 802.11g
Power was set to be within 0.5dB of the original filing power.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #1: Radiated Spurious Emissions, 30 - 26500 MHz. Operating Mode: 802.11g MHz, 2x2

Date of Test: 2/21/2012

Test Location: FT Chamber #3


Test Engineer: Rafael Varelas

Run #1a: Channel 1@ 2412 MHz, Radio #4

Band Edge Signal Field Strength - Direct measurement of field strength

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|----------------------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| 2389.270 | 52.8 | V | 54.0 | -1.2 | AVG | 10 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 2389.500 | 69.4 | V | 74.0 | -4.6 | PK | 10 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 2389.980 | 50.5 | H | 54.0 | -3.5 | AVG | 85 | 1.7 | RB 1 MHz;VB 10 Hz;Pk |
| 2389.810 | 67.0 | H | 74.0 | -7.0 | PK | 85 | 1.7 | RB 1 MHz;VB 3 MHz;Pk |

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace) Vertical

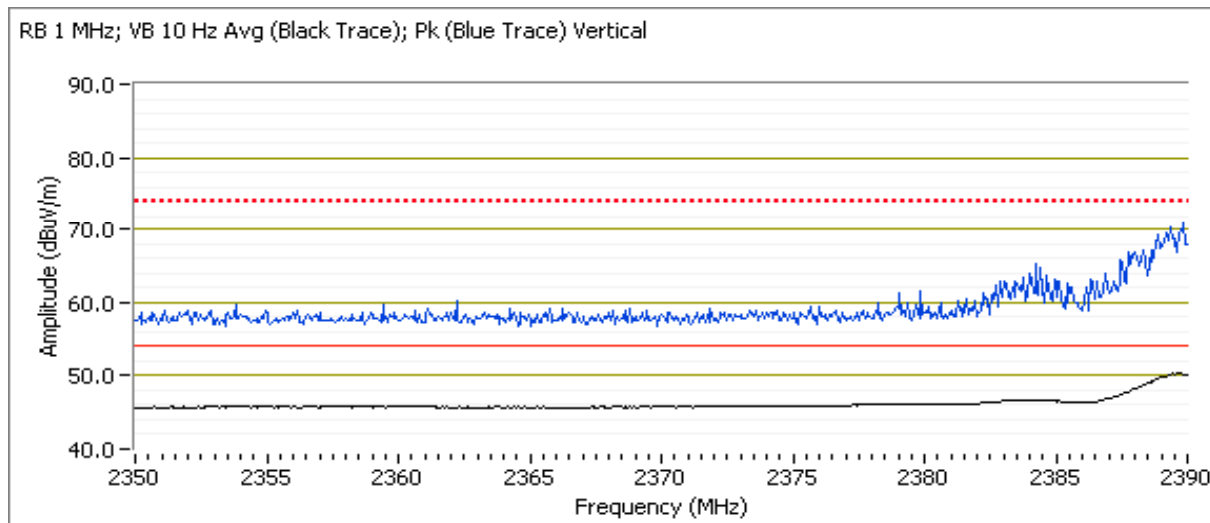


| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

High Channel @ 2462 MHz, Radio #4

Band Edge Signal Field Strength - Direct measurement of field strength

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|----------------------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| 2483.580 | 53.0 | H | 54.0 | -1.0 | AVG | 107 | 1.3 | RB 1 MHz;VB 10 Hz;Pk |
| 2484.010 | 69.3 | H | 74.0 | -4.7 | PK | 107 | 1.3 | RB 1 MHz;VB 3 MHz;Pk |
| 2483.520 | 52.6 | V | 54.0 | -1.4 | AVG | 19 | 1.2 | RB 1 MHz;VB 10 Hz;Pk |
| 2483.540 | 70.7 | V | 74.0 | -3.3 | PK | 19 | 1.2 | RB 1 MHz;VB 3 MHz;Pk |

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace) Horizontal

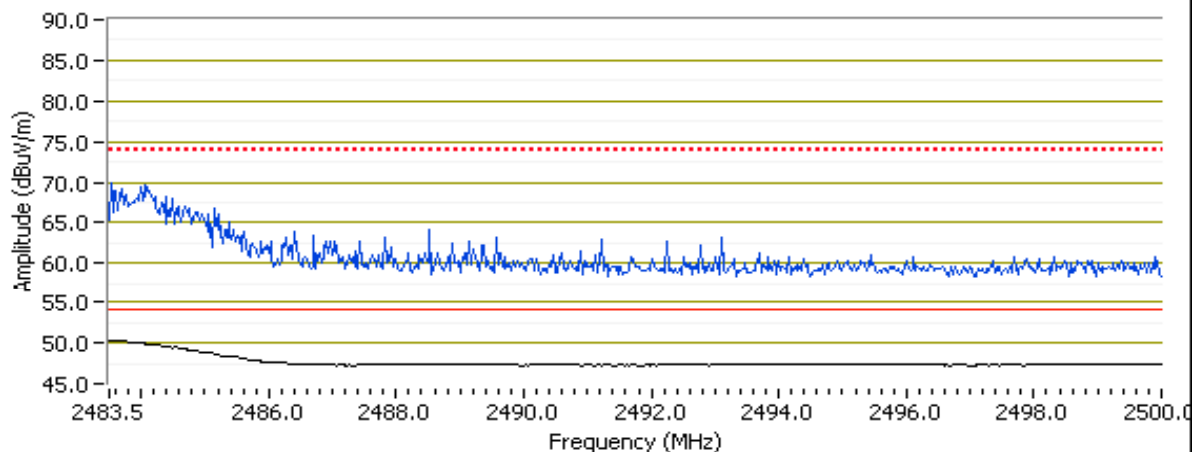

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions 2x2 and 3x3 Modules - 802.11b, 802.11g, HT20 Modes

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

| Run # | Mode | Channel | Power Setting | Measured Power | Test Performed | Limit | Result / Margin |
|-------|------------|--------------------------------|---------------|----------------|-----------------------------------|--------------------------------|-------------------------------------|
| 1 | 802.11b | 2x2: 2412 MHz 3x3: 2462 MHz | 33.0* 38.0 | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 52.9 dBµV/m @ 4824.0 MHz (-1.1 dB) |
| 2 | 802.11b | 2x2: 2462 MHz 3x3: 2412 MHz | 30.0* 37.0 | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 52.6 dBµV/m @ 4924.0 MHz (-1.4 dB) |
| 3 | 802.11b | 2x2: 2437 MHz 3x3: 2437 MHz | 30.0* 40.0 | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 53.1 dBµV/m @ 4874.0 MHz (-0.9 dB) |
| 4 | 802.11g | 2x2: 2412 MHz 3x3: 2462 MHz | 28.0 32.0 | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 44.0 dBµV/m @ 7390.1 MHz (-10.0 dB) |
| 5 | 802.11g | 2x2: 2462 MHz 3x3: 2412 MHz | 24.0 28.0 | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 44.3 dBµV/m @ 4000.0 MHz (-9.7 dB) |
| 6 | 802.11g | 2x2: 2437 MHz 3x3: 2437 MHz | 31.0* 39.0 | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 73.1 dBµV/m @ 7315.1 MHz (-0.9 dB) |
| 7 | 802.11HT20 | 2x2: 2412 MHz 3x3: 2462 MHz | 26.0 25.0 | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 43.2 dBµV/m @ 4000.0 MHz (-10.8 dB) |
| 8 | 802.11HT20 | 2x2: 2462 MHz 3x3: 2412 MHz | 24.0 28.0 | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 43.2 dBµV/m @ 4000.0 MHz (-10.8 dB) |
| 9 | 802.11HT20 | 2x2: 2437 MHz 3x3: 2437 MHz | 34.0 35.0 | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 73.8 dBµV/m @ 7313.7 MHz (-0.2 dB) |

Note: * - indicates power reduced from original certification

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

System Configuration:

| Radio # | Frequency | Module | Mode | Radio # | Frequency | Module | Mode |
|---------------|-----------|--------|------------|---------------|-----------|--------|------------|
| Run: 1 | | | | Run: 2 | | | |
| 1 | 2412 | 2x2 | 802.11b | 1 | 2462 | 2x2 | 802.11b |
| 0 | 2462 | 3x3 | 802.11b | 0 | 2412 | 3x3 | 802.11b |
| Run: 3 | | | | | | | |
| 1 | 2437 | 2x2 | 802.11b | | | | |
| 0 | 2437 | 3x3 | 802.11b | | | | |
| Run: 4 | | | | Run: 5 | | | |
| 1 | 2412 | 2x2 | 802.11g | 1 | 2462 | 2x2 | 802.11g |
| 0 | 2462 | 3x3 | 802.11g | 0 | 2412 | 3x3 | 802.11g |
| Run: 6 | | | | | | | |
| 1 | 2437 | 2x2 | 802.11g | | | | |
| 0 | 2437 | 3x3 | 802.11g | | | | |
| Run: 7 | | | | Run: 8 | | | |
| 1 | 2412 | 2x2 | 802.11HT20 | 1 | 2462 | 2x2 | 802.11HT20 |
| 0 | 2462 | 3x3 | 802.11HT20 | 0 | 2412 | 3x3 | 802.11HT20 |
| Run: 9 | | | | | | | |
| 1 | 2437 | 2x2 | 802.11HT20 | | | | |
| 0 | 2437 | 3x3 | 802.11HT20 | | | | |

Notes - Multiple radios operating at the same time as shown above. In all cases, power set to the maximum worse case single channel power, transmitting on all chains.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #1: Radiated Spurious Emissions, 1-26.5GHz. 802.11b - 2x2 and 3x3 modules.

Date of Test: 2/22/2012

Test Location: FT Chamber #5

Test Engineer: Rafael Varelas


Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------------------------------------------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|----------------------------------|
| MHz | dBμV/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| Power setting = 33 (Channel 1 - 2x2), Power setting = 38 (Channel 11 - 3x3) | | | | | | | | |
| 4823.980 | 52.9 | V | 54.0 | -1.1 | AVG | 90 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 4823.780 | 57.0 | V | 74.0 | -17.0 | PK | 90 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 3999.990 | 43.2 | V | 54.0 | -10.8 | AVG | 59 | 1.6 | RB 1 MHz;VB 10 Hz;Pk |
| 4000.010 | 48.6 | V | 74.0 | -25.4 | PK | 59 | 1.6 | RB 1 MHz;VB 3 MHz;Pk |
| 4924.010 | 43.1 | V | 54.0 | -10.9 | AVG | 31 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 4924.020 | 48.2 | V | 74.0 | -25.8 | PK | 31 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 9647.870 | 60.1 | V | - | - | PK | 165 | 1.2 | RB 100 kHz;VB 100 kHz;Pk, note 2 |
| 1880.430 | 54.3 | V | - | - | Peak | 62 | 1.3 | note 2 |
| 7237.060 | 50.3 | V | - | - | Peak | 64 | 1.6 | note 2 |

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.

Note 3: No significant emissions were observed for 18-26GHz

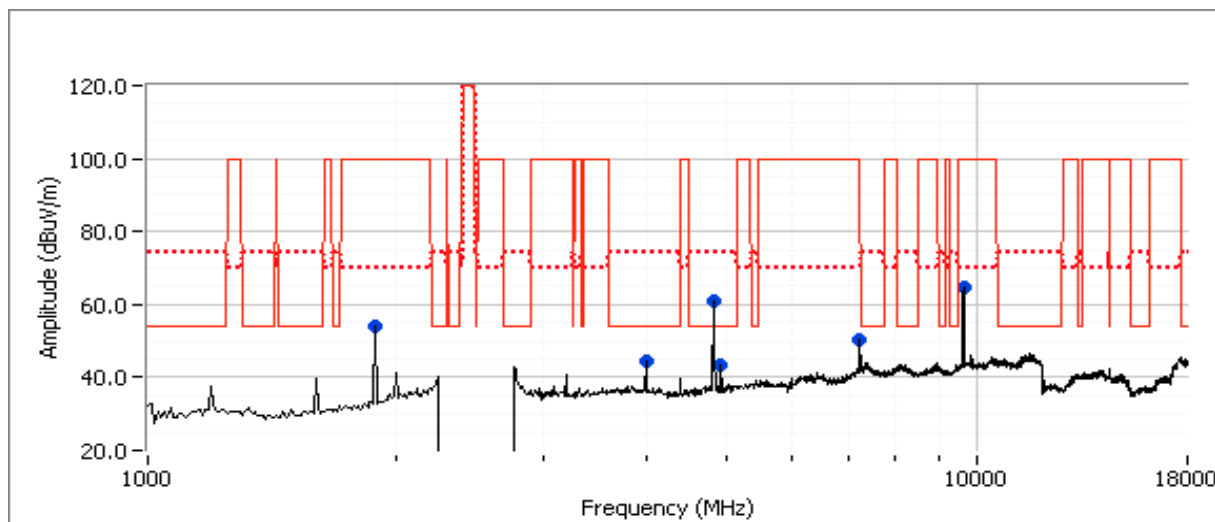

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #2: Radiated Spurious Emissions, 1-26.5GHz. 802.11b - 2x2 and 3x3 modules.

Date of Test: 2/22/2012

Test Location: FT Chamber #5

Test Engineer: Rafael Varelas


Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------------------------------------------------------------------------|--------------|-----|-----------------|--------|-----------|---------|--------|----------------------------------|
| MHz | dB μ V/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| Power setting = 30 (Channel 11 - 2x2), Power setting = 37 (Channel 1 - 3x3) | | | | | | | | |
| 4923.970 | 52.6 | V | 54.0 | -1.4 | AVG | 168 | 1.2 | RB 1 MHz;VB 10 Hz;Pk |
| 4924.010 | 54.6 | V | 74.0 | -19.4 | PK | 168 | 1.2 | RB 1 MHz;VB 3 MHz;Pk |
| 9847.880 | 56.8 | V | - | - | PK | 184 | 1.6 | RB 100 kHz;VB 100 kHz;Pk, note 2 |
| 7383.000 | 44.3 | V | 54.0 | -9.7 | AVG | 126 | 1.6 | RB 1 MHz;VB 10 Hz;Pk |
| 7382.580 | 52.5 | V | 74.0 | -21.5 | PK | 126 | 1.6 | RB 1 MHz;VB 3 MHz;Pk |
| 4000.010 | 44.3 | V | 54.0 | -9.7 | AVG | 53 | 1.3 | RB 1 MHz;VB 10 Hz;Pk |
| 3999.980 | 49.5 | V | 74.0 | -24.5 | PK | 53 | 1.3 | RB 1 MHz;VB 3 MHz;Pk |
| 4824.020 | 45.4 | V | 54.0 | -8.6 | AVG | 266 | 1.9 | RB 1 MHz;VB 10 Hz;Pk |
| 4824.120 | 49.9 | V | 74.0 | -24.1 | PK | 266 | 1.9 | RB 1 MHz;VB 3 MHz;Pk |
| 1880.000 | 62.3 | V | - | - | Peak | 234 | 1.0 | random spike |

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.

Note 3: No significant emissions were observed for 18-26GHz

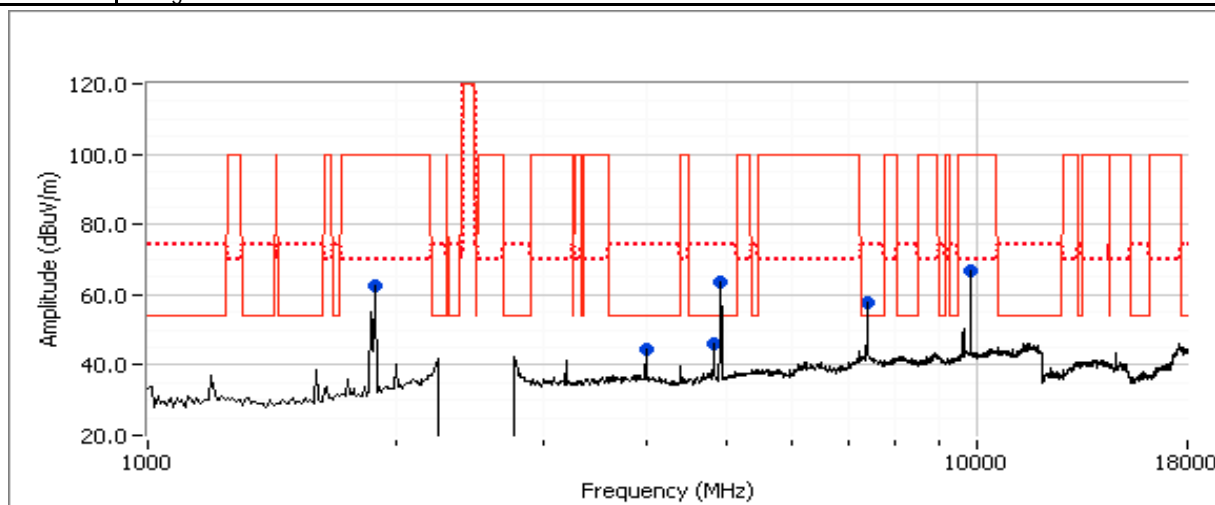

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #3: Radiated Spurious Emissions, 1-26.5GHz. 802.11b - 2x2 and 3x3 modules.

Date of Test: 2/22/2012

Test Location: FT Chamber #5

Test Engineer: Rafael Varelas


Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|----------------------------------------------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|----------------------------------|
| MHz | dBμV/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| Power setting = 30 (Channel 6 - 2x2), Power setting = 40 (Channel 6 - 3x3) | | | | | | | | |
| 4873.950 | 53.1 | V | 54.0 | -0.9 | AVG | 152 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 4874.180 | 57.0 | V | 74.0 | -17.0 | PK | 152 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 9747.880 | 60.1 | V | - | - | PK | 187 | 1.4 | RB 100 kHz;VB 100 kHz;Pk, note 2 |
| 3999.980 | 43.9 | V | 54.0 | -10.1 | AVG | 64 | 1.5 | RB 1 MHz;VB 10 Hz;Pk |
| 3999.790 | 48.8 | V | 74.0 | -25.2 | PK | 64 | 1.5 | RB 1 MHz;VB 3 MHz;Pk |
| 7309.920 | 46.4 | V | 54.0 | -7.6 | AVG | 45 | 1.5 | RB 1 MHz;VB 10 Hz;Pk |
| 7310.200 | 54.0 | V | 74.0 | -20.0 | PK | 45 | 1.5 | RB 1 MHz;VB 3 MHz;Pk |
| 12186.720 | 42.9 | V | 54.0 | -11.1 | AVG | 52 | 1.1 | RB 1 MHz;VB 10 Hz;Pk |
| 12186.170 | 49.2 | V | 74.0 | -24.8 | PK | 52 | 1.1 | RB 1 MHz;VB 3 MHz;Pk |
| 1882.880 | 51.1 | V | - | - | Peak | 312 | 1.3 | Note 2 |

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.

Note 3: No significant emissions were observed for 18-26GHz

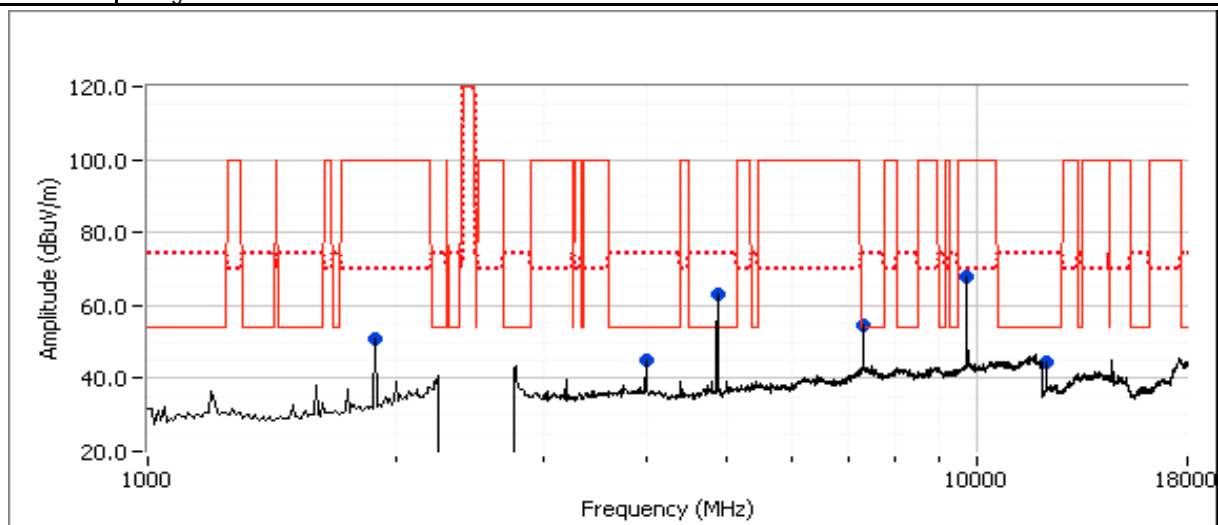

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #4: Radiated Spurious Emissions, 1-26.5GHz. 802.11g - 2x2 and 3x3 modules.

Date of Test: 2/22/2012


Test Location: FT Chamber #5

Test Engineer: Rafael Varelas

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|----------------------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| 7390.050 | 44.0 | V | 54.0 | -10.0 | AVG | 238 | 1.5 | RB 1 MHz;VB 10 Hz;Pk |
| 7390.650 | 56.4 | V | 74.0 | -17.6 | PK | 238 | 1.5 | RB 1 MHz;VB 3 MHz;Pk |
| 4825.650 | 40.1 | V | 54.0 | -13.9 | AVG | 26 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 4824.500 | 54.0 | V | 74.0 | -20.0 | PK | 26 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 3999.970 | 44.0 | V | 54.0 | -10.0 | AVG | 74 | 1.5 | RB 1 MHz;VB 10 Hz;Pk |
| 4000.200 | 48.7 | V | 74.0 | -25.3 | PK | 74 | 1.5 | RB 1 MHz;VB 3 MHz;Pk |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification. |
| Note 3: | No significant emissions were observed for 18-26GHz |

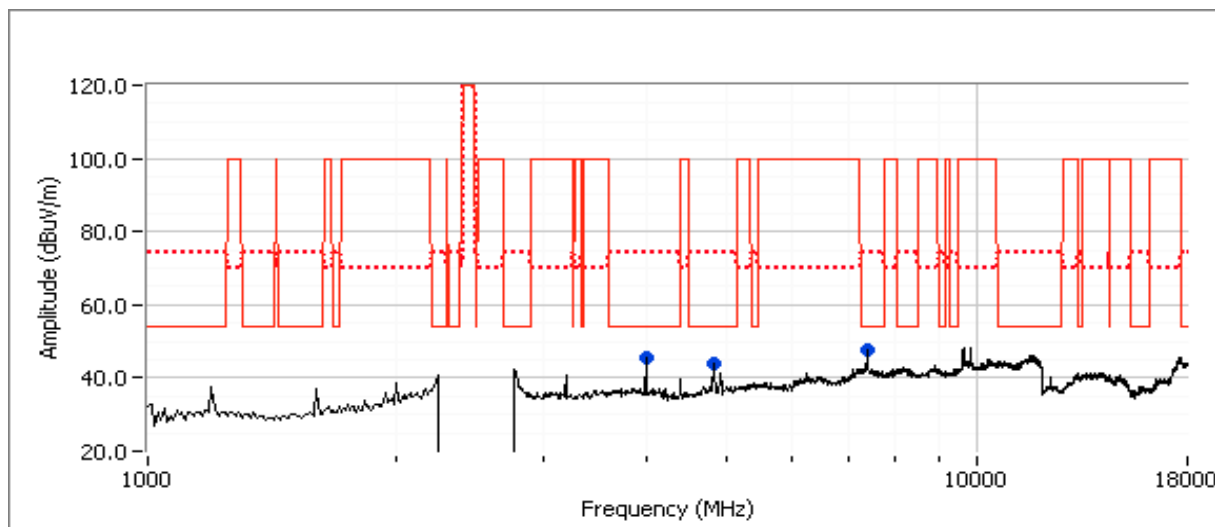

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #5: Radiated Spurious Emissions, 1-26.5GHz. 802.11g - 2x2 and 3x3 modules.

Date of Test: 2/22/2012

Test Location: FT Chamber #5

Test Engineer: Rafael Varelas


Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|----------------------|
| MHz | dBμV/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| 4000.040 | 44.3 | V | 54.0 | -9.7 | AVG | 60 | 1.5 | RB 1 MHz;VB 10 Hz;Pk |
| 3999.790 | 49.3 | V | 74.0 | -24.7 | PK | 60 | 1.5 | RB 1 MHz;VB 3 MHz;Pk |
| 7250.050 | 40.0 | V | 54.0 | -14.0 | AVG | 317 | 1.2 | RB 1 MHz;VB 10 Hz;Pk |
| 7250.560 | 53.3 | V | 74.0 | -20.7 | PK | 317 | 1.2 | RB 1 MHz;VB 3 MHz;Pk |
| 4922.890 | 38.2 | V | 54.0 | -15.8 | AVG | 153 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 4923.090 | 52.8 | V | 74.0 | -21.2 | PK | 153 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.

Note 3: No significant emissions were observed for 18-26GHz

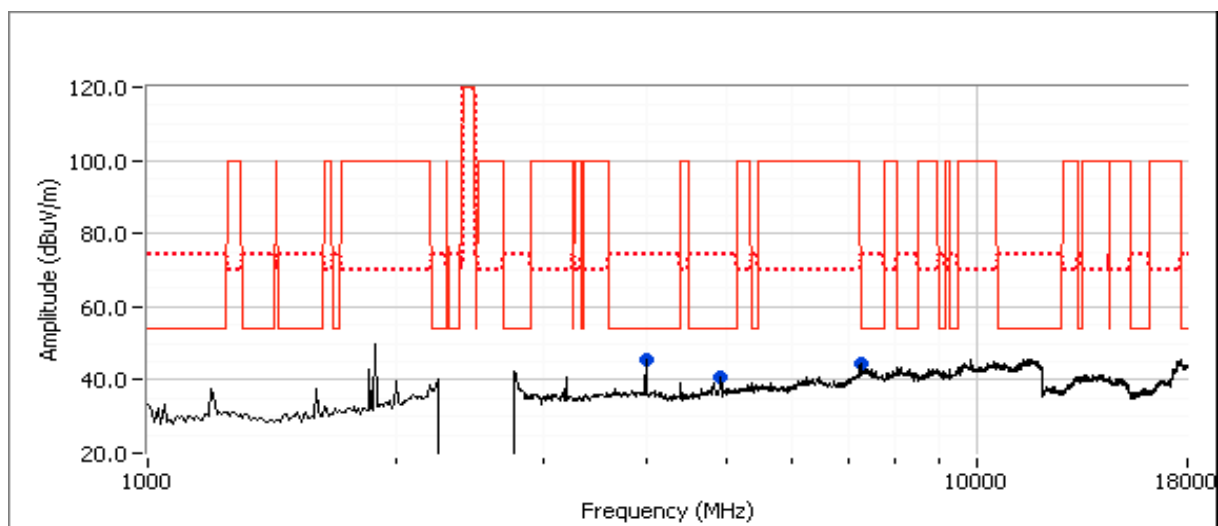

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #6: Radiated Spurious Emissions, 1-26.5GHz. 802.11g - 2x2 and 3x3 modules.

Date of Test: 2/22/2012

Test Location: FT Chamber #5

Test Engineer: Rafael Varelas


Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|----------------------------------------------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|----------------------|
| MHz | dBμV/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| Power setting = 31 (Channel 6 - 2x2), Power setting = 39 (Channel 6 - 3x3) | | | | | | | | |
| 7315.130 | 73.1 | V | 74.0 | -0.9 | PK | 52 | 1.3 | RB 1 MHz;VB 3 MHz;Pk |
| 7310.430 | 45.4 | V | 54.0 | -8.6 | AVG | 52 | 1.3 | RB 1 MHz;VB 10 Hz;Pk |
| 4000.000 | 44.9 | V | 54.0 | -9.1 | AVG | 64 | 1.5 | RB 1 MHz;VB 10 Hz;Pk |
| 4000.020 | 49.6 | V | 74.0 | -24.4 | PK | 64 | 1.5 | RB 1 MHz;VB 3 MHz;Pk |
| 4873.460 | 45.4 | V | 54.0 | -8.6 | AVG | 152 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 4877.290 | 58.6 | V | 74.0 | -15.4 | PK | 152 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 9753.960 | 56.5 | V | - | - | Peak | 174 | 1.6 | Note 2 |

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.

Note 3: No significant emissions were observed for 18-26GHz

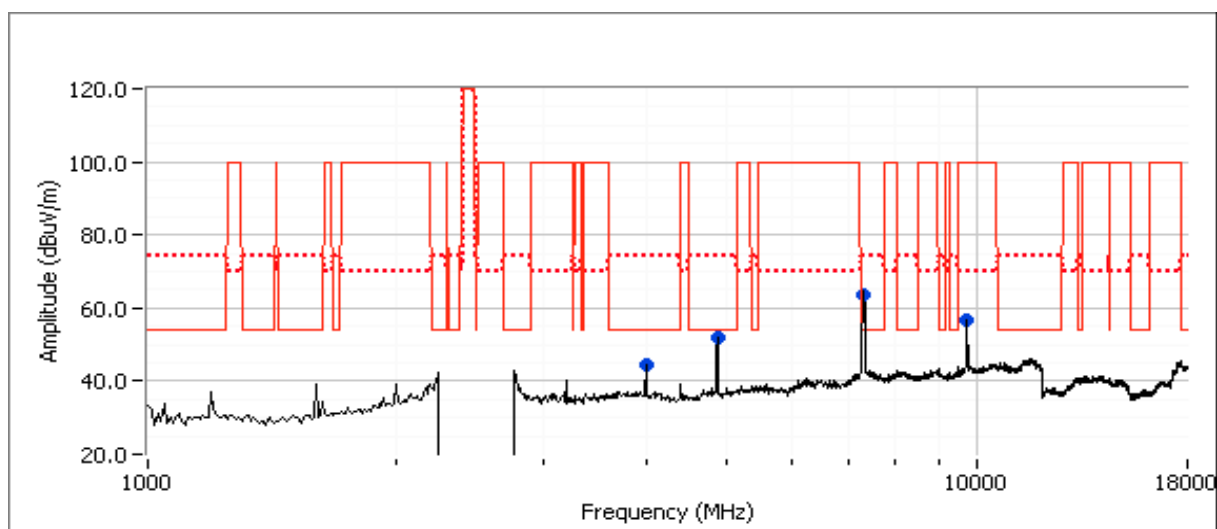

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #7: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT20 - 2x2 and 3x3 modules.

Date of Test: 2/23/2012

Test Location: Chamber #4

Test Engineer: Vishal Narayan


Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------------------------------------------------------------------------|--------------|-----|-----------------|--------|-----------|---------|--------|----------------------|
| MHz | dB μ V/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| Power setting = 26 (Channel 1 - 2x2), Power setting = 25 (Channel 11 - 3x3) | | | | | | | | |
| 4826.200 | 35.0 | V | 54.0 | -19.0 | AVG | 227 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 4824.870 | 53.6 | V | 74.0 | -20.4 | PK | 227 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 3999.990 | 43.2 | V | 54.0 | -10.8 | AVG | 67 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 3999.890 | 48.2 | V | 74.0 | -25.8 | PK | 67 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.

Note 3: No significant emissions were observed for 18-26GHz

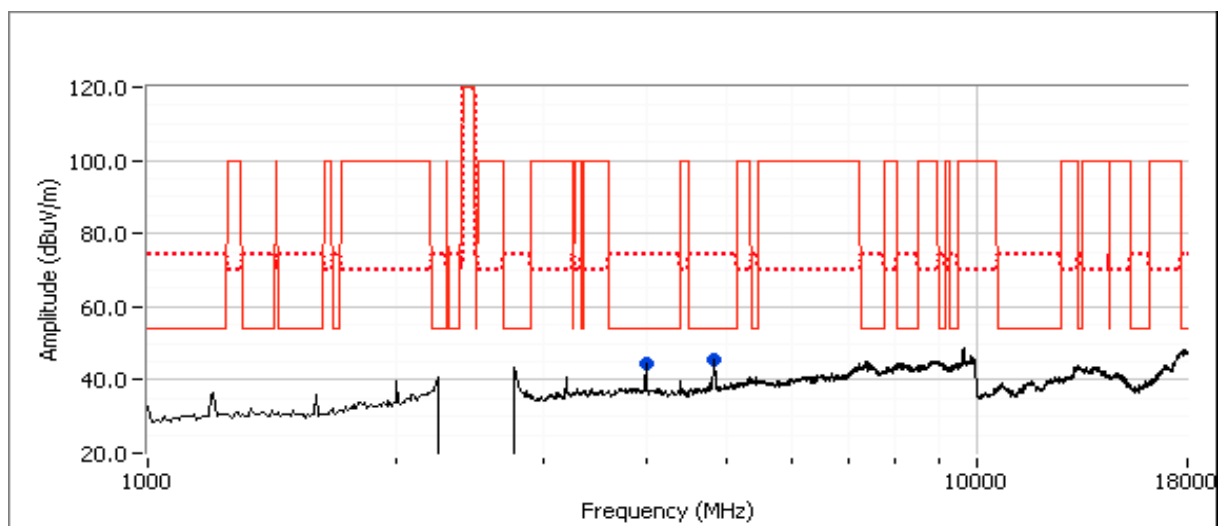

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #8: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT20 - 2x2 and 3x3 modules.

Date of Test: 2/23/2012

Test Location: Chamber #4

Test Engineer: Vishal Narayan


Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------------------------------------------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|----------------------|
| MHz | dBμV/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| Power setting = 24 (Channel 11 - 2x2), Power setting = 28 (Channel 1 - 3x3) | | | | | | | | |
| 3999.990 | 43.2 | V | 54.0 | -10.8 | AVG | 76 | 1.3 | RB 1 MHz;VB 10 Hz;Pk |
| 3999.870 | 48.2 | V | 74.0 | -25.8 | PK | 76 | 1.3 | RB 1 MHz;VB 3 MHz;Pk |
| 4825.330 | 33.9 | V | 54.0 | -20.1 | AVG | 29 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 4825.040 | 47.2 | V | 74.0 | -26.8 | PK | 29 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.

Note 3: No significant emissions were observed for 18-26GHz

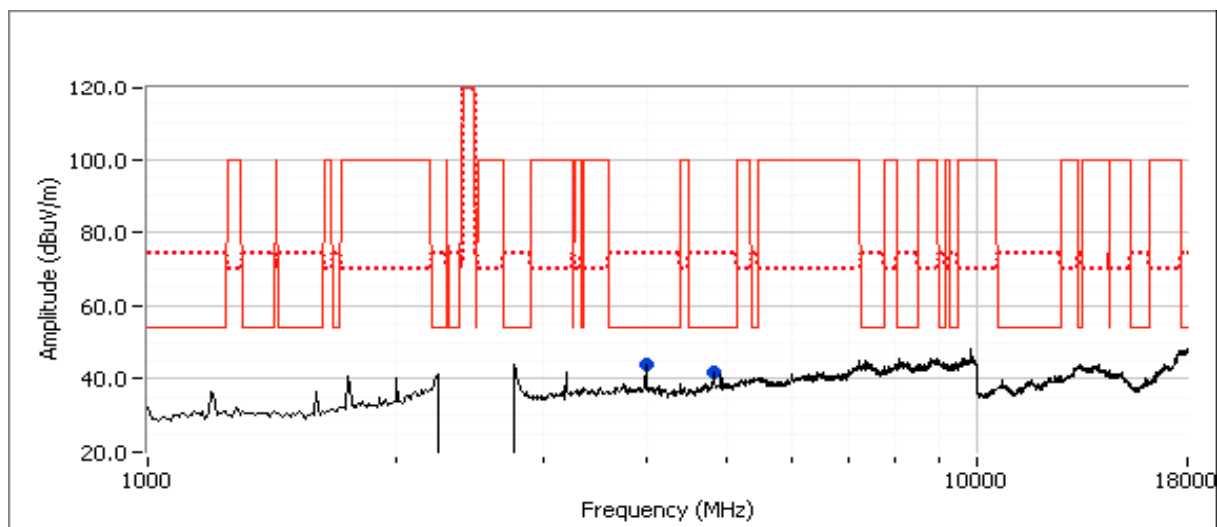

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #9: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT20 - 2x2 and 3x3 modules.

Date of Test: 2/23/2012


Test Location: Chamber #4

Test Engineer: Vishal Narayan

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|----------------------------------------------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|------------------------------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| Power setting = 33 (Channel 6 - 2x2), Power setting = 35 (Channel 6 - 3x3) | | | | | | | | |
| 4872.590 | 46.3 | V | 54.0 | -7.7 | AVG | 154 | 1.1 | RB 1 MHz;VB 10 Hz;Pk |
| 4872.630 | 58.8 | V | 74.0 | -15.2 | PK | 154 | 1.1 | RB 1 MHz;VB 3 MHz;Pk |
| 4000.020 | 44.1 | V | 54.0 | -9.9 | AVG | 58 | 1.6 | RB 1 MHz;VB 10 Hz;Pk |
| 3999.910 | 48.7 | V | 74.0 | -25.3 | PK | 58 | 1.6 | RB 1 MHz;VB 3 MHz;Pk |
| 9750.290 | 51.6 | V | - | - | AVG | 166 | 1.0 | RB 1 MHz;VB 10 Hz;Pk, note 2 |
| 9751.090 | 64.2 | V | - | - | PK | 166 | 1.0 | RB 1 MHz;VB 3 MHz;Pk, note 2 |
| 12192.010 | 40.2 | V | 54.0 | -13.8 | AVG | 52 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 12192.410 | 53.1 | V | 74.0 | -20.9 | PK | 52 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 7311.880 | 47.3 | V | 54.0 | -6.7 | AVG | 55 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 7313.730 | 73.8 | V | 74.0 | -0.2 | PK | 55 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification. |
| Note 3: | No significant emissions were observed for 18-26GHz |

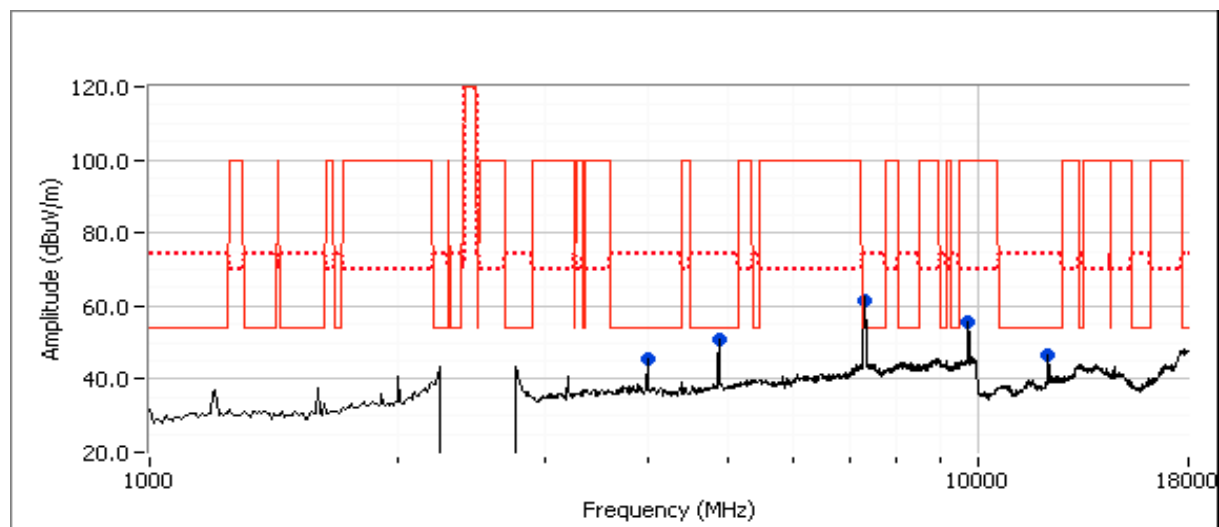

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions 2x2 and 3x3 Modules - HT40 Mode

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C

Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

| Run # | Mode | Channel | Power Setting | Measured Power | Test Performed | Limit | Result / Margin |
|-------|------------|--------------------------------|---------------|----------------|-----------------------------------|--------------------------------|------------------------------------|
| 1 | 802.11HT40 | 2x2: 2422 MHz 3x3: 2452 MHz | 28 19 | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 44.3 dBμV/m @ 4000.0 MHz (-9.7 dB) |
| 2 | 802.11HT40 | 2x2: 2452 MHz 3x3: 2422 MHz | 32 21 | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 69.8 dBμV/m @ 7353.5 MHz (-4.2 dB) |
| 3 | 802.11HT40 | 2x2: 2437 MHz 3x3: 2437 MHz | 34* 28 | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 72.5 dBμV/m @ 7301.9 MHz (-1.5 dB) |

Note: * - indicates power reduced from original certification

System Configuration:

| Radio # | Frequency | Module | Mode | Radio # | Frequency | Module | Mode |
|---------------|-----------|--------|------------|---------------|-----------|--------|------------|
| Run: 1 | | | | Run: 2 | | | |
| 1 | 2422 | 2x2 | 802.11HT40 | 1 | 2452 | 2x2 | 802.11HT40 |
| 0 | 2452 | 3x3 | 802.11HT40 | 0 | 2422 | 3x3 | 802.11HT40 |
| Run: 3 | | | | | | | |
| 1 | 2437 | 2x2 | 802.11HT40 | | | | |
| 0 | 2437 | 3x3 | 802.11HT40 | | | | |

Notes - Multiple radios operating at the same time as shown above. In all cases, power set to the maximum worse case single channel power. transmitting on all chains.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #1: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT40 - 2x2 and 3x3 modules.

Date of Test: 2/23/2012

Test Location: Chamber #4

Test Engineer: Vishal Narayan


Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|----------------------------------------------------------------------------|--------------|-----|-----------------|--------|-----------|---------|--------|------------------------------|
| MHz | dB μ V/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| Power setting = 28 (Channel 1 - 2x2), Power setting = 19 (Channel 7 - 3x3) | | | | | | | | |
| 3999.970 | 44.3 | V | 54.0 | -9.7 | AVG | 66 | 1.6 | RB 1 MHz;VB 10 Hz;Pk |
| 4000.190 | 49.0 | V | 74.0 | -25.0 | PK | 66 | 1.6 | RB 1 MHz;VB 3 MHz;Pk |
| 4841.150 | 37.4 | V | 54.0 | -16.6 | AVG | 158 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 4843.290 | 49.9 | V | 74.0 | -24.1 | PK | 158 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 9696.460 | 43.7 | V | - | - | AVG | 173 | 1.3 | RB 1 MHz;VB 10 Hz;Pk, note 2 |
| 9698.470 | 56.6 | V | - | - | PK | 173 | 1.3 | RB 1 MHz;VB 3 MHz;Pk, note 2 |

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.

Note 3: No significant emissions were observed for 18-26GHz

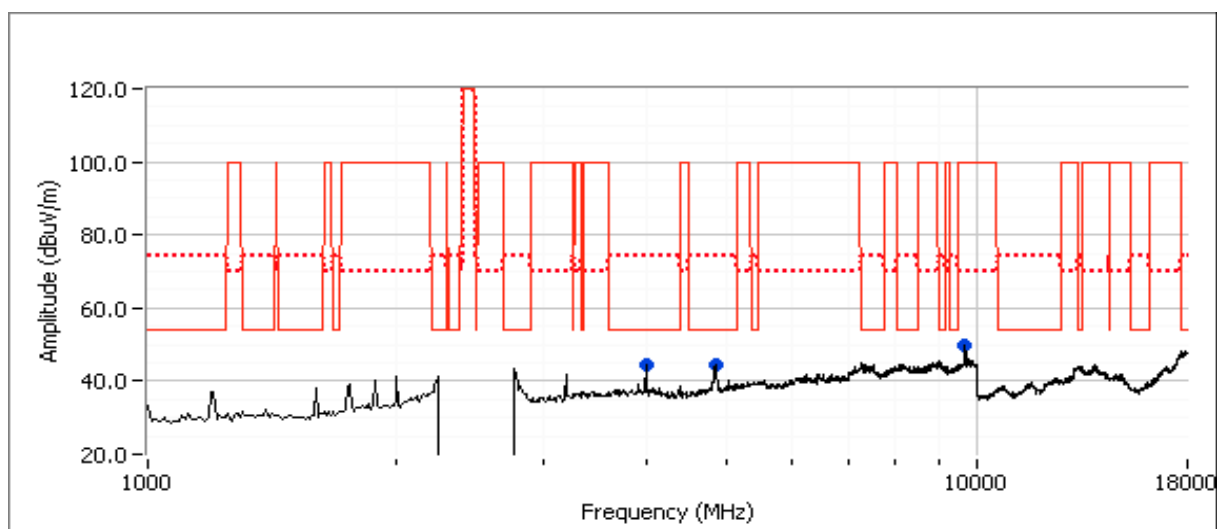

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #2: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT40 - 2x2 and 3x3 modules.

Date of Test: 2/23/2012


Test Location: Chamber #4

Test Engineer: Vishal Narayan

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|----------------------------------------------------------------------------|--------------|-----|-----------------|--------|-----------|---------|--------|------------------------------|
| MHz | dB μ V/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| Power setting = 32 (Channel 7 - 2x2), Power setting = 21 (Channel 1 - 3x3) | | | | | | | | |
| 4000.010 | 44.2 | V | 54.0 | -9.8 | AVG | 59 | 1.6 | RB 1 MHz;VB 10 Hz;Pk |
| 4000.000 | 48.7 | V | 74.0 | -25.3 | PK | 59 | 1.6 | RB 1 MHz;VB 3 MHz;Pk |
| 4905.190 | 36.2 | V | 54.0 | -17.8 | AVG | 201 | 1.3 | RB 1 MHz;VB 10 Hz;Pk |
| 4905.240 | 52.9 | V | 74.0 | -21.1 | PK | 201 | 1.3 | RB 1 MHz;VB 3 MHz;Pk |
| 9797.810 | 47.2 | V | - | - | AVG | 178 | 1.5 | RB 1 MHz;VB 10 Hz;Pk, note 2 |
| 9797.860 | 61.3 | V | - | - | PK | 178 | 1.5 | RB 1 MHz;VB 3 MHz;Pk, note 2 |
| 7352.480 | 45.3 | V | 54.0 | -8.7 | AVG | 55 | 1.3 | RB 1 MHz;VB 10 Hz;Pk |
| 7353.460 | 69.8 | V | 74.0 | -4.2 | PK | 55 | 1.3 | RB 1 MHz;VB 3 MHz;Pk |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification. |
| Note 3: | No significant emissions were observed for 18-26GHz |

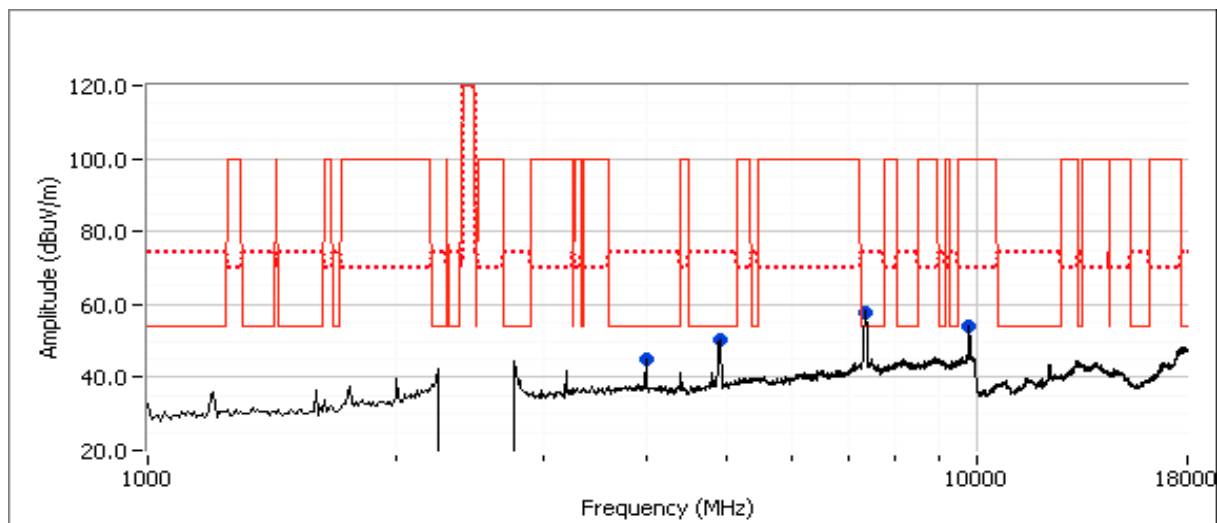

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #3: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT40 - 2x2 and 3x3 modules.

Date of Test: 2/23/2012


Test Location: Chamber #4

Test Engineer: Vishal Narayan

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|----------------------------------------------------------------------------|--------------|-----|-----------------|--------|-----------|---------|--------|------------------------------|
| MHz | dB μ V/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| Power setting = 34 (Channel 4 - 2x2), Power setting = 28 (Channel 4 - 3x3) | | | | | | | | |
| 4875.320 | 43.4 | V | 54.0 | -10.6 | AVG | 90 | 1.3 | RB 1 MHz;VB 10 Hz;Pk |
| 4875.430 | 55.4 | V | 74.0 | -18.6 | PK | 90 | 1.3 | RB 1 MHz;VB 3 MHz;Pk |
| 9751.220 | 50.8 | V | - | - | AVG | 177 | 1.6 | RB 1 MHz;VB 10 Hz;Pk, note 2 |
| 9748.990 | 62.6 | V | - | - | PK | 177 | 1.6 | RB 1 MHz;VB 3 MHz;Pk, note 2 |
| 7301.480 | 49.7 | V | 54.0 | -4.3 | AVG | 63 | 1.3 | RB 1 MHz;VB 10 Hz;Pk |
| 7301.870 | 72.5 | V | 74.0 | -1.5 | PK | 63 | 1.3 | RB 1 MHz;VB 3 MHz;Pk |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification. |
| Note 3: | No significant emissions were observed for 18-26GHz |

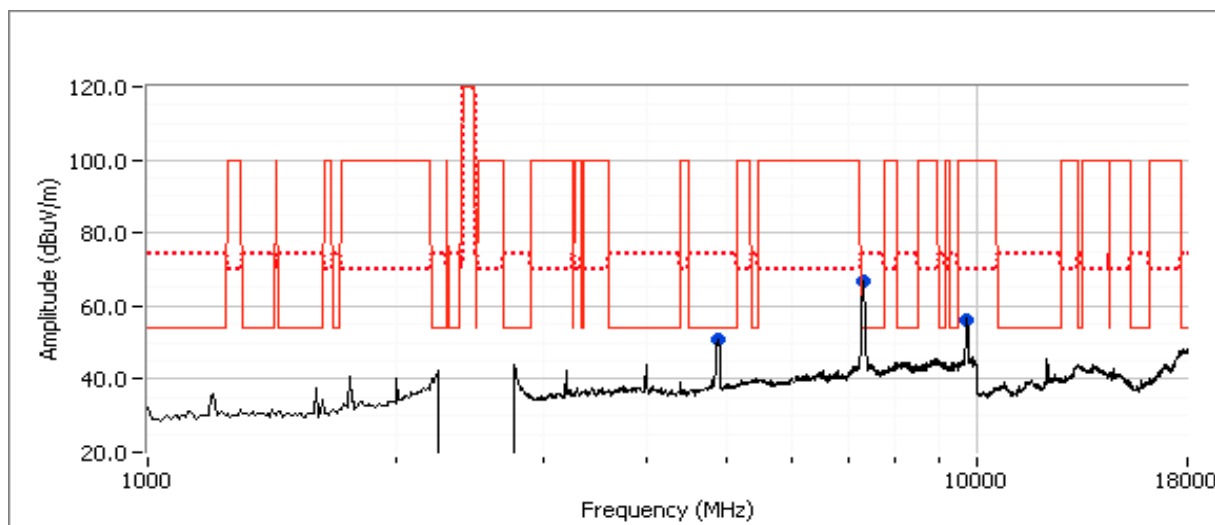

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions 2x2 and 3x3 Modules - 802.11a, HT20, HT40 Modes

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C

Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Summary of Results - Device Operating in the 5.8 MHz Band

| Run # | Mode | Channel | Power Setting | Measured Power | Test Performed | Limit | Result / Margin |
|-------|----------------|--------------------------------|---------------|----------------|-----------------------------------|--------------------------------|--------------------------------------------|
| 1 | 802.11a | 2x2: 5745 MHz 3x3: 5825 MHz | 32 32* | | Radiated Emissions, 1 - 40 GHz | FCC Part 15.209 / 15.247(c) | 52.9 dBμV/m @ 11648.27 MHz (-1.1 dB) |
| 2 | 802.11a | 2x2: 5825 MHz 3x3: 5745 MHz | 31* 36 | | Radiated Emissions, 1 - 40 GHz | FCC Part 15.209 / 15.247(c) | 53.9 dBμV/m @ 11487.87 MHz (-0.1 dB) |
| 3 | 802.11a | 2x2: 5785 MHz 3x3: 5785 MHz | 34* 35* | | Radiated Emissions, 1 - 40 GHz | FCC Part 15.209 / 15.247(c) | 53.7 dBμV/m @ 11572.73 MHz (-0.3 dB) |
| 4 | 802.11HT2 0 | 2x2: 5745 MHz 3x3: 5825 MHz | 30 34 | | Radiated Emissions, 1 - 40 GHz | FCC Part 15.209 / 15.247(c) | 53.8 dBμV/m @ 5439.90 MHz (-0.2 dB) |
| 5 | 802.11HT2 0 | 2x2: 5825 MHz 3x3: 5745 MHz | 30 36 | | Radiated Emissions, 1 - 40 GHz | FCC Part 15.209 / 15.247(c) | 53.8 dBμV/m @ 11486.00 MHz (-0.2 dB) |
| 6 | 802.11HT2 0 | 2x2: 5785 MHz 3x3: 5785 MHz | 30* 36 | | Radiated Emissions, 1 - 40 GHz | FCC Part 15.209 / 15.247(c) | 53.0 dBμV/m @ 5399.96 MHz (-1.0 dB) |
| 7 | 802.11HT4 0 | 2x2: 5755 MHz 3x3: 5795 MHz | 32 29* | | Radiated Emissions, 1 - 40 GHz | FCC Part 15.209 / 15.247(c) | 53.0 dBμV/m @ 11595.47 MHz (-1.0 dB) |
| 8 | 802.11HT4 0 | 2x2: 5795 MHz 3x3: 5755 MHz | 33 32* | | Radiated Emissions, 1 - 40 GHz | FCC Part 15.209 / 15.247(c) | 52.8 dBμV/m @ 5400.06 MHz (-1.2 dB) |

Note: * - indicates power reduced from original certification

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

System Configuration:

| Radio # | Frequency | Module | Mode | Radio # | Frequency | Module | Mode |
|---------------|-----------|--------|------------|---------------|-----------|--------|------------|
| Run: 1 | | | | Run: 2 | | | |
| 1 | 5745 | 2x2 | 802.11a | 1 | 5825 | 2x2 | 802.11a |
| 0 | 5825 | 3x3 | 802.11a | 0 | 5745 | 3x3 | 802.11a |
| Run: 3 | | | | | | | |
| 1 | 5785 | 2x2 | 802.11a | | | | |
| 0 | 5785 | 3x3 | 802.11a | | | | |
| Run: 4 | | | | Run: 5 | | | |
| 1 | 5745 | 2x2 | 802.11HT20 | 1 | 5825 | 2x2 | 802.11HT20 |
| 0 | 5825 | 3x3 | 802.11HT20 | 0 | 5745 | 3x3 | 802.11HT20 |
| Run: 6 | | | | | | | |
| 1 | 5785 | 2x2 | 802.11HT20 | | | | |
| 0 | 5785 | 3x3 | 802.11HT20 | | | | |
| Run: 7 | | | | Run: 8 | | | |
| 1 | 5755 | 2x2 | 802.11HT40 | 1 | 5795 | 2x2 | 802.11HT40 |
| 0 | 5795 | 3x3 | 802.11HT40 | 0 | 5755 | 3x3 | 802.11HT40 |

Notes - Multiple radios operating at the same time as shown above. In all cases, power set to the maximum worse case single channel power. transmitting on all chains.


| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #1: Radiated Spurious Emissions, 1-40.5GHz. 802.11a - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT3

Test Engineer: Jack Liu & Josep Cadigal

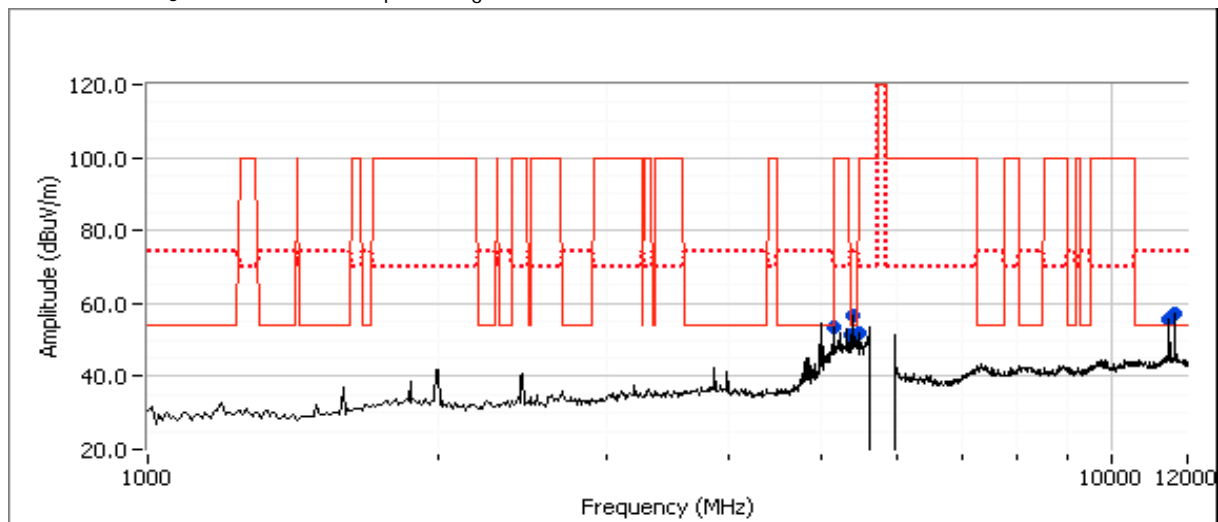

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|--------------------------------------------------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|----------------------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| Power setting = 32 (Channel 149 - 2x2), Power setting = 32 (Channel 165 - 3x3) | | | | | | | | |
| 5400.050 | 52.7 | V | 54.0 | -1.3 | AVG | 360 | 1.2 | RB 1 MHz;VB 10 Hz;Pk |
| 5399.830 | 59.7 | V | 74.0 | -14.3 | PK | 360 | 1.2 | RB 1 MHz;VB 3 MHz;Pk |
| 11486.600 | 52.2 | V | 54.0 | -1.8 | AVG | 53 | 1.5 | 2x2 |
| 11485.740 | 64.6 | V | 74.0 | -9.4 | PK | 53 | 1.5 | 2x2 |
| 11648.270 | 52.9 | V | 54.0 | -1.1 | AVG | 163 | 1.5 | 3x3 |
| 11638.000 | 64.7 | V | 74.0 | -9.3 | PK | 163 | 1.5 | 3x3 |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band but the more stringent restricted band limit was used. |
| Note 3: | No significant emissions were observed for 18-40GHz |


| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #2: Radiated Spurious Emissions, 1-40.5GHz. 802.11a - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT Ch 3

Test Engineer: Joseph Cadigal

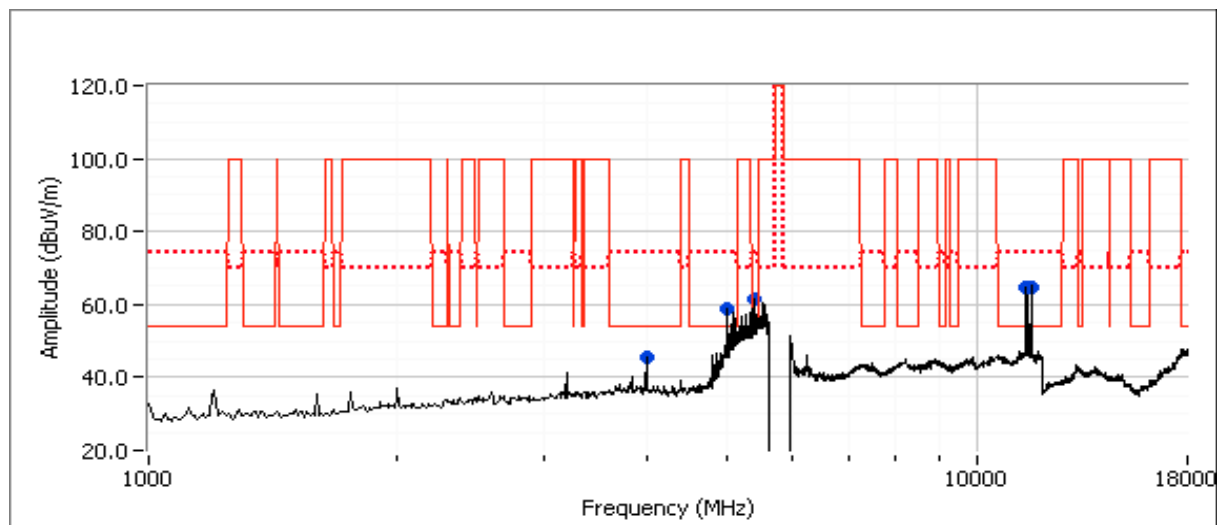

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|--------------------------------------------------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|----------|
| MHz | dBuV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| Power setting = 31 (Channel 165 - 2x2), Power setting = 36 (Channel 149 - 3x3) | | | | | | | | |
| 11487.870 | 53.9 | V | 54.0 | -0.1 | AVG | 339 | 1.0 | 3x3 |
| 11487.530 | 66.2 | V | 74.0 | -7.8 | PK | 339 | 1.0 | 3x3 |
| 11651.600 | 51.4 | V | 54.0 | -2.6 | AVG | 170 | 1.1 | 2x2 |
| 11651.470 | 63.4 | V | 74.0 | -10.6 | PK | 170 | 1.1 | 2x2 |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band but the more stringent restricted band limit was used. |
| Note 3: | No significant emissions were observed for 18-40GHz |



| | |
|---------------------------------------------|-------------------------------|
| Client: Xirrus | Job Number: J86254 |
| Model: XI-N300 (2x2 radio module) in XR1000 | T-Log Number: T86381 |
| Contact: Steve Smith | Account Manager: Michelle Kim |
| Standard: FCC 15.247/15.E/RSS-210 | Class: N/A |

Run #3: Radiated Spurious Emissions, 1-40.5GHz. 802.11a - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT Ch 3

Test Engineer: Joseph Cadigal

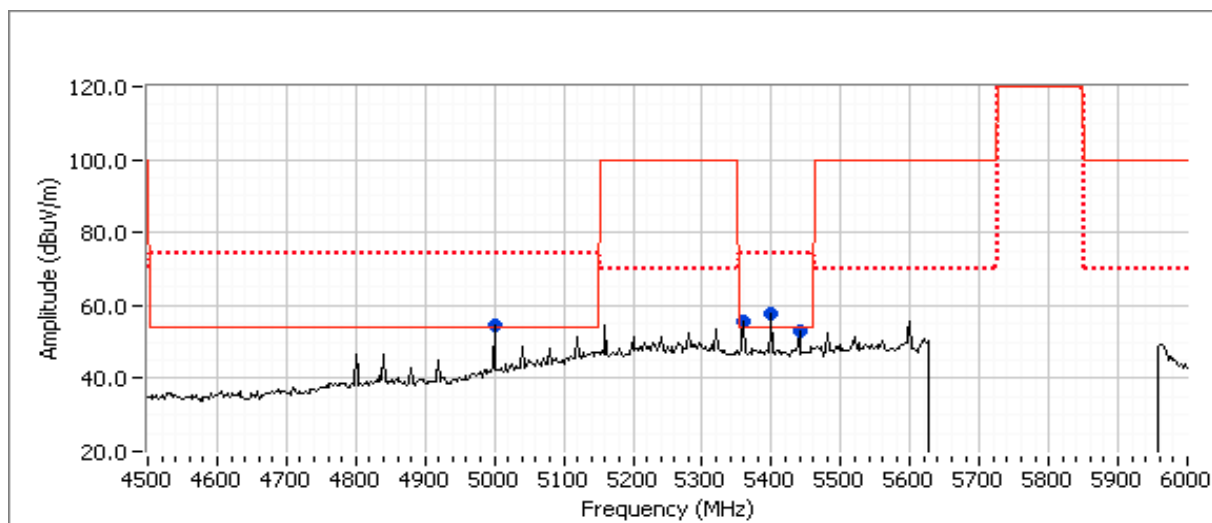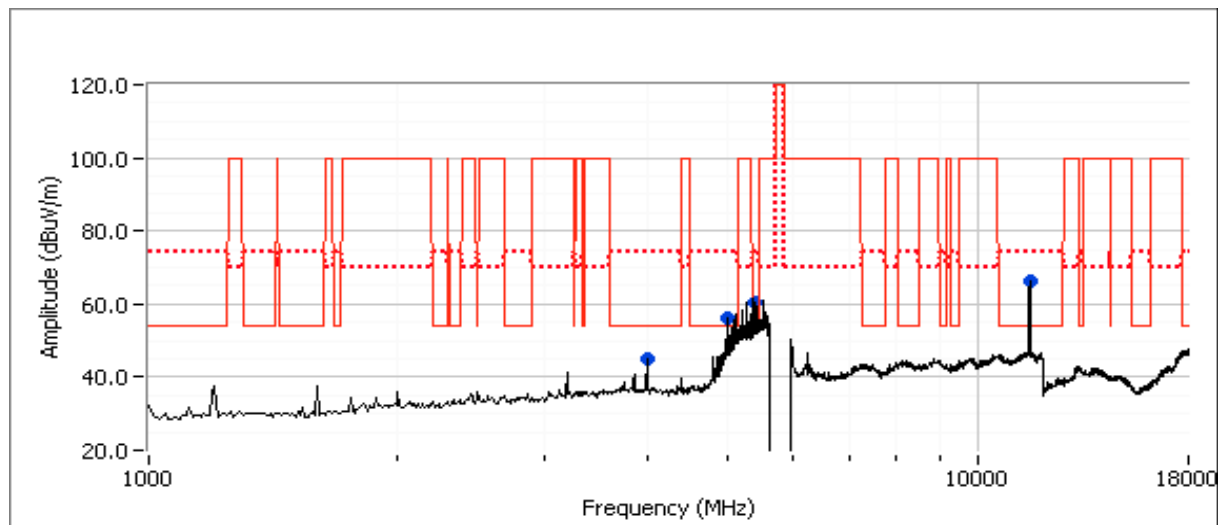

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XL-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|--------------------------------------------------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|----------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| Power setting = 34 (Channel 157 - 2x2), Power setting = 35 (Channel 157 - 3x3) | | | | | | | | |
| 11571.670 | 53.2 | V | 54.0 | -0.8 | AVG | 243 | 1.1 | 2x2 |
| 11572.200 | 64.8 | V | 74.0 | -9.2 | PK | 243 | 1.1 | 2x2 |
| 11572.730 | 53.7 | V | 54.0 | -0.3 | AVG | 244 | 1.1 | 3x3 |
| 11572.200 | 65.2 | V | 74.0 | -8.8 | PK | 244 | 1.1 | 3x3 |
| 5359.940 | 52.6 | V | 54.0 | -1.4 | AVG | 183 | 1.0 | 2x2,3x3 |
| 5360.020 | 57.9 | V | 74.0 | -16.1 | PK | 183 | 1.0 | 2x2,3x3 |
| 5439.960 | 51.3 | V | 54.0 | -2.7 | AVG | 360 | 1.0 | 2x2,3x3 |
| 5440.080 | 58.5 | V | 74.0 | -15.5 | PK | 360 | 1.0 | 2x2,3x3 |

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

Note 3: No significant emissions were observed for 18-40GHz



| | |
|---------------------------------------------|-------------------------------|
| Client: Xirrus | Job Number: J86254 |
| Model: XI-N300 (2x2 radio module) in XR1000 | T-Log Number: T86381 |
| Contact: Steve Smith | Account Manager: Michelle Kim |
| Standard: FCC 15.247/15.E/RSS-210 | Class: N/A |

Run #4: Radiated Spurious Emissions, 1-40.5GHz. 802.11HT20 - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT Ch 3

Test Engineer: Joseph Cadigal

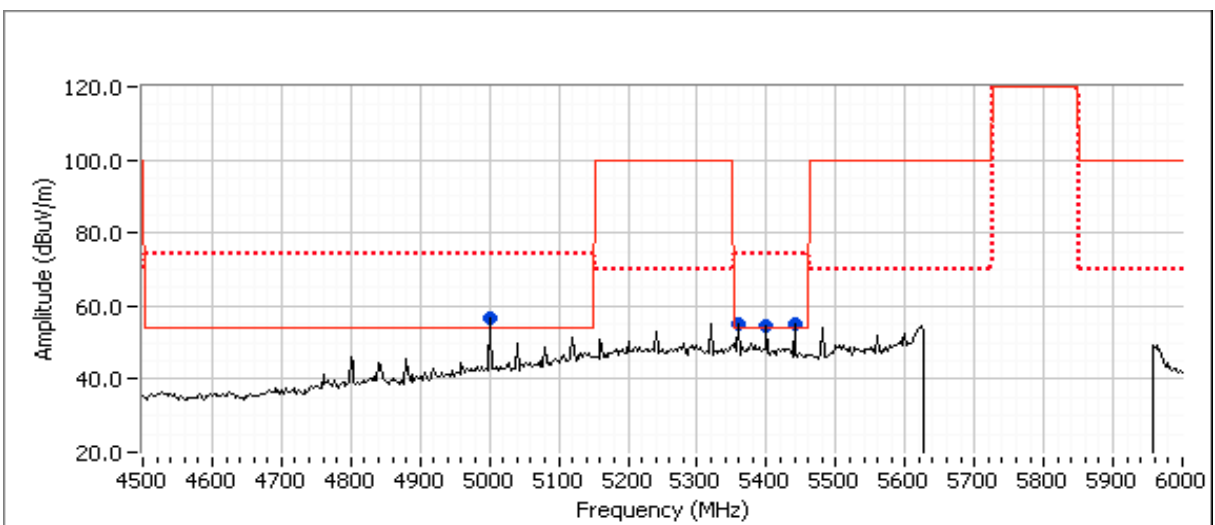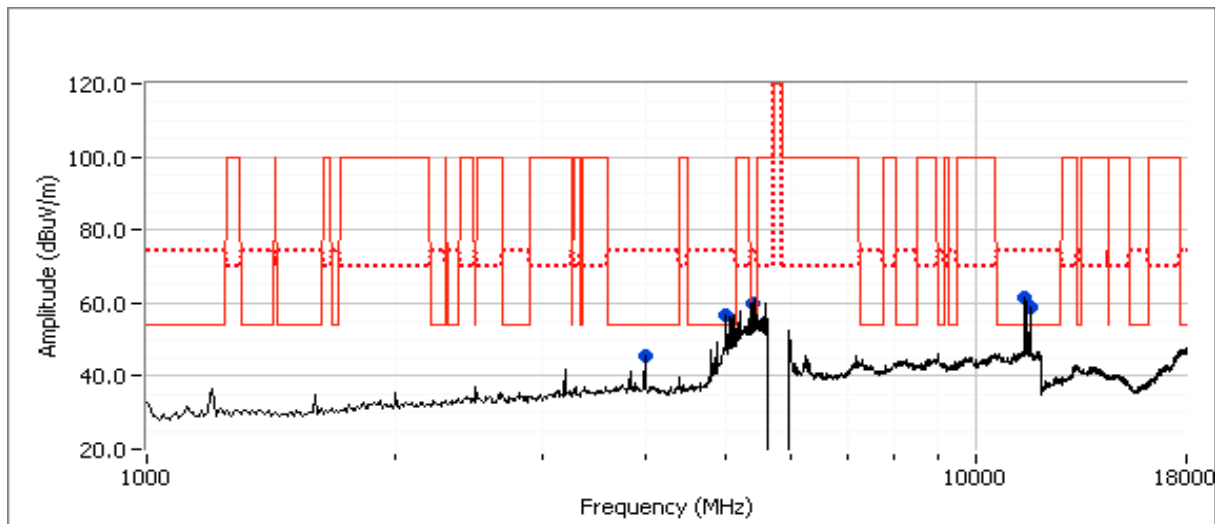

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|--------------------------------------------------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|----------------------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| Power setting = 30 (Channel 149 - 2x2), Power setting = 34 (Channel 165 - 3x3) | | | | | | | | |
| 11654.930 | 53.3 | V | 54.0 | -0.7 | AVG | 237 | 1.1 | RB 1 MHz;VB 10 Hz;Pk |
| 11636.070 | 65.5 | V | 74.0 | -8.5 | PK | 237 | 1.1 | RB 1 MHz;VB 3 MHz;Pk |
| 11494.330 | 52.1 | V | 54.0 | -1.9 | AVG | 225 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 11495.400 | 64.4 | V | 74.0 | -9.6 | PK | 225 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 5439.900 | 53.8 | V | 54.0 | -0.2 | AVG | 6 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 5440.010 | 59.9 | V | 74.0 | -14.1 | PK | 6 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 5399.920 | 53.0 | V | 54.0 | -1.0 | AVG | 179 | 1.5 | RB 1 MHz;VB 10 Hz;Pk |
| 5400.020 | 58.2 | V | 74.0 | -15.8 | PK | 179 | 1.5 | RB 1 MHz;VB 3 MHz;Pk |
| 5360.030 | 52.9 | V | 54.0 | -1.1 | AVG | 359 | 1.5 | RB 1 MHz;VB 10 Hz;Pk |
| 5359.580 | 58.4 | V | 74.0 | -15.6 | PK | 359 | 1.5 | RB 1 MHz;VB 3 MHz;Pk |
| 5000.070 | 55.9 | V | - | - | AVG | 147 | 1.5 | Note 4 |
| 5000.220 | 59.2 | V | - | - | PK | 147 | 1.5 | Note 4 |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band but the more stringent restricted band limit was used. |
| Note 3: | No significant emissions were observed for 18-40GHz |
| Note 4: | Emission from digital circuitry. Refer to digital device results. |



| | |
|---------------------------------------------|-------------------------------|
| Client: Xirrus | Job Number: J86254 |
| Model: XI-N300 (2x2 radio module) in XR1000 | T-Log Number: T86381 |
| Contact: Steve Smith | Account Manager: Michelle Kim |
| Standard: FCC 15.247/15.E/RSS-210 | Class: N/A |

Run #5: Radiated Spurious Emissions, 1-40.5GHz. 802.11HT20 - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT Ch 3

Test Engineer: Joseph Cadigal

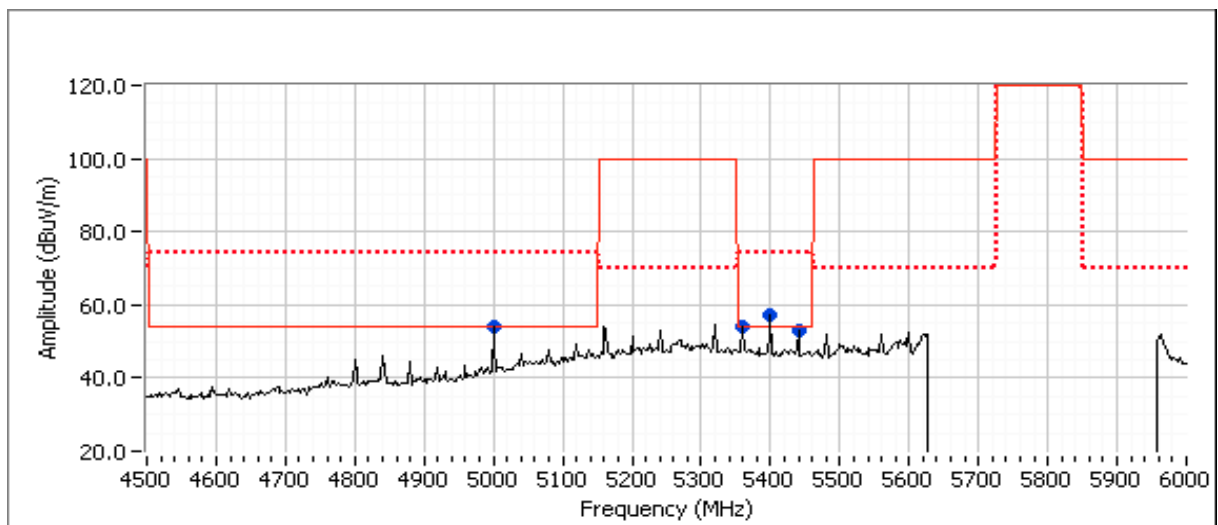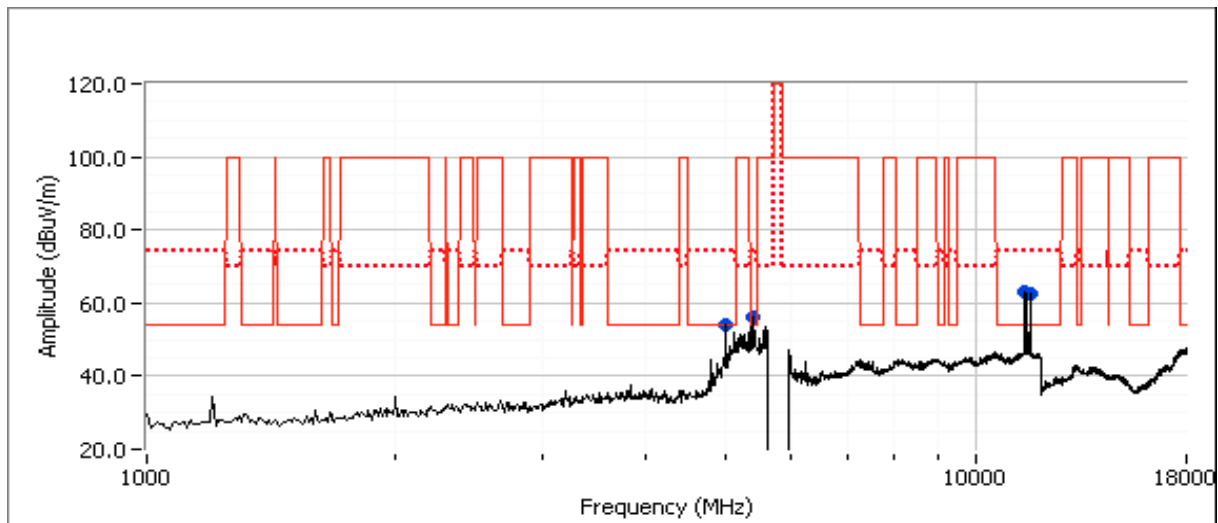

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|--------------------------------------------------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|----------------------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| Power setting = 30 (Channel 165 - 2x2), Power setting = 36 (Channel 149 - 3x3) | | | | | | | | |
| 11655.070 | 51.8 | V | 54.0 | -2.2 | AVG | 245 | 1.1 | RB 1 MHz;VB 10 Hz;Pk |
| 11653.730 | 65.0 | V | 74.0 | -9.0 | PK | 245 | 1.1 | RB 1 MHz;VB 3 MHz;Pk |
| 11486.000 | 53.8 | V | 54.0 | -0.2 | AVG | 341 | 1.1 | RB 1 MHz;VB 10 Hz;Pk |
| 11487.530 | 65.2 | V | 74.0 | -8.8 | PK | 341 | 1.1 | RB 1 MHz;VB 3 MHz;Pk |
| 5000.030 | 53.0 | V | 54.0 | -1.0 | AVG | 142 | 1.3 | RB 1 MHz;VB 10 Hz;Pk |
| 5000.120 | 56.9 | V | 74.0 | -17.1 | PK | 142 | 1.3 | RB 1 MHz;VB 3 MHz;Pk |
| 5439.910 | 51.9 | V | 54.0 | -2.1 | AVG | 356 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 5439.870 | 59.1 | V | 74.0 | -14.9 | PK | 356 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 5359.920 | 52.0 | V | 54.0 | -2.0 | AVG | 187 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 5359.940 | 58.1 | V | 74.0 | -15.9 | PK | 187 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 5400.060 | 53.6 | V | 54.0 | -0.4 | AVG | 360 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 5399.830 | 58.4 | V | 74.0 | -15.6 | PK | 360 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |



| | |
|---------------------------------------------|-------------------------------|
| Client: Xirrus | Job Number: J86254 |
| Model: XI-N300 (2x2 radio module) in XR1000 | T-Log Number: T86381 |
| Contact: Steve Smith | Account Manager: Michelle Kim |
| Standard: FCC 15.247/15.E/RSS-210 | Class: N/A |

Run #6: Radiated Spurious Emissions, 1-40.5GHz. 802.11HT20 - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT Ch 3

Test Engineer: Joseph Cadigal

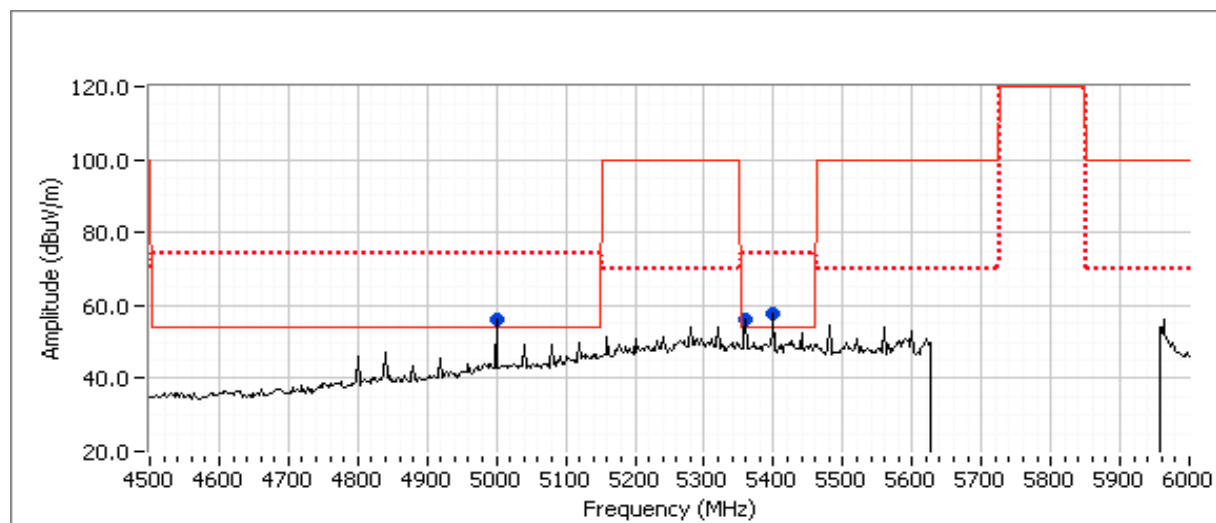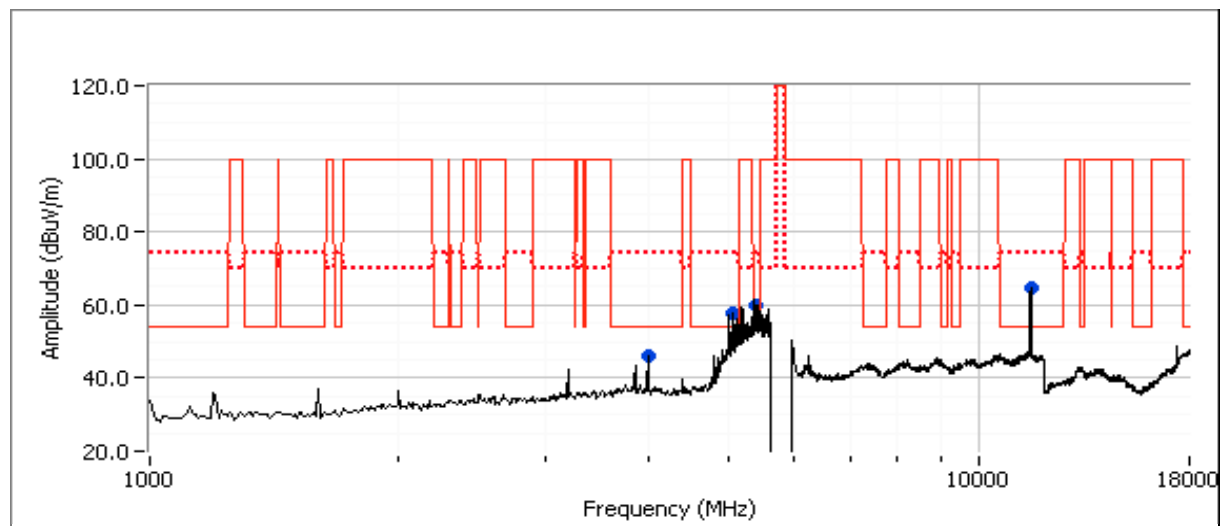

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|--------------------------------------------------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|------------------------------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| Power setting = 30 (Channel 157 - 2x2), Power setting = 36 (Channel 157 - 3x3) | | | | | | | | |
| 5399.960 | 53.0 | V | 54.0 | -1.0 | AVG | 360 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 5399.650 | 58.5 | V | 74.0 | -15.5 | PK | 360 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 5360.110 | 46.5 | V | 54.0 | -7.5 | AVG | 182 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 5360.150 | 57.3 | V | 74.0 | -16.7 | PK | 182 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 11550.730 | 40.4 | V | 54.0 | -13.6 | AVG | 360 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 11571.470 | 51.6 | V | 74.0 | -22.4 | PK | 360 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 5000.070 | 58.8 | V | - | - | AVG | 150 | 1.5 | RB 1 MHz;VB 10 Hz;Pk, note 4 |
| 5000.160 | 58.9 | V | - | - | PK | 150 | 1.5 | RB 1 MHz;VB 3 MHz;Pk, note 4 |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band but the more stringent restricted band limit was used. |
| Note 3: | No significant emissions were observed for 18-40GHz |
| Note 4: | Emission from digital circuitry. Refer to digital device results. |



| | |
|---------------------------------------------|-------------------------------|
| Client: Xirrus | Job Number: J86254 |
| Model: XI-N300 (2x2 radio module) in XR1000 | T-Log Number: T86381 |
| Contact: Steve Smith | Account Manager: Michelle Kim |
| Standard: FCC 15.247/15.E/RSS-210 | Class: N/A |

Run #7: Radiated Spurious Emissions, 1-40.5GHz. 802.11HT20 - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT Ch 3

Test Engineer: Joseph Cadigal

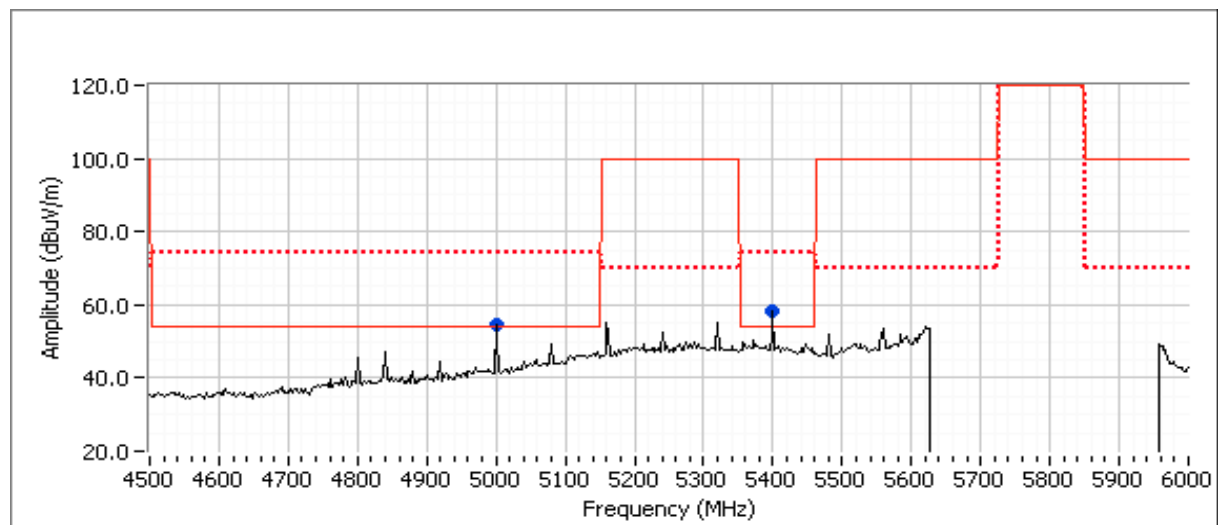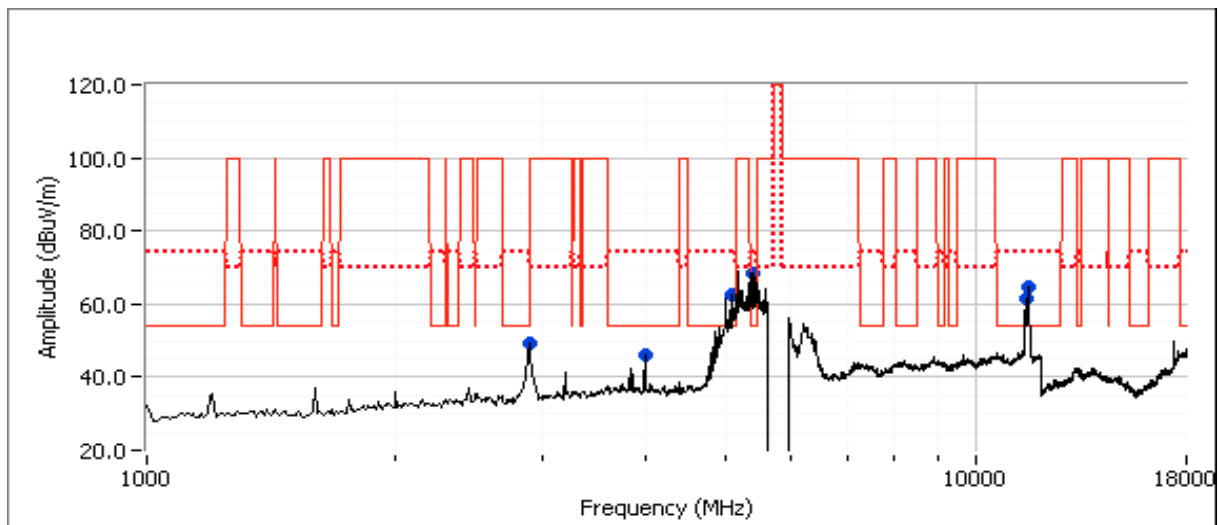

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|--------------------------------------------------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|------------------------------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| Power setting = 32 (Channel 151 - 2x2), Power setting = 29 (Channel 159 - 3x3) | | | | | | | | |
| 11516.870 | 51.6 | V | 54.0 | -2.4 | AVG | 227 | 1.4 | RB 1 MHz;VB 10 Hz;Pk |
| 11518.070 | 63.5 | V | 74.0 | -10.5 | PK | 227 | 1.4 | RB 1 MHz;VB 3 MHz;Pk |
| 11595.470 | 53.0 | V | 54.0 | -1.0 | AVG | 340 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 11602.730 | 65.2 | V | 74.0 | -8.8 | PK | 340 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 5399.950 | 48.1 | V | 54.0 | -5.9 | AVG | 360 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 5399.850 | 53.5 | V | 74.0 | -20.5 | PK | 360 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 5000.060 | 53.3 | V | - | - | AVG | 323 | 1.5 | RB 1 MHz;VB 10 Hz;Pk, note 4 |
| 5000.050 | 56.9 | V | - | - | PK | 323 | 1.5 | RB 1 MHz;VB 3 MHz;Pk, note 4 |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band but the more stringent restricted band limit was used. |
| Note 3: | No significant emissions were observed for 18-40GHz |
| Note 4: | Emission from digital circuitry. Refer to digital device results. |



| | |
|---------------------------------------------|-------------------------------|
| Client: Xirrus | Job Number: J86254 |
| Model: XI-N300 (2x2 radio module) in XR1000 | T-Log Number: T86381 |
| Contact: Steve Smith | Account Manager: Michelle Kim |
| Standard: FCC 15.247/15.E/RSS-210 | Class: N/A |

Run #8: Radiated Spurious Emissions, 1-40.5GHz. 802.11HT40 - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT Ch 3

Test Engineer: Joseph Cadigal

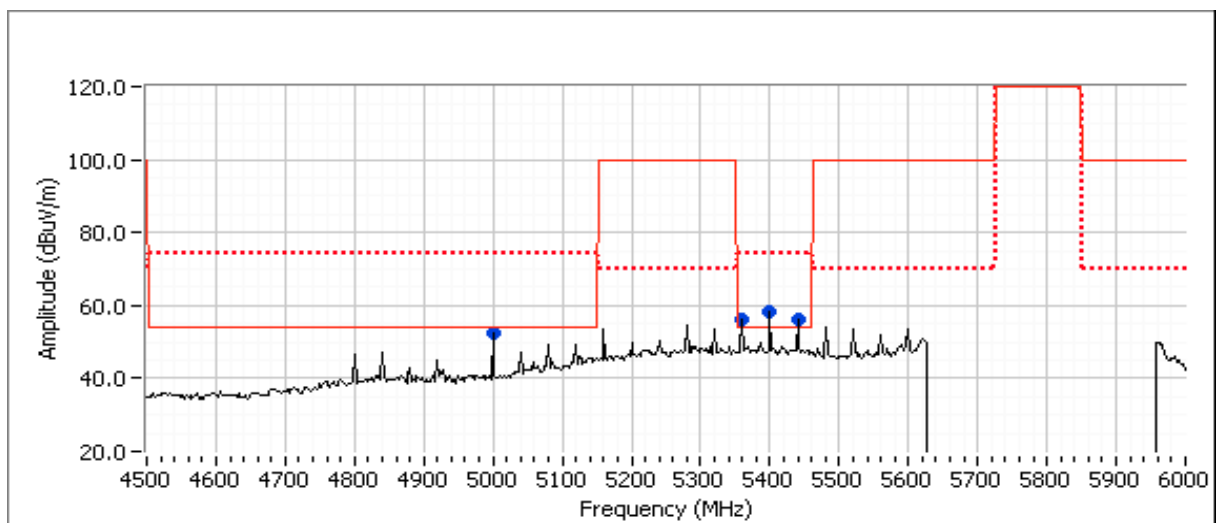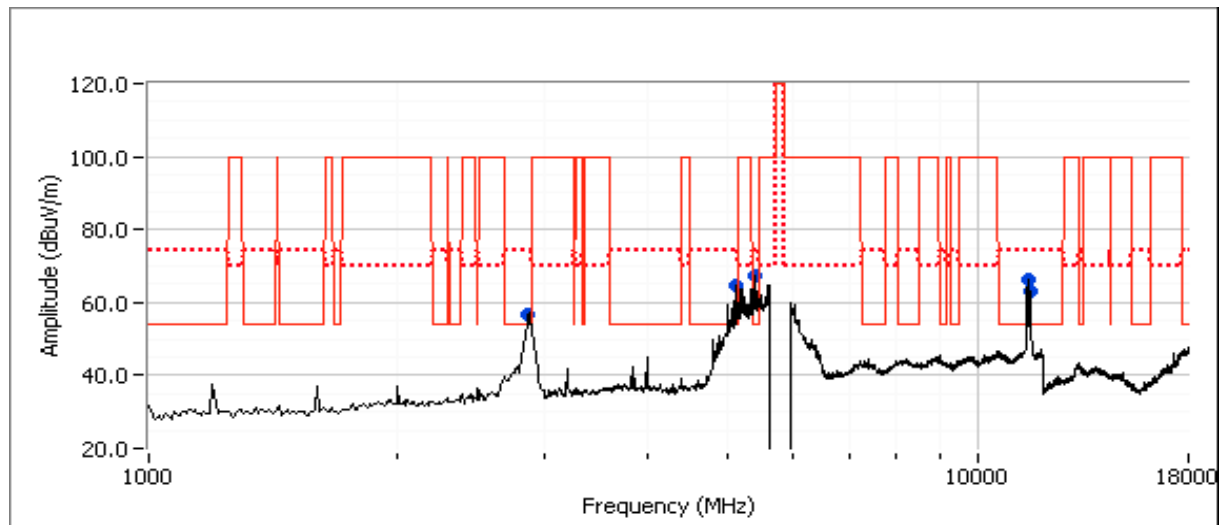

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|--------------------------------------------------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|------------------------------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| Power setting = 33 (Channel 159 - 2x2), Power setting = 32 (Channel 151 - 3x3) | | | | | | | | |
| 5440.000 | 52.2 | V | 54.0 | -1.8 | AVG | 358 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 5439.940 | 59.3 | V | 74.0 | -14.7 | PK | 358 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 5359.960 | 52.5 | V | 54.0 | -1.5 | AVG | 360 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 5360.150 | 59.1 | V | 74.0 | -14.9 | PK | 360 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 11508.540 | 45.7 | V | 54.0 | -8.3 | AVG | 338 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 11508.700 | 57.5 | V | 74.0 | -16.5 | PK | 338 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 11595.870 | 50.0 | V | 54.0 | -4.0 | AVG | 247 | 1.1 | RB 1 MHz;VB 10 Hz;Pk |
| 11602.600 | 62.6 | V | 74.0 | -11.4 | PK | 247 | 1.1 | RB 1 MHz;VB 3 MHz;Pk |
| 5400.060 | 52.8 | V | 54.0 | -1.2 | AVG | 3 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 5399.730 | 58.6 | V | 74.0 | -15.4 | PK | 3 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 5000.040 | 50.4 | V | - | - | AVG | 98 | 1.0 | RB 1 MHz;VB 10 Hz;Pk, note 4 |
| 4999.870 | 54.6 | V | - | - | PK | 98 | 1.0 | RB 1 MHz;VB 3 MHz;Pk, note 4 |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band but the more stringent restricted band limit was used. |
| Note 3: | No significant emissions were observed for 18-40GHz |
| Note 4: | Emission from digital circuitry. Refer to digital device results. |

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements MIMO and Smart Antenna Systems Power

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 3/16/2012
Test Engineer: Rafael Varelas
Test Location: FT Lab #4

Config. Used: 1
Config Change: None
EUT Voltage: POE

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Power measurements performed for those channels/modes that required power reduction due to radiated spurious emissions.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

XR1000 -

Run #1: Output Power - Chain A + B


Operating Mode: 802.11b

Transmitted signal on chain is coherent ? yes

| 2412 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
|--------------------------------------|---------|---------|---------|---------|-------------------------|---------|----------|---------|
| Power Setting ^{Note 3} | 33.0 | 33.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 15.1 | 14.4 | | | 17.8 dBm | 0.060 W | 30.0 dBm | 1.000 W |
| Antenna Gain (dBi) ^{Note 2} | 2.0 | 2.0 | | | 5.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 17.1 | 16.4 | | | 22.8 dBm | 0.190 W | | |
| 2437 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
| Power Setting ^{Note 3} | 30.0 | 30.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 13.7 | 13.3 | | | 16.5 dBm | 0.045 W | 30.0 dBm | 1.000 W |
| Antenna Gain (dBi) ^{Note 2} | 2.0 | 2.0 | | | 5.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 15.7 | 15.3 | | | 21.5 dBm | 0.142 W | | |
| 2462 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
| Power Setting ^{Note 3} | 30.0 | 30.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 13.5 | 13.4 | | | 16.5 dBm | 0.044 W | 30.0 dBm | 1.000 W |
| Antenna Gain (dBi) ^{Note 2} | 2.0 | 2.0 | | | 5.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 15.5 | 15.4 | | | 21.5 dBm | 0.140 W | | |

| | |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc. |
| Note 2: | As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain |
| Note 3: | Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2. |

| | |
|---------------------------------------------|-------------------------------|
| Client: Xirrus | Job Number: J86254 |
| Model: XI-N300 (2x2 radio module) in XR1000 | T-Log Number: T86381 |
| Contact: Steve Smith | Account Manager: Michelle Kim |
| Standard: FCC 15.247/15.E/RSS-210 | Class: N/A |

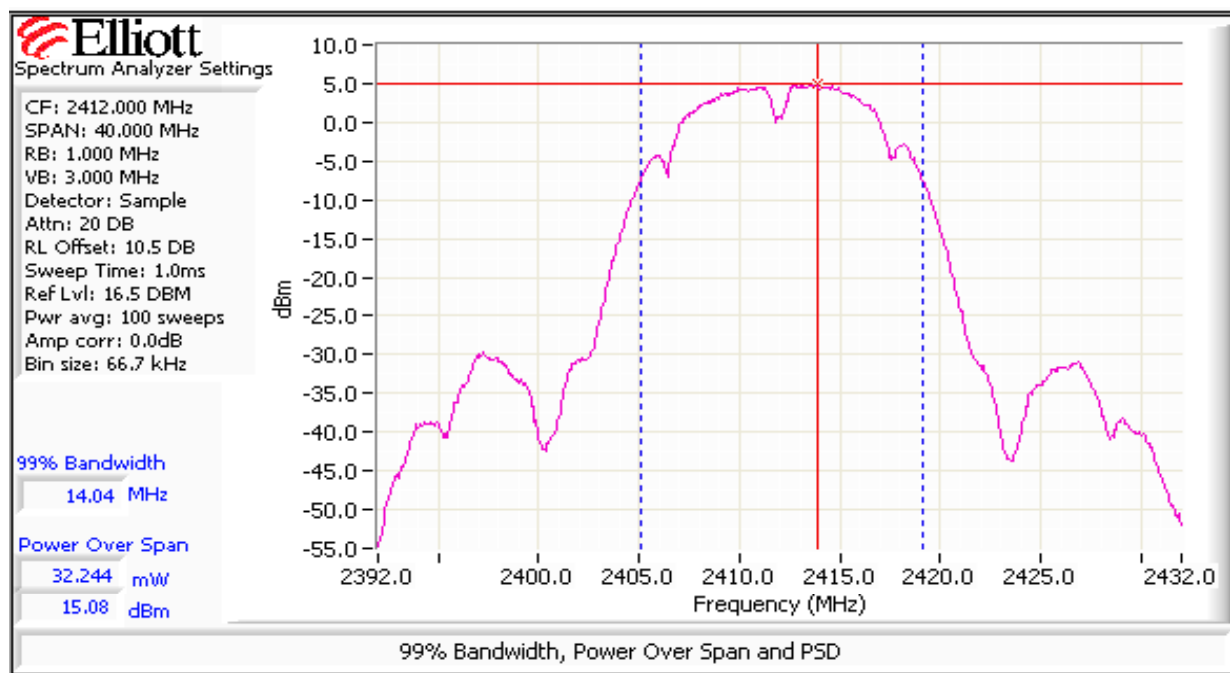


| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Operating Mode: **802.11g**
Transmitted signal on chain is coherent ? yes

| 2437 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | Limit |
|--------------------------------------|---------|---------|---------|---------|-------------------------|------------------|
| Power Setting ^{Note 3} | 31.0 | 31.0 | | | | |
| Output Power (dBm) ^{Note 1} | 14.5 | 14.1 | | | 17.3 dBm 0.054 W | 30.0 dBm 1.000 W |
| Antenna Gain (dBi) ^{Note 2} | 2.0 | 2.0 | | | 5.0 dBi | |
| eirp (dBm) ^{Note 2} | 16.5 | 16.1 | | | 22.3 dBm 0.171 W | Pass |

| | |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc . |
| Note 2: | As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain |
| Note 3: | Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2. |

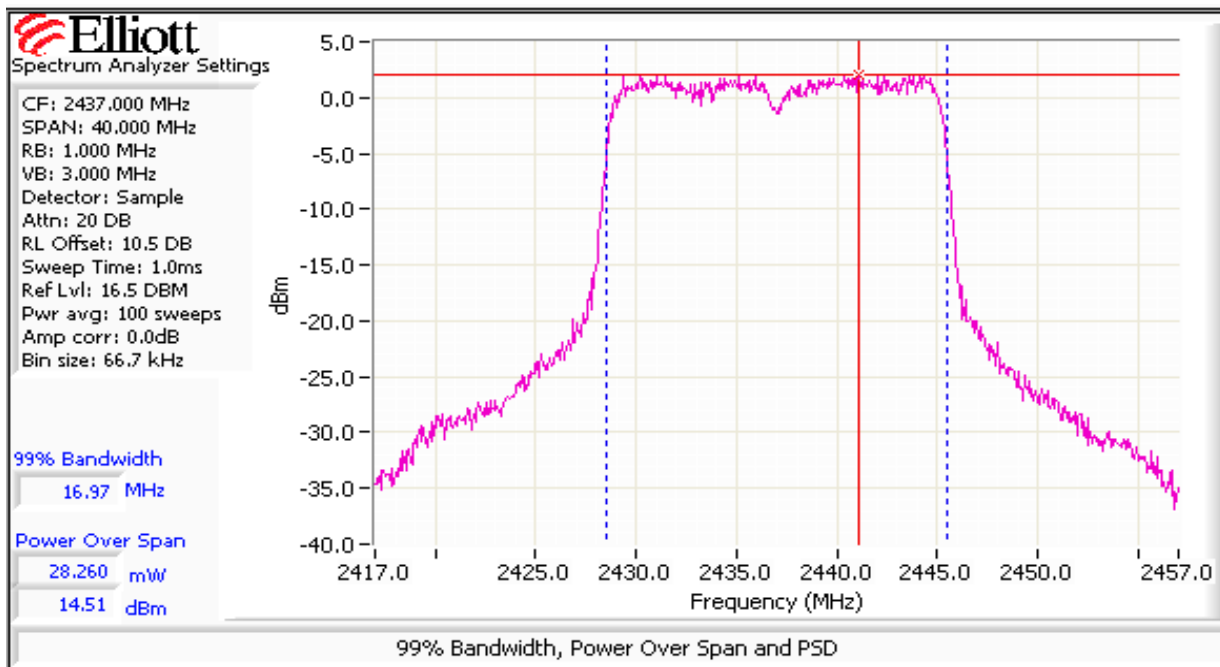

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Operating Mode: **802.11n40**
Transmitted signal on chain is coherent ? yes

| 2437 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
|--------------------------------------|---------|---------|---------|---------|-------------------------|---------|----------|---------|
| Power Setting ^{Note 3} | 34.0 | 34.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 23.4 | 23.2 | | | 26.3 dBm | 0.428 W | 30.0 dBm | 1.000 W |
| Antenna Gain (dBi) ^{Note 2} | 2.0 | 2.0 | | | 5.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 25.4 | 25.2 | | | 31.3 dBm | 1.356 W | | |

| | |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | Output power measured using a peak power meter, spurious limit is -20dBc. |
| Note 2: | As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain |
| Note 3: | Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2. |

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

XR2000 -

Run #1: Output Power - Chain A + B


Operating Mode: 802.11b

Transmitted signal on chain is coherent ? yes

| 2412 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
|--------------------------------------|---------|---------|---------|---------|-------------------------|---------|----------|---------|
| Power Setting ^{Note 3} | 33.0 | 33.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 13.7 | 14.3 | | | 17.0 dBm | 0.050 W | 30.0 dBm | 1.000 W |
| Antenna Gain (dBi) ^{Note 2} | 2.0 | 2.0 | | | 5.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 15.68 | 16.3 | | | 22.0 dBm | 0.159 W | | |
| 2437 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
| Power Setting ^{Note 3} | 31.0 | 31.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 13.2 | 13.4 | | | 16.3 dBm | 0.043 W | 30.0 dBm | 1.000 W |
| Antenna Gain (dBi) ^{Note 2} | 2.0 | 2.0 | | | 5.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 15.2 | 15.4 | | | 21.3 dBm | 0.136 W | | |
| 2462 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
| Power Setting ^{Note 3} | 33.0 | 33.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 15.2 | 14.3 | | | 17.8 dBm | 0.060 W | 30.0 dBm | 1.000 W |
| Antenna Gain (dBi) ^{Note 2} | 2.0 | 2.0 | | | 5.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 17.2 | 16.3 | | | 22.8 dBm | 0.190 W | | |

| | |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc. |
| Note 2: | As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain |
| Note 3: | Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2. |

| | |
|---------------------------------------------|-------------------------------|
| Client: Xirrus | Job Number: J86254 |
| Model: XI-N300 (2x2 radio module) in XR1000 | T-Log Number: T86381 |
| Contact: Steve Smith | Account Manager: Michelle Kim |
| Standard: FCC 15.247/15.E/RSS-210 | Class: N/A |

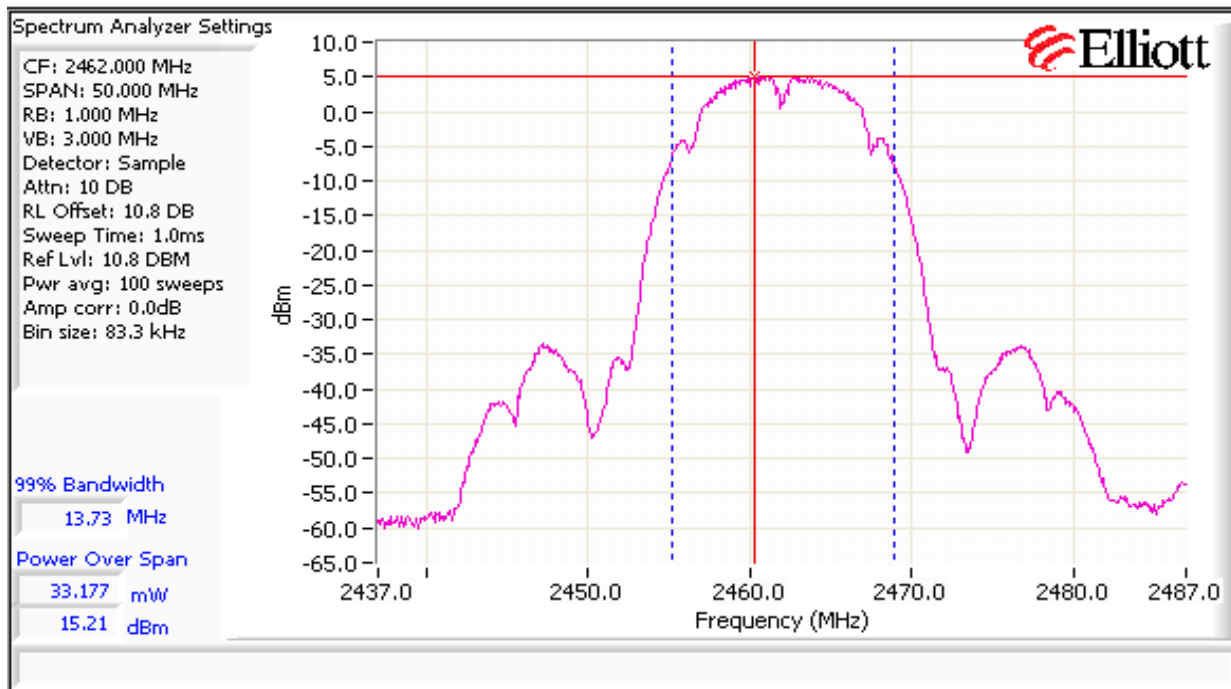

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Operating Mode: **802.11n40**
Transmitted signal on chain is coherent ? yes

| 2437 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
|--------------------------------------|---------|---------|---------|---------|-------------------------|---------|----------|---------|
| Power Setting ^{Note 3} | 34.0 | 34.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 23.4 | 23.7 | | | 26.6 dBm | 0.453 W | 30.0 dBm | 1.000 W |
| Antenna Gain (dBi) ^{Note 2} | 2.0 | 2.0 | | | 5.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 25.4 | 25.7 | | | 31.6 dBm | 1.437 W | | |

| | |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | Output power measured using a peak power meter, spurious limit is -20dBc. |
| Note 2: | As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain |
| Note 3: | Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2. |

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

**RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements
MIMO and Smart Antenna Systems
Power, PSD, Bandwidth and Spurious Emissions**

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 3/16/2012
Test Engineer: Rafael Varelas
Test Location: FT Lab #4

Config. Used: 1
Config Change: None
EUT Voltage: POE

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Power measurements performed for those channels/modes that required power reduction due to radiated spurious emissions.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

XR1000 -

Run #1: Output Power - Chain A + B


Operating Mode: 802.11a

Transmitted signal on chain is coherent ? Yes

| 5785 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
|--------------------------------------|---------|---------|---------|---------|-------------------------|---------|----------|---------|
| Power Setting ^{Note 3} | 34.0 | 34.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 16.0 | 15.4 | | | 18.7 dBm | 0.074 W | 29.0 dBm | 0.792 W |
| Antenna Gain (dBi) ^{Note 2} | 4.0 | 4.0 | | | 7.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 19.99 | 19.35 | | | 25.7 dBm | 0.372 W | | |
| 5825 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
| Power Setting ^{Note 3} | 31.0 | 31.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 14.5 | 13.4 | | | 17.0 dBm | 0.050 W | 29.0 dBm | 0.792 W |
| Antenna Gain (dBi) ^{Note 2} | 4.0 | 4.0 | | | 7.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 18.5 | 17.44 | | | 24.0 dBm | 0.253 W | | |

| | |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc. |
| Note 2: | As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain |
| Note 3: | Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2. |

| | |
|---------------------------------------------|-------------------------------|
| Client: Xirrus | Job Number: J86254 |
| Model: XI-N300 (2x2 radio module) in XR1000 | T-Log Number: T86381 |
| Contact: Steve Smith | Account Manager: Michelle Kim |
| Standard: FCC 15.247/15.E/RSS-210 | Class: N/A |

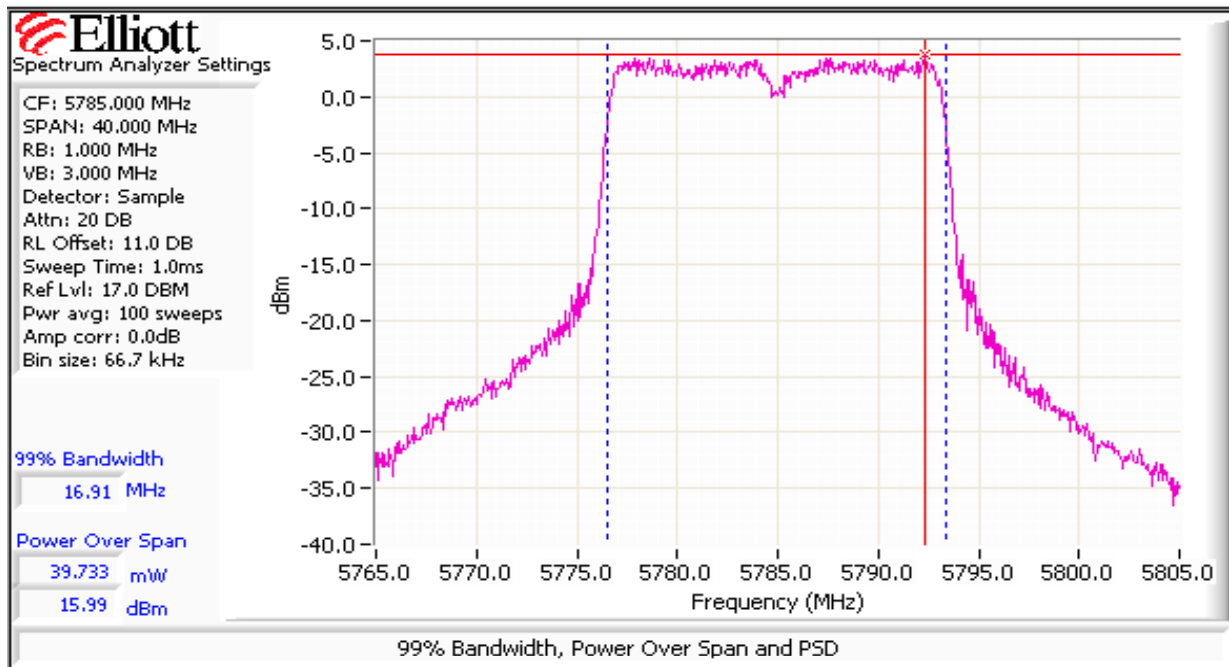


| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Operating Mode: 802.11n20
Transmitted signal on chain is coherent ? Yes

| 5785 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
|--------------------------------------|---------|---------|---------|---------|-------------------------|---------|----------|---------|
| Power Setting ^{Note 3} | 30.0 | 30.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 13.8 | 13.7 | | | 16.7 dBm | 0.047 W | 29.0 dBm | 0.792 W |
| Antenna Gain (dBi) ^{Note 2} | 4.0 | 4.0 | | | 7.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 17.8 | 17.66 | | | 23.8 dBm | 0.237 W | | |

| | |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc. |
| Note 2: | As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain |
| Note 3: | Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2. |

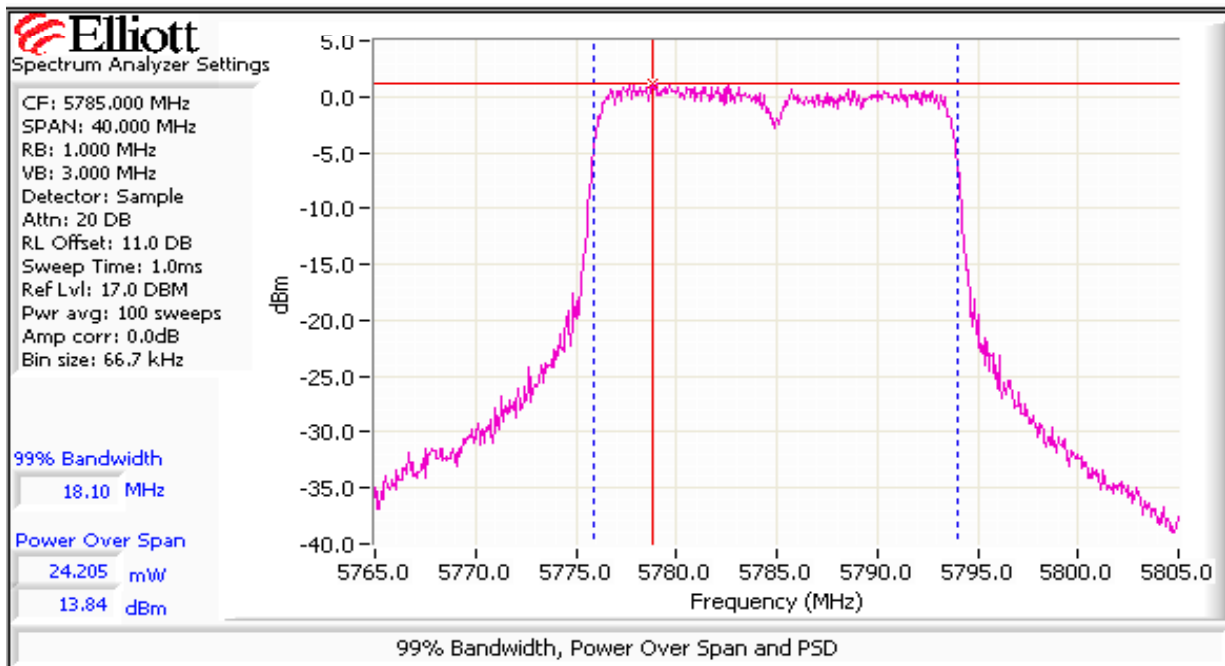

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XI-N300 (2x2 radio module) in XR1000 | T-Log Number: | T86381 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

XR2000 -

Run #1: Output Power - Chain A + B


Operating Mode: 802.11a

Transmitted signal on chain is coherent ? Yes

| 5745 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
|--------------------------------------|---------|---------|---------|---------|-------------------------|---------|----------|---------|
| Power Setting ^{Note 3} | 31.0 | 31.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 13.2 | 13.4 | | | 16.3 dBm | 0.043 W | 29.0 dBm | 0.792 W |
| Antenna Gain (dBi) ^{Note 2} | 4.0 | 4.0 | | | 7.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 17.2 | 17.4 | | | 23.3 dBm | 0.215 W | | |
| 5785 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
| Power Setting ^{Note 3} | 32.0 | 32.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 13.8 | 13.8 | | | 16.8 dBm | 0.048 W | 29.0 dBm | 0.792 W |
| Antenna Gain (dBi) ^{Note 2} | 4.0 | 4.0 | | | 7.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 17.8 | 17.8 | | | 23.8 dBm | 0.241 W | | |
| 5825 MHz | Chain 1 | Chain 2 | Chain 3 | Chain 4 | Total Across All Chains | | Limit | |
| Power Setting ^{Note 3} | 34.0 | 34.0 | | | | | | |
| Output Power (dBm) ^{Note 1} | 14.3 | 14.4 | | | 17.4 dBm | 0.054 W | 29.0 dBm | 0.792 W |
| Antenna Gain (dBi) ^{Note 2} | 4.0 | 4.0 | | | 7.0 dBi | | Pass | |
| eirp (dBm) ^{Note 2} | 18.3 | 18.4 | | | 24.4 dBm | 0.274 W | | |

| | |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc. |
| Note 2: | As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain |
| Note 3: | Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2. |

| | |
|---------------------------------------------|-------------------------------|
| Client: Xirrus | Job Number: J86254 |
| Model: XI-N300 (2x2 radio module) in XR1000 | T-Log Number: T86381 |
| Contact: Steve Smith | Account Manager: Michelle Kim |
| Standard: FCC 15.247/15.E/RSS-210 | Class: N/A |

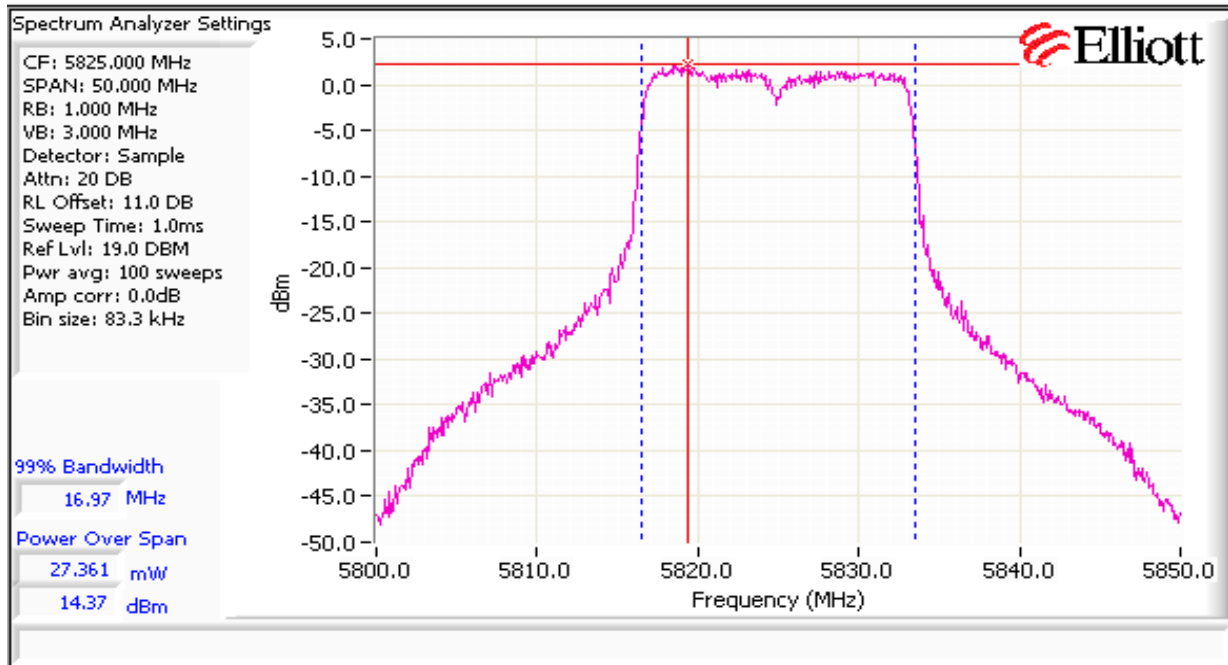



EMC Test Data

| | | | |
|------------------------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| | | Account Manager: | Michelle Kim |
| Contact: | Steve Smith | | - |
| Emissions Standard(s): | FCC 15.247/15.E/RSS-210 | Class: | - |
| Immunity Standard(s): | - | Environment: | - |

EMC Test Data

For The

Xirrus

Model

XI-N300 (2x2 radio module) in XR2000

Date of Last Test: 5/21/2012

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions - Band Edges

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 2/21/2012 Test Location: FT7

Test Engineer: Jack Liu

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

| Run # | Mode | Channel | Power Setting | Measured Power | Test Performed | Limit | Result / Margin |
|-------|---------|-----------------|---------------|----------------|--------------------------------------|---------------------------------|---------------------------------------|
| 1 | 802.11g | low 2412MHz | 28.0 | - | Restricted Band Edge (2390 MHz) | FCC Part 15.209 / 15.247(c) | 50.3 dBμV/m @ 2390.0 MHz (-3.7 dB) |
| | | high 2462MHz | 24.0 | - | Restricted Band Edge (2483.5 MHz) | FCC Part 15.209 / 15.247(c) | 51.0 dBμV/m @ 2483.5 MHz (-3.0 dB) |

Testing was performed on the worse case mode from the original filing. - 802.11g
Power was set to be within 0.5dB of the original filing power.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions: Temperature: 20-25 °C
Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |


Run #1: Radiated Spurious Emissions, 30 - 26500 MHz. Operating Mode: 802.11g MHz, 2x2

Run #1a: Channel 1@ 2412 MHz, Radio #6


Band Edge Signal Field Strength - Direct measurement of field strength

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|----------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| 2389.040 | 45.8 | V | 54.0 | -8.2 | AVG | 254 | 1.0 | |
| 2388.560 | 58.7 | V | 74.0 | -15.3 | PK | 254 | 1.0 | |
| 2390.000 | 50.3 | H | 54.0 | -3.7 | AVG | 178 | 1.0 | |
| 2389.840 | 65.1 | H | 74.0 | -8.9 | PK | 178 | 1.0 | |

RB 1 MHz; VB 10 Hz Black=Avg; RB 1MHz VB 3MHz Blue=Peak ; V

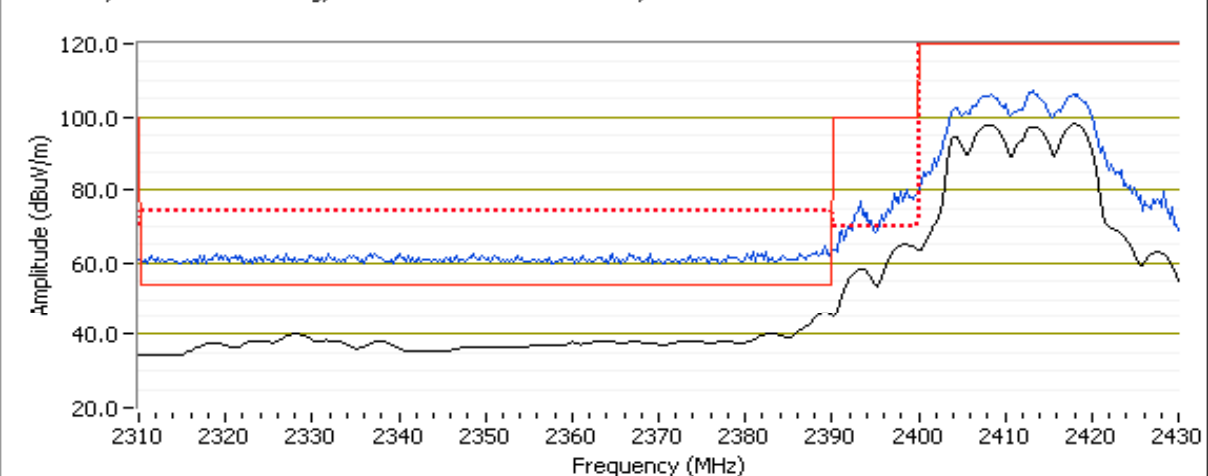

RB 1 MHz; VB 10 Hz Black=Avg; RB 1MHz VB 3MHz Blue=Peak ; H

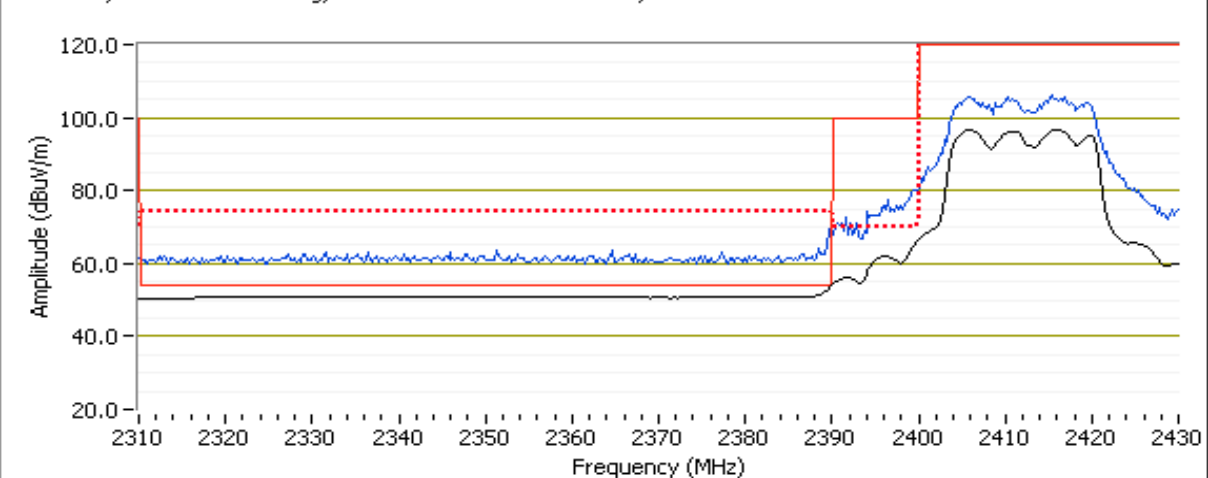


| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

High Channel @ 2462 MHz, Radio #6


Band Edge Signal Field Strength - Direct measurement of field strength

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|----------|
| MHz | dBuV/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| 2483.500 | 51.0 | V | 54.0 | -3.0 | AVG | 258 | 1.2 | |
| 2483.630 | 66.4 | V | 74.0 | -7.6 | PK | 258 | 1.2 | |
| 2483.500 | 49.4 | H | 54.0 | -4.6 | AVG | 178 | 1.0 | |
| 2484.260 | 65.1 | H | 74.0 | -8.9 | PK | 178 | 1.0 | |

RB 1 MHz; VB 10 Hz Black=Avg; RB 1MHz VB 3MHz Blue=Peak ; V

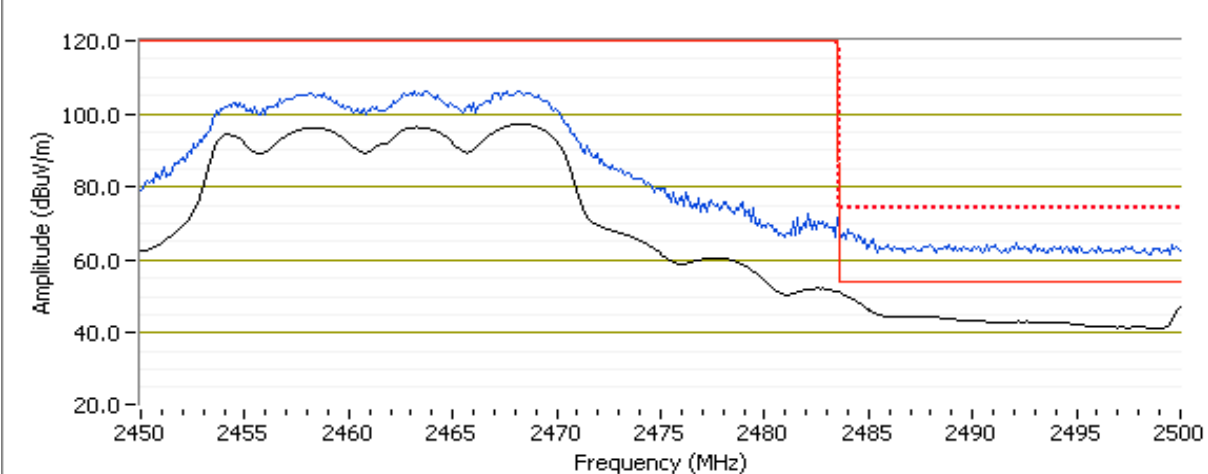

RB 1 MHz; VB 10 Hz Black=Avg; RB 1MHz VB 3MHz Blue=Peak ; H

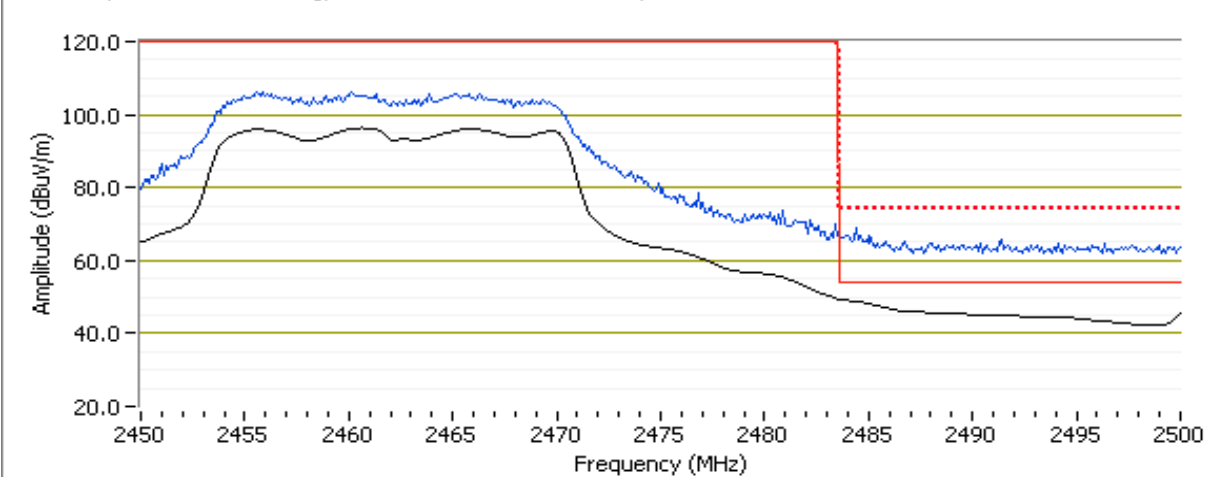

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions 2x2 and 3x3 Modules - 802.11b, 802.11g, HT20 Modes

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C

Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

| Run # | Mode | Channel | Power Setting | Measured Power | Test Performed | Limit | Result / Margin |
|-------|-------------------|-----------|-----------------------------------|----------------|-----------------------------------|-----------------------------|------------------------------------|
| 1 | 802.11b / 802.11g | See Below | See Below Lowered Power | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 53.6 dBµV/m @ 4824.0 MHz (-0.4 dB) |
| 2 | 802.11b / 802.11g | See Below | See Below Lowered Power | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 53.3 dBµV/m @ 4924.0 MHz (-0.7 dB) |
| 3 | 802.11b / 802.11g | See Below | See Below Lowered Power | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 53.0 dBµV/m @ 4874.0 MHz (-1.0 dB) |
| 4 | 802.11HT20 | See Below | See Below | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 53.0dBµV/m @ 1239.9MHz (-1.0dB) |
| 5 | 802.11HT20 | See Below | See Below | | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 52.3dBµV/m @ 1240.0MHz (-1.7dB) |

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

System Configuration:

| Radio # | Frequency | Module | Mode | Setting | Radio # | Frequency | Module | Mode | Setting |
|---------------|-----------|--------|------------|---------|----------------|-----------|--------|---------|---------|
| Run: 1 | | | | | Run: 2 | | | | |
| 1 (# 2) | 2412 | 2x2 | 802.11b | 33 (38) | 1 (#2) | 2462 | 2x2 | 802.11b | 33 (40) |
| 0 (# 10) | 2462 | 3x3 | 802.11b | 38.0 | 0 (#10) | 2412 | 3x3 | 802.11b | 34 (37) |
| 2 (#6) | 2412 | 2x2 | 802.11g | 28.0 | 2 (#6) | 2462 | 2x2 | 802.11g | 24.0 |
| 3 (#14) | 2462 | 3x3 | 802.11g | 32.0 | 3 (#14) | 2412 | 3x3 | 802.11g | 28.0 |
| Run: 3 | | | | | | | | | |
| 1 (# 2) | 2437 | 2x2 | 802.11b | 31(40) | | | | | |
| 0 (# 10) | 2437 | 3x3 | 802.11b | 40.0 | | | | | |
| 2 (#6) | 2437 | 2x2 | 802.11g | 35.0 | | | | | |
| 3 (#14) | 2437 | 3x3 | 802.11g | 39.0 | | | | | |
| Run: 4 | | | | | Setting | | | | |
| 1 (# 2) | 2412 | 2x2 | 802.11HT20 | | | | | | 26.0 |
| 0 (# 10) | 2462 | 3x3 | 802.11HT20 | | | | | | 25.0 |
| 2 (#6) | 2462 | 2x2 | 802.11HT20 | | | | | | 24.0 |
| 3 (#14) | 2412 | 3x3 | 802.11HT20 | | | | | | 28.0 |
| Run: 5 | | | | | Setting | | | | |
| 1 (# 2) | 2437 | 2x2 | 802.11HT20 | | | | | | 34.0 |
| 0 (# 10) | 2437 | 3x3 | 802.11HT20 | | | | | | 35.0 |
| 2 (#6) | 2437 | 2x2 | 802.11HT20 | | | | | | 34.0 |
| 3 (#14) | 2437 | 3x3 | 802.11HT20 | | | | | | 35.0 |

Notes - Multiple radios operating at the same time as shown above. In all cases, power set to the maximum worse case single channel power, transmitting on all chains.

Highlights indicate that power was lowered from the original level. Notation - XX (YY), XX = passing power setting, YY = power setting for original power levels.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #1: Radiated Spurious Emissions, 1-26.5GHz. 2x2 and 3x3 modules.

Date of Test: 2/22/2012

Test Location: FT7


Test Engineer: Rafael Varelas

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|----------------------------------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| 4823.990 | 53.6 | V | 54.0 | -0.4 | AVG | 15 | 1.1 | RB 1 MHz;VB 10 Hz;Pk |
| 4823.870 | 55.5 | V | 74.0 | -18.5 | PK | 15 | 1.1 | RB 1 MHz;VB 3 MHz;Pk |
| 4923.990 | 53.4 | V | 54.0 | -0.6 | AVG | 185 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 4923.960 | 55.7 | V | 74.0 | -18.3 | PK | 185 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 7385.380 | 50.2 | V | 54.0 | -3.8 | AVG | 243 | 1.3 | RB 1 MHz;VB 10 Hz;Pk |
| 7384.650 | 56.0 | V | 74.0 | -18.0 | PK | 243 | 1.3 | RB 1 MHz;VB 3 MHz;Pk |
| 9847.960 | 61.3 | H | - | - | PK | 268 | 1.0 | RB 100 kHz;VB 100 kHz;Pk, note 2 |
| 1600.020 | 51.5 | V | 54.0 | -2.5 | AVG | 292 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 1599.960 | 52.7 | V | 74.0 | -21.3 | PK | 292 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 1551.160 | 48.0 | V | 54.0 | -6.0 | AVG | 147 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 1550.020 | 58.1 | V | 74.0 | -15.9 | PK | 147 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 1241.130 | 53.1 | V | 54.0 | -0.9 | AVG | 26 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 1241.590 | 62.5 | V | 74.0 | -11.5 | PK | 26 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 12310.000 | 44.7 | H | 54.0 | -9.3 | Peak | 187 | 1.0 | |
| 7237.590 | 50.8 | V | - | - | Peak | 80 | 1.0 | Note 2 |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification. |
| Note 3: | No significant emissions were observed for 18-26GHz |

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

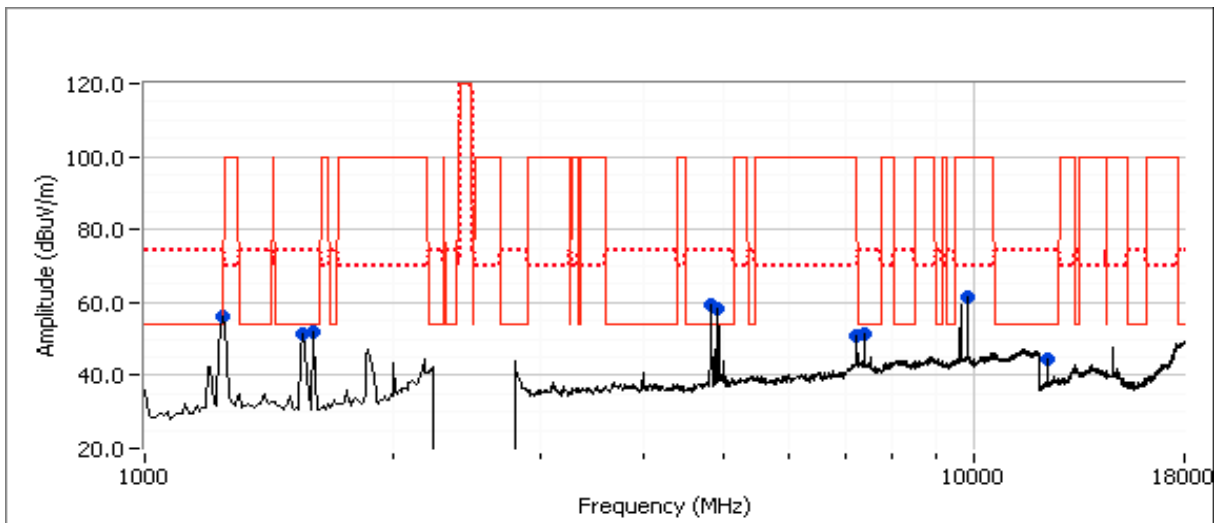

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #2: Radiated Spurious Emissions, 1-26.5GHz. 2x2 and 3x3 modules.

Date of Test: 2/22/2012

Test Location: FT7


Test Engineer: Rafael Varelas

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|----------------------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| 4923.950 | 53.3 | V | 54.0 | -0.7 | AVG | 13 | 1.3 | RB 1 MHz;VB 10 Hz;Pk |
| 4924.000 | 54.5 | V | 74.0 | -19.5 | PK | 13 | 1.3 | RB 1 MHz;VB 3 MHz;Pk |
| 4823.980 | 52.6 | V | 54.0 | -1.4 | AVG | 194 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 4824.000 | 54.4 | V | 74.0 | -19.6 | PK | 194 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 1240.000 | 53.0 | V | 54.0 | -1.0 | AVG | 16 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 1239.790 | 63.5 | V | 74.0 | -10.5 | PK | 16 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 1552.000 | 48.1 | V | 54.0 | -5.9 | AVG | 150 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 1552.970 | 58.4 | V | 74.0 | -15.6 | PK | 150 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 1599.990 | 51.5 | V | 54.0 | -2.5 | AVG | 302 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 1600.090 | 52.8 | V | 74.0 | -21.2 | PK | 302 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 7383.210 | 48.6 | V | 54.0 | -5.4 | AVG | 360 | 1.3 | RB 1 MHz;VB 10 Hz;Pk |
| 7382.910 | 54.8 | V | 74.0 | -19.2 | PK | 360 | 1.3 | RB 1 MHz;VB 3 MHz;Pk |
| 12310.000 | 42.0 | V | 54.0 | -12.0 | Peak | 0 | 1.3 | |
| 9848.060 | 59.4 | V | - | - | Peak | 186 | 1.0 | Note 2 |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification. |
| Note 3: | No significant emissions were observed for 18-26GHz |

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

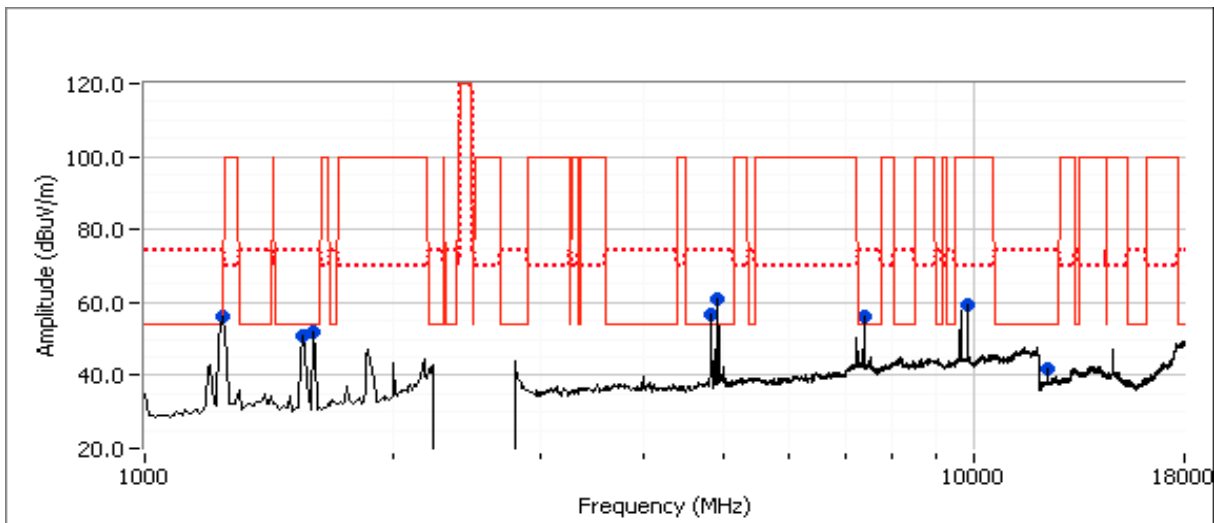

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #3: Radiated Spurious Emissions, 1-26.5GHz. 2x2 and 3x3 modules.

Date of Test: 2/22/2012

Test Location: FT7

Test Engineer: Rafael Varelas

Other Spurious Emissions


| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|--------------------------|
| MHz | dBμV/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| 4873.970 | 53.0 | V | 54.0 | -1.0 | AVG | 120 | 1.1 | RB 1 MHz;VB 10 Hz;Pk |
| 4874.040 | 54.7 | V | 74.0 | -19.3 | PK | 120 | 1.1 | RB 1 MHz;VB 3 MHz;Pk |
| 7310.370 | 48.5 | V | 54.0 | -5.5 | AVG | 108 | 1.1 | RB 1 MHz;VB 10 Hz;Pk |
| 7310.670 | 68.4 | V | 74.0 | -5.6 | PK | 108 | 1.1 | RB 1 MHz;VB 3 MHz;Pk |
| 1551.080 | 47.6 | V | 54.0 | -6.4 | AVG | 139 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 1553.380 | 57.7 | V | 74.0 | -16.3 | PK | 139 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 9747.990 | 62.5 | V | 70.0 | -7.5 | PK | 174 | 1.3 | RB 100 kHz;VB 100 kHz;Pk |
| 1239.980 | 52.9 | V | 54.0 | -1.1 | AVG | 34 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 1239.980 | 63.7 | V | 74.0 | -10.3 | PK | 34 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |
| 1600.050 | 51.3 | V | 54.0 | -2.7 | AVG | 292 | 1.0 | RB 1 MHz;VB 10 Hz;Pk |
| 12180.000 | 45.4 | V | 54.0 | -8.6 | Peak | 203 | 1.0 | |
| 1600.050 | 52.6 | V | 74.0 | -21.4 | PK | 292 | 1.0 | RB 1 MHz;VB 3 MHz;Pk |

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

Note 3: No significant emissions were observed for 18-26GHz

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

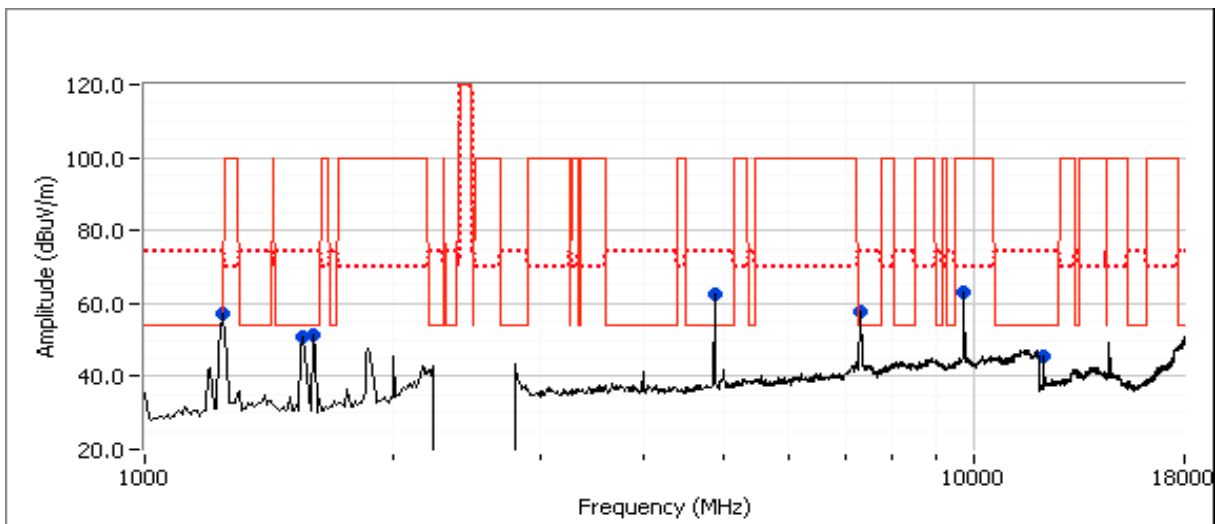

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #4: Radiated Spurious Emissions, 1-26.5GHz. 2x2 and 3x3 modules.

Date of Test: 2/23/2012


Test Location: FT7

Test Engineer: Jack Liu

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------------|-----|-----------------|--------|-----------|---------|--------|----------|
| MHz | dB μ V/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| 1239.920 | 53.0 | V | 54.0 | -1.0 | AVG | 352 | 1.0 | |
| 1239.960 | 63.6 | V | 74.0 | -10.4 | PK | 352 | 1.0 | |
| 1551.370 | 49.5 | V | 54.0 | -4.5 | AVG | 152 | 1.0 | |
| 1555.400 | 60.0 | V | 74.0 | -14.0 | PK | 152 | 1.0 | |
| 1600.030 | 52.4 | V | 54.0 | -1.6 | AVG | 298 | 1.0 | |
| 1600.010 | 53.9 | V | 74.0 | -20.1 | PK | 298 | 1.0 | |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band but the more stringent restricted band limit was used. |
| Note 3: | No significant emissions were observed for 18-26GHz |

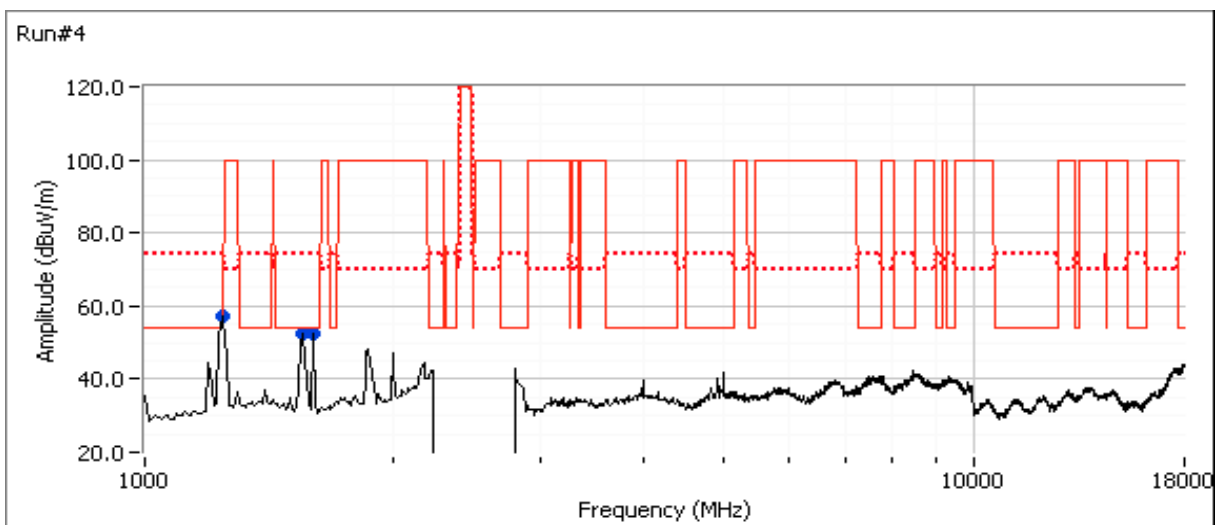

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #5: Radiated Spurious Emissions, 1-26.5GHz. 2x2 and 3x3 modules.

Date of Test: 2/23/2012

Test Location: FT7

Test Engineer: Jack Liu


Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|----------|
| MHz | dBuV/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| 1239.960 | 52.3 | V | 54.0 | -1.7 | AVG | 328 | 1.4 | |
| 1237.240 | 62.5 | V | 74.0 | -11.5 | PK | 328 | 1.4 | |
| 1551.000 | 49.5 | V | 54.0 | -4.5 | AVG | 150 | 1.1 | |
| 1551.100 | 59.7 | V | 74.0 | -14.3 | PK | 150 | 1.1 | |
| 1600.010 | 52.3 | V | 54.0 | -1.7 | AVG | 299 | 1.1 | |
| 1600.000 | 54.0 | V | 74.0 | -20.0 | PK | 299 | 1.1 | |
| 4872.930 | 42.7 | V | 54.0 | -11.3 | AVG | 196 | 1.2 | |
| 4874.260 | 55.3 | V | 74.0 | -18.7 | PK | 196 | 1.2 | |
| 7311.830 | 42.6 | V | 54.0 | -11.4 | AVG | 84 | 1.2 | |
| 7313.630 | 66.9 | V | 74.0 | -7.1 | PK | 84 | 1.2 | |
| 12186.730 | 40.5 | V | 54.0 | -13.5 | AVG | 158 | 1.0 | |
| 12186.330 | 51.5 | V | 74.0 | -22.5 | PK | 158 | 1.0 | |

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

Note 3: No significant emissions were observed for 18-26GHz

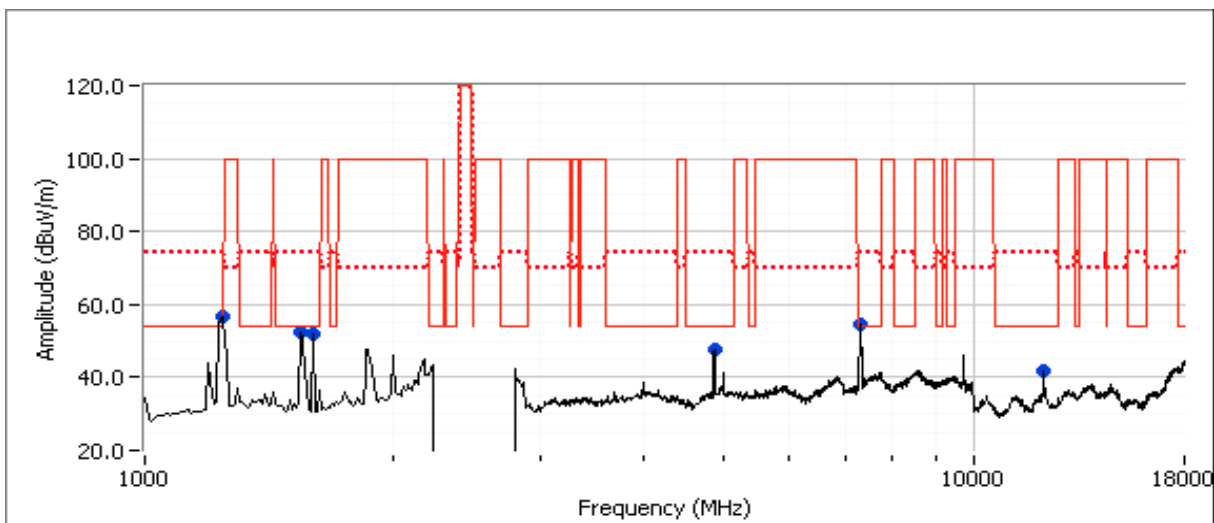

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions 2x2 and 3x3 Modules - HT40 Mode

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C

Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

| Run # | Mode | Channel | Power Setting | Measured Power | Test Performed | Limit | Result / Margin |
|-------|------------|-----------|-----------------------------------|----------------|--------------------------------|-----------------------------|------------------------------------|
| 1 | 802.11HT40 | See Below | See Below | - | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 48.4 dBμV/m @ 1240.0 MHz (-5.6 dB) |
| 2 | 802.11HT40 | See Below | See Below Lowered Power | - | Radiated Emissions, 1 - 26 GHz | FCC Part 15.209 / 15.247(c) | 73.2 dBμV/m @ 7308.8 MHz (-0.8 dB) |

System Configuration:

| Radio # | Frequency | Module | Mode | Pwr setting |
|---------|-----------|--------|------|-------------|
|---------|-----------|--------|------|-------------|

Run: 1

| | | | | |
|----------|------|-----|------------|----|
| 1 (# 2) | 2422 | 2x2 | 802.11HT40 | 28 |
| 0 (# 10) | 2452 | 3x3 | 802.11HT40 | 21 |
| 2 (#6) | 2452 | 2x2 | 802.11HT40 | 32 |
| 3 (#14) | 2422 | 3x3 | 802.11HT40 | 19 |

Run: 2

| | | | | |
|----------|------|-----|------------|----------------|
| 1 (# 2) | 2437 | 2x2 | 802.11HT40 | 34 (36) |
| 0 (# 10) | 2437 | 3x3 | 802.11HT40 | 28 |
| 2 (#6) | 2437 | 2x2 | 802.11HT40 | 34 (36) |
| 3 (#14) | 2437 | 3x3 | 802.11HT40 | 28 |

Notes - Multiple radios operating at the same time as shown above. In all cases, power set to the maximum worse case single channel power. transmitting on all chains.

Highlights indicate that power was lowered from the original level. Notation - XX (YY), XX = passing power setting, YY = power setting for original power levels.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XL-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #1: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT40 - 2x2 and 3x3 modules.

Date of Test: 2/24/2012

Test Location: FT3


Test Engineer: Jack Liu

Other Spurious Emissions


| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|----------|
| MHz | dBuV/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| 1240.000 | 48.4 | H | 54.0 | -5.6 | AVG | 92 | 1.0 | |
| 7360.330 | 44.5 | V | 54.0 | -9.5 | AVG | 261 | 1.3 | |
| 12254.600 | 43.8 | V | 54.0 | -10.2 | AVG | 212 | 1.1 | |
| 1600.010 | 43.7 | H | 54.0 | -10.3 | AVG | 37 | 1.4 | |
| 7367.200 | 59.7 | V | 74.0 | -14.3 | PK | 261 | 1.3 | |
| 1238.880 | 57.9 | H | 74.0 | -16.1 | PK | 92 | 1.0 | |
| 12273.470 | 55.3 | V | 74.0 | -18.7 | PK | 212 | 1.1 | |
| 1599.930 | 45.8 | H | 74.0 | -28.2 | PK | 37 | 1.4 | |

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

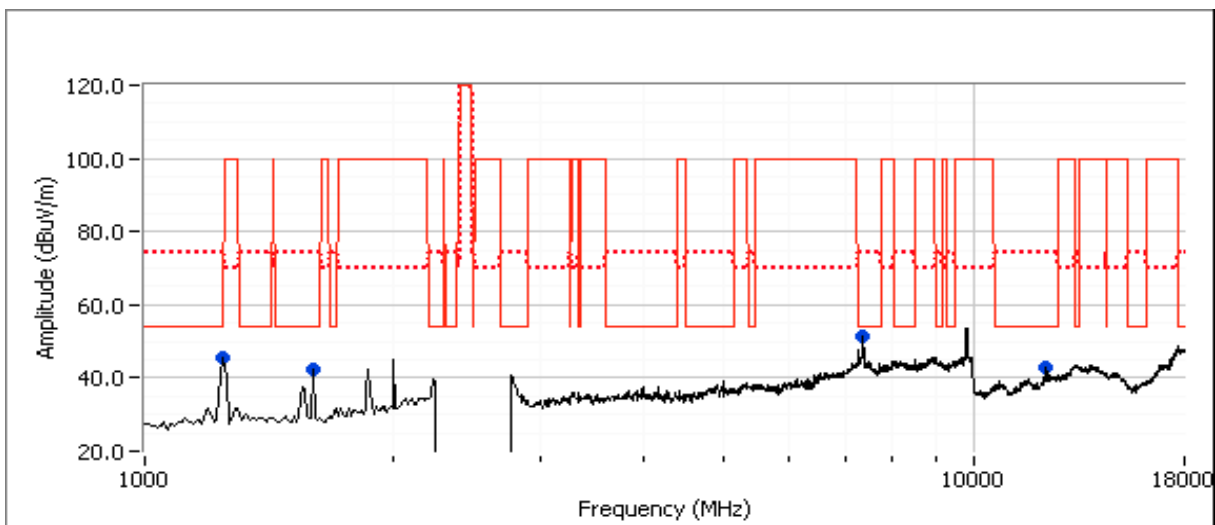

| | |
|---------------------------------------------|-------------------------------|
| Client: Xirrus | Job Number: J86256 |
| Model: XI-N300 (2x2 radio module) in XR2000 | T-Log Number: T86500 |
| Contact: Steve Smith | Account Manager: Michelle Kim |
| Standard: FCC 15.247/15.E/RSS-210 | Class: N/A |

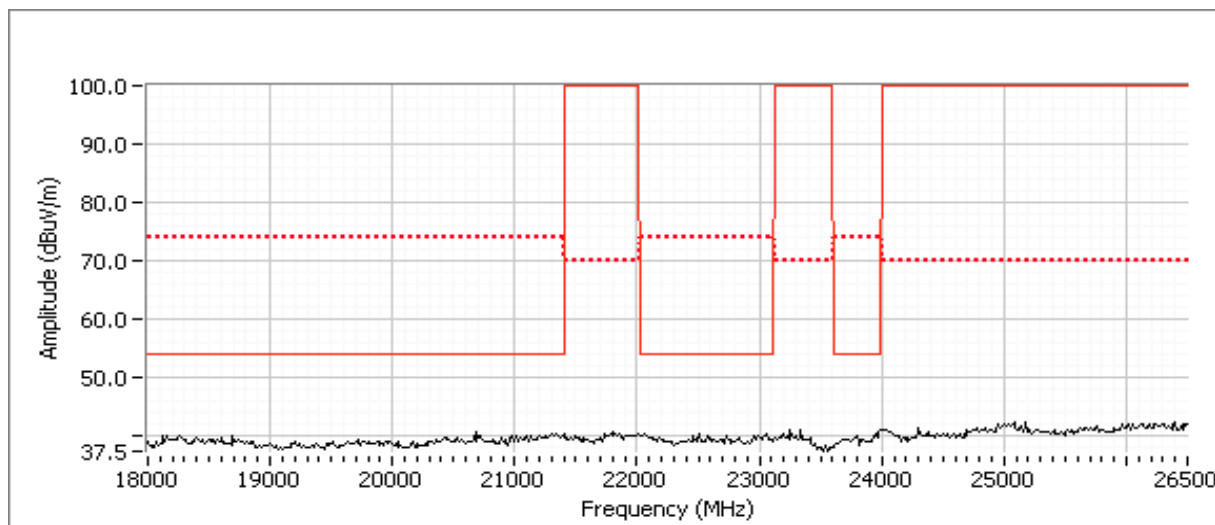

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #2: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT40 - 2x2 and 3x3 modules.

Date of Test: 2/24/2012

Test Location: FT3

Test Engineer: Jack Liu



Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|---------------------------------------|--------|-----|-----------------|--------|-----------|---------|--------|----------|
| MHz | dBμV/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| 4 radio all on 2437MHz | | | | | | | | |
| 1239.860 | 52.8 | H | 54.0 | -1.2 | AVG | 219 | 1.1 | |
| 1239.610 | 62.1 | H | 74.0 | -11.9 | PK | 219 | 1.1 | |
| 5000.070 | 39.6 | H | 54.0 | -14.4 | AVG | 0 | 1.0 | |
| 5000.040 | 46.0 | H | 74.0 | -28.0 | PK | 0 | 1.0 | |
| 4886.370 | 41.5 | H | 54.0 | -12.5 | AVG | 207 | 1.1 | |
| 4884.770 | 52.6 | H | 74.0 | -21.4 | PK | 207 | 1.1 | |
| 1550.130 | 44.5 | H | 54.0 | -9.5 | AVG | 159 | 1.2 | |
| 1552.100 | 55.1 | H | 74.0 | -18.9 | PK | 159 | 1.2 | |
| 12199.200 | 34.2 | V | 54.0 | -19.8 | AVG | 212 | 1.0 | |
| 12189.200 | 46.5 | V | 74.0 | -27.5 | PK | 212 | 1.0 | |
| radio #2 pwr setting 34 (on 2437MHz) | | | | | | | | |
| 7303.930 | 50.8 | V | 54.0 | -3.2 | AVG | 99 | 1.4 | |
| 7308.800 | 73.2 | V | 74.0 | -0.8 | PK | 99 | 1.4 | |
| radio #10 pwr setting 28 (on 2437MHz) | | | | | | | | |
| 7302.130 | 41.0 | V | 54.0 | -13.0 | AVG | 341 | 1.4 | |
| 7304.870 | 52.6 | V | 74.0 | -21.4 | PK | 341 | 1.4 | |

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

| | |
|---------------------------------------------|-------------------------------|
| Client: Xirrus | Job Number: J86256 |
| Model: XI-N300 (2x2 radio module) in XR2000 | T-Log Number: T86500 |
| Contact: Steve Smith | Account Manager: Michelle Kim |
| Standard: FCC 15.247/15.E/RSS-210 | Class: N/A |

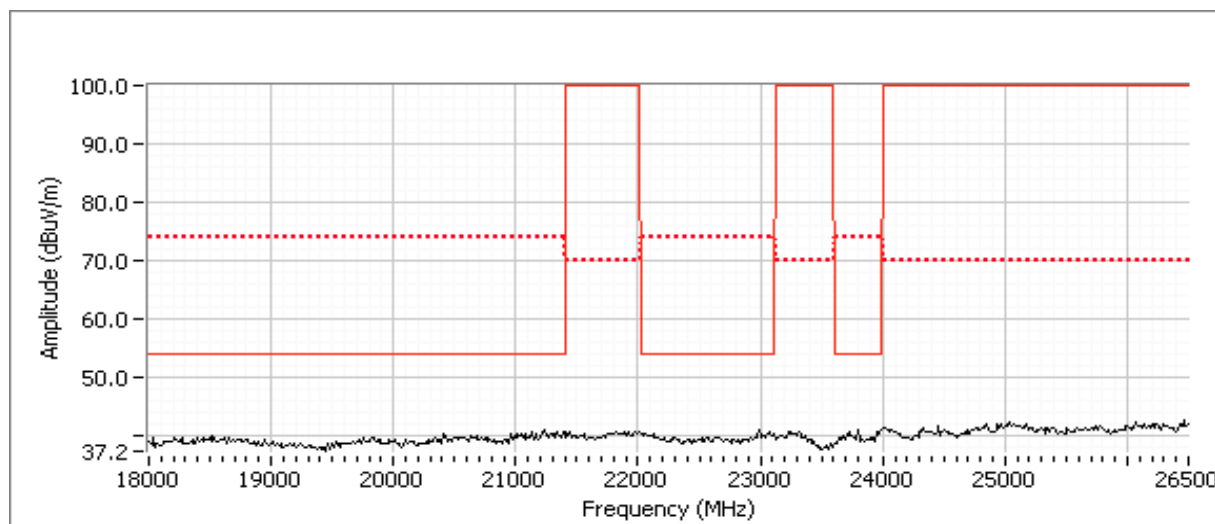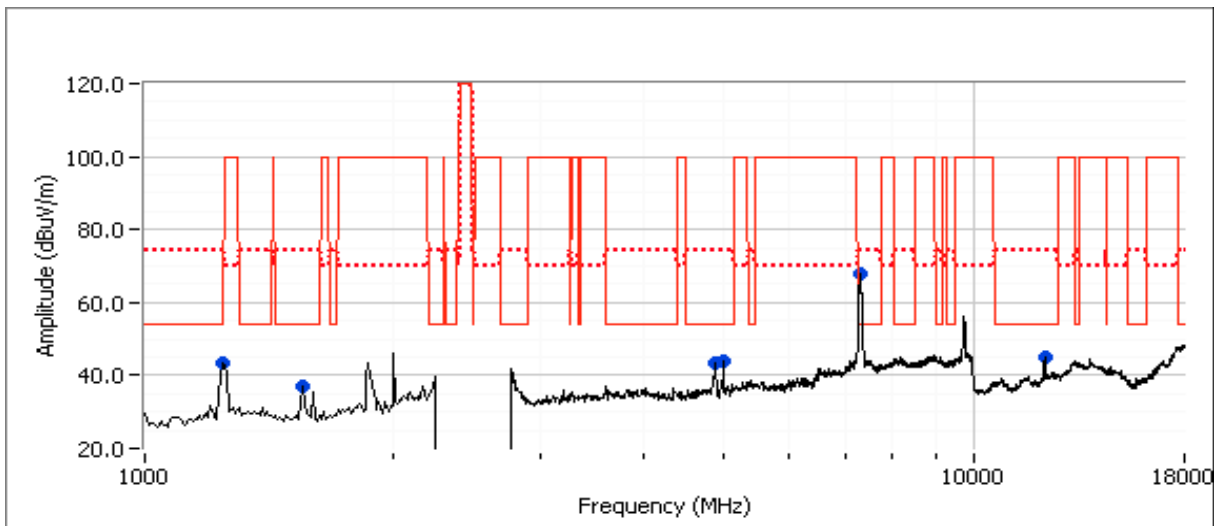

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions 2x2 and 3x3 Modules - 802.11a, HT20, HT40 Modes

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

| Run # | Mode | Channel | Power Setting | Measured Power | Test Performed | Limit | Result / Margin |
|-------|----------------|-----------|-----------------------------------|----------------|-----------------------------------|--------------------------------|---------------------------------------|
| 1 | 802.11a | See Below | See Below Lowered Power | - | Radiated Emissions, 1 - 40 GHz | FCC Part 15.209 / 15.247(c) | 54.0 dBμV/m @ 11491.5 MHz (0.0 dB) |
| 2 | 802.11a | See Below | See Below Lowered Power | - | Radiated Emissions, 1 - 40 GHz | FCC Part 15.209 / 15.247(c) | 54.0 dBμV/m @ 11571.7 MHz (0.0 dB) |
| 3 | 802.11a | See Below | See Below Lowered Power | - | Radiated Emissions, 1 - 40 GHz | FCC Part 15.209 / 15.247(c) | 54.0 dBμV/m @ 11493.4 MHz (0.0 dB) |
| 5 | 802.11HT4 0 | See Below | See Below | - | Radiated Emissions, 1 - 40 GHz | FCC Part 15.209 / 15.247(c) | 52.4 dBμV/m @ 5440.0 MHz (-1.6 dB) |

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

System Configuration:

| Radio # | Frequency | Module | Mode | Pwr setting | CH Number |
|---------------|-----------|--------|-----------|-------------|-----------|
| Run: 1 | | | | | |
| 1 (# 2) | 5745 | 2x2 | 802.11a | 31 (35) | 149 |
| 0 (# 10) | 5825 | 3x3 | 802.11a | 36 | 165 |
| 2 (#6) | 5825 | 2x2 | 802.11a | 34 (36) | 165 |
| 3 (#14) | 5745 | 3x3 | 802.11a | 32 (36) | 149 |
| Run: 2 | | | | | |
| 1 (# 2) | 5785 | 2x2 | 802.11a | 32 (36) | 157 |
| 0 (# 10) | 5785 | 3x3 | 802.11a | 34 (36) | 157 |
| 2 (#6) | 5785 | 2x2 | 802.11n20 | 34 | 157 |
| 3 (#14) | 5785 | 3x3 | 802.11n20 | 31 (36) | 157 |
| Run: 3 | | | | | |
| 1 (# 2) | 5745 | 2x2 | 802.11n20 | 30 | 149 |
| 0 (# 10) | 5825 | 3x3 | 802.11n20 | 36 | 165 |
| 2 (#6) | 5825 | 2x2 | 802.11n20 | 34 | 165 |
| 3 (#14) | 5745 | 3x3 | 802.11n20 | 33 (34) | 149 |
| Run: 5 | | | | | |
| 1 (# 2) | 5755 | 2x2 | 802.11n40 | 32 | |
| 0 (# 10) | 5795 | 3x3 | 802.11n40 | 32 | |
| 2 (#6) | 5795 | 2x2 | 802.11n40 | 33 | |
| 3 (#14) | 5755 | 3x3 | 802.11n40 | 32 | |

Notes - Multiple radios operating at the same time as shown above. In all cases, power set to the maximum worse case single channel power, transmitting on all chains.

Testing below is based on preliminary testing that identified the emissions of interest.

Highlights indicate that power was lowered from the original level. Notation - XX (YY), XX = passing power setting, YY = power setting for original power levels.

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |


Run #1: Radiated Spurious Emissions, 1-40 GHz. 802.11a - 2x2 and 3x3 modules.

Date of Test: 3/8/2012
Test Engineer: John Caizzi

Test Location: Chamber #3

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------------|-----|-----------------|--------|-----------|---------|--------|------------------------------|
| MHz | dB μ V/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| 11491.530 | 54.0 | V | 54.0 | 0.0 | AVG | 152 | 1.33 | Radio #2 only, setting = 31 |
| 11492.470 | 65.2 | V | 74.0 | -8.8 | PK | 152 | 1.33 | Radio #2 only, setting = 31 |
| 11492.000 | 53.1 | V | 54.0 | -0.9 | AVG | 353 | 1.22 | Radio #14 only, setting = 32 |
| 11491.730 | 64.0 | V | 74.0 | -10.0 | PK | 353 | 1.22 | Radio #14 only, setting = 32 |
| 11650.800 | 53.6 | V | 54.0 | -0.4 | AVG | 289 | 1.31 | Radio #6 only, setting = 34 |
| 11650.000 | 65.4 | V | 74.0 | -8.6 | PK | 289 | 1.31 | Radio #6 only, setting = 34 |
| 11650.530 | 49.5 | V | 54.0 | -4.5 | AVG | 113 | 1.31 | Radio #10 only, setting = 36 |
| 11649.930 | 60.8 | V | 74.0 | -13.2 | PK | 113 | 1.31 | Radio #10 only, setting = 36 |

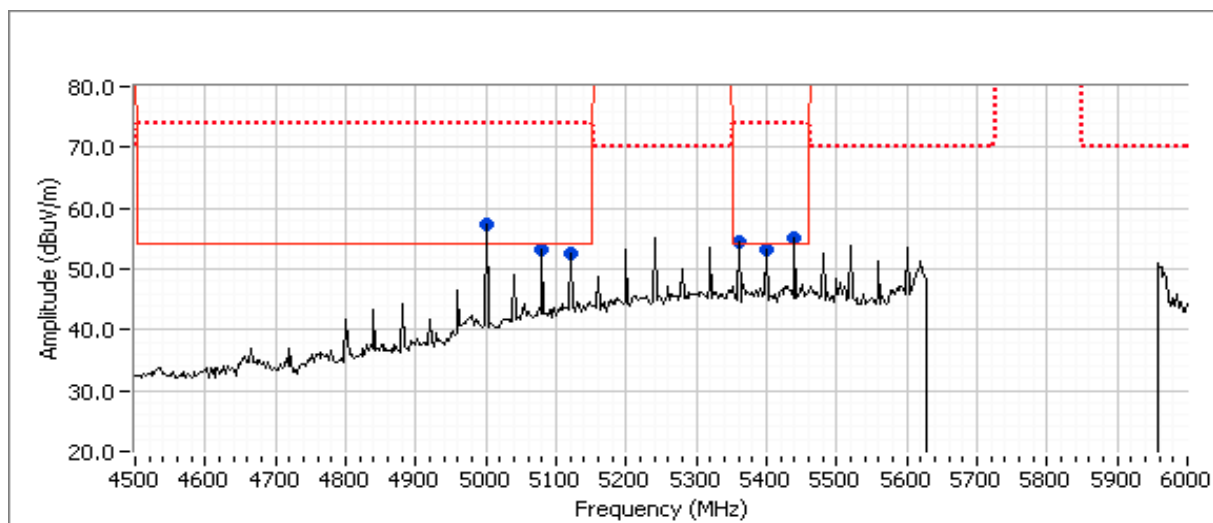

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #2: Radiated Spurious Emissions, 1-40 GHz. 802.11a & 802.11HT20 - 2x2 and 3x3 modules.

Date of Test: 3/8/2012

Test Location: Chamber 3

Test Engineer: John Caizzi

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|----------|
| MHz | dBμV/m | v/h | Limit | Margin | PK/QP/Avg | degrees | meters | |
| 11570.070 | 53.9 | V | 54.0 | -0.1 | AVG | 26 | 1.06 | |
| 11570.470 | 65.3 | V | 74.0 | -8.7 | PK | 26 | 1.06 | |
| 11571.730 | 54.0 | V | 54.0 | 0.0 | AVG | 326 | 1.10 | |
| 11572.530 | 66.1 | V | 74.0 | -7.9 | PK | 326 | 1.10 | |
| 11570.530 | 53.3 | V | 54.0 | -0.7 | AVG | 202 | 1.16 | |
| 11572.730 | 64.7 | V | 74.0 | -9.3 | PK | 202 | 1.16 | |
| 11570.270 | 50.9 | V | 54.0 | -3.1 | AVG | 113 | 1.21 | |
| 11570.330 | 62.1 | V | 74.0 | -11.9 | PK | 113 | 1.21 | |
| 5400.070 | 53.6 | V | 54.0 | -0.4 | AVG | 260 | 1.20 | |
| 5400.320 | 61.5 | V | 74.0 | -12.5 | PK | 260 | 1.20 | |
| 5435.280 | 46.0 | V | 54.0 | -8.0 | AVG | 160 | 1.06 | |
| 5437.700 | 58.1 | V | 74.0 | -15.9 | PK | 160 | 1.06 | |
| 5359.970 | 51.0 | V | 54.0 | -3.0 | AVG | 255 | 1.07 | |
| 5360.200 | 60.8 | V | 74.0 | -13.2 | PK | 255 | 1.07 | |
| 5120.050 | 49.9 | V | 54.0 | -4.1 | AVG | 178 | 1.13 | |
| 5119.970 | 57.7 | V | 74.0 | -16.3 | PK | 178 | 1.13 | |
| 5080.000 | 50.3 | V | 54.0 | -3.7 | AVG | 266 | 1.02 | |
| 5079.720 | 58.3 | V | 74.0 | -15.7 | PK | 266 | 1.02 | |
| 5440.020 | 50.4 | V | 54.0 | -3.6 | AVG | 283 | 1.45 | |
| 5439.880 | 57.6 | V | 74.0 | -16.4 | PK | 283 | 1.45 | |
| 5440.030 | 53.7 | V | 54.0 | -0.3 | AVG | 71 | 1.03 | |
| 5440.230 | 59.4 | V | 74.0 | -14.6 | PK | 71 | 1.03 | |
| 5440.000 | 51.2 | V | 54.0 | -2.8 | AVG | 360 | 1.44 | |
| 5440.320 | 58.2 | V | 74.0 | -15.8 | PK | 360 | 1.44 | |

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #3: Radiated Spurious Emissions, 1-40 GHz. 802.11HT20 - 2x2 and 3x3 modules.

Date of Test: 3/8/2012 & 3/9/12
Test Engineer: John Caizzi

Test Location: FT3

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|----------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| 5080.000 | 48.3 | V | 54.0 | -5.7 | AVG | 73 | 1.01 | |
| 5080.020 | 55.3 | V | 74.0 | -18.7 | PK | 73 | 1.01 | |
| 5119.980 | 49.8 | V | 54.0 | -4.2 | AVG | 179 | 1.00 | |
| 5119.980 | 56.9 | V | 74.0 | -17.1 | PK | 179 | 1.00 | |
| 5360.180 | 50.3 | V | 54.0 | -3.7 | AVG | 260 | 1.32 | |
| 5360.080 | 58.0 | V | 74.0 | -16.0 | PK | 260 | 1.32 | |
| 5400.050 | 49.7 | V | 54.0 | -4.3 | AVG | 107 | 1.45 | |
| 5399.870 | 56.7 | V | 74.0 | -17.3 | PK | 107 | 1.45 | |
| 5399.920 | 47.2 | V | 54.0 | -6.8 | AVG | 307 | 1.52 | |
| 5399.950 | 52.4 | V | 74.0 | -21.6 | PK | 307 | 1.52 | |
| 5399.980 | 44.5 | V | 54.0 | -9.5 | AVG | 239 | 1.25 | |
| 5400.020 | 50.9 | V | 74.0 | -23.1 | PK | 239 | 1.25 | |
| 5400.020 | 44.2 | V | 54.0 | -9.8 | AVG | 51 | 1.00 | |
| 5400.200 | 51.7 | V | 74.0 | -22.3 | PK | 51 | 1.00 | |
| 5440.020 | 53.1 | V | 54.0 | -0.9 | AVG | 184 | 1.31 | |
| 5440.150 | 59.1 | V | 74.0 | -14.9 | PK | 184 | 1.31 | |
| 5436.400 | 39.0 | V | 54.0 | -15.0 | AVG | 291 | 1.00 | |
| 5439.820 | 50.0 | V | 74.0 | -24.0 | PK | 291 | 1.00 | |
| 5439.950 | 44.0 | V | 54.0 | -10.0 | AVG | 55 | 1.25 | |
| 5439.770 | 50.8 | V | 74.0 | -23.2 | PK | 55 | 1.25 | |
| 11493.400 | 54.0 | V | 54.0 | 0.0 | AVG | 355 | 1.17 | |
| 11492.870 | 65.6 | V | 74.0 | -8.4 | PK | 355 | 1.17 | |
| 11493.070 | 44.5 | V | 54.0 | -9.5 | AVG | 311 | 1.01 | |
| 11490.930 | 56.5 | V | 74.0 | -17.5 | PK | 311 | 1.01 | |
| 11655.270 | 53.9 | V | 54.0 | -0.1 | AVG | 56 | 1.16 | |
| 11653.000 | 65.8 | V | 74.0 | -8.2 | PK | 56 | 1.16 | |

| | | | |
|-----------|--------------------------------------|------------------|--------------|
| Client: | Xirrus | Job Number: | J86256 |
| Model: | XI-N300 (2x2 radio module) in XR2000 | T-Log Number: | T86500 |
| Contact: | Steve Smith | Account Manager: | Michelle Kim |
| Standard: | FCC 15.247/15.E/RSS-210 | Class: | N/A |

Run #5: Radiated Spurious Emissions, 1-40 GHz. 802.11HT40 - 2x2 and 3x3 modules.

Date of Test: 3/8/2012 & 3/9/12
Test Engineer: John Caizzi

Test Location: FT3

Other Spurious Emissions

| Frequency | Level | Pol | 15.209 / 15.247 | | Detector | Azimuth | Height | Comments |
|-----------|--------|-----|-----------------|--------|-----------|---------|--------|----------|
| MHz | dBμV/m | v/h | Limit | Margin | Pk/QP/Avg | degrees | meters | |
| 5080.030 | 46.4 | V | 54.0 | -7.6 | AVG | 82 | 1.01 | |
| 5079.850 | 55.2 | V | 74.0 | -18.8 | PK | 82 | 1.01 | |
| 5120.030 | 48.1 | V | 54.0 | -5.9 | AVG | 360 | 1.01 | |
| 5119.980 | 56.9 | V | 74.0 | -17.1 | PK | 360 | 1.01 | |
| 5359.820 | 49.1 | V | 54.0 | -4.9 | AVG | 76 | 1.06 | |
| 5359.970 | 58.1 | V | 74.0 | -15.9 | PK | 76 | 1.06 | |
| 5400.080 | 50.6 | V | 54.0 | -3.4 | AVG | 71 | 1.07 | |
| 5399.950 | 58.4 | V | 74.0 | -15.6 | PK | 71 | 1.07 | |
| 5399.980 | 44.9 | V | 54.0 | -9.1 | AVG | 242 | 1.00 | |
| 5399.970 | 51.0 | V | 74.0 | -23.0 | PK | 242 | 1.00 | |
| 5440.020 | 52.4 | V | 54.0 | -1.6 | AVG | 173 | 1.05 | |
| 5440.550 | 59.4 | V | 74.0 | -14.6 | PK | 173 | 1.05 | |
| 5404.750 | 42.3 | V | 54.0 | -11.7 | AVG | 290 | 1.00 | |
| 5402.480 | 53.6 | V | 74.0 | -20.4 | PK | 290 | 1.00 | |
| 11515.000 | 52.4 | V | 54.0 | -1.6 | AVG | 265 | 1.01 | |
| 11516.400 | 63.6 | V | 74.0 | -10.4 | PK | 265 | 1.01 | |
| 11593.470 | 48.2 | V | 54.0 | -5.8 | AVG | 79 | 1.55 | |
| 11593.530 | 60.4 | V | 74.0 | -13.6 | PK | 79 | 1.55 | |

| | |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note 1: | For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz. |
| Note 2: | Signal is not in a restricted band but the more stringent restricted band limit was used. |
| Note 3: | No significant emissions were observed for 18-40GHz |



EMC Test Data

| | | | |
|------------------------|---------------------|------------------|-------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XR1000 | T-Log Number: | T86343 |
| | | Account Manager: | Susan Pelzl |
| Contact: | Steve Smith | | |
| Emissions Standard(s): | EN55022, FCC | Class: | B |
| Immunity Standard(s): | EN 301 489-1 V1.8.1 | Environment: | - |

EMC Test Data

For The

Xirrus

Model

XR1000

Date of Last Test: 4/17/2012

| | | | |
|-----------|--------------|------------------|-------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XR1000 | T-Log Number: | T86343 |
| Contact: | Steve Smith | Account Manager: | Susan Pelzl |
| Standard: | EN55022, FCC | Class: | A |

Conducted Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 4/6/2012
Test Engineer: Chris Groat
Test Location: Fremont Chamber #3

Config. Used: 1
Config Change: none
EUT Voltage: POE

General Test Configuration

For tabletop equipment, the EUT was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

Ambient Conditions:
Temperature: 21 °C
Rel. Humidity: 34 %

Summary of Results

| Run # | Test Performed | Limit | Result | Margin |
|-------|-------------------------|---------|--------|---------------------------------|
| 1 | CE, AC Power, 120V/60Hz | Class A | Pass | 57.4 dBµV @ 4.716 MHz (-2.6 dB) |

Modifications Made During Testing



No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

| | |
|------------------------|------------------------------|
| Client: Xirrus | Job Number: J86254 |
| Model: XR1000 | T-Log Number: T86343 |
| Contact: Steve Smith | Account Manager: Susan Pelzl |
| Standard: EN55022, FCC | Class: A |

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz
Radios in Transmit Mode: 1 3x3 and 1 2x2

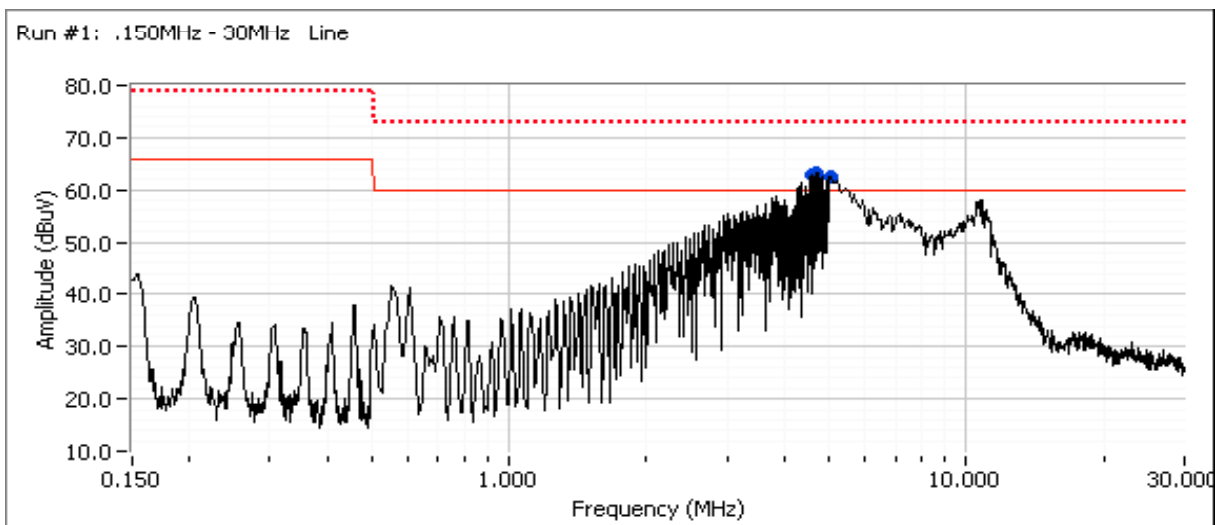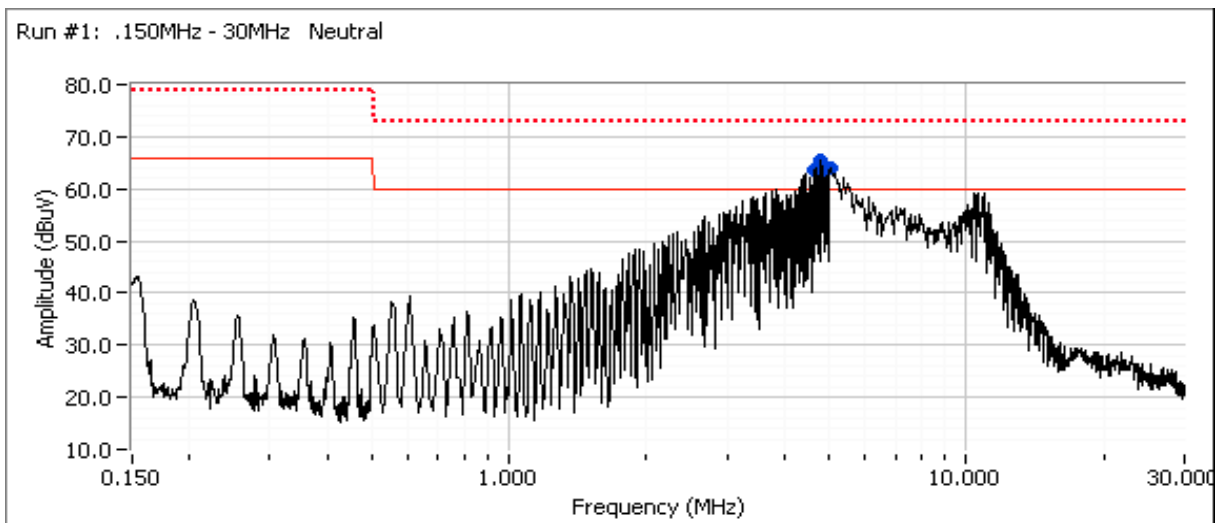

| | | | |
|-----------|--------------|------------------|-------------|
| Client: | Xirrus | Job Number: | J86254 |
| Model: | XR1000 | T-Log Number: | T86343 |
| Contact: | Steve Smith | Account Manager: | Susan Pelzl |
| Standard: | EN55022, FCC | Class: | A |

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

Radios in Transmit Mode: 1 3x3 and 1 2x2

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

| Frequency MHz | Level dB μ V | AC Line | Class A | | Detector QP/Ave | Comments |
|------------------|---------------------|------------|---------|--------|--------------------|----------|
| | | | Limit | Margin | | |
| 4.819 | 65.4 | Neutral | 60.0 | 5.4 | Peak | |
| 4.716 | 64.1 | Neutral | 60.0 | 4.1 | Peak | |
| 5.020 | 63.9 | Neutral | 60.0 | 3.9 | Peak | |
| 4.666 | 63.6 | Neutral | 60.0 | 3.6 | Peak | |
| 4.869 | 63.6 | Neutral | 60.0 | 3.6 | Peak | |
| 4.720 | 63.3 | Line 1 | 60.0 | 3.3 | Peak | |
| 4.669 | 63.2 | Line 1 | 60.0 | 3.2 | Peak | |
| 4.618 | 62.8 | Line 1 | 60.0 | 2.8 | Peak | |
| 5.075 | 62.6 | Line 1 | 60.0 | 2.6 | Peak | |

Final quasi-peak and average readings

| Frequency MHz | Level dB μ V | AC Line | Class A | | Detector QP/Ave | Comments |
|------------------|---------------------|------------|---------|--------|--------------------|-------------|
| | | | Limit | Margin | | |
| 4.716 | 57.4 | Neutral | 60.0 | -2.6 | AVG | AVG (0.10s) |
| 4.819 | 56.1 | Neutral | 60.0 | -3.9 | AVG | AVG (0.10s) |
| 4.720 | 55.8 | Line 1 | 60.0 | -4.2 | AVG | AVG (0.10s) |
| 4.666 | 55.6 | Neutral | 60.0 | -4.4 | AVG | AVG (0.10s) |
| 5.020 | 55.5 | Neutral | 60.0 | -4.5 | AVG | AVG (0.10s) |
| 5.075 | 55.3 | Line 1 | 60.0 | -4.7 | AVG | AVG (0.10s) |
| 4.869 | 54.7 | Neutral | 60.0 | -5.3 | AVG | AVG (0.10s) |
| 4.669 | 54.5 | Line 1 | 60.0 | -5.5 | AVG | AVG (0.10s) |
| 4.618 | 52.8 | Line 1 | 60.0 | -7.2 | AVG | AVG (0.10s) |
| 4.716 | 64.4 | Neutral | 73.0 | -8.6 | QP | QP (1.00s) |
| 4.819 | 64.2 | Neutral | 73.0 | -8.8 | QP | QP (1.00s) |
| 4.666 | 63.9 | Neutral | 73.0 | -9.1 | QP | QP (1.00s) |
| 5.020 | 63.4 | Neutral | 73.0 | -9.6 | QP | QP (1.00s) |
| 4.869 | 63.4 | Neutral | 73.0 | -9.6 | QP | QP (1.00s) |
| 4.720 | 63.0 | Line 1 | 73.0 | -10.0 | QP | QP (1.00s) |
| 4.669 | 62.7 | Line 1 | 73.0 | -10.3 | QP | QP (1.00s) |
| 4.618 | 62.1 | Line 1 | 73.0 | -10.9 | QP | QP (1.00s) |
| 5.075 | 61.7 | Line 1 | 73.0 | -11.3 | QP | QP (1.00s) |

End of Report

This page is intentionally blank and marks the last page of this test report.