

EMC Test Report

*Application for Grant of Equipment Authorization
Class II Permissive Change/Reassessment*

*Industry Canada RSS-Gen Issue 3 / RSS 210 Issue 8
FCC Part 15 Subpart C*

Model: XI-N450 in the XR1000 and XR2000

IC CERTIFICATION #: 5428A-XN450
FCC ID: SK6XI-N450

APPLICANT: Xirrus, Inc.
2101 Corporate Center Dr.
Newbury Park, CA 91320

TEST SITE(S): Elliott Laboratories
41039 Boyce Road.
Fremont, CA. 94538-2435

IC SITE REGISTRATION #: 2845B-3; 2845B-4, 2845B-5, 2845B-7

REPORT DATE: June 1, 2012

FINAL TEST DATES: February 21, 22, 23, 24 and 27, and March 7, 8,
9 and 27 and April 6, 2012


TOTAL NUMBER OF PAGES: 129

PROGRAM MGR /
TECHNICAL REVIEWER:



Mark E Hill
Staff Engineer

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:

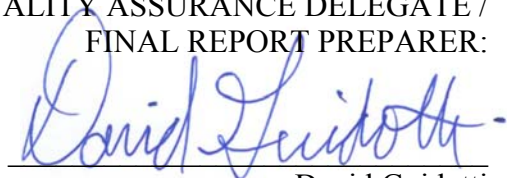

David Guidotti
Senior Technical Writer



Elliott Laboratories is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	06-01-2012	First release	

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE.....	4
OBJECTIVE	4
STATEMENT OF COMPLIANCE.....	5
DEVIATIONS FROM THE STANDARDS.....	5
TEST RESULTS SUMMARY	6
DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHZ).....	6
DIGITAL TRANSMISSION SYSTEMS (5725 –5850 MHZ).....	6
GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS.....	7
MEASUREMENT UNCERTAINTIES.....	8
EQUIPMENT UNDER TEST (EUT) DETAILS.....	9
GENERAL.....	9
ANTENNA SYSTEM	9
ENCLOSURE.....	9
MODIFICATIONS.....	9
SUPPORT EQUIPMENT.....	10
EUT INTERFACE PORTS	10
EUT OPERATION	10
TEST SITE.....	12
GENERAL INFORMATION.....	12
CONDUCTED EMISSIONS CONSIDERATIONS	12
RADIATED EMISSIONS CONSIDERATIONS	12
MEASUREMENT INSTRUMENTATION	13
RECEIVER SYSTEM	13
INSTRUMENT CONTROL COMPUTER	13
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	13
FILTERS/ATTENUATORS	14
ANTENNAS.....	14
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	14
INSTRUMENT CALIBRATION.....	14
TEST PROCEDURES	15
EUT AND CABLE PLACEMENT	15
CONDUCTED EMISSIONS.....	15
RADIATED EMISSIONS.....	16
CONDUCTED EMISSIONS FROM ANTENNA PORT	18
BANDWIDTH MEASUREMENTS	18
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS.....	19
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS	20
RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS	20
OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS	21
TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS.....	21
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	21
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	22
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	23
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	24
APPENDIX B TEST DATA	25
END OF REPORT	129

SCOPE

An electromagnetic emissions test has been performed on the Xirrus, Inc. model XI-N450 in the XR1000 and XR2000, pursuant to the following rules:

Industry Canada RSS-Gen Issue 3
RSS 210 Issue 8 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"
FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in Elliott Laboratories test procedures:

ANSI C63.4:2003
FCC DTS Measurement Procedure KDB558074, March 2005

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of Xirrus, Inc. model XI-N450 in the XR1000 and XR2000 complied with the requirements of the following regulations:

Industry Canada RSS-Gen Issue 3
RSS 210 Issue 8 “Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment”
FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Xirrus, Inc. model XI-N450 in the XR1000 and XR2000 and therefore apply only to the tested sample. The sample was selected and prepared by Steve Smith of Xirrus, Inc..

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY**DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHz)**

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)	RSS 210 A8.2	Digital Modulation	Testing not performed, no changes from the original filing. Output power of test sample confirmed to be with 0.5dB of the original filing. Note 1		
15.247 (a) (2)	RSS 210 A8.2 (1)	6dB Bandwidth			
15.247 (b) (3)	RSS 210 A8.2 (4)	Output Power (multipoint systems)			
15.247(d)	RSS 210 A8.2 (2)	Power Spectral Density			
15.247(c)	RSS 210 A8.5	Antenna Port Spurious Emissions 30MHz – 25 GHz			
15.247(c) / 15.209	RSS 210 A8.5	Radiated Spurious Emissions 30MHz – 25 GHz	73.8 dB μ V/m @ 7313.7 MHz (-0.2 dB)	15.207 in restricted bands, all others <-30dBc ^{Note 2}	Complies
<p>Note 1: In some cases power had to be reduced from the level of the original certification to comply with the spurious emissions requirements. These are noted in the test data.</p> <p>Note 2: Limit of -30dBc used because the power was measured using the UNII test procedure (maximum power averaged over a transmission burst).</p>					

DIGITAL TRANSMISSION SYSTEMS (5725 –5850 MHz)

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)	RSS 210 A8.2	Digital Modulation	Testing not performed, no changes from the original filing. Output power of test sample confirmed to be with 0.5dB of the original filing. Note 1		
15.247 (a) (2)	RSS 210 A8.2 (1)	6dB Bandwidth			
15.247 (b)	RSS 210 A8.2 (4)	Output Power (multipoint systems)			
15.247(d)	RSS 210 A8.2 (2)	Power Spectral Density			
15.247(c)	RSS 210 A8.5	Antenna Port Spurious Emissions – 30MHz – 40 GHz			
15.247(c) / 15.209	RSS 210 A8.5 Table 2, 3	Radiated Spurious Emissions 30MHz – 40 GHz	54.0 dB μ V/m @ 11491.5 MHz (0.0 dB)	15.207 in restricted bands, all others < -20dBc <-30dBc ^{Note 2}	Complies
<p>Note 1: In some cases power had to be reduced from the level of the original certification to comply with the spurious emissions requirements. These are noted in the test data.</p> <p>Note 2: Limit of -30dBc used because the power was measured using the UNII test procedure (maximum power averaged over a transmission burst).</p>					

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	Unchanged from original filing.		
15.207	RSS GEN Table 2	AC Conducted Emissions	57.4 dB μ V @ 4.716 MHz (-2.6 dB)	Refer to page Error! Bookmark not defined.	Complies
15.247 (b) (5) 15.407 (f)	RSS 102	RF Exposure Requirements	Unchanged from original filing.		
-	RSP 100 RSS GEN 7.1.5	User Manual	Unchanged from original filing.		
-	RSP 100 RSS GEN 7.1.5	User Manual	Unchanged from original filing.		
-	RSP 100 RSS GEN 4.4.1	99% Bandwidth	Unchanged from original filing.		

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF power, conducted (power meter)	dBm	25 to 7000 MHz	± 0.52 dB
RF power, conducted (Spectrum analyzer)	dBm	25 to 7000 MHz	± 0.7 dB
Conducted emission of transmitter	dBm	25 to 26500 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 26500 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 26500 MHz	± 2.5 dB
Radiated emission (field strength)	dB μ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB μ V	0.15 to 30 MHz	± 2.4 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Xirrus, Inc. model XI-N450 in the XR1000 and XR2000 is an 802.11abgn 3x3 module intended to be installed in Xirrus Wireless Access Points. The module supports 802.11bgn 3x3 in the 2400-2483.5MHz, 5725-5850MHz, 5150-5250MHz, 5250-5350MHz and 5470-5725MHz bands. It additionally supports 802.11a SISO mode in the 5150-5250MHz, 5250-5350MHz and 5470-5725MHz bands at a higher per chain power. SISO modes in the other bands operate at the same output power per chain as the equivalent MIMO mode. It can operate in both 20- and 40-MHz channels in 802.11n mode.

For testing purposes one sample of the XI-N300 2x2 module, and one sample of a 3x3 version of the module (model number XI-N450) were installed into a Xirrus XR1000 host system. Two samples of the XI-N300 2x2 module and two samples of a 3x3 version of the module (model number XI-N450) were installed into a Xirrus XR2000 host system. During normal operation, the host system would be limited to one variety of module.

The sample was received on February 7, 2012 and tested on February 21, 22, 23, 24 and 27, and March 7, 8, 9 and 27 and April 6, 2012. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Xirrus	N/A	3x3 Wifi module	Various	SK6XI-N450

ANTENNA SYSTEM

The antenna system is integrated into the module with two antennas per module (one for each transmit-receive chain). The nominal antenna gains are 1dBi in the 2.4GHz band and 4dBi in the 5GHz bands.

ENCLOSURE

The EUT has no enclosure. It is designed to be installed within the enclosure of a host computer.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at Elliott.

SUPPORT EQUIPMENT

The following equipment was used as support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Xirrus	XR1000	2 radio Access Point	-	-
Xirrus	XR2000	4 radio Access Point	-	-

The following equipment was used as remote support equipment for emissions testing:

Company	Model	Description	Serial Number	FCC ID
HP	Compaq 6910P	PC Laptop	n/a	DoC
Xirrus	XP2-MSI-95M	Dual Port POE Injector	P12400043B1	N/A

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Port	Connected To	Description	Cable(s)	
			Shielded or Unshielded	Length(m)
POE1	Remote POE Injector	CAT5	Unshielded	10
Laptop Ethernet	PoE Injector	Cat 5	Unshielded	1

EUT OPERATION

The modules were installed into a host system for spurious emissions tests.

To evaluate the radiated spurious emissions related to the transmitter the module was evaluated in all operating modes (802.11b, 802.11g, 802.11a, 802.11n in both 20- and 40-MHz channels) using ART software utility to place the module(s) under test in continuous transmit modes. Both transmit chains were active for the DTS tests, NII tests were repeated in 802.11a mode with a single chain active.

For measurements at the restricted band edges one module was operating on the channel closest to the band edge. The worse case operating mode from the original filing was tested for each band. For other spurious emissions measurements multiple radios were operating simultaneously. As the host system can also house additional modules, during radiated spurious emissions tests all radios were active simultaneously. When installed into host systems the host system firmware will not allow multiple radios to operate on the same or overlapping channels, so if signals were above the limit with multiple radios active, and those signals were related to harmonics of the transmitted signal, then the measurements were repeated with only one of radio or one mode active because these harmonic emissions would only be present from one radio at any specific time.

Measurements on the host system for the frequency range 30 – 1000 MHz demonstrated that all significant emissions were from the host system. Digital device emissions from the host system above 1GHz (occurring at 2.5GHz, 5.0GHz and 7.5GHz) were excluded from the scope of this test report and will be evaluated as a part of the host system digital device tests.

AC conducted emissions measurements were made on the AC input to the Power-Over-Ethernet (PoE) injector used to power the host system. For these measurements all both radios were in a transmit/receive mode with all chains active.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
Chamber 3	769238	2845B-3	41039 Boyce Road Fremont, CA 94538-2435
Chamber 4	211948	2845B-4	
Chamber 5	211948	2845B-5	
Chamber 7	A2LA accreditation	2845B-7	

ANSI C63.4:2003 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4:2003.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.4:2003. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4:2003 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4:2003.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.4:2003 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4:2003, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

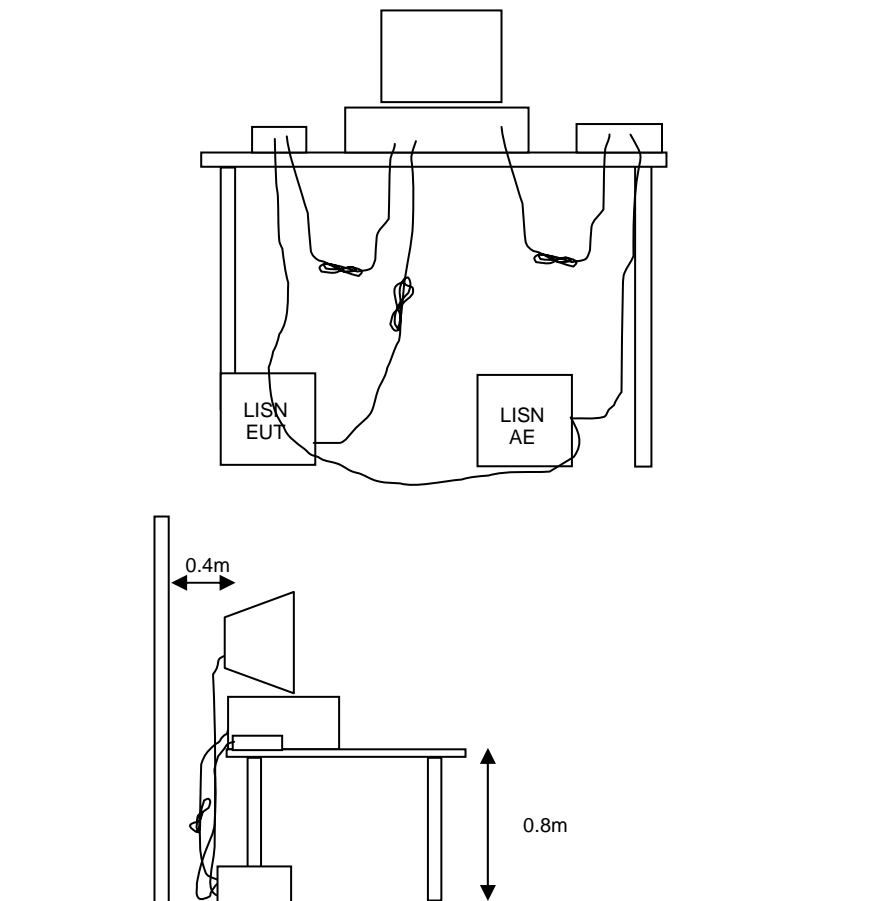


Figure 1 Typical Conducted Emissions Test Configuration


RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

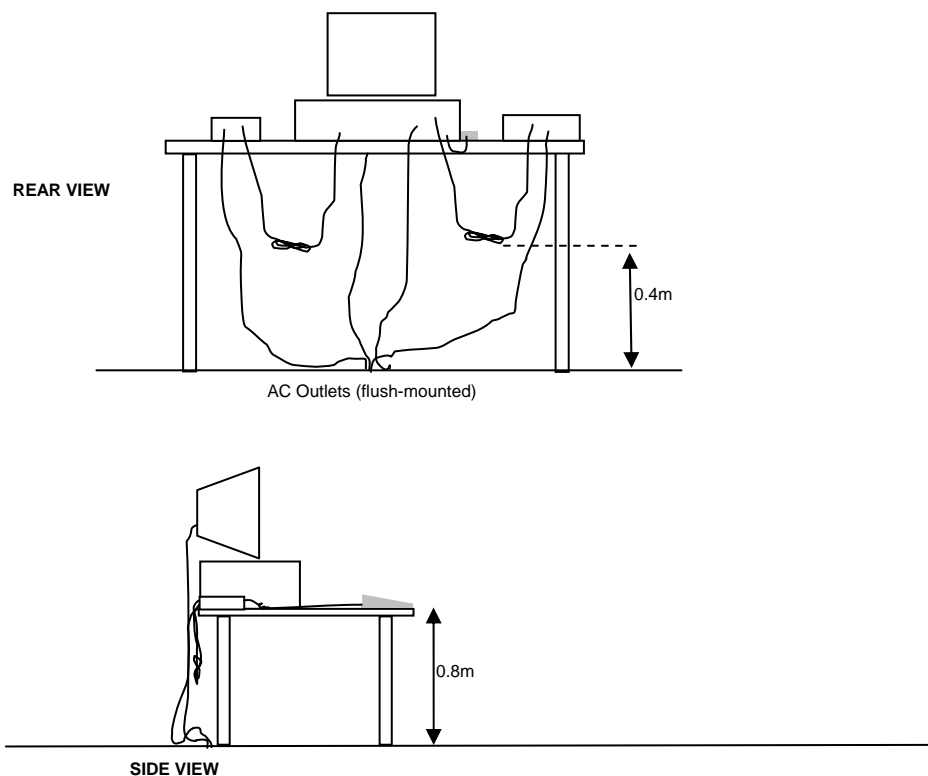


Typical Test Configuration for Radiated Field Strength Measurements

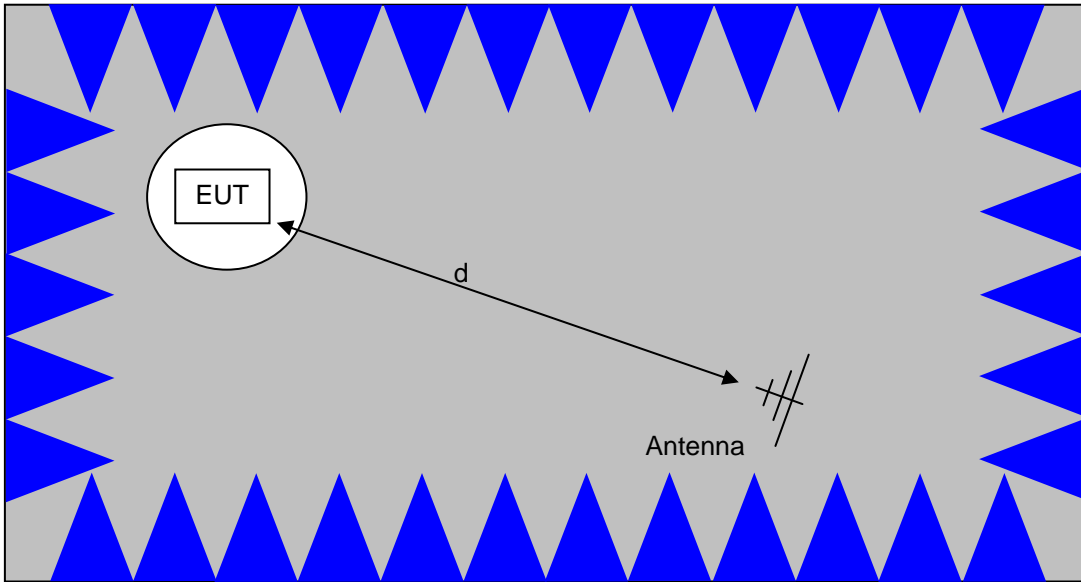

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

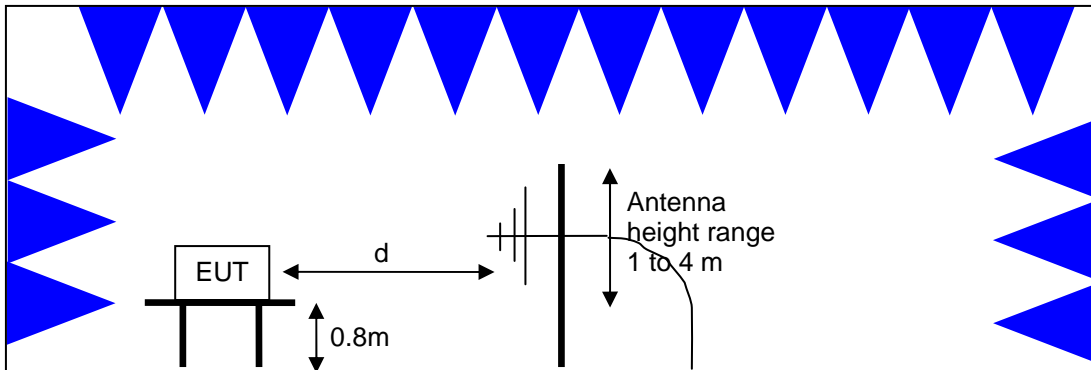

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

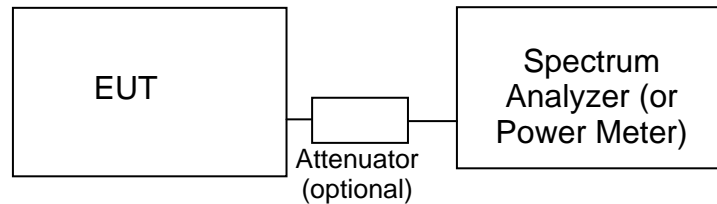**Test Configuration for Antenna Port Measurements**

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and Elliott's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB and/or 26dB signal bandwidth is measured in using the bandwidths recommended by ANSI C63.4. When required, the 99% bandwidth is measured using the methods detailed in RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹ (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F _{KHz} @ 300m	67.6-20*log ₁₀ (F _{KHz}) @ 300m
0.490-1.705	24000/F _{KHz} @ 30m	87.6-20*log ₁₀ (F _{KHz}) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

¹ The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
902 – 928	1 Watt (30 dBm)	8 dBm/3kHz
2400 – 2483.5	1 Watt (30 dBm)	8 dBm/3kHz
5725 – 5850	1 Watt (30 dBm)	8 dBm/3kHz

The maximum permitted output power is reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5850 MHz band are not subject to this restriction.

TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 210. All other unwanted (spurious) emissions shall be at least 20dB below the level of the highest in-band signal level (30dB if the power is measured using the sample detector/power averaging method).

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

R_r = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{d} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

Appendix A Test Equipment Calibration Data**Radiated Emissions, Bandedge, 22-Feb-12**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/8/2012
Rohde & Schwarz	EMI Test Receiver, 20 Hz-40 GHz	ESIB40 (1088.7490.40)	2493	12/9/2012

Radio Antenna Port (Power and Spurious Emissions), 15-Mar-12

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Rohde & Schwarz	Power Meter, Single Channel	NRVS	1422	12/13/2012
Rohde & Schwarz	Power Sensor 100 uW - 2 Watts use with 20dB attenuator sn:100059 only	NRV-Z32	1423	9/1/2012
Agilent	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYX,	E4446A	2139	2/23/2013

Appendix B Test Data

T86381 Pages 26 - 60
T86382 Pages 61 - 89
T86500 Pages 90 - 114
T86501 Pages 115 - 124
T86343 Pages 125 - 128

Client:	Xirrus	Job Number:	J86254
Model:	XI-N300 (2x2 radio module) in XR1000	T-Log Number:	T86381
Contact:	Steve Smith	Account Manager:	Michelle Kim
Emissions Standard(s):	FCC 15.247/15.E/RSS-210	Class:	-
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Xirrus

Model

XI-N300 (2x2 radio module) in XR1000

Date of Last Test: 5/24/2012

Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

**RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions
2x2 and 3x3 Modules - 802.11b, 802.11g, HT20 Modes**

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1	802.11b	2x2: 2412 MHz 3x3: 2462 MHz	33.0* 38.0		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	52.9 dBµV/m @ 4824.0 MHz (-1.1 dB)
2	802.11b	2x2: 2462 MHz 3x3: 2412 MHz	30.0* 37.0		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	52.6 dBµV/m @ 4924.0 MHz (-1.4 dB)
3	802.11b	2x2: 2437 MHz 3x3: 2437 MHz	30.0* 40.0		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	53.1 dBµV/m @ 4874.0 MHz (-0.9 dB)
4	802.11g	2x2: 2412 MHz 3x3: 2462 MHz	28.0 32.0		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	44.0 dBµV/m @ 7390.1 MHz (-10.0 dB)
5	802.11g	2x2: 2462 MHz 3x3: 2412 MHz	24.0 28.0		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	44.3 dBµV/m @ 4000.0 MHz (-9.7 dB)
6	802.11g	2x2: 2437 MHz 3x3: 2437 MHz	31.0* 39.0		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	73.1 dBµV/m @ 7315.1 MHz (-0.9 dB)
7	802.11HT20	2x2: 2412 MHz 3x3: 2462 MHz	26.0 25.0		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	43.2 dBµV/m @ 4000.0 MHz (-10.8 dB)
8	802.11HT20	2x2: 2462 MHz 3x3: 2412 MHz	24.0 28.0		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	43.2 dBµV/m @ 4000.0 MHz (-10.8 dB)
9	802.11HT20	2x2: 2437 MHz 3x3: 2437 MHz	34.0 35.0		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	73.8 dBµV/m @ 7313.7 MHz (-0.2 dB)

Note: * - indicates power reduced from original certification

Client:	Xirrus	Job Number:	J86254
Model:	XI-N300 (2x2 radio module) in XR1000	T-Log Number:	T86381
		Account Manager:	Michelle Kim
Contact:	Steve Smith		
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

System Configuration:

Radio #	Frequency	Module	Mode	Radio #	Frequency	Module	Mode
Run: 1				Run: 2			
1	2412	2x2	802.11b	1	2462	2x2	802.11b
0	2462	3x3	802.11b	0	2412	3x3	802.11b
Run: 3							
1	2437	2x2	802.11b				
0	2437	3x3	802.11b				
Run: 4				Run: 5			
1	2412	2x2	802.11g	1	2462	2x2	802.11g
0	2462	3x3	802.11g	0	2412	3x3	802.11g
Run: 6							
1	2437	2x2	802.11g				
0	2437	3x3	802.11g				
Run: 7				Run: 8			
1	2412	2x2	802.11HT20	1	2462	2x2	802.11HT20
0	2462	3x3	802.11HT20	0	2412	3x3	802.11HT20
Run: 9							
1	2437	2x2	802.11HT20				
0	2437	3x3	802.11HT20				

Notes - Multiple radios operating at the same time as shown above. In all cases, power set to the maximum worse case single channel power, transmitting on all chains.


Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #1: Radiated Spurious Emissions, 1-26.5GHz. 802.11b - 2x2 and 3x3 modules.
 Date of Test: 2/22/2012 Test Location: FT Chamber #5
 Test Engineer: Rafael Varelas

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
Power setting = 33 (Channel 1 - 2x2), Power setting = 38 (Channel 11 - 3x3)								
4823.980	52.9	V	54.0	-1.1	AVG	90	1.0	RB 1 MHz;VB 10 Hz;Pk
4823.780	57.0	V	74.0	-17.0	PK	90	1.0	RB 1 MHz;VB 3 MHz;Pk
3999.990	43.2	V	54.0	-10.8	AVG	59	1.6	RB 1 MHz;VB 10 Hz;Pk
4000.010	48.6	V	74.0	-25.4	PK	59	1.6	RB 1 MHz;VB 3 MHz;Pk
4924.010	43.1	V	54.0	-10.9	AVG	31	1.0	RB 1 MHz;VB 10 Hz;Pk
4924.020	48.2	V	74.0	-25.8	PK	31	1.0	RB 1 MHz;VB 3 MHz;Pk
9647.870	60.1	V	-	-	PK	165	1.2	RB 100 kHz;VB 100 kHz;Pk, note 2
1880.430	54.3	V	-	-	Peak	62	1.3	note 2
7237.060	50.3	V	-	-	Peak	64	1.6	note 2

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
- Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.
- Note 3: No significant emissions were observed for 18-26GHz

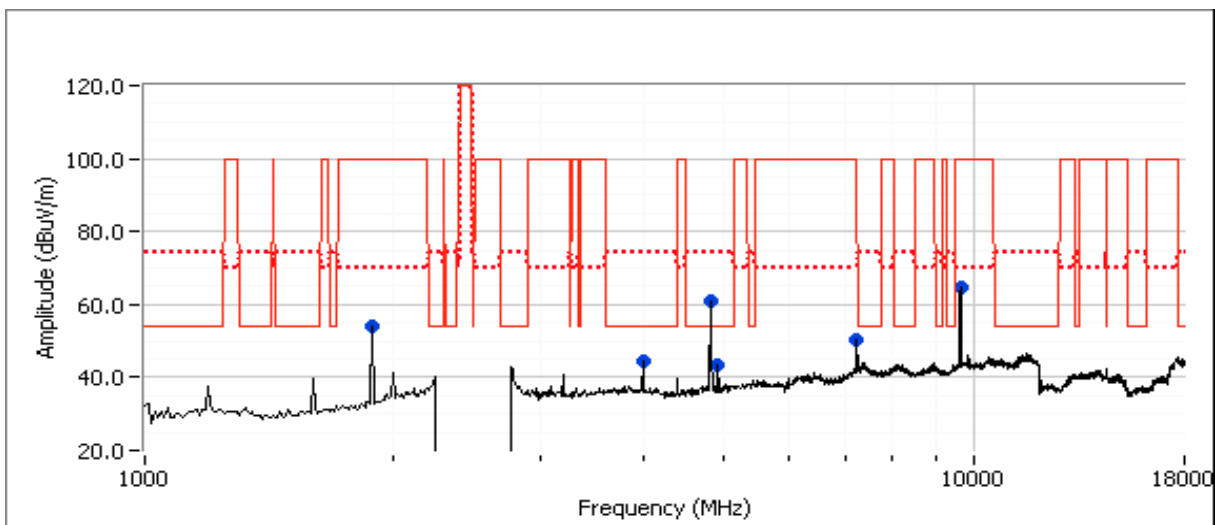


Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #4: Radiated Spurious Emissions, 1-26.5GHz. 802.11g - 2x2 and 3x3 modules.
 Date of Test: 2/22/2012 Test Location: FT Chamber #5
 Test Engineer: Rafael Varelas

Other Spurious Emissions

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
7390.050	44.0	V	54.0	-10.0	AVG	238	1.5	RB 1 MHz;VB 10 Hz;Pk
7390.650	56.4	V	74.0	-17.6	PK	238	1.5	RB 1 MHz;VB 3 MHz;Pk
4825.650	40.1	V	54.0	-13.9	AVG	26	1.0	RB 1 MHz;VB 10 Hz;Pk
4824.500	54.0	V	74.0	-20.0	PK	26	1.0	RB 1 MHz;VB 3 MHz;Pk
3999.970	44.0	V	54.0	-10.0	AVG	74	1.5	RB 1 MHz;VB 10 Hz;Pk
4000.200	48.7	V	74.0	-25.3	PK	74	1.5	RB 1 MHz;VB 3 MHz;Pk

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
- Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.
- Note 3: No significant emissions were observed for 18-26GHz

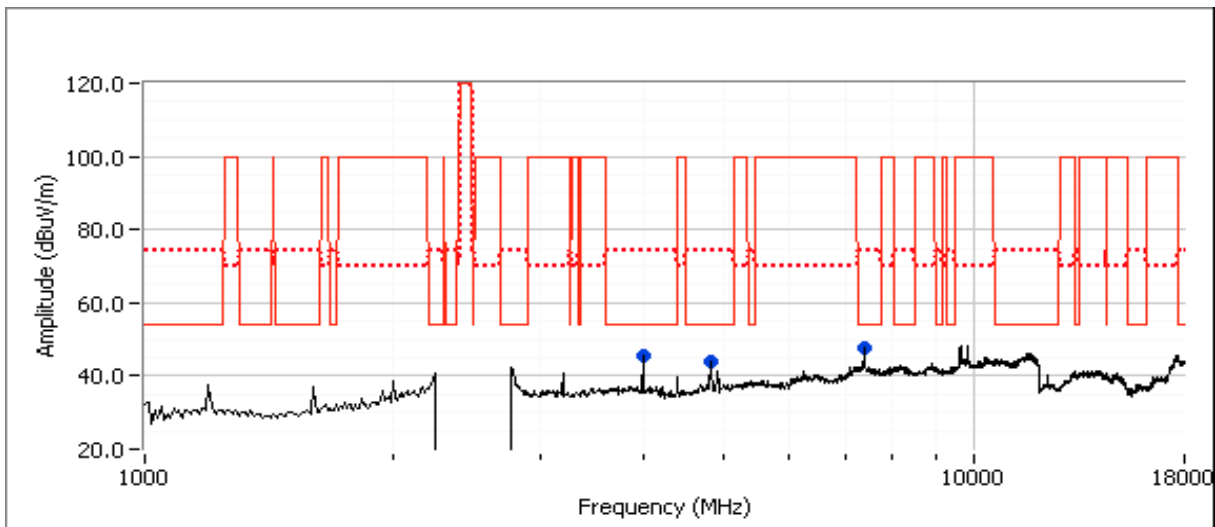


Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #5: Radiated Spurious Emissions, 1-26.5GHz. 802.11g - 2x2 and 3x3 modules.
 Date of Test: 2/22/2012 Test Location: FT Chamber #5
 Test Engineer: Rafael Varelas

Other Spurious Emissions

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
4000.040	44.3	V	54.0	-9.7	AVG	60	1.5	RB 1 MHz;VB 10 Hz;Pk
3999.790	49.3	V	74.0	-24.7	PK	60	1.5	RB 1 MHz;VB 3 MHz;Pk
7250.050	40.0	V	54.0	-14.0	AVG	317	1.2	RB 1 MHz;VB 10 Hz;Pk
7250.560	53.3	V	74.0	-20.7	PK	317	1.2	RB 1 MHz;VB 3 MHz;Pk
4922.890	38.2	V	54.0	-15.8	AVG	153	1.0	RB 1 MHz;VB 10 Hz;Pk
4923.090	52.8	V	74.0	-21.2	PK	153	1.0	RB 1 MHz;VB 3 MHz;Pk

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
- Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.
- Note 3: No significant emissions were observed for 18-26GHz

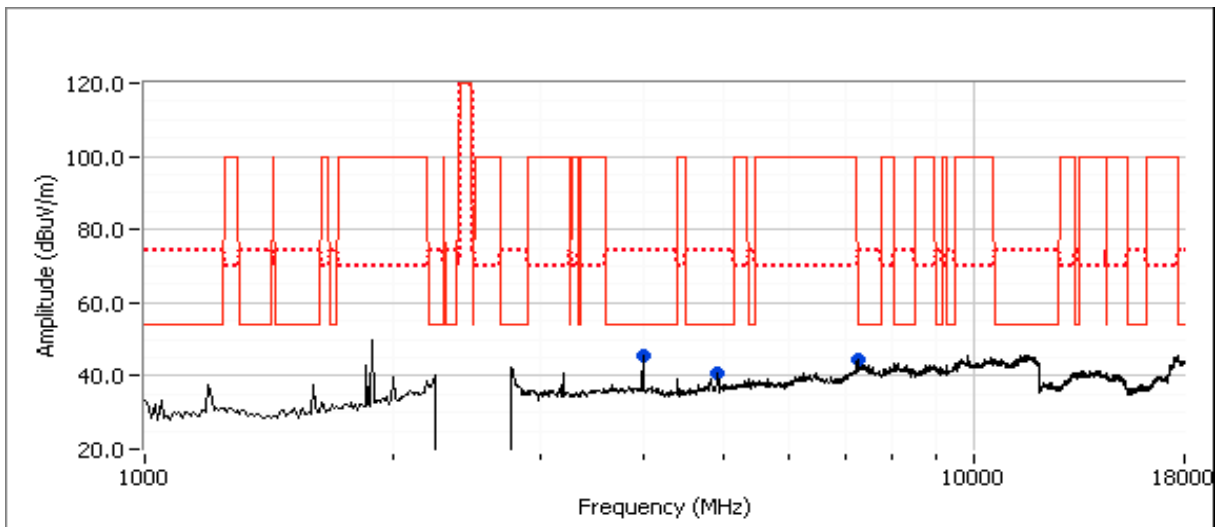


Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #7: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT20 - 2x2 and 3x3 modules.
 Date of Test: 2/23/2012 Test Location: Chamber #4
 Test Engineer: Vishal Narayan

Other Spurious Emissions

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247 Limit Margin		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
Power setting = 26 (Channel 1 - 2x2), Power setting = 25 (Channel 11 - 3x3)								
4826.200	35.0	V	54.0	-19.0	AVG	227	1.0	RB 1 MHz;VB 10 Hz;Pk
4824.870	53.6	V	74.0	-20.4	PK	227	1.0	RB 1 MHz;VB 3 MHz;Pk
3999.990	43.2	V	54.0	-10.8	AVG	67	1.0	RB 1 MHz;VB 10 Hz;Pk
3999.890	48.2	V	74.0	-25.8	PK	67	1.0	RB 1 MHz;VB 3 MHz;Pk

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
- Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.
- Note 3: No significant emissions were observed for 18-26GHz

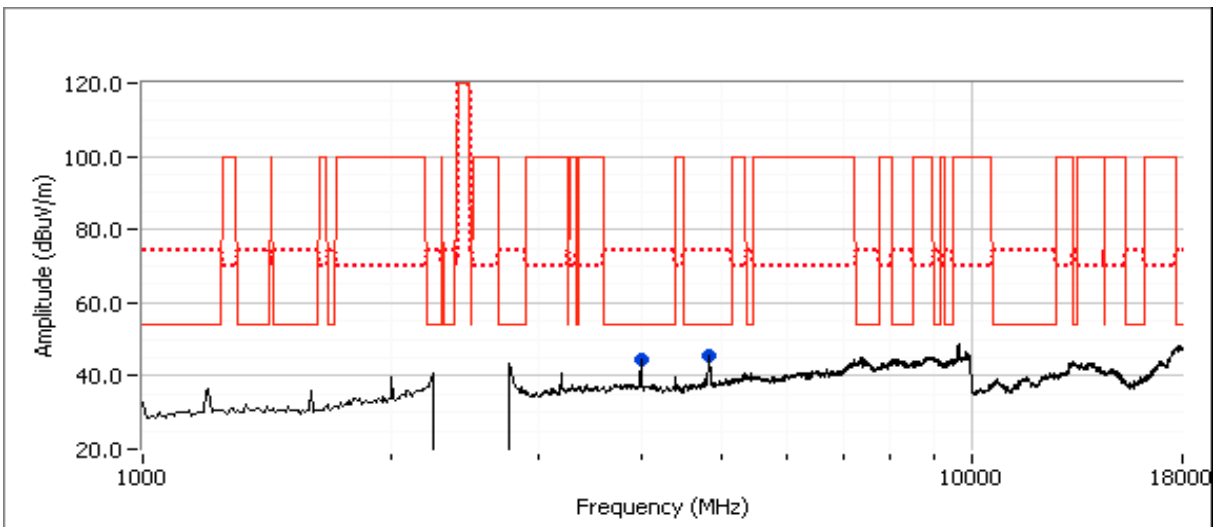


Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #8: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT20 - 2x2 and 3x3 modules.
 Date of Test: 2/23/2012 Test Location: Chamber #4
 Test Engineer: Vishal Narayan

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
Power setting = 24 (Channel 11 - 2x2), Power setting = 28 (Channel 1 - 3x3)								
3999.990	43.2	V	54.0	-10.8	AVG	76	1.3	RB 1 MHz;VB 10 Hz;Pk
3999.870	48.2	V	74.0	-25.8	PK	76	1.3	RB 1 MHz;VB 3 MHz;Pk
4825.330	33.9	V	54.0	-20.1	AVG	29	1.0	RB 1 MHz;VB 10 Hz;Pk
4825.040	47.2	V	74.0	-26.8	PK	29	1.0	RB 1 MHz;VB 3 MHz;Pk

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
- Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.
- Note 3: No significant emissions were observed for 18-26GHz

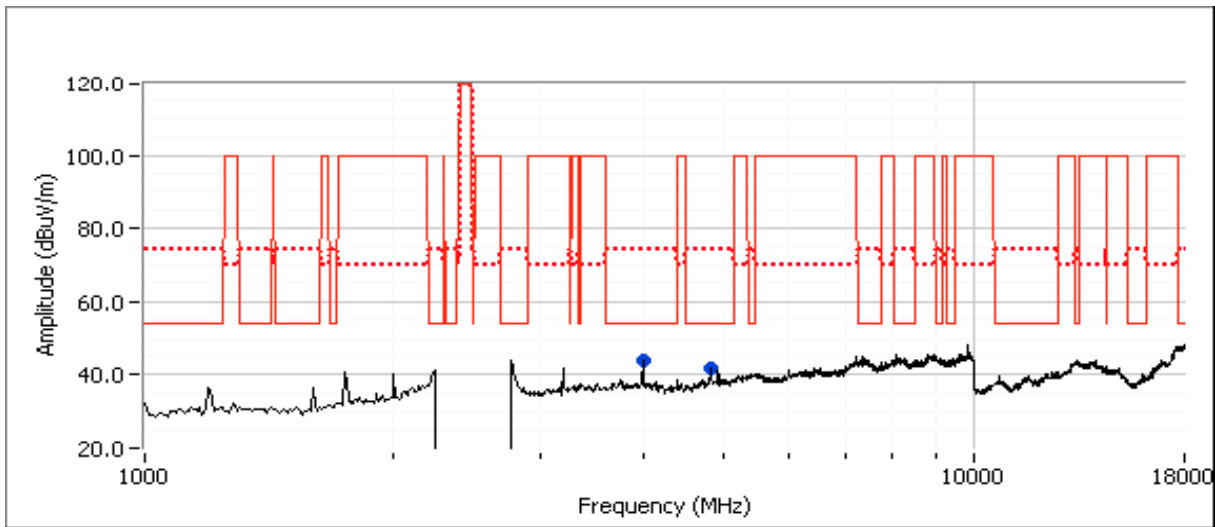


Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
Contact: Steve Smith	Account Manager: Michelle Kim
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #9: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT20 - 2x2 and 3x3 modules.
 Date of Test: 2/23/2012 Test Location: Chamber #4
 Test Engineer: Vishal Narayan

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
Power setting = 33 (Channel 6 - 2x2), Power setting = 35 (Channel 6 - 3x3)								
4872.590	46.3	V	54.0	-7.7	AVG	154	1.1	RB 1 MHz;VB 10 Hz;Pk
4872.630	58.8	V	74.0	-15.2	PK	154	1.1	RB 1 MHz;VB 3 MHz;Pk
4000.020	44.1	V	54.0	-9.9	AVG	58	1.6	RB 1 MHz;VB 10 Hz;Pk
3999.910	48.7	V	74.0	-25.3	PK	58	1.6	RB 1 MHz;VB 3 MHz;Pk
9750.290	51.6	V	-	-	AVG	166	1.0	RB 1 MHz;VB 10 Hz;Pk, note 2
9751.090	64.2	V	-	-	PK	166	1.0	RB 1 MHz;VB 3 MHz;Pk, note 2
12192.010	40.2	V	54.0	-13.8	AVG	52	1.0	RB 1 MHz;VB 10 Hz;Pk
12192.410	53.1	V	74.0	-20.9	PK	52	1.0	RB 1 MHz;VB 3 MHz;Pk
7311.880	47.3	V	54.0	-6.7	AVG	55	1.0	RB 1 MHz;VB 10 Hz;Pk
7313.730	73.8	V	74.0	-0.2	PK	55	1.0	RB 1 MHz;VB 3 MHz;Pk

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
- Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.
- Note 3: No significant emissions were observed for 18-26GHz

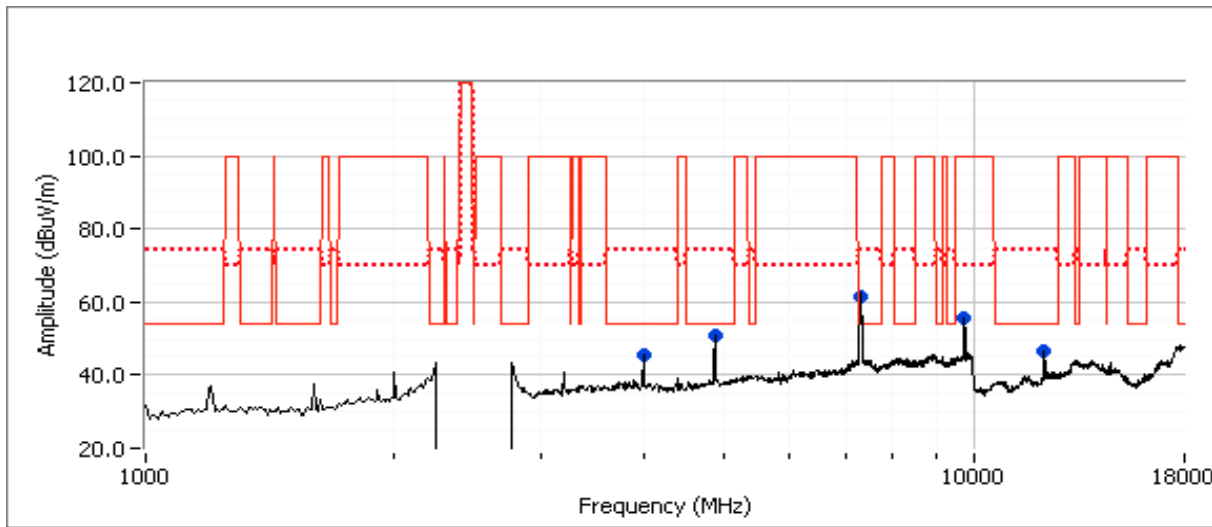

Client:	Xirrus	Job Number:	J86254
Model:	XI-N300 (2x2 radio module) in XR1000	T-Log Number:	T86381
		Account Manager:	Michelle Kim
Contact:	Steve Smith		
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions 2x2 and 3x3 Modules - HT40 Mode

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
 Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1	802.11HT4 0	2x2: 2422 MHz 3x3: 2452 MHz	28 19		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	44.3 dBµV/m @ 4000.0 MHz (-9.7 dB)
2	802.11HT4 0	2x2: 2452 MHz 3x3: 2422 MHz	32 21		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	69.8 dBµV/m @ 7353.5 MHz (-4.2 dB)
3	802.11HT4 0	2x2: 2437 MHz 3x3: 2437 MHz	34* 28		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	72.5 dBµV/m @ 7301.9 MHz (-1.5 dB)

Note: * - indicates power reduced from original certification

System Configuration:

Radio #	Frequency	Module	Mode	Radio #	Frequency	Module	Mode
Run: 1				Run: 2			
1	2422	2x2	802.11HT40	1	2452	2x2	802.11HT40
0	2452	3x3	802.11HT40	0	2422	3x3	802.11HT40
Run: 3							
1	2437	2x2	802.11HT40				
0	2437	3x3	802.11HT40				

Notes - Multiple radios operating at the same time as shown above. In all cases, power set to the maximum worse case single channel power. transmitting on all chains.

Client:	Xirrus	Job Number:	J86254
Model:	XI-N300 (2x2 radio module) in XR1000	T-Log Number:	T86381
Contact:	Steve Smith	Account Manager:	Michelle Kim
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

Run #1: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT40 - 2x2 and 3x3 modules.

Date of Test: 2/23/2012

Test Location: Chamber #4

Test Engineer: Vishal Narayan


Other Spurious Emissions

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247 Limit Margin		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
Power setting = 28 (Channel 1 - 2x2), Power setting = 19 (Channel 7 - 3x3)								
3999.970	44.3	V	54.0	-9.7	AVG	66	1.6	RB 1 MHz;VB 10 Hz;Pk
4000.190	49.0	V	74.0	-25.0	PK	66	1.6	RB 1 MHz;VB 3 MHz;Pk
4841.150	37.4	V	54.0	-16.6	AVG	158	1.0	RB 1 MHz;VB 10 Hz;Pk
4843.290	49.9	V	74.0	-24.1	PK	158	1.0	RB 1 MHz;VB 3 MHz;Pk
9696.460	43.7	V	-	-	AVG	173	1.3	RB 1 MHz;VB 10 Hz;Pk, note 2
9698.470	56.6	V	-	-	PK	173	1.3	RB 1 MHz;VB 3 MHz;Pk, note 2

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.

Note 3: No significant emissions were observed for 18-26GHz

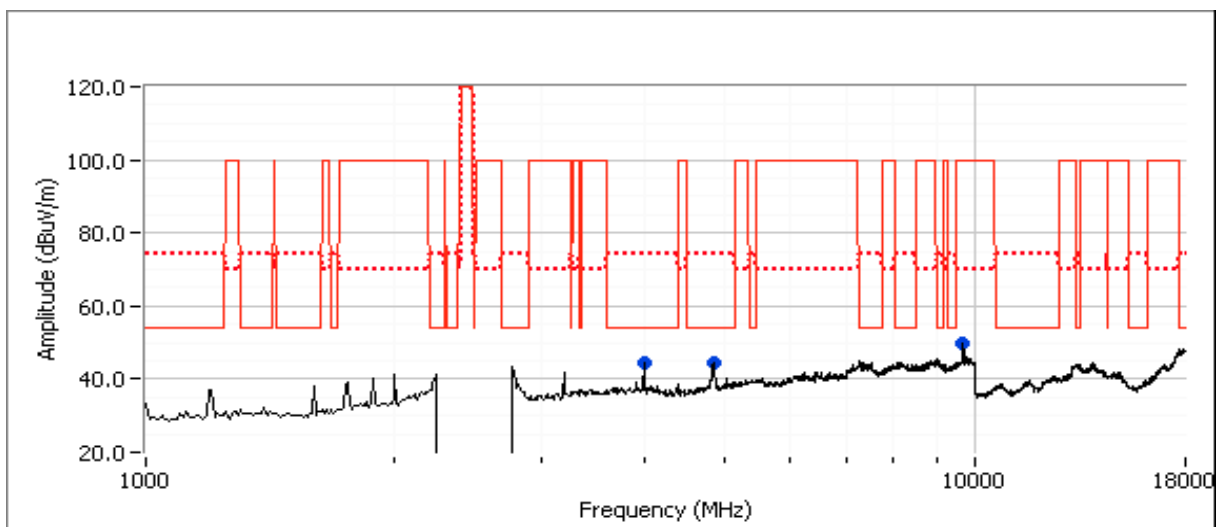


Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #2: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT40 - 2x2 and 3x3 modules.
 Date of Test: 2/23/2012 Test Location: Chamber #4
 Test Engineer: Vishal Narayan

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
Power setting = 32 (Channel 7 - 2x2), Power setting = 21 (Channel 1 - 3x3)								
4000.010	44.2	V	54.0	-9.8	AVG	59	1.6	RB 1 MHz;VB 10 Hz;Pk
4000.000	48.7	V	74.0	-25.3	PK	59	1.6	RB 1 MHz;VB 3 MHz;Pk
4905.190	36.2	V	54.0	-17.8	AVG	201	1.3	RB 1 MHz;VB 10 Hz;Pk
4905.240	52.9	V	74.0	-21.1	PK	201	1.3	RB 1 MHz;VB 3 MHz;Pk
9797.810	47.2	V	-	-	AVG	178	1.5	RB 1 MHz;VB 10 Hz;Pk, note 2
9797.860	61.3	V	-	-	PK	178	1.5	RB 1 MHz;VB 3 MHz;Pk, note 2
7352.480	45.3	V	54.0	-8.7	AVG	55	1.3	RB 1 MHz;VB 10 Hz;Pk
7353.460	69.8	V	74.0	-4.2	PK	55	1.3	RB 1 MHz;VB 3 MHz;Pk

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
- Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.
- Note 3: No significant emissions were observed for 18-26GHz

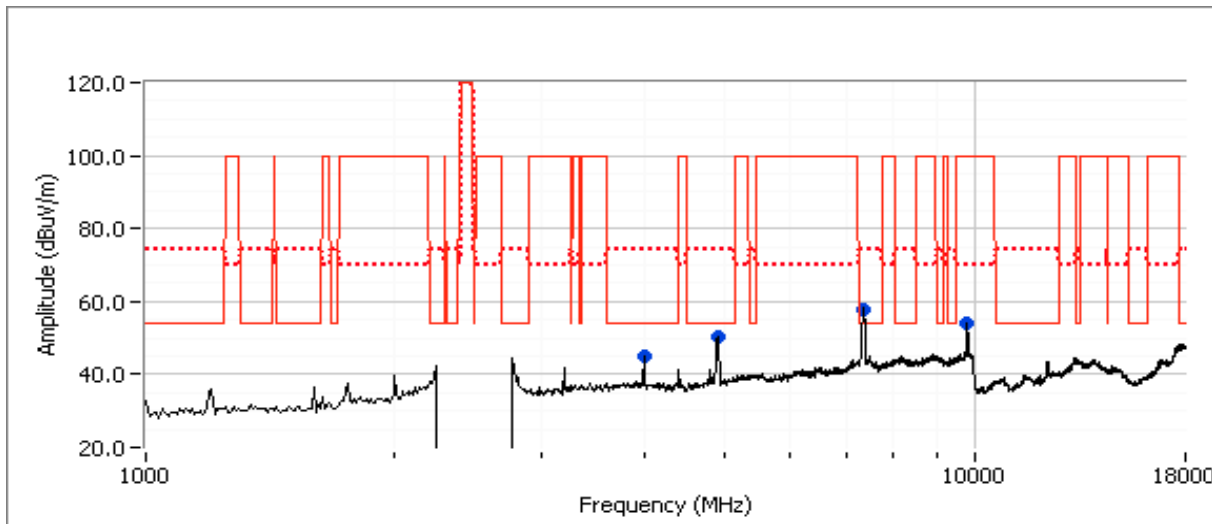


Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #3: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT40 - 2x2 and 3x3 modules.
 Date of Test: 2/23/2012 Test Location: Chamber #4
 Test Engineer: Vishal Narayan

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
Power setting = 34 (Channel 4 - 2x2), Power setting = 28 (Channel 4 - 3x3)								
4875.320	43.4	V	54.0	-10.6	AVG	90	1.3	RB 1 MHz;VB 10 Hz;Pk
4875.430	55.4	V	74.0	-18.6	PK	90	1.3	RB 1 MHz;VB 3 MHz;Pk
9751.220	50.8	V	-	-	AVG	177	1.6	RB 1 MHz;VB 10 Hz;Pk, note 2
9748.990	62.6	V	-	-	PK	177	1.6	RB 1 MHz;VB 3 MHz;Pk, note 2
7301.480	49.7	V	54.0	-4.3	AVG	63	1.3	RB 1 MHz;VB 10 Hz;Pk
7301.870	72.5	V	74.0	-1.5	PK	63	1.3	RB 1 MHz;VB 3 MHz;Pk

- Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
- Note 2: Signal is not in a restricted band. Compliance shown via antenna port measurement in original certification.
- Note 3: No significant emissions were observed for 18-26GHz

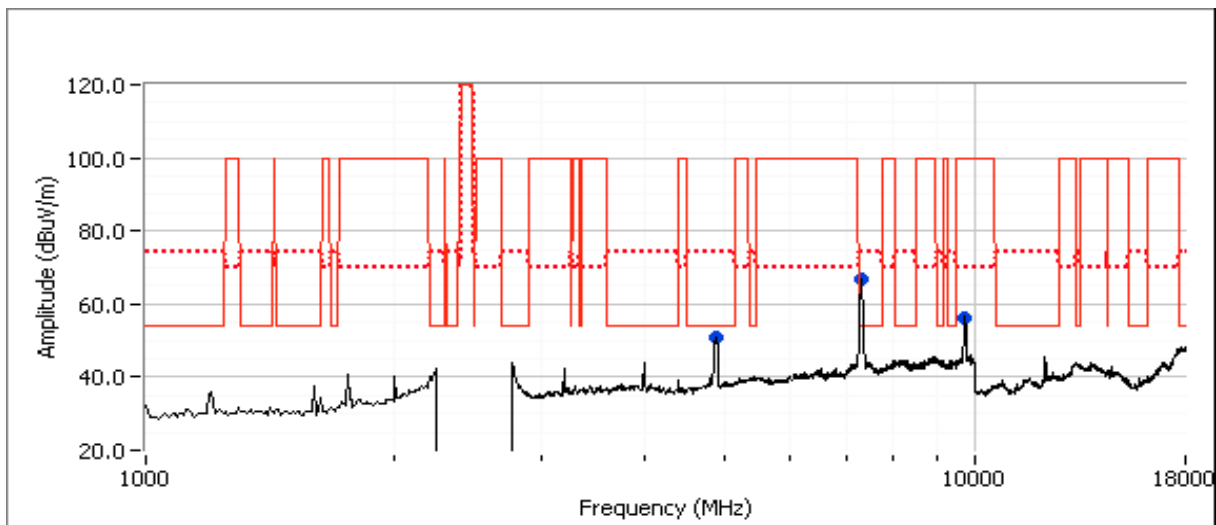

Client:	Xirrus	Job Number:	J86254
Model:	XI-N300 (2x2 radio module) in XR1000	T-Log Number:	T86381
		Account Manager:	Michelle Kim
Contact:	Steve Smith		
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

**RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions
2x2 and 3x3 Modules - 802.11a, HT20, HT40 Modes**

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Xirrus	Job Number:	J86254
Model:	XI-N300 (2x2 radio module) in XR1000	T-Log Number:	T86381
		Account Manager:	Michelle Kim
Contact:	Steve Smith		
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

Summary of Results - Device Operating in the 5.8 MHz Band

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1	802.11a	2x2: 5745 MHz 3x3: 5825 MHz	32 32*		Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	52.9 dBμV/m @ 11648.27 MHz (-1.1 dB)
2	802.11a	2x2: 5825 MHz 3x3: 5745 MHz	31* 36		Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	53.9 dBμV/m @ 11487.87 MHz (-0.1 dB)
3	802.11a	2x2: 5785 MHz 3x3: 5785 MHz	34* 35*		Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	53.7 dBμV/m @ 11572.73 MHz (-0.3 dB)
4	802.11HT2 0	2x2: 5745 MHz 3x3: 5825 MHz	30 34		Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	53.8 dBμV/m @ 5439.90 MHz (-0.2 dB)
5	802.11HT2 0	2x2: 5825 MHz 3x3: 5745 MHz	30 36		Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	53.8 dBμV/m @ 11486.00 MHz (-0.2 dB)
6	802.11HT2 0	2x2: 5785 MHz 3x3: 5785 MHz	30* 36		Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	53.0 dBμV/m @ 5399.96 MHz (-1.0 dB)
7	802.11HT4 0	2x2: 5755 MHz 3x3: 5795 MHz	32 29*		Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	53.0 dBμV/m @ 11595.47 MHz (-1.0 dB)
8	802.11HT4 0	2x2: 5795 MHz 3x3: 5755 MHz	33 32*		Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	52.8 dBμV/m @ 5400.06 MHz (-1.2 dB)

Note: * - indicates power reduced from original certification

Client:	Xirrus	Job Number:	J86254
Model:	XI-N300 (2x2 radio module) in XR1000	T-Log Number:	T86381
Contact:	Steve Smith	Account Manager:	Michelle Kim
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

System Configuration:

Radio #	Frequency	Module	Mode	Radio #	Frequency	Module	Mode
Run: 1				Run: 2			
1	5745	2x2	802.11a	1	5825	2x2	802.11a
0	5825	3x3	802.11a	0	5745	3x3	802.11a
Run: 3				Run: 4			
1	5785	2x2	802.11a	1	5745	2x2	802.11HT20
0	5785	3x3	802.11a	0	5825	3x3	802.11HT20
Run: 5				Run: 6			
1	5785	2x2	802.11HT20	1	5785	2x2	802.11HT20
0	5785	3x3	802.11HT20	0	5785	3x3	802.11HT20
Run: 7				Run: 8			
1	5755	2x2	802.11HT40	1	5795	2x2	802.11HT40
0	5795	3x3	802.11HT40	0	5755	3x3	802.11HT40

Notes - Multiple radios operating at the same time as shown above. In all cases, power set to the maximum worse case single channel power. transmitting on all chains.


Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
Contact: Steve Smith	Account Manager: Michelle Kim
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #1: Radiated Spurious Emissions, 1-40.5GHz. 802.11a - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT3

Test Engineer: Jack Liu & Josph Cadigal

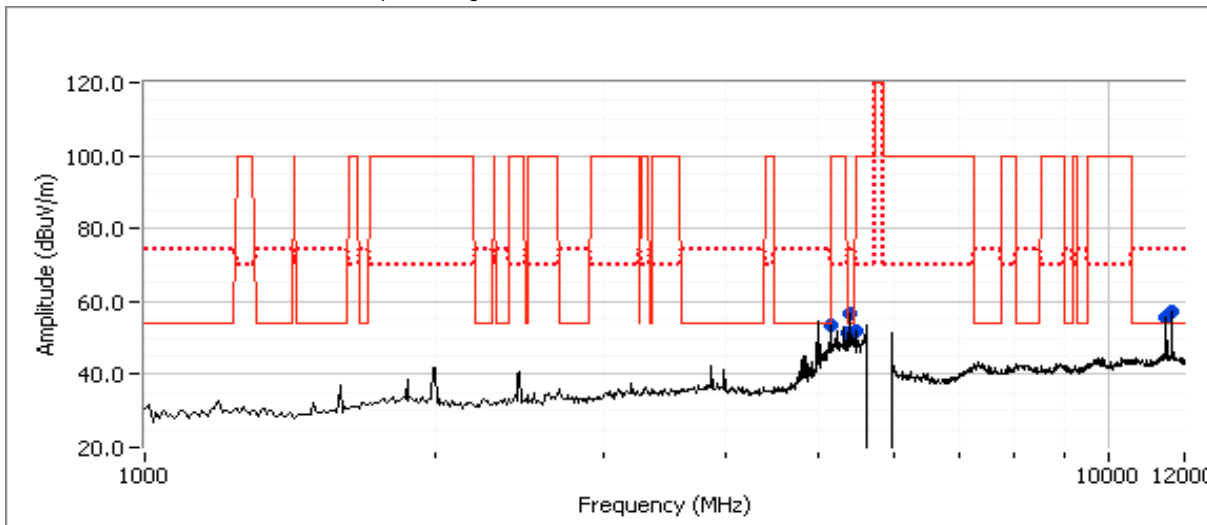

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBµV/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
Power setting = 32 (Channel 149 - 2x2), Power setting = 32 (Channel 165 - 3x3)								
5400.050	52.7	V	54.0	-1.3	AVG	360	1.2	RB 1 MHz;VB 10 Hz;Pk
5399.830	59.7	V	74.0	-14.3	PK	360	1.2	RB 1 MHz;VB 3 MHz;Pk
11486.600	52.2	V	54.0	-1.8	AVG	53	1.5	2x2
11485.740	64.6	V	74.0	-9.4	PK	53	1.5	2x2
11648.270	52.9	V	54.0	-1.1	AVG	163	1.5	3x3
11638.000	64.7	V	74.0	-9.3	PK	163	1.5	3x3

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.
Note 3:	No significant emissions were observed for 18-40GHz


Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
Contact: Steve Smith	Account Manager: Michelle Kim
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #2: Radiated Spurious Emissions, 1-40.5GHz. 802.11a - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT Ch 3

Test Engineer: Joseph Cadigal

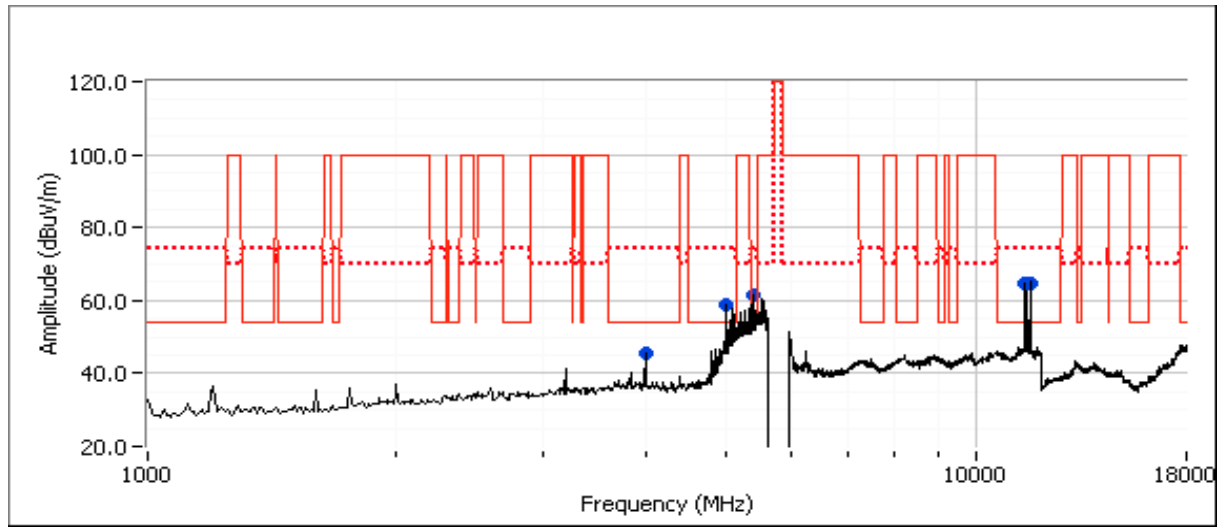

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
Power setting = 31 (Channel 165 - 2x2), Power setting = 36 (Channel 149 - 3x3)								
11487.870	53.9	V	54.0	-0.1	AVG	339	1.0	3x3
11487.530	66.2	V	74.0	-7.8	PK	339	1.0	3x3
11651.600	51.4	V	54.0	-2.6	AVG	170	1.1	2x2
11651.470	63.4	V	74.0	-10.6	PK	170	1.1	2x2

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

Note 3: No significant emissions were observed for 18-40GHz



Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #3: Radiated Spurious Emissions, 1-40.5GHz. 802.11a - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT Ch 3

Test Engineer: Joseph Cadigal

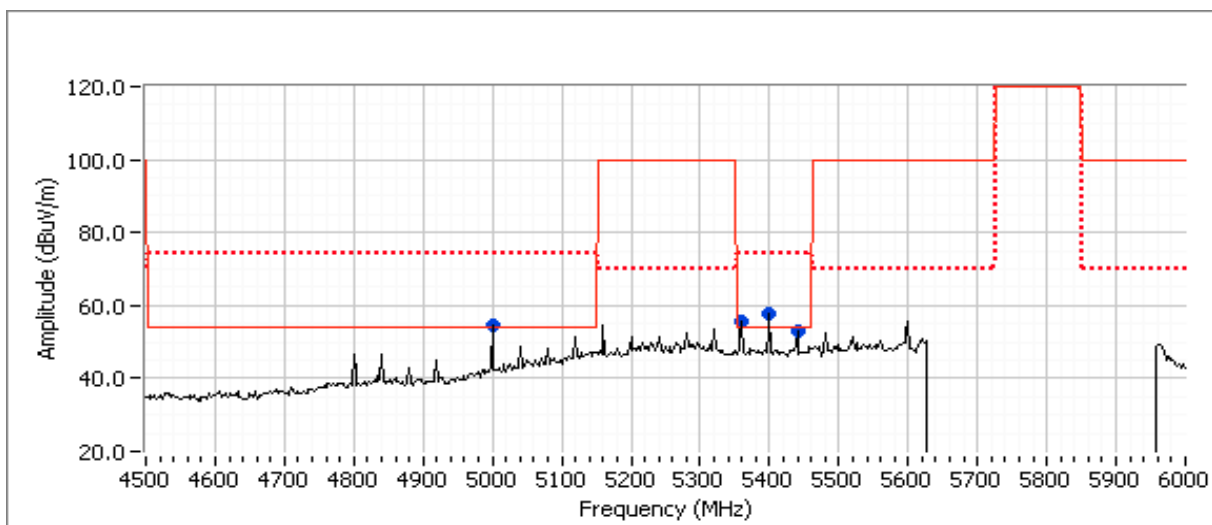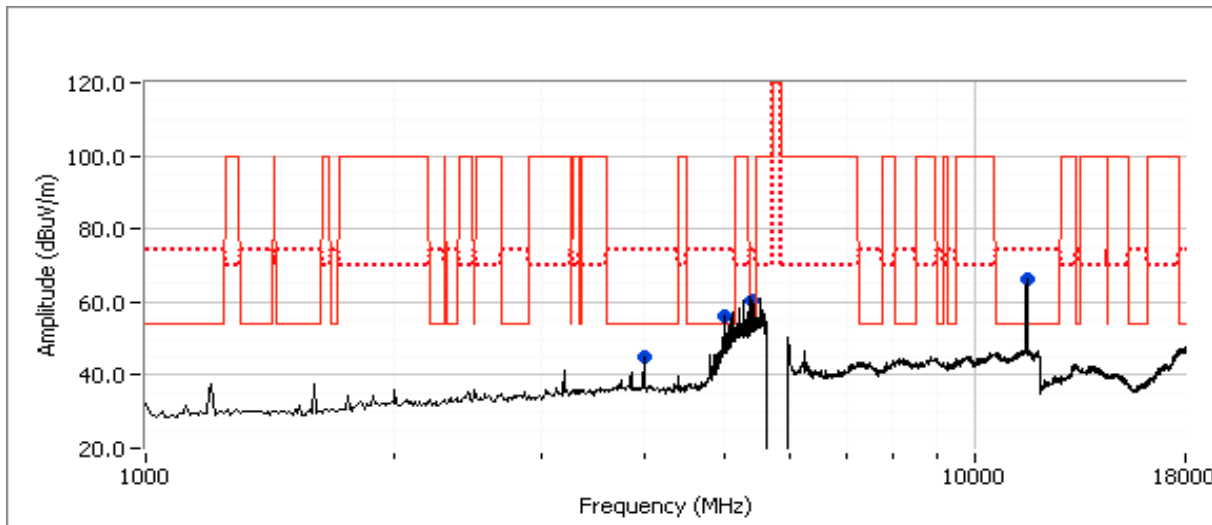

Client:	Xirrus	Job Number:	J86254
Model:	XI-N300 (2x2 radio module) in XR1000	T-Log Number:	T86381
Contact:	Steve Smith	Account Manager:	Michelle Kim
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A



Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
Power setting = 34 (Channel 157 - 2x2), Power setting = 35 (Channel 157 - 3x3)								
11571.670	53.2	V	54.0	-0.8	AVG	243	1.1	2x2
11572.200	64.8	V	74.0	-9.2	PK	243	1.1	2x2
11572.730	53.7	V	54.0	-0.3	AVG	244	1.1	3x3
11572.200	65.2	V	74.0	-8.8	PK	244	1.1	3x3
5359.940	52.6	V	54.0	-1.4	AVG	183	1.0	2x2,3x3
5360.020	57.9	V	74.0	-16.1	PK	183	1.0	2x2,3x3
5439.960	51.3	V	54.0	-2.7	AVG	360	1.0	2x2,3x3
5440.080	58.5	V	74.0	-15.5	PK	360	1.0	2x2,3x3

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.
Note 3:	No significant emissions were observed for 18-40GHz

Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #4: Radiated Spurious Emissions, 1-40.5GHz. 802.11HT20 - 2x2 and 3x3 modules.
 Date of Test: 3/7/2012 Test Location: FT Ch 3
 Test Engineer: Joseph Cadigal

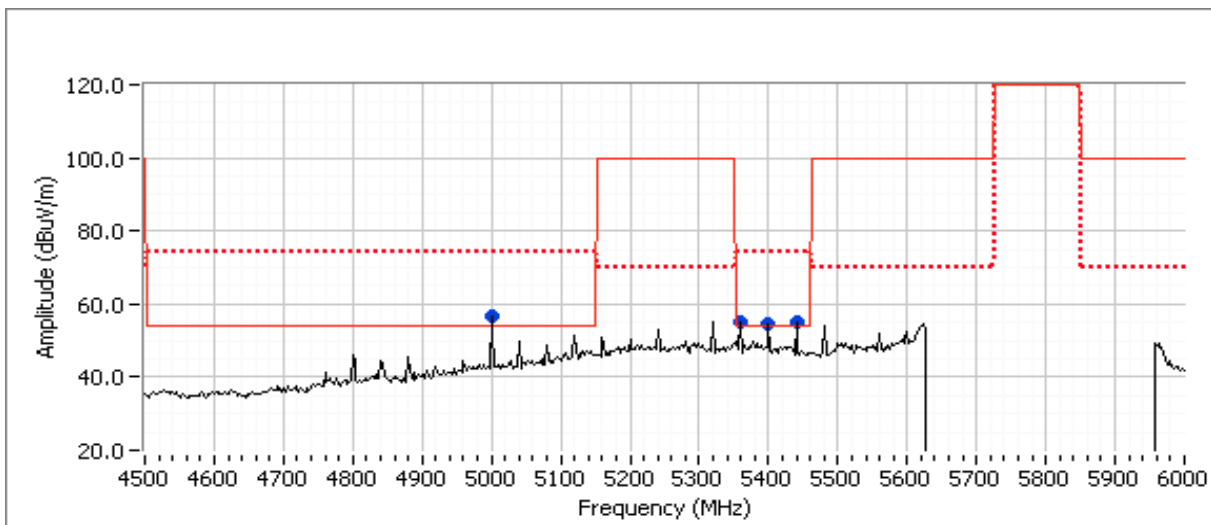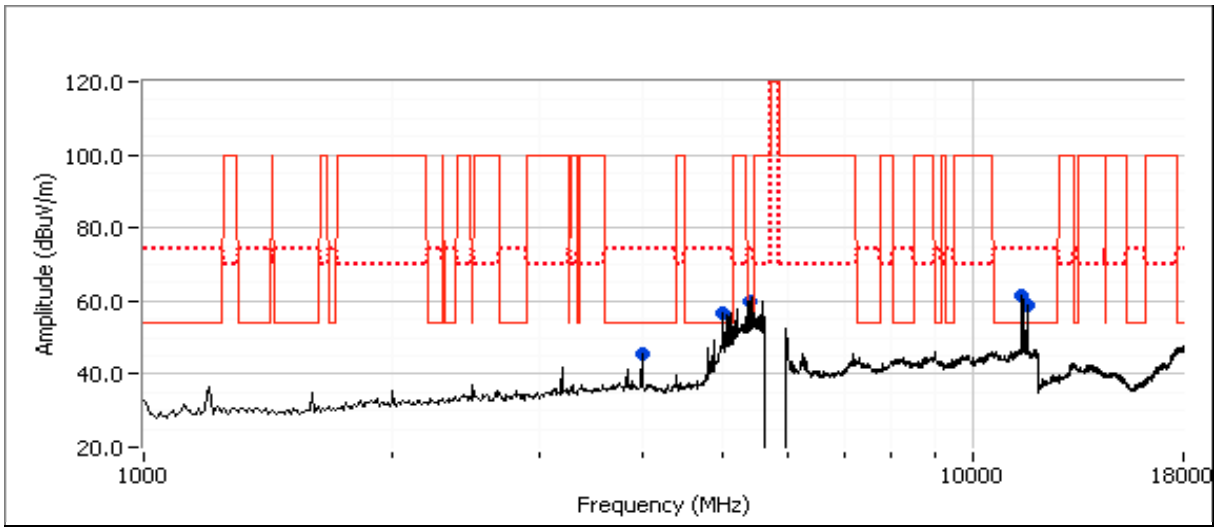

Client:	Xirrus	Job Number:	J86254
Model:	XI-N300 (2x2 radio module) in XR1000	T-Log Number:	T86381
Contact:	Steve Smith	Account Manager:	Michelle Kim
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
Power setting = 30 (Channel 149 - 2x2), Power setting = 34 (Channel 165 - 3x3)								
11654.930	53.3	V	54.0	-0.7	AVG	237	1.1	RB 1 MHz;VB 10 Hz;Pk
11636.070	65.5	V	74.0	-8.5	PK	237	1.1	RB 1 MHz;VB 3 MHz;Pk
11494.330	52.1	V	54.0	-1.9	AVG	225	1.0	RB 1 MHz;VB 10 Hz;Pk
11495.400	64.4	V	74.0	-9.6	PK	225	1.0	RB 1 MHz;VB 3 MHz;Pk
5439.900	53.8	V	54.0	-0.2	AVG	6	1.0	RB 1 MHz;VB 10 Hz;Pk
5440.010	59.9	V	74.0	-14.1	PK	6	1.0	RB 1 MHz;VB 3 MHz;Pk
5399.920	53.0	V	54.0	-1.0	AVG	179	1.5	RB 1 MHz;VB 10 Hz;Pk
5400.020	58.2	V	74.0	-15.8	PK	179	1.5	RB 1 MHz;VB 3 MHz;Pk
5360.030	52.9	V	54.0	-1.1	AVG	359	1.5	RB 1 MHz;VB 10 Hz;Pk
5359.580	58.4	V	74.0	-15.6	PK	359	1.5	RB 1 MHz;VB 3 MHz;Pk
5000.070	55.9	V	-	-	AVG	147	1.5	Note 4
5000.220	59.2	V	-	-	PK	147	1.5	Note 4

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.
Note 3:	No significant emissions were observed for 18-40GHz
Note 4:	Emission from digital circuitry. Refer to digital device results.



Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #5: Radiated Spurious Emissions, 1-40.5GHz. 802.11HT20 - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT Ch 3

Test Engineer: Joseph Cadigal

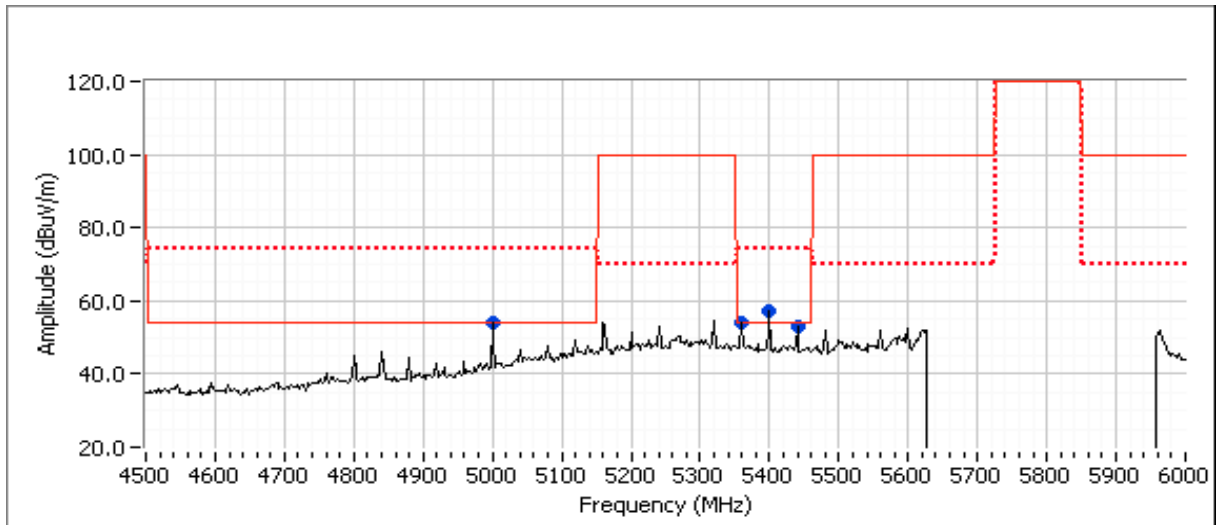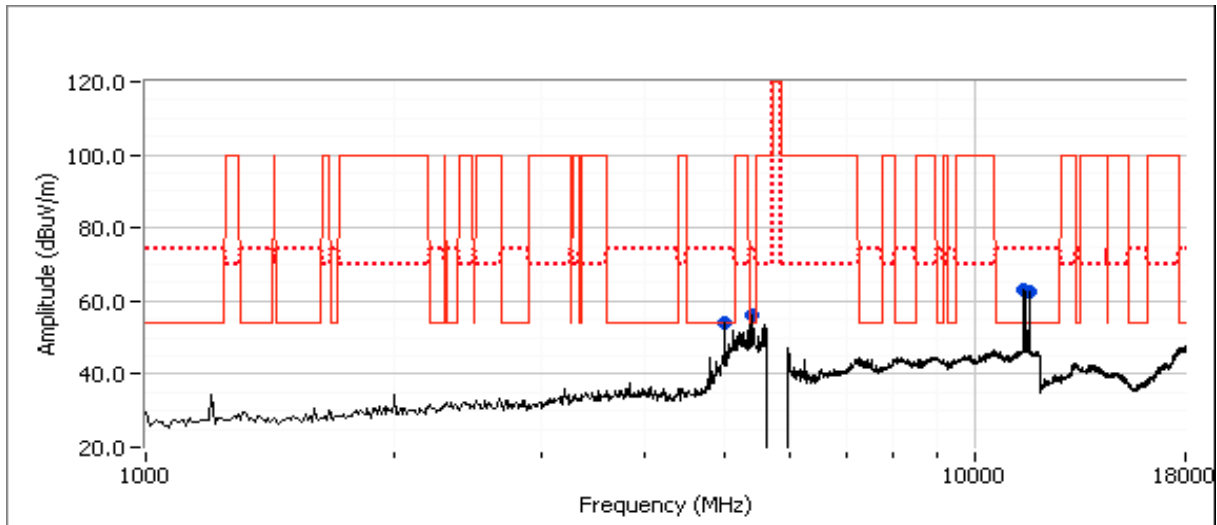



Client:	Xirrus	Job Number:	J86254
Model:	XI-N300 (2x2 radio module) in XR1000	T-Log Number:	T86381
Contact:	Steve Smith	Account Manager:	Michelle Kim
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
Power setting = 30 (Channel 165 - 2x2), Power setting = 36 (Channel 149 - 3x3)								
11655.070	51.8	V	54.0	-2.2	AVG	245	1.1	RB 1 MHz;VB 10 Hz;Pk
11653.730	65.0	V	74.0	-9.0	PK	245	1.1	RB 1 MHz;VB 3 MHz;Pk
11486.000	53.8	V	54.0	-0.2	AVG	341	1.1	RB 1 MHz;VB 10 Hz;Pk
11487.530	65.2	V	74.0	-8.8	PK	341	1.1	RB 1 MHz;VB 3 MHz;Pk
5000.030	53.0	V	54.0	-1.0	AVG	142	1.3	RB 1 MHz;VB 10 Hz;Pk
5000.120	56.9	V	74.0	-17.1	PK	142	1.3	RB 1 MHz;VB 3 MHz;Pk
5439.910	51.9	V	54.0	-2.1	AVG	356	1.0	RB 1 MHz;VB 10 Hz;Pk
5439.870	59.1	V	74.0	-14.9	PK	356	1.0	RB 1 MHz;VB 3 MHz;Pk
5359.920	52.0	V	54.0	-2.0	AVG	187	1.0	RB 1 MHz;VB 10 Hz;Pk
5359.940	58.1	V	74.0	-15.9	PK	187	1.0	RB 1 MHz;VB 3 MHz;Pk
5400.060	53.6	V	54.0	-0.4	AVG	360	1.0	RB 1 MHz;VB 10 Hz;Pk
5399.830	58.4	V	74.0	-15.6	PK	360	1.0	RB 1 MHz;VB 3 MHz;Pk

Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #6: Radiated Spurious Emissions, 1-40.5GHz. 802.11HT20 - 2x2 and 3x3 modules.
 Date of Test: 3/7/2012 Test Location: FT Ch 3
 Test Engineer: Joseph Cadigal

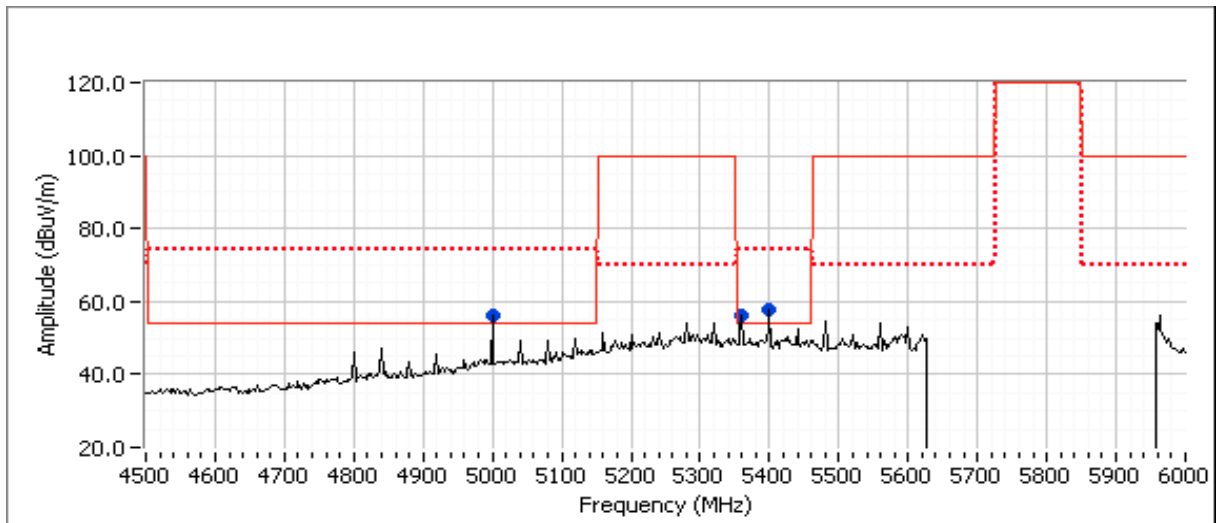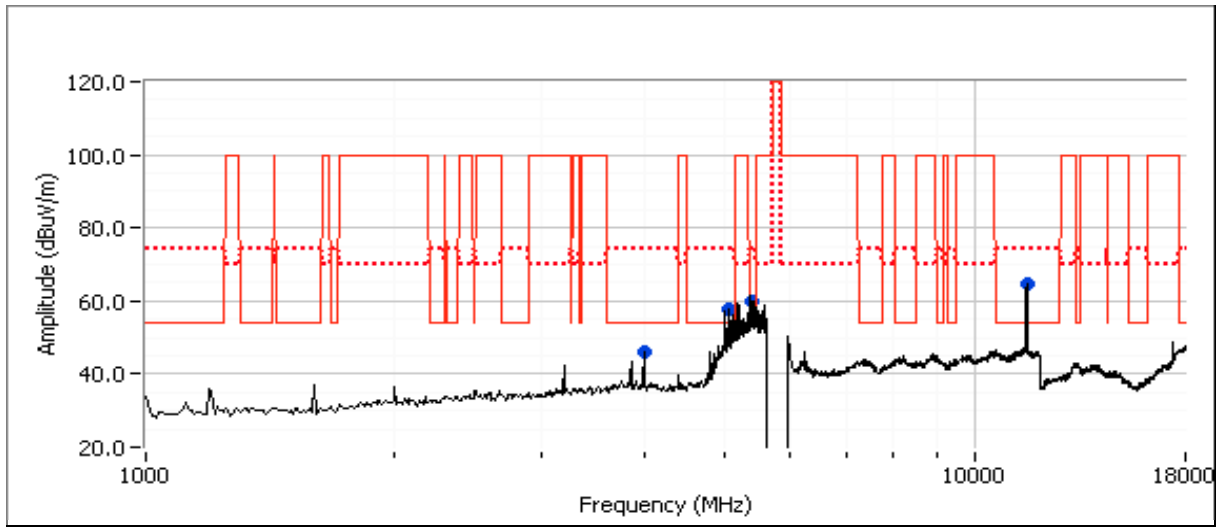

Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
Power setting = 30 (Channel 157 - 2x2), Power setting = 36 (Channel 157 - 3x3)								
5399.960	53.0	V	54.0	-1.0	AVG	360	1.0	RB 1 MHz;VB 10 Hz;Pk
5399.650	58.5	V	74.0	-15.5	PK	360	1.0	RB 1 MHz;VB 3 MHz;Pk
5360.110	46.5	V	54.0	-7.5	AVG	182	1.0	RB 1 MHz;VB 10 Hz;Pk
5360.150	57.3	V	74.0	-16.7	PK	182	1.0	RB 1 MHz;VB 3 MHz;Pk
11550.730	40.4	V	54.0	-13.6	AVG	360	1.0	RB 1 MHz;VB 10 Hz;Pk
11571.470	51.6	V	74.0	-22.4	PK	360	1.0	RB 1 MHz;VB 3 MHz;Pk
5000.070	58.8	V	-	-	AVG	150	1.5	RB 1 MHz;VB 10 Hz;Pk, note 4
5000.160	58.9	V	-	-	PK	150	1.5	RB 1 MHz;VB 3 MHz;Pk, note 4

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.
Note 3:	No significant emissions were observed for 18-40GHz
Note 4:	Emission from digital circuitry. Refer to digital device results.



Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #7: Radiated Spurious Emissions, 1-40.5GHz. 802.11HT20 - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT Ch 3

Test Engineer: Joseph Cadigal

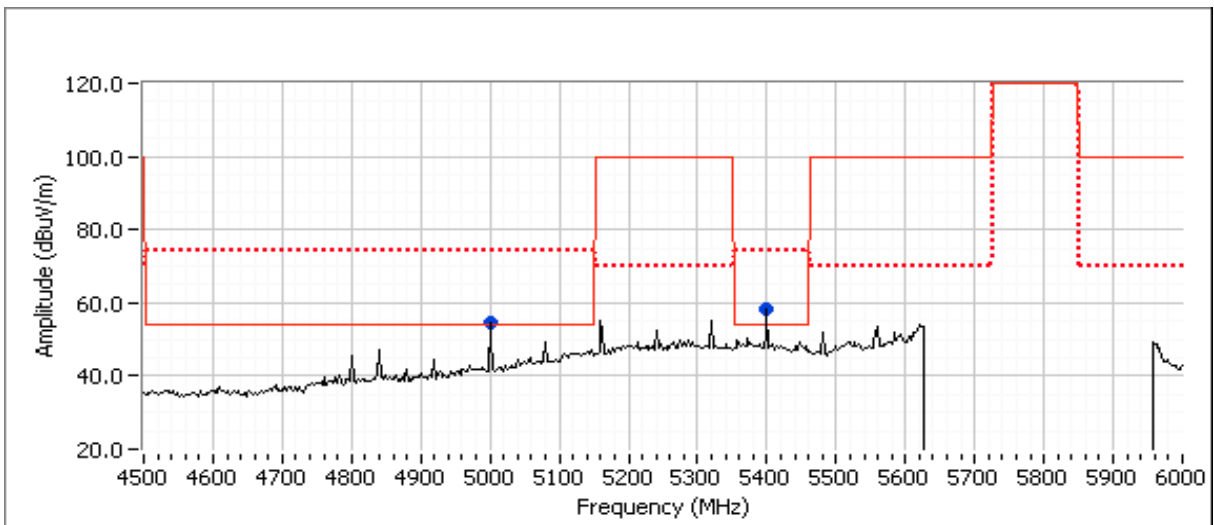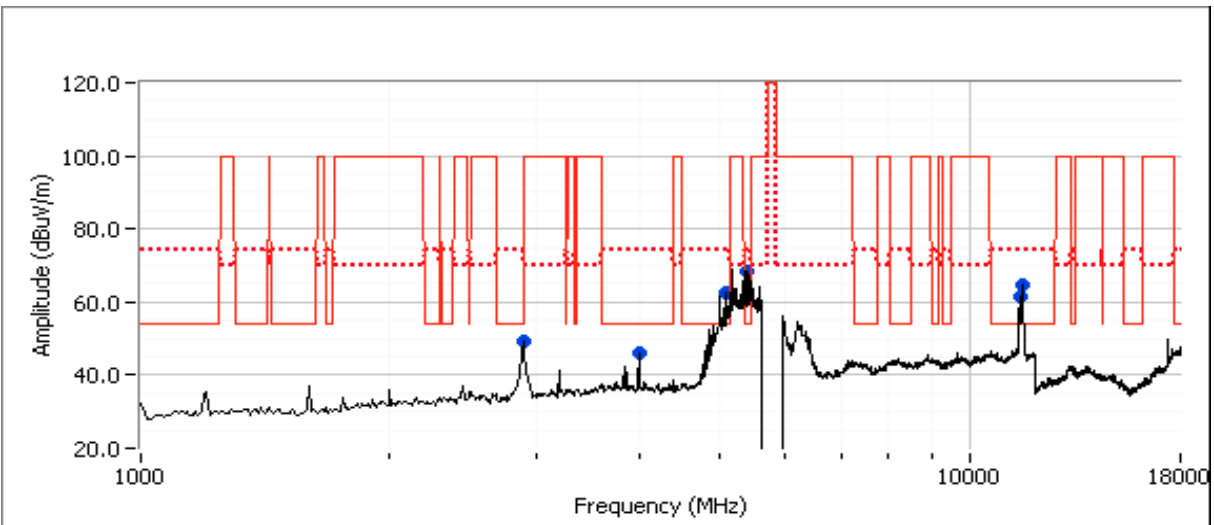

Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Other Spurious Emissions

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
Power setting = 32 (Channel 151 - 2x2), Power setting = 29 (Channel 159 - 3x3)								
11516.870	51.6	V	54.0	-2.4	AVG	227	1.4	RB 1 MHz;VB 10 Hz;Pk
11518.070	63.5	V	74.0	-10.5	PK	227	1.4	RB 1 MHz;VB 3 MHz;Pk
11595.470	53.0	V	54.0	-1.0	AVG	340	1.0	RB 1 MHz;VB 10 Hz;Pk
11602.730	65.2	V	74.0	-8.8	PK	340	1.0	RB 1 MHz;VB 3 MHz;Pk
5399.950	48.1	V	54.0	-5.9	AVG	360	1.0	RB 1 MHz;VB 10 Hz;Pk
5399.850	53.5	V	74.0	-20.5	PK	360	1.0	RB 1 MHz;VB 3 MHz;Pk
5000.060	53.3	V	-	-	AVG	323	1.5	RB 1 MHz;VB 10 Hz;Pk, note 4
5000.050	56.9	V	-	-	PK	323	1.5	RB 1 MHz;VB 3 MHz;Pk, note 4

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.
Note 3:	No significant emissions were observed for 18-40GHz
Note 4:	Emission from digital circuitry. Refer to digital device results.



Client: Xirrus	Job Number: J86254
Model: XI-N300 (2x2 radio module) in XR1000	T-Log Number: T86381
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #8: Radiated Spurious Emissions, 1-40.5GHz. 802.11HT40 - 2x2 and 3x3 modules.

Date of Test: 3/7/2012

Test Location: FT Ch 3

Test Engineer: Joseph Cadigal

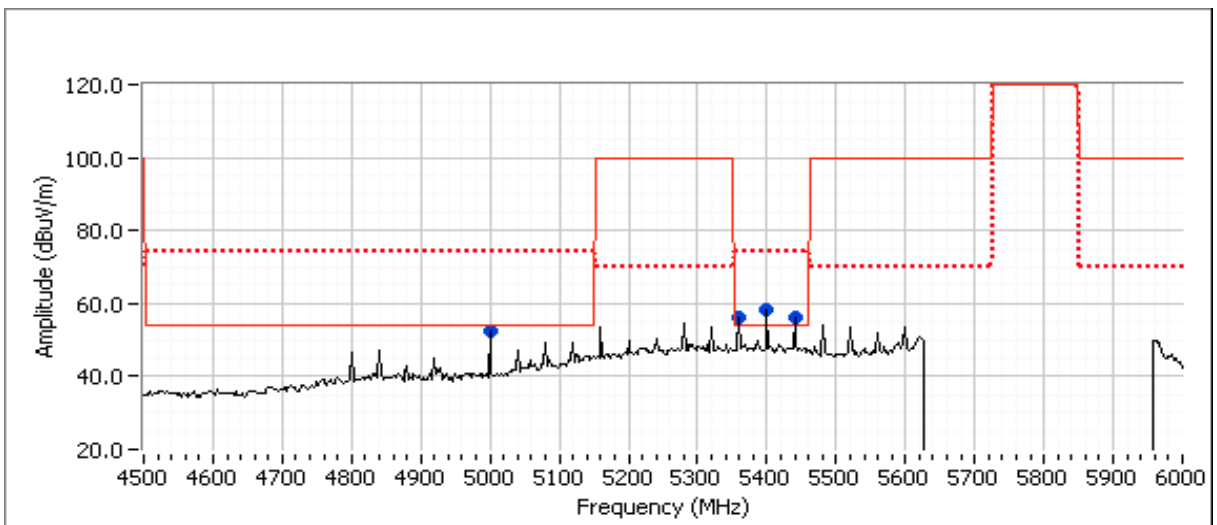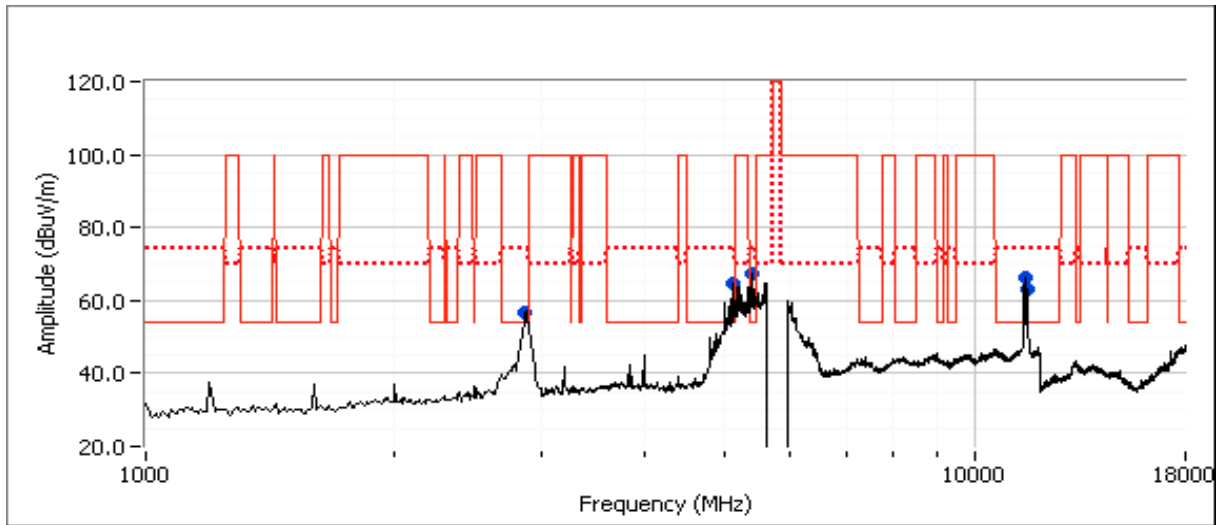

Client:	Xirrus	Job Number:	J86254
Model:	XI-N300 (2x2 radio module) in XR1000	T-Log Number:	T86381
Contact:	Steve Smith	Account Manager:	Michelle Kim
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
Power setting = 33 (Channel 159 - 2x2), Power setting = 32 (Channel 151 - 3x3)								
5440.000	52.2	V	54.0	-1.8	AVG	358	1.0	RB 1 MHz;VB 10 Hz;Pk
5439.940	59.3	V	74.0	-14.7	PK	358	1.0	RB 1 MHz;VB 3 MHz;Pk
5359.960	52.5	V	54.0	-1.5	AVG	360	1.0	RB 1 MHz;VB 10 Hz;Pk
5360.150	59.1	V	74.0	-14.9	PK	360	1.0	RB 1 MHz;VB 3 MHz;Pk
11508.540	45.7	V	54.0	-8.3	AVG	338	1.0	RB 1 MHz;VB 10 Hz;Pk
11508.700	57.5	V	74.0	-16.5	PK	338	1.0	RB 1 MHz;VB 3 MHz;Pk
11595.870	50.0	V	54.0	-4.0	AVG	247	1.1	RB 1 MHz;VB 10 Hz;Pk
11602.600	62.6	V	74.0	-11.4	PK	247	1.1	RB 1 MHz;VB 3 MHz;Pk
5400.060	52.8	V	54.0	-1.2	AVG	3	1.0	RB 1 MHz;VB 10 Hz;Pk
5399.730	58.6	V	74.0	-15.4	PK	3	1.0	RB 1 MHz;VB 3 MHz;Pk
5000.040	50.4	V	-	-	AVG	98	1.0	RB 1 MHz;VB 10 Hz;Pk, note 4
4999.870	54.6	V	-	-	PK	98	1.0	RB 1 MHz;VB 3 MHz;Pk, note 4

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.
Note 3:	No significant emissions were observed for 18-40GHz
Note 4:	Emission from digital circuitry. Refer to digital device results.

Client:	Xirrus	Job Number:	J86254
Model:	XI-N450 (3x3 radio module) in XR1000	T-Log Number:	T86382
Contact:	Steve Smith	Account Manager:	Michelle Kim
Emissions Standard(s):	FCC 15.247/15.E/RSS-210	Class:	-
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Xirrus

Model

XI-N450 (3x3 radio module) in XR1000

Date of Last Test: 5/24/2012

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

**RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions
802.11bg, HT20 Band Edge and Spurious, HT40 Band Edge**

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions: Temperature: 20-25 °C
 Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Power Setting	Test Performed	Limit	Result / Margin
1a Low Channel	HT20	2412 MHz	22*	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	53.8 V/m @ 2389.9 MHz (-0.2 dB)
1b High Channel		2462 MHz	22*	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	53.2 V/m @ 2483.5 MHz (-0.8 dB)

Note: * - indicates power reduced from original certification


Testing was performed on the worse case mode from the original filing.
Power was set to be within 0.5dB of the original filing power.

Client:	Xirrus	Job Number:	J86254
Model:	XI-N450 (3x3 radio module) in XR1000	T-Log Number:	T86382
Contact:	Steve Smith	Account Manager:	Michelle Kim
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

Run #1: Radiated Spurious Emissions, 30 - 26500 MHz. Operating Mode: 802.11n 20 MHz, 3x3
 Date of Test: 2/21/2012 Test Location: FT Chamber #3
 Test Engineer: Rafael Varelas

Run #1a: Channel 1@ 2412 MHz, Radio #12
 Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
Power setting 22								
2389.870	53.8	V	54.0	-0.2	AVG	304	1.2	RB 1 MHz;VB 10 Hz;Pk, 11.0
2389.450	71.5	V	74.0	-2.5	PK	304	1.2	RB 1 MHz;VB 3 MHz;Pk, 11.0
2389.820	51.1	H	54.0	-2.9	AVG	322	1.1	RB 1 MHz;VB 10 Hz;Pk, 11.0
2388.880	65.4	H	74.0	-8.6	PK	322	1.1	RB 1 MHz;VB 3 MHz;Pk, 11.0

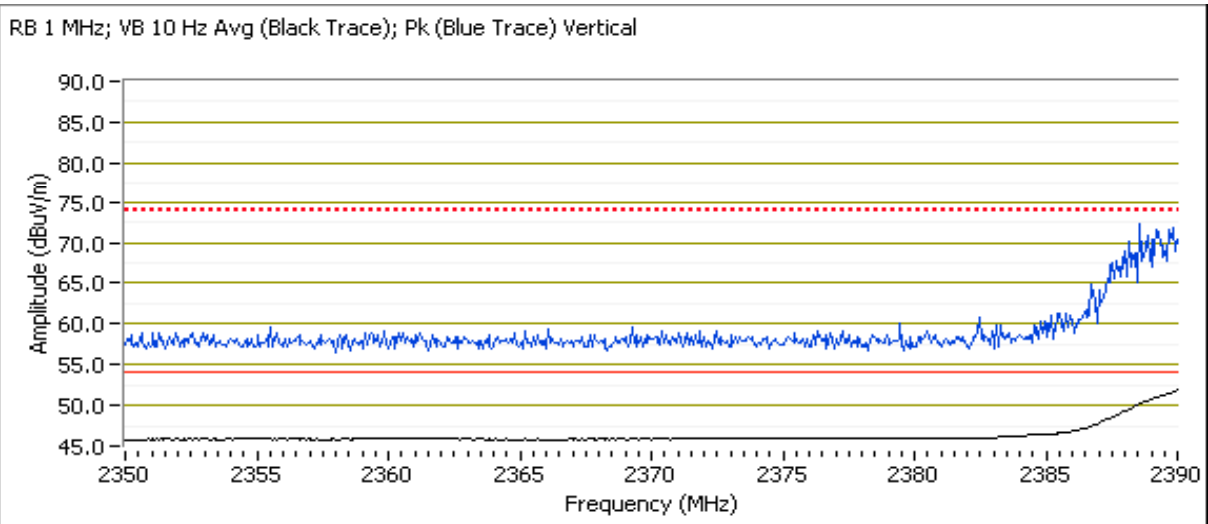


Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
Contact: Steve Smith	Account Manager: Michelle Kim
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #1b: High Channel @ 2462 MHz, Radio #12

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
Power setting 22								
2483.530	53.2	V	54.0	-0.8	AVG	218	1.0	RB 1 MHz;VB 10 Hz;Pk, 11.0
2483.820	70.0	V	74.0	-4.0	PK	218	1.0	RB 1 MHz;VB 3 MHz;Pk, 11.0
2483.520	50.9	H	54.0	-3.1	AVG	282	1.0	RB 1 MHz;VB 10 Hz;Pk
2484.710	66.7	H	74.0	-7.3	PK	282	1.0	RB 1 MHz;VB 3 MHz;Pk

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace) Vertical

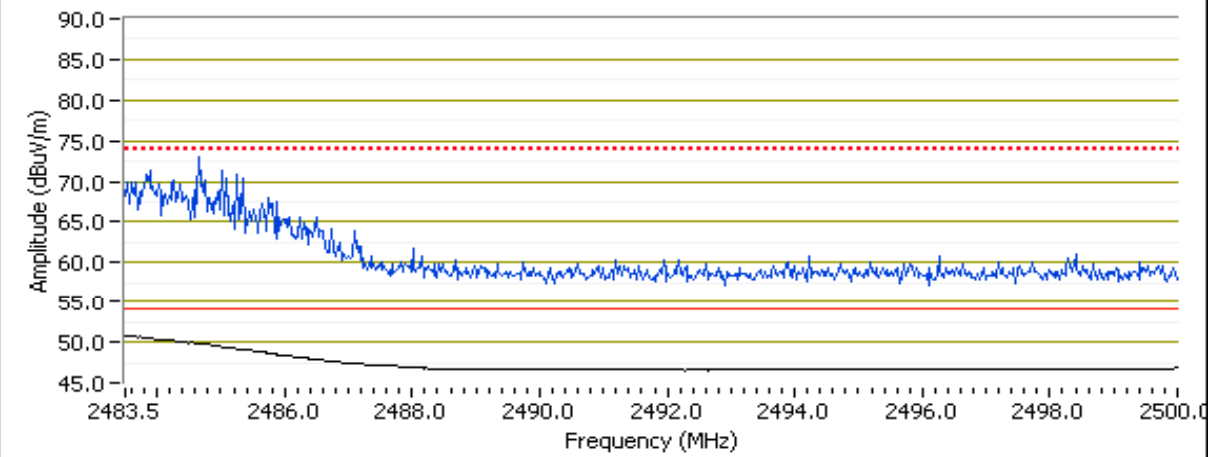

Client:	Xirrus	Job Number:	J86254
Model:	XI-N450 (3x3 radio module) in XR1000	T-Log Number:	T86382
		Account Manager:	Michelle Kim
Contact:	Steve Smith		
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

RSS 210 and FCC 15.407 (UNII) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. All remote support equipment was located approximately 30 meters from the EUT.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 30-40 %

Summary of Results

Run #	Mode	Channel	Power Setting	Test Performed	Limit	Result / Margin
1	HT20 Chain 012	5150-5250 #36 (low)	19	Restricted Band Edge at 5150 MHz	15.209	47.2 dBµV/m @ 5149.8 MHz (-6.8 dB)
		5150-5250 #40	15*	Restricted Band Edge at 5150 MHz		53.8 dBµV/m @ 5000.0 MHz (-0.2 dB)
2	HT20 Chain 012	5250-5350 #64 (High)	21	Restricted Band Edge at 5350 MHz	15.209	53.4 dBµV/m @ 5359.9 MHz (-0.6 dB)
		5150-5250 #60	33	Restricted Band Edge at 5350 MHz		47.5 dBµV/m @ 5360.0 MHz (-6.5 dB)
3	HT20 Chain 012	5470-5725 Low	30	Restricted Band Edge at 5460 MHz	15.209	53.2 dBµV/m @ 5440.0 MHz (-0.8 dB)

Note: * - indicates power reduced from original certification

Testing was performed on the worse case mode from the original filing.
Power was set to be within 0.5dB of the original filing power.

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A


Run #1, Radiated Spurious Emissions at Band Edges. Operation in the 5150-5250 MHz Band

Run #1a: Low Channel, 5180 MHz

Date of Test: 2/22/2012
 Test Engineer: John Caizzi
 Test Location: FT5

5150 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments	Chains
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters		
5149.800	47.2	V	54.0	-6.8	AVG	109	1.05		
5148.770	61.6	V	74.0	-12.4	PK	109	1.05		

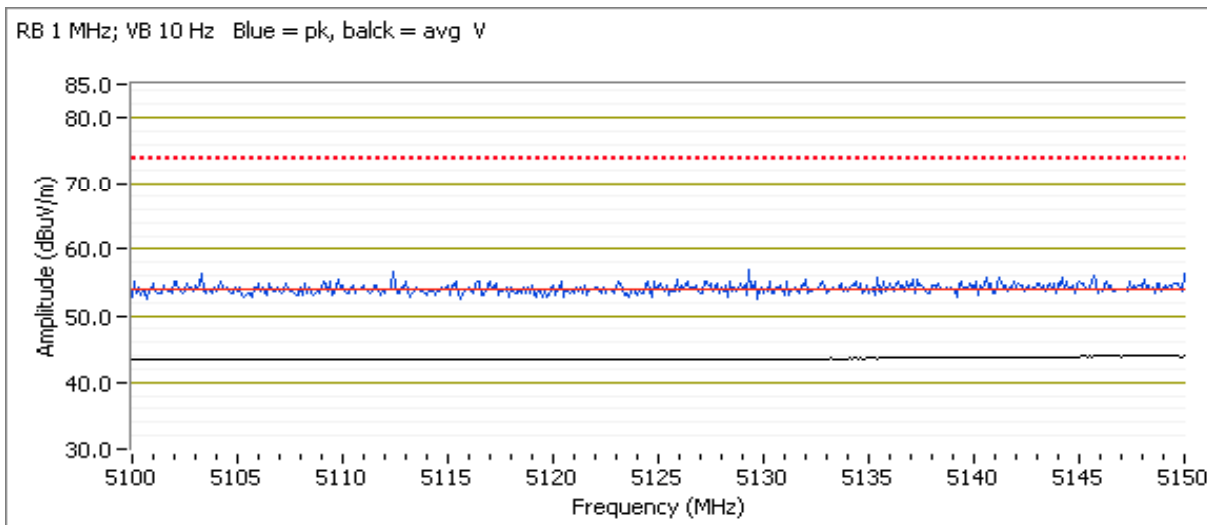

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A


Run #1b: Channel 40, 5200 MHz

Date of Test: 2/22/2012
 Test Engineer: John Caizzi
 Test Location: FT5

5150 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments	Chains
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters		
5000.000	53.8	V	54.0	-0.2	AVG	118	1.07		
4999.810	61.1	V	74.0	-12.9	PK	118	1.07		

Note 1 The H polarization was checked, & the 5 GHz signal observed, but at a much lower level than V polarization.

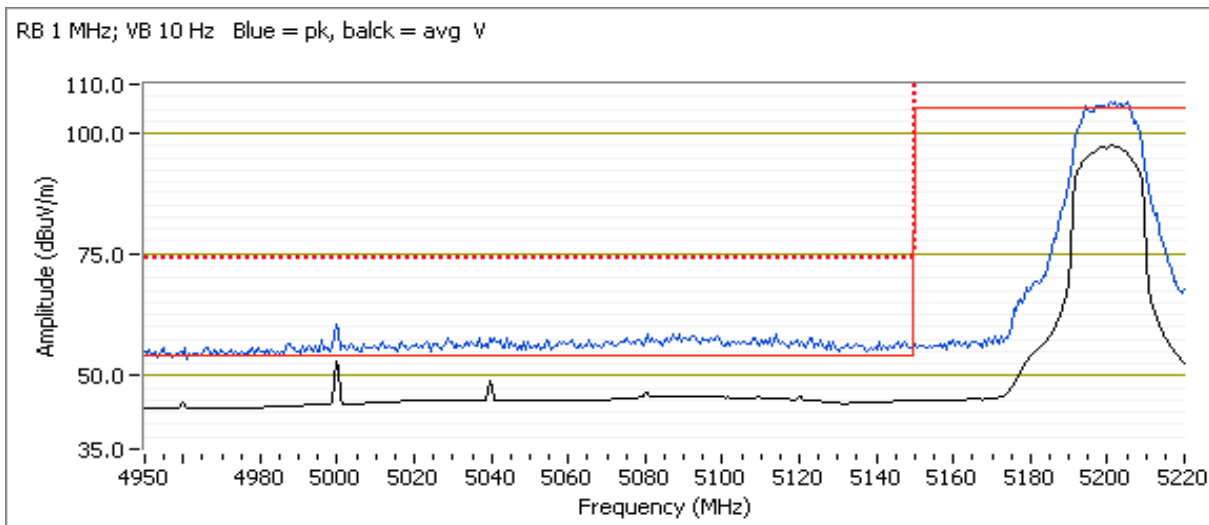

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A


Run #2, Radiated Spurious Emissions at Band Edges. Operation in the 5250-5350 MHz Band
Run #2a High Channel

Date of Test: 2/22/2012
 Test Engineer: John Caizzi
 Test Location: FT5

5350 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments	Chains
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters		
5359.910	53.4	V	54.0	-0.6	AVG	66	1.02		
5359.800	61.9	V	74.0	-12.1	PK	66	1.02		

Note 1 The H polarization was checked, but the signal was absent.

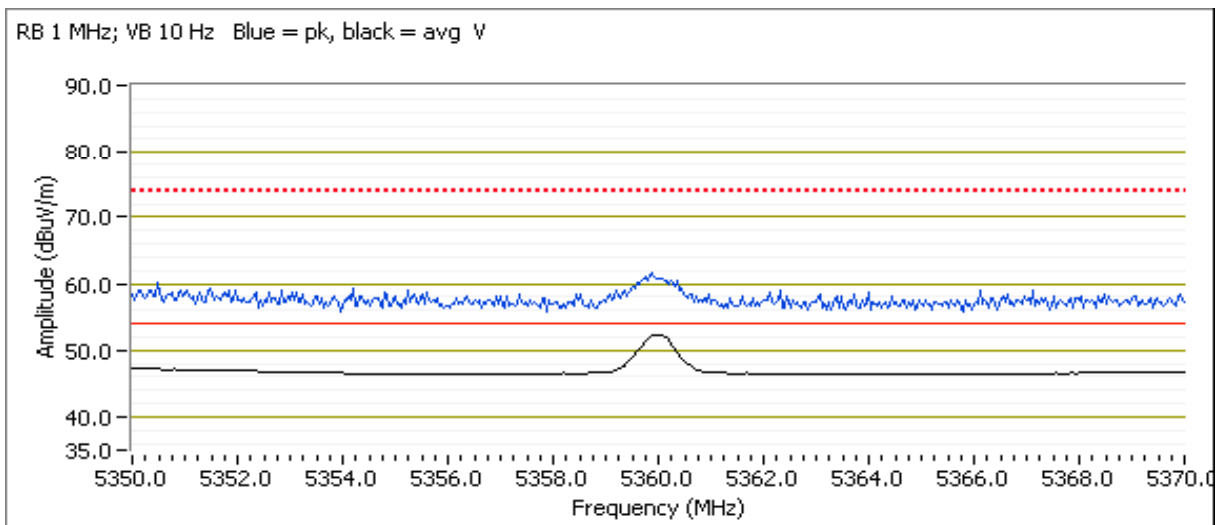

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A


Run #2b Channel 60, 5300 MHz

Date of Test: 2/22/2012
 Test Engineer: John Caizzi
 Test Location: FT5

5350 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments	Chains
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters		
5360.020	47.5	V	54.0	-6.5	AVG	139	1.00		
5361.420	59.9	V	74.0	-14.1	PK	139	1.00		

Note 1 The H polarization was checked, but the signal was absent.

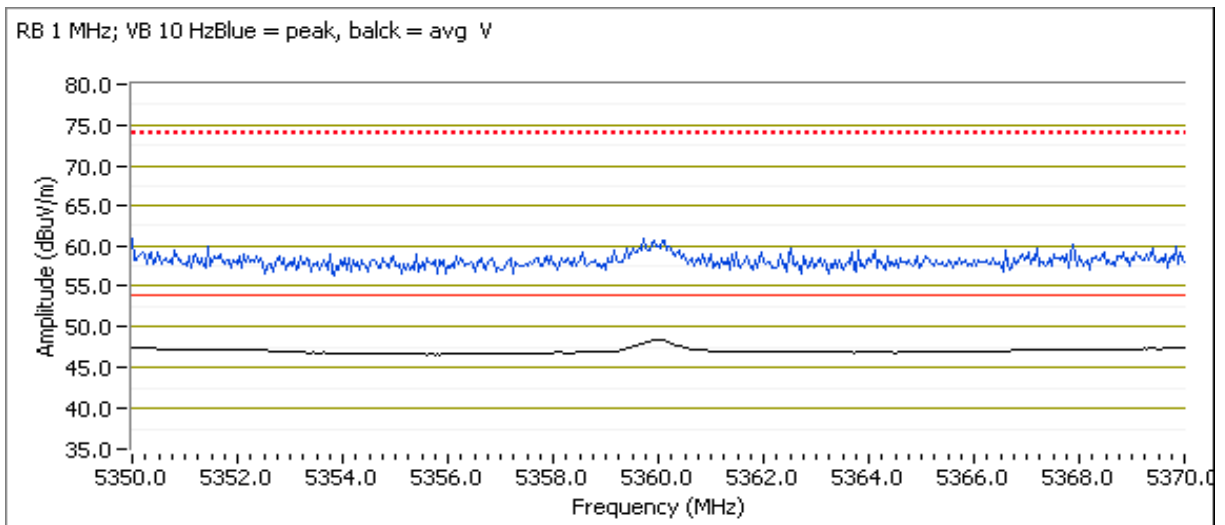


Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #3, Radiated Spurious Emissions at Band Edges. Operation in the 5470-5725 MHz Band
Run #3a: Low Channel, Radio #12

Date of Test: 2/22/2012
 Test Engineer: Rafael Varelas
 Test Location: FT Chamber #5

5350-5460 MHz Restricted Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments	Chains
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters		
5439.960	53.2	V	54.0	-0.8	AVG	273	1.0	POS; RB 1 MHz; VB: 10 Hz	
5455.270	63.2	V	74.0	-10.8	PK	273	1.0	POS; RB 1 MHz; VB: 10 MHz	
5439.960	44.6	H	54.0	-9.4	AVG	326	1.0	POS; RB 1 MHz; VB: 10 Hz	
5447.740	57.5	H	74.0	-16.5	PK	326	1.0	POS; RB 1 MHz; VB: 10 MHz	

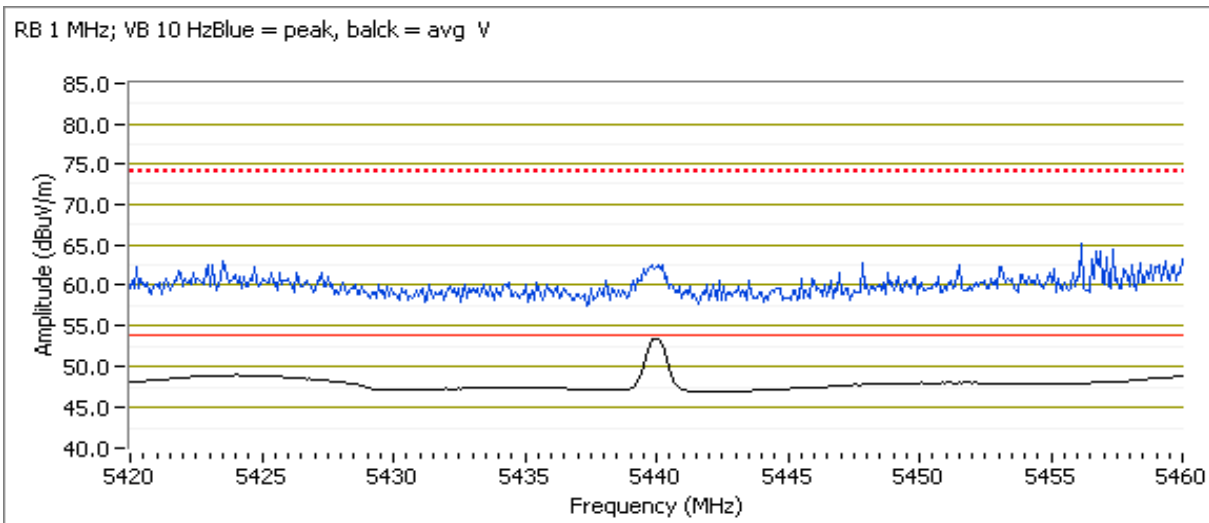

Client:	Xirrus	Job Number:	J86254
Model:	XI-N450 (3x3 radio module) in XR1000	T-Log Number:	T86382
		Account Manager:	Michelle Kim
Contact:	Steve Smith		
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

**RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements
MIMO and Smart Antenna Systems
Power**

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 3/27/2012
Test Engineer: Rafael Varelas
Test Location: FT Lab #4

Config. Used: 1
Config Change: None
EUT Voltage: POE

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Power measured on radio #10 with XR2000 unit

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

XR1000 -

Operating Mode: **802.11n20**


Transmitted signal on chain is coherent ? yes

2412 MHz	Chain 1	Chain 2	Chain 3	Chain 4	Total Across All Chains		Limit	
Power Setting ^{Note 3}	22.0	22.0	22.0					
Output Power (dBm) ^{Note 1}	8.6	9.0	9.1		13.7 dBm	0.023 W	29.2 dBm	0.837 W
Antenna Gain (dBi) ^{Note 2}	2.0	2.0	2.0		6.8 dBi	6.8 dBi	Pass	
eirp (dBm) ^{Note 2}	10.6	11	11.1		20.4 dBm	0.111 W		

2462 MHz	Chain 1	Chain 2	Chain 3	Chain 4	Total Across All Chains		Limit	
Power Setting ^{Note 3}	22.0	22.0	22.0					
Output Power (dBm) ^{Note 1}	8.6	8.4	8.8		13.4 dBm	0.022 W	29.2 dBm	0.837 W
Antenna Gain (dBi) ^{Note 2}	2.0	2.0	2.0		6.8 dBi	6.8 dBi	Pass	
eirp (dBm) ^{Note 2}	10.6	10.4	10.8		20.1 dBm	0.103 W		

- Note 1: Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over **50 MHz** (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes **-30dBc**.
- Note 2: As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain
- Note 3: Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2.

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

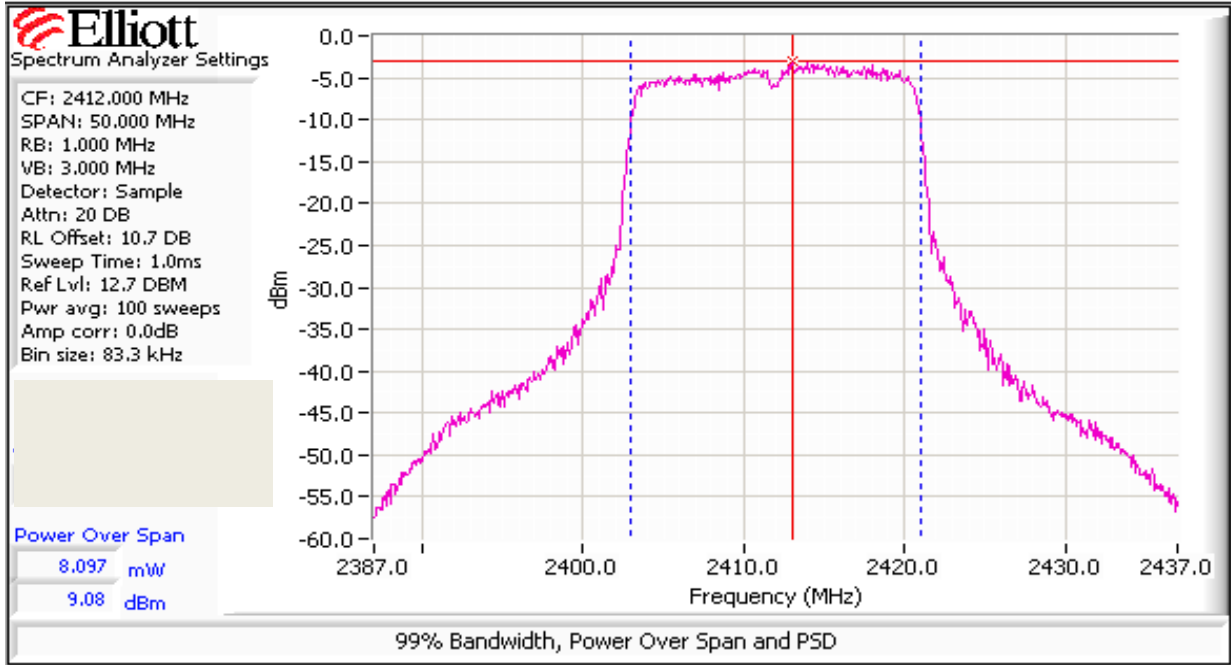

Client:	Xirrus	Job Number:	J86254
Model:	XI-N450 (3x3 radio module) in XR1000	T-Log Number:	T86382
Contact:	Steve Smith	Account Manager:	Michelle Kim
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

XR2000 -

Run #1: Output Power - Chain A + B + C


Operating Mode: 802.11b

Transmitted signal on chain is coherent ? yes

2412 MHz	Chain 1	Chain 2	Chain 3	Chain 4	Total Across All Chains		Limit	
Power Setting ^{Note 3}	34.0	34.0	34.0					
Output Power (dBm) ^{Note 1}	15.6	14.2	15.0		19.8 dBm	0.094 W	29.2 dBm	0.837 W
Antenna Gain (dBi) ^{Note 2}	2.0	2.0	2.0		6.8 dBi	6.8 dBi	Pass	
eirp (dBm) ^{Note 2}	17.6	16.23	17		26.5 dBm	0.449 W		

Note 1:	Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc.
Note 2:	As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain
Note 3:	Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2.

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

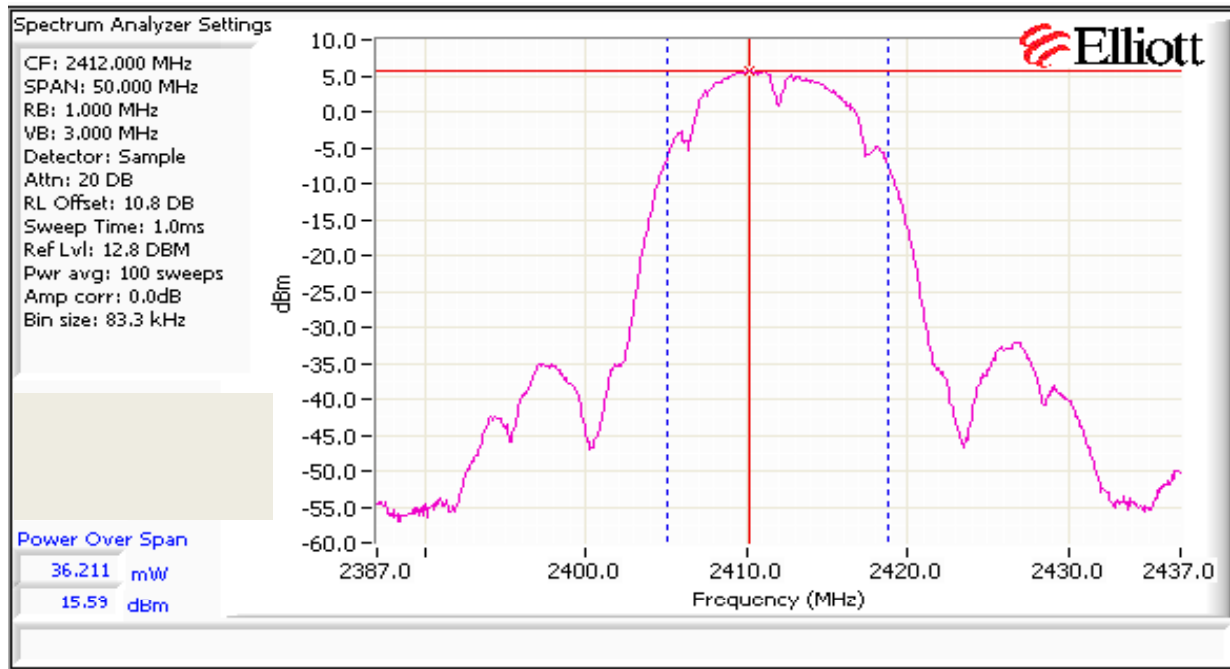

Client:	Xirrus	Job Number:	J86254
Model:	XI-N450 (3x3 radio module) in XR1000	T-Log Number:	T86382
		Account Manager:	Michelle Kim
Contact:	Steve Smith		
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements
MIMO and Smart Antenna Systems
Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 3/27/2012
 Test Engineer: Rafael Varelas
 Test Location: FT Lab #4

Config. Used: 1
 Config Change: None
 EUT Voltage: POE

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Power measured on radio #10 with XR2000 unit

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

XR1000 -

Run #1: Output Power - Chain A + B

Operating Mode: 802.11a


Transmitted signal on chain is coherent ? Yes

5785 MHz	Chain 1	Chain 2	Chain 3	Chain 4	Total Across All Chains		Limit	
Power Setting ^{Note 3}	35.0	35.0	35.0					
Output Power (dBm) ^{Note 1}	12.9	13.4	12.8		17.8 dBm	0.061 W	27.2 dBm	0.528 W
Antenna Gain (dBi) ^{Note 2}	4.0	4.0	4.0		8.8 dBi		Pass	
eirp (dBm) ^{Note 2}	16.94	17.4	16.8		26.6 dBm	0.457 W		

5825 MHz	Chain 1	Chain 2	Chain 3	Chain 4	Total Across All Chains		Limit	
Power Setting ^{Note 3}	32.0	32.0	32.0					
Output Power (dBm) ^{Note 1}	10.8	12.3	11.1		16.2 dBm	0.042 W	27.2 dBm	0.528 W
Antenna Gain (dBi) ^{Note 2}	4.0	4.0	4.0		8.8 dBi		Pass	
eirp (dBm) ^{Note 2}	14.8	16.3	15.1		25.0 dBm	0.316 W		

Note 1:	Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc.
Note 2:	As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain
Note 3:	Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2.

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

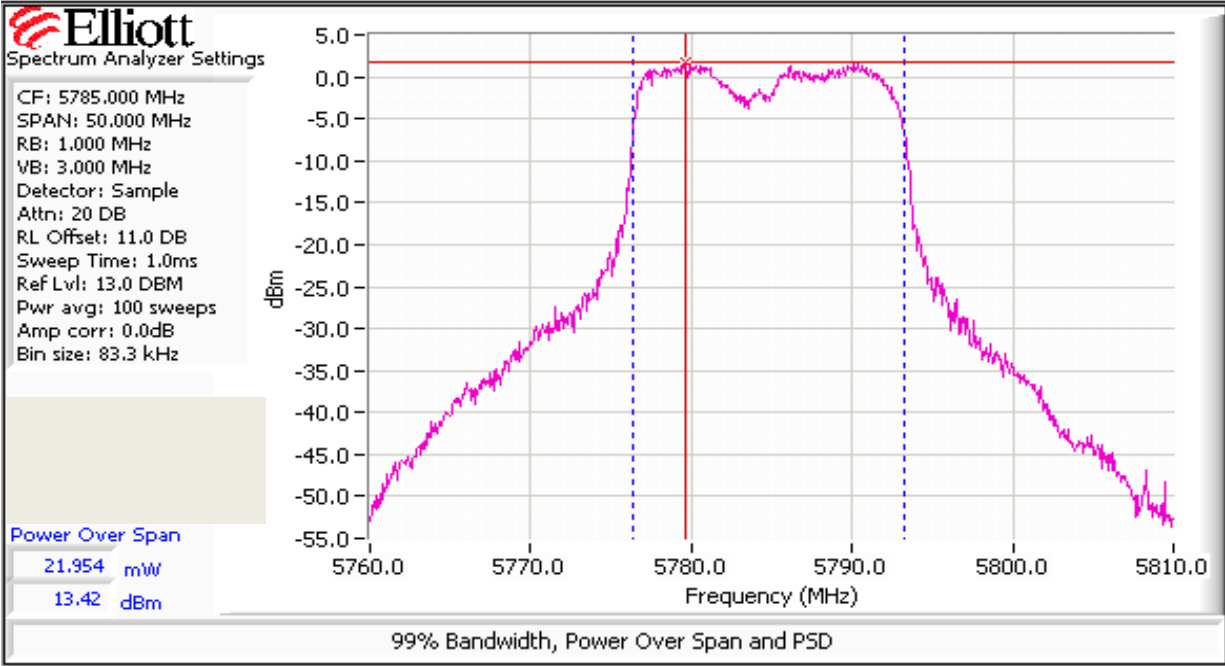

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A


Operating Mode: 802.11n40
Transmitted signal on chain is coherent ? Yes
701.0

5755 MHz	Chain 1	Chain 2	Chain 3	Chain 4	Total Across All Chains		Limit	
Power Setting ^{Note 3}	29.0	29.0	29.0					
Output Power (dBm) ^{Note 1}	10.3	9.9	8.5		14.4 dBm	0.028 W	27.2 dBm	0.528 W
Antenna Gain (dBi) ^{Note 2}	4.0	4.0	4.0		8.8 dBi		Pass	
eirp (dBm) ^{Note 2}	14.3	13.9	12.5		23.2 dBm	0.208 W		

5795 MHz	Chain 1	Chain 2	Chain 3	Chain 4	Total Across All Chains		Limit	
Power Setting ^{Note 3}	32.0	32.0	32.0					
Output Power (dBm) ^{Note 1}	11.4	11.9	11.1		16.3 dBm	0.042 W	27.2 dBm	0.528 W
Antenna Gain (dBi) ^{Note 2}	4.0	4.0	4.0		8.8 dBi		Pass	
eirp (dBm) ^{Note 2}	15.4	15.9	15.1		25.0 dBm	0.318 W		

Note 1:	Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 75 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc.
Note 2:	As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain
Note 3:	Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2.

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

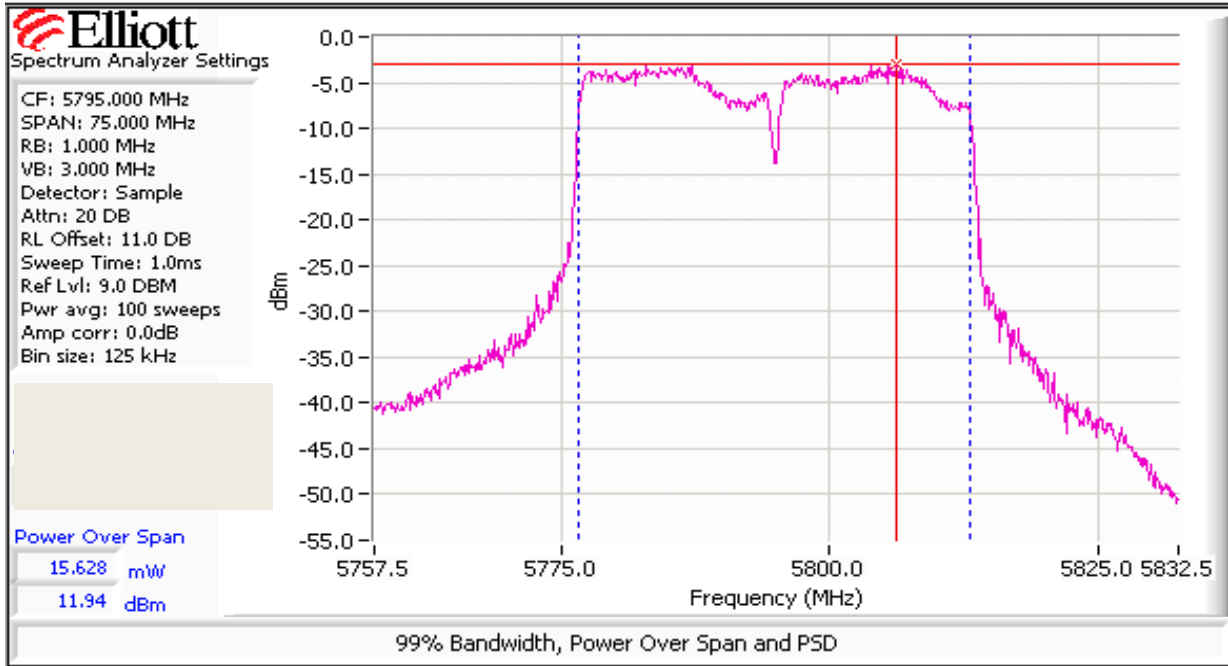

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

XR2000 -

Run #1: Output Power - Chain A + B + C

Operating Mode: 802.11a


Transmitted signal on chain is coherent ? Yes

5745 MHz	Chain 1	Chain 2	Chain 3	Chain 4	Total Across All Chains		Limit	
Power Setting ^{Note 3}	32.0	32.0	32.0					
Output Power (dBm) ^{Note 1}	12.2	12.8	12.6		17.3 dBm	0.054 W	27.2 dBm	0.528 W
Antenna Gain (dBi) ^{Note 2}	4.0	4.0	4.0		8.8 dBi		Pass	
eirp (dBm) ^{Note 2}	16.2	16.82	16.64		26.1 dBm	0.408 W		

5785 MHz	Chain 1	Chain 2	Chain 3	Chain 4	Total Across All Chains		Limit	
Power Setting ^{Note 3}	34.0	34.0	34.0					
Output Power (dBm) ^{Note 1}	13.0	13.6	12.8		17.9 dBm	0.062 W	27.2 dBm	0.528 W
Antenna Gain (dBi) ^{Note 2}	4.0	4.0	4.0		8.8 dBi		Pass	
eirp (dBm) ^{Note 2}	17.03	17.62	16.8		26.7 dBm	0.468 W		

Note 1:	Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc.
Note 2:	As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain
Note 3:	Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2.

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

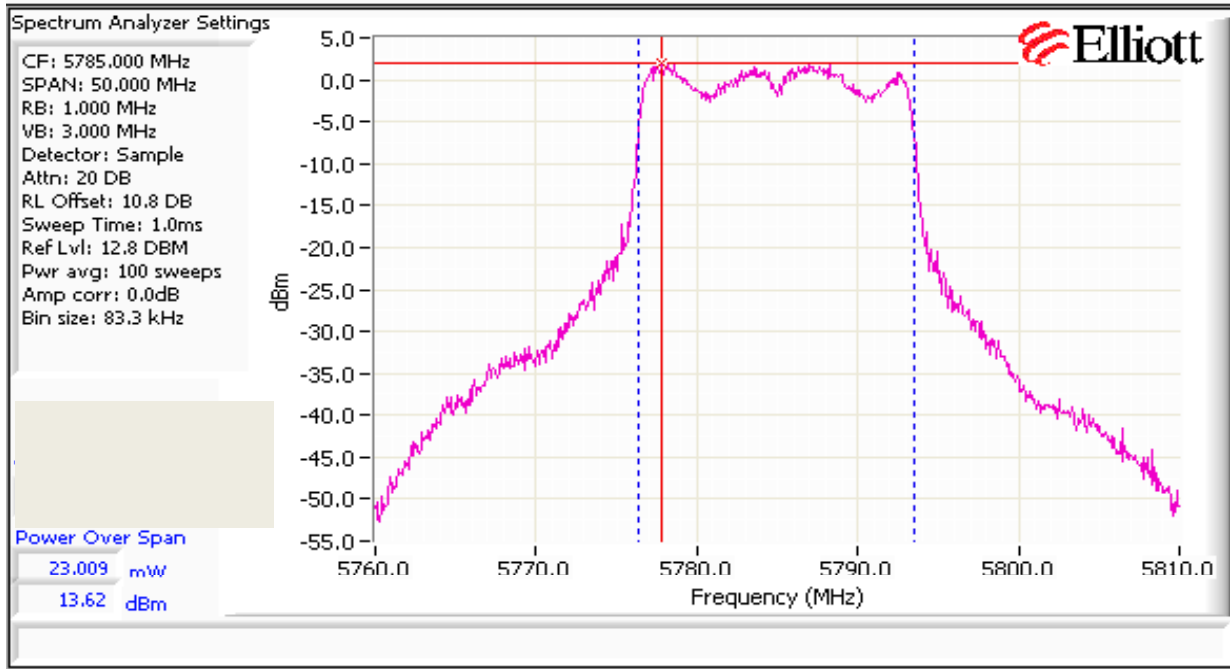

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A


Operating Mode: 802.11n20
Transmitted signal on chain is coherent ? Yes

5745 MHz	Chain 1	Chain 2	Chain 3	Chain 4	Total Across All Chains		Limit	
Power Setting ^{Note 3}	33.0	33.0	33.0					
Output Power (dBm) ^{Note 1}	12.3	13.6	12.9		17.7 dBm	0.059 W	27.2 dBm	0.528 W
Antenna Gain (dBi) ^{Note 2}	4.0	4.0	4.0		8.8 dBi		Pass	
eirp (dBm) ^{Note 2}	16.3	17.6	16.9		26.5 dBm	0.448 W		

5785 MHz	Chain 1	Chain 2	Chain 3	Chain 4	Total Across All Chains		Limit	
Power Setting ^{Note 3}	31.0	31.0	31.0					
Output Power (dBm) ^{Note 1}	11.0	12.3	11.5		16.4 dBm	0.044 W	27.2 dBm	0.528 W
Antenna Gain (dBi) ^{Note 2}	4.0	4.0	4.0		8.8 dBi		Pass	
eirp (dBm) ^{Note 2}	15	16.31	15.5		25.2 dBm	0.330 W		

- Note 1: Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 50 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc.
- Note 2: As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain
- Note 3: Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2.

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

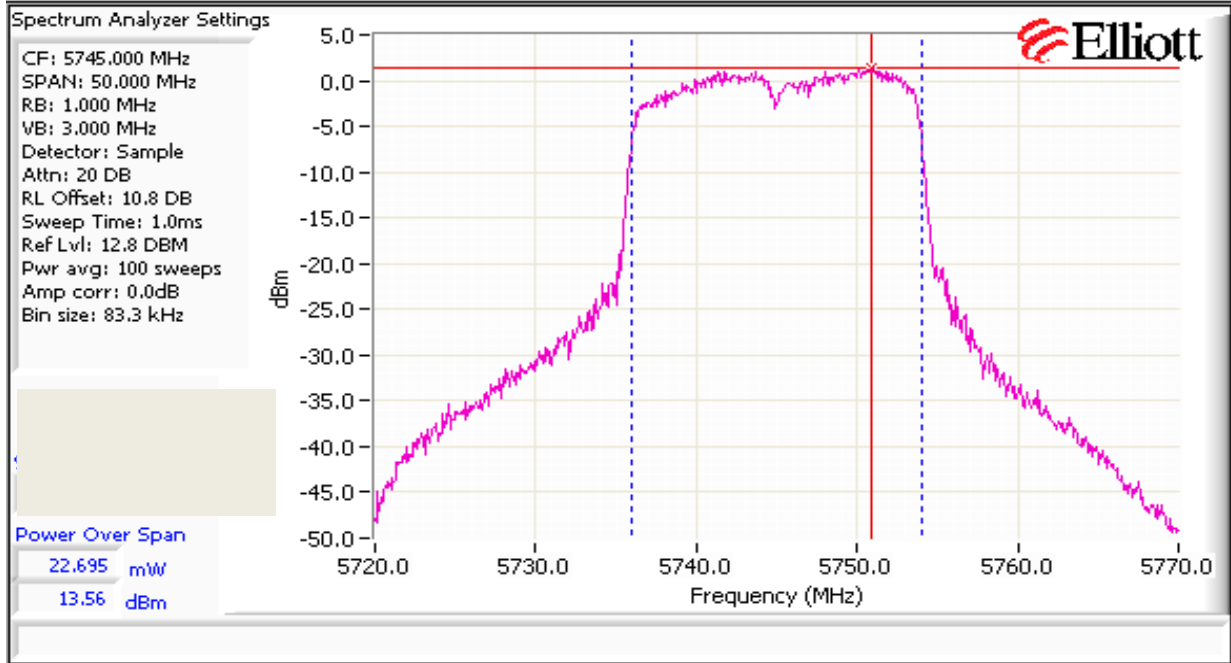

Client:	Xirrus	Job Number:	J86254
Model:	XI-N450 (3x3 radio module) in XR1000	T-Log Number:	T86382
Contact:	Steve Smith	Account Manager:	Michelle Kim
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A


Operating Mode: 802.11n40
 Transmitted signal on chain is coherent ? Yes

5755 MHz	Chain 1	Chain 2	Chain 3	Chain 4	Total Across All Chains		Limit	
Power Setting ^{Note 3}	29.0	29.0	29.0					
Output Power (dBm) ^{Note 1}	9.3	10.6	10.1		14.8 dBm	0.030 W	27.2 dBm	0.528 W
Antenna Gain (dBi) ^{Note 2}	4.0	4.0	4.0		8.8 dBi		Pass	
eirp (dBm) ^{Note 2}	13.3	14.6	14.1		23.6 dBm	0.228 W		

5795 MHz	Chain 1	Chain 2	Chain 3	Chain 4	Total Across All Chains		Limit	
Power Setting ^{Note 3}	32.0	32.0	32.0					
Output Power (dBm) ^{Note 1}	10.9	12.4	10.8		16.2 dBm	0.042 W	27.2 dBm	0.528 W
Antenna Gain (dBi) ^{Note 2}	4.0	4.0	4.0		8.8 dBi		Pass	
eirp (dBm) ^{Note 2}	14.94	16.43	14.84		25.0 dBm	0.317 W		

- Note 1: Output power measured using a spectrum analyzer (see plots below) with RBW=1MHz, VB=3 MHz, sample detector, power averaging on (transmitted signal was continuous) and power integration over 75 MHz (option #2, method 1 in KDB 558074, equivalent to method 1 of DA-02-2138A1 for U-NII devices). Spurious limit becomes -30dBc.
- Note 2: As there is coherency between chains the effective antenna gain is the sum of the individual antenna gains and the eirp is the product of the total power and the effective antenna gain
- Note 3: Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2.

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

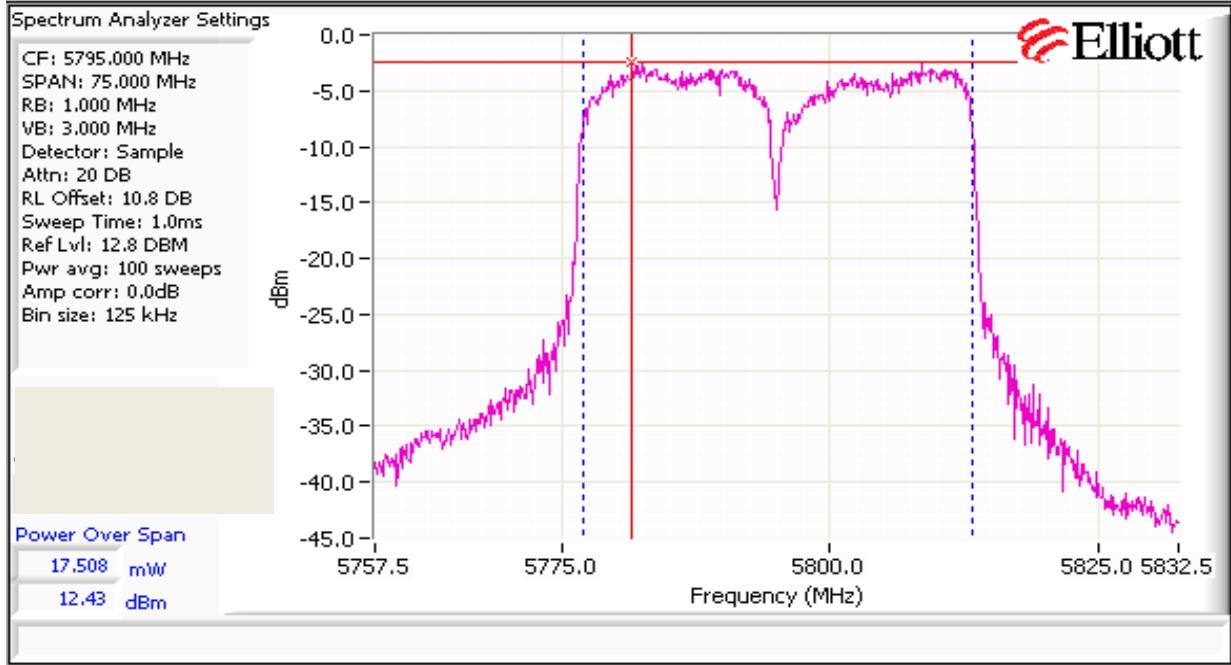

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

**RSS-210 (LELAN) and FCC 15.407(UNII)
Antenna Port Measurements
Power**

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 3/27/2012
Test Engineer: Rafael Varelas
Test Location: FT Lab #4

Config. Used: 1
Config Change: None
EUT Voltage: POE

Run #1: Bandwidth, Output Power and Power Spectral Density - MIMO Systems

Note 1:	Output power measured using a spectrum analyzer (see plots below). RBW=1MHz, VB=3 MHz, # of points in sweep $\geq 2 \times \text{span/RBW}$, sample detector, power averaging on (transmitted signal was continuous) and power integration over 50MHz for 802.11a, 802.11n 20MHz and 75MHz for 802.11n 40 MHz (method SA-1 of KDB 789033).
Note 5:	For MIMO systems the total output power and total PSD are calculated from the sum of the powers of the individual chains (in linear terms). The antenna gain used to determine the EIRP and limits for PSD/Output power depends on the operating mode of the MIMO device. If the signals on the non-coherent between the transmit chains then the gain used to determine the limits is the highest gain of the individual chains and the EIRP is the sum of the products of gain and power on each chain. If the signals are coherent then the effective antenna gain is the sum (in linear terms) of the gains for each chain and the EIRP is the product of the effective gain and total power.

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

XR 1000 -

MIMO Device - 5150-5250 MHz Band

	Chain 1	Chain 2	Chain 3	Coherent	Effective ⁵	EIRP (mW)	EIRP (dBm)
Antenna Gain (dBi):	4.0	4.0	4.0	Yes	8.8	47.3	16.7

Power


Frequency (MHz)	Software Setting	26dB BW (MHz)	Measured Output Power ¹ dBm			Total		Limit (dBm)	Max Power (W)	Pass or Fail
			Chain 1	Chain 2	Chain 3	mW	dBm			
802.11n 20MHz MIMO Mode										
5200	15.0	20.0	3.2	3.5	2.9	6.3	8.0	14.2	0.006	PASS

MIMO Device - 5470-5725 MHz Band

	Chain 1	Chain 2	Chain 3	Coherent	Effective ⁵	EIRP (mW)	EIRP (dBm)
Antenna Gain (dBi):	4.0	4.0	4.0	Yes	8.8	485.9	26.9

Power

Frequency (MHz)	Software Setting	26dB BW (MHz)	Measured Output Power ¹ dBm			Total		Limit (dBm)	Max Power (W)	Pass or Fail
			Chain 1	Chain 2	Chain 3	mW	dBm			
802.11a MIMO Mode										
5580	30.0	20.0	11.7	13.8	14.1	64.5	18.1	21.2	0.064	PASS

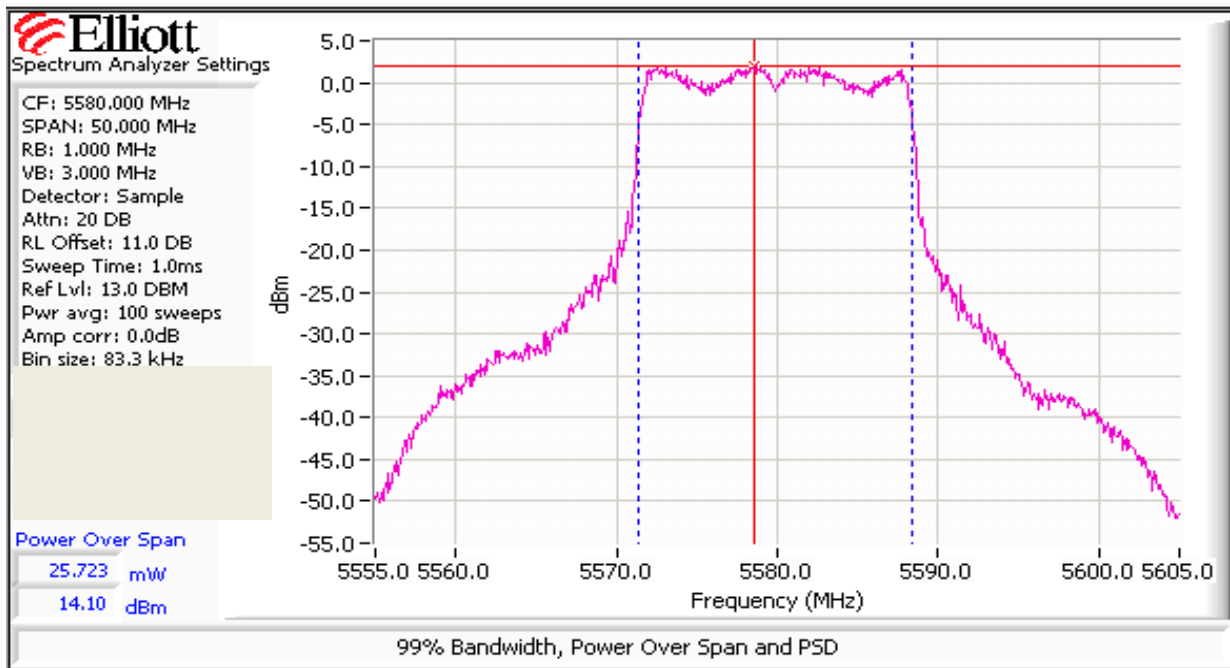

Client: Xirrus	Job Number: J86254
Model: XI-N450 (3x3 radio module) in XR1000	T-Log Number: T86382
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A


XR 2000 -

MIMO Device - 5250-5350 MHz Band

	Chain 1	Chain 2	Chain 3	Coherent	Effective ⁵	EIRP (mW)	EIRP (dBm)
Antenna Gain (dBi):	4.0	4.0	4.0	Yes	8.8	302.6	24.8

Power

Frequency (MHz)	Software Setting	26dB BW (MHz)	Measured Output Power ¹ dBm			Total		Limit (dBm)	Max Power (W)	Pass or Fail
			Chain 1	Chain 2	Chain 3	mW	dBm			
802.11n 20MHz MIMO Mode										
5300	32.0	20.0	11.2	11.3	11.3	40.2	16.0	21.2	0.040	PASS

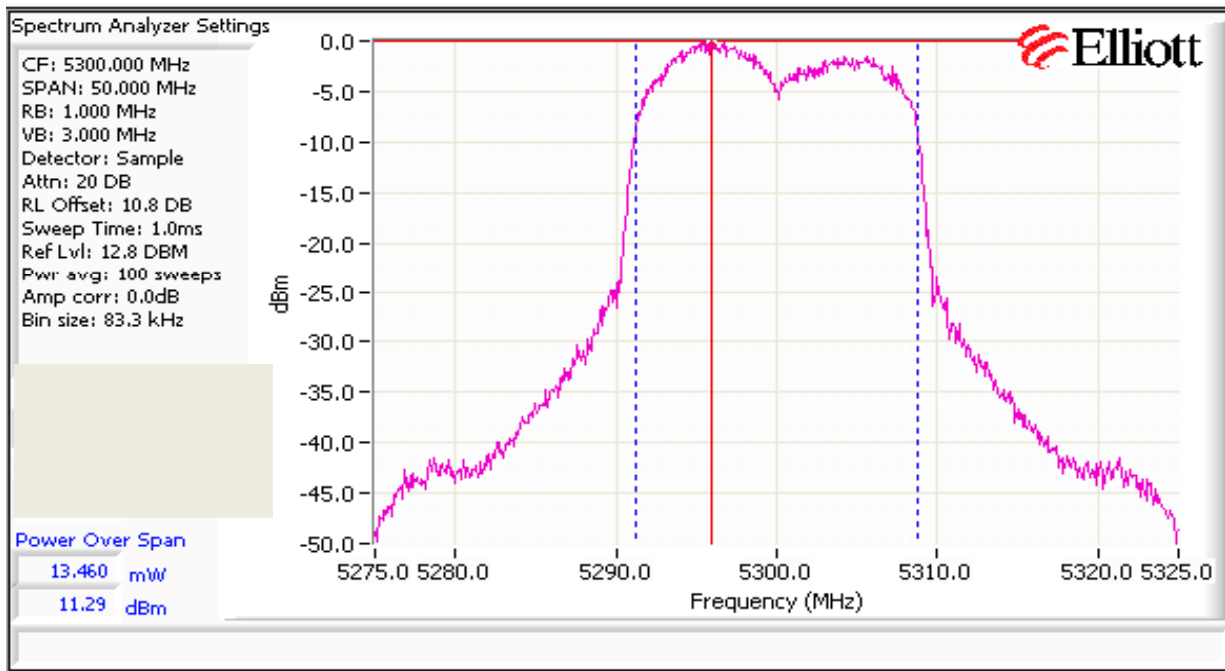

Client:	Xirrus	Job Number:	J86256
Model:	XI-N300 (2x2 radio module) in XR2000	T-Log Number:	T86500
		Account Manager:	Michelle Kim
Contact:	Steve Smith		-
Emissions Standard(s):	FCC 15.247/15.E/RSS-210	Class:	-
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Xirrus

Model

XI-N300 (2x2 radio module) in XR2000

Date of Last Test: 5/24/2012

Client:	Xirrus	Job Number:	J86256
Model:	XI-N300 (2x2 radio module) in XR2000	T-Log Number:	T86500
		Account Manager:	Michelle Kim
Contact:	Steve Smith		
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

**RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions
2x2 and 3x3 Modules - 802.11b, 802.11g, HT20 Modes**

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Xirrus	Job Number: J86256
Model: XI-N300 (2x2 radio module) in XR2000	T-Log Number: T86500
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1	802.11b / 802.11g	See Below	See Below Lowered Power		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	53.6 dBµV/m @ 4824.0 MHz (-0.4 dB)
2	802.11b / 802.11g	See Below	See Below Lowered Power		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	53.3 dBµV/m @ 4924.0 MHz (-0.7 dB)
3	802.11b / 802.11g	See Below	See Below Lowered Power		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	53.0 dBµV/m @ 4874.0 MHz (-1.0 dB)
4	802.11HT20	See Below	See Below		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	53.0dBµV/m @ 1239.9MHz (-1.0dB)
5	802.11HT20	See Below	See Below		Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	52.3dBµV/m @ 1240.0MHz (-1.7dB)

Client:	Xirrus	Job Number:	J86256
Model:	XI-N300 (2x2 radio module) in XR2000	T-Log Number:	T86500
Contact:	Steve Smith	Account Manager:	Michelle Kim
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A


System Configuration:

Radio #	Frequency	Module	Mode	Setting	Radio #	Frequency	Module	Mode	Setting
Run: 1					Run: 2				
1 (# 2)	2412	2x2	802.11b	33 (38)	1 (#2)	2462	2x2	802.11b	33 (40)
0 (# 10)	2462	3x3	802.11b	38.0	0 (#10)	2412	3x3	802.11b	34 (37)
2 (#6)	2412	2x2	802.11g	28.0	2 (#6)	2462	2x2	802.11g	24.0
3 (#14)	2462	3x3	802.11g	32.0	3 (#14)	2412	3x3	802.11g	28.0
Run: 3									
1 (# 2)	2437	2x2	802.11b	31(40)					
0 (# 10)	2437	3x3	802.11b	40.0					
2 (#6)	2437	2x2	802.11g	35.0					
3 (#14)	2437	3x3	802.11g	39.0					
Run: 4					Setting				
1 (# 2)	2412	2x2	802.11HT20		26.0				
0 (# 10)	2462	3x3	802.11HT20		25.0				
2 (#6)	2462	2x2	802.11HT20		24.0				
3 (#14)	2412	3x3	802.11HT20		28.0				
Run: 5					Setting				
1 (# 2)	2437	2x2	802.11HT20		34.0				
0 (# 10)	2437	3x3	802.11HT20		35.0				
2 (#6)	2437	2x2	802.11HT20		34.0				
3 (#14)	2437	3x3	802.11HT20		35.0				


Notes - Multiple radios operating at the same time as shown above. In all cases, power set to the maximum worse case single channel power, transmitting on all chains.

Highlights indicate that power was lowered from the original level. Notation - XX (YY), XX = passing power setting, YY = power setting for original power levels.


Client: Xirrus	Job Number: J86256
Model: XI-N300 (2x2 radio module) in XR2000	T-Log Number: T86500
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

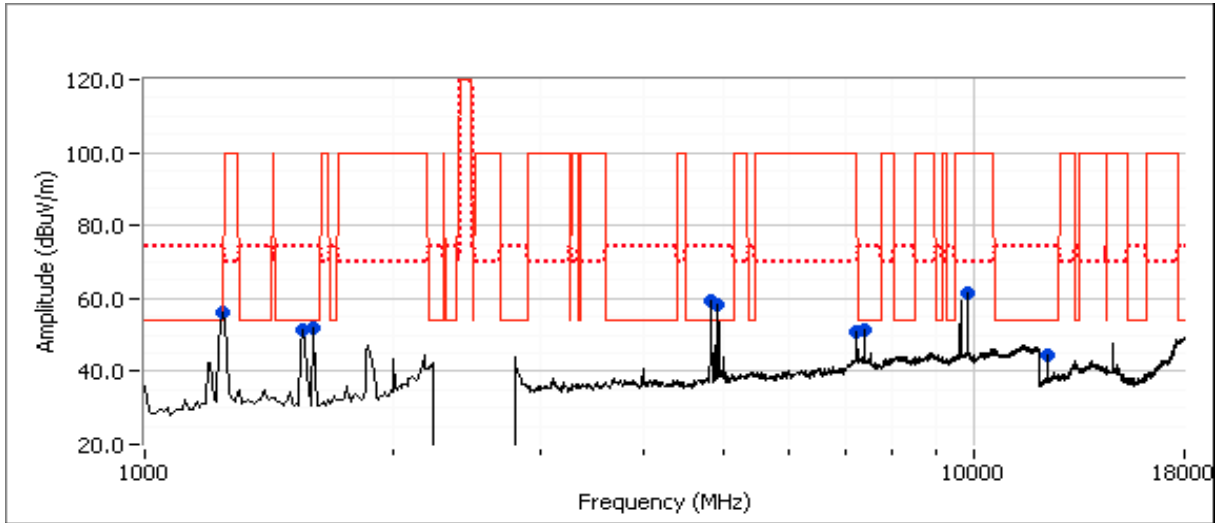

Client: Xirrus	Job Number: J86256
Model: XI-N300 (2x2 radio module) in XR2000	T-Log Number: T86500
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

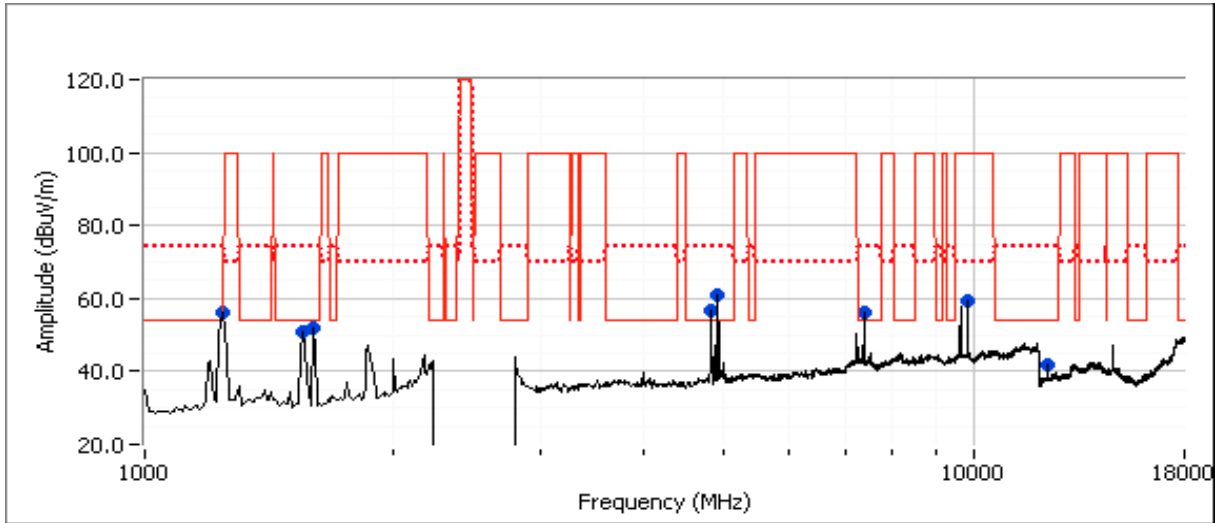

Client: Xirrus	Job Number: J86256
Model: XI-N300 (2x2 radio module) in XR2000	T-Log Number: T86500
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

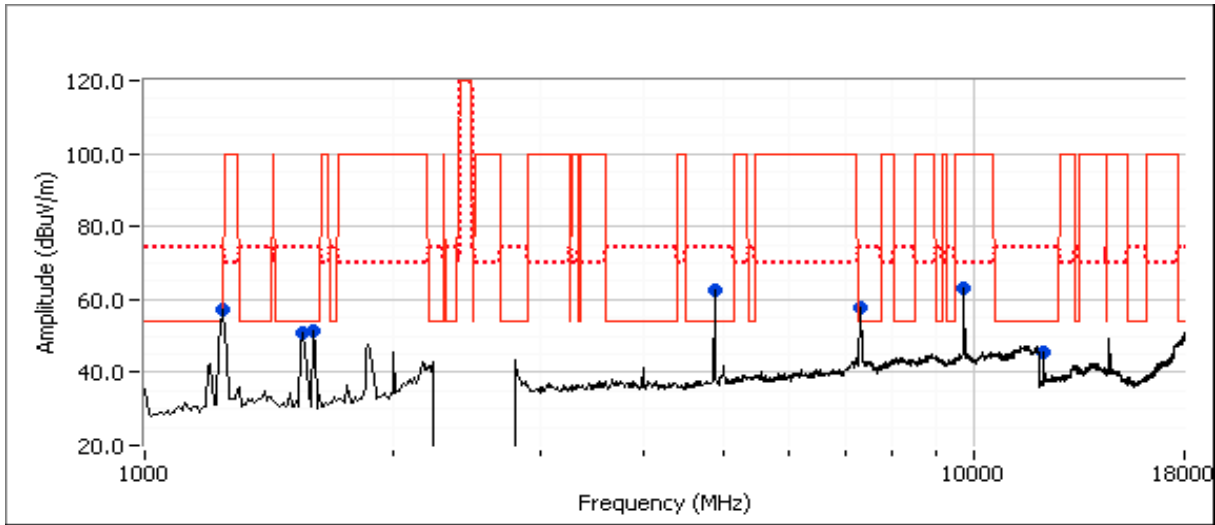

Client: Xirrus	Job Number: J86256
Model: XI-N300 (2x2 radio module) in XR2000	T-Log Number: T86500
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

**RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions
2x2 and 3x3 Modules - HT40 Mode**

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Xirrus	Job Number: J86256
Model: XI-N300 (2x2 radio module) in XR2000	T-Log Number: T86500
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1	802.11HT4 0	See Below	See Below	-	Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	48.4 dBµV/m @ 1240.0 MHz (-5.6 dB)
2	802.11HT4 0	See Below	See Below Lowered Power	-	Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	73.2 dBµV/m @ 7308.8 MHz (-0.8 dB)

System Configuration:

Radio #	Frequency	Module	Mode	Pwr setting
Run: 1				
1 (# 2)	2422	2x2	802.11HT40	28
0 (# 10)	2452	3x3	802.11HT40	21
2 (#6)	2452	2x2	802.11HT40	32
3 (#14)	2422	3x3	802.11HT40	19
Run: 2				
1 (# 2)	2437	2x2	802.11HT40	34 (36)
0 (# 10)	2437	3x3	802.11HT40	28
2 (#6)	2437	2x2	802.11HT40	34 (36)
3 (#14)	2437	3x3	802.11HT40	28

Notes - Multiple radios operating at the same time as shown above. In all cases, power set to the maximum worse case single channel power. transmitting on all chains.

Highlights indicate that power was lowered from the original level. Notation - XX (YY), XX = passing power setting, YY = power setting for original power levels.

Client: Xirrus	Job Number: J86256
Model: XI-N300 (2x2 radio module) in XR2000	T-Log Number: T86500
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #1: Radiated Spurious Emissions, 1-26.5GHz. 802.11HT40 - 2x2 and 3x3 modules.

Date of Test: 2/24/2012

Test Location: FT3


Test Engineer: Jack Liu

Other Spurious Emissions


Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
1240.000	48.4	H	54.0	-5.6	AVG	92	1.0	
7360.330	44.5	V	54.0	-9.5	AVG	261	1.3	
12254.600	43.8	V	54.0	-10.2	AVG	212	1.1	
1600.010	43.7	H	54.0	-10.3	AVG	37	1.4	
7367.200	59.7	V	74.0	-14.3	PK	261	1.3	
1238.880	57.9	H	74.0	-16.1	PK	92	1.0	
12273.470	55.3	V	74.0	-18.7	PK	212	1.1	
1599.930	45.8	H	74.0	-28.2	PK	37	1.4	

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.



Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

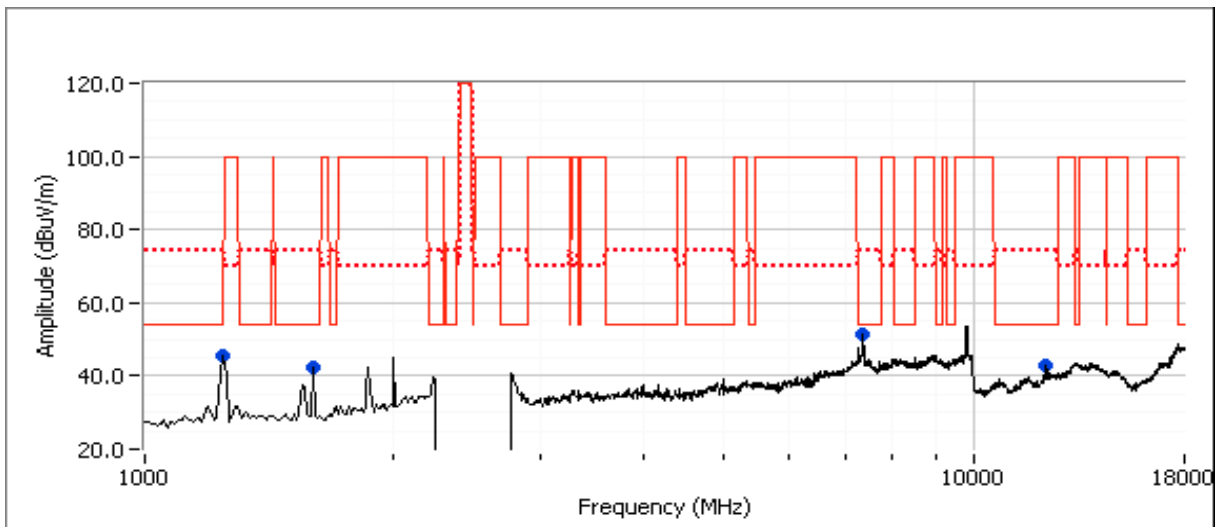

Client: Xirrus	Job Number: J86256
Model: XI-N300 (2x2 radio module) in XR2000	T-Log Number: T86500
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

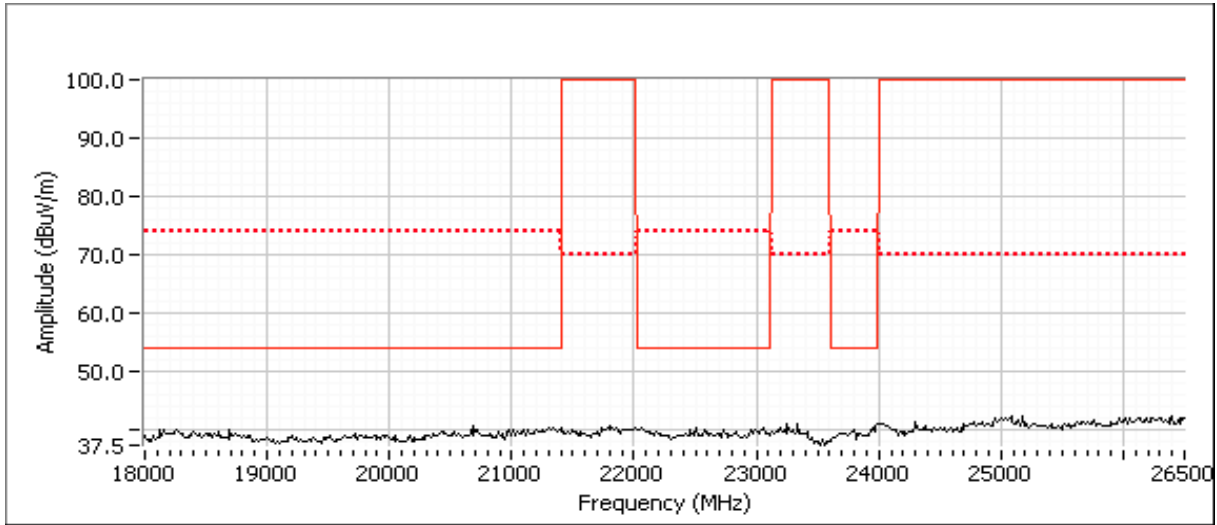

Client: Xirrus	Job Number: J86256
Model: XI-N300 (2x2 radio module) in XR2000	T-Log Number: T86500
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

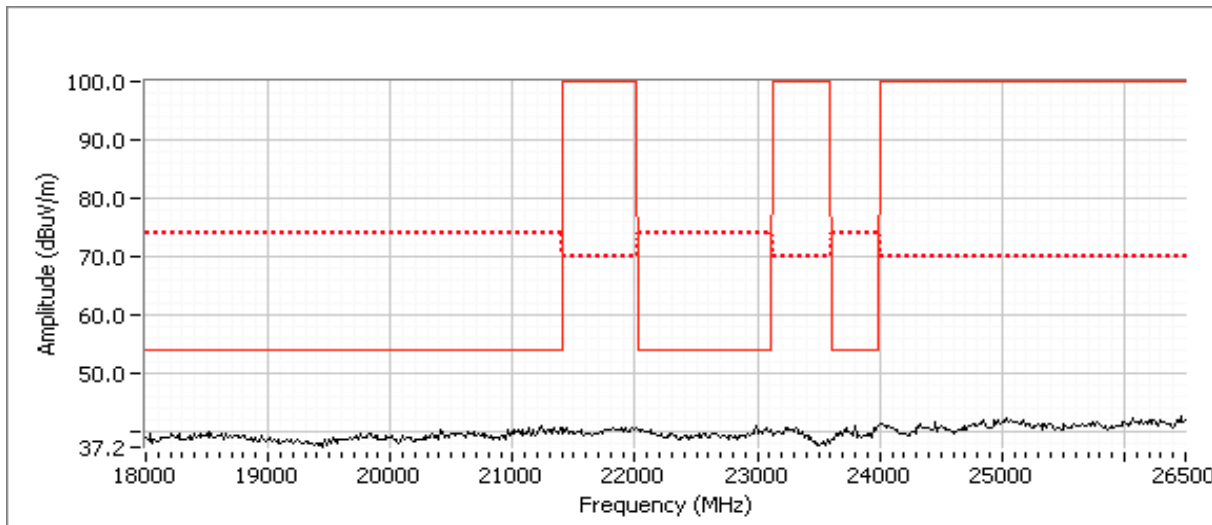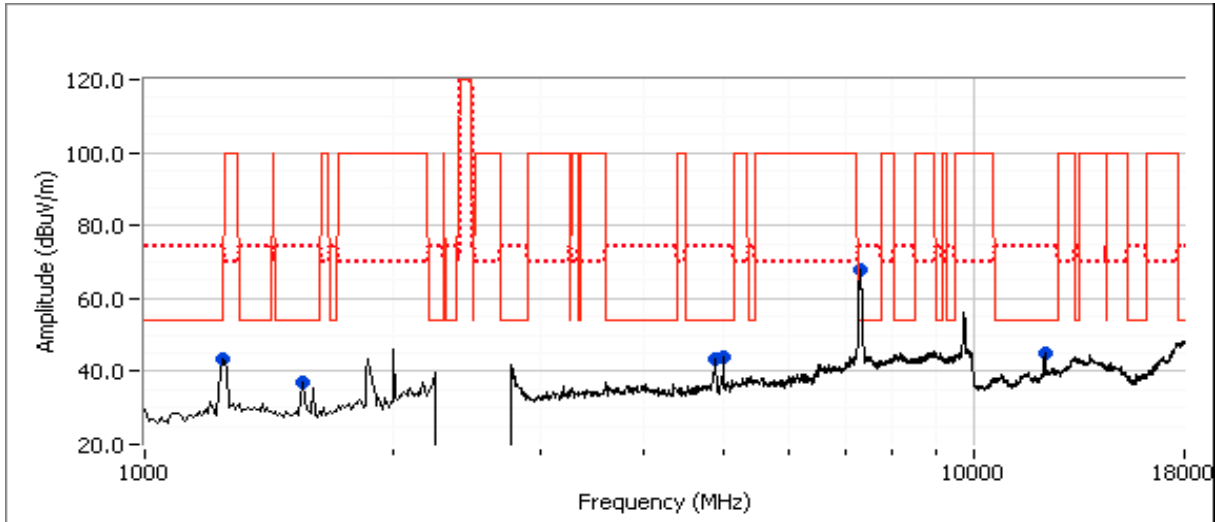

Client: Xirrus	Job Number: J86256
Model: XI-N300 (2x2 radio module) in XR2000	T-Log Number: T86500
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

**RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions
2x2 and 3x3 Modules - 802.11a, HT20, HT40 Modes**

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Xirrus	Job Number:	J86256
Model:	XI-N300 (2x2 radio module) in XR2000	T-Log Number:	T86500
Contact:	Steve Smith	Account Manager:	Michelle Kim
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1	802.11a	See Below	See Below Lowered Power	-	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	54.0 dB μ V/m @ 11491.5 MHz (0.0 dB)
2	802.11a	See Below	See Below Lowered Power	-	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	54.0 dB μ V/m @ 11571.7 MHz (0.0 dB)
3	802.11a	See Below	See Below Lowered Power	-	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	54.0 dB μ V/m @ 11493.4 MHz (0.0 dB)
5	802.11HT4 0	See Below	See Below	-	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	52.4 dB μ V/m @ 5440.0 MHz (-1.6 dB)

Client:	Xirrus	Job Number:	J86256
Model:	XI-N300 (2x2 radio module) in XR2000	T-Log Number:	T86500
		Account Manager:	Michelle Kim
Contact:	Steve Smith		
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

System Configuration:

Radio #	Frequency	Module	Mode	Pwr setting	CH Number
Run: 1					
1 (# 2)	5745	2x2	802.11a	31 (35)	149
0 (# 10)	5825	3x3	802.11a	36	165
2 (#6)	5825	2x2	802.11a	34 (36)	165
3 (#14)	5745	3x3	802.11a	32 (36)	149
Run: 2					
1 (# 2)	5785	2x2	802.11a	32 (36)	157
0 (# 10)	5785	3x3	802.11a	34 (36)	157
2 (#6)	5785	2x2	802.11n20	34	157
3 (#14)	5785	3x3	802.11n20	31 (36)	157
Run: 3					
1 (# 2)	5745	2x2	802.11n20	30	149
0 (# 10)	5825	3x3	802.11n20	36	165
2 (#6)	5825	2x2	802.11n20	34	165
3 (#14)	5745	3x3	802.11n20	33 (34)	149
Run: 5					
1 (# 2)	5755	2x2	802.11n40	32	
0 (# 10)	5795	3x3	802.11n40	32	
2 (#6)	5795	2x2	802.11n40	33	
3 (#14)	5755	3x3	802.11n40	32	

Notes - Multiple radios operating at the same time as shown above. In all cases, power set to the maximum worse case single channel power, transmitting on all chains.

Testing below is based on preliminary testing that identified the emissions of interest.

Highlights indicate that power was lowered from the original level. Notation - XX (YY), XX = passing power setting, YY = power setting for original power levels.

Client: Xirrus	Job Number: J86256
Model: XI-N300 (2x2 radio module) in XR2000	T-Log Number: T86500
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A


Run #1: Radiated Spurious Emissions, 1-40 GHz. 802.11a - 2x2 and 3x3 modules.

Date of Test: 3/8/2012
Test Engineer: John Caizzi

Test Location: Chamber #3

Other Spurious Emissions

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
11491.530	54.0	V	54.0	0.0	AVG	152	1.33	Radio #2 only, setting = 31
11492.470	65.2	V	74.0	-8.8	PK	152	1.33	Radio #2 only, setting = 31
11492.000	53.1	V	54.0	-0.9	AVG	353	1.22	Radio #14 only, setting = 32
11491.730	64.0	V	74.0	-10.0	PK	353	1.22	Radio #14 only, setting = 32
11650.800	53.6	V	54.0	-0.4	AVG	289	1.31	Radio #6 only, setting = 34
11650.000	65.4	V	74.0	-8.6	PK	289	1.31	Radio #6 only, setting = 34
11650.530	49.5	V	54.0	-4.5	AVG	113	1.31	Radio #10 only, setting = 36
11649.930	60.8	V	74.0	-13.2	PK	113	1.31	Radio #10 only, setting = 36

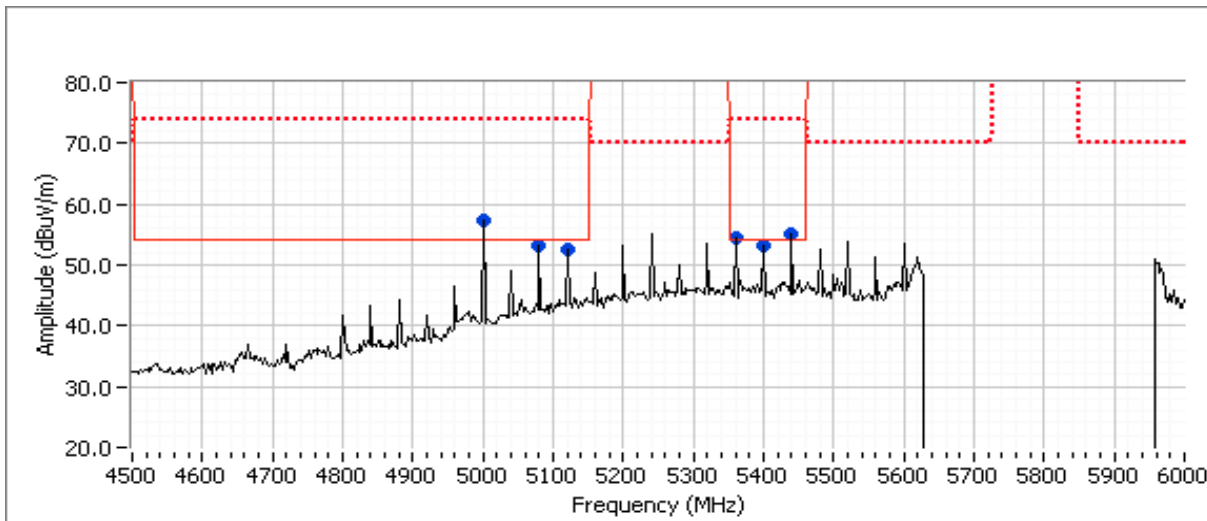



EMC Test Data

Client:	Xirrus	Job Number:	J86256
Model:	XI-N300 (2x2 radio module) in XR2000	T-Log Number:	T86500
		Account Manager:	Michelle Kim
Contact:	Steve Smith		
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

Run #2: Radiated Spurious Emissions, 1-40 GHz. 802.11a & 802.11HT20 - 2x2 and 3x3 modules.

Date of Test: 3/8/2012

Test Location: Chamber 3

Test Engineer: John Caizzi

Other Spurious Emissions

Frequency MHz	Level dBμV/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
11570.070	53.9	V	54.0	-0.1	AVG	26	1.06	
11570.470	65.3	V	74.0	-8.7	PK	26	1.06	
11571.730	54.0	V	54.0	0.0	AVG	326	1.10	
11572.530	66.1	V	74.0	-7.9	PK	326	1.10	
11570.530	53.3	V	54.0	-0.7	AVG	202	1.16	
11572.730	64.7	V	74.0	-9.3	PK	202	1.16	
11570.270	50.9	V	54.0	-3.1	AVG	113	1.21	
11570.330	62.1	V	74.0	-11.9	PK	113	1.21	
5400.070	53.6	V	54.0	-0.4	AVG	260	1.20	
5400.320	61.5	V	74.0	-12.5	PK	260	1.20	
5435.280	46.0	V	54.0	-8.0	AVG	160	1.06	
5437.700	58.1	V	74.0	-15.9	PK	160	1.06	
5359.970	51.0	V	54.0	-3.0	AVG	255	1.07	
5360.200	60.8	V	74.0	-13.2	PK	255	1.07	
5120.050	49.9	V	54.0	-4.1	AVG	178	1.13	
5119.970	57.7	V	74.0	-16.3	PK	178	1.13	
5080.000	50.3	V	54.0	-3.7	AVG	266	1.02	
5079.720	58.3	V	74.0	-15.7	PK	266	1.02	
5440.020	50.4	V	54.0	-3.6	AVG	283	1.45	
5439.880	57.6	V	74.0	-16.4	PK	283	1.45	
5440.030	53.7	V	54.0	-0.3	AVG	71	1.03	
5440.230	59.4	V	74.0	-14.6	PK	71	1.03	
5440.000	51.2	V	54.0	-2.8	AVG	360	1.44	
5440.320	58.2	V	74.0	-15.8	PK	360	1.44	

Client:	Xirrus	Job Number:	J86256
Model:	XI-N300 (2x2 radio module) in XR2000	T-Log Number:	T86500
		Account Manager:	Michelle Kim
Contact:	Steve Smith		
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

Run #3: Radiated Spurious Emissions, 1-40 GHz. 802.11HT20 - 2x2 and 3x3 modules.

Date of Test: 3/8/2012 & 3/9/12
 Test Engineer: John Caizzi

Test Location: FT3

Other Spurious Emissions

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5080.000	48.3	V	54.0	-5.7	AVG	73	1.01	
5080.020	55.3	V	74.0	-18.7	PK	73	1.01	
5119.980	49.8	V	54.0	-4.2	AVG	179	1.00	
5119.980	56.9	V	74.0	-17.1	PK	179	1.00	
5360.180	50.3	V	54.0	-3.7	AVG	260	1.32	
5360.080	58.0	V	74.0	-16.0	PK	260	1.32	
5400.050	49.7	V	54.0	-4.3	AVG	107	1.45	
5399.870	56.7	V	74.0	-17.3	PK	107	1.45	
5399.920	47.2	V	54.0	-6.8	AVG	307	1.52	
5399.950	52.4	V	74.0	-21.6	PK	307	1.52	
5399.980	44.5	V	54.0	-9.5	AVG	239	1.25	
5400.020	50.9	V	74.0	-23.1	PK	239	1.25	
5400.020	44.2	V	54.0	-9.8	AVG	51	1.00	
5400.200	51.7	V	74.0	-22.3	PK	51	1.00	
5440.020	53.1	V	54.0	-0.9	AVG	184	1.31	
5440.150	59.1	V	74.0	-14.9	PK	184	1.31	
5436.400	39.0	V	54.0	-15.0	AVG	291	1.00	
5439.820	50.0	V	74.0	-24.0	PK	291	1.00	
5439.950	44.0	V	54.0	-10.0	AVG	55	1.25	
5439.770	50.8	V	74.0	-23.2	PK	55	1.25	
11493.400	54.0	V	54.0	0.0	AVG	355	1.17	
11492.870	65.6	V	74.0	-8.4	PK	355	1.17	
11493.070	44.5	V	54.0	-9.5	AVG	311	1.01	
11490.930	56.5	V	74.0	-17.5	PK	311	1.01	
11655.270	53.9	V	54.0	-0.1	AVG	56	1.16	
11653.000	65.8	V	74.0	-8.2	PK	56	1.16	



EMC Test Data

Client:	Xirrus	Job Number:	J86256
Model:	XI-N300 (2x2 radio module) in XR2000	T-Log Number:	T86500
Contact:	Steve Smith	Account Manager:	Michelle Kim
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

Run #5: Radiated Spurious Emissions, 1-40 GHz. 802.11HT40 - 2x2 and 3x3 modules.

Date of Test: 3/8/2012 & 3/9/12
 Test Engineer: John Caizzi

Test Location: FT3

Other Spurious Emissions

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5080.030	46.4	V	54.0	-7.6	AVG	82	1.01	
5079.850	55.2	V	74.0	-18.8	PK	82	1.01	
5120.030	48.1	V	54.0	-5.9	AVG	360	1.01	
5119.980	56.9	V	74.0	-17.1	PK	360	1.01	
5359.820	49.1	V	54.0	-4.9	AVG	76	1.06	
5359.970	58.1	V	74.0	-15.9	PK	76	1.06	
5400.080	50.6	V	54.0	-3.4	AVG	71	1.07	
5399.950	58.4	V	74.0	-15.6	PK	71	1.07	
5399.980	44.9	V	54.0	-9.1	AVG	242	1.00	
5399.970	51.0	V	74.0	-23.0	PK	242	1.00	
5440.020	52.4	V	54.0	-1.6	AVG	173	1.05	
5440.550	59.4	V	74.0	-14.6	PK	173	1.05	
5404.750	42.3	V	54.0	-11.7	AVG	290	1.00	
5402.480	53.6	V	74.0	-20.4	PK	290	1.00	
11515.000	52.4	V	54.0	-1.6	AVG	265	1.01	
11516.400	63.6	V	74.0	-10.4	PK	265	1.01	
11593.470	48.2	V	54.0	-5.8	AVG	79	1.55	
11593.530	60.4	V	74.0	-13.6	PK	79	1.55	

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.
Note 3:	No significant emissions were observed for 18-40GHz

Client:	Xirrus	Job Number:	J86256
Model:	XI-N450 (3x3 radio module) in XR2000	T-Log Number:	T86501
Contact:	Steve Smith	Account Manager:	Michelle Kim
Emissions Standard(s):	FCC 15.247/15.E/RSS-210	Class:	-
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Xirrus

Model

XI-N450 (3x3 radio module) in XR2000

Date of Last Test: 5/24/2012

Client: Xirrus	Job Number: J86256
Model: XI-N450 (3x3 radio module) in XR2000	T-Log Number: T86501
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

**RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions
802.11bg, HT20 Band Edge and Spurious, HT40 Band Edge**

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 2/21/2012

Test Location: FT7

Test Engineer: Jack Liu

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C

Rel. Humidity: 30-40 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Power Setting		Test Performed	Limit	Result / Margin
1a Low	HT20	2412 MHz	28.0	-	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	54.0 V/m @ 2390.0 MHz (0.0 dB)
1b High		2462 MHz	25.0	-	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	53.9 V/m @ 2483.5 MHz (-0.1 dB)

Testing was performed on the worse case mode from the original filing.

Power was set to be within 0.5dB of the original filing power.



Client: Xirrus	Job Number: J86256
Model: XI-N450 (3x3 radio module) in XR2000	T-Log Number: T86501
Contact: Steve Smith	Account Manager: Michelle Kim
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #1: Radiated Spurious Emissions, 30 - 26500 MHz. Operating Mode: 802.11n 20 MHz, 3x3

Run #1a: Channel 1@ 2412 MHz, Radio #10

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	54.0	V	54.0	0.0	AVG	160	1.0	
2389.680	67.5	V	74.0	-6.5	PK	160	1.0	
2390.000	51.4	H	54.0	-2.6	AVG	146	1.0	
2324.910	62.3	H	74.0	-11.7	PK	146	1.0	

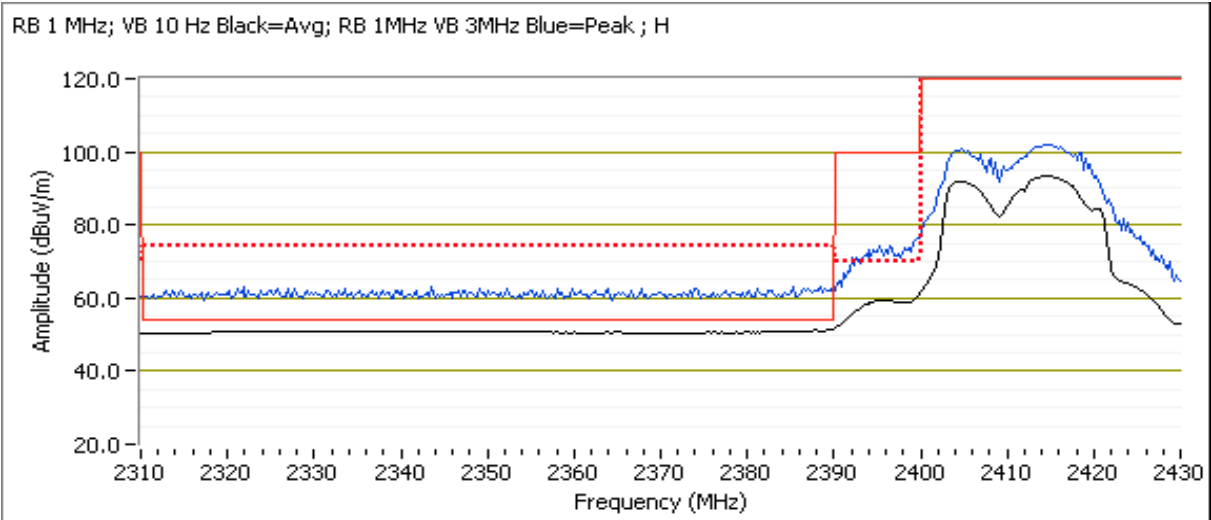
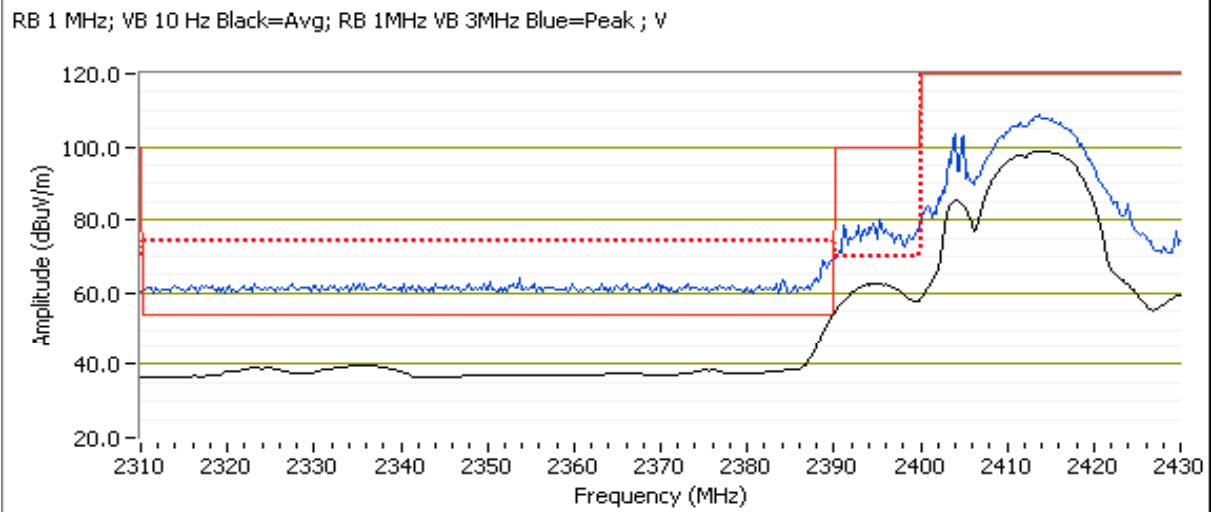


Client: Xirrus	Job Number: J86256
Model: XI-N450 (3x3 radio module) in XR2000	T-Log Number: T86501
Contact: Steve Smith	Account Manager: Michelle Kim
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #1b: High Channel @ 2462 MHz, Radio #10

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
2483.500	53.9	V	54.0	-0.1	AVG	163	1.2	
2484.360	66.7	V	74.0	-7.3	PK	163	1.2	
2483.500	52.6	H	54.0	-1.4	AVG	140	1.0	
2483.500	63.3	H	74.0	-10.7	PK	140	1.0	

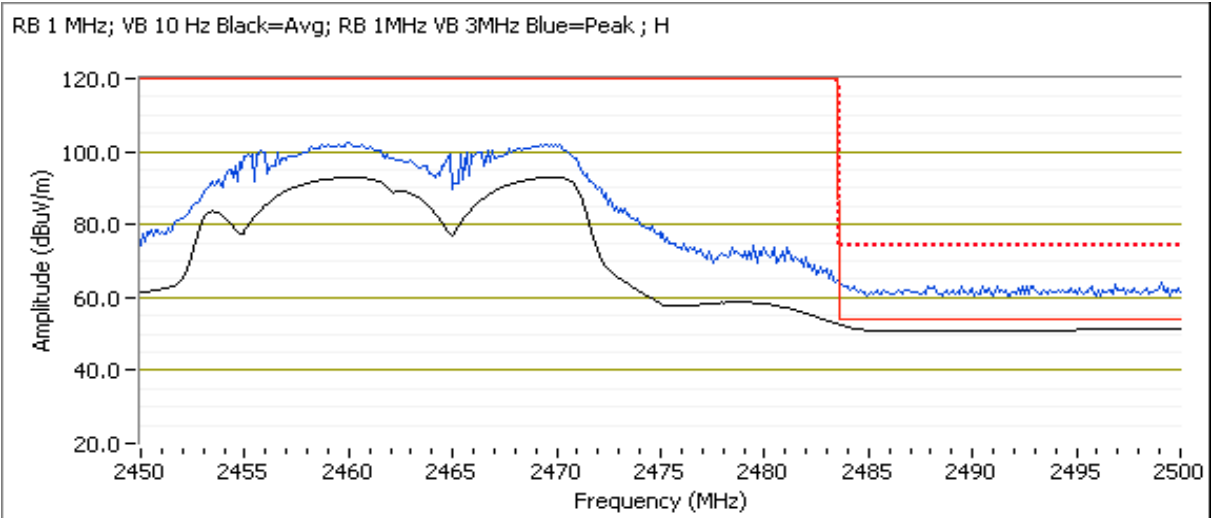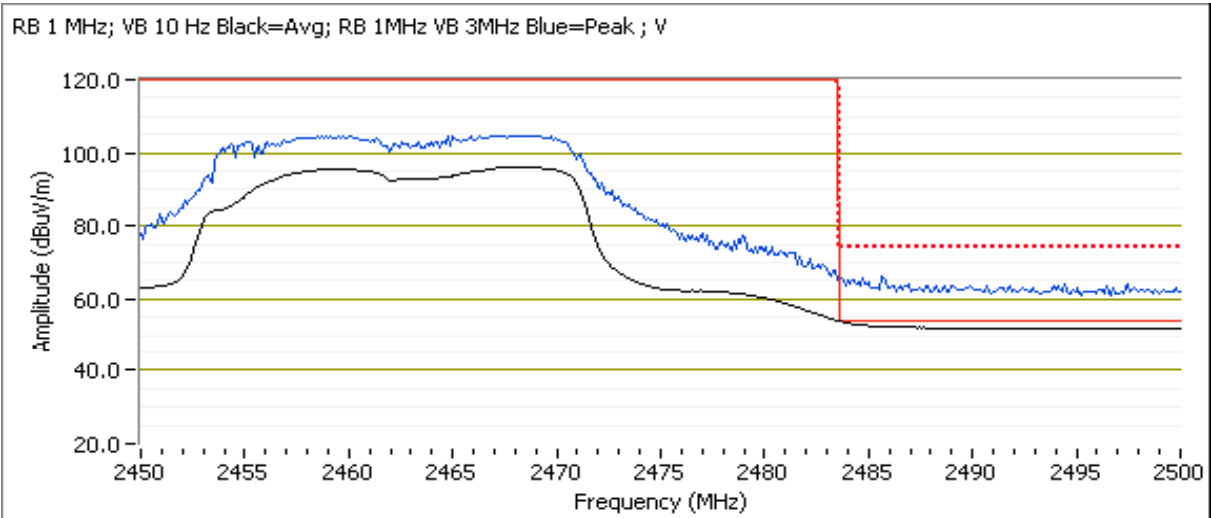

Client:	Xirrus	Job Number:	J86256
Model:	XI-N450 (3x3 radio module) in XR2000	T-Log Number:	T86501
		Account Manager:	Michelle Kim
Contact:	Steve Smith		
Standard:	FCC 15.247/15.E/RSS-210	Class:	N/A

RSS 210 and FCC 15.407 (UNII) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. All remote support equipment was located approximately 30 meters from the EUT.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 20-25 °C
Rel. Humidity: 30-40 %

Summary of Results

Run #	Mode	Channel	Power Setting		Test Performed	Limit	Result / Margin
1	HT20 Chain 012	5150-5250 #36 (low)	9.5		Restricted Band Edge at 5150 MHz	15.209	45.7 dBµV/m @ 5149.8 MHz (-8.3 dB)
		5150-5250 #40	9.5		Restricted Band Edge at 5150 MHz		44.0 dBµV/m @ 5132.7 MHz (-10.0 dB)
2	HT20 Chain 012	5250-5350 #64 (High)	10.5		Restricted Band Edge at 5350 MHz	15.209	46.5 dBµV/m @ 5359.9 MHz (-7.5 dB)
		5150-5250 #60	16.5		Restricted Band Edge at 5350 MHz		46.9 dBµV/m @ 5360.0 MHz (-7.1 dB)
3	HT20 Chain 012	5470-5725 #100 Low	15.0		Restricted Band Edge at 5460 MHz	15.209	49.5 dBµV/m @ 5440.0 MHz (-4.5 dB)

Testing was performed on the worse case mode from the original filing.
Power was set to be within 0.5dB of the original filing power.

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Xirrus	Job Number: J86256
Model: XI-N450 (3x3 radio module) in XR2000	T-Log Number: T86501
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #1, Radiated Spurious Emissions at Band Edges. Operation in the 5150-5250 MHz Band


Date of Test: 2/22/2012
 Test Engineer: Peter Sales
 Test Location: FT Chamber #7

Run #1a: Low Channel, 5180 MHz

5150 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 15.209		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments	Chains
			Limit	Margin					
5149.800	45.7	V	54.0	-8.3	AVG	222	1.21	RB 1 MHz;VB 10 Hz;Pk	
5149.830	59.7	V	74.0	-14.3	PK	222	1.21	RB 1 MHz;VB 3 MHz;Pk	
5148.970	43.1	H	54.0	-10.9	AVG	206	1.16	RB 1 MHz;VB 10 Hz;Pk	
5147.200	56.1	H	74.0	-17.9	PK	206	1.16	RB 1 MHz;VB 3 MHz;Pk	

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace) Vertical

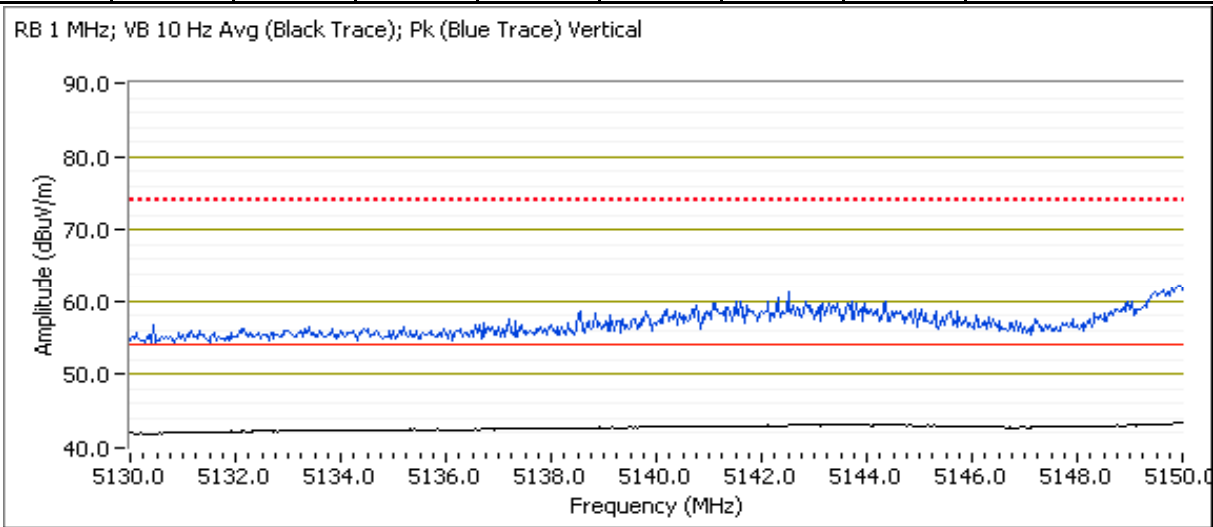


Client: Xirrus	Job Number: J86256
Model: XI-N450 (3x3 radio module) in XR2000	T-Log Number: T86501
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #1b: Channel 40, 5200 MHz
 Date of Test: 2/22/2012
 Test Engineer: Peter Sales
 Test Location: FT Chamber #7

5150 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 15.209		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments	Chains
			Limit	Margin					
5132.670	44.0	V	54.0	-10.0	AVG	214	1.0	RB 1 MHz;VB 10 Hz;Pk	
5132.400	42.2	H	54.0	-11.8	AVG	252	1.0	RB 1 MHz;VB 10 Hz;Pk	
5134.170	55.0	V	74.0	-19.0	PK	214	1.0	RB 1 MHz;VB 3 MHz;Pk	
5147.330	53.7	H	74.0	-20.3	PK	252	1.0	RB 1 MHz;VB 3 MHz;Pk	

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace) Vertical

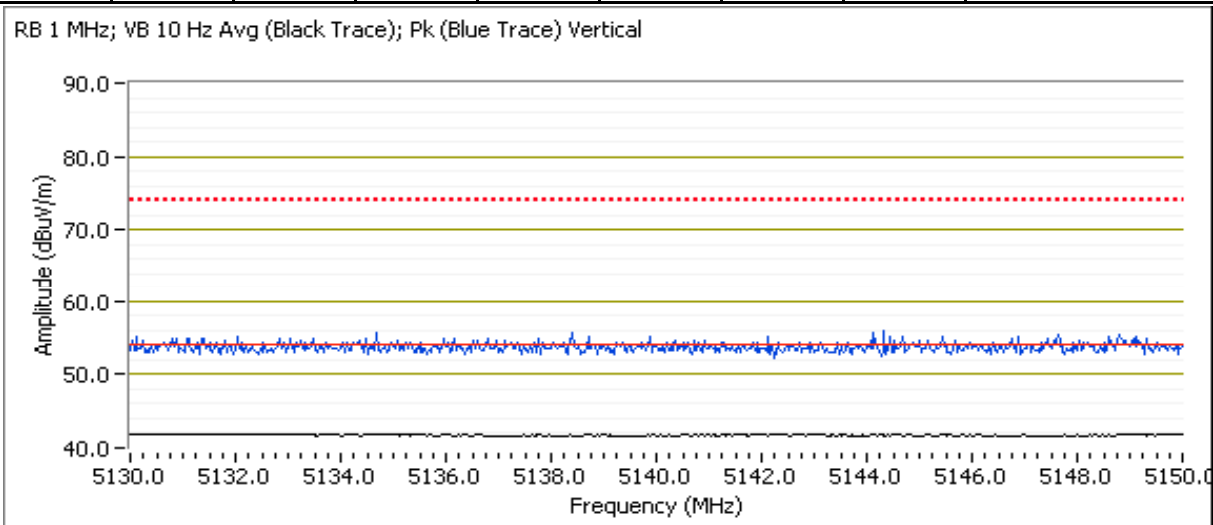

Client: Xirrus	Job Number: J86256
Model: XI-N450 (3x3 radio module) in XR2000	T-Log Number: T86501
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #2, Radiated Spurious Emissions at Band Edges. Operation in the 5250-5350 MHz Band


Date of Test: 2/22/2012
 Test Engineer: Peter Sales
 Test Location: FT Chamber #7

Run #2a High Channel

5350 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 15.209		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments	Chains
			Limit	Margin					
5359.900	46.5	V	54.0	-7.5	AVG	233	1.1	RB 1 MHz;VB 10 Hz;Pk	
5359.770	43.0	H	54.0	-11.0	AVG	190	1.0	RB 1 MHz;VB 10 Hz;Pk	
5360.400	57.3	V	74.0	-16.7	PK	233	1.1	RB 1 MHz;VB 3 MHz;Pk	
5362.370	53.7	H	74.0	-20.3	PK	190	1.0	RB 1 MHz;VB 3 MHz;Pk	

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace) Vertical

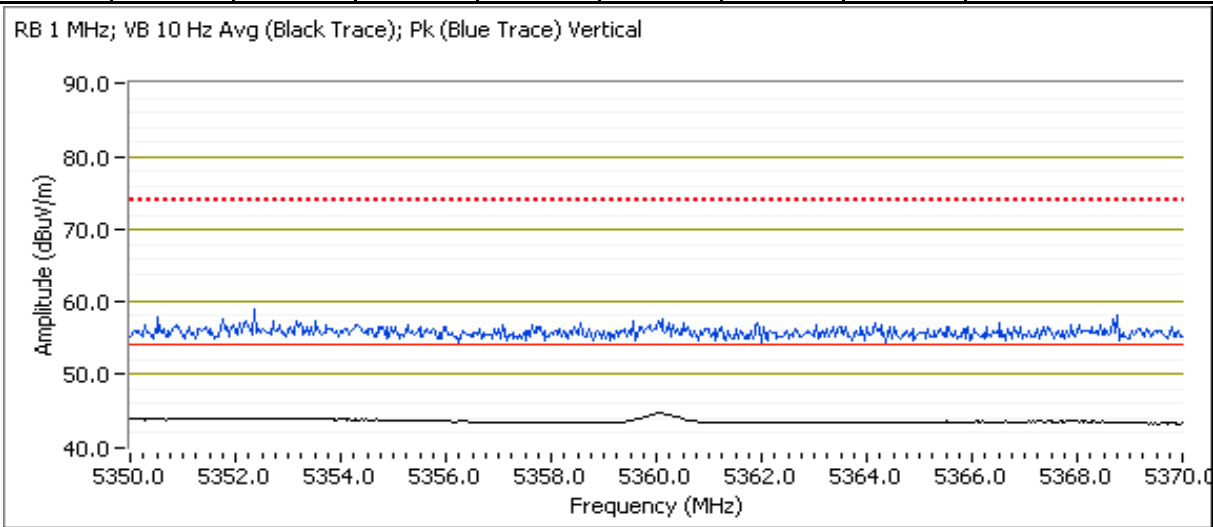


Client: Xirrus	Job Number: J86256
Model: XI-N450 (3x3 radio module) in XR2000	T-Log Number: T86501
	Account Manager: Michelle Kim
Contact: Steve Smith	
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #2a Channel 60, 5300 MHz
 Date of Test: 2/22/2012
 Test Engineer: Peter Sales
 Test Location: FT Chamber #7

5350 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments	Chains
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters		
5360.030	46.9	V	54.0	-7.1	AVG	242	1.3	RB 1 MHz;VB 10 Hz;Pk	
5366.970	43.0	H	54.0	-11.0	AVG	190	2.0	RB 1 MHz;VB 10 Hz;Pk	
5350.170	58.2	V	74.0	-15.8	PK	242	1.3	RB 1 MHz;VB 3 MHz;Pk	
5360.870	54.5	H	74.0	-19.5	PK	190	2.0	RB 1 MHz;VB 3 MHz;Pk	

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace) Vertical

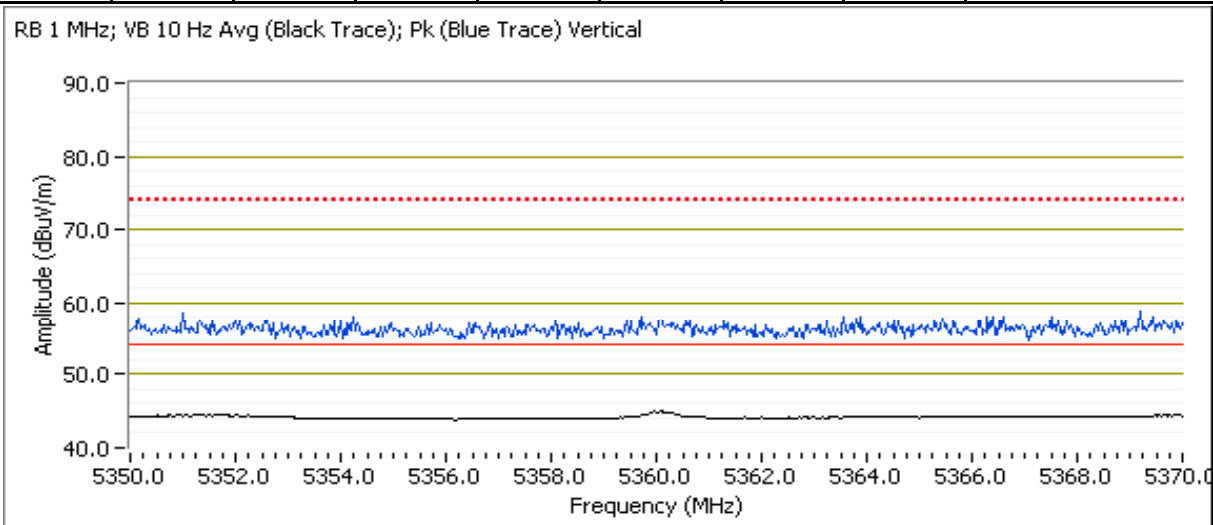

Client: Xirrus	Job Number: J86256
Model: XI-N450 (3x3 radio module) in XR2000	T-Log Number: T86501
Contact: Steve Smith	Account Manager: Michelle Kim
Standard: FCC 15.247/15.E/RSS-210	Class: N/A

Run #3, Radiated Spurious Emissions at Band Edges. Operation in the 5470-5725 MHz Band


Date of Test: 2/22/2012
 Test Engineer: Peter Sales
 Test Location: FT Chamber #7

Run #3a: Low Channel

5350-5460 MHz Restricted Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 15.209		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments	Chains
			Limit	Margin					
5440.000	49.5	V	54.0	-4.5	AVG	232	1.0	RB 1 MHz;VB 10 Hz;Pk	
5459.770	57.5	V	74.0	-16.5	PK	232	1.0	RB 1 MHz;VB 3 MHz;Pk	
5458.070	43.1	H	54.0	-10.9	AVG	298	1.0	RB 1 MHz;VB 10 Hz;Pk	
5448.800	53.9	H	74.0	-20.1	PK	298	1.0	RB 1 MHz;VB 3 MHz;Pk	

RB 1 MHz; VB 10 Hz Avg (Black Trace); Pk (Blue Trace) Vertical

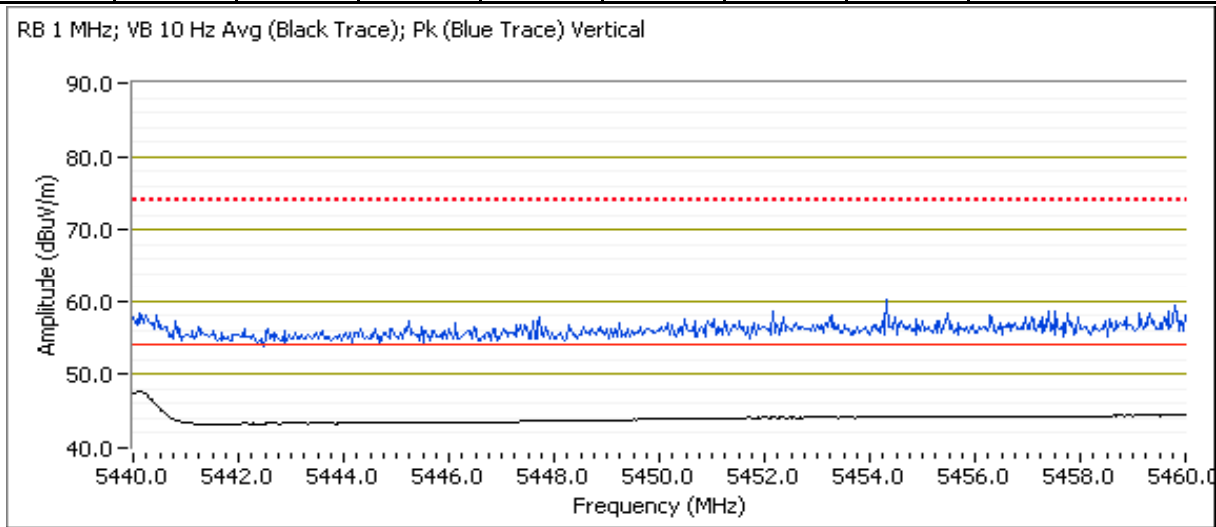

Client:	Xirrus	Job Number:	J86254
Model:	XR1000	T-Log Number:	T86343
		Account Manager:	Susan Pelzl
Contact:	Steve Smith		
Emissions Standard(s):	EN55022, FCC	Class:	B
Immunity Standard(s):	EN 301 489-1 V1.8.1	Environment:	-

EMC Test Data

For The

Xirrus

Model

XR1000

Date of Last Test: 4/17/2012

Client: Xirrus	Job Number: J86254
Model: XR1000	T-Log Number: T86343
	Account Manager: Susan Pelzl
Contact: Steve Smith	
Standard: EN55022, FCC	Class: A

Conducted Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 4/6/2012	Config. Used: 1
Test Engineer: Chris Groat	Config Change: none
Test Location: Fremont Chamber #3	EUT Voltage: POE

General Test Configuration

For tabletop equipment, the EUT was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

Ambient Conditions:	Temperature:	21 °C
	Rel. Humidity:	34 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 120V/60Hz	Class A	Pass	57.4 dBµV @ 4.716 MHz (-2.6 dB)

Modifications Made During Testing



No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Xirrus	Job Number: J86254
Model: XR1000	T-Log Number: T86343
Contact: Steve Smith	Account Manager: Susan Pelzl
Standard: EN55022, FCC	Class: A

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz
Radios in Transmit Mode: 1 3x3 and 1 2x2

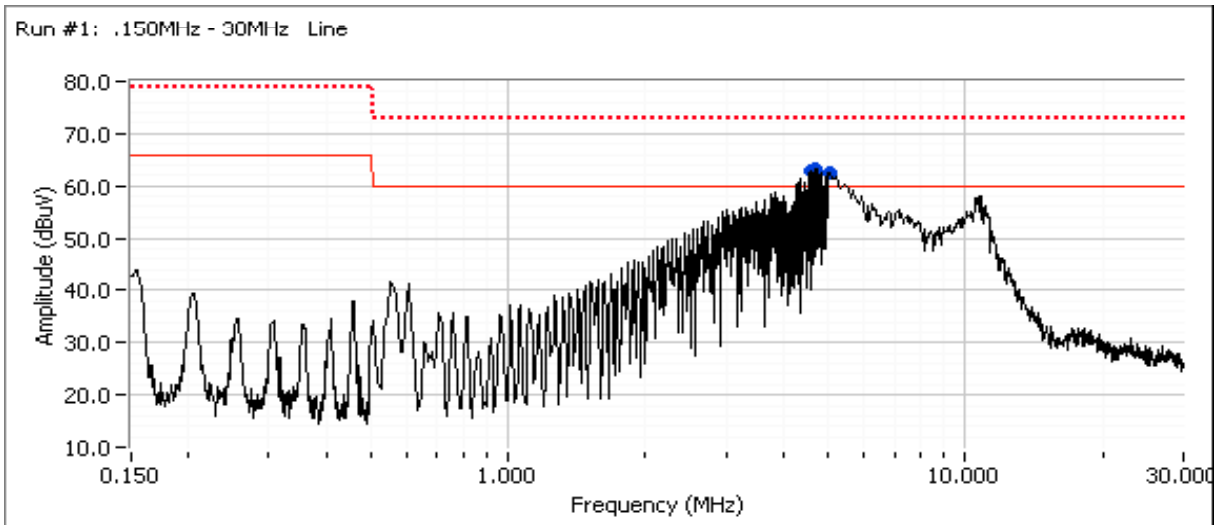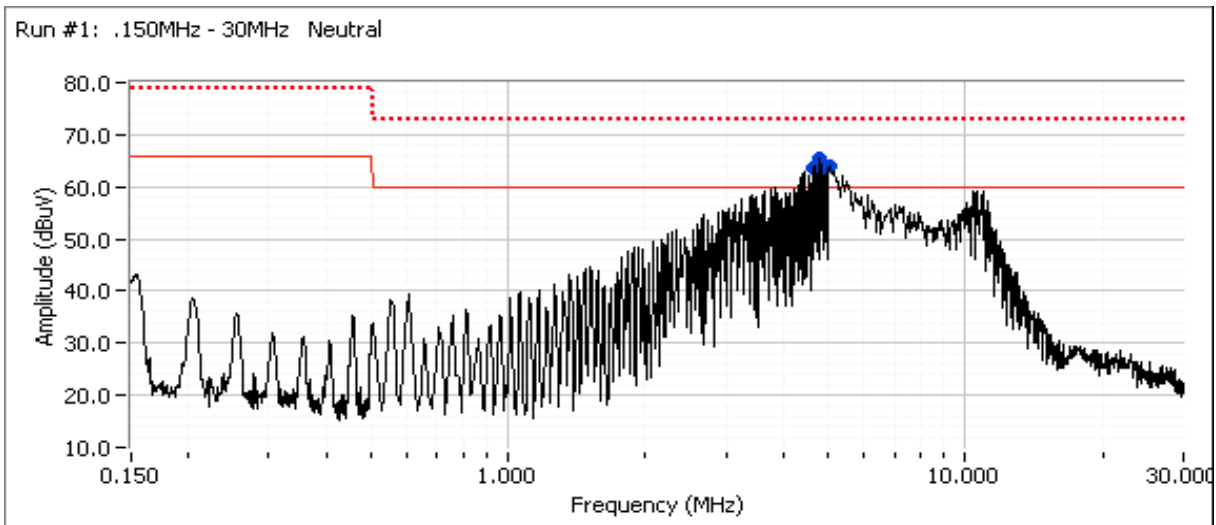

Client: Xirrus	Job Number: J86254
Model: XR1000	T-Log Number: T86343
Contact: Steve Smith	Account Manager: Susan Pelzl
Standard: EN55022, FCC	Class: A

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz
Radios in Transmit Mode: 1 3x3 and 1 2x2

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	Class A		Detector QP/Ave	Comments
			Limit	Margin		
4.819	65.4	Neutral	60.0	5.4	Peak	
4.716	64.1	Neutral	60.0	4.1	Peak	
5.020	63.9	Neutral	60.0	3.9	Peak	
4.666	63.6	Neutral	60.0	3.6	Peak	
4.869	63.6	Neutral	60.0	3.6	Peak	
4.720	63.3	Line 1	60.0	3.3	Peak	
4.669	63.2	Line 1	60.0	3.2	Peak	
4.618	62.8	Line 1	60.0	2.8	Peak	
5.075	62.6	Line 1	60.0	2.6	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class A		Detector QP/Ave	Comments
			Limit	Margin		
4.716	57.4	Neutral	60.0	-2.6	AVG	AVG (0.10s)
4.819	56.1	Neutral	60.0	-3.9	AVG	AVG (0.10s)
4.720	55.8	Line 1	60.0	-4.2	AVG	AVG (0.10s)
4.666	55.6	Neutral	60.0	-4.4	AVG	AVG (0.10s)
5.020	55.5	Neutral	60.0	-4.5	AVG	AVG (0.10s)
5.075	55.3	Line 1	60.0	-4.7	AVG	AVG (0.10s)
4.869	54.7	Neutral	60.0	-5.3	AVG	AVG (0.10s)
4.669	54.5	Line 1	60.0	-5.5	AVG	AVG (0.10s)
4.618	52.8	Line 1	60.0	-7.2	AVG	AVG (0.10s)
4.716	64.4	Neutral	73.0	-8.6	QP	QP (1.00s)
4.819	64.2	Neutral	73.0	-8.8	QP	QP (1.00s)
4.666	63.9	Neutral	73.0	-9.1	QP	QP (1.00s)
5.020	63.4	Neutral	73.0	-9.6	QP	QP (1.00s)
4.869	63.4	Neutral	73.0	-9.6	QP	QP (1.00s)
4.720	63.0	Line 1	73.0	-10.0	QP	QP (1.00s)
4.669	62.7	Line 1	73.0	-10.3	QP	QP (1.00s)
4.618	62.1	Line 1	73.0	-10.9	QP	QP (1.00s)
5.075	61.7	Line 1	73.0	-11.3	QP	QP (1.00s)

End of Report

This page is intentionally blank and marks the last page of this test report.