

Test report

312742-1R1TRFWL

Date of issue: November 28, 2016

Applicant:

Seiko Epson Corporation

Product:

Smart Glasses

Model:

H756A (BT-300)

FCC ID:

SKSH756A

IC Registration number:

1052D-H756A

Specifications:

◆ **FCC 47 CFR Part 15 Subpart C, §15.247**


Operation in the 902–928 MHz, 2400–2483.5 MHz, 5725–5850 MHz

◆ **RSS-247, Issue 1, May 2015, Section 5**

Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs)
and Licence-Exempt Local Area Network (LE-LAN) Devices

Test location

| | |
|--------------|--|
| Company name | Nemko Canada Inc. |
| Address | 292 Labrosse Avenue |
| City | Pointe-Claire |
| Province | QC |
| Postal code | H9R 5L8 |
| Country | Canada |
| Telephone | +1 514 694 2684 |
| Facsimile | +1 514 694 3528 |
| Toll free | +1 800 563 6336 |
| Website | www.nemko.com |
| Site number | FCC: 722545; IC: 2040G-5 (3 m semi anechoic chamber) |

| | |
|--------------------|---|
| Tested by | Yong Huang, Senior EMC/Wireless Specialist |
| Reviewed by | Andrey Adelberg, Senior Wireless/EMC Specialist |
| Review date | November 28, 2016 |
| Reviewer signature |  |

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of contents

| | |
|--|-----------|
| Table of contents | 3 |
| Section 1. Report summary | 4 |
| 1.1 Applicant and manufacturer | 4 |
| 1.2 Test specifications | 4 |
| 1.3 Test methods..... | 4 |
| 1.4 Statement of compliance | 4 |
| 1.5 Exclusions..... | 4 |
| 1.6 Test report revision history | 4 |
| Section 2. Summary of test results | 5 |
| 2.1 FCC Part 15 Subpart C, general requirements test results..... | 5 |
| 2.2 FCC Part 15 Subpart C, intentional radiators test results..... | 5 |
| 2.3 IC RSS-GEN, Issue 4, test results | 5 |
| 2.4 IC RSS-247, Issue 1, test results | 6 |
| Section 3. Equipment under test (EUT) details | 7 |
| 3.1 Sample information..... | 7 |
| 3.2 EUT information | 7 |
| 3.3 Technical information | 7 |
| 3.4 Product description and theory of operation | 8 |
| 3.5 EUT exercise details..... | 8 |
| 3.6 EUT setup diagram | 8 |
| Section 4. Engineering considerations | 9 |
| 4.1 Modifications incorporated in the EUT..... | 9 |
| 4.2 Technical judgment..... | 9 |
| 4.3 Deviations from laboratory tests procedures | 9 |
| Section 5. Test conditions | 10 |
| 5.1 Atmospheric conditions | 10 |
| 5.2 Power supply range..... | 10 |
| Section 6. Measurement uncertainty | 11 |
| 6.1 Uncertainty of measurement | 11 |
| Section 7. Test equipment | 12 |
| 7.1 Test equipment list..... | 12 |
| Section 8. Testing data | 13 |
| 8.1 FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits | 13 |
| 8.2 FCC 15.247(a)(2) and RSS-247 5.2(1): 6 dB bandwidth, RSS-Gen (6.6): 99% bandwidth and FCC 15.215(c): 20 dB bandwidth | 17 |
| 8.3 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements | 23 |
| 8.4 FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) emissions | 26 |
| 8.5 FCC 15.247(e) and RSS-247 5.2(2) Power spectral density for digitally modulated devices | 36 |
| Section 9. Block diagrams of test set-ups | 39 |
| 9.1 Radiated emissions set-up for frequencies below 1 GHz..... | 39 |
| 9.2 Radiated emissions set-up for frequencies above 1 GHz..... | 39 |
| 9.3 Conducted emissions set-up | 40 |

Section 1. Report summary

1.1 Applicant and manufacturer

| | |
|--------------|--|
| Company name | Seiko Epson Corporation |
| Address | 6925 Tazawa, Toyoshina, Azumino-shi, Nagano 399-8285 Japan |

1.2 Test specifications

| | |
|--|--|
| FCC 47 CFR Part 15, Subpart C, Clause 15.247 | Operation in the 902–928 MHz, 2400–2483.5 MHz, 5725–5850 MHz |
| RSS-247, Issue 1, May 2015, Section 5 | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |

1.3 Test methods

| | |
|--|---|
| 558074 D01 DTS Meas Guidance v03 r05 (April 8, 2016) | Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 |
| ANSI C63.10 v2013 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices |

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

1.5 Exclusions

None

1.6 Test report revision history

| Revision # | Details of changes made to test report |
|------------|--|
| TRF | Original report issued |
| R1TRF | Revised as per TCB review, technical information table updated |

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, general requirements test results

| Part | Test description | Verdict |
|------------|---------------------------|-------------------|
| §15.207(a) | Conducted limits | Pass ¹ |
| §15.31(e) | Variation of power source | Pass ¹ |
| §15.203 | Antenna requirement | Pass ² |

Notes: ¹ Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with the supply voltage varied between 85 % and 115 % of the nominal rated supply voltage. No noticeable output power variation was observed
² The antenna is located within the enclosure of EUT and not user accessible.

2.2 FCC Part 15 Subpart C, intentional radiators test results

| Part | Test description | Verdict |
|--------------------|--|----------------|
| §15.215(c) | 20 dB bandwidth | Pass |
| §15.247(a)(1)(i) | Frequency hopping systems operating in the 902–928 MHz band | Not applicable |
| §15.247(a)(1)(ii) | Frequency hopping systems operating in the 5725–5850 MHz band | Not applicable |
| §15.247(a)(1)(iii) | Frequency hopping systems operating in the 2400–2483.5 MHz band | Not applicable |
| §15.247(a)(2) | Minimum 6 dB bandwidth for systems using digital modulation techniques | Pass |
| §15.247(b)(1) | Maximum peak output power of frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band | Not applicable |
| §15.247(b)(2) | Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band | Not applicable |
| §15.247(b)(3,4) | Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands | Pass |
| §15.247(c)(1) | Fixed point-to-point operation with directional antenna gains greater than 6 dBi | Not applicable |
| §15.247(c)(2) | Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams | Not applicable |
| §15.247(d) | Spurious emissions | Pass |
| §15.247(e) | Power spectral density for digitally modulated devices | Pass |
| §15.247(f) | Time of occupancy for hybrid systems | Not applicable |

Notes: None

2.3 IC RSS-GEN, Issue 4, test results

| Part | Test description | Verdict |
|-------|--|-----------------------------|
| 7.1.2 | Receiver radiated emission limits | Not applicable ¹ |
| 7.1.3 | Receiver conducted emission limits | Not applicable ¹ |
| 8.8 | Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus | Pass |
| 6.6 | Occupied bandwidth | Pass |

Notes: ¹ According to sections 5.2 and 5.3 of RSS-Gen, Issue 4 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

2.4 IC RSS-247, Issue 1, test results

| Part | Test description | Verdict |
|---------|--|----------------|
| 5.1 | Frequency Hopping Systems (FHSs) | |
| 5.1 (1) | Bandwidth of a frequency hopping channel | Not applicable |
| 5.1 (2) | Minimum channel spacing for frequency hopping systems | Not applicable |
| 5.1 (3) | Frequency hopping systems operating in the 902–928 MHz band | Not applicable |
| 5.1 (4) | Frequency hopping systems operating in the 2400–2483.5 MHz band | Not applicable |
| 5.1 (5) | Frequency hopping systems operating in the 5725–5850 MHz band | Not applicable |
| 5.2 | Digital Transmission Systems (DTSs) | |
| 5.2 (1) | Minimum 6 dB bandwidth | Pass |
| 5.2 (2) | Maximum power spectral density | Pass |
| 5.3 | Hybrid Systems | |
| 5.3 (1) | Digital modulation turned off | Not applicable |
| 5.3 (2) | Frequency hopping turned off | Not applicable |
| 5.4 | Transmitter output power and e.i.r.p. requirements | |
| 5.4 (1) | Frequency hopping systems operating in the 902–928 MHz band | Not applicable |
| 5.4 (2) | Frequency hopping systems operating in the 2400–2483.5 MHz band | Not applicable |
| 5.4 (3) | Frequency hopping systems operating in the 5725–5850 MHz | Not applicable |
| 5.4 (4) | Systems employing digital modulation techniques | Pass |
| 5.4 (5) | Point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band | Not applicable |
| 5.4 (6) | Transmitters which operate in the 2400–2483.5 MHz band with multiple directional beams | Not applicable |
| 5.5 | Out-of-band emissions | Pass |

Notes: None

Section 3. Equipment under test (EUT) details

3.1 Sample information

| | |
|------------------------|--|
| Receipt date | October 4, 2016 |
| Nemko sample ID number | 133-003152 (Conducted sample) and 133-003139 (Radiated sample) |

3.2 EUT information

| | |
|---------------|----------------|
| Product name | Smart Glasses |
| Model | H756A (BT-300) |
| Serial number | TCW27560112 |

3.3 Technical information

| | |
|--|---|
| All used IC test site(s) Reg. number | 2040G-5 |
| RSS number and Issue number | RSS-247 Issue 1, May 2015 |
| Frequency band (MHz) | 2400–2483.5 |
| Frequency Min (MHz) | 2412 |
| Frequency Max (MHz) | 2462 |
| RF power Max (W), Conducted | 13.28 dBm (0.0213) |
| Field strength, Units @ distance | N/A |
| Measured BW (MHz) (6 dB) | 17.61 |
| Measured BW (kHz) (20 dB) | 20530 |
| Measured BW (kHz) (99%) | 18270 |
| Calculated BW (kHz), as per TRC-43 | N/A |
| Type of modulation | 802.11b/g/n HT20 |
| Emission classification | W7D |
| Transmitter spurious, Units @ distance | 51.8 dB μ V/m @3m, average |
| Power requirements | 5 V _{DC} (Powered via external AC-DC adapter 100–240 V _{AC} 50–60 Hz) and via battery |
| Antenna information | The EUT uses a non-detachable antenna to the intentional radiator. As per customer the antenna gain is 2.1 dBi at 2.4 GHz band. |

3.4 Product description and theory of operation

EUT is a smart glass with see-through lenses, which allows to overlay images on actual view. The virtual images were provided by a controller.

3.5 EUT exercise details

EUT was set to test modes during tests, by software drivers provided by customer.

3.6 EUT setup diagram

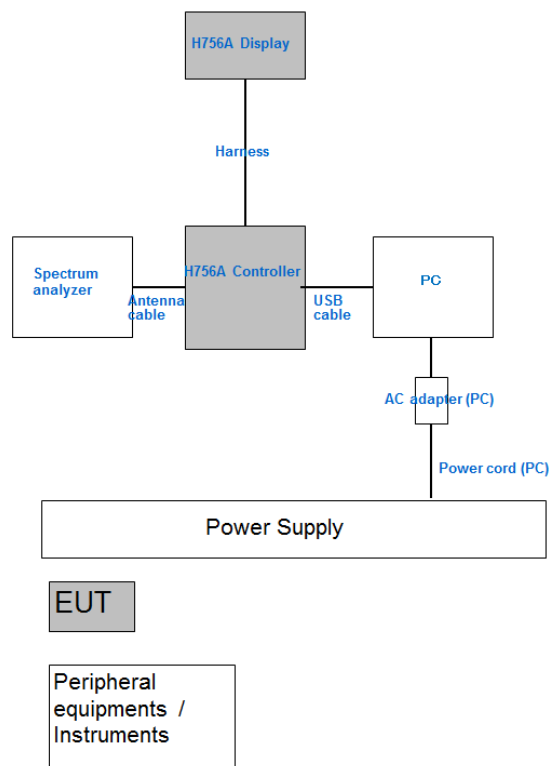


Figure 3.6-1: Setup diagram

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

EUT could be configured to different data rates. From preliminary investigation, the following was chosen to be worst case to present in this report: 11 Mbps in 802.11b, 6 Mbps in 802.11g and MCS0 in 802.11n.

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

| | |
|-------------------|---------------|
| Temperature | 15–30 °C |
| Relative humidity | 20–75 % |
| Air pressure | 860–1060 mbar |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

| Test name | Measurement uncertainty, dB |
|-------------------------------|-----------------------------|
| All antenna port measurements | 0.55 |
| Conducted spurious emissions | 1.13 |
| Radiated spurious emissions | 3.78 |

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

| Equipment | Manufacturer | Model no. | Asset no. | Cal cycle | Next cal. |
|-------------------------------------|------------------------|-----------|-----------|-----------|-------------|
| 3 m EMI test chamber | TDK | SAC-3 | FA002532 | 2 year | May 25/17 |
| Flush mount turntable | Sunol | FM2022 | FA002550 | — | NCR |
| Controller | Sunol | SC104V | FA002551 | — | NCR |
| Antenna mast | Sunol | TLT2 | FA002552 | — | NCR |
| spectrum analyzer | Rohde & Schwarz | FSV 40 | FA002731 | 1 year | Apr 06/17 |
| Receiver/spectrum analyzer | Rohde & Schwarz | ESU 40 | FA002071 | 1 year | March 23/17 |
| Biconical antenna (30–300 MHz) | Sunol | BC2 | FA002078 | 1 year | March 4/17 |
| Log periodic antenna (200–5000 MHz) | Sunol | LP5 | FA002077 | 1 year | March 14/17 |
| Horn antenna (1–18 GHz) | EMCO | RGA-60 | FA002577 | 1 year | April 5/17 |
| Horn antenna (18–40 GHz) | EMCO | 3116 | FA002487 | 2 year | Aug. 16/17 |
| Pre-amplifier (0.5–18 GHz) | COM-POWER | PAM-118A | FA002561 | 1 year | May 6/17 |
| Pre-amplifier (18–40 GHz) | COM-POWER | PAM-840 | FA002508 | 1 year | May 6/17 |
| 50 Ω coax cable | C.C.A. | None | FA002603 | — | VOU |
| 50 Ω coax cable | C.C.A. | None | FA002605 | — | VOU |
| 50 Ω coax cable | C.C.A. | None | FA002607 | — | VOU |
| Signal generator | Rohde & Schwarz | SMR 40 | FA002698 | 1 year | May 10/17 |
| Power Sensor | Rhode & Schwarz | NRP18S | FA002730 | 1 year | Mar. 14/17 |
| Environmental Chamber | ESPEC | EPX-4H | FA002736 | 1 year | Jan. 18/17 |
| LISN | Rohde & Schwarz | ENV216 | FA002514 | 1 year | Nov. 20/16 |
| Power source | California Instruments | 5001ix | FA002494 | 1 year | Apr 29/17 |

Notes: None

Table 7.1-2: test software

| Test description | Manufacturer of Software | Details |
|--------------------|--------------------------|---|
| Radiated emissions | Rhode & Schwarz | EMC32, Software for EMC Measurements, Version 9.26.01 |

Notes: None

Section 8. Testing data

8.1 FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits

8.1.1 Definitions and limits

FCC §15.207 (a):

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

RSS-GEN, Clause 8.8:

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in table below.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in table below. The more stringent limit applies at the frequency range boundaries.

Table 8.1-1: AC power line conducted emissions limits

| Frequency of emission, MHz | Conducted limit, dBμV | |
|-------------------------------|-----------------------|-----------|
| | Quasi-peak | Average** |
| 0.15–0.5 | 66 to 56* | 56 to 46* |
| 0.5–5 | 56 | 46 |
| 5–30 | 60 | 50 |

Notes: * - The level decreases linearly with the logarithm of the frequency.
 ** - A linear average detector is required.

8.1.2 Test summary

| | | | | | |
|-------------|------------------|-------------------|------------|--------------|-----------|
| Verdict | Pass | | | | |
| Test date | October 16, 2016 | Test engineer | Yong Huang | | |
| Temperature | 23.4 °C | Relative humidity | 35.7 % | Air pressure | 1001 mbar |

8.1.3 Notes

None

8.1.4 Setup details

| | |
|-------------------------|--|
| Port under test | AC input (External adapter) |
| EUT setup configuration | Table top |
| Measurement details | A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement. |

Receiver settings:

| | |
|----------------------|--|
| Resolution bandwidth | 9 kHz |
| Video bandwidth | 30 kHz |
| Detector mode | <ul style="list-style-type: none">– Peak and Average (Preview measurement)– Quasi-peak and CAverage (Final measurement) |
| Trace mode | Max Hold |
| Measurement time | <ul style="list-style-type: none">– 100 ms (Peak and Average preview measurement)– 1000 ms (Quasi-peak final measurement)– 160 ms (CAverage final measurement) |

8.1.5 Test data

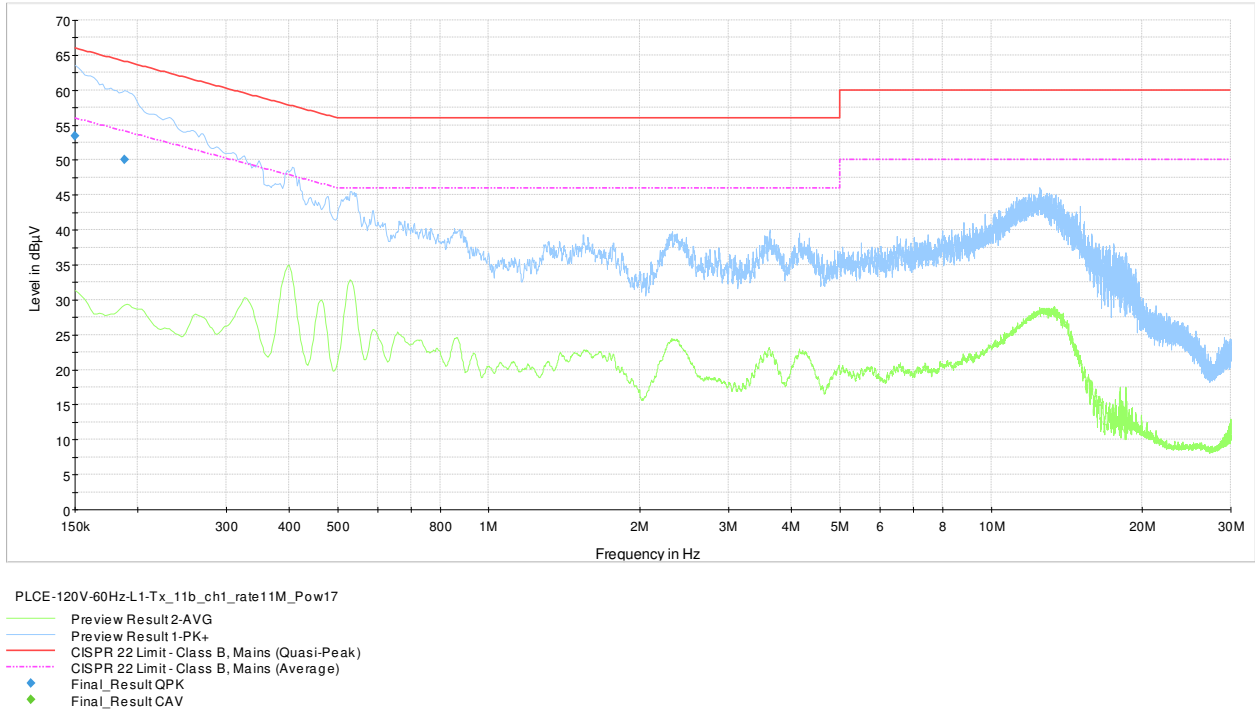


Figure 8.1-1: AC power line conducted emissions limits – phase line

Table 8.1-2: Quasi-Peak results AC power line conducted emissions limits – phase line

| Frequency (MHz) | Quasi-Peak result ¹ and ³ (dBµV) | Quasi-Peak limit (dBµV) | Margin (dB) | Measurement time (ms) | Bandwidth (kHz) | Conductor | Filter | Correction factor ² (dB) |
|-----------------|--|-------------------------|-------------|-----------------------|-----------------|-----------|--------|-------------------------------------|
| 0.150000 | 53.4 | 66.0 | 12.6 | 100.0 | 9 | L1 | ON | 9.9 |
| 0.188250 | 50.0 | 64.1 | 14.1 | 100.0 | 9 | L1 | ON | 10.2 |

Notes:
¹ Result (dBµV) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)
² Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + attenuator (dB)
³ The maximum measured value observed over a period of 15 seconds was recorded.

Sample calculation: 53.4 dBµV (result) = 43.3 dBµV (receiver reading) + 9.9 dB (Correction factor)

8.1.5 Test data, continued

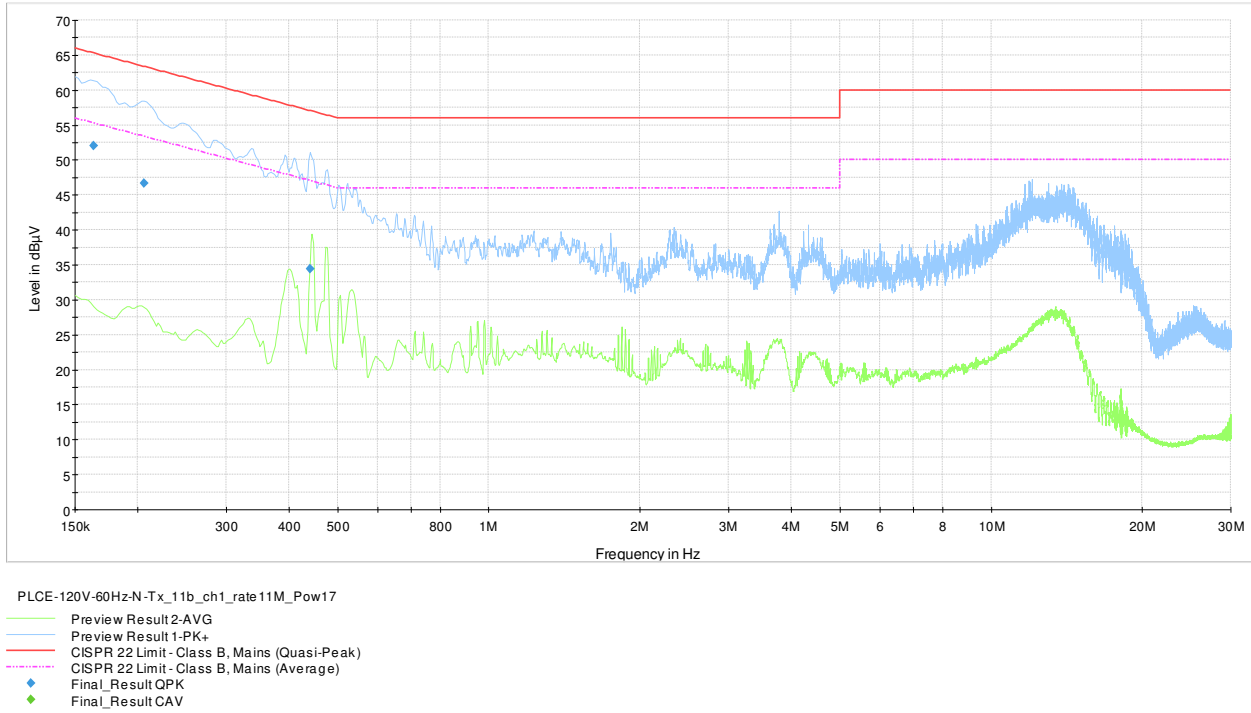


Figure 8.1-2: AC power line conducted emissions limits – neutral line

Table 8.1-3: Quasi-Peak results AC power line conducted emissions limits – neutral line

| Frequency (MHz) | Quasi-Peak result ¹ and ³ (dBµV) | Quasi-Peak limit (dBµV) | Margin (dB) | Measurement time (ms) | Bandwidth (kHz) | Conductor | Filter | Correction factor ² (dB) |
|-----------------|--|-------------------------|-------------|-----------------------|-----------------|-----------|--------|-------------------------------------|
| 0.163500 | 52.1 | 65.3 | 13.2 | 100.0 | 9 | N | ON | 10.2 |
| 0.206250 | 46.7 | 63.4 | 16.6 | 100.0 | 9 | N | ON | 10.0 |
| 0.440250 | 34.4 | 57.1 | 22.7 | 100.0 | 9 | N | ON | 10.0 |

Notes: ¹ Result (dBµV) = receiver/spectrum analyzer value (dBµV) + correction factor (dB)
² Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + attenuator (dB)
³ The maximum measured value observed over a period of 15 seconds was recorded.

Sample calculation: 53.4 dBµV (result) = 43.3 dBµV (receiver reading) + 9.9 dB (Correction factor)

| | |
|----------------------|---|
| Section 8 | <i>Testing data</i> |
| Test name | <i>FCC 15.247(a)(2) and RSS-247 5.2(1): 6 dB bandwidth, RSS-Gen (6.6): 99% bandwidth and FCC 15.215(c): 20 dB bandwidth</i> |
| Specification | <i>FCC 15 Subpart C, RSS-247, Issue 1 and RSS-Gen, Issue 4</i> |



8.2 FCC 15.247(a)(2) and RSS-247 5.2(1): 6 dB bandwidth, RSS-Gen (6.6): 99% bandwidth and FCC 15.215(c): 20 dB bandwidth

8.2.1 Definitions and limits

FCC §15.247 (a)(2):

- (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
 - (2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

RSS-247, Clause 5.2 (1):

The minimum 6 dB bandwidth shall be 500 kHz.

FCC §15.215 (c):

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

RSS-GEN, Clause 6.6:

The emission bandwidth (×dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated × dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3× the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3×RBW.

Note: Video averaging is not permitted.

A peak, or peak hold, may be used in place of the sampling detector as this may produce a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold may be necessary to determine the occupied bandwidth if the device is not transmitting continuously.

The trace data points are recovered and are directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded.

The difference between the two recorded frequencies is the 99% occupied bandwidth.

Section 8

Testing data

Test name

FCC 15.247(a)(2) and RSS-247 5.2(1): 6 dB bandwidth, RSS-Gen (6.6): 99% bandwidth and FCC 15.215(c): 20 dB bandwidth

Specification

FCC 15 Subpart C, RSS-247, Issue 1 and RSS-Gen, Issue 4



8.2.2 Test summary

| | | | | | |
|-------------|--|-------------------|------------|--------------|-----------|
| Verdict | Pass | | | | |
| Test date | October 13, 2016 to November 15, 2016 | Test engineer | Yong Huang | | |
| Temperature | 23 °C | Relative humidity | 50 % | Air pressure | 1003 mbar |

8.2.3 Notes

Measurements were performed as per 558074 D01 DTS Meas Guidance v03r05 (The test was performed using method described in Section 8.1)

8.2.4 Setup details

Spectrum analyser settings: for 6 dB bandwidth test:

| | |
|----------------------|---------------------|
| Resolution bandwidth | 100 kHz |
| Video bandwidth | $\geq 3 \times$ RBW |
| Frequency span | 30 MHz |
| Detector mode | Peak |
| Trace mode | Max Hold |

Spectrum analyser settings: for 20 dB and 99% bandwidth test:

| | |
|----------------------|---------------------|
| Resolution bandwidth | 300 kHz |
| Video bandwidth | $\geq 3 \times$ RBW |
| Frequency span | 30 MHz |
| Detector mode | Peak |
| Trace mode | Max Hold |

Section 8

Testing data

Test name

FCC 15.247(a)(2) and RSS-247 5.2(1): 6 dB bandwidth, RSS-Gen (6.6): 99% bandwidth and FCC 15.215(c): 20 dB bandwidth

Specification

FCC 15 Subpart C, RSS-247, Issue 1 and RSS-Gen, Issue 4



8.2.5 Test data

Table 8.2-1: 6 dB bandwidth results

| Modulation | Frequency, MHz | 6 dB bandwidth, MHz | Minimum Limit, MHz | Margin, MHz |
|------------|----------------|---------------------|--------------------|-------------|
| 802.11b | 2412 | 7.72 | 0.5 | 7.22 |
| | 2437 | 7.69 | 0.5 | 7.19 |
| | 2462 | 7.75 | 0.5 | 7.25 |
| 802.11g | 2412 | 16.50 | 0.5 | 16.00 |
| | 2437 | 16.41 | 0.5 | 15.91 |
| | 2462 | 16.46 | 0.5 | 15.96 |
| 802.11n | 2412 | 17.61 | 0.5 | 17.11 |
| | 2437 | 17.42 | 0.5 | 16.92 |
| | 2462 | 17.61 | 0.5 | 17.11 |

Table 8.2-2: 20 dB and 99% bandwidth results

| Modulation | Frequency, MHz | 20 dB bandwidth, MHz | 99% bandwidth, MHz |
|------------|----------------|----------------------|--------------------|
| 802.11b | 2412 | 13.16 | 11.29 |
| | 2437 | 12.94 | 11.20 |
| | 2462 | 12.89 | 11.23 |
| 802.11g | 2412 | 20.28 | 17.20 |
| | 2437 | 20.24 | 17.23 |
| | 2462 | 20.00 | 17.21 |
| 802.11n | 2412 | 20.35 | 18.23 |
| | 2437 | 20.53 | 18.25 |
| | 2462 | 20.47 | 18.27 |

Section 8

Testing data

Test name


FCC 15.247(a)(2) and RSS-247 5.2(1): 6 dB bandwidth, RSS-Gen (6.6): 99% bandwidth and FCC 15.215(c): 20 dB bandwidth

Specification

FCC 15 Subpart C, RSS-247, Issue 1 and RSS-Gen, Issue 4




8.2.5 Test data, continued

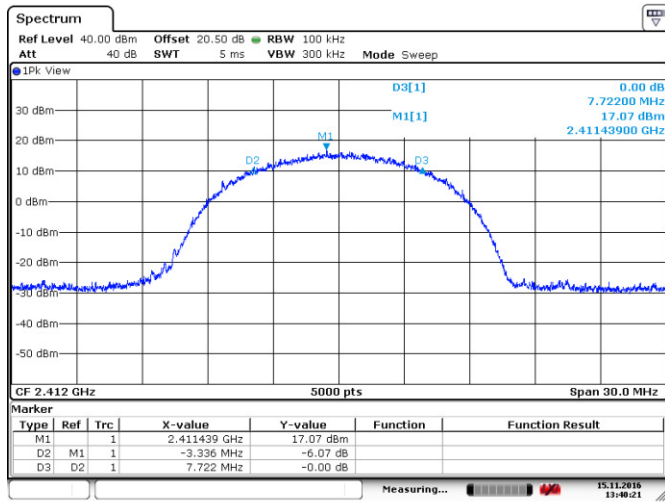


Date: 15.NOV.2016 13:40:22

Figure 8.2-1: 6 dB bandwidth on 802.11b, sample plot

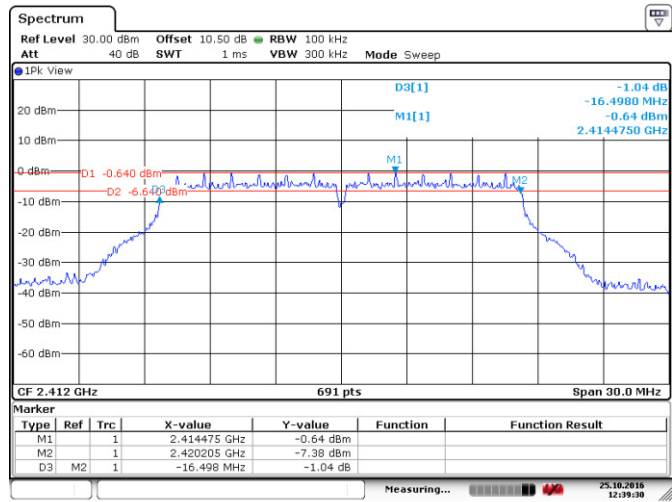

Date: 25.OCT.2016 12:39:30

Figure 8.2-2: 6 dB bandwidth on 802.11g, sample plot

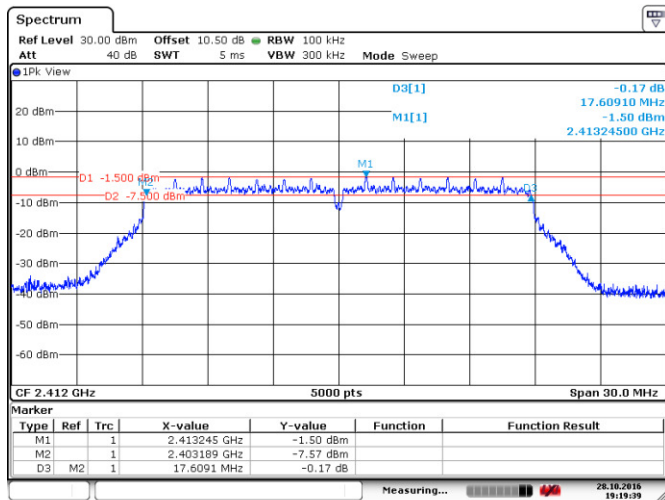

Date: 28.OCT.2016 19:19:39

Figure 8.2-3: 6 dB bandwidth on 802.11n, sample plot

Section 8

Testing data

Test name


FCC 15.247(a)(2) and RSS-247 5.2(1): 6 dB bandwidth, RSS-Gen (6.6): 99% bandwidth and FCC 15.215(c): 20 dB bandwidth

Specification

FCC 15 Subpart C, RSS-247, Issue 1 and RSS-Gen, Issue 4




8.2.5 Test data, continued

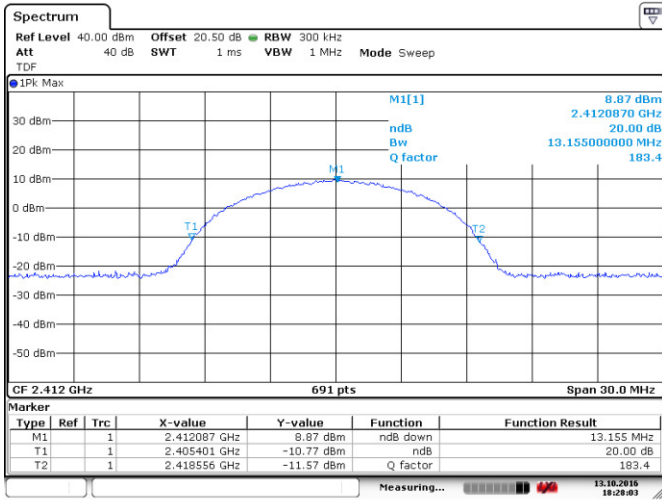


Date: 13.OCT.2016 18:28:03

Figure 8.2-4: 20 dB bandwidth on 802.11b, sample plot

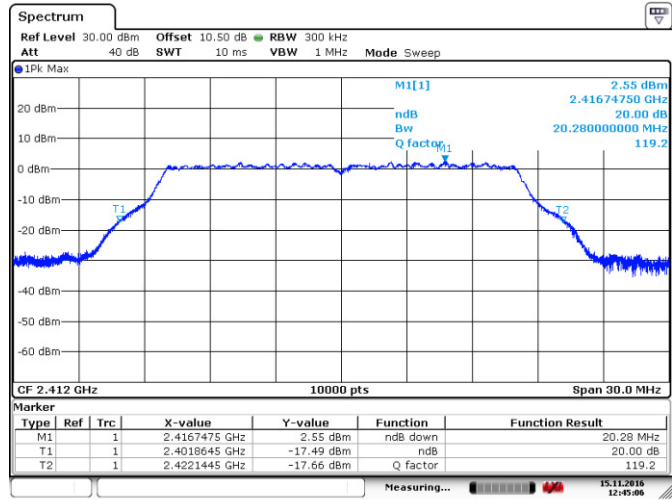

Date: 15.NOV.2016 12:45:06

Figure 8.2-5: 20 dB bandwidth on 802.11g, sample plot

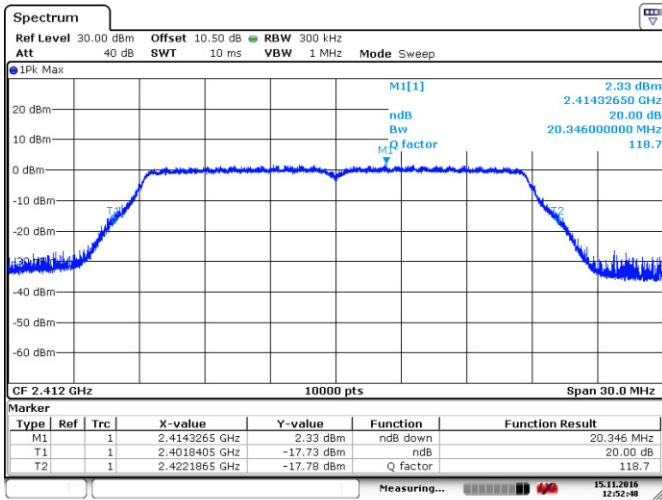

Date: 15.NOV.2016 12:52:48

Figure 8.2-6: 20 dB bandwidth on 802.11n, sample

Section 8

Testing data

Test name

FCC 15.247(a)(2) and RSS-247 5.2(1): 6 dB bandwidth, RSS-Gen (6.6): 99% bandwidth and FCC 15.215(c): 20 dB bandwidth

Specification

FCC 15 Subpart C, RSS-247, Issue 1 and RSS-Gen, Issue 4



8.2.5 Test data, continued

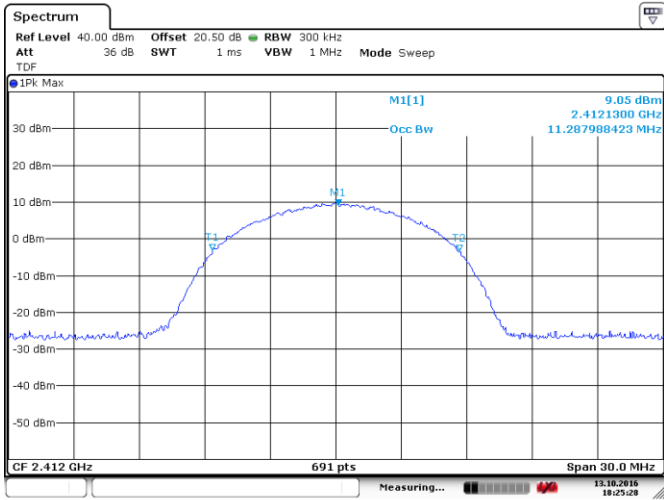


Figure 8.2-7: 99% bandwidth on 802.11b, sample plot

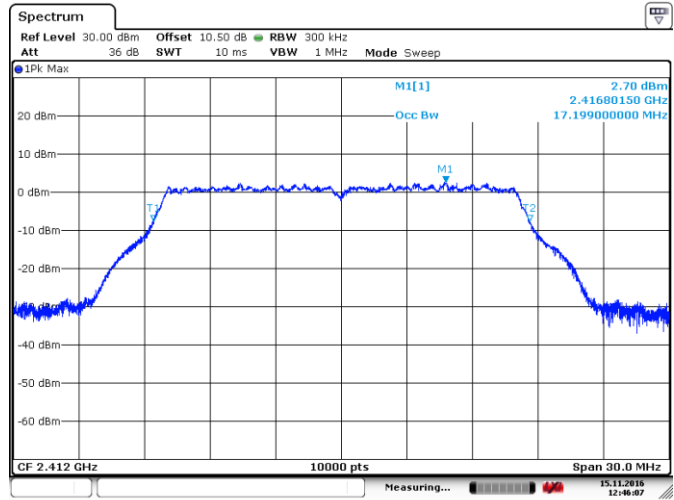


Figure 8.2-8: 99% bandwidth on 802.11g, sample plot

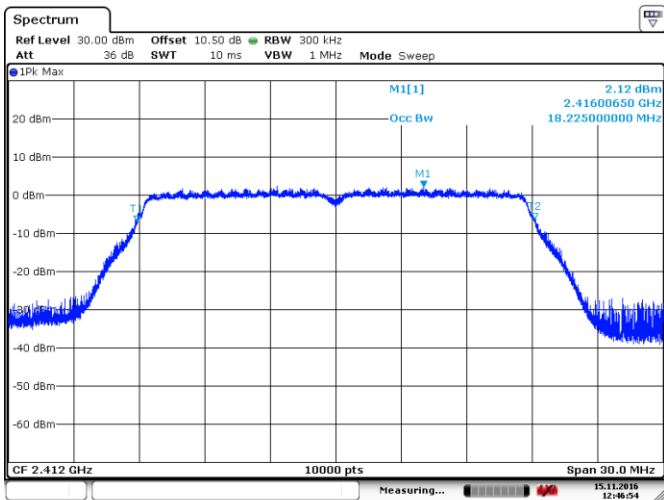


Figure 8.2-9: 99% bandwidth on 802.11n, sample plot

8.3 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements

8.3.1 Definitions and limits

FCC §15.247 (b)(3,4):

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
- (3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 W (30 dBm). As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
 - (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RSS-247, Clause 5.4 (4):

For DTSs employing digital modulation techniques operating in the bands 902–928 MHz and 2400–2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.
 Fixed point-to-point systems in the bands 2400-2483.5 MHz and 5725-5850 MHz are permitted to have an e.i.r.p. higher than 4 W provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers. Point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding an e.i.r.p. of 4 W.

8.3.2 Test summary

| | | | | | |
|-------------|--|-------------------|------------|--------------|-----------|
| Verdict | Pass | | | | |
| Test date | October 13, 2016 to November 15, 2016 | Test engineer | Yong Huang | | |
| Temperature | 23 °C | Relative humidity | 50 % | Air pressure | 1003 mbar |

8.3.3 Notes

- Measurements were performed as per 558074 D01 DTS Meas Guidance v03r05 (The test was performed using method described in Section 9.2.2. Measurement using a spectrum analyzer (SA) Method AVGSA-1 averaging with the EUT transmitting at full power throughout each sweep. The measurements were performed at the Wi-Fi module antenna port.

8.3.4 Setup details

Spectrum analyser settings:

| | |
|-------------------------|---------------|
| Resolution bandwidth | 1 MHz |
| Video bandwidth | ≥3 × RBW |
| Frequency span | 30 MHz |
| Detector mode | RMS |
| Trace mode | Power Average |
| Averaging sweeps number | 100 |
| Sweep points | 1000 |




8.3.5 Test data

Table 8.3-1: Output power and EIRP results

| Modulation | Frequency, MHz | Conducted output power, dBm | Conducted output power limit, dBm | Margin, dB | Antenna gain, dBi | EIRP, dBm | EIRP limit, dBm | EIRP margin, dB |
|------------|----------------|-----------------------------|-----------------------------------|------------|-------------------|-----------|-----------------|-----------------|
| 802.11b | 2412 | 13.28 | 30.00 | 16.72 | 2.10 | 15.38 | 36.00 | 20.62 |
| | 2437 | 13.17 | 30.00 | 16.83 | 2.10 | 15.27 | 36.00 | 20.73 |
| | 2462 | 12.38 | 30.00 | 17.62 | 2.10 | 14.48 | 36.00 | 21.52 |
| 802.11g | 2412 | 10.93 | 30.00 | 19.07 | 2.10 | 13.03 | 36.00 | 22.97 |
| | 2437 | 10.41 | 30.00 | 19.59 | 2.10 | 12.51 | 36.00 | 23.49 |
| | 2462 | 10.10 | 30.00 | 19.90 | 2.10 | 12.20 | 36.00 | 23.80 |
| 802.11n | 2412 | 9.92 | 30.00 | 20.08 | 2.10 | 12.02 | 36.00 | 23.98 |
| | 2437 | 9.57 | 30.00 | 20.43 | 2.10 | 11.67 | 36.00 | 24.33 |
| | 2462 | 9.04 | 30.00 | 20.96 | 2.10 | 11.14 | 36.00 | 24.86 |


Notes: EIRP = Output power + Antenna gain

8.3.5 Test data, continued

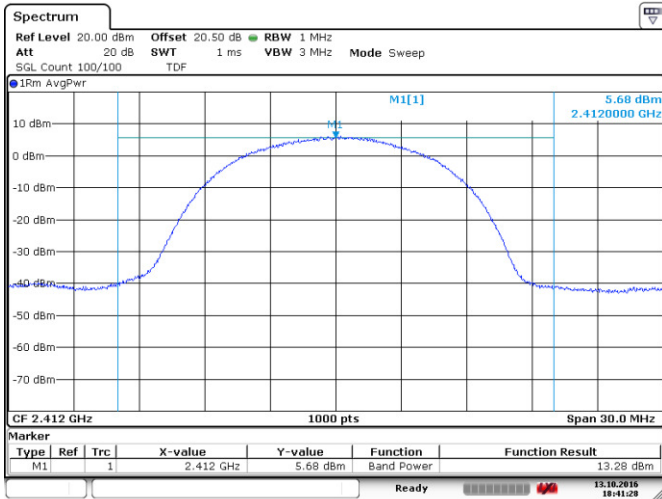


Date: 13.OCT.2016 18:41:28

Figure 8.3-1: Conducted output power on 802.11b, sample plot

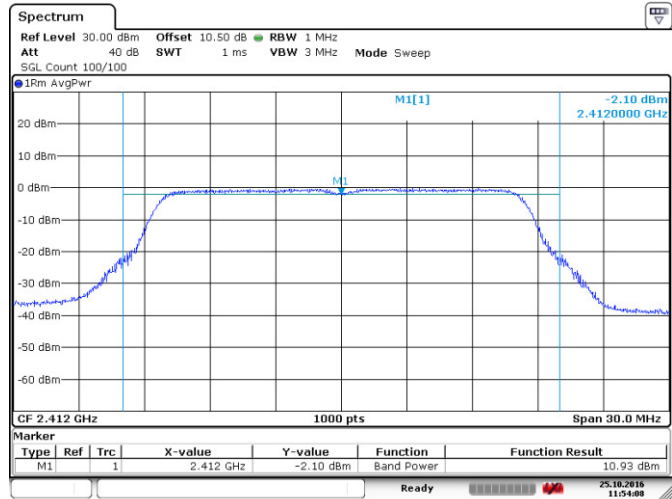

Date: 25.OCT.2016 11:54:09

Figure 8.3-2: Conducted output power on 802.11g, sample plot

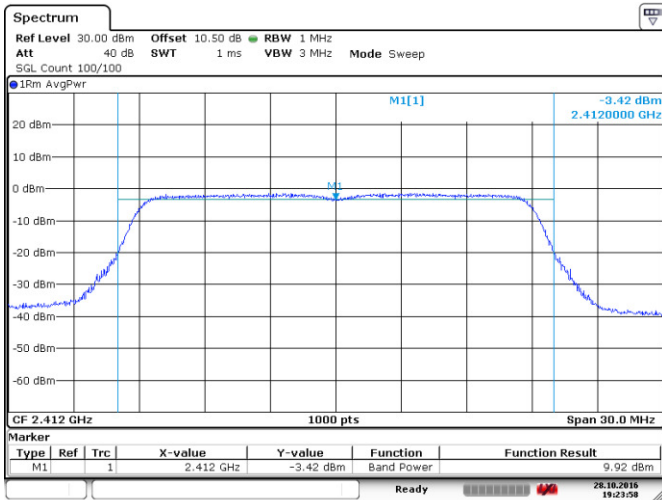

Date: 28.OCT.2016 19:23:58

Figure 8.3-3: Conducted output power on 802.11n, sample plot

8.4 FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) emissions

8.4.1 Definitions and limits

FCC §15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247, Clause 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Table 8.4-1: FCC §15.209 and RSS-Gen – Radiated emission limits

| Frequency, MHz | Field strength of emissions | | Measurement distance, m |
|-------------------|-----------------------------|---------------------------------|-------------------------|
| | µV/m | dBµV/m | |
| 0.009–0.490 | 2400/F | $67.6 - 20 \times \log_{10}(F)$ | 300 |
| 0.490–1.705 | 24000/F | $87.6 - 20 \times \log_{10}(F)$ | 30 |
| 1.705–30.0 | 30 | 29.5 | 30 |
| 30–88 | 100 | 40.0 | 3 |
| 88–216 | 150 | 43.5 | 3 |
| 216–960 | 200 | 46.0 | 3 |
| above 960 | 500 | 54.0 | 3 |

Notes: In the emission table above, the tighter limit applies at the band edges.
 For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.4-2: IC restricted frequency bands

| MHz | MHz | MHz | GHz |
|-----------------|---------------------|---------------|-------------|
| 0.090–0.110 | 12.51975–12.52025 | 399.9–410 | 5.35–5.46 |
| 2.1735–2.1905 | 12.57675–12.57725 | 608–614 | 7.25–7.75 |
| 3.020–3.026 | 13.36–13.41 | 960–1427 | 8.025–8.5 |
| 4.125–4.128 | 16.42–16.423 | 1435–1626.5 | 9.0–9.2 |
| 4.17725–4.17775 | 16.69475–16.69525 | 1645.5–1646.5 | 9.3–9.5 |
| 4.20725–4.20775 | 16.80425–16.80475 | 1660–1710 | 10.6–12.7 |
| 5.677–5.683 | 25.5–25.67 | 1718.8–1722.2 | 13.25–13.4 |
| 6.215–6.218 | 37.5–38.25 | 2200–2300 | 14.47–14.5 |
| 6.26775–6.26825 | 73–74.6 | 2310–2390 | 15.35–16.2 |
| 6.31175–6.31225 | 74.8–75.2 | 2655–2900 | 17.7–21.4 |
| 8.291–8.294 | 108–138 | 3260–3267 | 22.01–23.12 |
| 8.362–8.366 | 156.52475–156.52525 | 3332–3339 | 23.6–24.0 |
| 8.37625–8.38675 | 156.7–156.9 | 3345.8–3358 | 31.2–31.8 |
| 8.41425–8.41475 | 240–285 | 3500–4400 | 36.43–36.5 |
| 12.29–12.293 | 322–335.4 | 4500–5150 | Above 38.6 |

Notes: Certain frequency bands listed in this table and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

Table 8.4-3: FCC restricted frequency bands

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110 | 16.42–16.423 | 399.9–410 | 4.5–5.15 |
| 0.495–0.505 | 16.69475–16.69525 | 608–614 | 5.35–5.46 |
| 2.1735–2.1905 | 16.80425–16.80475 | 960–1240 | 7.25–7.75 |
| 4.125–4.128 | 25.5–25.67 | 1300–1427 | 8.025–8.5 |
| 4.17725–4.17775 | 37.5–38.25 | 1435–1626.5 | 9.0–9.2 |
| 4.20725–4.20775 | 73–74.6 | 1645.5–1646.5 | 9.3–9.5 |
| 6.215–6.218 | 74.8–75.2 | 1660–1710 | 10.6–12.7 |
| 6.26775–6.26825 | 108–121.94 | 1718.8–1722.2 | 13.25–13.4 |
| 6.31175–6.31225 | 123–138 | 2200–2300 | 14.47–14.5 |
| 8.291–8.294 | 149.9–150.05 | 2310–2390 | 15.35–16.2 |
| 8.362–8.366 | 156.52475–156.52525 | 2483.5–2500 | 17.7–21.4 |
| 8.37625–8.38675 | 156.7–156.9 | 2690–2900 | 22.01–23.12 |
| 8.41425–8.41475 | 162.0125–167.17 | 3260–3267 | 23.6–24.0 |
| 12.29–12.293 | 167.72–173.2 | 3332–3339 | 31.2–31.8 |
| 12.51975–12.52025 | 240–285 | 3345.8–3358 | 36.43–36.5 |
| 12.57675–12.57725 | 322–335.4 | 3600–4400 | Above 38.6 |
| 13.36–13.41 | | | |

8.4.2 Test summary

| | | | | |
|-------------|---------------------------------------|-------------------|------------|------------------------|
| Verdict | Pass | | | |
| Test date | October 13, 2016 to November 15, 2016 | Test engineer | Yong Huang | |
| Temperature | 23 °C | Relative humidity | 50 % | Air pressure 1003 mbar |

8.4.3 Notes

- Measurements were performed as per 558074 D01 DTS Meas Guidance v03r05
- The spectrum was searched from 30 MHz to the 10th harmonic.
- EUT was set to transmit with 100 % duty cycle.
- Power was measured using average method as detailed in section 9.2.2.1 of 558074 D01 DTS Meas Guidance v03r05. The spurious emissions limit of –30 dBc/100 kHz was used to determine compliance.
- For radiated spurious emissions at the upper band edge method as detailed in section 13.3.1 of 558074 D01 DTS Meas Guidance v03r05 was used to determine compliance

8.4.4 Setup details

Spectrum analyser settings for conducted measurements:

| | |
|-----------------------|----------|
| Resolution bandwidth: | 100 kHz |
| Video bandwidth: | 300 kHz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |

Spectrum analyser settings for radiated measurements within restricted bands below 1 GHz:

| | |
|-----------------------|----------|
| Resolution bandwidth: | 100 kHz |
| Video bandwidth: | 300 kHz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |

Spectrum analyser settings for peak radiated measurements within restricted bands above 1 GHz:


| | |
|-----------------------|----------|
| Resolution bandwidth: | 1 MHz |
| Video bandwidth: | 3 MHz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |

Spectrum analyser settings for average radiated measurements within restricted bands above 1 GHz:

| | |
|-----------------------|---------------|
| Resolution bandwidth: | 1 MHz |
| Video bandwidth: | 3 MHz |
| Detector mode: | RMS |
| Trace mode: | Power Average |


8.4.5 Test data

Conducted spurious emissions outside restricted bands, test results

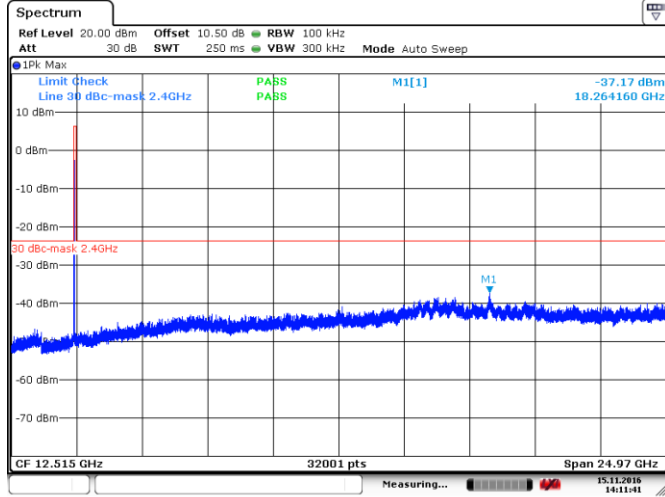


Date: 15 NOV.2016 14:11:42

Figure 8.4-1: Conducted spurious emissions for 802.11b (TX 2412 MHz)

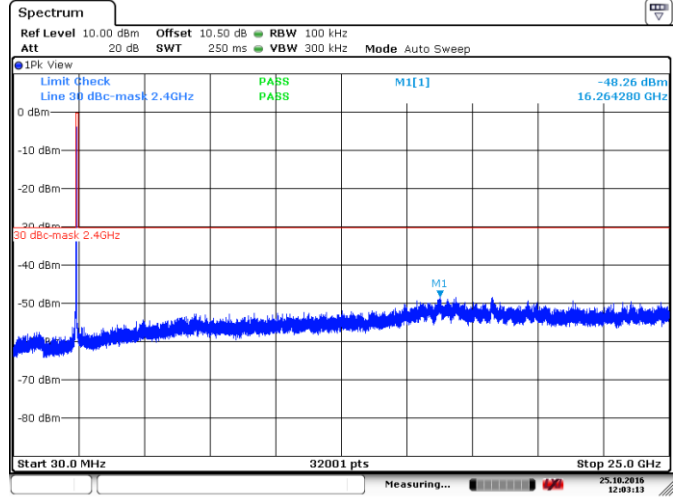

Date: 25.OCT.2016 12:03:13

Figure 8.4-2: Conducted spurious emissions for 802.11g (TX 2412 MHz)

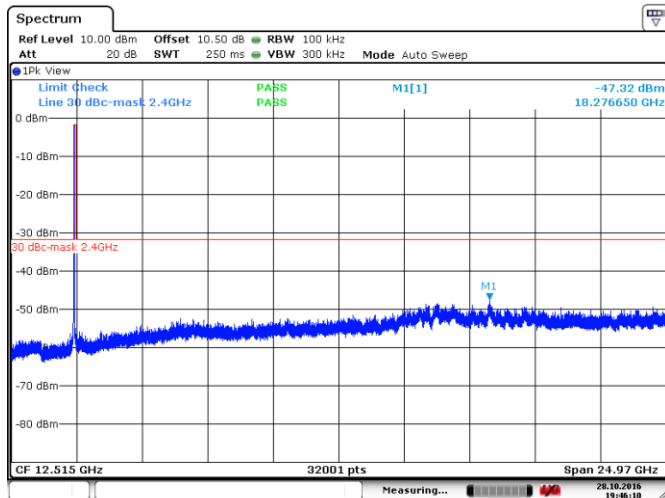

Date: 28.OCT.2016 19:46:10

Figure 8.4-3: Conducted spurious emissions for 802.11n HT20 (TX 2412 MHz)

8.4.6 Test data, continued

Conducted spurious emissions outside restricted bands, test results continued

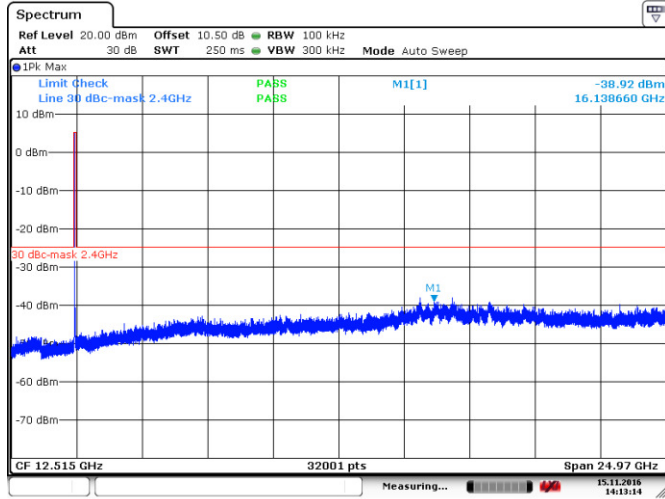


Figure 8.4-4: Conducted spurious emissions for 802.11b (TX 2437 MHz)

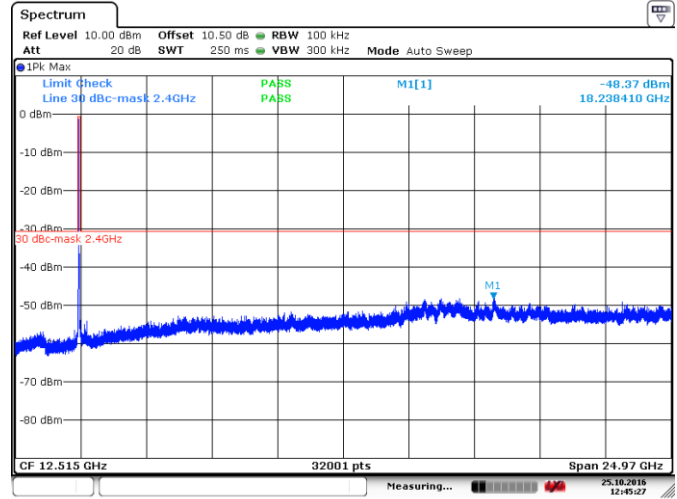


Figure 8.4-5: Conducted spurious emissions for 802.11g (TX 2437 MHz)


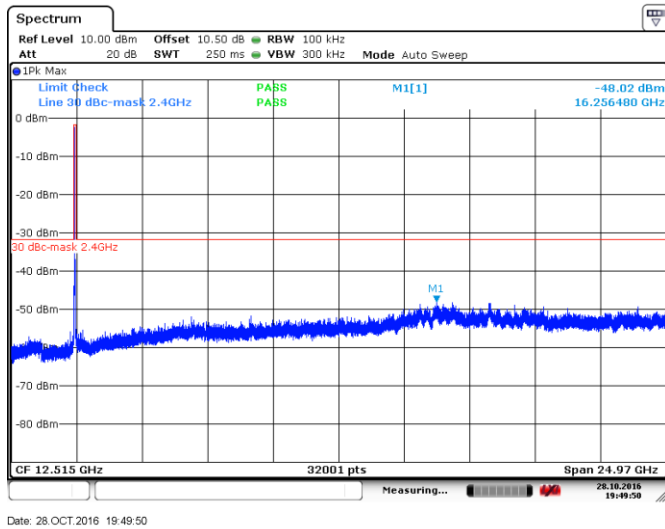


Figure 8.4-6: Conducted spurious emissions for 802.11n HT20 (TX 2437 MHz)


8.4.5 Test data, continued

Conducted spurious emissions outside restricted bands, test results continued

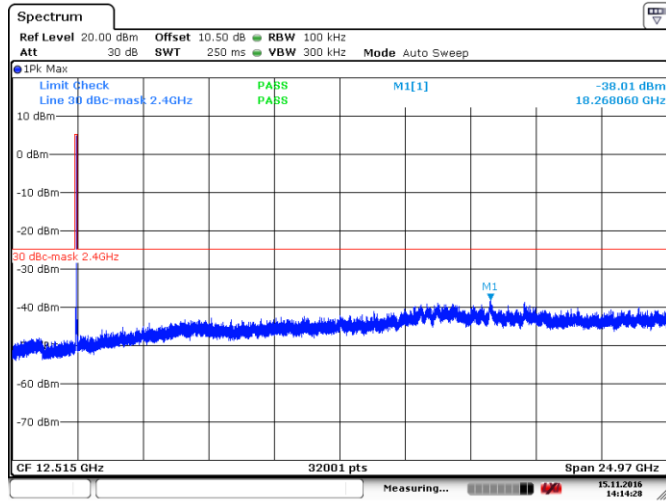


Date: 15.NOV.2016 14:14:27

Figure 8.4-7: Conducted spurious emissions for 802.11b (TX 2462 MHz)

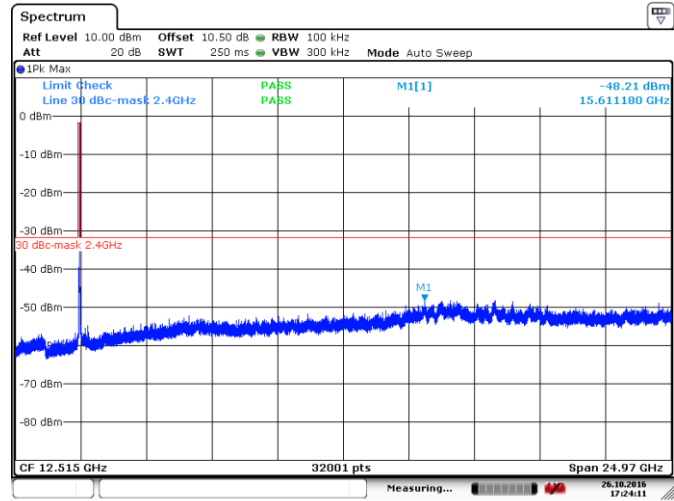

Date: 26.OCT.2016 17:24:11

Figure 8.4-8: Conducted spurious emissions for 802.11g (TX 2462 MHz)

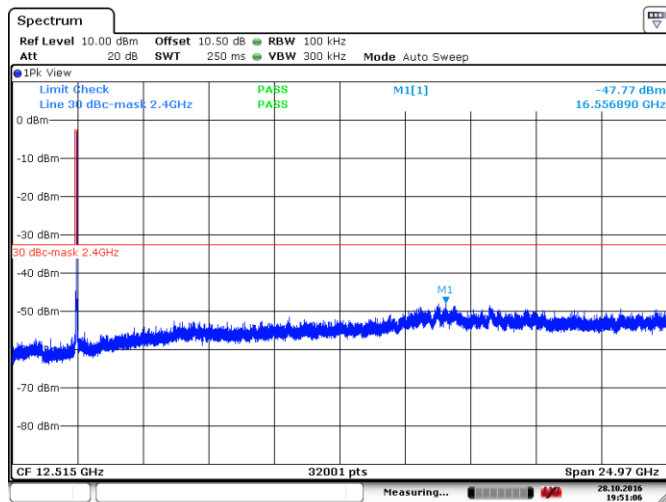


Date: 28.OCT.2016 19:51:07

Figure 8.4-9: Conducted spurious emissions for 802.11n HT20 (TX 2462 MHz)


8.4.5 Test data, continued

Conducted spurious emissions outside restricted bands test results, continued

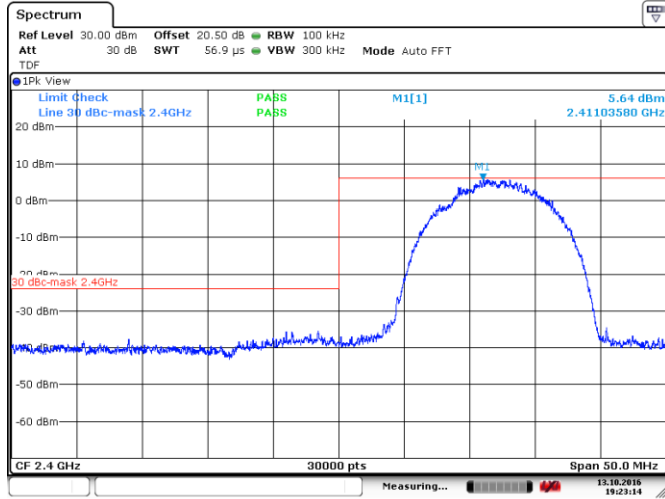


Date: 13.OCT.2016 19:23:14

Figure 8.4-10: Conducted spurious emissions Lower band edge for 802.11b, (TX 2412 MHz)

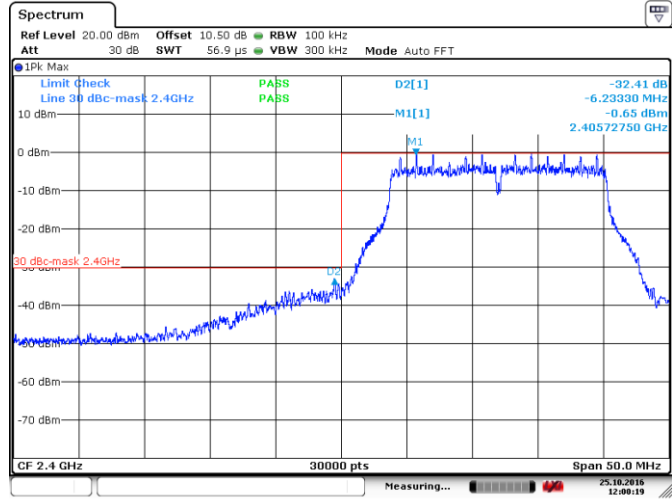

Date: 25.OCT.2016 12:00:18

Figure 8.4-11: Conducted spurious emissions Lower band edge for 802.11g, (TX 2412 MHz)

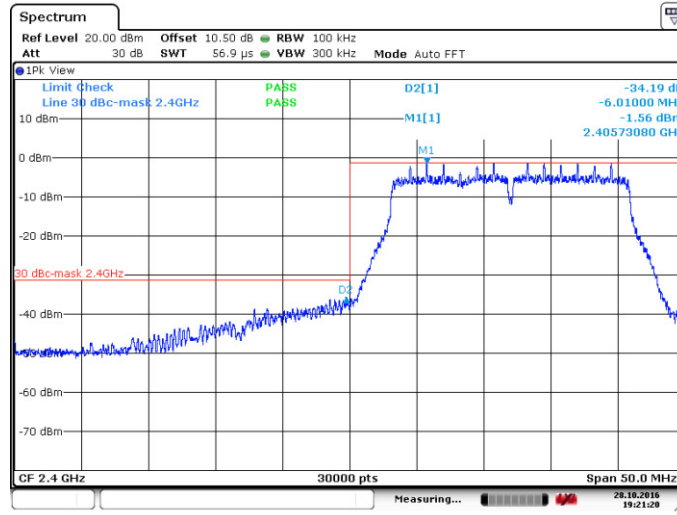


Date: 28.OCT.2016 19:21:19


Figure 8.4-12: Conducted spurious emissions Lower band edge for 802.11n, (TX 2412 MHz)

8.4.5 Test data, continued

Conducted spurious emissions outside restricted bands, continued

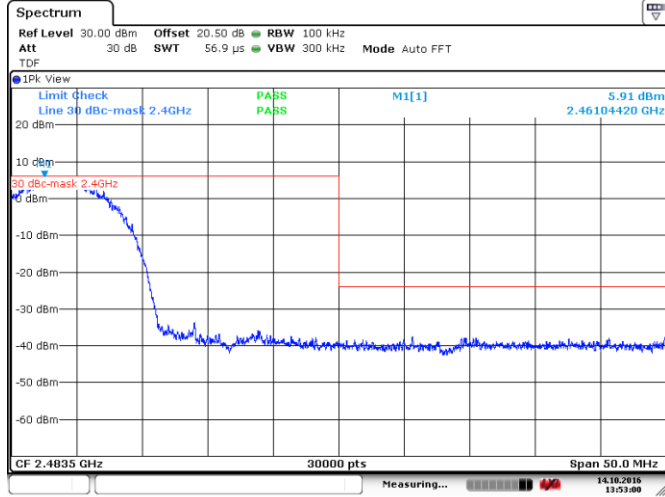


Date: 14.OCT.2016 13:53:00

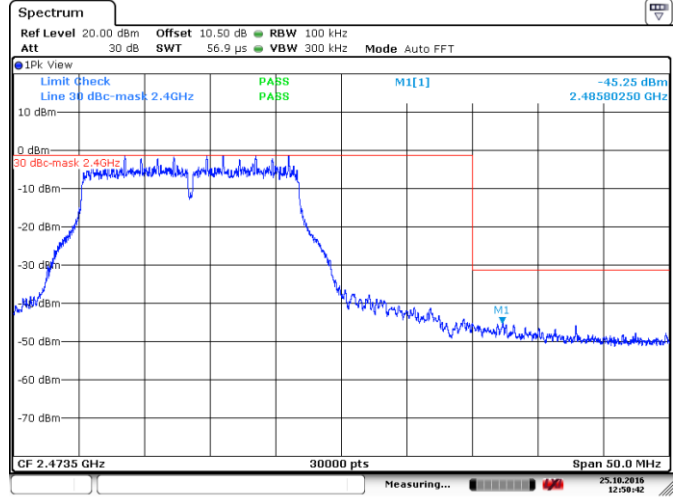

Date: 25.OCT.2016 12:50:42

Figure 8.4-13: Conducted spurious emissions Upper band edge for 802.11b, (TX 2462 MHz)

Figure 8.4-14: Conducted spurious emissions Upper band edge for 802.11g, (TX 2462 MHz)

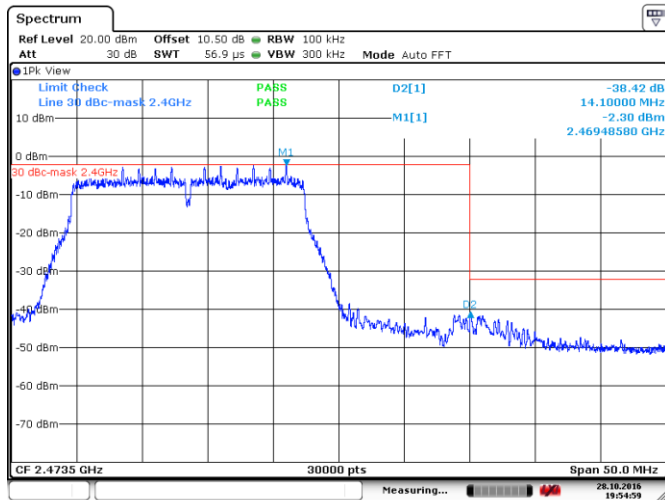

Date: 28.OCT.2016 19:54:59

Figure 8.4-15: Conducted spurious emissions Upper band edge for 802.11n HT20, (TX 2462 MHz)



8.4.5 Test data, continued

Table 8.4-4: Spurious emissions within restricted bands

| Modulation | Tx channel | Frequency, MHz | Peak field strength ¹ , dBµV/m | Peak field strength limit, dBµV/m | Peak margin, dB | Average field strength ¹ , dBµV/m | Average field strength limit, dBµV/m | Average margin, dB |
|------------|------------|----------------|---|-----------------------------------|-----------------|--|--------------------------------------|--------------------|
| 802.11b | low | 2390.0 | 62.5 | 74 | 11.5 | 51.1 | 54 | 2.9 |
| | high | 2483.5 | 63.0 | 74 | 11.0 | 51.7 | 54 | 2.3 |
| 802.11g | low | 2390.0 | 62.6 | 74 | 11.4 | 51.3 | 54 | 2.8 |
| | high | 2483.5 | 64.2 | 74 | 9.8 | 51.8 | 54 | 2.2 |
| 802.11n | low | 2390.0 | 62.6 | 74 | 11.5 | 51.4 | 54 | 2.7 |
| | high | 2483.5 | 65.7 | 74 | 8.3 | 51.8 | 54 | 2.2 |

Notes: ¹ Field strength (dBµV/m) = Spectrum analyzer value (dBµV) + transducer factors (dB)
 Transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).
 Spectrum were investigated from 30 MHz to 25 GHz, all other emissions were more than 10 dB below the limit.

8.4.1 Test data, continued

Radiated spurious emissions within restricted bands test results, continued

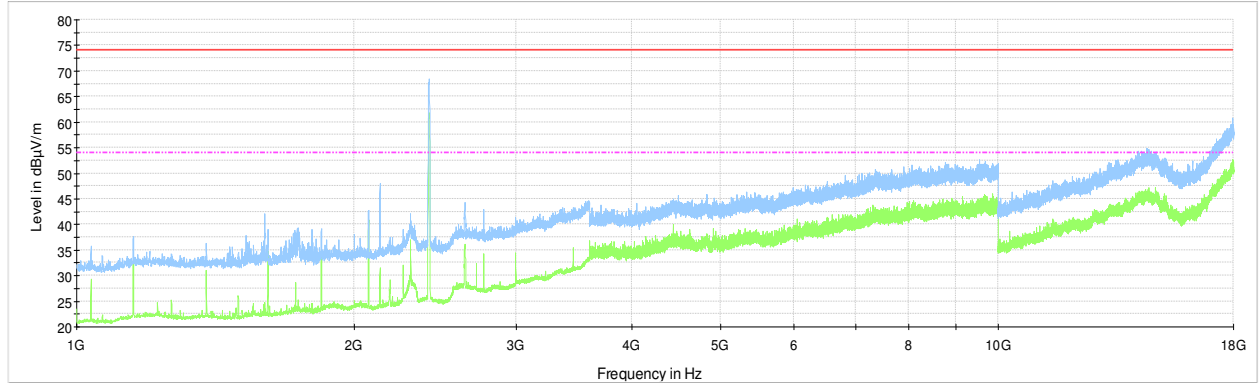


Figure 8.4-16: Radiated spurious emissions Upper band edge for 802.11b sample plot

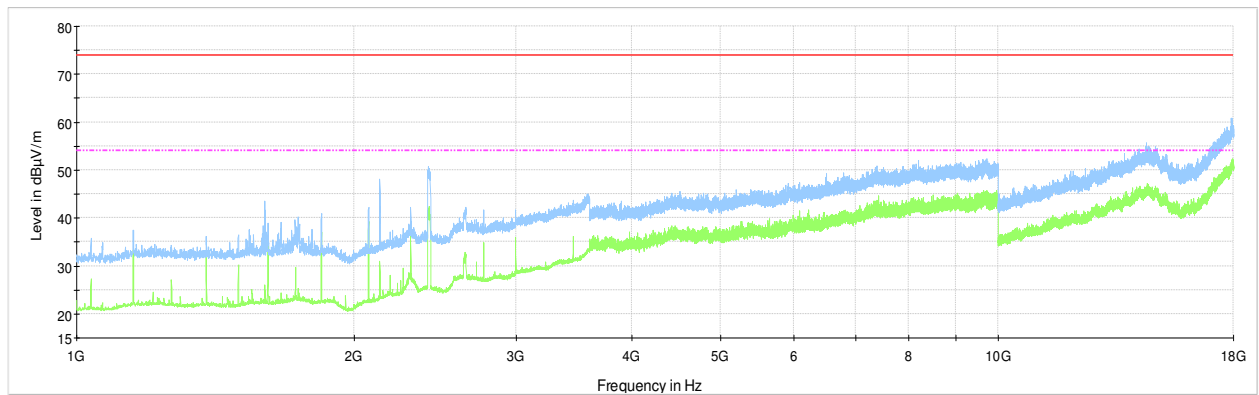


Figure 8.4-17: Radiated spurious emissions Upper band edge for 802.11g sample plot

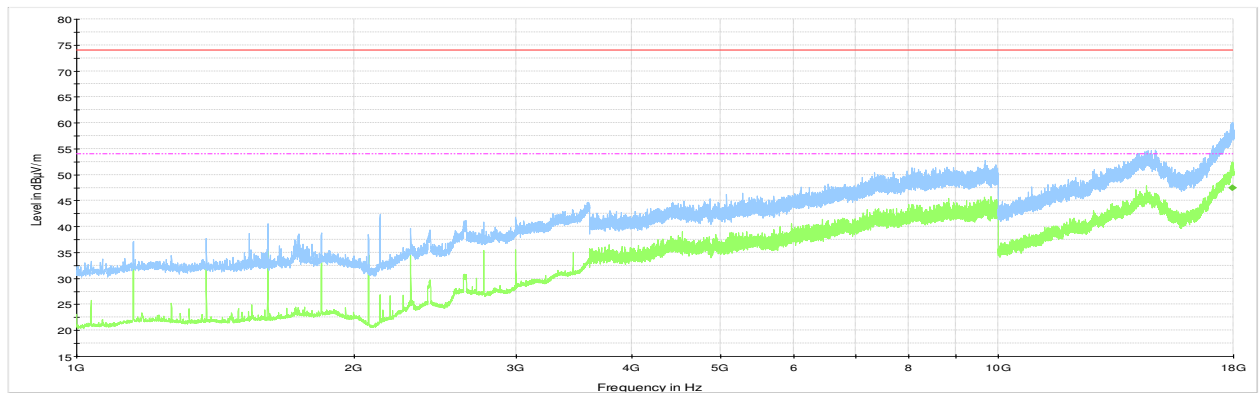


Figure 8.4-18: Radiated spurious emissions Upper band edge for 802.11n sample plot

Note: Fundamental emissions in the plots above were attenuated by notch filter
Spectrum were investigated from 30 MHz to 25 GHz, no emission related to RF transmitter were detected above 18 GHz and below 1 GHz within 10 dB below the limit.



8.5 FCC 15.247(e) and RSS-247 5.2(2) Power spectral density for digitally modulated devices

8.5.1 Definitions and limits

FCC §15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

RSS-247, Clause 5.2 (2):

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

8.5.2 Test summary

| | | | | | |
|-------------|--|-------------------|------------|--------------|-----------|
| Verdict | Pass | | | | |
| Test date | October 13, 2016 to November 15, 2016 | Test engineer | Yong Huang | | |
| Temperature | 23 °C | Relative humidity | 50 % | Air pressure | 1003 mbar |

8.5.3 Notes

Measurements were performed as per 558074 D01 DTS Meas Guidance v03r05. (The test was performed using method described in section 10.3 Method AVGPS-1 (trace averaging with EUT transmitting at full power throughout each sweep).

8.5.4 Setup details

Spectrum analyser settings:

| | |
|-------------------------|---------------|
| Resolution bandwidth: | 100 kHz |
| Video bandwidth: | 1 MHz |
| Frequency span: | 30 MHz |
| Detector mode: | RMS |
| Trace mode: | Power Average |
| Averaging sweeps number | 100 |
| Sweep points | 1000 |




8.5.5 Test data

Table 8.5-1: PSD measurements results


| Modulation | Frequency, MHz | PSD, dBm/100 kHz | PSD limit, dBm/3 kHz | Margin, dB |
|------------|----------------|------------------|----------------------|------------|
| 802.11b | 2412 | -3.6 | 8 | 11.6 |
| | 2437 | -3.0 | 8 | 11.0 |
| | 2462 | -4.8 | 8 | 12.8 |
| 802.11g | 2412 | -8.6 | 8 | 16.6 |
| | 2437 | -9.2 | 8 | 17.2 |
| | 2462 | -9.7 | 8 | 17.7 |
| 802.11n | 2412 | -9.9 | 8 | 17.9 |
| | 2437 | -10.4 | 8 | 18.4 |
| | 2462 | -11.1 | 8 | 19.1 |

8.5.5 Test data, continued

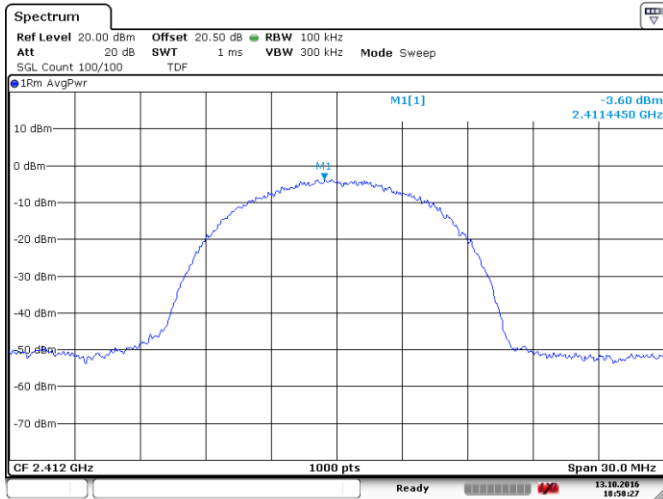


Date: 13.OCT.2016 18:58:27

Figure 8.5-1: PSD sample plot on 802.11b

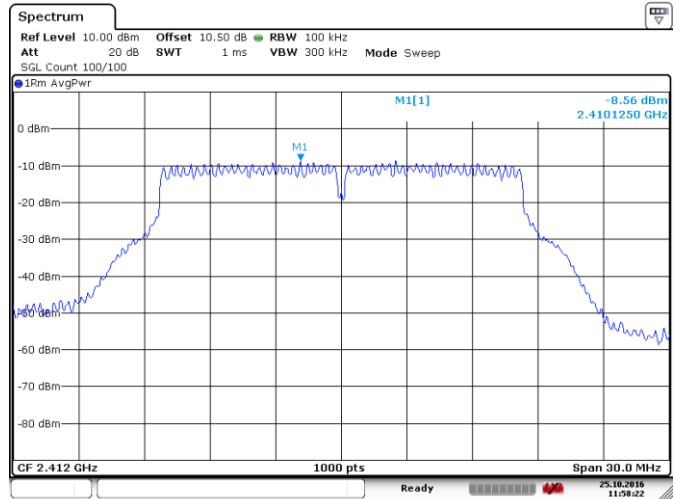

Date: 25.OCT.2016 11:58:23

Figure 8.5-2: PSD sample plot on 802.11g

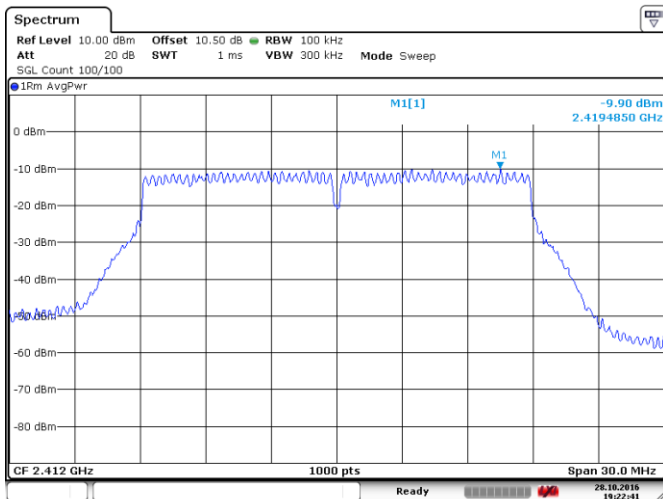


Date: 28.OCT.2016 19:22:41


Figure 8.5-3: PSD sample plot on 802.11n

Section 9. Block diagrams of test set-ups

9.1 Radiated emissions set-up for frequencies below 1 GHz

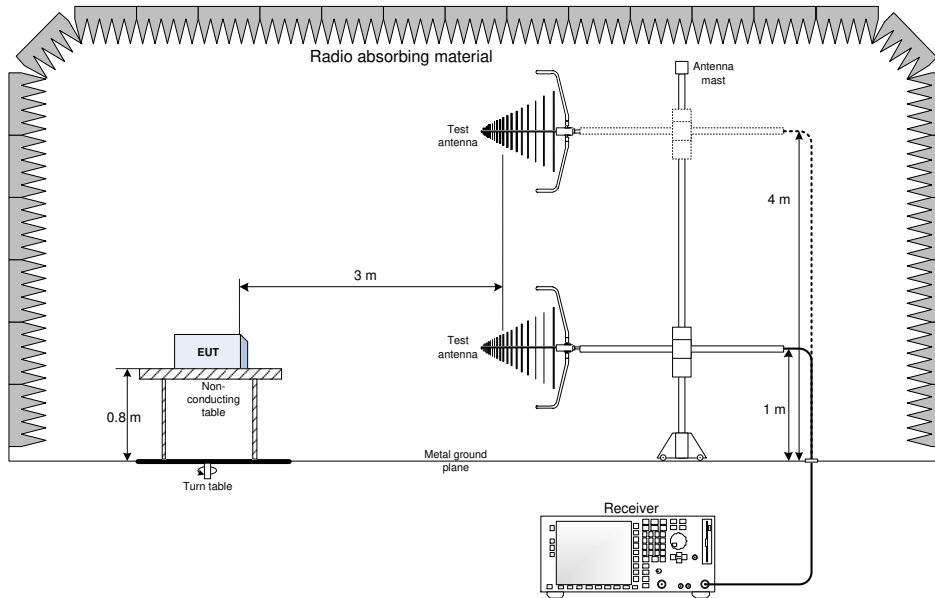

9.2 Radiated emissions set-up for frequencies above 1 GHz

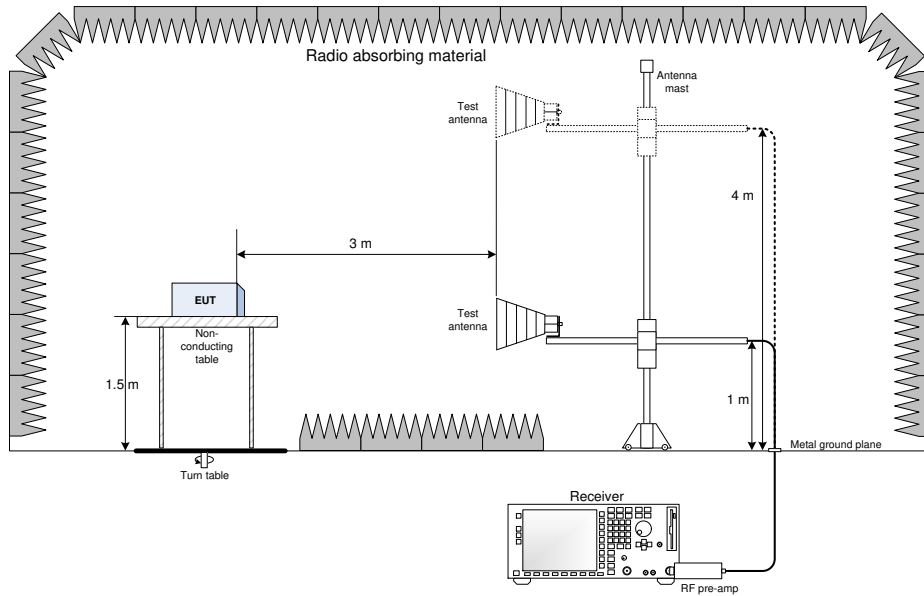

9.3 Conducted emissions set-up

