




天线规格

Antenna Specification


| Electrical Properties | |
|------------------------------|------------------|
| Frequency | 2.4-2.5GHz |
| Impedance | 50 Ohm Nominal |
| V.S.W.R | 2.0 Max |
| Gain | 2.0dBi |
| Radiation | Omni-directional |
| Polarization | Linear |
| Physical Properties | |
| Connector | None |
| Cable Type | None |
| Cable Length | None |
| Cable Color | None |
| Operating Temp. | -40 ~ +85 °C |
| Storage Temp / Humidity | 25 ± 5 °C / <70% |






Agilent E5071B

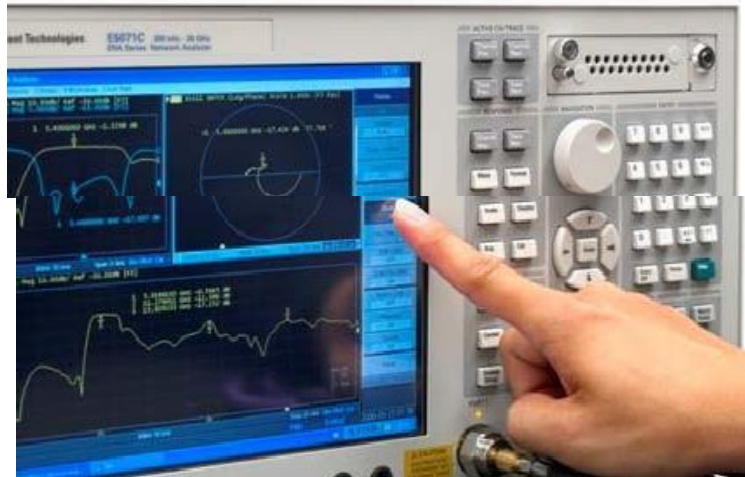

S Parameter Test // BT Antenna

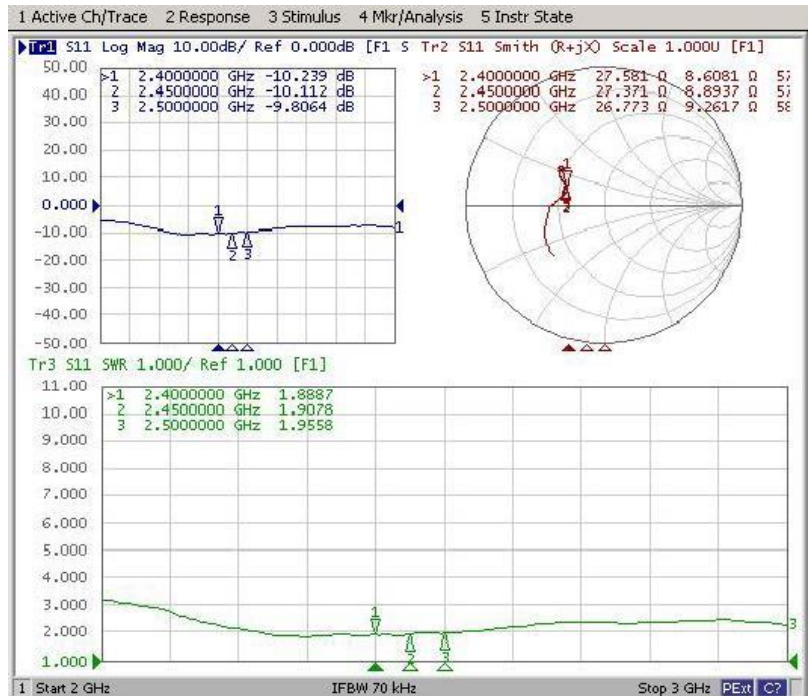

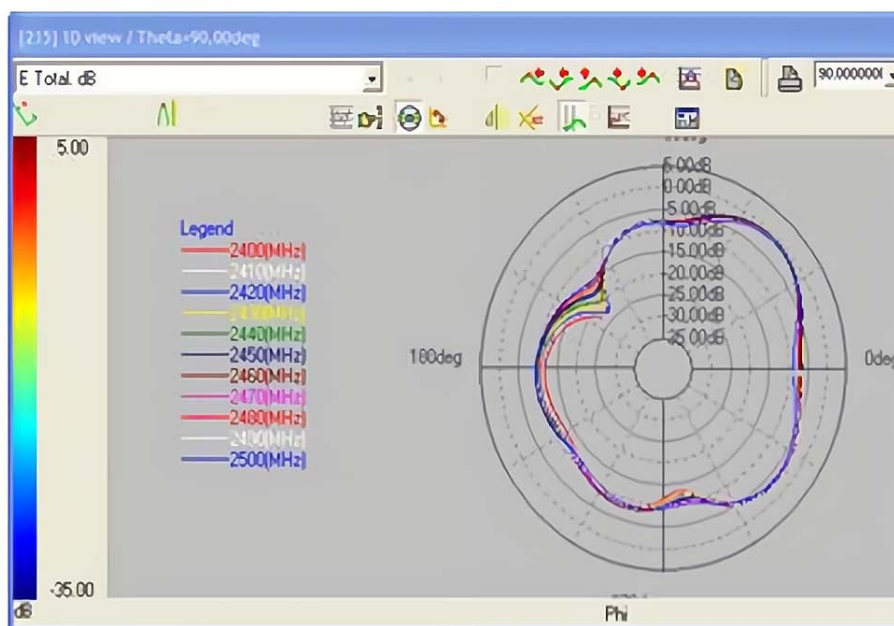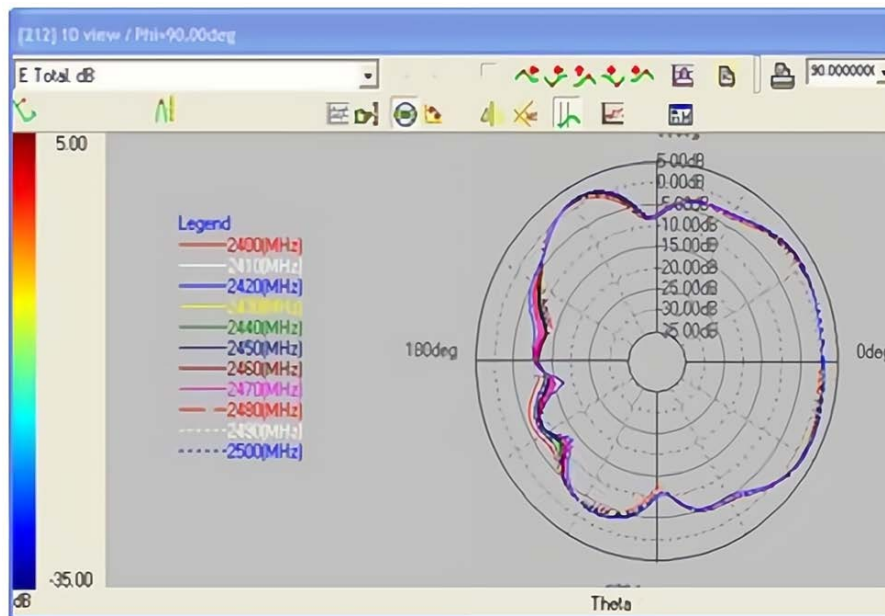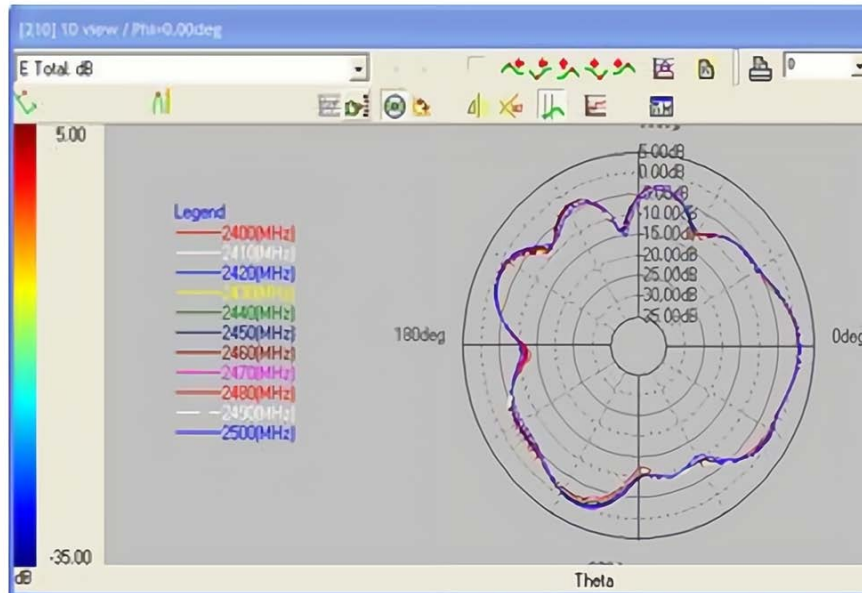

add: 东莞市长安镇沙头社区木鱼路59号元富工业区 Tel:0769-82586086 Fax:0769-82586086
Dongguan YiJia Electronics Communication Technology Co., LTD
59 Muyu Road, Shatou Community, Chang 'an Town, Dongguan City, China



| Passive Test For BT Antenna | | | |
|-----------------------------|----------|-----------|------------|
| Freq (MHz) | Effi (%) | Effi (dB) | Gain (dBi) |
| 2400 | 26.2 | -5.8 | 1.5 |
| 2410 | 27.4 | -5.6 | 1.7 |
| 2420 | 28.1 | -5.5 | 2.0 |
| 2430 | 26.9 | -5.7 | 1.5 |
| 2440 | 25.6 | -5.9 | 1.3 |
| 2450 | 26.3 | -5.8 | 1.4 |
| 2460 | 26.4 | -5.8 | 1.6 |
| 2470 | 27.0 | -5.7 | 1.6 |
| 2480 | 26.2 | -5.8 | 1.6 |
| 2490 | 26.3 | -5.8 | 1.6 |
| 2500 | 25.9 | -5.9 | 1.6 |