



1. Specification & Dimension

Electrical Properties	
Frequency Range	2.4~2.4835GHz 5.15~5.85GHz
Impedance	50Ω
V.S.W.R.	≤2.0@2.4~2.4835GHz ≤2.8@5.15~5.85GHz
Radiation	Omni
Gain	7±0.5dBi@2.4~2.4835GHz 7±1dBi@5.15~5.85GHz
Polarization	Vertical
Test Ground Size	N/A
Mechanical Properties	
Antenna Radome	Fiberglass
Connector Type	N PLUG
Connector Finish	PIN: Gold plated 1u" min. Body: Ni plate 60 u" min.
IP Level	IP-67
Power Handling	10W
Dimension	L=528mm
Weight	152g (est)
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

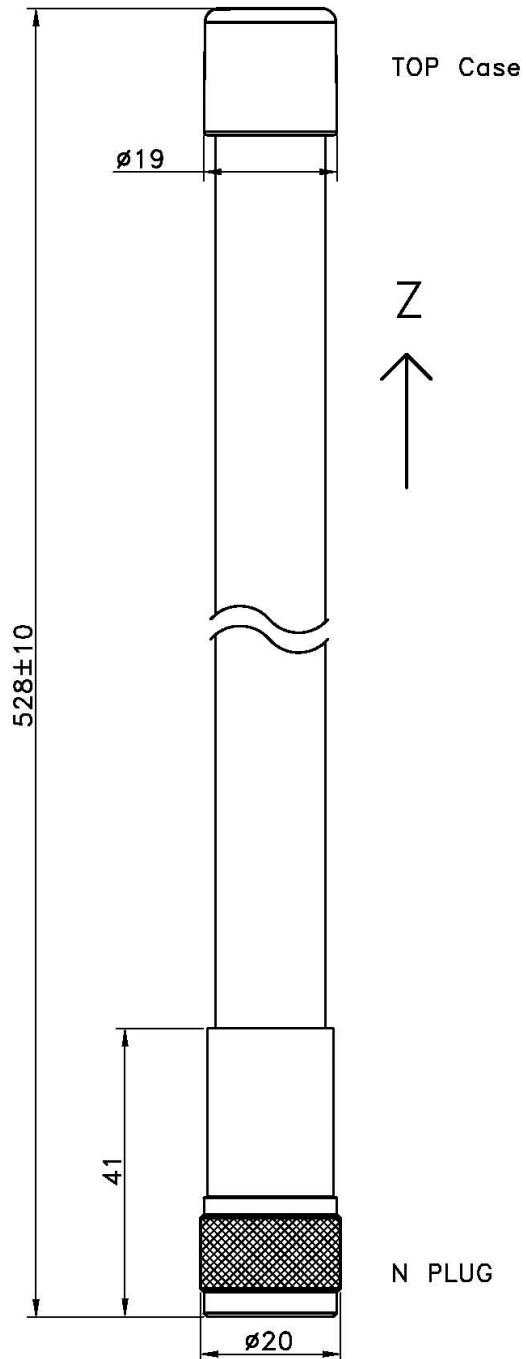

2.3 3D Pattern

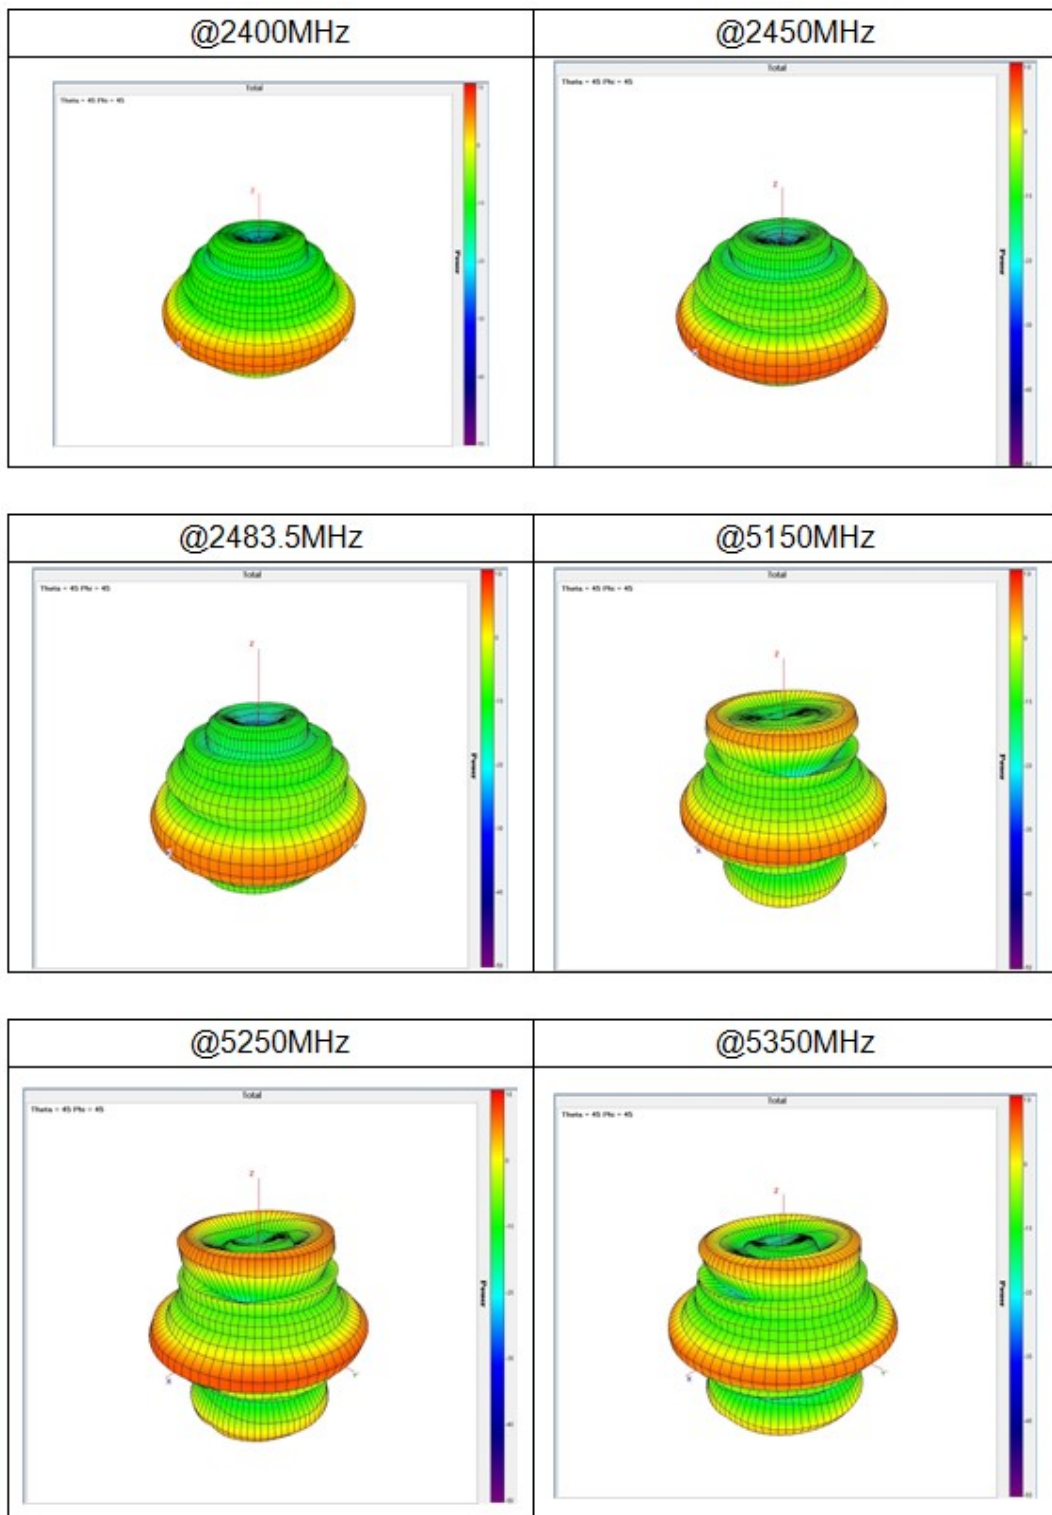

2.3 3D Pattern

