


Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	--	20.52	20.57	--	23.56	27.39	--	Pass
	5220	--	20.58	20.49	--	23.55	27.39	--	Pass
	5240	--	20.52	20.75	--	23.65	27.39	--	Pass
	5260	20.82	14.65	14.98	--	17.83	21.85	24.18	Pass
	5300	20.78	13.89	14.66	--	17.30	21.85	24.18	Pass
	5320	20.98	13.76	14.63	--	17.23	21.85	24.22	Pass
	5500	21.18	14.12	13.86	--	17.00	21.13	24.26	Pass
	5580	20.78	13.56	13.79	--	16.69	21.13	24.18	Pass
	5700	20.06	15.17	14.36	--	17.79	21.13	24.02	Pass
	5720(U-NII-2C)	15.51	13.83	13.43	0.13	16.77	21.13	22.91	Pass
	5720(U-NII-3)	--	7.98	7.60	0.13	10.93	27.43	--	Pass
	5745	--	22.52	23.35	--	25.97	27.43	--	Pass
	5785	--	22.46	21.75	--	25.13	27.43	--	Pass
	5825	--	22.17	22.28	--	25.24	27.43	--	Pass


Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

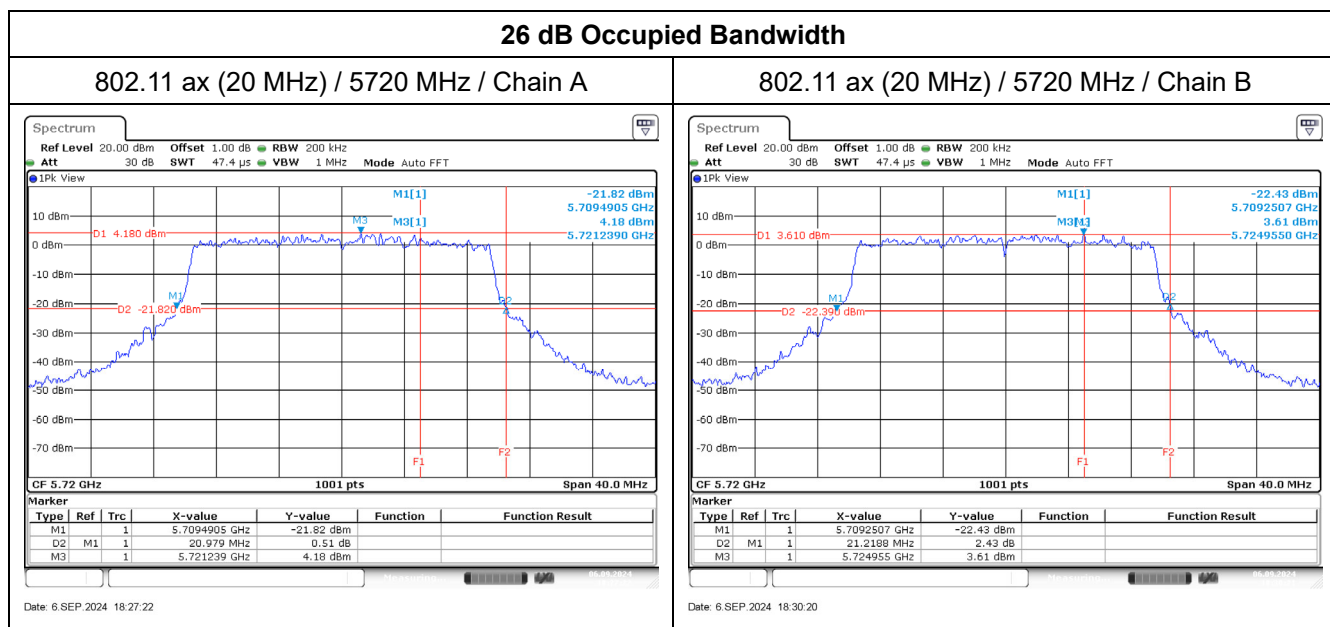


Maximum conducted output power:

802.11 ax (20 MHz) / 5720 MHz (U-NII-2C) / Chain A

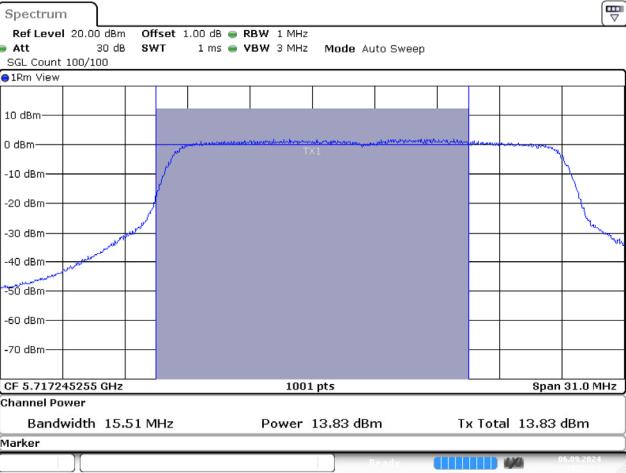


Date: 6 SEP.2024 18:27:54

802.11ax (20MHz) / 5720 MHz (U-NII-3) / Chain A

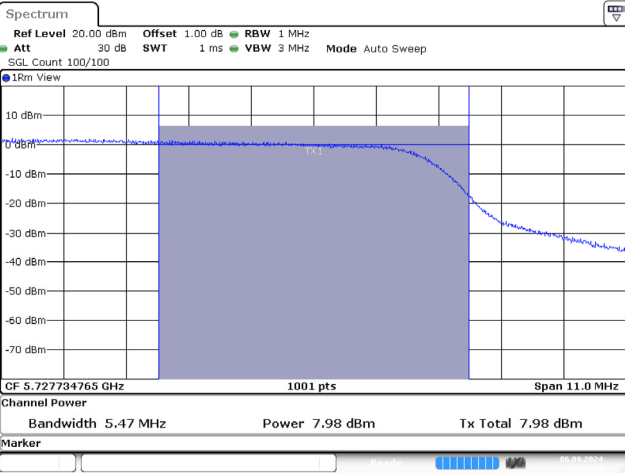


Date: 6 SEP.2024 18:27:57

802.11ax (20MHz) / 5720 MHz (U-NII-2C) / Chain B

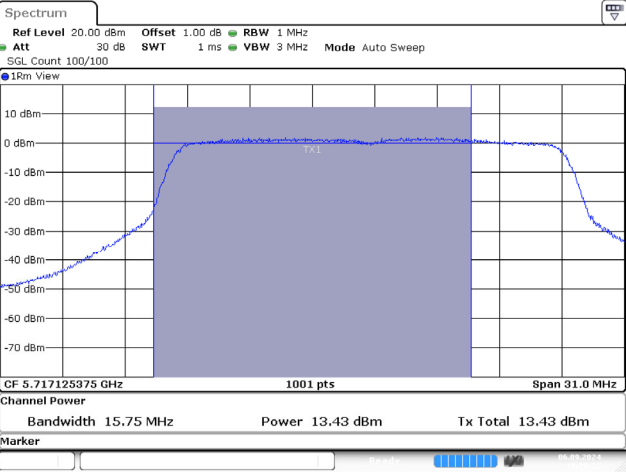

Date: 6 SEP.2024 18:30:52

802.11ax (20MHz) / 5720 MHz (U-NII-3) / Chain B

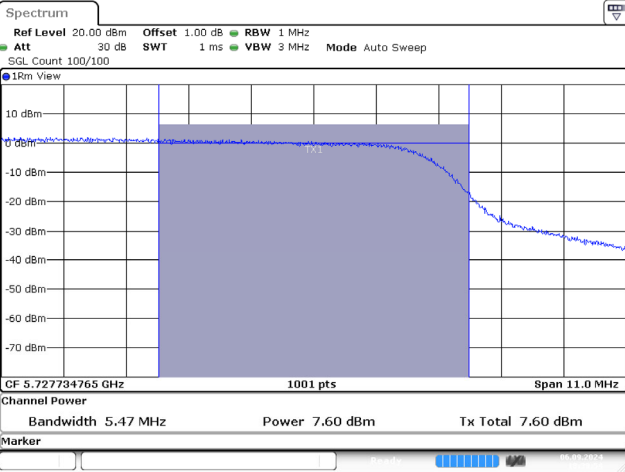


Date: 6 SEP.2024 18:30:55

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log(BW)	
802.11ax (40 MHz)	5190	--	18.05	18.26	--	21.17	27.39	--	Pass
	5230	--	23.70	23.66	--	26.69	27.39	--	Pass
	5270	40.84	17.64	18.05	--	20.86	21.85	27.11	Pass
	5310	41.16	17.34	17.97	--	20.68	21.85	27.14	Pass
	5510	41.00	16.97	17.27	--	20.13	21.13	27.13	Pass
	5550	41.16	16.95	17.09	--	20.03	21.13	27.14	Pass
	5670	41.16	17.33	17.87	--	20.62	21.13	27.14	Pass
	5710(U-NII-2C)	35.70	17.75	17.53	0.11	20.76	21.13	26.53	Pass
	5710(U-NII-3)	--	7.46	7.17	0.11	10.44	27.43	--	Pass
	5755	--	22.12	22.70	--	25.43	27.43	--	Pass
	5795	--	22.98	22.26	--	25.65	27.43	--	Pass


Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

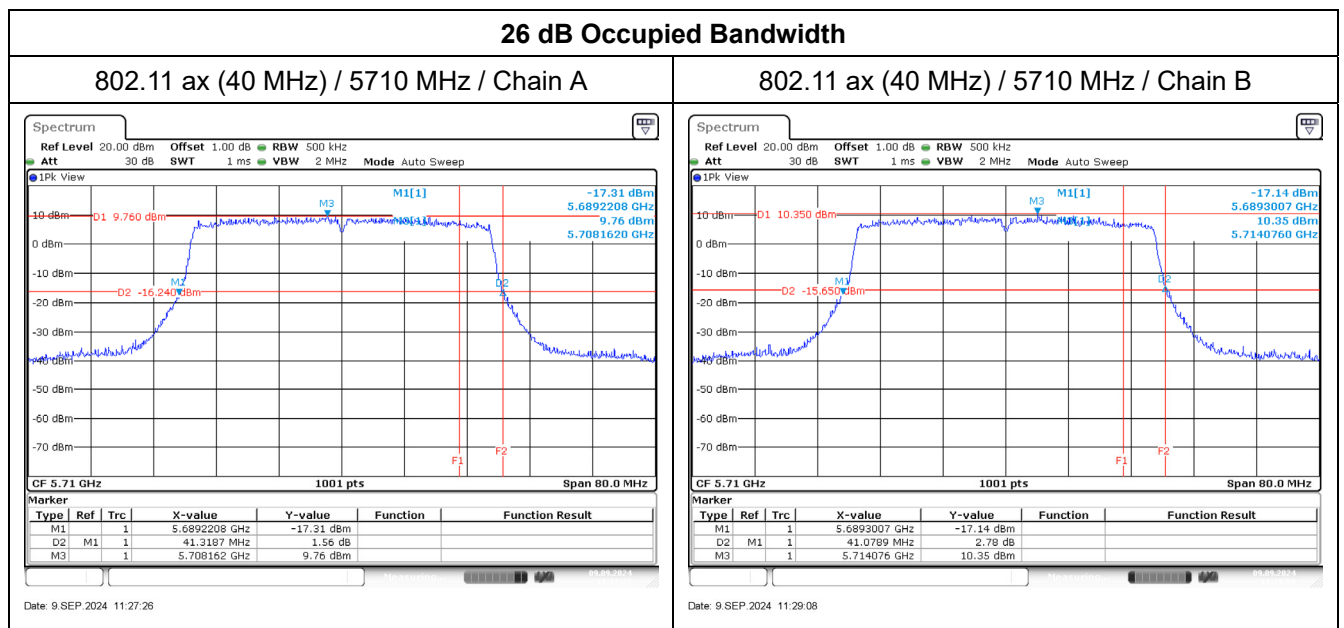


Maximum conducted output power:


802.11 ax (40 MHz) / 5710 MHz (U-NII-2C) / Chain A

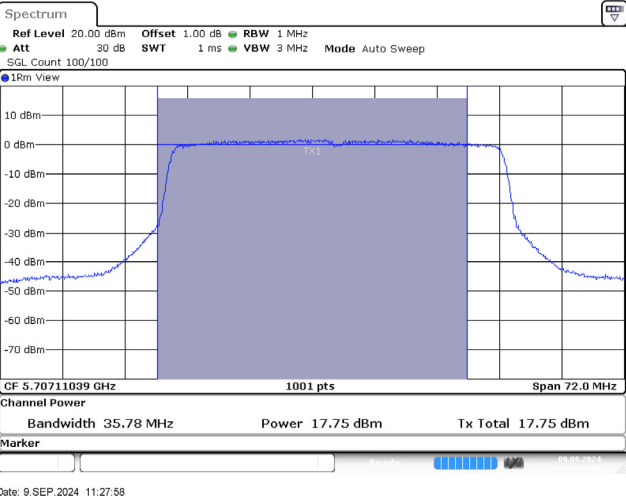


802.11ax (40MHz) / 5710 MHz (U-NII-3) / Chain A

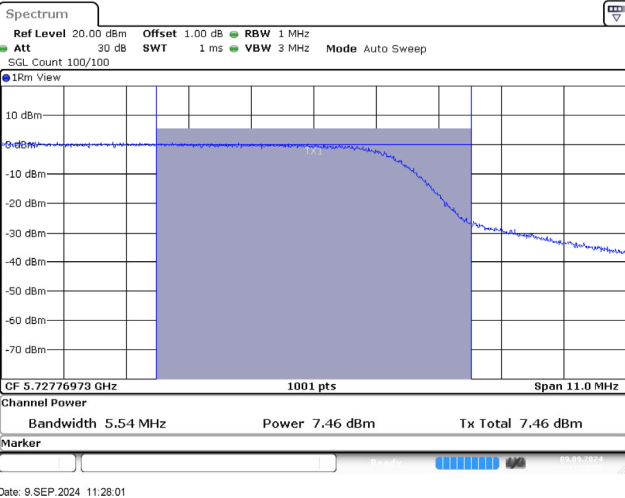

802.11ax (40MHz) / 5710 MHz (U-NII-2C) / Chain B

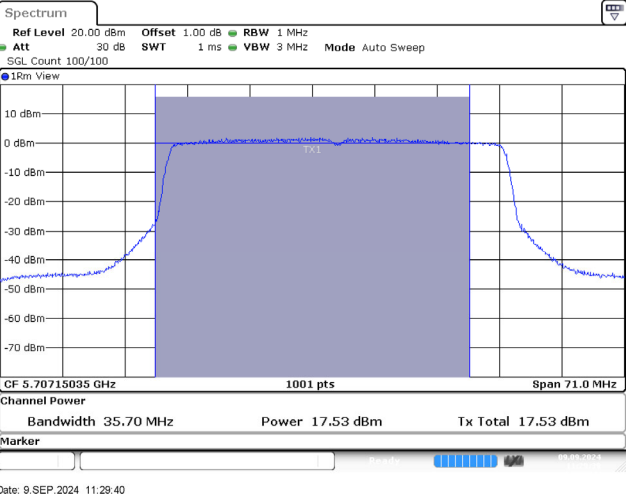


802.11ax (40MHz) / 5710 MHz (U-NII-3) / Chain B

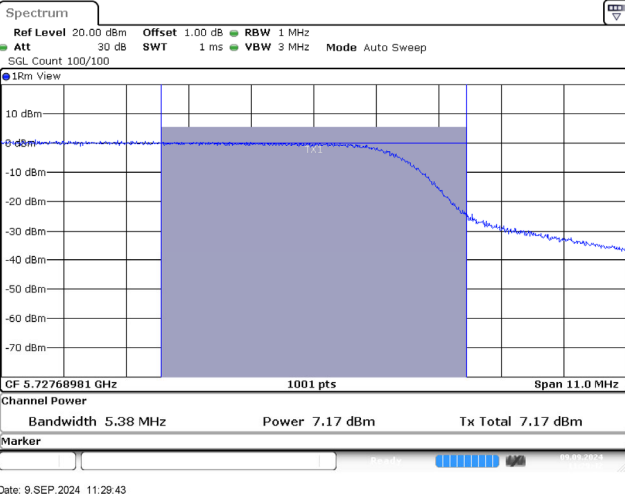

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	--	17.01	16.90	--	19.97	27.39	--	Pass
	5290	82.48	18.29	18.74	--	21.53	21.85	30.16	Pass
	5530	82.16	16.19	16.33	--	19.27	21.13	30.15	Pass
	5610	81.84	17.91	18.18	--	21.06	21.13	30.13	Pass
	5690(U-NII-2C)	76.56	17.93	17.51	0.17	20.91	21.13	29.84	Pass
	5690(U-NII-3)	--	3.39	2.97	0.17	6.37	27.43	--	Pass
	5775	--	21.27	21.13	--	24.21	27.43	--	Pass


Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

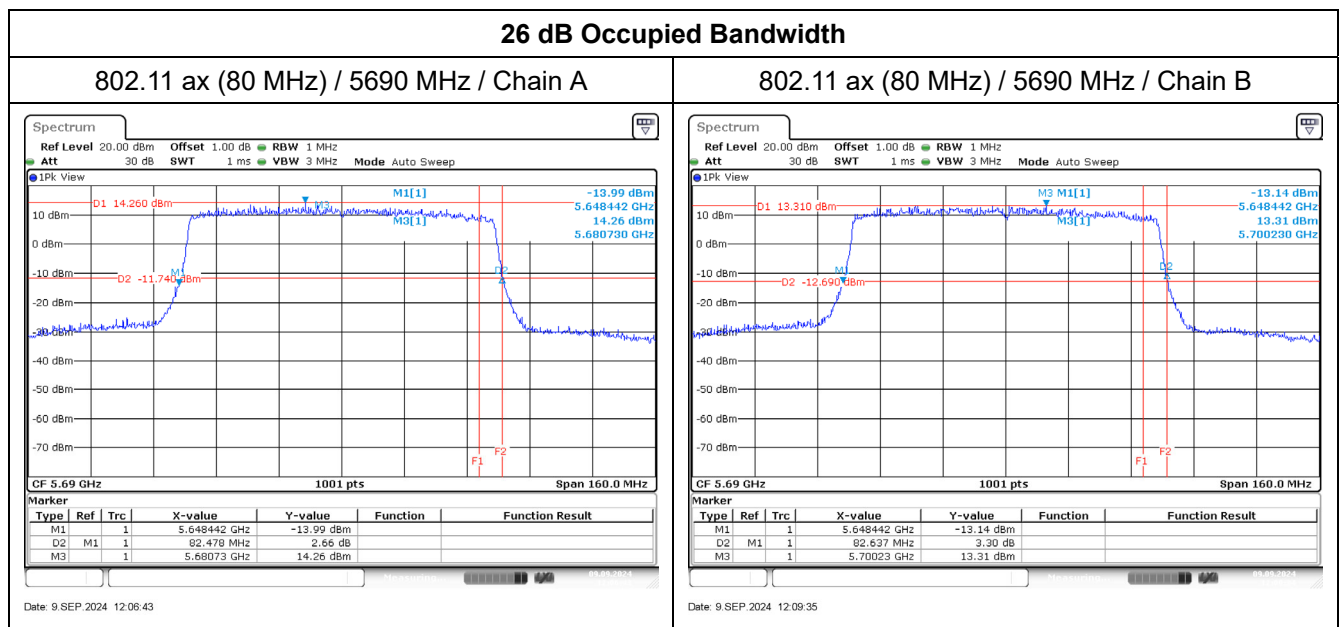


Maximum conducted output power:


802.11 ax (80 MHz) / 5690 MHz (U-NII-2C) / Chain A

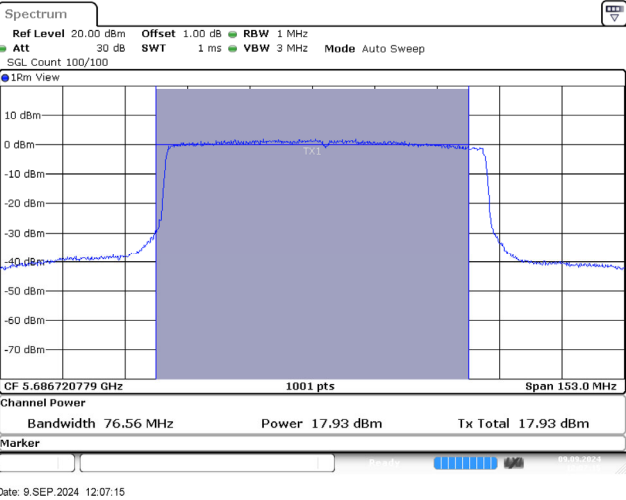


802.11ax (80MHz) / 5690 MHz (U-NII-3) / Chain A

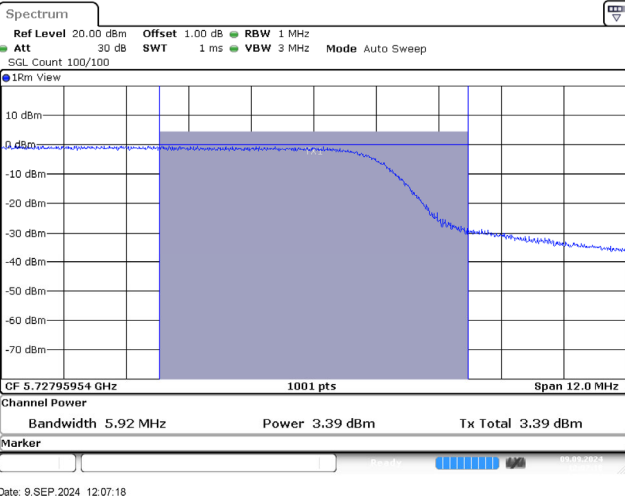

802.11ax (80 MHz) / 5690 MHz (U-NII-2C) / Chain B

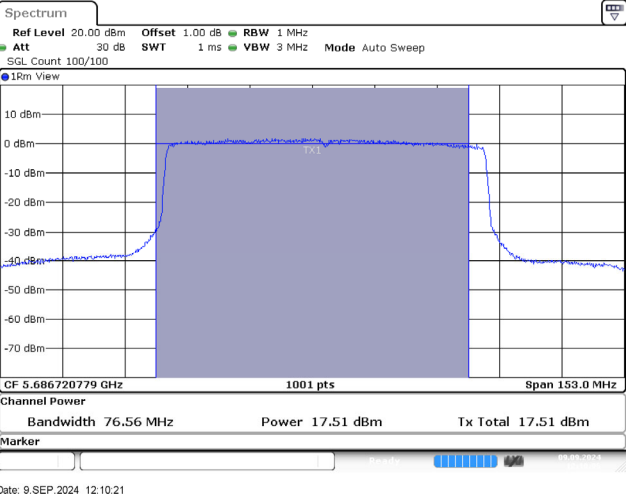

802.11ax (80MHz) / 5690 MHz (U-NII-3) / Chain B

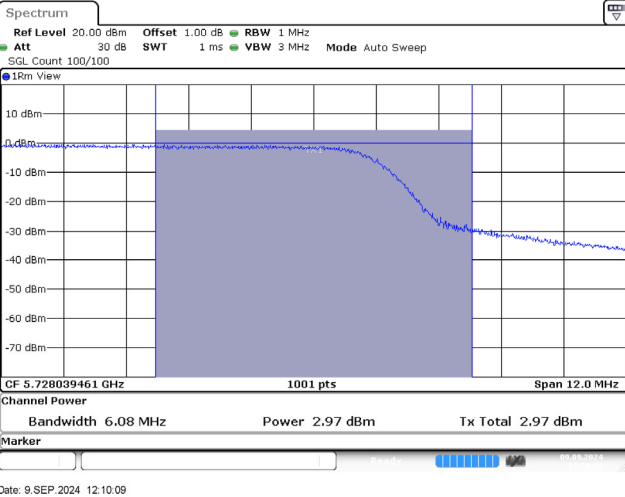

Beamforming mode

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	--	17.51	17.56	--	20.55	24.38	--	Pass
	5220	--	17.57	17.48	--	20.54	24.38	--	Pass
	5240	--	17.51	17.74	--	20.64	24.38	--	Pass
	5260	20.82	11.64	11.97	--	14.82	18.84	24.18	Pass
	5300	20.78	10.88	11.65	--	14.29	18.84	24.18	Pass
	5320	20.98	10.75	11.62	--	14.22	18.84	24.22	Pass
	5500	21.18	11.11	10.85	--	13.99	18.12	24.26	Pass
	5580	20.78	10.55	10.78	--	13.68	18.12	24.18	Pass
	5700	20.06	12.16	11.35	--	14.78	18.12	24.02	Pass
	5720(U-NII-2C)	15.51	10.82	10.42	0.13	13.76	18.12	22.91	Pass
	5720(U-NII-3)	--	4.97	4.59	0.13	7.92	24.42	--	Pass
	5745	--	19.51	20.34	--	22.96	24.42	--	Pass
	5785	--	19.45	18.74	--	22.12	24.42	--	Pass
	5825	--	19.16	19.27	--	22.23	24.42	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log(BW)	
802.11ax (40 MHz)	5190	--	15.04	15.25	--	18.16	24.38	--	Pass
	5230	--	20.69	20.65	--	23.68	24.38	--	Pass
	5270	40.84	14.63	15.04	--	17.85	18.84	27.11	Pass
	5310	41.16	14.33	14.96	--	17.67	18.84	27.14	Pass
	5510	41.00	13.96	14.26	--	17.12	18.12	27.13	Pass
	5550	41.16	13.94	14.08	--	17.02	18.12	27.14	Pass
	5670	41.16	14.32	14.86	--	17.61	18.12	27.14	Pass
	5710(U-NII-2C)	35.70	14.74	14.52	0.11	17.75	18.12	26.53	Pass
	5710(U-NII-3)	--	4.45	4.16	0.11	7.43	24.42	--	Pass
	5755	--	19.11	19.69	--	22.42	24.42	--	Pass
	5795	--	19.97	19.25	--	22.64	24.42	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	--	14.00	13.89	--	16.96	24.38	--	Pass
	5290	82.48	15.28	15.73	--	18.52	18.84	30.16	Pass
	5530	82.16	13.18	13.32	--	16.26	18.12	30.15	Pass
	5610	81.84	14.90	15.17	--	18.05	18.12	30.13	Pass
	5690(U-NII-2C)	76.56	14.92	14.50	0.17	17.90	18.12	29.84	Pass
	5690(U-NII-3)	--	0.38	-0.04	0.17	3.36	24.42	--	Pass
	5775	--	18.26	18.12	--	21.20	24.42	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Slave mode

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11a	5180	--	13.75	13.90	--	16.84	21.39	--	Pass
	5220	--	13.66	13.64	--	16.66	21.39	--	Pass
	5240	--	13.69	13.83	--	16.77	21.39	--	Pass
	5260	20.14	14.13	14.49	--	17.32	21.85	24.04	Pass
	5300	20.30	13.83	14.53	--	17.20	21.85	24.07	Pass
	5320	19.94	13.67	14.64	--	17.19	21.85	24.00	Pass
	5500	19.98	13.66	13.55	--	16.62	21.13	24.01	Pass
	5580	20.02	13.60	13.97	--	16.80	21.13	24.01	Pass
	5700	20.06	14.59	14.00	--	17.32	21.13	24.02	Pass
	5720(U-NII-2C)	15.19	13.43	13.21	0.29	16.62	21.13	22.82	Pass
	5720(U-NII-3)	--	6.89	6.61	0.29	10.05	27.43	--	Pass
	5745	--	23.17	23.67	--	26.44	27.43	--	Pass
	5785	--	22.76	22.15	--	25.48	27.43	--	Pass
	5825	--	22.68	22.94	--	25.82	27.43	--	Pass


Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

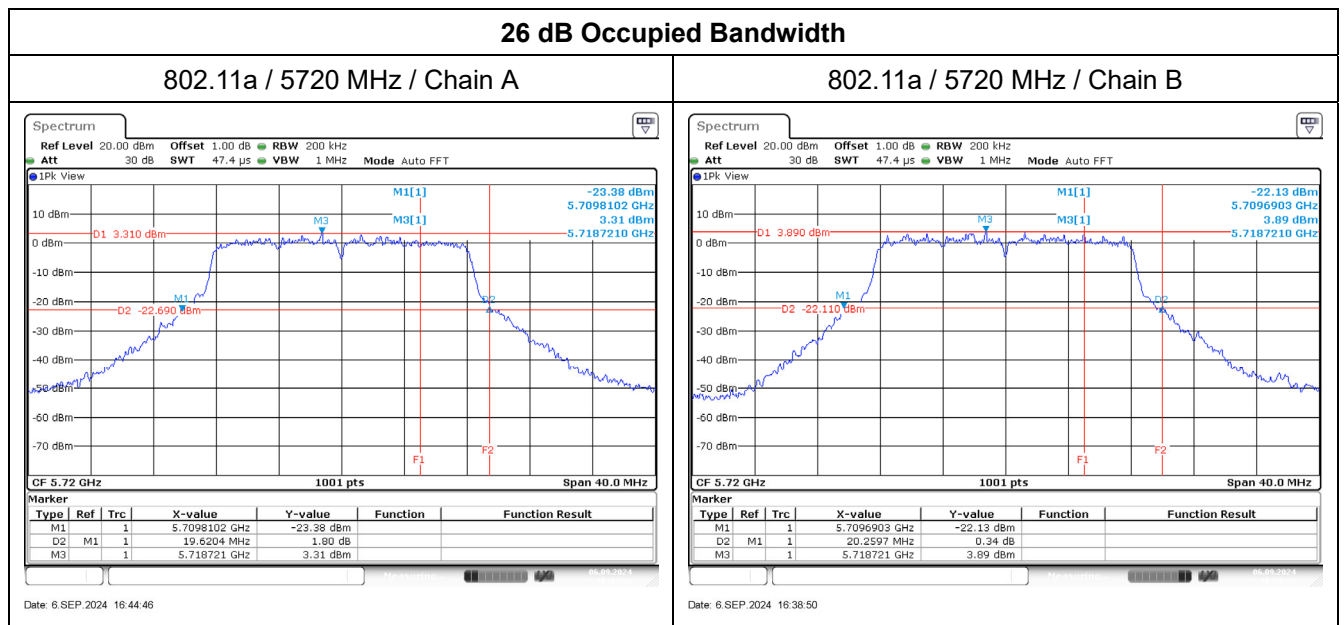


Maximum conducted output power:


802.11a / 5720 MHz (U-NII-2C) / Chain A

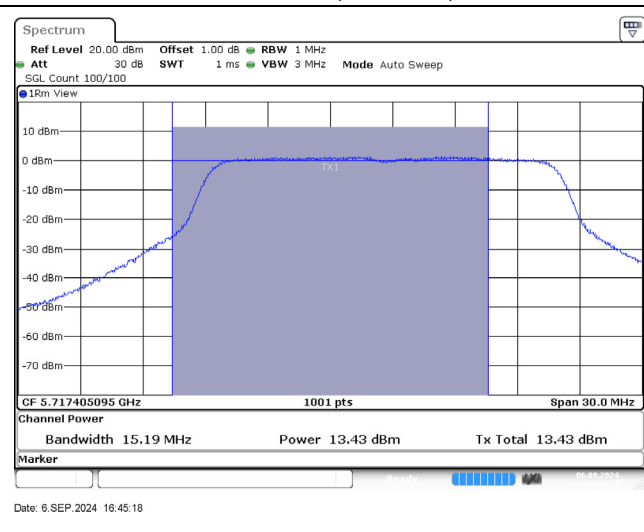


802.11a / 5720 MHz (U-NII-3) / Chain A

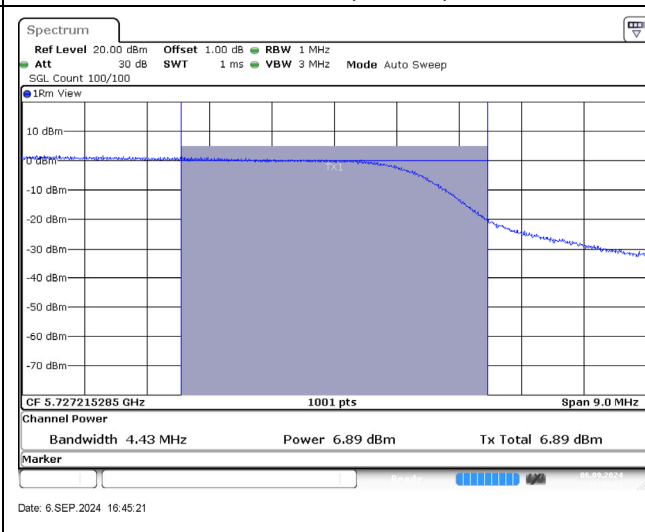

802.11a / 5720 MHz (U-NII-2C) / Chain B

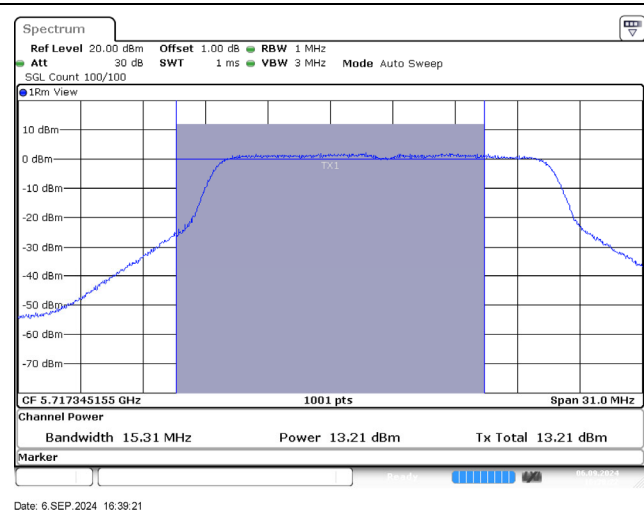


802.11n (20MHz) / 5720 MHz (U-NII-3) / Chain B

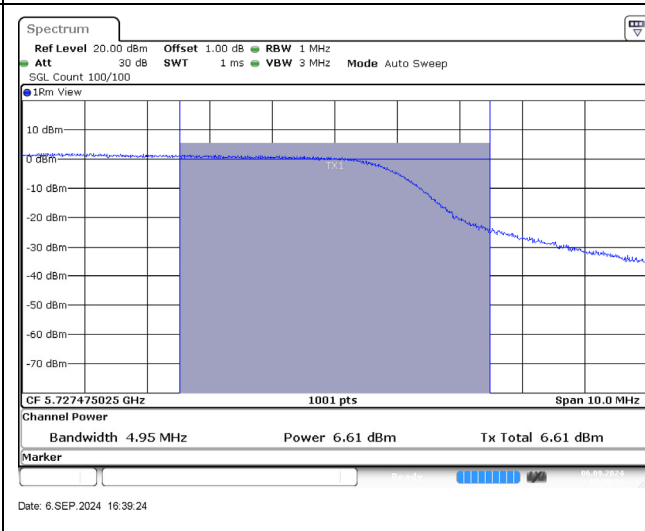

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	--	14.40	14.38	--	17.40	21.39	--	Pass
	5220	--	14.24	14.14	--	17.20	21.39	--	Pass
	5240	--	14.25	14.32	--	17.30	21.39	--	Pass
	5260	20.82	14.65	14.98	--	17.83	21.85	24.18	Pass
	5300	20.78	13.89	14.66	--	17.30	21.85	24.18	Pass
	5320	20.98	13.76	14.63	--	17.23	21.85	24.22	Pass
	5500	21.18	14.12	13.86	--	17.00	21.13	24.26	Pass
	5580	20.78	13.56	13.79	--	16.69	21.13	24.18	Pass
	5700	20.06	15.17	14.36	--	17.79	21.13	24.02	Pass
	5720(U-NII-2C)	15.51	13.83	13.43	0.13	16.77	21.13	22.91	Pass
	5720(U-NII-3)	--	7.98	7.60	0.13	10.93	27.43	--	Pass
	5745	--	22.52	23.35	--	25.97	27.43	--	Pass
	5785	--	22.46	21.75	--	25.13	27.43	--	Pass
	5825	--	22.17	22.28	--	25.24	27.43	--	Pass


Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

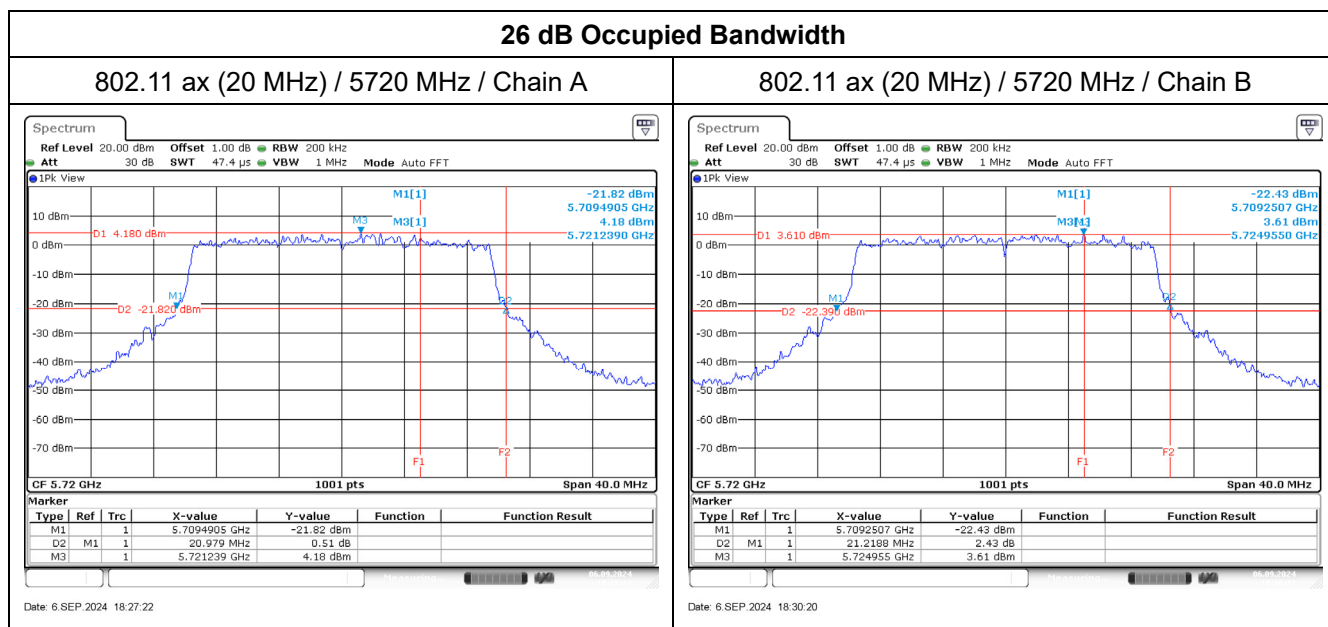


Maximum conducted output power:

802.11 ax (20 MHz) / 5720 MHz (U-NII-2C) / Chain A

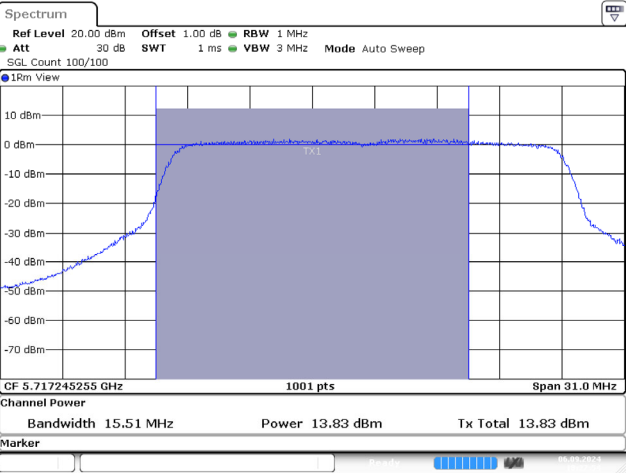


Date: 6 SEP. 2024 18:27:54

802.11ax (20MHz) / 5720 MHz (U-NII-3) / Chain A

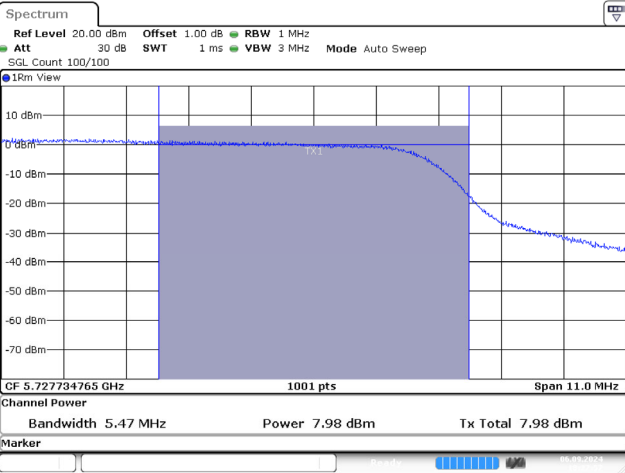


Date: 6 SEP. 2024 18:27:57

802.11ax (20MHz) / 5720 MHz (U-NII-2C) / Chain B

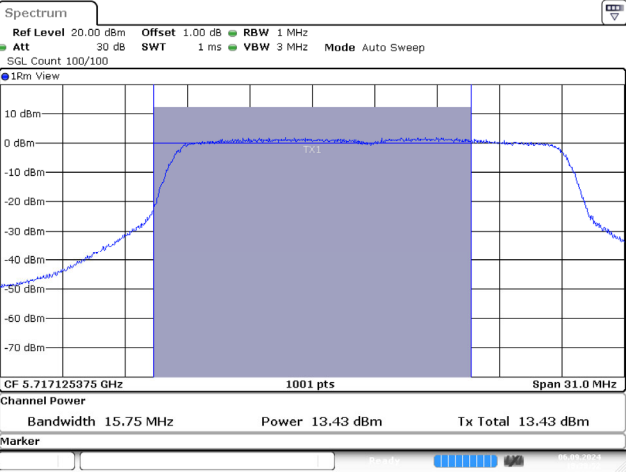

Date: 6 SEP. 2024 18:30:52

802.11ax (20MHz) / 5720 MHz (U-NII-3) / Chain B

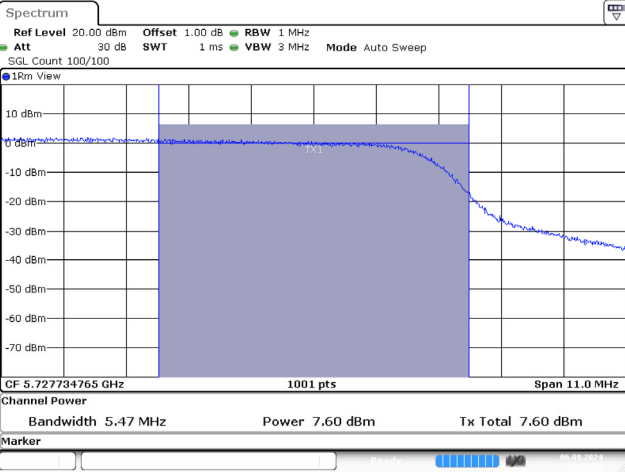


Date: 6 SEP. 2024 18:30:55

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log(BW)	
802.11ax (40 MHz)	5190	--	17.90	17.73	--	20.83	21.39	--	Pass
	5230	--	17.78	17.65	--	20.73	21.39	--	Pass
	5270	40.84	17.64	18.05	--	20.86	21.85	27.11	Pass
	5310	41.16	17.34	17.97	--	20.68	21.85	27.14	Pass
	5510	41.00	16.97	17.27	--	20.13	21.13	27.13	Pass
	5550	41.16	16.95	17.09	--	20.03	21.13	27.14	Pass
	5670	41.16	17.33	17.87	--	20.62	21.13	27.14	Pass
	5710(U-NII-2C)	35.70	17.75	17.53	0.11	20.76	21.13	26.53	Pass
	5710(U-NII-3)	5.38	7.46	7.17	0.11	10.44	27.43	--	Pass
	5755	--	22.12	22.70	--	25.43	27.43	--	Pass
	5795	--	22.98	22.26	--	25.65	27.43	--	Pass


Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

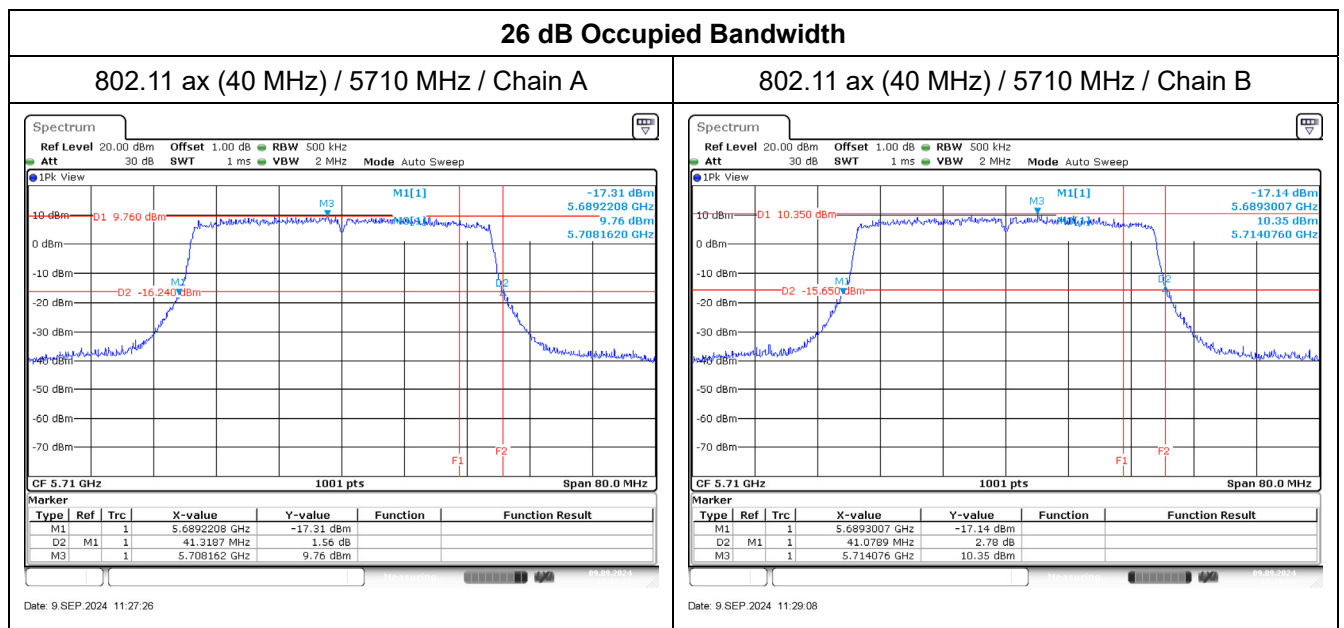


Maximum conducted output power:

802.11 ax (40 MHz) / 5710 MHz (U-NII-2C) / Chain A

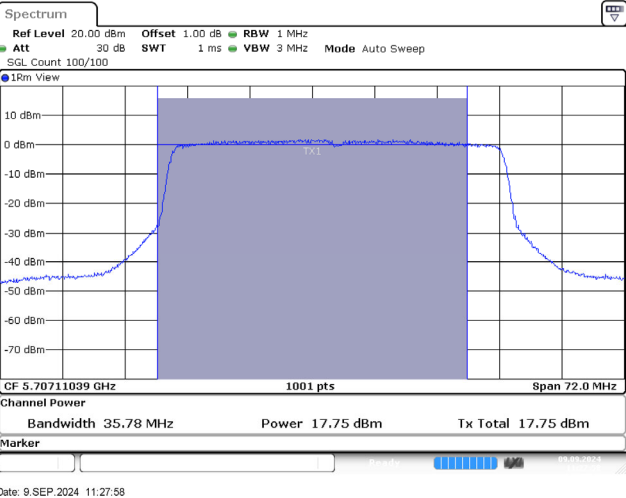


Date: 9 SEP.2024 11:27:58

802.11ax (40MHz) / 5710 MHz (U-NII-3) / Chain A

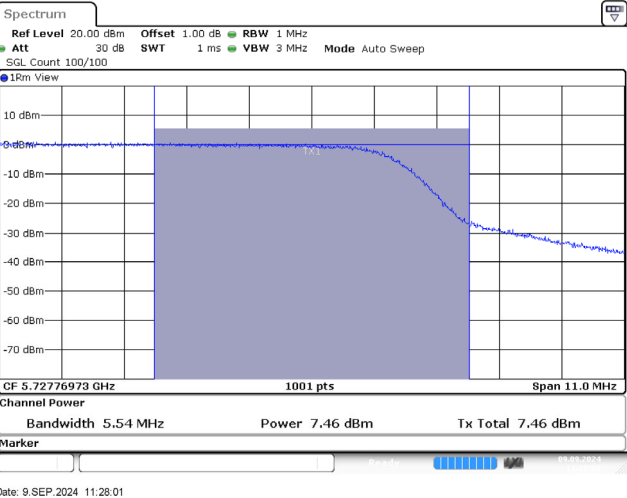


Date: 9 SEP.2024 11:28:01

802.11ax (40MHz) / 5710 MHz (U-NII-2C) / Chain B

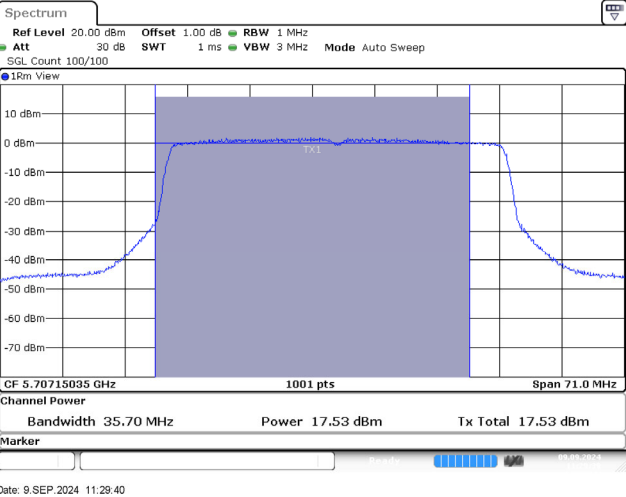

Date: 9 SEP.2024 11:29:40

802.11ax (40MHz) / 5710 MHz (U-NII-3) / Chain B

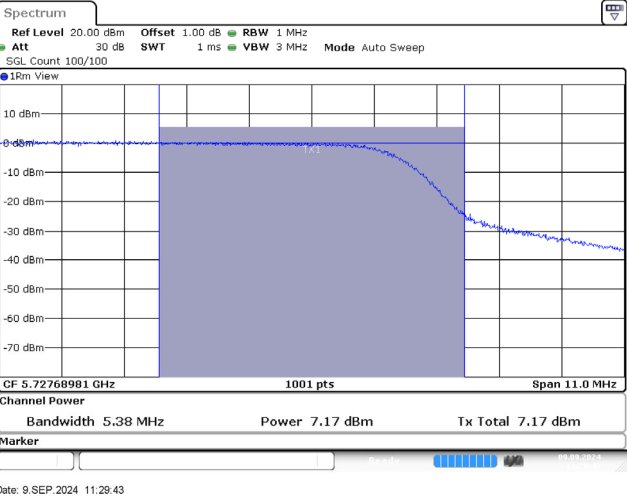


Date: 9 SEP.2024 11:29:43

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	--	17.01	16.90	--	19.97	21.39	--	Pass
	5290	82.48	18.29	18.74	--	21.53	21.85	30.16	Pass
	5530	82.16	16.19	16.33	--	19.27	21.13	30.15	Pass
	5610	81.84	17.91	18.18	--	21.06	21.13	30.13	Pass
	5690(U-NII-2C)	76.56	17.93	17.51	0.17	20.91	21.13	29.84	Pass
	5690(U-NII-3)	--	3.39	2.97	0.17	6.37	27.43	--	Pass
	5775	--	21.27	21.13	--	24.21	27.43	--	Pass


Note:

- Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
- 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

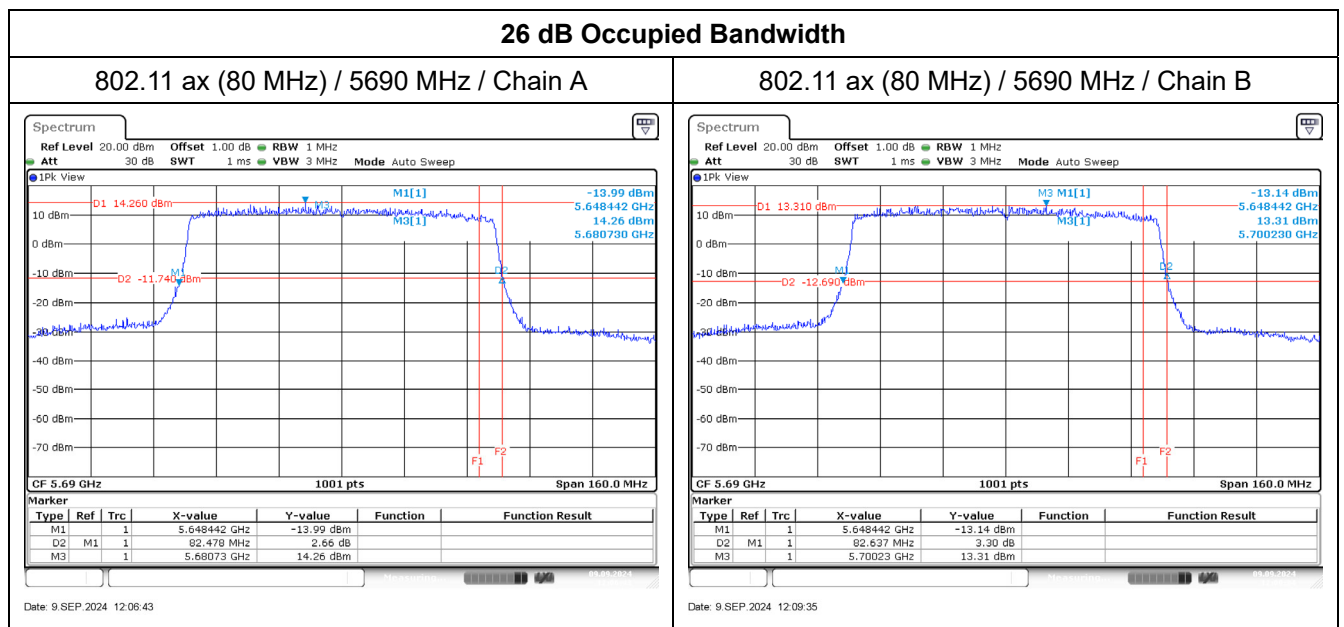


Maximum conducted output power:


802.11 ax (80 MHz) / 5690 MHz (U-NII-2C) / Chain A

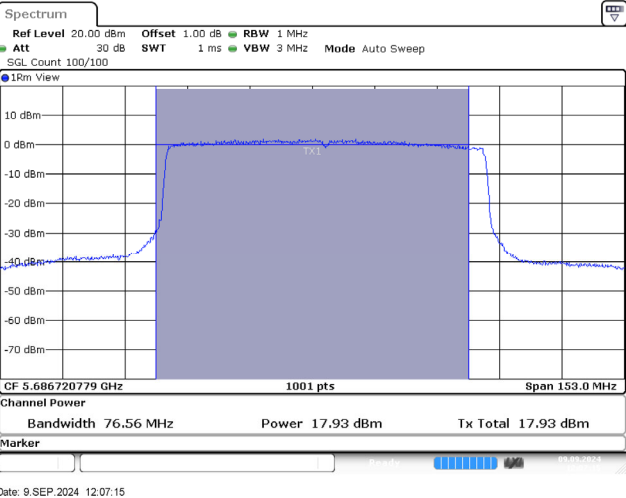


802.11ax (80MHz) / 5690 MHz (U-NII-3) / Chain A

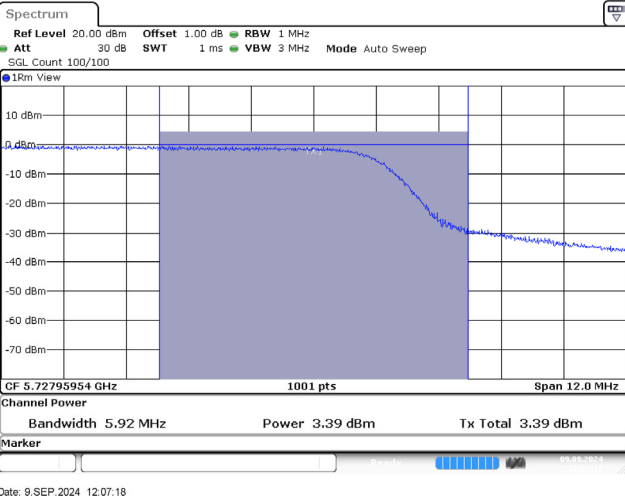

802.11ax (80 MHz) / 5690 MHz (U-NII-2C) / Chain B

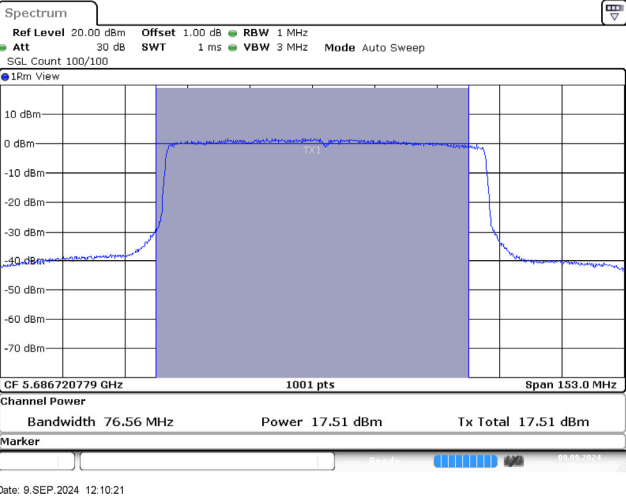

802.11ax (80MHz) / 5690 MHz (U-NII-3) / Chain B

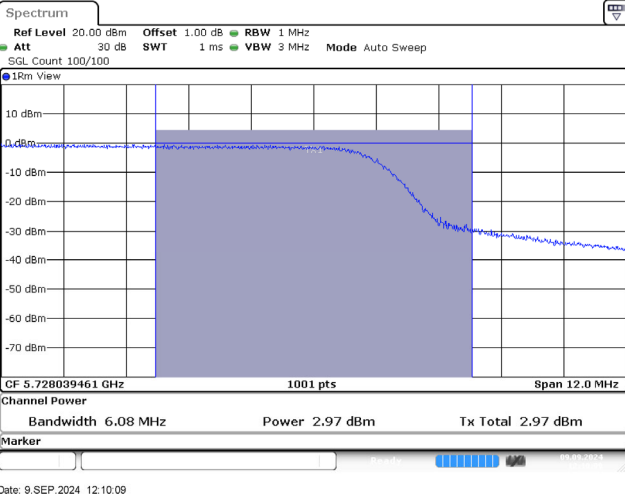

Beamforming mode

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	--	11.39	11.37	--	14.39	18.38	--	Pass
	5220	--	11.23	11.13	--	14.19	18.38	--	Pass
	5240	--	11.24	11.31	--	14.29	18.38	--	Pass
	5260	20.82	11.64	11.97	--	14.82	18.84	24.18	Pass
	5300	20.78	10.88	11.65	--	14.29	18.84	24.18	Pass
	5320	20.98	10.75	11.62	--	14.22	18.84	24.22	Pass
	5500	21.18	11.11	10.85	--	13.99	18.12	24.26	Pass
	5580	20.78	10.55	10.78	--	13.68	18.12	24.18	Pass
	5700	20.06	12.16	11.35	--	14.78	18.12	24.02	Pass
	5720(U-NII-2C)	15.51	10.82	10.42	0.13	13.76	18.12	22.91	Pass
	5720(U-NII-3)	--	4.97	4.59	0.13	7.92	24.42	--	Pass
	5745	--	19.51	20.34	--	22.96	24.42	--	Pass
	5785	--	19.45	18.74	--	22.12	24.42	--	Pass
	5825	--	19.16	19.27	--	22.23	24.42	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log(BW)	
802.11ax (40 MHz)	5190	--	14.89	14.72	--	17.82	18.38	--	Pass
	5230	--	14.77	14.64	--	17.72	18.38	--	Pass
	5270	40.84	14.63	15.04	--	17.85	18.84	27.11	Pass
	5310	41.16	14.33	14.96	--	17.67	18.84	27.14	Pass
	5510	41.00	13.96	14.26	--	17.12	18.12	27.13	Pass
	5550	41.16	13.94	14.08	--	17.02	18.12	27.14	Pass
	5670	41.16	14.32	14.86	--	17.61	18.12	27.14	Pass
	5710(U-NII-2C)	35.70	14.74	14.52	0.11	17.75	18.12	26.53	Pass
	5710(U-NII-3)	5.38	4.45	4.16	0.11	7.43	24.42	--	Pass
	5755	--	19.11	19.69	--	22.42	24.42	--	Pass
	5795	--	19.97	19.25	--	22.64	24.42	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	--	14.00	13.89	--	16.96	18.38	--	Pass
	5290	82.48	15.28	15.73	--	18.52	18.84	30.16	Pass
	5530	82.16	13.18	13.32	--	16.26	18.12	30.15	Pass
	5610	81.84	14.90	15.17	--	18.05	18.12	30.13	Pass
	5690(U-NII-2C)	76.56	14.92	14.50	0.17	17.90	18.12	29.84	Pass
	5690(U-NII-3)	--	0.38	-0.04	0.17	3.36	24.42	--	Pass
	5775	--	18.26	18.12	--	21.20	24.42	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Appendix D. Test Result of Maximum Power Spectral Density

Antenna Type: Panel


Master mode

Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11a	5180	A	0.35	0.29	3.60	<3.61	Pass
		B	0.25				
	5220	A	0.24	0.29	3.52	<3.61	Pass
		B	0.21				
	5240	A	0.13	0.29	3.51	<3.61	Pass
		B	0.29				
	5260	A	-5.77	0.29	-2.40	<-2.39	Pass
		B	-5.63				
	5300	A	-5.80	0.29	-2.43	<-2.39	Pass
		B	-5.66				
	5320	A	-5.70	0.29	-2.41	<-2.39	Pass
		B	-5.71				
	5500	A	-6.45	0.29	-3.05	<-2.95	Pass
		B	-6.24				
	5580	A	-6.68	0.29	-3.41	<-2.95	Pass
		B	-6.73				
	5700	A	-6.31	0.29	-3.03	<-2.95	Pass
		B	-6.34				
	5720 (U-NII-2C)	A	-6.41	0.29	-3.12	<-2.95	Pass
		B	-6.42				

Note: Total PSD/MHz (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11a	5720 (U-NII-3)	A	-9.84	0.29	-6.38	<16.05	Pass
		B	-9.52				
	5745	A	3.17	0.29	6.50	<16.05	Pass
		B	3.24				
	5785	A	1.43	0.29	4.63	<16.05	Pass
		B	1.24				
	5825	A	2.11	0.29	5.48	<16.05	Pass
		B	2.26				

Note: Total PSD (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

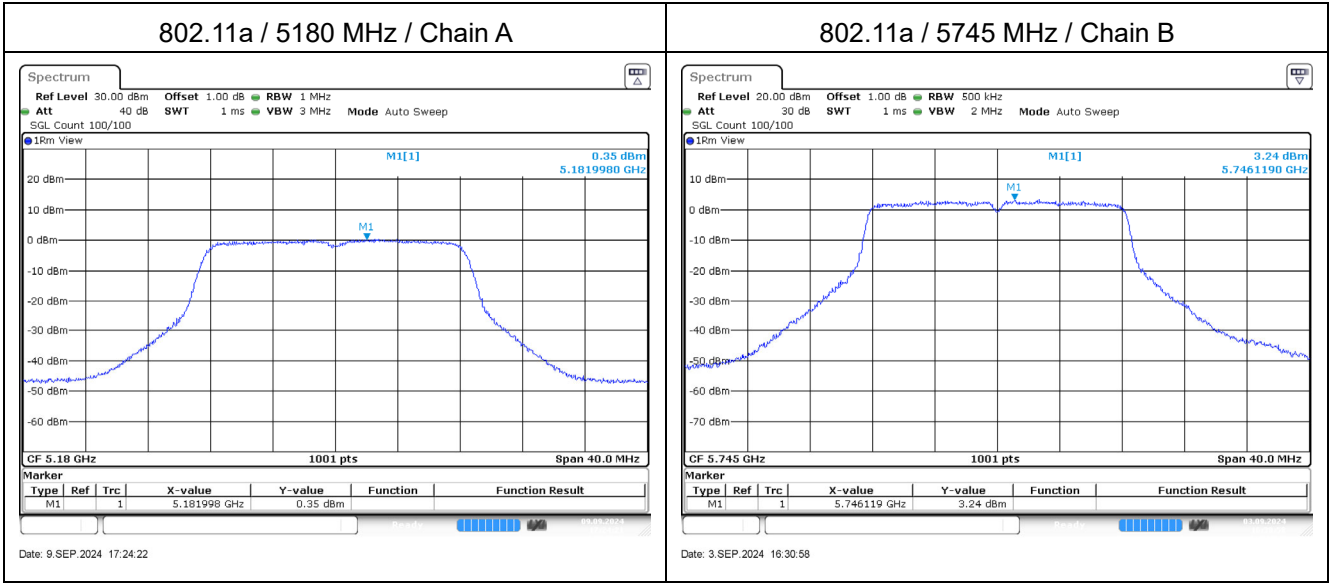


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5180	A	0.28	0.13	3.43	<3.61	Pass
		B	0.31				
	5220	A	0.27	0.13	3.44	<3.61	Pass
		B	0.33				
	5240	A	0.31	0.13	3.52	<3.61	Pass
		B	0.46				
	5260	A	-5.51	0.13	-2.49	<-2.39	Pass
		B	-5.75				
	5300	A	-5.98	0.13	-2.74	<-2.39	Pass
		B	-5.78				
	5320	A	-5.49	0.13	-2.45	<-2.39	Pass
		B	-5.68				
	5500	A	-6.21	0.13	-3.13	<-2.95	Pass
		B	-6.33				
	5580	A	-6.04	0.13	-3.03	<-2.95	Pass
		B	-6.29				
	5700	A	-6.43	0.13	-3.19	<-2.95	Pass
		B	-6.22				
	5720 (U-NII-2C)	A	-6.52	0.13	-3.32	<-2.95	Pass
		B	-6.39				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5720 (U-NII-3)	A	-10.17	0.13	-7.07	<16.05	Pass
		B	-10.25				
	5745	A	2.31	0.13	5.53	<16.05	Pass
		B	2.48				
	5785	A	0.45	0.13	3.46	<16.05	Pass
		B	0.19				
	5825	A	1.28	0.13	4.26	<16.05	Pass
		B	0.96				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

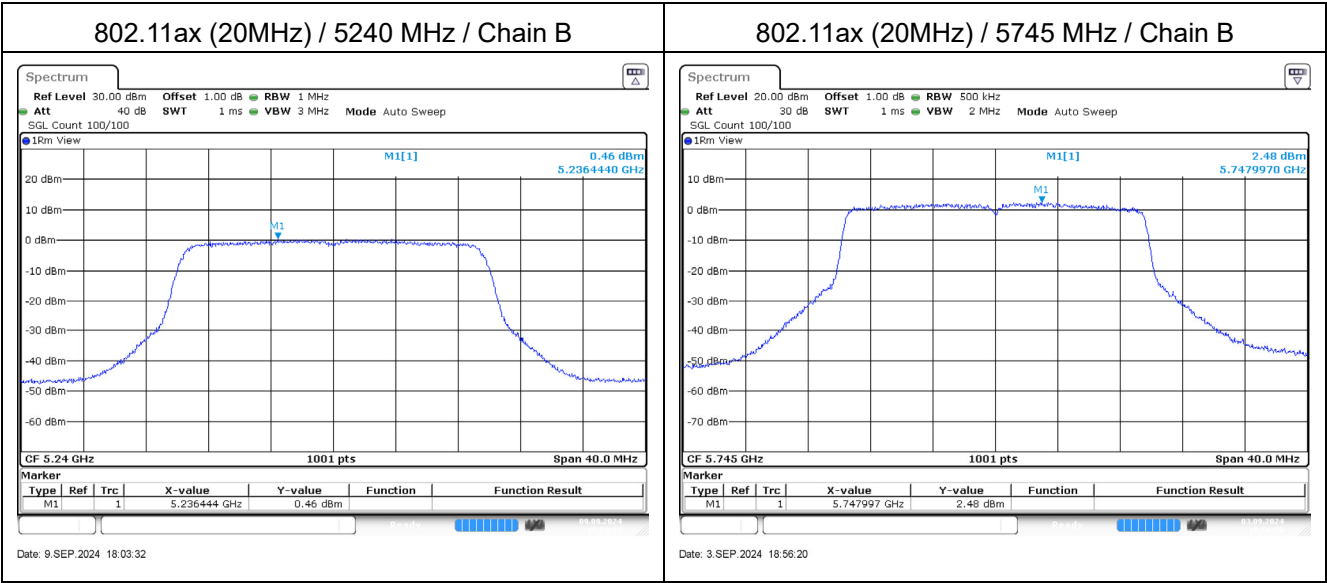


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5190	A	-5.51	0.11	-2.44	<3.61	Pass
		B	-5.62				
	5230	A	0.36	0.11	3.38	<3.61	Pass
		B	0.15				
	5270	A	-5.57	0.11	-2.45	<-2.39	Pass
		B	-5.57				
	5310	A	-5.78	0.11	-2.62	<-2.39	Pass
		B	-5.70				
	5510	A	-6.37	0.11	-3.34	<-2.95	Pass
		B	-6.56				
	5550	A	-6.31	0.11	-3.03	<-2.95	Pass
		B	-6.01				
	5670	A	-6.36	0.11	-3.25	<-2.95	Pass
		B	-6.38				
	5710 (U-NII-2C)	A	-6.42	0.11	-3.25	<-2.95	Pass
		B	-6.52				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5710 (U-NII-3)	A	-10.93	0.11	-7.83	<16.05	Pass
		B	-10.97				
	5755	A	-1.00	0.11	2.17	<16.05	Pass
		B	-0.90				
	5795	A	-2.48	0.11	0.66	<16.05	Pass
		B	-2.44				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

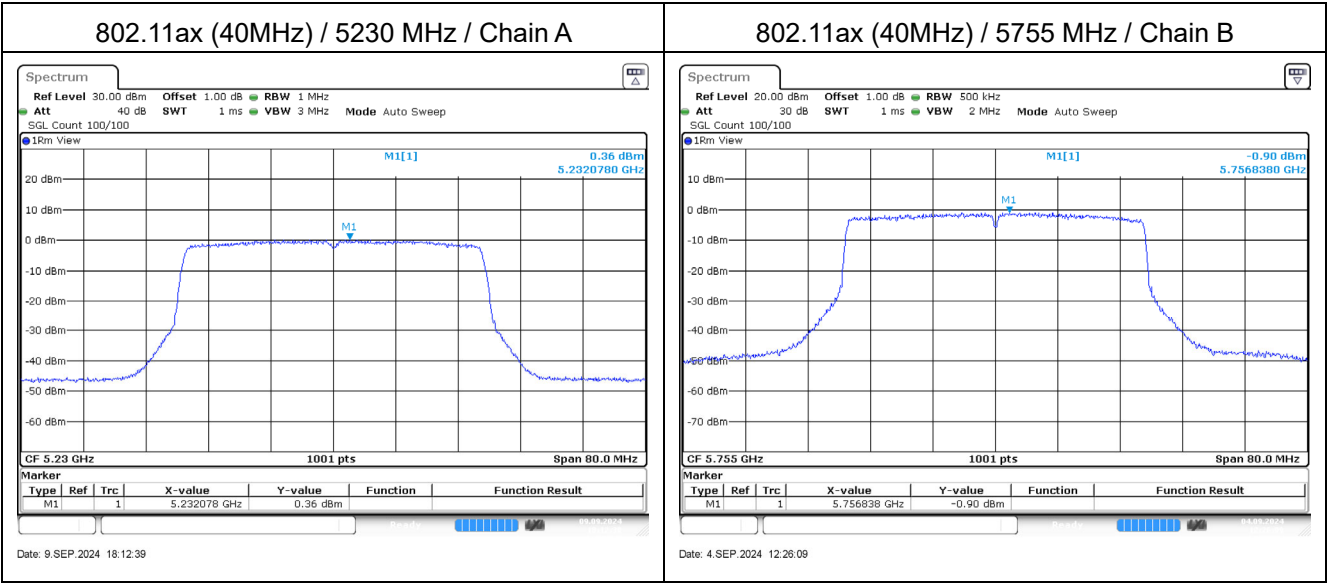


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5210	A	-8.75	0.17	-5.66	<3.61	Pass
		B	-8.93				
	5290	A	-7.30	0.17	-4.12	<-2.39	Pass
		B	-7.31				
	5530	A	-7.82	0.17	-4.53	<-2.39	Pass
		B	-7.61				
	5610	A	-8.09	0.17	-4.98	<-2.95	Pass
		B	-8.24				
	5690 (U-NII-2C)	A	-6.30	0.17	-3.16	<-2.95	Pass
		B	-6.39				

Note: Total PSD/MHz (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5690 (U-NII-3)	A	-11.62	0.17	-8.70	<16.05	Pass
		B	-12.17				
	5775	A	-4.83	0.17	-1.50	<16.05	Pass
		B	-4.54				

Note: Total PSD (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

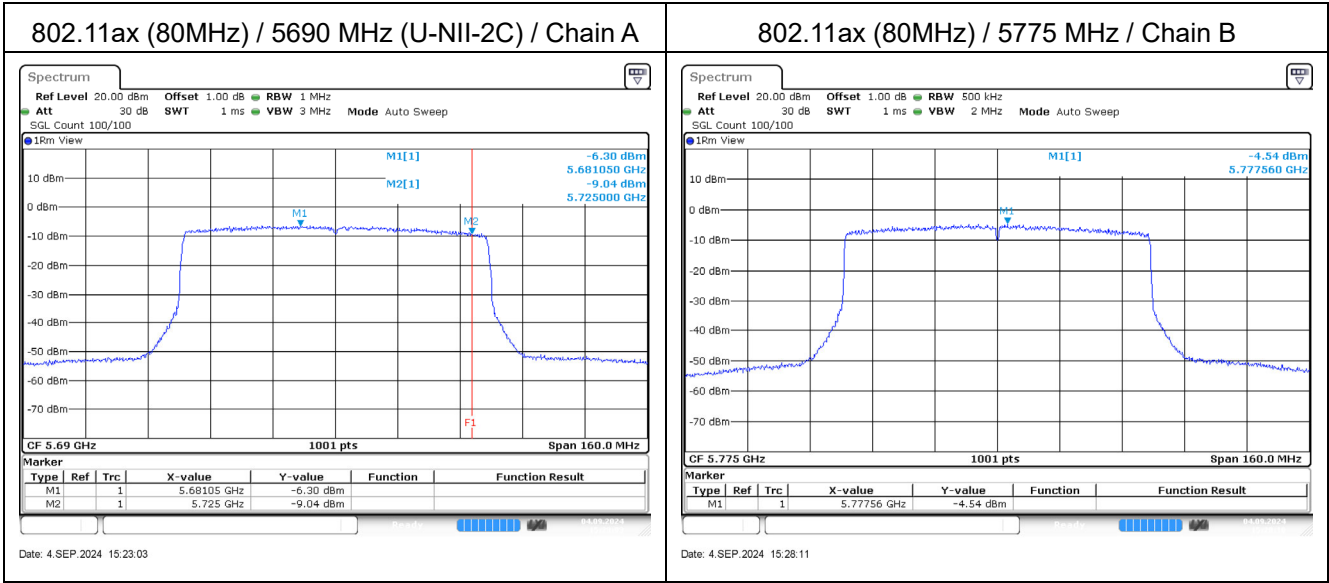


Slave mode

Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11a	5180	A	-5.90	0.29	-2.62	<-2.39	Pass
		B	-5.93				
	5220	A	-5.95	0.29	-2.59	<-2.39	Pass
		B	-5.83				
	5240	A	-5.80	0.29	-2.43	<-2.39	Pass
		B	-5.65				
	5260	A	-5.77	0.29	-2.40	<-2.39	Pass
		B	-5.63				
	5300	A	-5.80	0.29	-2.43	<-2.39	Pass
		B	-5.66				
	5320	A	-5.70	0.29	-2.41	<-2.39	Pass
		B	-5.71				
	5500	A	-6.45	0.29	-3.05	<-2.95	Pass
		B	-6.24				
	5580	A	-6.68	0.29	-3.41	<-2.95	Pass
		B	-6.73				
	5700	A	-6.31	0.29	-3.03	<-2.95	Pass
		B	-6.34				
	5720 (U-NII-2C)	A	-6.41	0.29	-3.12	<-2.95	Pass
		B	-6.42				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11a	5720 (U-NII-3)	A	-9.84	0.29	-6.38	<16.05	Pass
		B	-9.52				
	5745	A	3.17	0.29	6.50	<16.05	Pass
		B	3.24				
	5785	A	1.43	0.29	4.63	<16.05	Pass
		B	1.24				
	5825	A	2.11	0.29	5.48	<16.05	Pass
		B	2.26				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

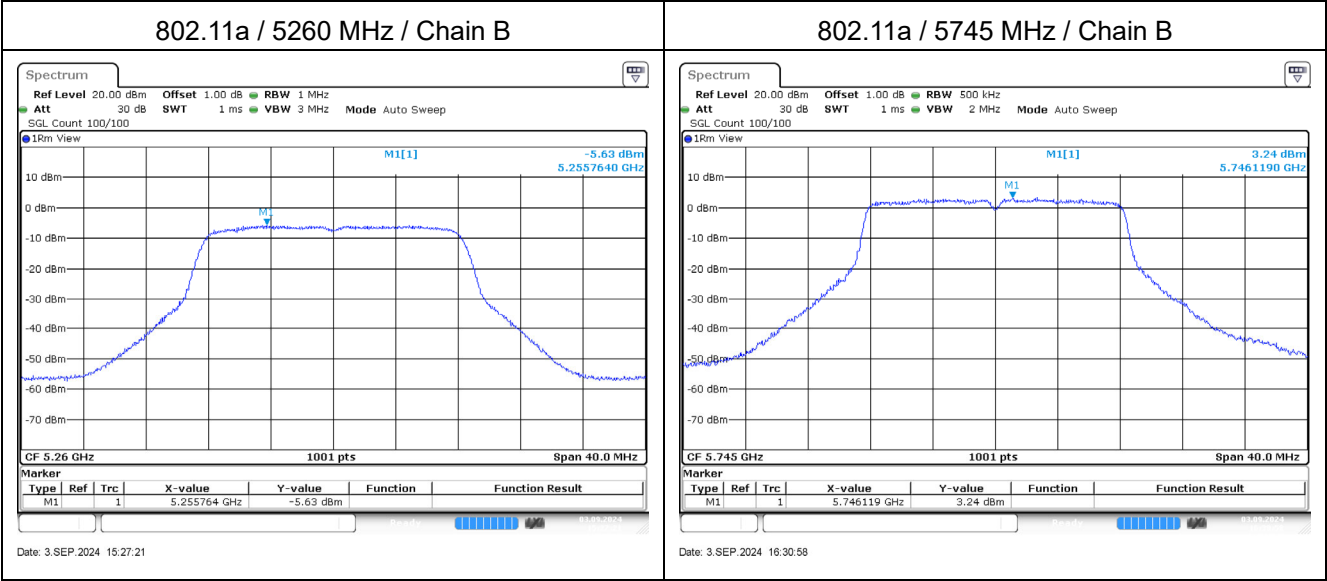


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5180	A	-5.57	0.13	-2.53	<-2.39	Pass
		B	-5.76				
	5220	A	-6.01	0.13	-2.70	<-2.39	Pass
		B	-5.67				
	5240	A	-5.68	0.13	-2.56	<-2.39	Pass
		B	-5.71				
	5260	A	-5.51	0.13	-2.49	<-2.39	Pass
		B	-5.75				
	5300	A	-5.98	0.13	-2.74	<-2.39	Pass
		B	-5.78				
	5320	A	-5.49	0.13	-2.45	<-2.39	Pass
		B	-5.68				
	5500	A	-6.21	0.13	-3.13	<-2.95	Pass
		B	-6.33				
	5580	A	-6.04	0.13	-3.03	<-2.95	Pass
		B	-6.29				
	5700	A	-6.43	0.13	-3.19	<-2.95	Pass
		B	-6.22				
	5720 (U-NII-2C)	A	-6.52	0.13	-3.32	<-2.95	Pass
		B	-6.39				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5720 (U-NII-3)	A	-10.17	0.13	-7.07	<16.05	Pass
		B	-10.25				
	5745	A	2.31	0.13	5.53	<16.05	Pass
		B	2.48				
	5785	A	0.45	0.13	3.46	<16.05	Pass
		B	0.19				
	5825	A	1.28	0.13	4.26	<16.05	Pass
		B	0.96				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

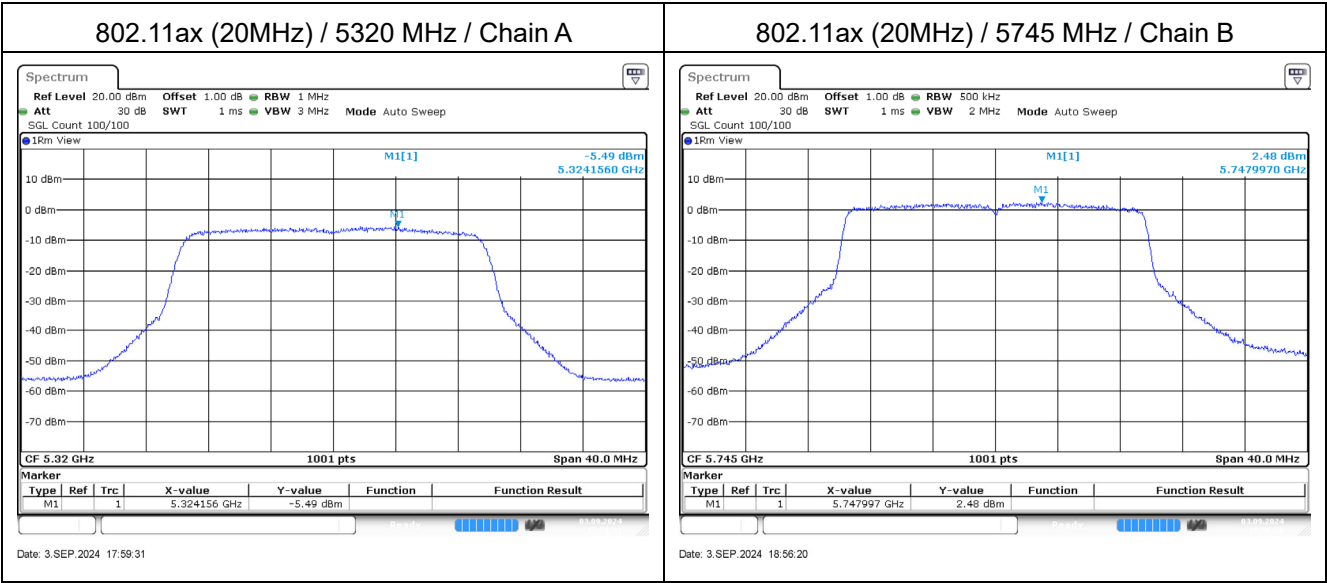


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5190	A	-5.51	0.11	-2.44	<-2.39	Pass
		B	-5.62				
	5230	A	-5.57	0.11	-2.42	<-2.39	Pass
		B	-5.52				
	5270	A	-5.57	0.11	-2.45	<-2.39	Pass
		B	-5.57				
	5310	A	-5.78	0.11	-2.62	<-2.39	Pass
		B	-5.70				
	5510	A	-6.37	0.11	-3.34	<-2.95	Pass
		B	-6.56				
	5550	A	-6.31	0.11	-3.03	<-2.95	Pass
		B	-6.01				
	5670	A	-6.36	0.11	-3.25	<-2.95	Pass
		B	-6.38				
	5710 (U-NII-2C)	A	-6.42	0.11	-3.35	<-2.95	Pass
		B	-6.52				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5710 (U-NII-3)	A	-10.93	0.11	-7.83	<16.05	Pass
		B	-10.97				
	5755	A	-1.00	0.11	2.17	<16.05	Pass
		B	-0.90				
	5795	A	-2.48	0.11	0.66	<16.05	Pass
		B	-2.44				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

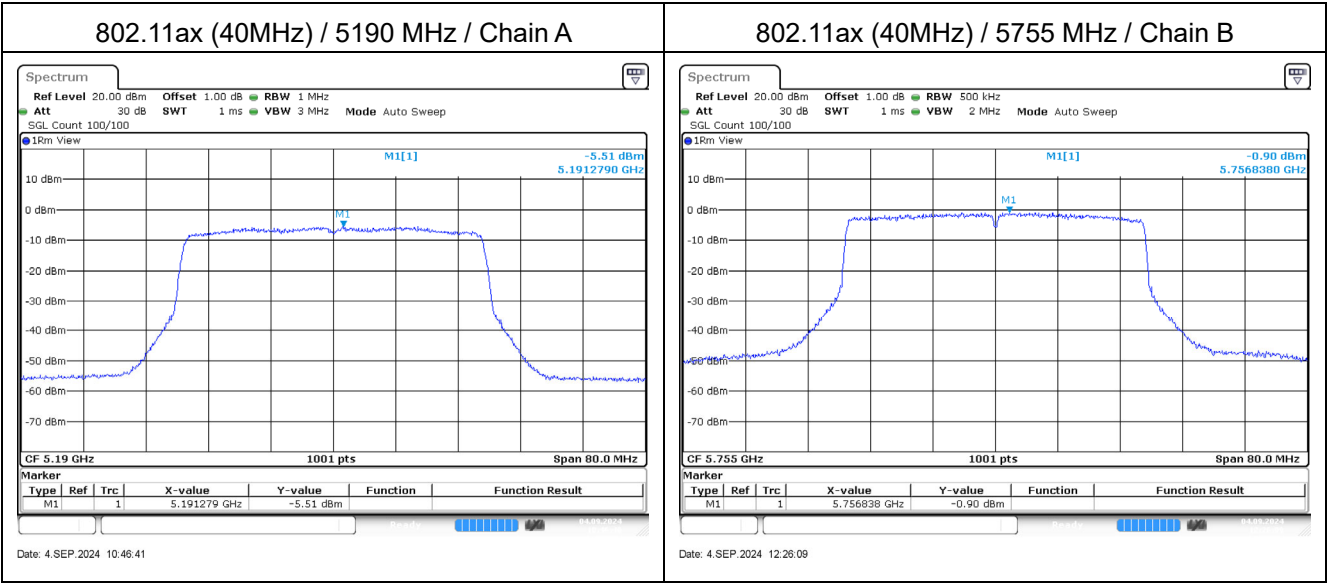


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5210	A	-8.75	0.17	-5.66	<-2.39	Pass
		B	-8.93				
	5290	A	-7.30	0.17	-4.12	<-2.39	Pass
		B	-7.31				
	5530	A	-7.82	0.17	-4.53	<-2.39	Pass
		B	-7.61				
	5610	A	-8.09	0.17	-4.98	<-2.95	Pass
		B	-8.24				
	5690 (U-NII-2C)	A	-6.30	0.17	-3.16	<-2.95	Pass
		B	-6.39				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5690 (U-NII-3)	A	-11.62	0.17	-8.70	<16.05	Pass
		B	-12.17				
	5775	A	-4.83	0.17	-1.50	<16.05	Pass
		B	-4.54				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

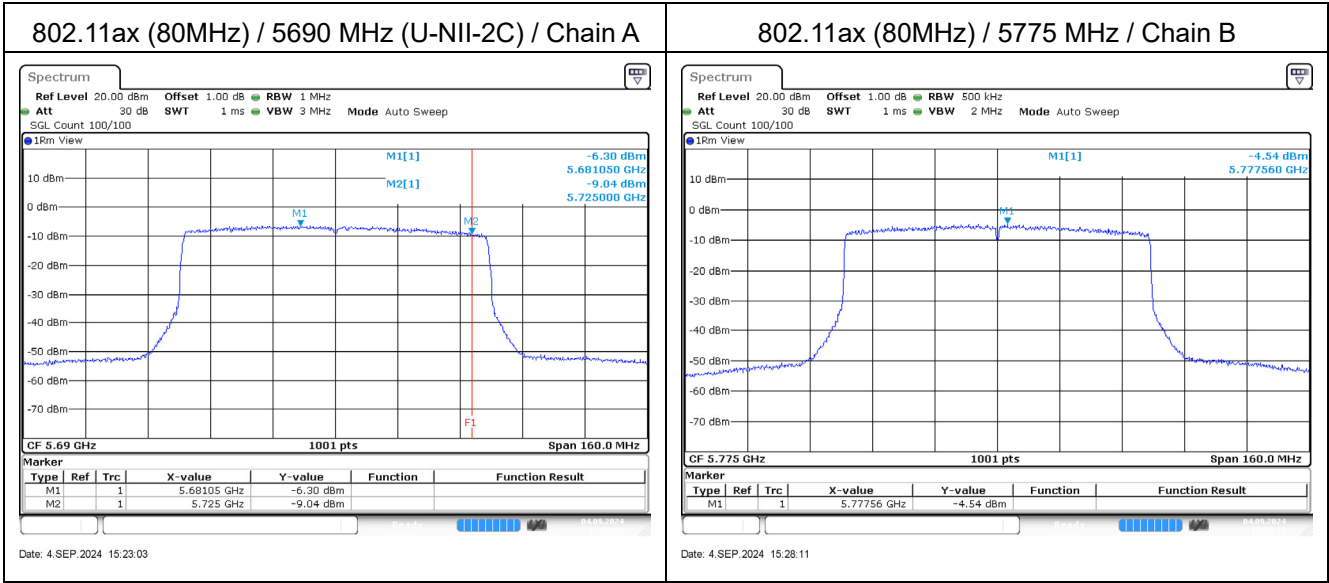


Antenna Type: Dipole**Master mode**

Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11a	5180	A	7.96	0.29	11.31	<11.38	Pass
		B	8.07				
	5220	A	8.01	0.29	11.34	<11.38	Pass
		B	8.07				
	5240	A	7.71	0.29	11.18	<11.38	Pass
		B	8.04				
	5260	A	2.28	0.29	5.70	<5.84	Pass
		B	2.53				
	5300	A	2.40	0.29	5.82	<5.84	Pass
		B	2.64				
	5320	A	2.52	0.29	5.79	<5.84	Pass
		B	2.47				
	5500	A	1.68	0.29	4.90	<5.12	Pass
		B	1.53				
	5580	A	1.78	0.29	5.11	<5.12	Pass
		B	1.85				
	5700	A	1.45	0.29	4.86	<5.12	Pass
		B	1.67				
	5720 (U-NII-2C)	A	1.69	0.29	5.09	<5.12	Pass
		B	1.90				

Note: Total PSD/MHz (dBm) = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11a	5720 (U-NII-3)	A	-2.27	0.29	1.34	<24.42	Pass
		B	-1.67				
	5745	A	8.39	0.29	11.72	<24.42	Pass
		B	8.45				
	5785	A	6.82	0.29	10.22	<24.42	Pass
		B	7.02				
	5825	A	7.62	0.29	10.65	<24.42	Pass
		B	7.07				

Note: Total PSD (dBm) = $10 \cdot \log(\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

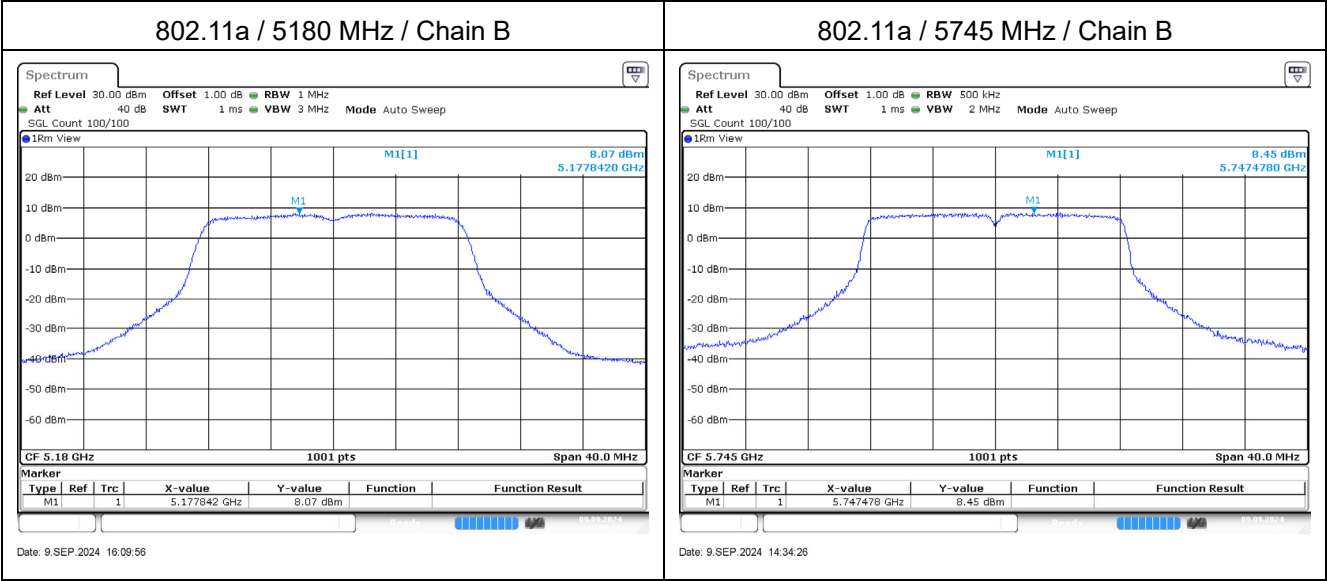


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5180	A	7.91	0.13	11.01	<11.38	Pass
		B	7.84				
	5220	A	7.63	0.13	11.03	<11.38	Pass
		B	8.14				
	5240	A	8.10	0.13	11.23	<11.38	Pass
		B	8.09				
	5260	A	2.68	0.13	5.79	<5.84	Pass
		B	2.62				
	5300	A	2.28	0.13	5.48	<5.84	Pass
		B	2.40				
	5320	A	2.46	0.13	5.58	<5.84	Pass
		B	2.42				
	5500	A	1.80	0.13	4.96	<5.12	Pass
		B	1.85				
	5580	A	1.74	0.13	4.78	<5.12	Pass
		B	1.55				
	5700	A	2.12	0.13	5.09	<5.12	Pass
		B	1.78				
	5720 (U-NII-2C)	A	1.97	0.13	5.08	<5.12	Pass
		B	1.92				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5720 (U-NII-3)	A	-1.93	0.13	1.12	<24.42	Pass
		B	-2.11				
	5745	A	7.93	0.13	10.75	<24.42	Pass
		B	7.28				
	5785	A	6.22	0.13	9.23	<24.42	Pass
		B	5.97				
	5825	A	6.68	0.13	9.99	<24.42	Pass
		B	7.01				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

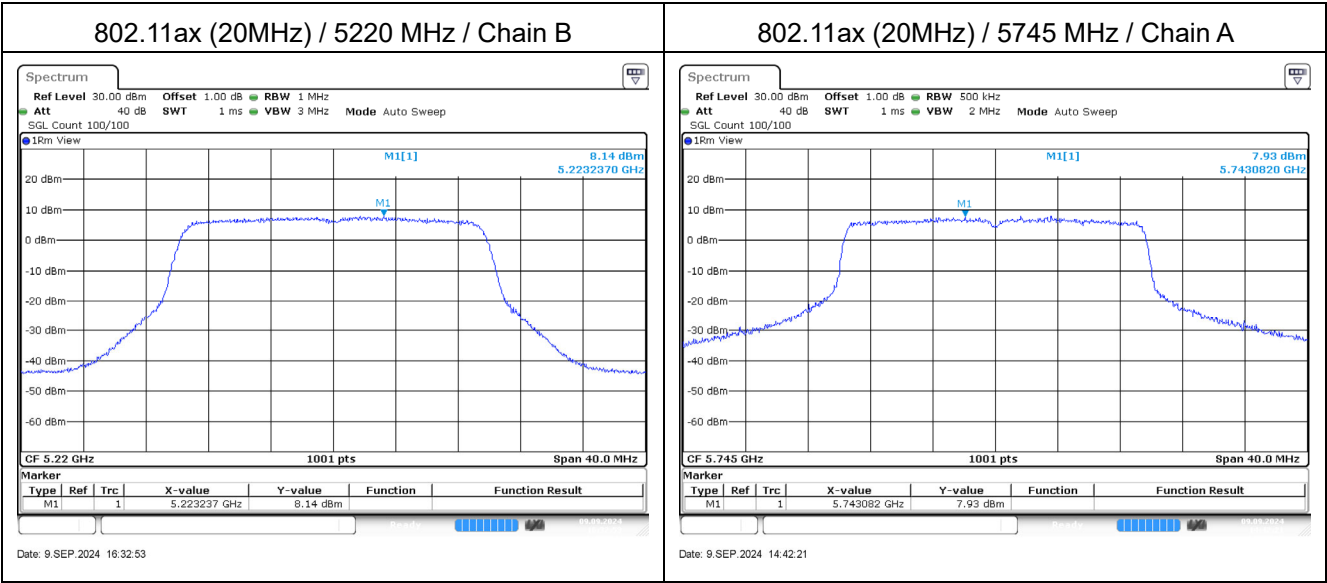


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5190	A	2.61	0.11	5.79	<11.38	Pass
		B	2.72				
	5230	A	7.93	0.11	11.17	<11.38	Pass
		B	8.17				
	5270	A	2.56	0.11	5.55	<5.84	Pass
		B	2.30				
	5310	A	2.79	0.11	5.81	<5.84	Pass
		B	2.59				
	5510	A	1.52	0.11	4.96	<5.12	Pass
		B	2.14				
	5550	A	2.00	0.11	5.11	<5.12	Pass
		B	1.98				
	5670	A	1.89	0.11	4.98	<5.12	Pass
		B	1.83				
	5710 (U-NII-2C)	A	2.00	0.11	5.01	<5.12	Pass
		B	1.77				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5710 (U-NII-3)	A	-2.45	0.11	0.75	<24.42	Pass
		B	-2.30				
	5755	A	4.23	0.11	7.32	<24.42	Pass
		B	4.17				
	5795	A	3.74	0.11	6.76	<24.42	Pass
		B	3.54				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

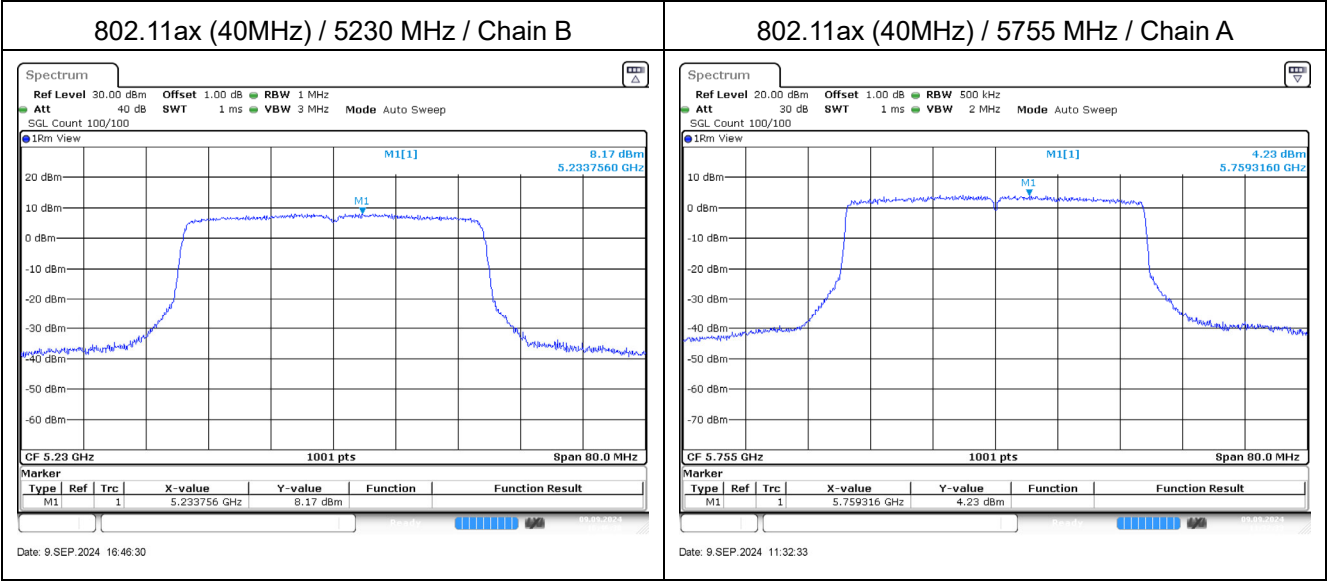


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5210	A	-1.41	0.17	1.68	<11.38	Pass
		B	-1.60				
	5290	A	1.78	0.17	4.91	<5.84	Pass
		B	1.68				
	5530	A	-1.67	0.17	1.45	<5.12	Pass
		B	-1.80				
	5610	A	0.81	0.17	3.90	<5.12	Pass
		B	0.62				
	5690 (U-NII-2C)	A	1.86	0.17	5.07	<5.12	Pass
		B	1.91				

Note: Total PSD/MHz (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5690 (U-NII-3)	A	-3.90	0.17	-0.69	<24.42	Pass
		B	-3.85				
	5775	A	-0.42	0.17	2.74	<24.42	Pass
		B	-0.46				

Note: Total PSD (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)}) + \text{Duty factor}$.

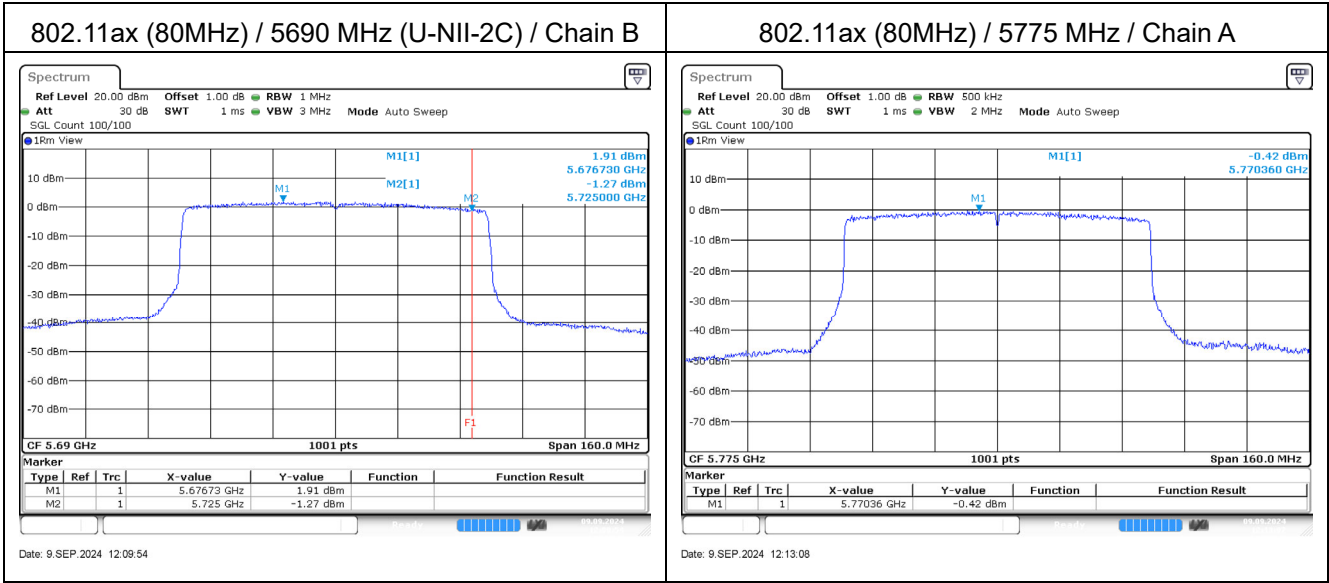


Slave mode

Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11a	5180	A	1.79	0.29	5.20	<5.38	Pass
		B	2.01				
	5220	A	1.98	0.29	5.29	<5.38	Pass
		B	2.01				
	5240	A	1.62	0.29	5.03	<5.38	Pass
		B	1.85				
	5260	A	2.28	0.29	5.70	<5.84	Pass
		B	2.53				
	5300	A	2.40	0.29	5.82	<5.84	Pass
		B	2.64				
	5320	A	2.52	0.29	5.79	<5.84	Pass
		B	2.47				
	5500	A	1.68	0.29	4.90	<5.12	Pass
		B	1.53				
	5580	A	1.78	0.29	5.11	<5.12	Pass
		B	1.85				
	5700	A	1.45	0.29	4.86	<5.12	Pass
		B	1.67				
	5720 (U-NII-2C)	A	1.69	0.29	5.09	<5.12	Pass
		B	1.90				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11a	5720 (U-NII-3)	A	-2.27	0.29	1.34	<24.42	Pass
		B	-1.67				
	5745	A	8.39	0.29	11.72	<24.42	Pass
		B	8.45				
	5785	A	6.82	0.29	10.22	<24.42	Pass
		B	7.02				
	5825	A	7.62	0.29	10.65	<24.42	Pass
		B	7.07				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

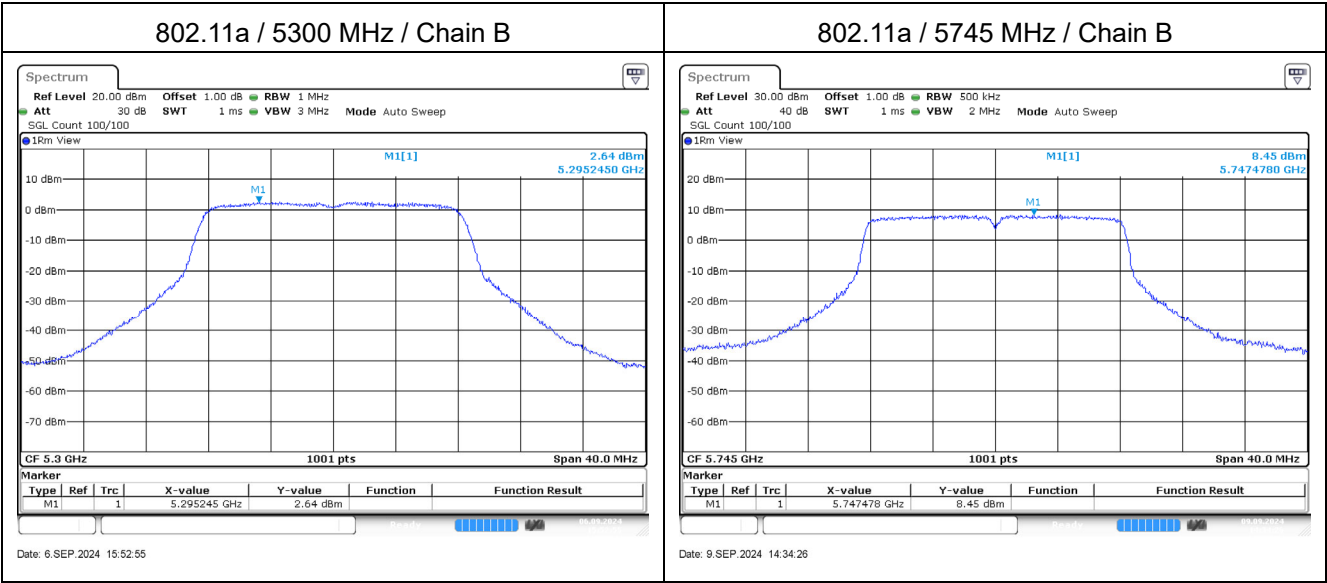


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5180	A	2.12	0.13	5.26	<5.38	Pass
		B	2.12				
	5220	A	1.95	0.13	5.11	<5.38	Pass
		B	2.00				
	5240	A	2.04	0.13	5.32	<5.38	Pass
		B	2.33				
	5260	A	2.68	0.13	5.79	<5.84	Pass
		B	2.62				
	5300	A	2.28	0.13	5.48	<5.84	Pass
		B	2.40				
	5320	A	2.46	0.13	5.58	<5.84	Pass
		B	2.42				
	5500	A	1.80	0.13	4.96	<5.12	Pass
		B	1.85				
	5580	A	1.74	0.13	4.78	<5.12	Pass
		B	1.55				
	5700	A	2.12	0.13	5.09	<5.12	Pass
		B	1.78				
	5720 (U-NII-2C)	A	1.97	0.13	5.05	<5.12	Pass
		B	1.92				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5720 (U-NII-3)	A	-1.93	0.13	1.12	<24.42	Pass
		B	-2.11				
	5745	A	7.93	0.13	10.75	<24.42	Pass
		B	7.28				
	5785	A	6.22	0.13	9.23	<24.42	Pass
		B	5.97				
	5825	A	6.68	0.13	9.99	<24.42	Pass
		B	7.01				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

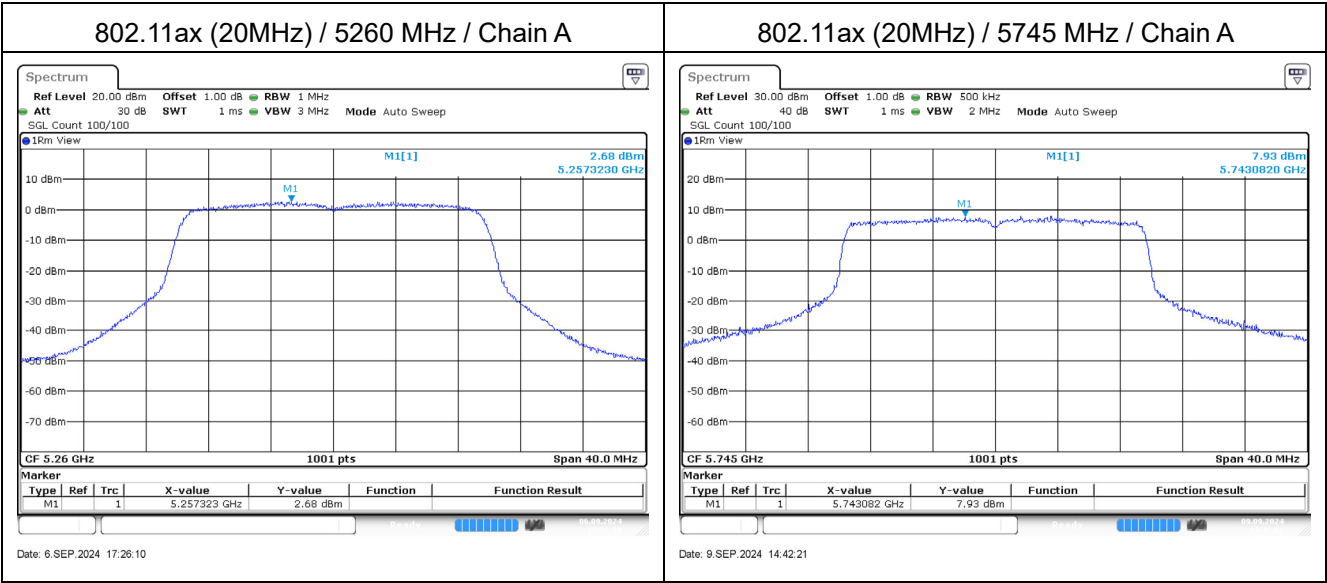


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5190	A	2.05	0.11	5.12	<5.38	Pass
		B	1.95				
	5230	A	1.91	0.11	5.20	<5.38	Pass
		B	2.24				
	5270	A	2.56	0.11	5.55	<5.84	Pass
		B	2.30				
	5310	A	2.79	0.11	5.81	<5.84	Pass
		B	2.59				
	5510	A	1.52	0.11	4.96	<5.12	Pass
		B	2.14				
	5550	A	2.00	0.11	5.11	<5.12	Pass
		B	1.98				
	5670	A	1.89	0.11	4.98	<5.12	Pass
		B	1.83				
	5710 (U-NII-2C)	A	2.00	0.11	5.01	<5.12	Pass
		B	1.77				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5710 (U-NII-3)	A	-2.45	0.11	0.75	<24.42	Pass
		B	-2.30				
	5755	A	4.23	0.11	7.32	<24.42	Pass
		B	4.17				
	5795	A	3.74	0.11	6.76	<24.42	Pass
		B	3.54				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

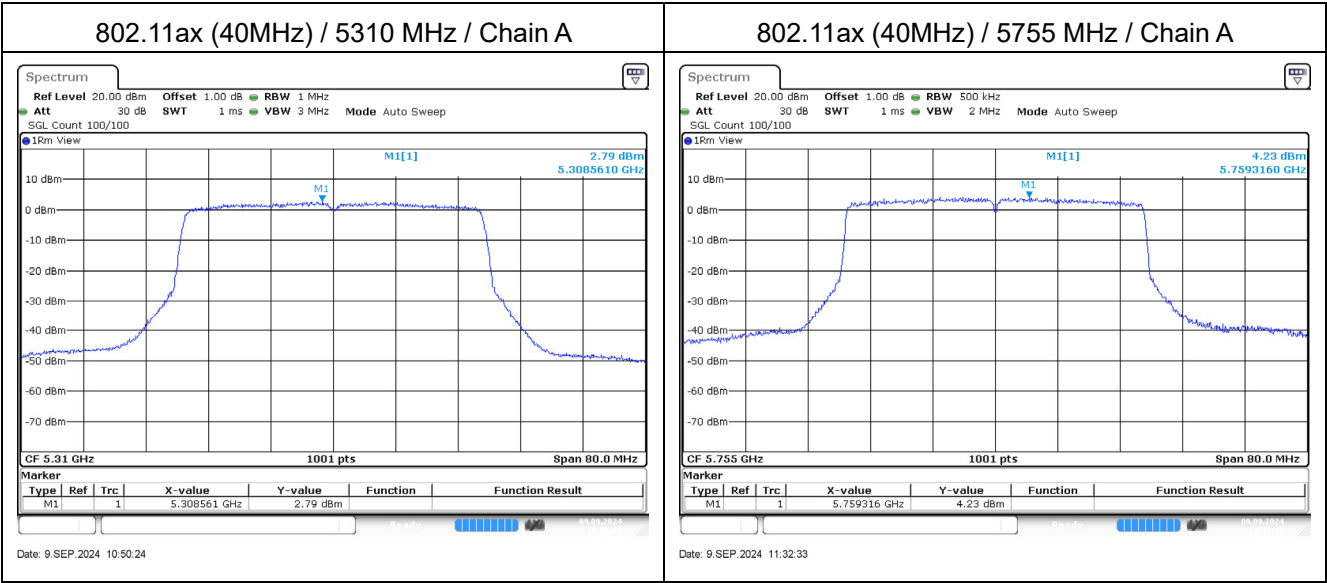


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5210	A	-1.41	0.17	1.68	<5.38	Pass
		B	-1.60				
	5290	A	1.78	0.17	4.91	<5.84	Pass
		B	1.68				
	5530	A	-1.67	0.17	1.45	<5.12	Pass
		B	-1.80				
	5610	A	0.81	0.17	3.90	<5.12	Pass
		B	0.62				
	5690 (U-NII-2C)	A	1.86	0.17	5.07	<5.12	Pass
		B	1.91				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.


Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5690 (U-NII-3)	A	-3.90	0.17	-0.69	<24.42	Pass
		B	-3.85				
	5775	A	-0.42	0.17	2.74	<24.42	Pass
		B	-0.46				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor.

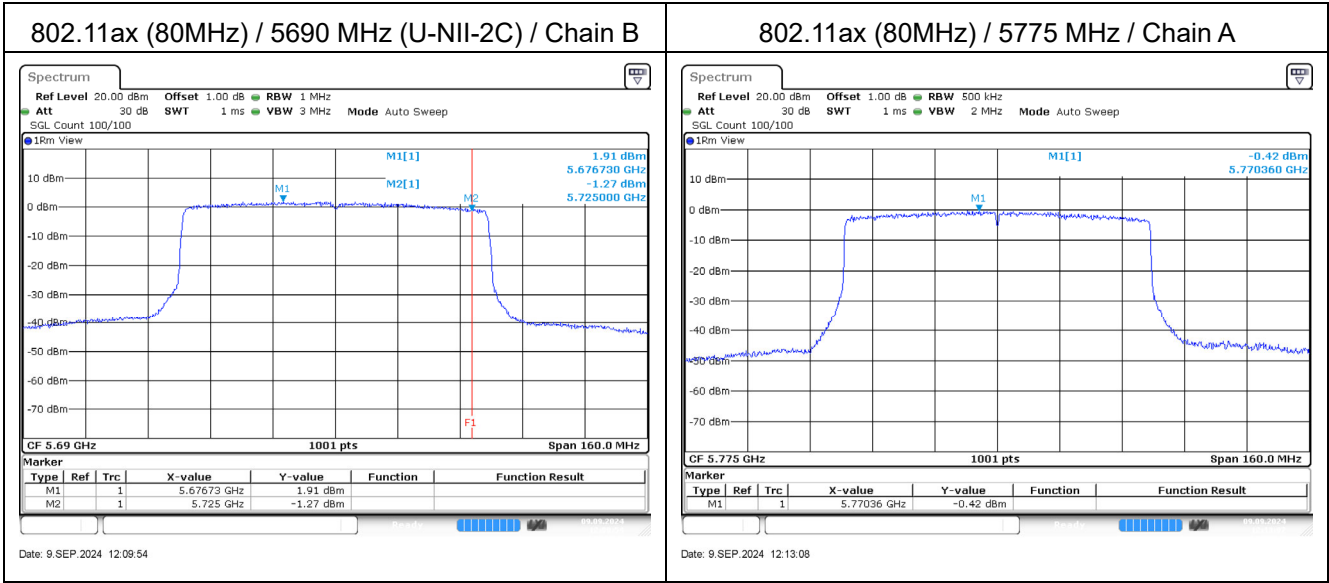


Appendix E. Test Result of Transmitter Radiated Spurious Emission


Antenna Type: Panel

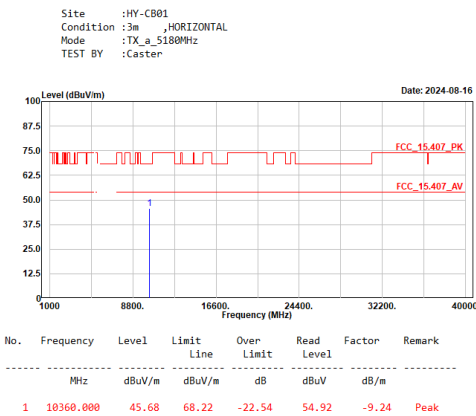


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

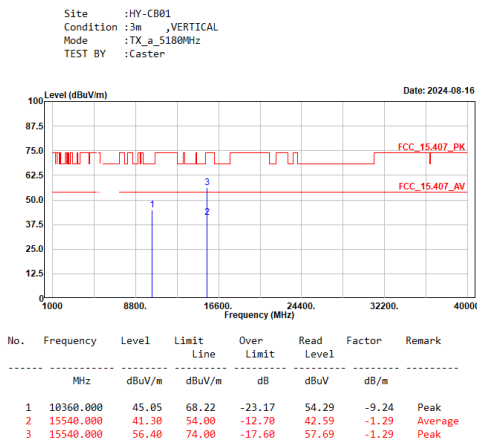

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

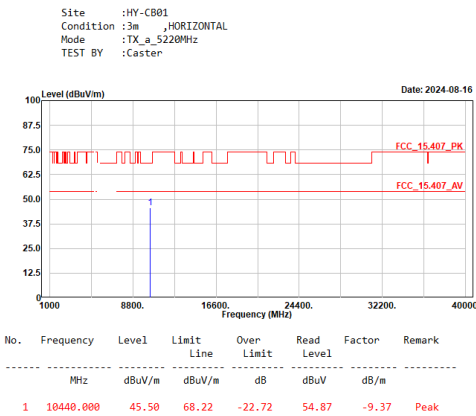


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

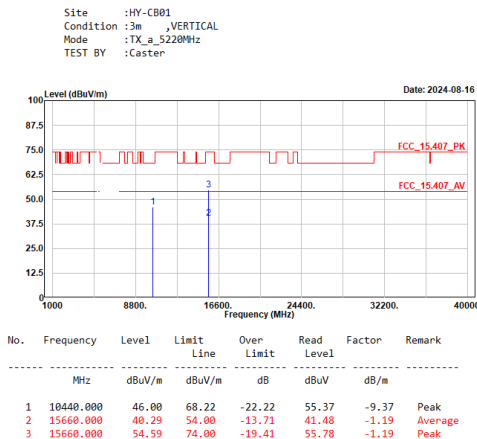

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5240MHz
TEST BY :Peter

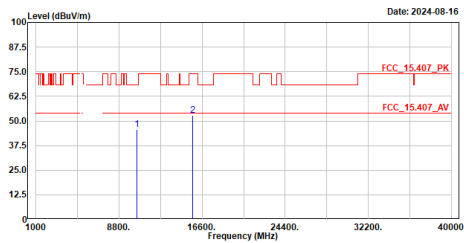


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	45.65	68.22	-22.57	54.98	-9.33	Peak
2	15720.000	52.75	74.00	-21.25	53.83	-1.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5240MHz
TEST BY :Peter

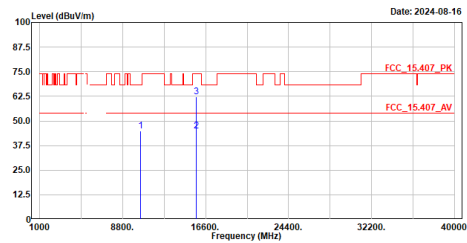


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10480.000	44.95	68.22	-23.27	54.28	-9.33	Peak
2	15720.000	44.76	54.00	-9.24	45.84	-1.08	Average
3	15720.000	62.11	74.00	-11.89	63.19	-1.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5260MHz
TEST BY :Peter

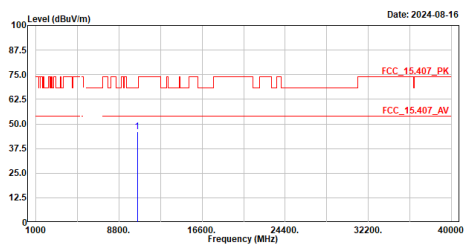


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10520.000	45.92	68.22	-22.30	55.17	-9.25	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5260MHz
TEST BY :Peter

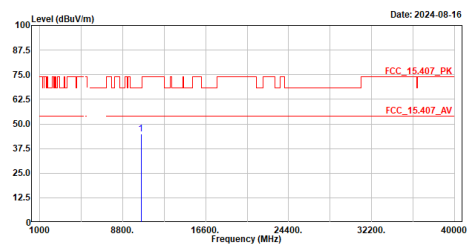


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10520.000	45.04	68.22	-23.18	54.29	-9.25	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5300MHz
TEST BY :Peter

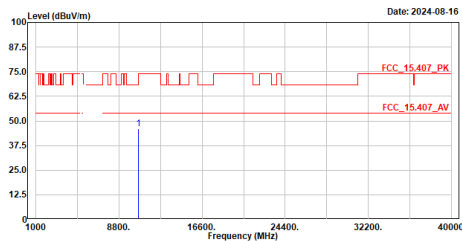

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10600.000	46.10	74.00	-27.90	54.92	-8.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5300MHz
TEST BY :Peter

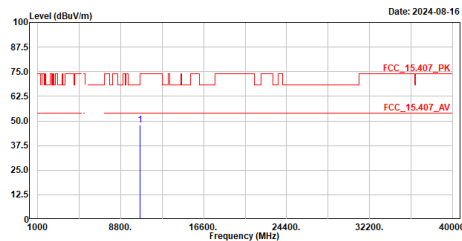

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10600.000	47.74	74.00	-26.26	56.56	-8.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5320MHz
TEST BY :Peter

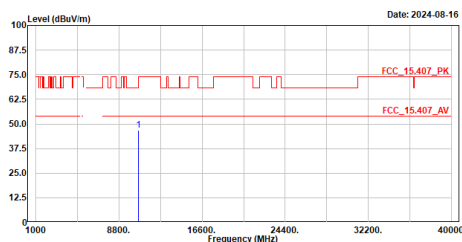

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10640.000	46.73	74.00	-27.27	55.63	-8.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5320MHz
TEST BY :Peter

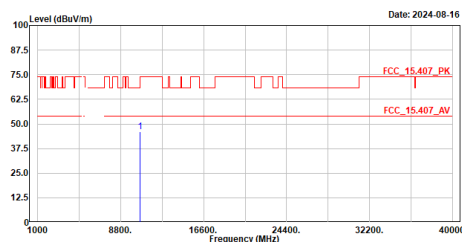

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10640.000	45.93	74.00	-28.07	54.83	-8.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.