


Product : Nport Device Server
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11a 6Mbps) (5745MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
149	5745.000	-13.544	< 8dBm	Pass


Figure Channel 149:

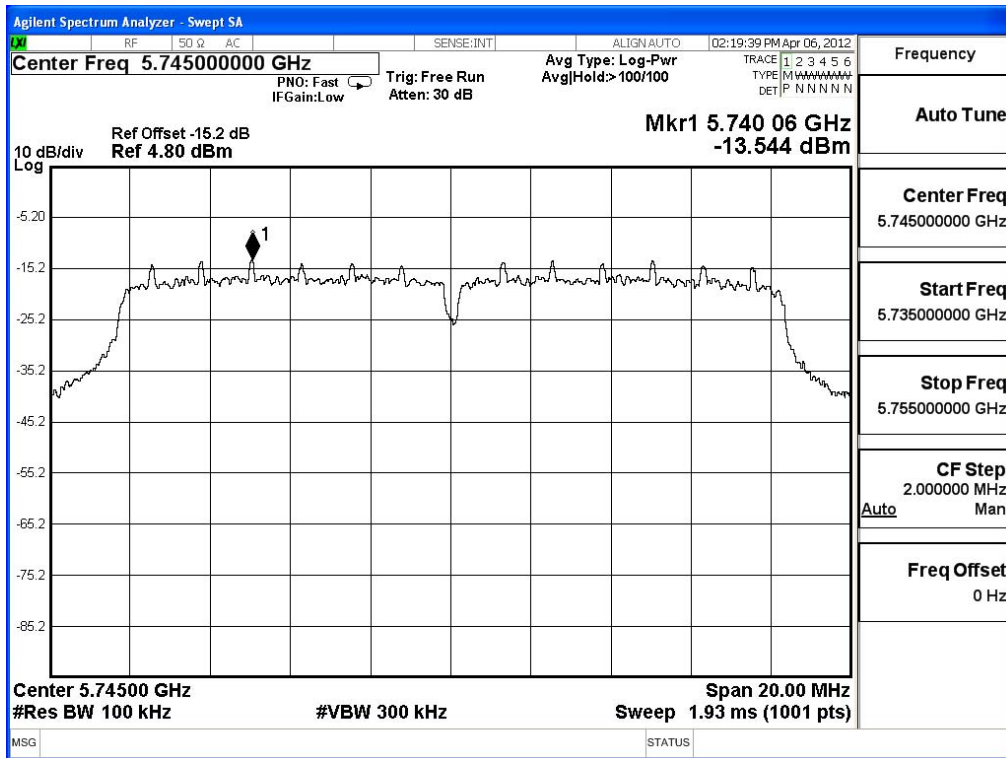

Product : Nport Device Server
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11a 6Mbps) (5785MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
157	5785.000	-13.937	< 8dBm	Pass


Figure Channel 157:

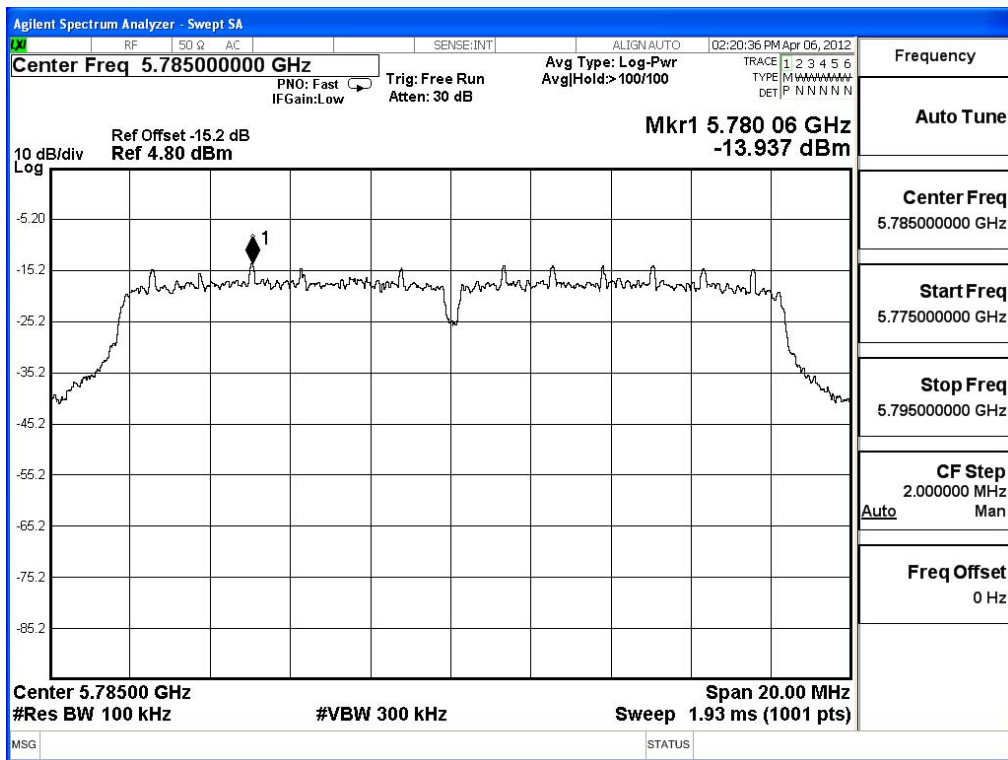

Product : Nport Device Server
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11a 6Mbps) (5805MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
165	5805.000	-13.853	< 8dBm	Pass

Figure Channel 165:

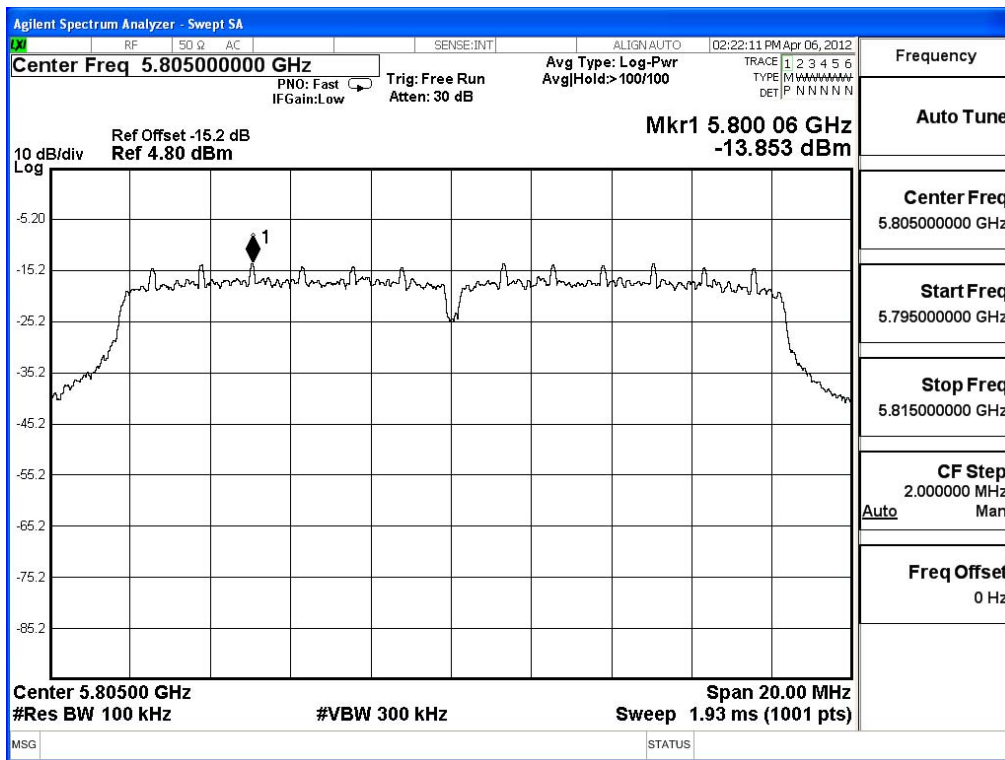

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.