

Dynamic Frequency Selection (DFS) Test Report (Class II Permissive Change)

Product Name	Wireless module
Model No	WAPC003
FCC ID	SLE-WAPC003

Applicant	Moxa Inc.
Address	No. 1111, Heping Rd., Bade Dist., Taoyuan City 334004, Taiwan

Date of Receipt	Apr. 25, 2022
Issued Date	Jun. 23, 2022
Report No.	2240703R-RFUSDFSV02-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

DFS Test Report

Issued Date: Jun. 23, 2022


Report No.: 2240703R-RFUSDFSV02-A



Product Name	Wireless module
Applicant	Moxa Inc.
Address	No. 1111, Heping Rd., Bade Dist., Taoyuan City 334004, Taiwan
Manufacturer	Moxa Inc.
Model No.	WAPC003
FCC ID	SLE-WAPC003
EUT Rated Voltage	12-48 VDC, PoE
EUT Test Voltage	12 VDC
Trade Name	MOXA
Applicable Standard	FCC CFR Title 47 Part 15 Subpart E 15.407 (h) KDB 905462
Test Result	Complied

Documented By

:



(Supervisor / Jinn Chen)

Tested By


:



(Senior Engineer / Benjamin Pan)

Approved By

:

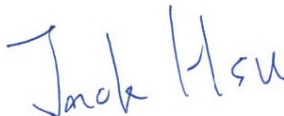

(Senior Engineer / Jack Hsu)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. Standard Requirement	5
1.2. EUT Description.....	6
1.3. UNII Device Description.....	9
1.4. Test Facility	10
1.5. Test Equipment.....	11
1.6. Uncertainty	12
1.7. Test Setup	13
1.8. DFS Detection Thresholds.....	13
1.9. Radar Test Waveforms.....	15
1.10. Radar Waveform Calibration	18
1.11. Radar Waveform Calibration Result	19
1.12. Master Data Traffic Plot Result	35
2. UNII DETECTION BANDWIDTH.....	38
2.1. Test Procedure	38
2.2. Test Requirement.....	38
2.3. Test Result of UNII Detection Bandwidth.....	41
3. INITIAL CHANNEL AVAILABILITY CHECK TIME.....	47
3.1. Test Procedure	47
3.2. Test Requirement.....	47
3.3. Test Result of Initial Channel Availability Check Time.....	48
4. RADAR BURST AT THE BEGINNING OF THE CHANNEL AVAILABILITY CHECK TIME .	49
4.1. Test Procedure	49
4.2. Test Requirement.....	49
4.3. Test Result of Radar Burst at the Beginning of the Channel Availability Check Time	50
5. RADAR BURST AT THE END OF THE CHANNEL AVAILABILITY CHECK TIME	51
5.1. Test Procedure	51
5.2. Test Requirement.....	51
5.3. Test Result of Radar Burst at the End of the Channel Availability Check Time	52
6. IN-SERVICE MONITORING FOR CHANNEL MOVE TIME AND CHANNEL CLOSING	
TRANSMISSION TIME AND NON-OCCUPANCY PERIOD	53
6.1. Test Procedure	53
6.2. Test Requirement.....	53
6.3. Test Result of Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period	54
7. STATISTICAL PERFORMANCE CHECK	56
7.1. Test Procedure	56
7.2. Test Requirement.....	56
7.3. Test Result of Statistical Performance Check	57

Appendix 1: DFS Test Setup Photo

Appendix 2: Product Photos-Please refer to the file: 2240703R-Product Photos

Revision History

Report No.	Version	Description	Issued Date
2240703R-RFUSDFSV02-A	V1.0	Initial issue of report.	Jun. 23, 2022

1. GENERAL INFORMATION

1.1. Standard Requirement

FCC Part 15.407:

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30dBm. A TPC mechanism is not required for systems with an E.I.R.P. of less than 500mW.

U-NII devices operating in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

1.2. EUT Description

Product Name	Wireless module
Trade Name	MOXA
FCC ID	SLE-WAPC003
Model No.	WAPC003
Frequency Range	802.11a/n/ac-20MHz: 5180-5320MHz, 5500-5720MHz, 5745-5825MHz 802.11n/ac-40MHz: 5190-5310, 5510-5710MHz, 5755-5795MHz 802.11ac-80MHz: 5210-5290MHz, 5530-5610MHz, 5775MHz
Number of Channels	802.11a/n-20MHz: 24, 802.11n-40MHz: 11, 802.11ac-80MHz: 6
Data Rate	802.11a: 6 - 54Mbps 802.11n: up to 300Mbps 802.11ac-80MHz: up to 866.7Mbps
Channel Control	Auto
Type of Modulation	OFDM, BPSK, QPSK, 16QAM, 64QAM, 256QAM
Channel Bandwidth	20/40/80MHz
DFS Function	<input checked="" type="checkbox"/> Master <input type="checkbox"/> Slave
TPC Function	<input checked="" type="checkbox"/> <500mW not required <input type="checkbox"/> \geq 500mW employ a TPC*
Communication Mode	<input checked="" type="checkbox"/> IP Based Systems <input type="checkbox"/> Frame Based System <input type="checkbox"/> Other System
Antenna Gain	Refer to the table "Antenna List"

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	MOXA	ANT-WDB-ANM-0306	Dipole	5.7dBi For 5.15~5.25GHz 5.7dBi For 5.25~5.35GHz 6.3dBi For 5.47~5.725GHz
2	MOXA	ANT-WDB-ANM-0502	Dipole	1.41dBi For 5GHz
3	MOXA	ANT-WDB-ARM-02	Dipole	0.81dBi For 5.15~5.25GHz 0.36Bi For 5.25~5.35GHz 0.36dBi For 5.47~5.725GHz
4	MOXA	ANT-WDB-ARM-0202	Dipole	1.8dBi For 5GHz
5	MOXA	MAT-WDB-CA-RM-2-0205	Dipole	5.7dBi For 5.15~5.25GHz 5.76Bi For 5.25~5.35GHz 5.7dBi For 5.47~5.725GHz
6	MOXA	MAT-WDB-DA-RM-2-0203-1m	Dipole	2.72dBi For 5.15~5.25GHz 2.72dBi For 5.25~5.35GHz 2.72dBi For 5.47~5.725GHz
7	MOXA	MAT-WDB-PA-NF-2-0708	Panel	8.77dBi For 5.15~5.25GHz 8.77dBi For 5.25~5.35GHz 8.61dBi For 5.47~5.725GHz
8	MOXA	ANT-WDB-PNF-1011	Panel	12.04dBi For 5.15~5.25GHz 12.04dBi For 5.25~5.35GHz 11.06dBi For 5.47~5.725GHz
9	MOXA	ANT-WDB-ONM-0707	Dipole	7.3dBi For 5.15~5.25GHz 7.3dBi For 5.25~5.35GHz 7.5dBi For 5.47~5.725GHz
10	MOXA	ANT-WDB-ONF-0709	Dipole	8.61dBi For 5.15~5.25GHz 8.15dBi For 5.25~5.35GHz 8.87dBi For 5.47~5.725GHz
11	MOXA	ANT-WSB5-PNF-16	Panel	16.38dBi For 5.15~5.25GHz 16.38dBi For 5.25~5.35GHz 16.94dBi For 5.47~5.725GHz

Note :

Each antenna has been evaluated and only the lower gain antenna is presented in the report.

802.11a/n/ac-20MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 036:	5180 MHz	Channel 040:	5200 MHz	Channel 044:	5220 MHz	Channel 048:	5240 MHz
Channel 052:	5260 MHz	Channel 056:	5280 MHz	Channel 060:	5300 MHz	Channel 064:	5320 MHz
Channel 100:	5500 MHz	Channel 104:	5520 MHz	Channel 108:	5540 MHz	Channel 112:	5560 MHz
Channel 116:	5580 MHz	Channel 120:	5600 MHz	Channel 124:	5620 MHz	Channel 128:	5640 MHz
Channel 132:	5660 MHz	Channel 136:	5680 MHz	Channel 140:	5700 MHz	Channel 144:	5720 MHz
Channel 149:	5745 MHz	Channel 153:	5765 MHz	Channel 157:	5785 MHz	Channel 161:	5805 MHz
Channel 165:	5825 MHz						

802.11n/ac-40MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 038:	5190 MHz	Channel 046:	5230 MHz	Channel 054:	5270 MHz	Channel 062:	5310 MHz
Channel 102:	5510 MHz	Channel 110:	5550 MHz	Channel 118:	5590 MHz	Channel 126:	5630 MHz
Channel 134:	5670 MHz	Channel 142:	5710 MHz	Channel 151:	5755 MHz	Channel 159:	5795 MHz

802.11ac-80MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 042:	5210 MHz	Channel 058:	5290 MHz	Channel 106:	5530 MHz	Channel 122:	5610 MHz
Channel 138:	5690 MHz	Channel 155:	5775 MHz				

Note:

- This is to request a Class II permissive change.
 The major change filed under this application is:
 Change #1: Additional Chassis added, Product name: Wireless AP/bridge/client, Brand: MOXA,
 Model number: AWK-4252A.
 Change #2: Add DFS master function through firmware.

Test Mode	Mode 1: Transmit (802.11n-20BW)-Master
	Mode 2: Transmit (802.11n-40BW)-Master
	Mode 3: Transmit (802.11ac-80BW)-Master

1.3. UNII Device Description

(1) The EUT operates in the following DFS band:

1. 5250-5350 MHz
2. 5470-5725 MHz

(2) The U-NII device maximum power is 29.87dBm(E.I.R.P).

Master mode:

Below are the available 50 ohm antenna assemblies and their corresponding gains. 0dBi gain was used to set the -61 dBm threshold level (-62dBm +1 dB) during calibration of the test setup.

Slave mode:

Below are the available 50 ohm antenna assemblies and their corresponding gains. 0dBi gain was used to set the -63 dBm threshold level (-64dBm +1 dB) during calibration of the test setup.

(3) WLAN traffic is generated by the test software “Iperf.exe” from the Master device to the Slave device in the transfer data rate >17%.

(4) For the 5250-5350MHz and 5470-5725 MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

(5) Master mode:

The client device is an Notebook pc contains Intel WLAN radio Module card

(Model: AX200NGW). The Intel WLAN Module card FCC ID: PD9AX200NG

1.4. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Radiated Emission	Temperature (°C)	10~40 °C	21.4 °C
	Humidity (%RH)	10~90 %	58.3 %

USA : **FCC Registration Number: TW0033**

Canada : **CAB Identifier Number: TW3023 / Company Number: 26930**

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No. 5-22, Ruishukeng Linkou District, New Taipei City,
24451, Taiwan

Performed Location : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City
333411, Taiwan, R.O.C.

Phone number : +886-3-275-7255
Fax number : +866-3-327-8031
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.5. Test Equipment

Dynamic Frequency Selection (DFS) / HY-SR05

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Spectrum Analyzer	R&S	FSV30	103467	2022.04.26
Vector Signal Generator	R&S	SMBV100	261871	2022.04.22

Instrument	Manufacturer	Type No.	Serial No
Splitter/Combiner (Qty: 2)	Mini-Circuits	ZFRSC-123-S+	SN331000910
Notebook PC	Dell	N/A	N/A
ATT	Mini-Circuits	15542	30912
ATT	Mini-Circuits	15542	30909
4 WAY Divider	WOKEN	0120A04056002D	151101
Rotary ATT (Qty: 2)	WOKEN	00801A1GGAM02Y	SMA 0-121dB
Access Point	XiRRUS	XR300	X103502006E80

Software	Manufacturer	Function
R&S Pulse Sequencer DFS V 2.3,7.3.2022 Build: 8101 Rev: 6527	R&S	Radar Signal Generation Software
Iperf v2.0.8	iperf.fr	Streaming data

1.6. Uncertainty


Uncertainties have been calculated according to the DEKRA internal document.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty
DFS	$\pm 2.31\text{ms}$

1.7. Test Setup

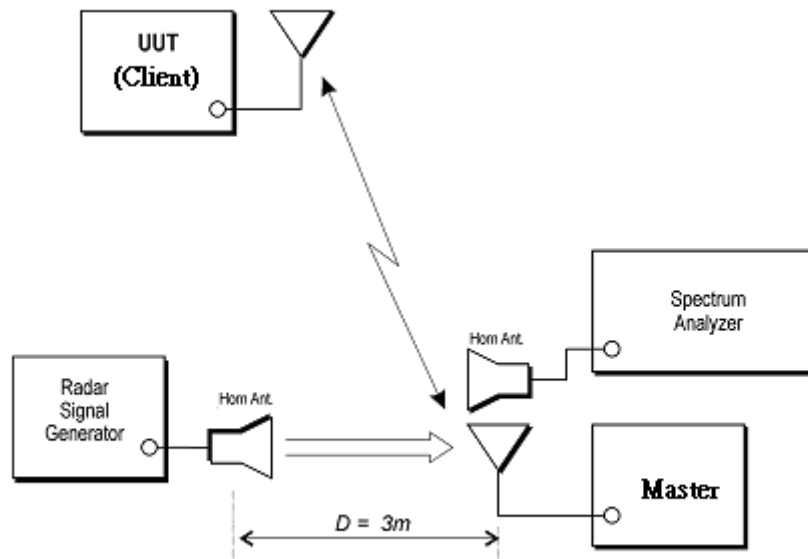

1.8. DFS Detection Thresholds

(1) Interference Threshold value, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64dBm
<p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p>	

Parameter	Value
Non-Occupancy Period	Minimum 30 Minutes
Channel Availability Check Time	60 Seconds
Channel Move Time	10 Seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period (See Notes 1 and 2)
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: *Channel Move Time* and the *Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel* move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

1.9. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

(1) Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360} \right), \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

(2) Long Pulse Radar Test Signal

Radar Waveform	Bursts	Number of Pulses Per Burst	Pulse Width (usec)	Chirp Width (MHz)	PRI (usec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the long pulse radar test signal. If more than 30 waveforms are used for the long pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:


- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a transmission period will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 Bursts are randomly generated for the Burst_Count.
- 3) Burst 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) Bursts 2 through 8 are generated using steps 3 – 5.

7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

Graphical Representation of a Long Pulse radar Test Waveform

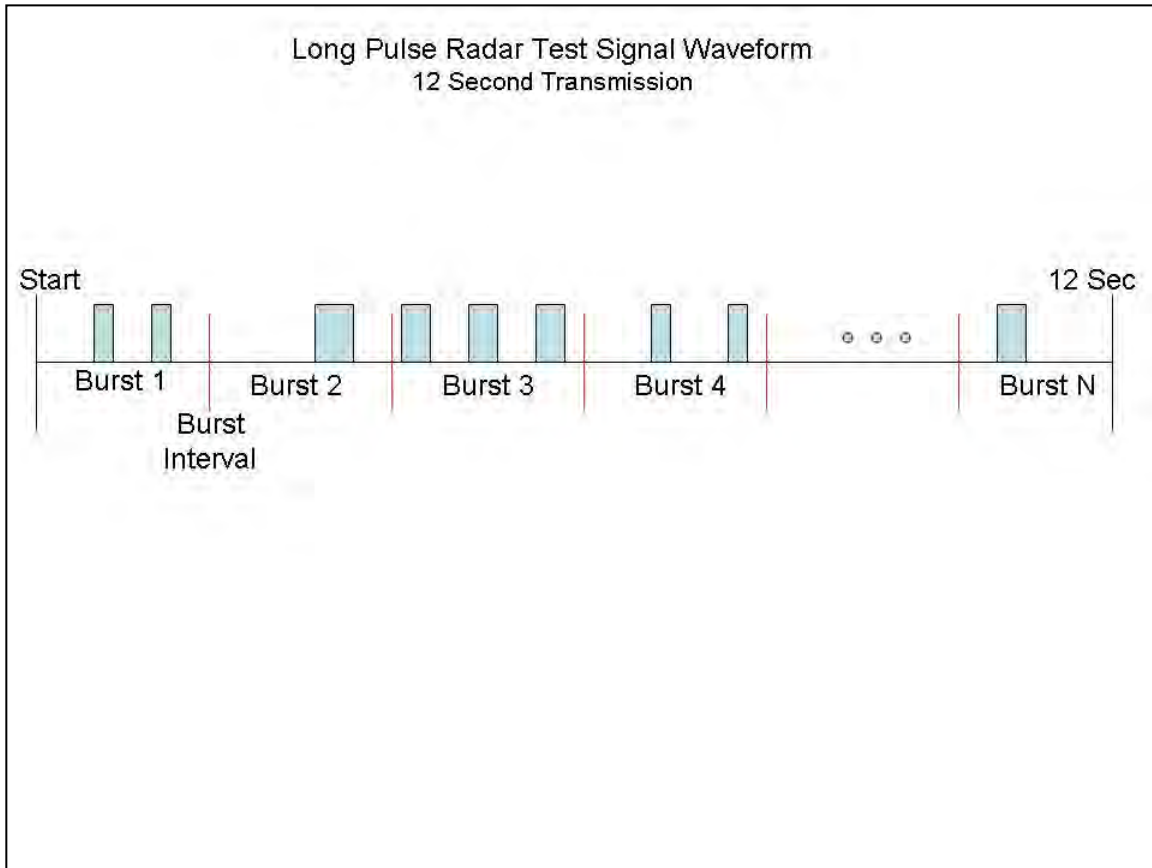

(3) Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Hopping Sequence Length (msec)	Pulses Per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

1.10. Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted radar waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were replace 50ohm terminal from master and client device and no transmissions by either the master or client device. The spectrum analyzer was switched to the zero span (time domain) at the frequency of the radar waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3MHz and 3 MHz.


The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm due to the interference threshold level is not required.

Radiated Calibration Setup

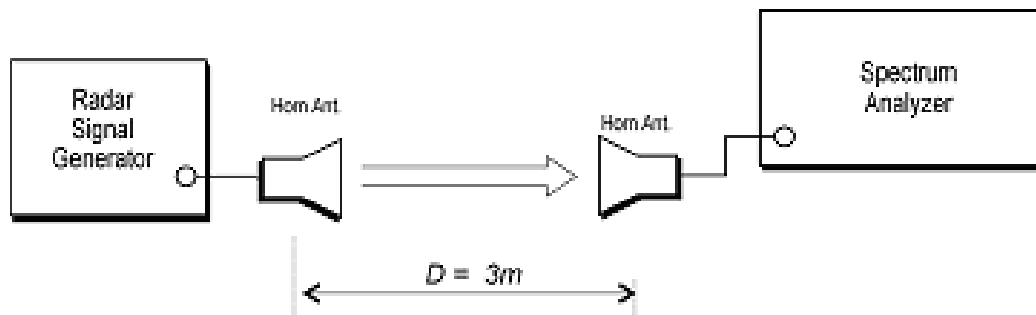


1.11. Radar Waveform Calibration Result

**Radar Type 0
Calibration Plot (5500MHz)**

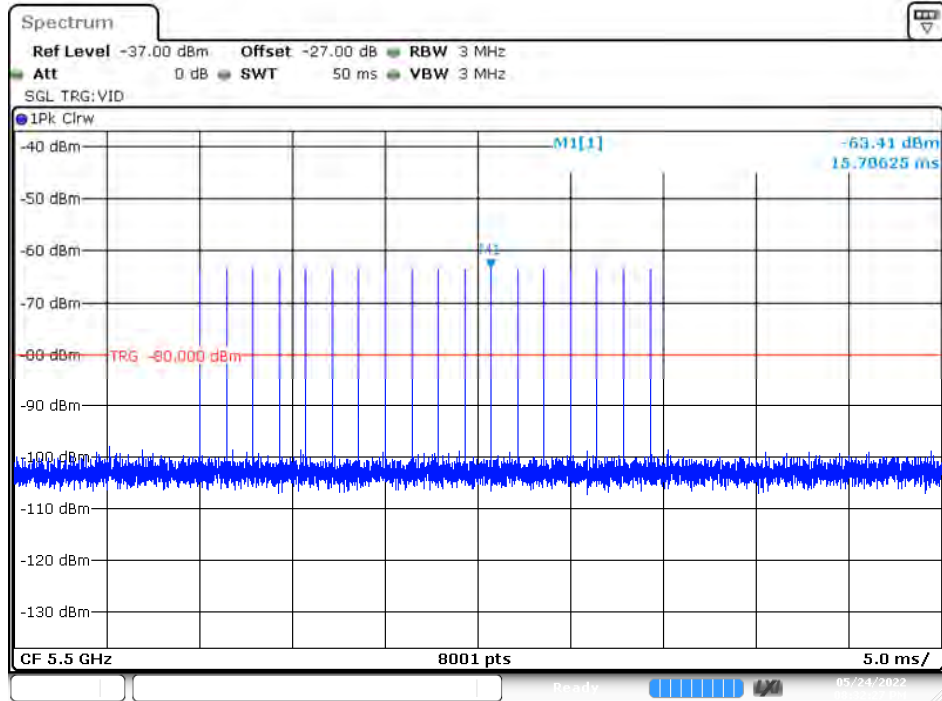


Date: 24.MAY.2022 20:32:27

Calibration Plot (5510MHz)

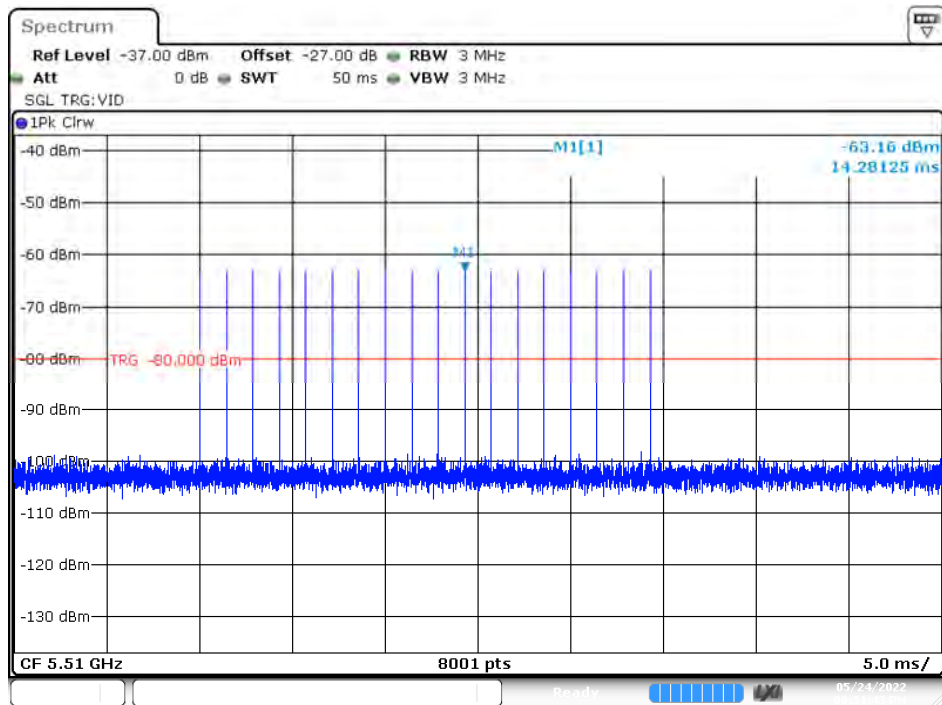


Date: 24.MAY.2022 20:31:44

Calibration Plot (5530MHz)

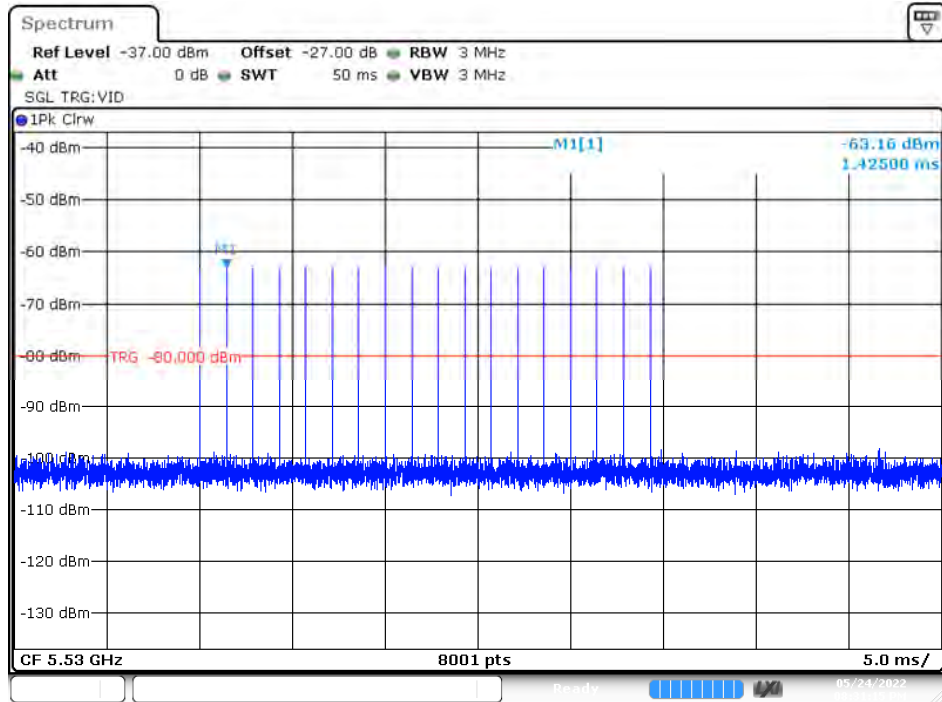


Date: 24.MAY.2022 20:31:15

Radar Type 1-A Calibration Plot (5500MHz)

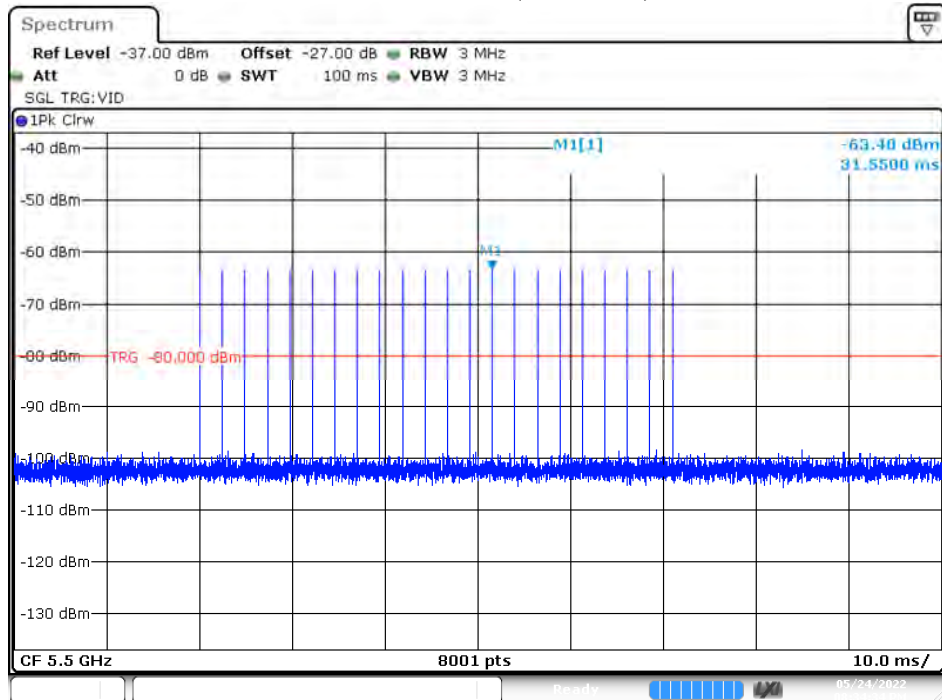


Date: 24.MAY.2022 20:34:34

Calibration Plot (5510MHz)

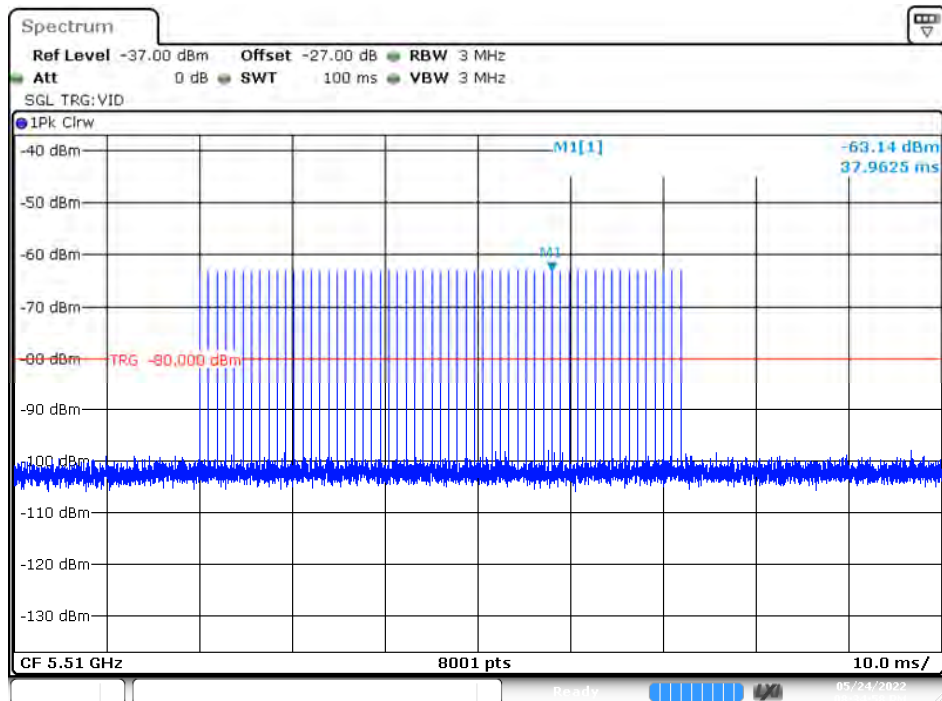

Date: 24.MAY.2022 20:34:59


Calibration Plot (5530MHz)

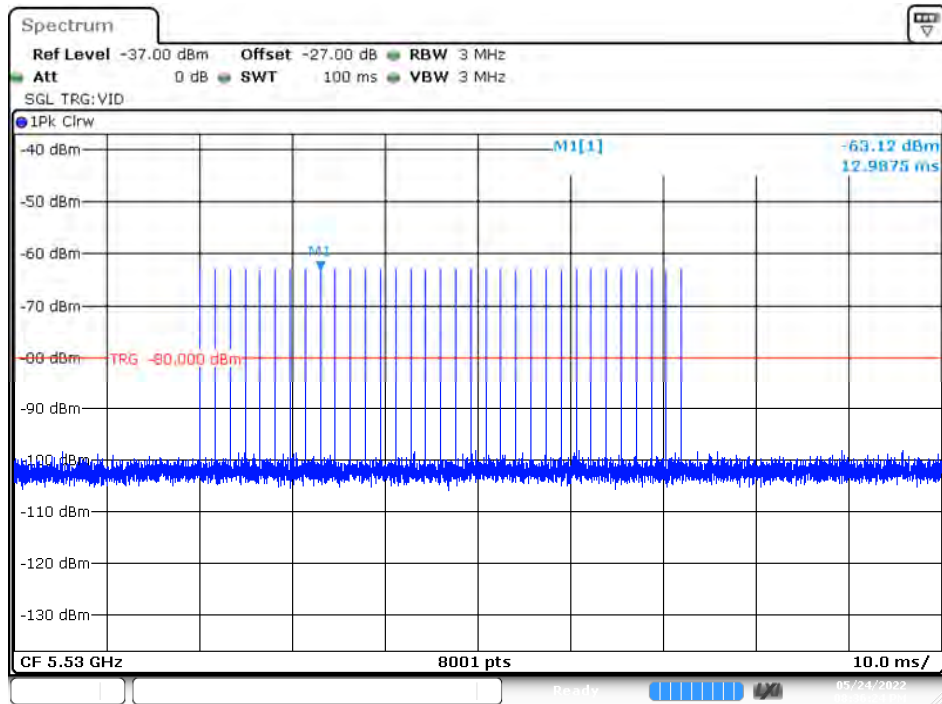

Date: 24.MAY.2022 20:36:24


Radar Type 1-B

Calibration Plot (5500MHz)

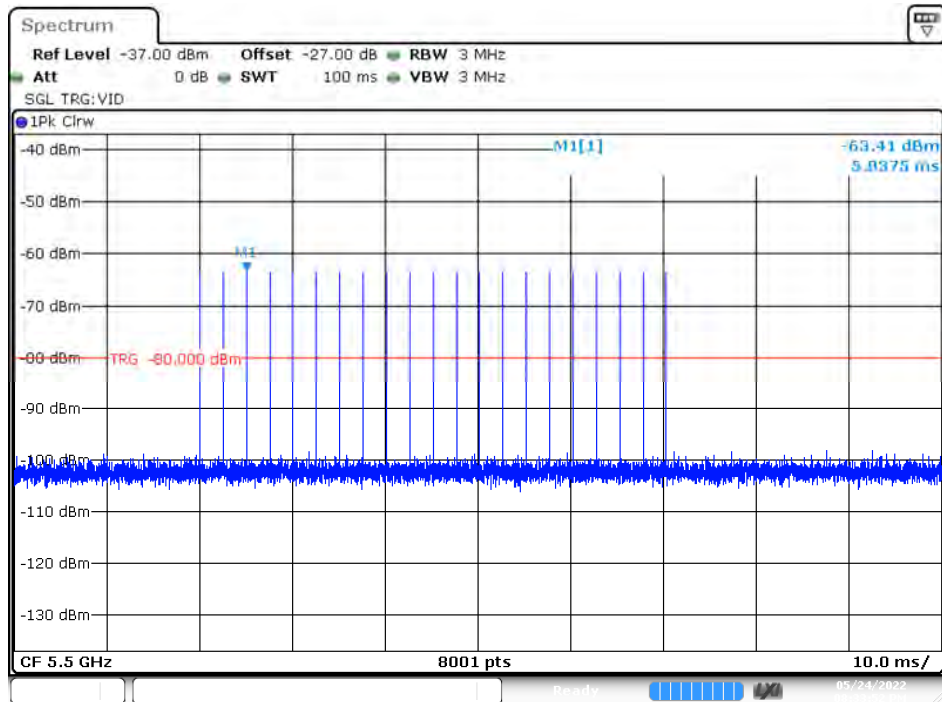


Date: 24.MAY.2022 20:33:52

Calibration Plot (5510MHz)

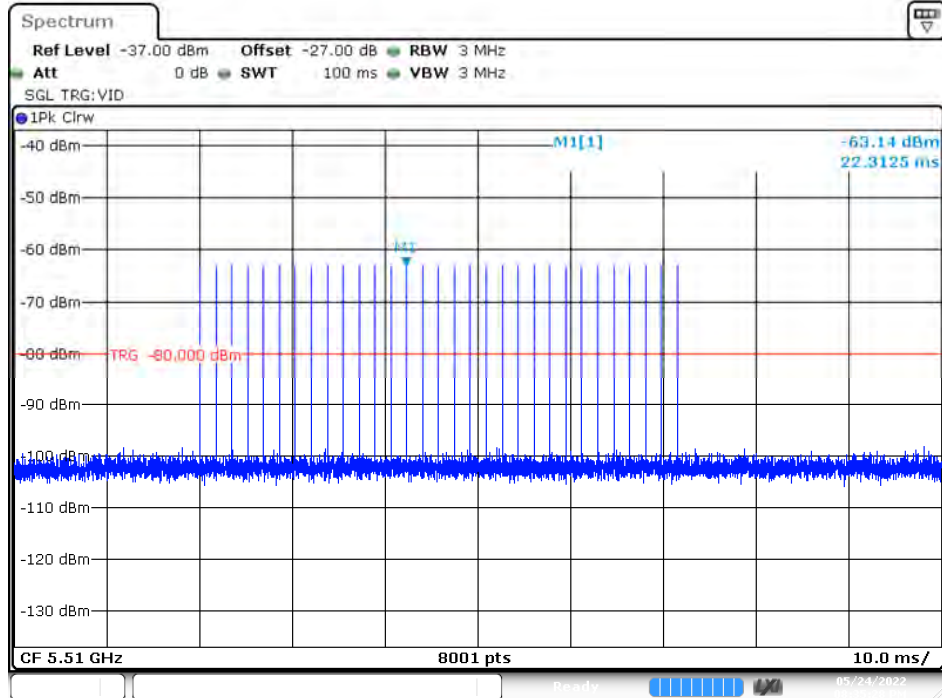


Date: 24.MAY.2022 20:35:29

Calibration Plot (5530MHz)

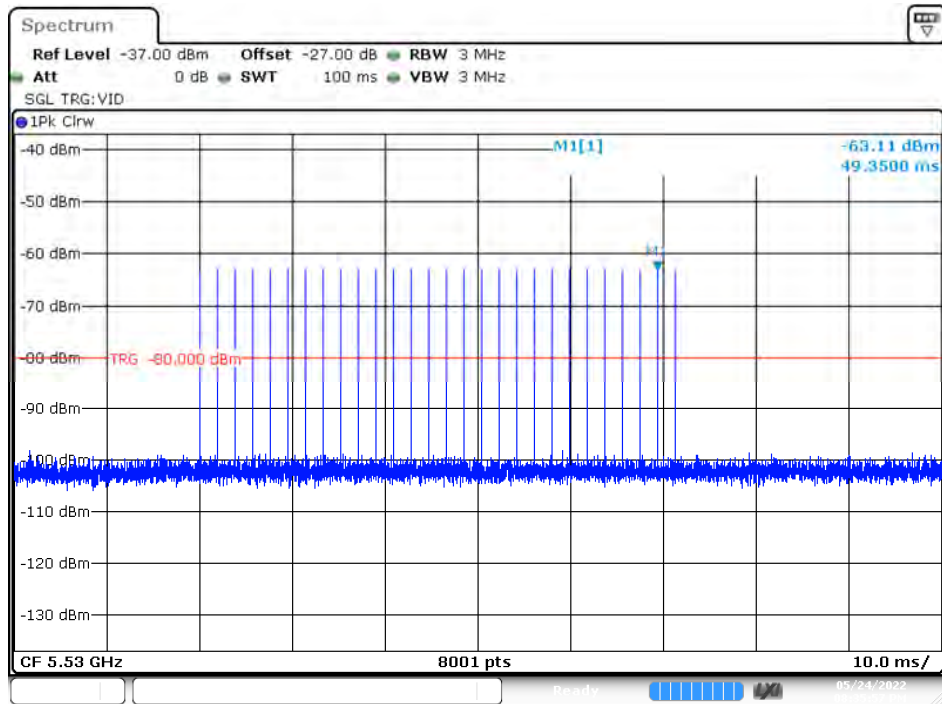


Date: 24.MAY.2022 20:35:57

Radar Type 2 Calibration Plot (5500MHz)

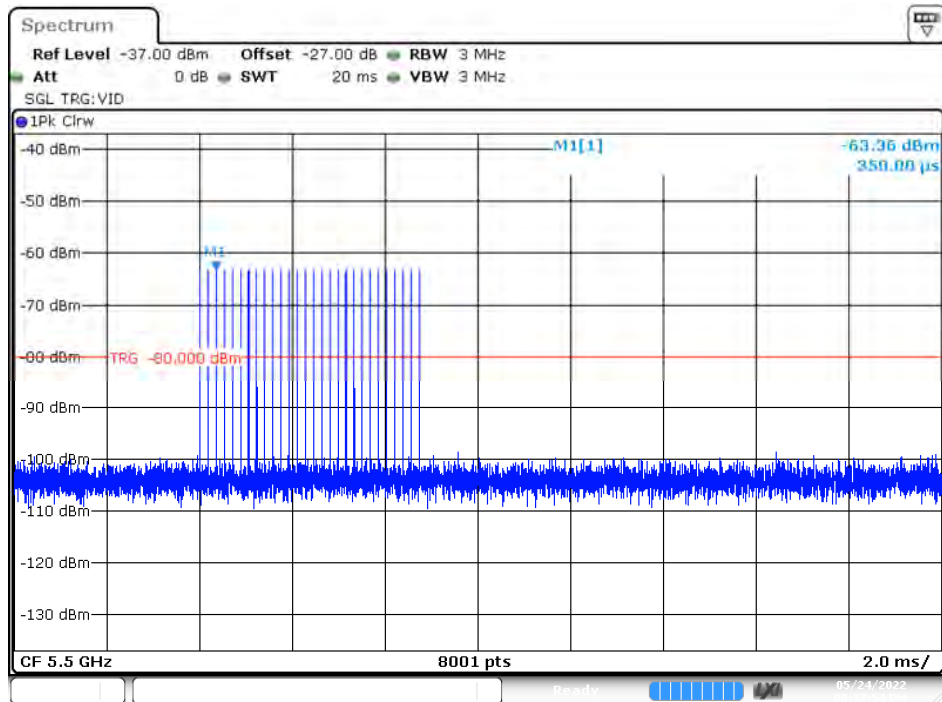


Date: 24.MAY.2022 20:37:55

Calibration Plot (5510MHz)

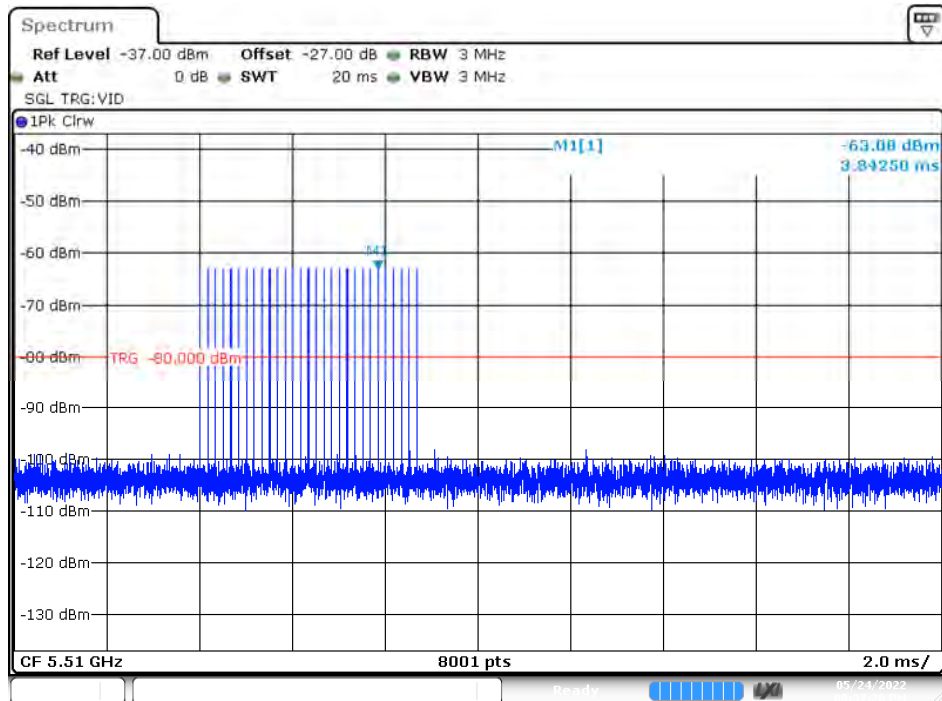


Date: 24.MAY.2022 20:37:27

Calibration Plot (5530MHz)

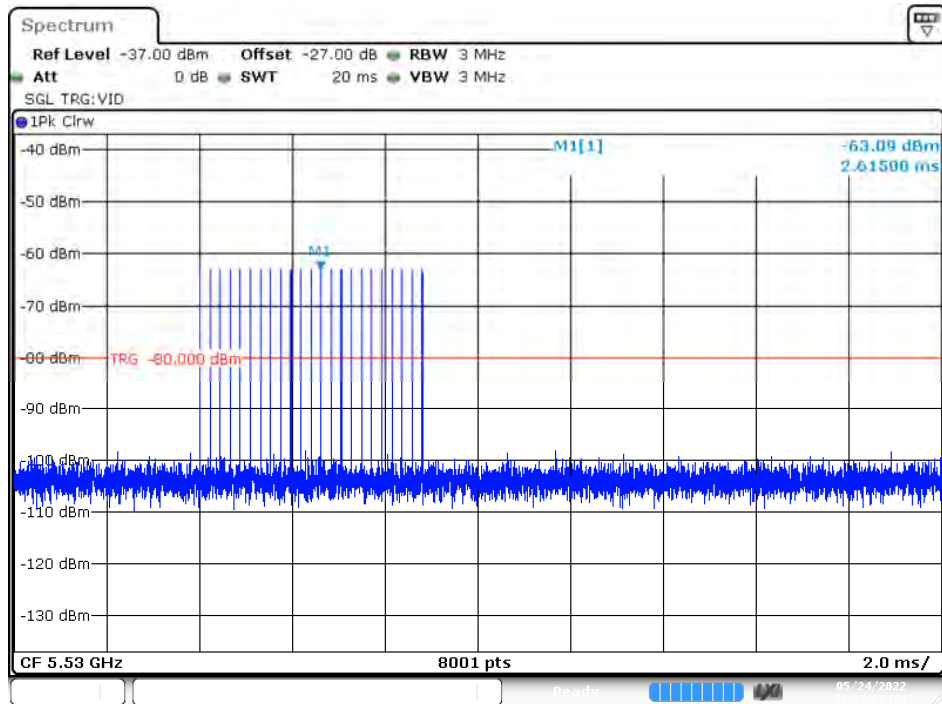


Date: 24.MAY.2022 20:37:01

Radar Type 3 Calibration Plot (5500MHz)

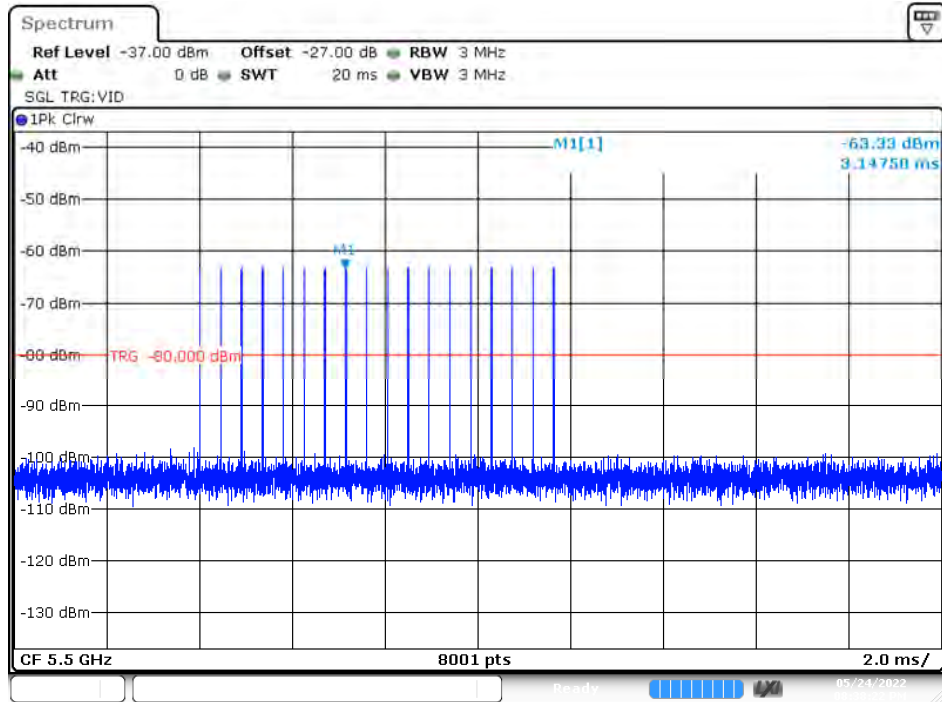


Date: 24.MAY.2022 20:38:22

Calibration Plot (5510MHz)

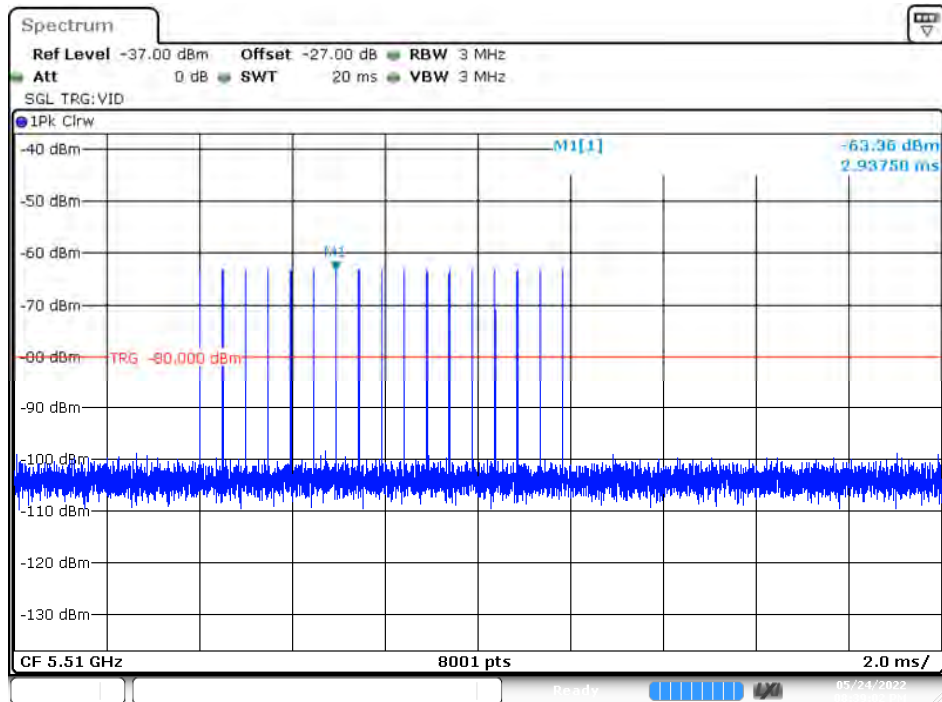


Date: 24.MAY.2022 20:39:03

Calibration Plot (5530MHz)

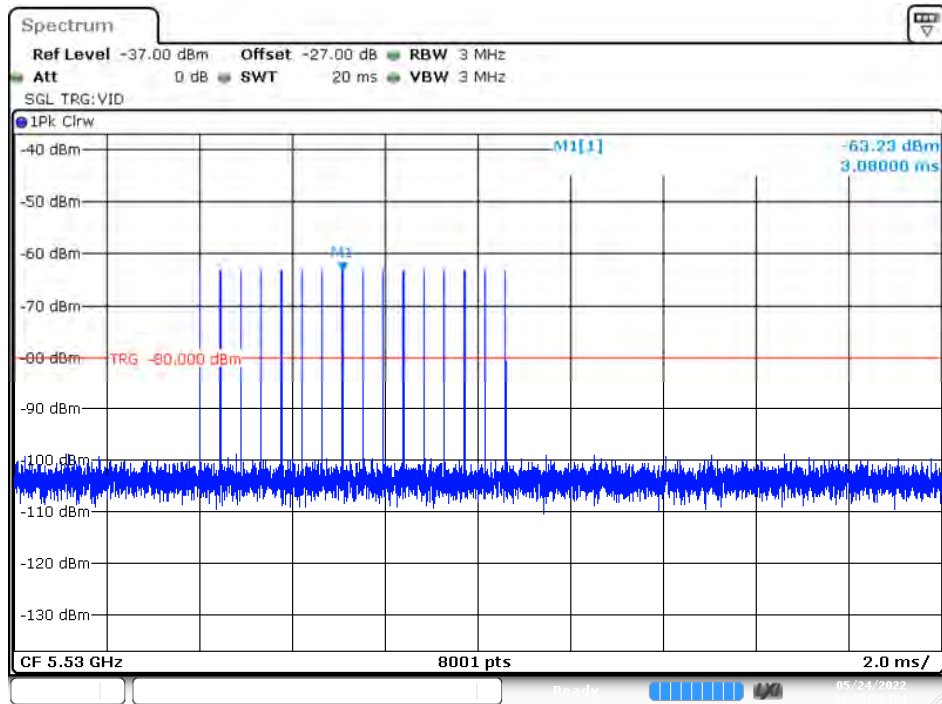


Date: 24.MAY.2022 20:39:29

Radar Type 4 Calibration Plot (5500MHz)

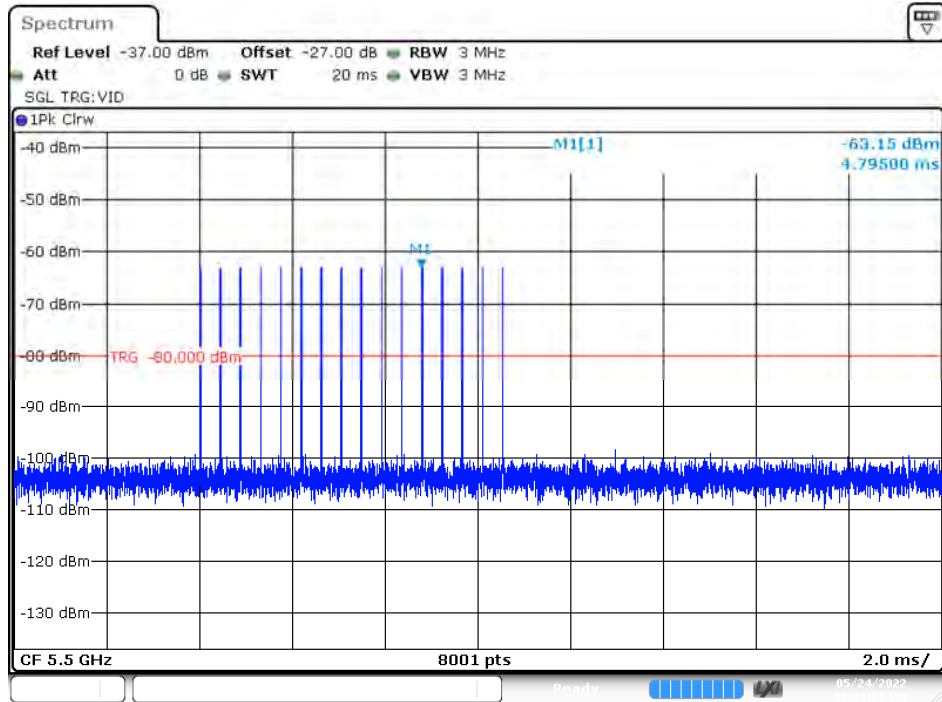


Date: 24.MAY.2022 20:41:07

Calibration Plot (5510MHz)

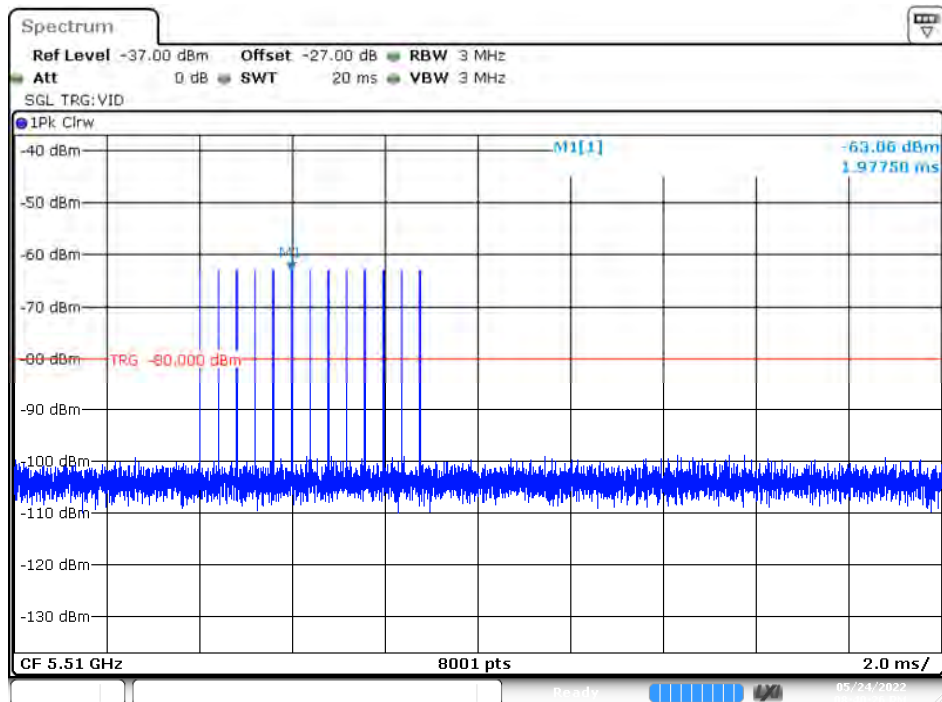


Date: 24.MAY.2022 20:40:26

Calibration Plot (5530MHz)

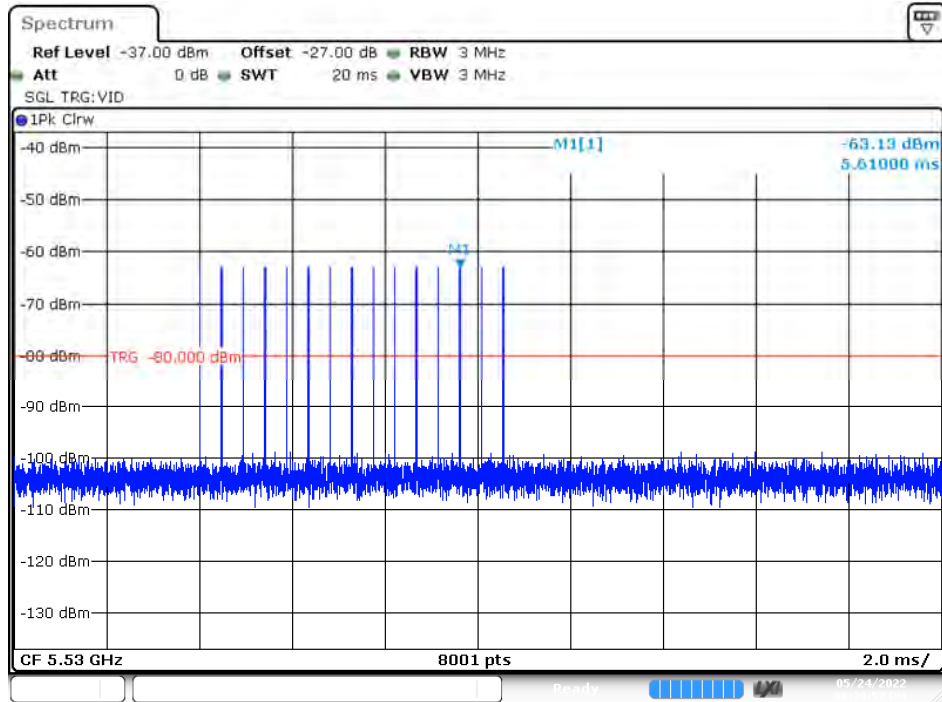


Date: 24.MAY.2022 20:39:57

Radar Type 5 Calibration Plot (5500MHz)

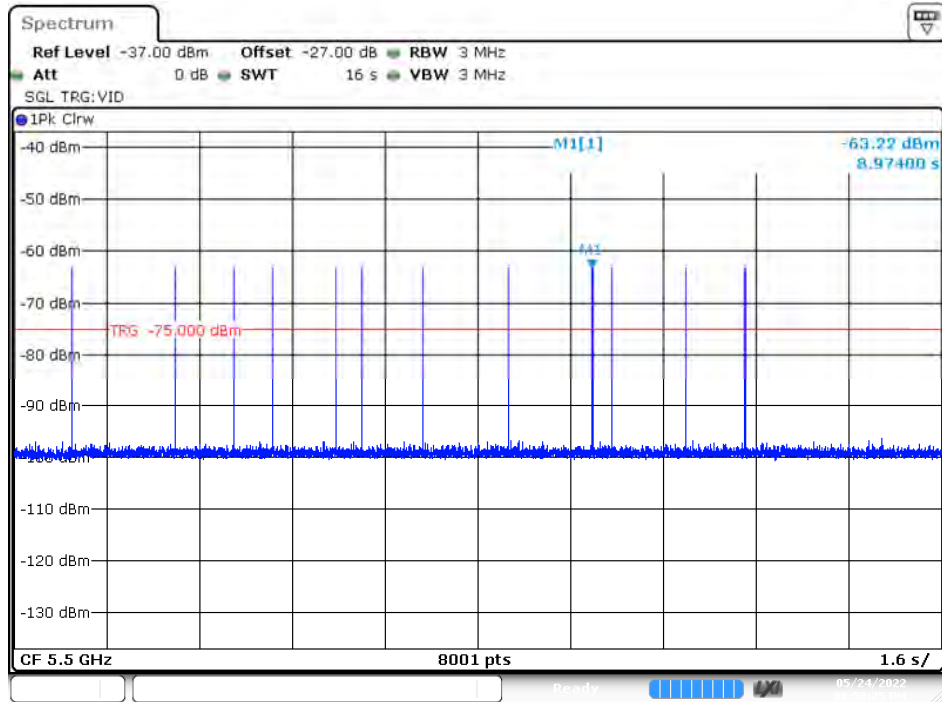


Date: 24.MAY.2022 20:58:26

Calibration Plot (5510MHz)

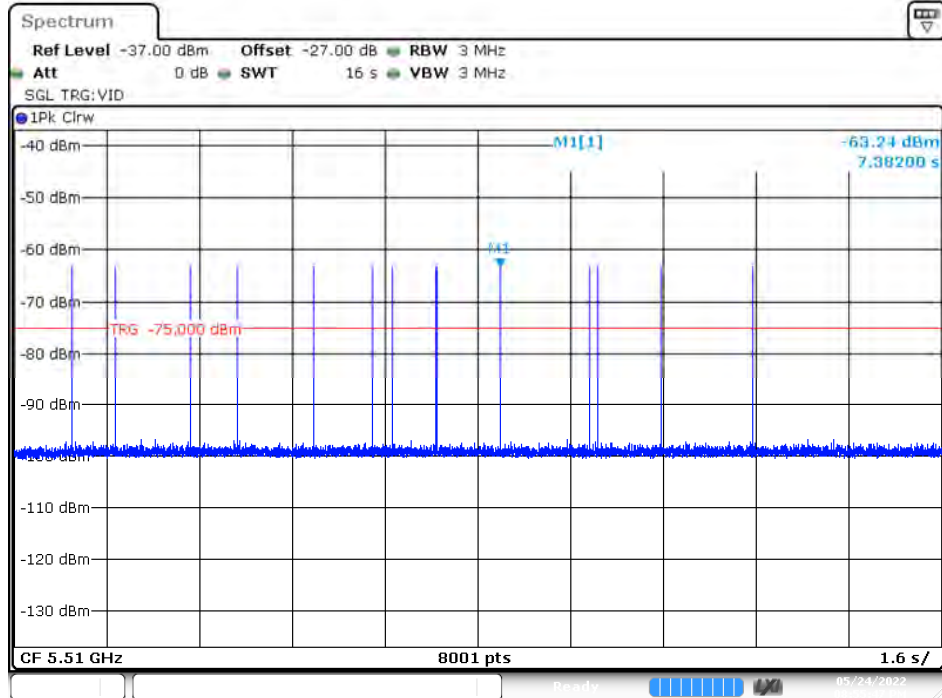


Date: 24.MAY.2022 20:55:48

Calibration Plot (5530MHz)

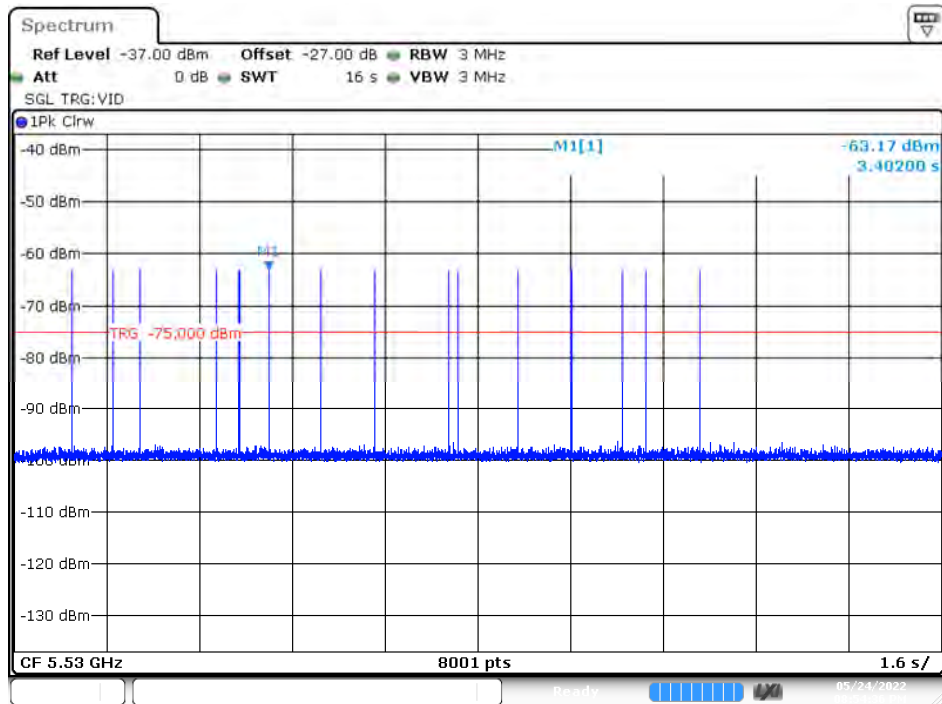


Date: 24.MAY.2022 20:54:37

Radar Type 6 Calibration Plot (5500MHz)

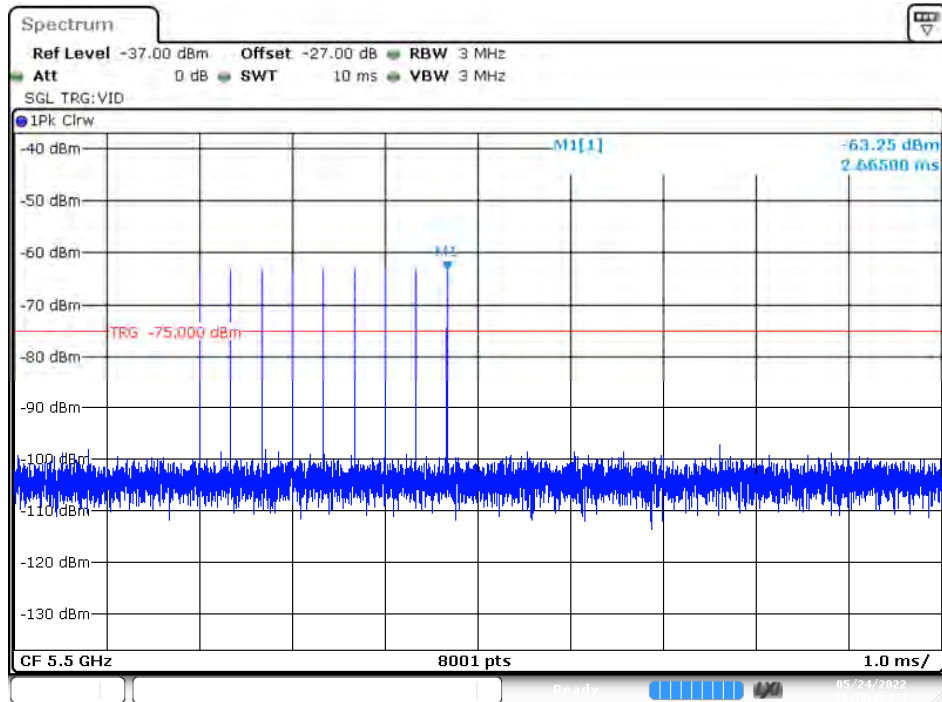


Date: 24.MAY.2022 20:48:19

Calibration Plot (5510MHz)

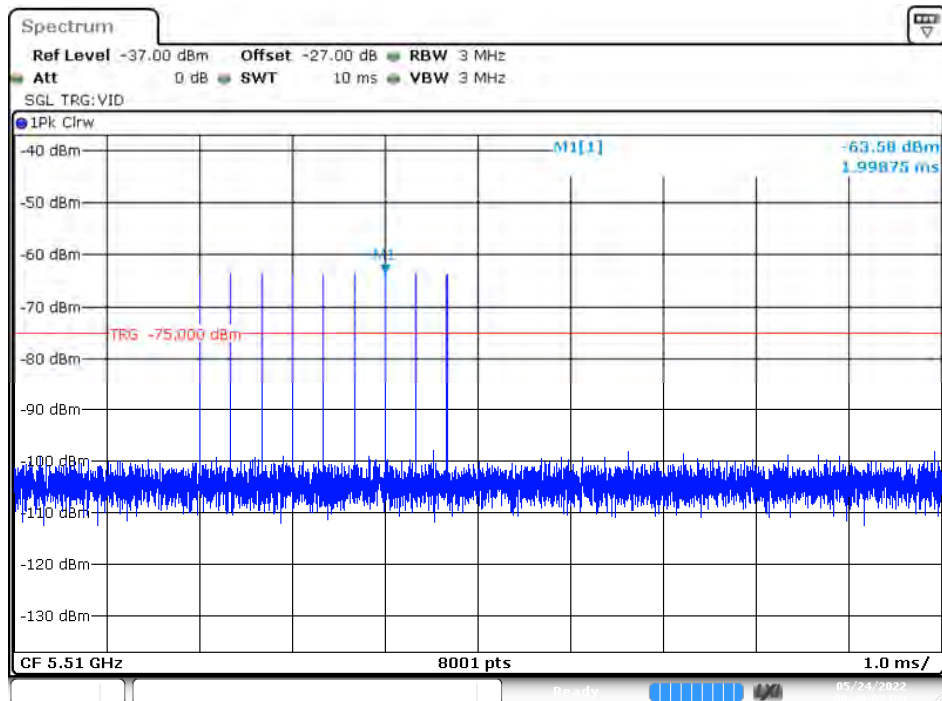

Date: 24.MAY.2022 20:49:08


Calibration Plot (5530MHz)

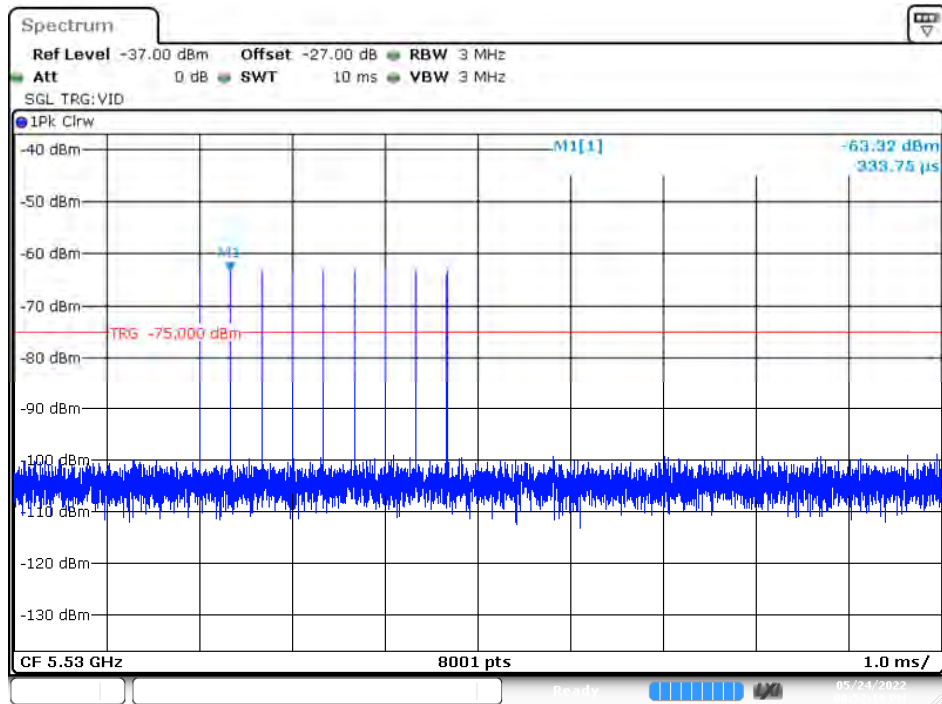

Date: 24.MAY.2022 20:52:20

1.12. Master Data Traffic Plot Result

Plot of WLAN Traffic at 5500MHz-20BW

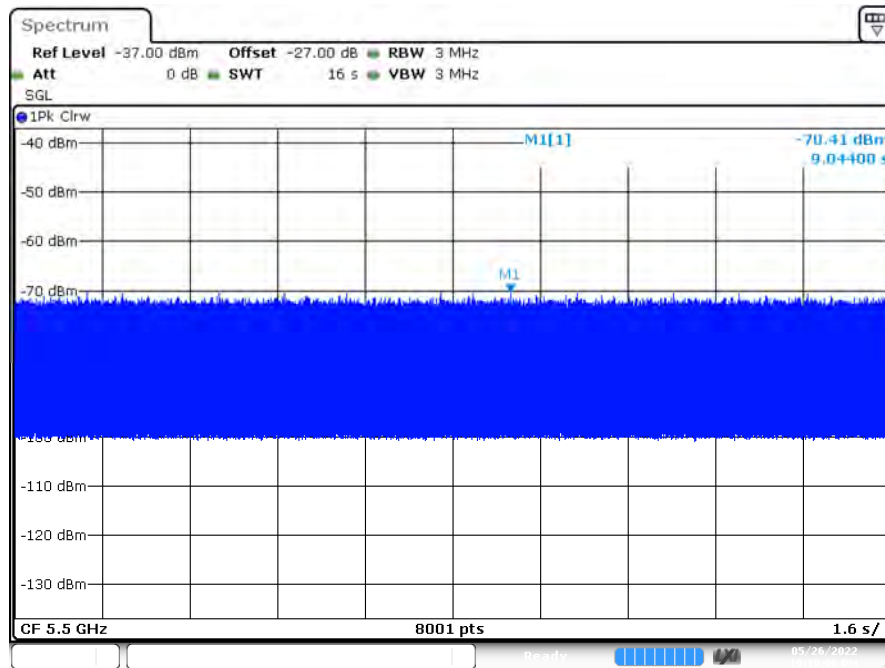


Date: 26.MAY.2022 22:19:07



Date: 26.MAY.2022 22:25:50

Channel loading	Requirement loading
17.5%	>17%

Plot of WLAN Traffic at 5510MHz-40BW

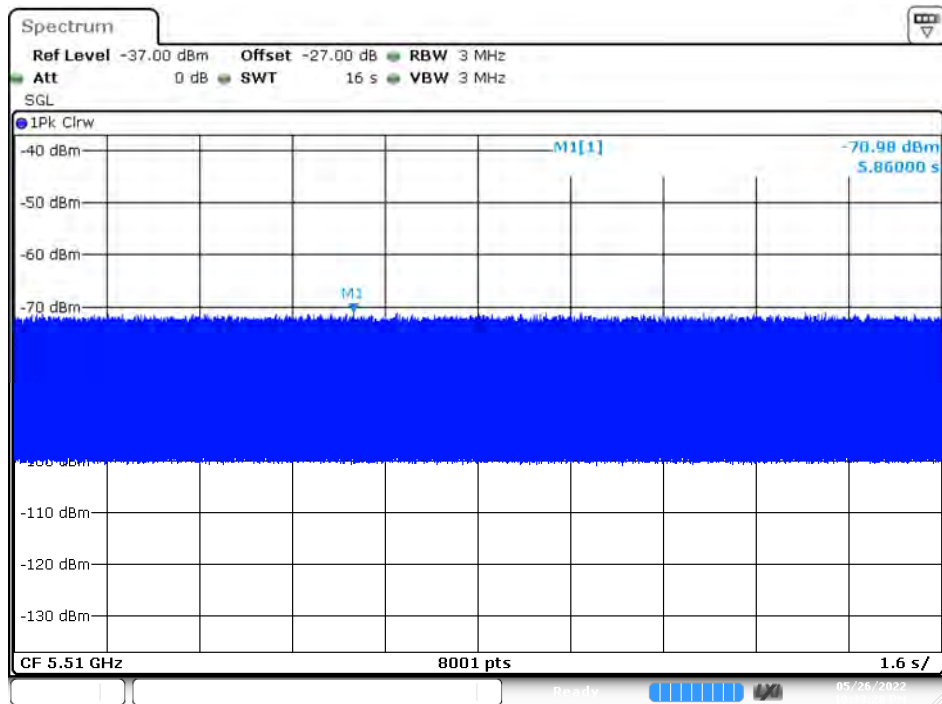


Date: 26.MAY.2022 22:33:29




Date: 26.MAY.2022 22:32:22

Channel loading	Requirement loading
18.125%	>17%

Plot of WLAN Traffic at 5530MHz-80BW

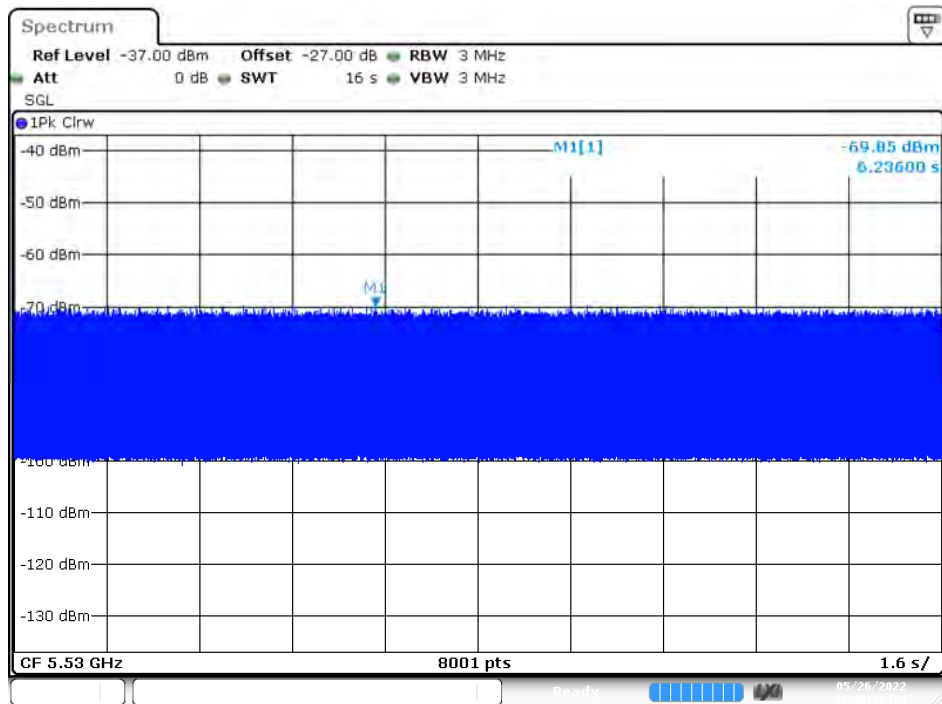

Date: 26.MAY.2022 22:40:11

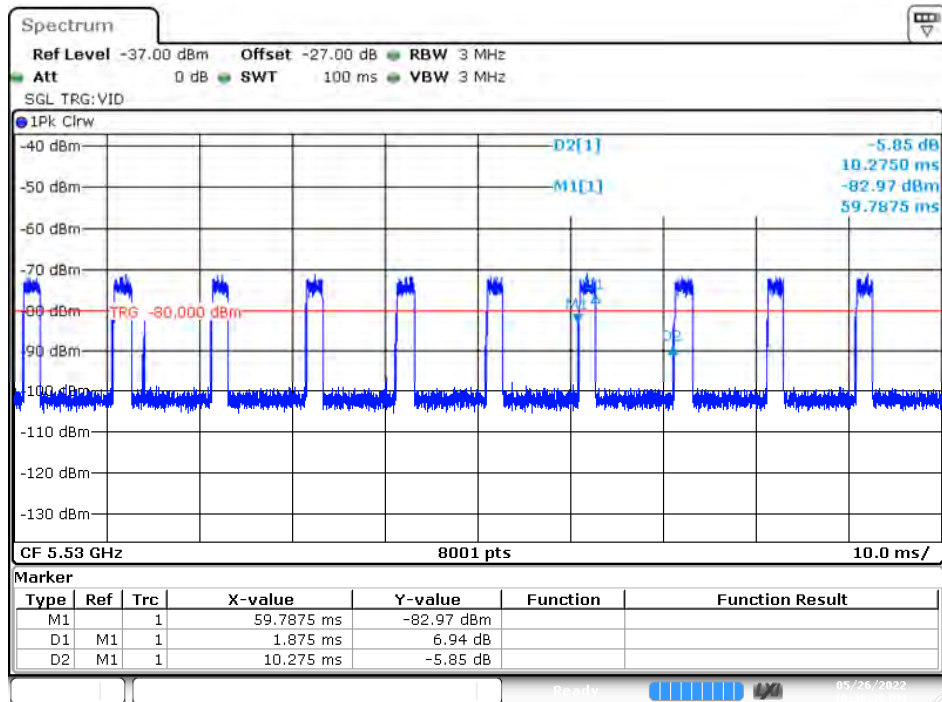

Date: 26.MAY.2022 22:36:36

Channel loading	Requirement loading
18.75%	>17%

2. UNII Detection Bandwidth

2.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The generating equipment is configured as shown in the radiated Test Setup above. A single *Burst* of the short pulse radar type 0 is produced at 5300MHz and 5510 at a -63dBm level. The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted.

The EUT must detect the Radar Waveform 90% or more of the time. The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as F_H.

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as F_L.

The U-NII Detection Bandwidth is calculated as follows:


$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 100% of the EUT transmitter 99% power, otherwise, the EUT does not comply with DFS requirements.

2.2. Test Requirement


All UNII 20/40MHz and 80MHz channels for this device have identical Channel bandwidths. All UNII 20/40/80MHz channels for this device also have identical Channel bandwidths. Therefore, all DFS testing was done at 5300MHz 、 5500MHz 、 5510MHz and 5530MHz. The 99% channel bandwidth for 20MHz signals is 17.43 MHz, and the 99% channel bandwidth for 40MHz signals is 35.96 MHz and 80MHz signals is 75.12MHz.Uncertainty

802.11n-20 BW

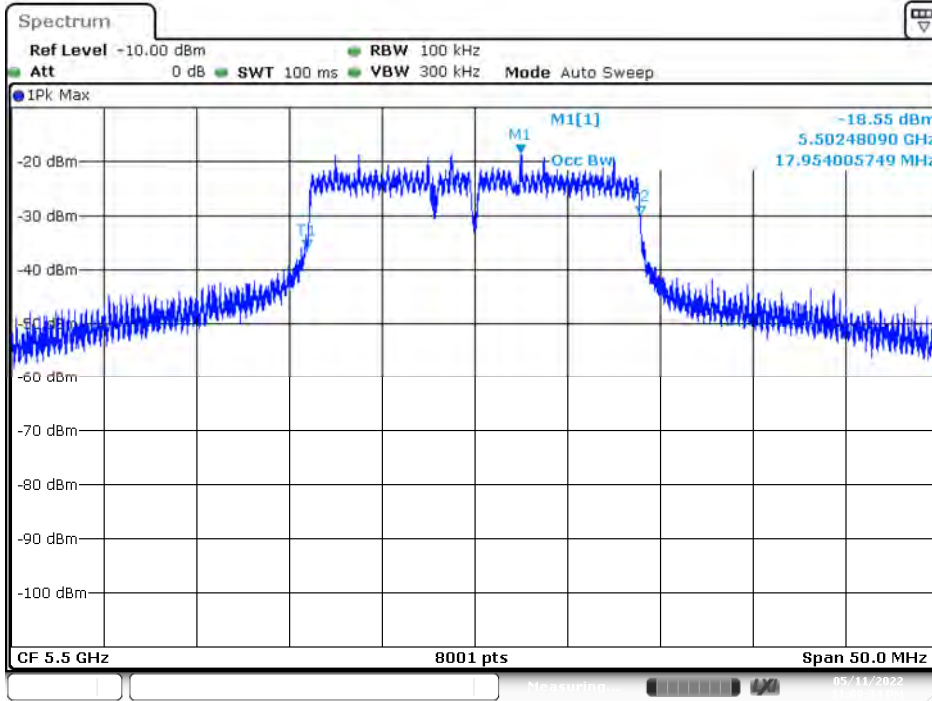


Date: 11.MAY.2022 23:09:34

802.11n-40 BW

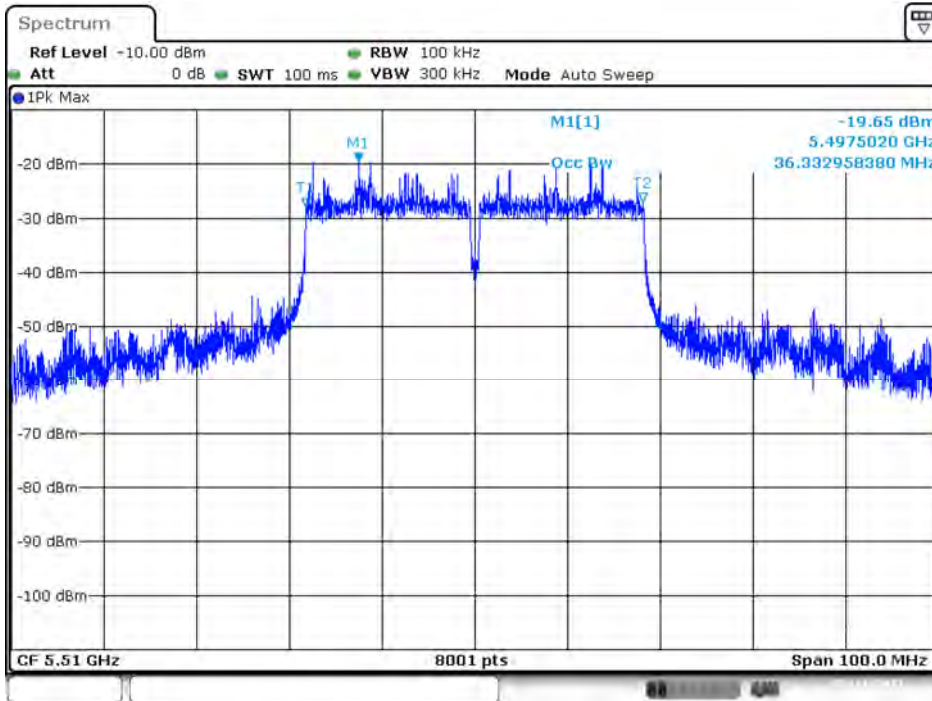

Date: 11.MAY.2022 23:06:33

802.11ac80 BW

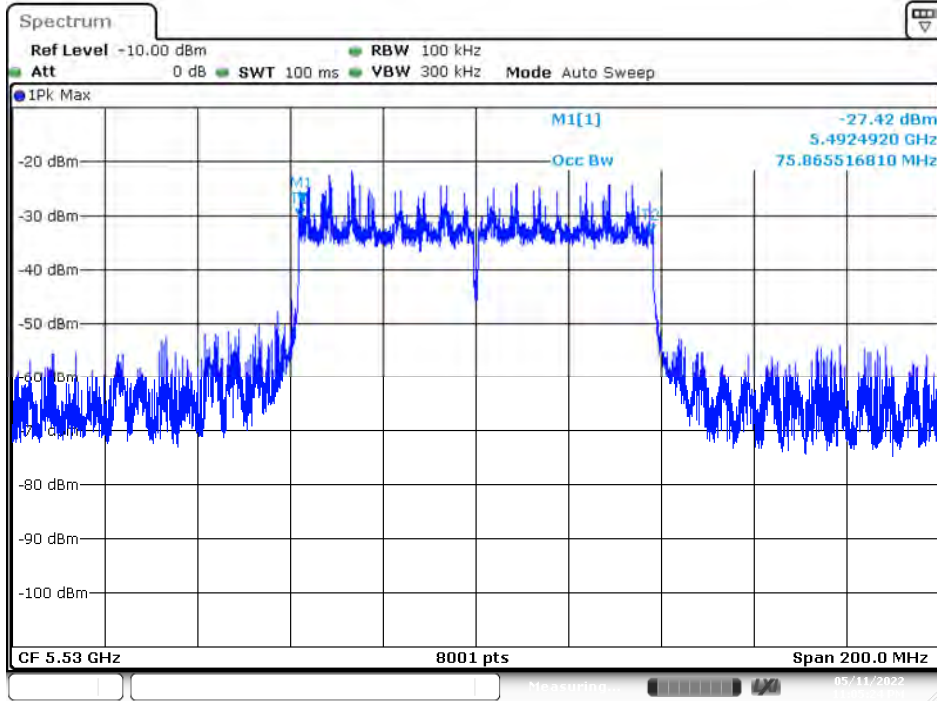

Date: 11.MAY.2022 23:05:24

2.3. Test Result of UNII Detection Bandwidth

Product : Wireless module
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11n-20BW)-Master

Test Channel: 5500MHz (n-20BW)											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	1	1	1	0	1	1	0	1	1	0	70.00
5491 (FL)	1	1	1	1	1	1	1	1	0	1	90.00
5492	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510 (FH)	1	1	1	1	1	1	1	1	1	1	100.00
Detection Bandwidth = FH - FL = 5510MHz - 5491MHz = 19MHz											
EUT 99% Bandwidth = 18.9164MHz											
UNII Detection Bandwidth Min. Limit = 18.9164MHz * 100% =18.9164MHz											

Product : Wireless module
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11n-40BW)-Master

Test Channel: 5510MHz (n-40BW)											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	1	1	0	1	1	1	1	0	1	1	80.00
5491 (FL)	1	1	1	1	1	1	1	0	1	1	90.00
5492	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510	1	1	1	1	1	1	1	1	1	1	100.00
5511	1	1	1	1	1	1	1	1	1	1	100.00
5512	1	1	1	1	1	1	1	1	1	1	100.00
5513	1	1	1	1	1	1	1	1	1	1	100.00
5514	1	1	1	1	1	1	1	1	1	1	100.00
5515	1	1	1	1	1	1	1	1	1	1	100.00
5516	1	1	1	1	1	1	1	1	1	1	100.00

5517	1	1	1	1	1	1	1	1	1	1	100.00
5518	1	1	1	1	1	1	1	1	1	1	100.00
5519	1	1	1	1	1	1	1	1	1	1	100.00
5520	1	1	1	1	1	1	1	1	1	1	100.00
5521	1	1	1	1	1	1	1	1	1	1	100.00
5522	1	1	1	1	1	1	1	1	1	1	100.00
5523	1	1	1	1	1	1	1	1	1	1	100.00
5524	1	1	1	1	1	1	1	1	1	1	100.00
5525	1	1	1	1	1	1	1	1	1	1	100.00
5526	1	1	1	1	1	1	1	1	1	1	100.00
5527	1	1	1	1	1	1	1	1	1	1	100.00
5528	1	1	1	1	1	1	1	1	1	1	100.00
5529 (FH)	1	1	1	1	1	1	1	1	1	1	100.00
5530	1	1	1	1	0	1	1	0	1	1	80.00
Detection Bandwidth = FH - FL = 5529MHz - 5491MHz = 38MHz											
EUT 99% Bandwidth = 37.8078MHz											
UNII Detection Bandwidth Min. Limit = 37.8078MHz * 100% = 37.8078MHz											

Product : Wireless module
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ac-80BW)-Master

Test Channel: 5530MHz (n-80BW)											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	1	1	0	1	1	0	0	1	0	1	60.00
5491 (FL)	1	1	0	1	1	1	1	1	1	1	90.00
5492	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510	1	1	1	1	1	1	1	1	1	1	100.00
5511	1	1	1	1	1	1	1	1	1	1	100.00
5512	1	1	1	1	1	1	1	1	1	1	100.00
5513	1	1	1	1	1	1	1	1	1	1	100.00
5514	1	1	1	1	1	1	1	1	1	1	100.00
5515	1	1	1	1	1	1	1	1	1	1	100.00
5516	1	1	1	1	1	1	1	1	1	1	100.00

5517	1	1	1	1	1	1	1	1	1	1	100.00
5518	1	1	1	1	1	1	1	1	1	1	100.00
5519	1	1	1	1	1	1	1	1	1	1	100.00
5520	1	1	1	1	1	1	1	1	1	1	100.00
5521	1	1	1	1	1	1	1	1	1	1	100.00
5522	1	1	1	1	1	1	1	1	1	1	100.00
5523	1	1	1	1	1	1	1	1	1	1	100.00
5524	1	1	1	1	1	1	1	1	1	1	100.00
5525	1	1	1	1	1	1	1	1	1	1	100.00
5526	1	1	1	1	1	1	1	1	1	1	100.00
5527	1	1	1	1	1	1	1	1	1	1	100.00
5528	1	1	1	1	1	1	1	1	1	1	100.00
5529	1	1	1	1	1	1	1	1	1	1	100.00
5530	1	1	1	1	1	1	1	1	1	1	100.00
5531	1	1	1	1	1	1	1	1	1	1	100.00
5532	1	1	1	1	1	1	1	1	1	1	100.00
5533	1	1	1	1	1	1	1	1	1	1	100.00
5534	1	1	1	1	1	1	1	1	1	1	100.00
5535	1	1	1	1	1	1	1	1	1	1	100.00
5536	1	1	1	1	1	1	1	1	1	1	100.00
5537	1	1	1	1	1	1	1	1	1	1	100.00
5538	1	1	1	1	1	1	1	1	1	1	100.00
5539	1	1	1	1	1	1	1	1	1	1	100.00
5540	1	1	1	1	1	1	1	1	1	1	100.00
5541	1	1	1	1	1	1	1	1	1	1	100.00
5542	1	1	1	1	1	1	1	1	1	1	100.00
5543	1	1	1	1	1	1	1	1	1	1	100.00
5544	1	1	1	1	1	1	1	1	1	1	100.00
5545	1	1	1	1	1	1	1	1	1	1	100.00
5546	1	1	1	1	1	1	1	1	1	1	100.00
5547	1	1	1	1	1	1	1	1	1	1	100.00
5548	1	1	1	1	1	1	1	1	1	1	100.00
5549	1	1	1	1	1	1	1	1	1	1	100.00
5550	1	1	1	1	1	1	1	1	1	1	100.00

5551	1	1	1	1	1	1	1	1	1	1	100.00
5552	1	1	1	1	1	1	1	1	1	1	100.00
5553	1	1	1	1	1	1	1	1	1	1	100.00
5554	1	1	1	1	1	1	1	1	1	1	100.00
5555	1	1	1	1	1	1	1	1	1	1	100.00
5556	1	1	1	1	1	1	1	1	1	1	100.00
5557	1	1	1	1	1	1	1	1	1	1	100.00
5558	1	1	1	1	1	1	1	1	1	1	100.00
5559	1	1	1	1	1	1	1	1	1	1	100.00
5560	1	1	1	1	1	1	1	1	1	1	100.00
5561	1	1	1	1	1	1	1	1	1	1	100.00
5562	1	1	1	1	1	1	1	1	1	1	100.00
5563	1	1	1	1	1	1	1	1	1	1	100.00
5564	1	1	1	1	1	1	1	1	1	1	100.00
5565	1	1	1	1	1	1	1	1	1	1	100.00
5566	1	1	1	1	1	1	1	1	1	1	100.00
5567	1	1	1	1	1	1	1	1	1	1	100.00
5568	1	1	1	1	1	1	1	1	1	1	100.00
5569 (FH)	1	1	1	1	1	1	1	1	1	1	100.00
5570	1	1	1	0	1	1	0	1	1	1	80.00
Detection Bandwidth = FH - FL = 5569MHz - 5491MHz = 78MHz											
EUT 99% Bandwidth = 76.7654MHz											
UNII Detection Bandwidth Min. Limit = 76.7654MHz X 100% =76.7654MHz											

3. Initial Channel Availability Check Time

3.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The U-NII device is powered on and instructed to operate at 5530MHz. At the same time the UUT is powered on, the spectrum analyzer is set to zero span mode with a 3 MHz resolution bandwidth at 5530MHz with a 2.5minute sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.

The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.

The initial power up time of the EUT is indicated by marker1 in the plot, Initial beacons/data transmissions are indicated by marker 1R.


3.2. Test Requirement

The EUT shall perform a channel availability check to ensure that there is no radar operation on the channel, after power-up sequence, receiver at least 1 minute on the intended operation frequency.

3.3. Test Result of Initial Channel Availability Check Time

Product : Wireless module
 Test Item : Initial Channel Availability Check Time
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ac-80BW)-Master

The EUT does not transmit any beacon or data transmission until at least 1 minute after the completion of the power-on cycle (9.4125sec). The initial power up time of the EUT is indicated by Marker 1 (69.4125 sec) – CAC (60 sec). Initial beacons/data transmission is indicated by Marker 1 (69.4125 sec)

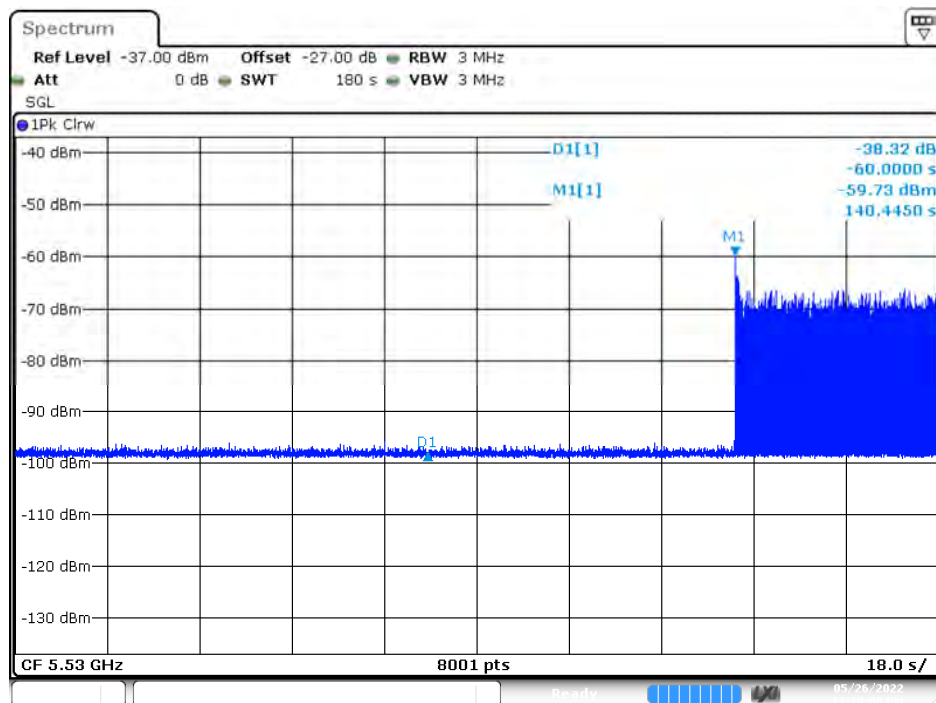

Date: 26.MAY.2022 23:10:00

4. Radar Burst at the Beginning of the Channel Availability Check Time

4.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-62dBm) occurs at the beginning of the Channel Availability Check Time.

The EUT is powered on at T0. T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds.

A single Burst of short pulse of radar type 1 at -63dBm will commence within a 6 second window starting at T1.


Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5530MHz will continue for 2.5 minutes after the radar Burst, Verify that during the 2.5 minute measurement window no EUT transmissions occurred at 5530MHz.

4.2. Test Requirement

In beginning of the Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC that channel.

4.3. Test Result of Radar Burst at the Beginning of the Channel Availability Check Time

Product : Wireless module
 Test Item : Radar Burst at the Beginning of the Channel Availability Check Time
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ac-80BW)-Master

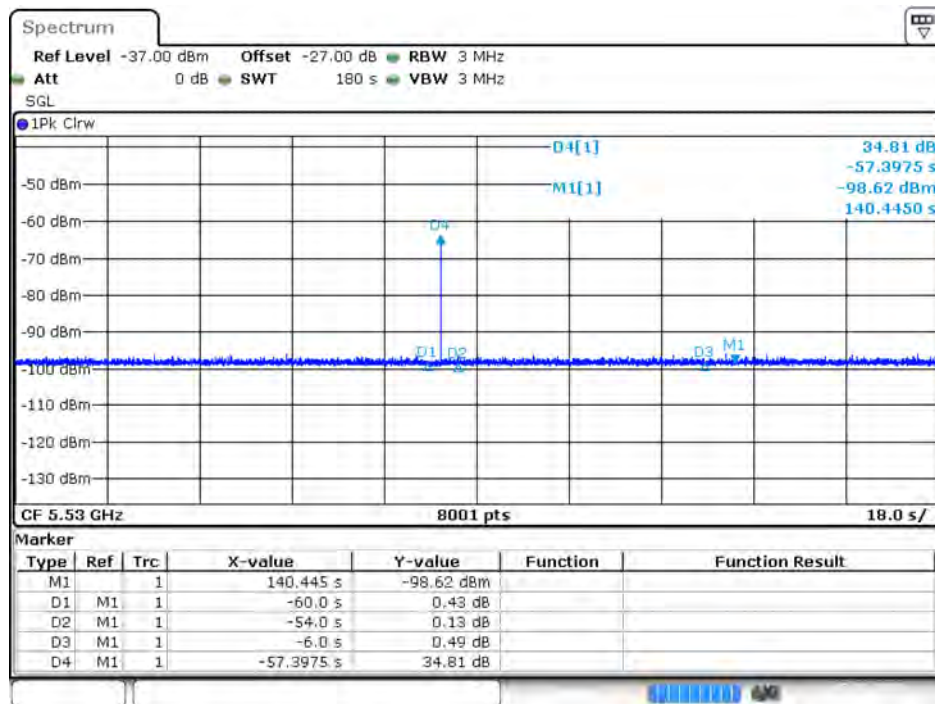

Date: 26.MAY.2022 23:18:40

5. Radar Burst at the End of the Channel Availability Check Time

5.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-62dBm) occurs at the end of the Channel Availability Check Time.

The UUT is powered on at T_0 . T_1 denotes the instant when the UUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T_1 and will end no sooner than $T_1 + 60$ seconds. A single Burst of short pulse of radar type 1 at -61 dBm will commence within a 6 second window starting at $T_1 + 54$ seconds.

Visual indication on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5530MHz will continue for 2.5 minutes after the radar Burst has been generated.


Verify that during the 2.5 minute measurement window no UUT transmissions occurred at 5530Hz.

5.2. Test Requirement

In the end of Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC that channel.

5.3. Test Result of Radar Burst at the End of the Channel Availability Check Time

Product : Wireless module
 Test Item : Radar Burst at the End of the Channel Availability Check Time
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ac-80BW)-Master

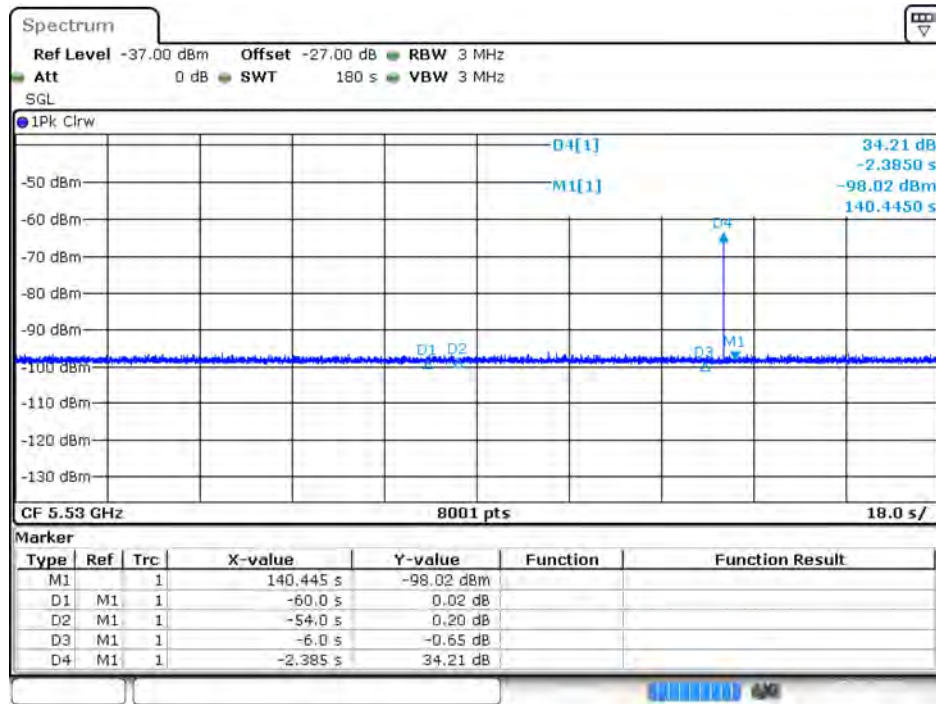

Date: 26.MAY.2022 23:38:40

6. In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period

6.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

These tests define how the following DFS parameters are verified during In-Service Monitoring;

Channel Closing Transmission Time, Channel Move Time, and Non-Occupancy Period.. The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5530MHz..

Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at -61dBm.

Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing

Transmission Time results to the limits defined in the DFS Response requirement values table.

Measure the UUT for more than 30 minutes following the channel close/move time to verify that the UUT does not resume any transmissions on this Channel.


6.2. Test Requirement

Parameter	Value
Channel Move Time	10 Seconds
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period
Non-Occupancy Period	Minimum 30 minutes

6.3. Test Result of Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period

Product : Wireless module
 Test Item : Channel Move Time and Channel Closing Transmission Time
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ac-80BW)-Master

Channel Closing Transmission Time and Channel Move Time for Radar Test Type 0 at 5530 MHz

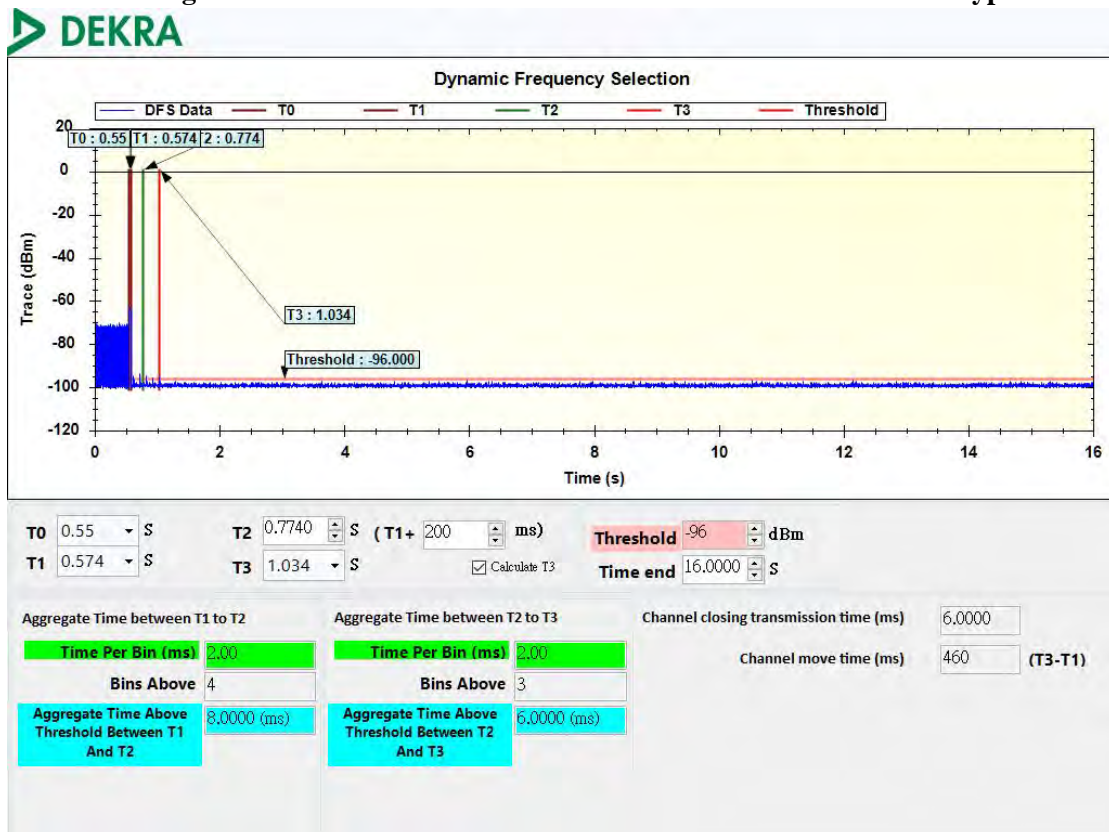


Test Item	Test Result (ms)	Limit
Channel Closing Transmission Time	6	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period
Channel Move Time	460	10 seconds

Note:

- 1.The results showed that after radar signal injected the channel transmission closing time less than 200 milliseconds and an aggregate of no more than 60 milliseconds.
- 2.The results showed that after radar signal injected the channel move time was less than 10 seconds.

Product : Wireless module
 Test Item : Non-Occupancy Period
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ac-80BW)-Master

Non-Occupancy Period at 5530 MHz

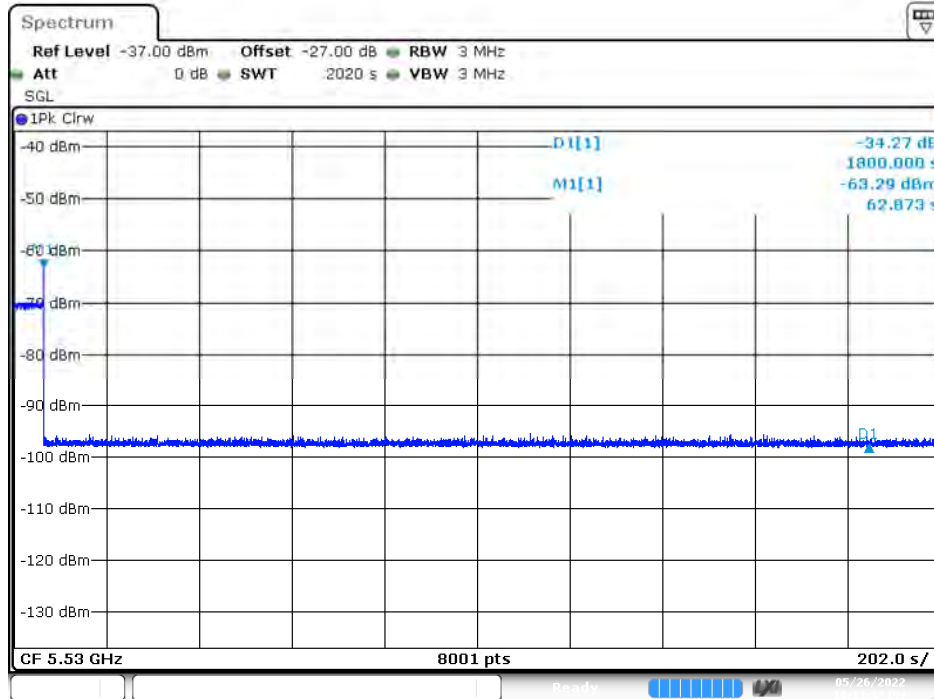

Date: 26.MAY.2022 22:13:32

Test Item	Test Result (Minutes)	Limit (Minutes)
Non-Occupancy Period	>30	>30

*No EUT transmissions were observed on the test channel during 30 minutes observation time.

7. Statistical Performance Check

7.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5500MHz, 5510MHz and 5530MHz.

Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6 at -62dbm. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.

7.2. Test Requirement

The minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Minimum percentage of successful detections

Radar Type	Minimum Percentage of Successful Detection	Minimum Number of Trials
1	60%	30
2	60%	30
3	60%	30
4	60%	30
Aggregate (Radar Types 1-4)	80%	120
5	80%	30
6	70%	30

The percentage of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100 = \text{Probability of Detection Radar Waveform}$$

In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows: $\frac{P_d 1 + P_d 2 + P_d 3 + P_d 4}{4}$

7.3. Test Result of Statistical Performance Check

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11n-20BW)-Master

Trial #	Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses/Burs	1= Detection 0= No Detection
1	5500	1	1281	42	0
2	5500	1	2739	20	1
3	5500	1	1987	27	1
4	5500	1	1912	28	1
5	5500	1	1973	27	1
6	5500	1	3058	18	1
7	5500	1	2211	24	1
8	5500	1	2349	23	1
9	5500	1	2989	18	1
10	5500	1	974	55	1
11	5500	1	2903	19	1
12	5500	1	708	75	1
13	5500	1	3016	18	1
14	5500	1	2180	25	1
15	5500	1	975	55	1
16	5500	1	694	76	1
17	5500	1	816	65	1
18	5500	1	2703	20	1
19	5500	1	2279	24	1
20	5500	1	1292	41	1
21	5500	1	2891	19	1
22	5500	1	2158	25	1
23	5500	1	2391	23	1
24	5500	1	1458	37	1
25	5500	1	1334	40	1
26	5500	1	1294	41	0
27	5500	1	521	102	1
28	5500	1	681	78	1
29	5500	1	610	87	1
30	5500	1	2416	22	0
Detection Percentage(%)					90%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11n-40BW)-Master

Trial #	Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses/Burs	1= Detection 0= No Detection
1	5510	1	3050	18	1
2	5510	1	2932	18	1
3	5510	1	830	64	1
4	5510	1	2051	26	1
5	5510	1	3026	18	1
6	5510	1	2402	22	1
7	5510	1	1144	47	1
8	5510	1	2342	23	1
9	5510	1	1539	35	1
10	5510	1	2757	20	1
11	5510	1	927	57	1
12	5510	1	697	76	1
13	5510	1	805	66	1
14	5510	1	2307	23	1
15	5510	1	1492	36	1
16	5510	1	2383	23	1
17	5510	1	2955	18	0
18	5510	1	1830	29	1
19	5510	1	2541	21	1
20	5510	1	1514	35	0
21	5510	1	1852	29	1
22	5510	1	2434	22	1
23	5510	1	1879	29	1
24	5510	1	1587	34	1
25	5510	1	574	92	1
26	5510	1	2733	20	1
27	5510	1	1888	28	1
28	5510	1	2689	20	1
29	5510	1	522	101	1
30	5510	1	2111	25	0
Detection Percentage(%)					90%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ac-80BW)-Master

Trial #	Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses/Burs	1= Detection 0= No Detection
1	5530	1	1613	33	1
2	5530	1	1177	45	0
3	5530	1	2470	22	1
4	5530	1	2378	23	1
5	5530	1	2223	24	1
6	5530	1	1921	28	1
7	5530	1	1806	30	1
8	5530	1	2737	20	0
9	5530	1	1895	28	1
10	5530	1	928	57	0
11	5530	1	743	71	1
12	5530	1	1093	49	1
13	5530	1	1605	33	1
14	5530	1	1221	44	1
15	5530	1	2750	20	1
16	5530	1	2501	22	1
17	5530	1	1194	45	1
18	5530	1	2998	18	0
19	5530	1	2039	26	1
20	5530	1	1990	27	1
21	5530	1	1637	33	1
22	5530	1	1948	28	0
23	5530	1	2961	18	1
24	5530	1	2679	20	1
25	5530	1	628	84	1
26	5530	1	1928	28	1
27	5530	1	2744	20	1
28	5530	1	1473	36	1
29	5530	1	2518	21	1
30	5530	1	972	55	1
Detection Percentage(%)					83.33%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11n-20BW)-Master

Trial #	Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses/Burs	1= Detection 0= No Detection
1	5500	1.10	216	25	1
2	5500	2.00	229	24	1
3	5500	4.10	185	27	1
4	5500	3.70	173	23	1
5	5500	1.80	229	25	1
6	5500	4.60	187	23	1
7	5500	2.10	164	26	1
8	5500	2.80	195	27	1
9	5500	4.10	190	24	1
10	5500	4.80	198	27	1
11	5500	4.30	150	29	0
12	5500	2.10	222	23	1
13	5500	1.10	215	29	1
14	5500	2.90	184	24	1
15	5500	1.90	154	25	1
16	5500	1.00	158	25	1
17	5500	3.30	178	26	0
18	5500	3.80	159	28	1
19	5500	3.20	177	25	1
20	5500	1.00	156	28	1
21	5500	3.20	190	26	0
22	5500	3.20	187	25	1
23	5500	3.50	223	25	0
24	5500	2.10	170	29	1
25	5500	1.70	171	24	0
26	5500	2.90	172	29	1
27	5500	4.80	174	25	0
28	5500	1.40	150	26	0
29	5500	4.20	202	27	1
30	5500	3.10	178	28	1
Detection Percentage(%)					76.67%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11n-40BW)-Master

Trial #	Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses/Burs	1= Detection 0= No Detection
1	5510	1.2	222	24	1
2	5510	2.1	209	24	1
3	5510	4.4	181	23	1
4	5510	1.4	212	25	1
5	5510	4.4	215	24	1
6	5510	2.3	172	29	1
7	5510	1.7	201	27	1
8	5510	1	181	23	1
9	5510	1.6	228	29	1
10	5510	4.5	164	25	0
11	5510	3.1	205	26	1
12	5510	3	212	29	1
13	5510	4.9	150	29	1
14	5510	1.8	215	24	1
15	5510	3.1	225	27	1
16	5510	3.7	195	29	1
17	5510	2.5	194	27	1
18	5510	3.4	227	24	1
19	5510	2.9	207	27	1
20	5510	2.5	227	25	1
21	5510	3.5	170	27	1
22	5510	1.6	168	27	1
23	5510	2.7	158	24	0
24	5510	3.8	184	27	1
25	5510	1.8	173	23	0
26	5510	3.9	188	24	1
27	5510	2.7	186	26	0
28	5510	2	174	26	1
29	5510	3.6	173	23	1
30	5510	4.1	152	29	1
Detection Percentage(%)					86.67%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ac-80BW)-Master

Trial #	Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses/Burs	1= Detection 0= No Detection
1	5530	2.2	221	24	1
2	5530	3.2	195	25	0
3	5530	1	159	27	1
4	5530	4.2	205	26	1
5	5530	4.1	228	25	1
6	5530	4.4	162	27	1
7	5530	2	204	28	0
8	5530	4.6	220	28	1
9	5530	4.1	154	28	1
10	5530	2.3	187	26	1
11	5530	3.1	195	25	1
12	5530	3.3	151	25	0
13	5530	2.7	189	28	1
14	5530	3.2	172	25	0
15	5530	4	196	24	1
16	5530	4.6	179	24	0
17	5530	1.7	183	26	1
18	5530	2.1	190	26	1
19	5530	4.8	171	24	1
20	5530	4.1	171	26	0
21	5530	4.8	227	26	1
22	5530	2.8	221	28	1
23	5530	1.6	217	29	1
24	5530	1.2	203	28	1
25	5530	1	160	27	1
26	5530	4.5	174	23	1
27	5530	1	196	28	1
28	5530	3.9	202	25	1
29	5530	1.1	227	26	1
30	5530	2.5	228	26	1
Detection Percentage(%)					80%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11n-20BW)-Master

Trial #	Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses/Burs	1= Detection 0= No Detection
1	5500	8.10	257	17	1
2	5500	9.00	334	16	1
3	5500	9.00	215	18	1
4	5500	6.50	248	17	0
5	5500	9.10	259	18	0
6	5500	9.00	202	16	0
7	5500	9.50	338	17	1
8	5500	9.00	345	18	1
9	5500	6.70	227	17	1
10	5500	9.50	310	17	1
11	5500	6.60	292	17	1
12	5500	7.00	477	17	1
13	5500	7.20	279	17	1
14	5500	8.90	296	16	1
15	5500	9.90	404	16	1
16	5500	6.20	271	17	1
17	5500	7.30	475	18	1
18	5500	8.60	216	17	1
19	5500	6.50	305	18	1
20	5500	9.00	224	18	0
21	5500	9.00	258	17	1
22	5500	6.10	240	16	0
23	5500	9.70	258	17	1
24	5500	7.10	255	17	1
25	5500	7.60	408	17	1
26	5500	7.90	439	17	1
27	5500	7.50	227	17	0
28	5500	6.70	434	17	1
29	5500	7.10	422	16	1
30	5500	6.00	246	16	0
Detection Percentage(%)					76.67%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11n-40BW)-Master

Trial #	Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses/Burs	1= Detection 0= No Detection
1	5510	7.9	237	17	1
2	5510	9	365	18	1
3	5510	7.4	238	18	1
4	5510	6.6	232	16	1
5	5510	6.3	404	16	1
6	5510	8.7	448	18	1
7	5510	6.9	366	17	1
8	5510	9.2	224	17	0
9	5510	8.5	296	16	1
10	5510	7.9	454	16	1
11	5510	7.7	289	16	0
12	5510	7.9	465	17	1
13	5510	6.6	460	16	1
14	5510	6.5	251	18	1
15	5510	9	224	17	1
16	5510	6.3	341	17	1
17	5510	9	436	16	1
18	5510	7.9	254	18	0
19	5510	8.7	343	17	0
20	5510	9.9	240	17	1
21	5510	7.5	410	16	1
22	5510	8.1	257	17	0
23	5510	8.1	423	17	1
24	5510	9	425	17	0
25	5510	7	223	17	1
26	5510	9.7	273	17	0
27	5510	6.4	368	17	1
28	5510	8	375	17	1
29	5510	9.5	203	17	0
30	5510	8.5	400	16	1
Detection Percentage(%)					73.3%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ac-80BW)-Master

Trial #	Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses/Burs	1= Detection 0= No Detection
1	5530	7.4	380	17	0
2	5530	8.3	479	17	1
3	5530	9.5	437	16	1
4	5530	9.8	304	17	1
5	5530	6.7	340	16	1
6	5530	9.7	441	17	1
7	5530	7.3	484	17	1
8	5530	9.7	391	18	0
9	5530	8.8	358	16	1
10	5530	7.8	323	16	1
11	5530	7.9	426	16	0
12	5530	7.7	248	16	1
13	5530	6.3	371	17	1
14	5530	6.1	251	16	1
15	5530	8.7	291	17	0
16	5530	9.9	352	17	1
17	5530	9.4	271	18	1
18	5530	6	223	16	1
19	5530	9	336	18	0
20	5530	9.8	414	17	1
21	5530	8.5	403	16	1
22	5530	7.3	491	17	1
23	5530	9.3	343	18	1
24	5530	8.7	442	17	0
25	5530	8.5	463	17	1
26	5530	7.3	489	18	1
27	5530	7	442	17	1
28	5530	7.7	317	17	1
29	5530	7.7	482	17	0
30	5530	9.5	363	17	0
Detection Percentage(%)					73.33%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11n-20BW)-Master

Trial #	Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses/Burs	1= Detection 0= No Detection
1	5500	14.00	393	16	1
2	5500	18.40	399	13	1
3	5500	13.80	338	14	1
4	5500	15.30	355	14	1
5	5500	18.20	381	14	0
6	5500	12.40	230	14	1
7	5500	13.60	380	13	0
8	5500	11.80	280	15	1
9	5500	17.70	240	16	1
10	5500	13.70	264	15	0
11	5500	11.20	394	12	1
12	5500	19.80	326	12	1
13	5500	12.90	201	14	0
14	5500	18.80	322	14	1
15	5500	18.20	314	13	1
16	5500	14.40	466	15	1
17	5500	14.80	431	13	1
18	5500	13.50	338	15	1
19	5500	14.80	254	13	1
20	5500	12.60	464	12	0
21	5500	14.30	213	15	1
22	5500	15.20	405	13	1
23	5500	16.00	260	15	1
24	5500	11.20	445	15	1
25	5500	13.10	201	15	0
26	5500	18.50	452	15	1
27	5500	15.20	450	14	1
28	5500	11.10	445	12	1
29	5500	14.90	453	13	1
30	5500	15.80	295	13	1
Detection Percentage(%)					80%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11n-40BW)-Master

Trial #	Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses/Burs	1= Detection 0= No Detection
1	5510	11.7	325	14	0
2	5510	19.4	396	15	1
3	5510	11.2	464	13	1
4	5510	11.6	225	15	0
5	5510	14.9	223	14	1
6	5510	19	317	12	1
7	5510	13.2	337	15	1
8	5510	15.7	317	16	1
9	5510	16.4	359	14	1
10	5510	13.3	234	12	1
11	5510	19	257	15	1
12	5510	12.7	256	12	1
13	5510	13.2	311	15	1
14	5510	13	402	13	1
15	5510	17.5	424	13	1
16	5510	17.6	340	14	1
17	5510	18.8	307	12	1
18	5510	11.1	403	13	0
19	5510	18.1	395	16	0
20	5510	16.3	472	14	0
21	5510	15.8	472	14	1
22	5510	14	490	14	1
23	5510	15.8	330	16	0
24	5510	19.1	337	16	1
25	5510	18.8	205	14	0
26	5510	13	226	14	1
27	5510	13.9	339	13	1
28	5510	17.4	419	13	1
29	5510	15	341	15	1
30	5510	13.8	445	12	1
Detection Percentage (%)					76.67%

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ac-80BW)-Master

Trial #	Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses/Burs	1= Detection 0= No Detection
1	5530	13.7	454	15	1
2	5530	17.7	421	15	1
3	5530	15.3	292	15	1
4	5530	16.1	202	15	1
5	5530	15.5	385	14	1
6	5530	13.1	349	13	1
7	5530	14.9	460	13	0
8	5530	19.5	430	14	1
9	5530	13.6	291	13	1
10	5530	12.5	264	14	1
11	5530	12.4	444	13	1
12	5530	11.4	381	13	0
13	5530	18.6	419	13	1
14	5530	19.6	254	15	1
15	5530	13.7	439	13	1
16	5530	17.4	368	14	1
17	5530	14.7	218	15	0
18	5530	13.8	372	16	1
19	5530	14.8	487	13	1
20	5530	14.3	385	13	1
21	5530	17.7	487	12	1
22	5530	12.2	449	16	1
23	5530	18.8	306	15	1
24	5530	13.9	494	14	1
25	5530	17.7	337	12	1
26	5530	19.7	443	16	1
27	5530	16.3	312	14	1
28	5530	17.4	490	12	1
29	5530	13.5	238	13	0
30	5530	19.9	491	13	1
Detection Percentage (%)					86.67%

Mode1 –802.11n20

Total Type 1~4 Radar Statistical Performance (5500MHz)			
Radar Type	Detection Percentage (%)	Limit (%)	Result
1	90.00	≥60%	Pass
2	76.67	≥60%	Pass
3	76.67	≥60%	Pass
4	80.00	≥60%	Pass
Total Type 1~4	80.83	≥80%	Pass
5	83.33	≥80%	Pass
6	96.67	≥70%	Pass

Mode2 –802.11n40

Total Type 1~4 Radar Statistical Performance			
Radar Type	Detection Percentage (%)	Limit (%)	Result
1	90.00	≥60%	Pass
2	86.67	≥60%	Pass
3	73.33	≥60%	Pass
4	76.67	≥60%	Pass
Total Type 1~4	81.67	≥80%	Pass
5	86.67	≥80%	Pass
6	93.33	≥70%	Pass

Mode3 –802.11ac80

Total Type 1~4 Radar Statistical Performance			
Radar Type	Detection Percentage (%)	Limit (%)	Result
1	83.33	≥60%	Pass
2	80.00	≥60%	Pass
3	73.33	≥60%	Pass
4	86.67	≥60%	Pass
Total Type 1~4	80.83	≥80%	Pass
5	83.33	≥80%	Pass
6	93.33	≥70%	Pass

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11n-20BW)-Master

Center Freq: 5500MHz			Low Edge: 5491MHz	High Edge: 5508MHz	
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5	2	5500	Statistical Check RandParm For Radar Type 5 1 trail	1
2	17	6.8	5500	Statistical Check RandParm For Radar Type 5 2 trail	1
3	14	5.6	5500	Statistical Check RandParm For Radar Type 5 3 trail	1
4	16	6.4	5500	Statistical Check RandParm For Radar Type 5 4 trail	1
5	5	2	5500	Statistical Check RandParm For Radar Type 5 5 trail	1
6	18	7.2	5500	Statistical Check RandParm For Radar Type 5 6 trail	1
7	17	6.8	5500	Statistical Check RandParm For Radar Type 5 7 trail	1
8	11	4.4	5500	Statistical Check RandParm For Radar Type 5 8 trail	1
9	12	4.8	5500	Statistical Check RandParm For Radar Type 5 9 trail	1
10	10	4	5500	Statistical Check RandParm For Radar Type 5 10 trail	1
11	8	3.2	5494.2	Statistical Check RandParm For Radar Type 5 11 trail	1
12	14	5.6	5496.6	Statistical Check RandParm For Radar Type 5 12 trail	0
13	9	3.6	5494.6	Statistical Check RandParm For Radar Type 5 13 trail	0
14	13	5.2	5496.2	Statistical Check RandParm For Radar Type 5 14 trail	0
15	8	3.2	5494.2	Statistical Check RandParm For Radar Type 5 15 trail	1
16	12	4.8	5495.8	Statistical Check RandParm For Radar Type 5 16 trail	0
17	6	2.4	5493.4	Statistical Check RandParm For Radar Type 5 17 trail	0
18	8	3.2	5494.2	Statistical Check RandParm For Radar Type 5 18 trail	1
19	6	2.4	5493.4	Statistical Check RandParm For Radar Type 5 19 trail	1
20	8	3.2	5494.2	Statistical Check RandParm For Radar Type 5 20 trail	1
21	16	6.4	5503.6	Statistical Check RandParm For Radar Type 5 21 trail	1
22	8	3.2	5506.8	Statistical Check RandParm For Radar Type 5 22 trail	1
23	12	4.8	5505.2	Statistical Check RandParm For Radar Type 5 23 trail	1
24	13	5.2	5504.8	Statistical Check RandParm For Radar Type 5 24 trail	1
25	6	2.4	5507.6	Statistical Check RandParm For Radar Type 5 25 trail	1
26	17	6.8	5503.2	Statistical Check RandParm For Radar Type 5 26 trail	1
27	16	6.4	5503.6	Statistical Check RandParm For Radar Type 5 27 trail	1
28	17	6.8	5503.2	Statistical Check RandParm For Radar Type 5 28 trail	1
29	12	4.8	5505.2	Statistical Check RandParm For Radar Type 5 29 trail	1
30	14	5.6	5504.4	Statistical Check RandParm For Radar Type 5 30 trail	1
Detection Percentage (%)					83.33
Limit					≥ 80


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (μsec)	Pulse 2-to-3 PRI (μsec)	Start Location Within Interval (msec)
1	1	69.2	13			516.16
2	2	62.3	13	1606		626.813
3	2	63.9	13	1213		840.006
4	1	55.4	13			737.599
5	2	61.8	13	1894		594.312
6	1	71.3	13			383.445
7	2	56.2	13	1852		686.548
8	1	90.4	13			133.762
9	3	74.8	13	1398	1188	381.735
10	1	50	13			633.048
11	1	95.6	13			104.241
12	3	97.3	13	1592	1884	786.954
13	3	86.6	13	1276	1280	833.977




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	79.6	12	1317		526.079
2	1	65.9	12			218.701
3	2	78.9	12	1746		786.772
4	1	52.4	12			768.233
5	3	87.9	12	1891	1641	219.954
6	2	88.1	12	1949		797.295
7	3	52.8	12	1262	1218	212.455
8	1	57.1	12			450.776
9	3	89.8	12	1970	1969	1011.287
10	2	96	12	1592		706.218
11	3	65.9	12	1767	1945	658.909




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	64.7	11	1266		630.07
2	3	97.3	11	1008	1160	645.89
3	2	67	11	1231		721.86
4	1	81.2	11			609.2
5	3	62	11	1241	1649	333.92
6	2	69.1	11	1184		248.63
7	2	73.5	11	1545		590.4
8	2	68.8	11	1416		38.43
9	3	73.2	11	1510	1349	313.63
10	2	64.1	11	1148		442.24
11	2	85	11	1982		740.1
12	1	62	11			579.9




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	62.9	19			288.259
2	2	72.1	19	1010		128.266
3	1	52.3	19			382.532
4	1	91.6	19			352.653
5	2	89.4	19	1460		415.224
6	2	98.3	19	1797		463.175
7	3	52.4	19	1013	1837	360.166
8	2	93	19	1924		479.507
9	1	93	19			480.118
10	3	85.3	19	1136	1809	577.569
11	1	88.2	19			314.941
12	2	98.6	19	1040		605.942
13	2	98.7	19	1116		395.083
14	3	84.5	19	1902	1306	413.344
15	1	86.6	19			8.105
16	2	52.2	19	1816		624.816
17	3	91	19	1730	1279	249.737
18	1	88.7	19			212.658
19	2	81	19	1057		171.479




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	93	17			665.853
2	3	52.3	17	1351	1351	171.843
3	2	91.1	17	1034		486.636
4	1	84.2	17			731.819
5	2	89.5	17	1255		554.142
6	2	77.2	17	1881		459.275
7	3	72.6	17	1271	1323	802.878
8	3	81.2	17	1500	1642	439.212
9	3	57.9	17	1383	1273	439.375
10	2	99.2	17	1772		520.748
11	2	91.3	17	1123		617.751
12	1	60.6	17			358.654
13	2	85.6	17	1816		346.677




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	76	6	1212	1359	94.152
2	2	78.8	6	1054		720.527
3	1	72.5	6			731.384
4	2	71.8	6	1563		723.791
5	3	76.4	6	1572	1928	296.509
6	1	61.1	6			785.546
7	2	85.1	6	1546		22.343
8	2	65.8	6	1714		706.23
9	1	60	6			628.807
10	3	68.8	6	1424	1494	560.594
11	2	94	6	1757		83.711
12	1	68.6	6			58.779
13	2	95.4	6	1764		116.386
14	3	92.6	6	1301	1498	526.243




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	62.4	11	1736		1062.82
2	2	95.5	11	1917		2.031
3	2	60.6	11	1732		1014.482
4	1	57.6	11			438.113
5	1	70.4	11			214.974
6	3	71	11	1064	1854	296.965
7	2	95.4	11	1217		806.135
8	2	97.8	11	1202		97.276
9	2	71.1	11	1946		280.197
10	1	55.6	11			93.148
11	2	71.2	11	1710		354.709




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	96.6	5	1589	1891	782.653
2	2	72.7	5	1894		1001.23
3	3	88.6	5	1155	1436	816.41
4	2	97.7	5	1296		898.06
5	1	65.9	5			603.66
6	2	81.1	5	1888		1132.98
7	2	60.4	5	1282		1185.04
8	3	84.9	5	1110	1394	308.13
9	2	60.2	5	1782		930.5
10	1	86.1	5			351.6




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	54.6	19	1235		438.85
2	2	64.8	19	1750		436.36
3	2	72.9	19	1782		482.26
4	2	56.2	19	1809		304.16
5	1	99.5	19			1097.82
6	3	52.7	19	1343	1428	484.58
7	3	77	19	1240	1536	455.05
8	2	80.5	19	1892		785.73
9	2	87.3	19	1698		751.1
10	2	59.8	19	1091		533



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 8

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	94.8	13			1093.55
2	2	62.7	13	1496		947.44
3	1	77.9	13			462.9
4	2	88.8	13	1371		1301.3
5	2	92.4	13	1683		1386.41
6	2	98.5	13	1244		575.58
7	2	89.9	13	1753		1452.3
8	2	62.9	13	1780		1094.9

--


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	84	9	1779		1008
2	1	66	9			865.151
3	2	65.9	9	1582		694.452
4	1	71.6	9			46.913
5	3	99.6	9	1768	1227	855.244
6	2	58.3	9	1591		441.685
7	2	52.2	9	1828		1017.925
8	1	64.4	9			863.966
9	1	74.7	9			989.837
10	2	63.2	9	1282		92.728
11	2	78.3	9	1047		639.409




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	80.8	10	1517		831.916
2	2	54.6	10	1951		473.021
3	3	66.9	10	1660	1224	897.192
4	3	67.4	10	1983	1465	195.843
5	1	53.8	10			764.294
6	2	59.8	10	1946		75.865
7	2	71.7	10	1155		304.765
8	1	60.7	10			667.326
9	3	91.4	10	1935	1940	310.507
10	3	61.4	10	1992	1312	492.118
11	2	58.3	10	1301		10.609




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	84.6	12			46.782
2	2	97.4	12	1901		230.656
3	2	56	12	1135		395.102
4	3	70.2	12	1969	1964	3.883
5	3	99.4	12	1034	1838	541.524
6	2	59.3	12	1034		231.695
7	1	62.9	12			388.826
8	3	96.4	12	1577	1876	303.657
9	2	61.1	12	1898		377.448
10	1	97.1	12			29.689
11	3	50.1	12	1626	1492	206.641
12	2	62.8	12	1863		318.182
13	1	63.8	12			289.593
14	1	55.4	12			553.384
15	1	95.8	12			139.885
16	1	87.8	12			461.806
17	3	85.8	12	1011	1260	60.637
18	2	76.9	12	1799		284.858
19	1	61.5	12			618.679




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	88.5	11	1262		128.053
2	3	86.5	11	1708	1853	139.638
3	3	94.2	11	1776	1519	578.152
4	2	78	11	1081		434.183
5	3	96.8	11	1803	1092	325.054
6	2	71.4	11	1524		518.025
7	3	50.6	11	1513	1222	28.016
8	2	64.5	11	1528		45.577
9	3	89.2	11	1289	1770	0.208
10	2	55.1	11	1567		562.329
11	2	72.2	11	1351		352.471
12	2	56.7	11	1037		384.042
13	3	89.3	11	1705	1910	237.263
14	1	96.5	11			271.844
15	3	73.2	11	1808	1555	58.875
16	1	83.9	11			477.536
17	2	82	11	1707		81.637
18	1	80.4	11			528.158
19	3	72.8	11	1504	1629	205.079




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	87.2	18	1863		520.347
2	2	64.5	18	1703		445.08
3	1	89.7	18			599.86
4	2	78.6	18	1133		87.1
5	2	52.9	18	1786		440.88
6	3	86.1	18	1359	1172	688.16
7	2	91.4	18	1024		462.74
8	1	93.3	18			151.01
9	3	51	18	1773	1331	28.63
10	2	92.2	18	1449		700.86
11	2	87.6	18	1442		404.21
12	2	84.3	18	1311		261.05
13	2	63.6	18	1638		665
14	3	68.9	18	1270	1199	388.5
15	2	94.3	18	1380		636.5




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	93.7	14	1917	1332	219.728
2	1	61.7	14			334.593
3	3	87.3	14	1623	1876	307.477
4	1	86.3	14			165.22
5	2	76.5	14	1562		341.463
6	2	79.8	14	1846		366.187
7	3	78.4	14	1408	1380	296.05
8	1	70.8	14			337.593
9	2	60.8	14	1091		19.367
10	1	61.7	14			327.16
11	3	95.2	14	1591	1986	653.153
12	2	77.5	14	1806		289.697
13	2	68.7	14	1783		177.52
14	2	57	14	1094		351.033
15	1	67.2	14			152.167
16	3	59.2	14	1729	1000	284.8
17	2	78.8	14	1705		644.733
18	3	61	14	1569	1328	137.567




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	90.9	6	1451		505.234
2	2	89.4	6	1246		631.857
3	1	96.6	6			1018.153
4	1	62.3	6			423.75
5	1	89.4	6			37.287
6	2	93.7	6	1273		130.113
7	3	80	6	1526	1866	460.83
8	2	71.3	6	1267		1068.067
9	3	91.4	6	1567	1871	1209.933




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	74.1	15	1669		355.961
2	3	96.5	15	1269	1915	545.748
3	2	53.8	15	1049		50.795
4	3	79.9	15	1600	1666	439.153
5	1	95.7	15			212.631
6	2	72.1	15	1997		686.168
7	2	74.3	15	1134		520.366
8	2	74	15	1201		61.784
9	2	58.1	15	1746		159.671
10	1	98.9	15			247.659
11	2	91	15	1698		309.356
12	2	86.3	15	1117		589.804
13	1	53.4	15			5.222
14	3	95.3	15	1935	1192	218.219
15	2	59.9	15	1923		576.347
16	1	89.8	15			54.465
17	2	76.3	15	1495		612.882




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (μsec)	Pulse 2-to-3 PRI (μsec)	Start Location Within Interval (msec)
1	3	78.6	11	1456	1210	249.503
2	1	76.7	11			1180.177
3	1	77.8	11			661.813
4	2	92.4	11	1201		1129.6
5	1	70.6	11			1201.997
6	3	61.7	11	1635	1540	895.073
7	2	63.8	11	1239		270.23
8	2	75	11	1442		963.467
9	1	99.6	11			865.033




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	62.6	11	1037	1042	613.848
2	3	68.7	11	1161	1997	486.333
3	3	84.4	11	1790	1161	579.596
4	2	66.1	11	1659		743.839
5	2	95.6	11	1787		632.142
6	2	58.1	11	1861		775.665
7	3	65.5	11	1747	1194	138.738
8	2	83	11	1817		152.832
9	2	76.5	11	1581		263.865
10	2	92.4	11	1365		731.518
11	1	86.6	11			96.591
12	3	74.8	11	1041	1611	877.054
13	3	60.3	11	1932	1499	479.377




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	74.9	5	1365		492.985
2	2	90.8	5	1886		354.687
3	2	55.3	5	1759		344.984
4	2	98.2	5	1850		789.731
5	2	83.9	5	1568		658.729
6	1	68.7	5			116.486
7	2	73.8	5	1162		455.253
8	1	55.7	5			11.96
9	3	60.5	5	1951	1937	254.847
10	2	80.6	5	1016		667.364
11	2	64.6	5	1316		444.221
12	2	94	5	1327		539.479
13	2	94.5	5	1777		572.586
14	2	66.2	5	1963		566.243




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	68.8	8	1004		796.655
2	3	62	8	1228	1834	738.88
3	2	62.8	8	1011		179.51
4	2	96.2	8	1845		38.04
5	3	95.3	8	1844	1263	918.81
6	2	51.3	8	1397		945.13
7	2	61	8	1233		365.89
8	2	74.7	8	1895		505.17
9	2	74.3	8	1348		116.09
10	3	72.9	8	1184	1585	144.14
11	2	75	8	1972		544.1
12	1	62.6	8			473.5




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	85.7	16	1852		257.571
2	2	77.9	16	1703		1037.087
3	3	80.8	16	1999	1608	39.773
4	3	63.2	16	1453	1463	418.83
5	2	92.5	16	1103		274.167
6	2	67.1	16	1354		1304.073
7	2	72.2	16	1441		737.88
8	3	91.7	16	1744	1049	799.067
9	2	89.6	16	1527		929.533




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	59.2	19	1525		378.078
2	2	89.3	19	1215		558.361
3	1	89.3	19			118.772
4	3	70.9	19	1261	1018	270.653
5	2	59.8	19	1679		540.594
6	2	86.2	19	1723		282.525
7	2	64.5	19	1568		219.876
8	2	68.3	19	1747		553.987
9	2	65.7	19	1176		121.068
10	3	76.4	19	1653	1865	21.789
11	3	60.9	19	1095	1672	64.791
12	1	87.5	19			264.402
13	2	56.7	19	1302		615.323
14	3	99	19	1758	1023	612.344
15	1	65.5	19			314.115
16	2	69.6	19	1842		92.916
17	2	83	19	1275		453.937
18	2	65.9	19	1679		548.058
19	1	61.6	19			590.579




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	52.1	9	1916	1258	550.76
2	1	83.3	9			165.734
3	3	74.7	9	1677	1054	349.537
4	2	61	9	1963		505.9
5	2	95	9	1136		526.563
6	1	84.2	9			160.867
7	2	65.2	9	1003		123.12
8	2	55.5	9	1884		321.123
9	2	79	9	1136		413.277
10	2	52.3	9	1181		410.49
11	2	51.3	9	1603		224.883
12	1	82.4	9			329.707
13	1	97.3	9			524.54
14	3	93.7	9	1253	1567	307.303
15	2	83	9	1476		404.707
16	2	81.8	9	1792		142.6
17	3	56.3	9	1390	1169	564.533
18	1	88.1	9			258.867




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	92.1	19	1797	1024	26.309
2	3	64.9	19	1931	1109	96.116
3	1	75.9	19			50.67
4	2	61.4	19	1407		481.47
5	2	94.2	19	1033		577.12
6	2	83.2	19	1374		537.05
7	1	56.4	19			354.33
8	3	96.5	19	1105	1739	431.09
9	2	75.6	19	1340		698.68
10	2	83.2	19	1976		554.4
11	2	95.3	19	1174		477.69
12	2	72.4	19	1407		565.41
13	1	56.3	19			224.27
14	2	95.6	19	1615		372
15	1	61.2	19			450.7
16	2	77.2	19	1387		453.4




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	64.4	9	1840	1912	503.067
2	3	73.8	9	1319	1935	880.37
3	2	56.1	9	1700		498.19
4	2	52.2	9	1013		444.45
5	1	80.1	9			12.23
6	2	52.4	9	1662		464.56
7	3	68.2	9	1116	1011	369.35
8	3	55.3	9	1356	1511	307.76
9	2	65.7	9	1544		722.51
10	2	68.9	9	1763		86.88
11	3	78.8	9	1607	1259	201.5
12	2	85.4	9	1140		128.2



Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11n-40BW)-Master

Center Freq: 5510MHz			Low Edge: 5492MHz	High Edge: 5528MHz	
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	17	6.8	5510	Statistical Check RandParm For Radar Type 5 1 trail	1
2	6	2.4	5510	Statistical Check RandParm For Radar Type 5 2 trail	1
3	9	3.6	5510	Statistical Check RandParm For Radar Type 5 3 trail	1
4	6	2.4	5510	Statistical Check RandParm For Radar Type 5 4 trail	1
5	17	6.8	5510	Statistical Check RandParm For Radar Type 5 5 trail	1
6	11	4.4	5510	Statistical Check RandParm For Radar Type 5 6 trail	1
7	13	5.2	5510	Statistical Check RandParm For Radar Type 5 7 trail	1
8	14	5.6	5510	Statistical Check RandParm For Radar Type 5 8 trail	1
9	7	2.8	5510	Statistical Check RandParm For Radar Type 5 9 trail	1
10	16	6.4	5510	Statistical Check RandParm For Radar Type 5 10 trail	1
11	8	3.2	5494.2	Statistical Check RandParm For Radar Type 5 11 trail	1
12	12	4.8	5495.8	Statistical Check RandParm For Radar Type 5 12 trail	1
13	17	6.8	5497.8	Statistical Check RandParm For Radar Type 5 13 trail	0
14	16	6.4	5497.4	Statistical Check RandParm For Radar Type 5 14 trail	1
15	17	6.8	5497.8	Statistical Check RandParm For Radar Type 5 15 trail	0
16	19	7.6	5498.6	Statistical Check RandParm For Radar Type 5 16 trail	0
17	11	4.4	5495.4	Statistical Check RandParm For Radar Type 5 17 trail	1
18	18	7.2	5498.2	Statistical Check RandParm For Radar Type 5 18 trail	0
19	6	2.4	5493.4	Statistical Check RandParm For Radar Type 5 19 trail	1
20	11	4.4	5495.4	Statistical Check RandParm For Radar Type 5 20 trail	1
21	13	5.2	5523.8	Statistical Check RandParm For Radar Type 5 21 trail	1
22	9	3.6	5525.4	Statistical Check RandParm For Radar Type 5 22 trail	1
23	16	6.4	5522.6	Statistical Check RandParm For Radar Type 5 23 trail	1
24	19	7.6	5521.4	Statistical Check RandParm For Radar Type 5 24 trail	1
25	19	7.6	5521.4	Statistical Check RandParm For Radar Type 5 25 trail	1
26	5	2	5527	Statistical Check RandParm For Radar Type 5 26 trail	1
27	19	7.6	5521.4	Statistical Check RandParm For Radar Type 5 27 trail	1
28	12	4.8	5524.2	Statistical Check RandParm For Radar Type 5 28 trail	1
29	7	2.8	5526.2	Statistical Check RandParm For Radar Type 5 29 trail	1
30	8	3.2	5525.8	Statistical Check RandParm For Radar Type 5 30 trail	1
Detection Percentage (%)					86.67
Limit					≥ 80


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	94	17			325.375
2	1	88.7	17			57.052
3	2	95.6	17	1105		821.904
4	1	97.4	17			437.581
5	2	61.1	17	1583		227.909
6	2	95.1	17	1622		320.596
7	2	67.3	17	1784		653.633
8	2	97.7	17	1852		150.03
9	3	67.7	17	1905	1425	288.437
10	2	96.6	17	1752		195.894
11	2	98.8	17	1957		822.041
12	1	52.5	17			594.229
13	3	63.2	17	1815	1117	585.586
14	2	90.3	17	1054		835.243




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	92.8	6	1548		673.262
2	1	71.2	6			231.172
3	1	53.3	6			332.66
4	1	70	6			177.97
5	1	93	6			375.53
6	1	77.2	6			438.15
7	2	52	6	1290		489.85
8	2	66.9	6	1159		20.16
9	1	97.6	6			118.88
10	2	97.4	6	1129		708.91
11	3	85.3	6	1541	1492	296.53
12	3	88.5	6	1287	1391	582.62
13	3	70.2	6	1064	1062	738.8
14	2	76.3	6	1253		391.1
15	2	56.2	6	1210		346.1
16	1	50.6	6			112.7




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	97	6	1991	1940	845.093
2	2	50	6	1203		316.613
3	3	72.9	6	1609	1283	291.086
4	2	92.4	6	1316		578.449
5	2	71.3	6	1733		564.442
6	2	80.2	6	1999		785.255
7	2	52.8	6	1879		222.178
8	1	66.3	6			440.852
9	2	59.7	6	1842		364.925
10	1	83.3	6			174.818
11	1	58.4	6			639.041
12	2	50.4	6	1820		674.854
13	1	71.1	6			318.177




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	63.5	17			71.508
2	1	53	17			207.214
3	2	95.8	17	1877		455.252
4	2	84.8	17	1976		291.703
5	2	77.8	17	1967		264.504
6	3	66.3	17	1168	1161	459.245
7	2	52.3	17	1442		337.316
8	2	68.8	17	1199		14.067
9	2	87	17	1040		482.228
10	2	80.3	17	1903		327.489
11	2	98	17	1142		421.751
12	3	79.1	17	1020	1122	56.202
13	1	98.9	17			313.573
14	2	96.4	17	1148		581.184
15	2	51.4	17	1467		405.605
16	3	53.5	17	1445	1557	315.656
17	2	51.9	17	1264		16.137
18	1	82.5	17			59.158
19	3	58.3	17	1155	1216	9.679




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	84.4	13	1238		1074.08
2	2	55	13	1725		877.041
3	2	90.7	13	1095		844.612
4	1	57.6	13			1067.243
5	2	91.5	13	1421		870.074
6	3	91.7	13	1147	1272	167.075
7	3	53.6	13	1481	1547	359.775
8	2	80.4	13	1539		256.406
9	1	64.3	13			131.677
10	2	50	13	1084		14.388
11	2	60.8	13	1808		176.209




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 PRI (μsec)	Start Location Within Interval (msec)
1	3	95.9	14	1080	1937	194.646
2	1	66.6	14			608.987
3	2	99.4	14	1001		30.894
4	2	52.3	14	1303		102.301
5	3	67.6	14	1577	1982	568.689
6	3	55.5	14	1588	1233	430.806
7	2	88.6	14	1260		785.403
8	3	62.9	14	1864	1714	439.62
9	1	85.9	14			371.727
10	2	68.4	14	1942		575.104
11	2	70.3	14	1965		119.891
12	1	63.6	14			625.429
13	1	59.9	14			11.986
14	2	80.5	14	1267		445.343




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	70.2	7	1210		1261.79
2	1	92.1	7			400.657
3	1	57.7	7			583.483
4	2	75.8	7	1881		475.98
5	1	77.6	7			449.777
6	1	72.5	7			1286.213
7	2	56.9	7	1414		615.86
8	3	84.3	7	1857	1961	606.917
9	2	93.5	7	1765		154.433




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	56.3	16	1518		174.727
2	3	78.3	16	1386	1523	415.04
3	3	89.6	16	1973	1774	599.43
4	2	74.3	16	1118		226.44
5	2	83.4	16	1978		190.18
6	3	56	16	1606	1252	80.55
7	2	82.7	16	1288		42.53
8	2	59.8	16	1097		269.56
9	2	72.6	16	1333		603.29
10	3	82.5	16	1317	1474	722
11	3	67	16	1637	1294	707.77
12	2	62.8	16	1471		117.96
13	3	66.6	16	1145	1336	61.95
14	2	75.7	16	1583		76.94
15	1	97.9	16			560.4
16	2	52.7	16	1238		17.4




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	85.2	8	1478		729.143
2	2	83.4	8	1728		108.103
3	1	63.4	8			129.78
4	1	57.6	8			259.36
5	3	50.8	8	1408	1233	252.84
6	2	58.8	8	1931		48.03
7	1	98.6	8			567.03
8	2	92.3	8	1065		109.34
9	2	65.4	8	1853		628.68
10	2	64.3	8	1053		477.71
11	3	51.1	8	1448	1313	518.69
12	2	90.8	8	1107		28.96
13	2	98.2	8	1984		268.46
14	2	50.7	8	1204		153.47
15	1	88.6	8			75.9
16	2	75.8	8	1905		335.5




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	98.9	12			231.152
2	2	96.9	12	1645		3.233
3	1	78.7	12			658.007
4	2	51.2	12	1862		142.88
5	1	71.3	12			516.723
6	3	72.2	12	1689	1910	296.037
7	2	63.6	12	1790		288.24
8	2	51.8	12	1956		659.243
9	2	63.4	12	1849		140.507
10	2	65.1	12	1533		119.53
11	3	77	12	1191	1199	247.523
12	2	83.9	12	1186		259.037
13	1	70.3	12			249.77
14	2	98.1	12	1389		18.793
15	2	82.5	12	1393		210.997
16	1	93.8	12			434.8
17	3	80.8	12	1312	1341	92.233
18	1	52.4	12			540.867




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	79.6	17	1449		701.336
2	2	82.7	17	1370		767.397
3	1	94.3	17			609.963
4	2	69.6	17	1529		256.66
5	2	73.8	17	1431		430.427
6	3	86.4	17	1885	1362	167.513
7	2	69.6	17	1777		1112.13
8	3	67	17	1216	1185	822.667
9	2	55.5	17	1991		972.033




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	71.7	16			527.4
2	3	65.4	16	1134	1043	476.733
3	1	90.1	16			511.747
4	2	54.6	16	1504		347.12
5	2	74.3	16	1899		637.723
6	3	69.8	16	1632	1378	653.057
7	1	56.2	16			256.07
8	3	74.7	16	1869	1939	474.833
9	2	71.2	16	1782		185.367
10	2	75.2	16	1876		469.16
11	2	56.9	16	1810		344.783
12	3	53.2	16	1680	1684	59.617
13	2	73.5	16	1910		403.68
14	3	88.5	16	1539	1583	45.363
15	1	86.5	16			476.907
16	2	51.3	16	1417		547.9
17	1	93.8	16			367.433
18	2	52.3	16	1517		441.267




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	69.7	17			367.173
2	3	99.4	17	1853	1897	532.823
3	2	68.9	17	1928		252.836
4	3	93.9	17	1122	1134	601.799
5	3	53.8	17	1923	1851	709.102
6	2	66.5	17	1419		487.095
7	3	58.2	17	1310	1113	176.938
8	2	52.5	17	1858		833.432
9	2	56.7	17	1010		220.655
10	2	69.5	17	1866		650.618
11	2	60.9	17	1368		234.621
12	3	81.5	17	1738	1422	271.554
13	3	59.7	17	1238	1761	867.977




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	90.7	19	1604		291.523
2	2	98.5	19	1649		384.781
3	2	80.4	19	1475		523.072
4	2	64.9	19	1361		158.783
5	3	53.4	19	1067	1211	705.494
6	1	58.9	19			148.565
7	2	70.2	19	1177		1000.805
8	2	89.3	19	1309		997.126
9	3	59.1	19	1104	1814	749.497
10	1	91.9	19			720.118
11	1	63.5	19			1037.509




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	63	18	1583	1217	108.805
2	2	67.7	18	1855		500.958
3	1	84.9	18			233.025
4	2	91	18	1277		171.223
5	3	89.6	18	1822	1629	402.311
6	2	71.6	18	1129		296.368
7	3	55.5	18	1276	1047	414.866
8	2	94.5	18	1351		204.164
9	2	90.6	18	1449		255.371
10	1	65.5	18			420.499
11	2	57.6	18	1213		541.326
12	1	75.7	18			500.244
13	2	61.7	18	1671		677.672
14	2	86.5	18	1609		689.389
15	2	94.4	18	1667		637.747
16	3	60.2	18	1972	1963	659.565
17	1	88.6	18			169.782



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	54.8	6	1869		376.548
2	2	64.1	6	1054		150.627
3	2	99.2	6	1529		753.913
4	2	52.2	6	1176		561.85
5	1	63.5	6			661.517
6	1	61.4	6			440.433
7	2	52.8	6	1047		890
8	2	72.4	6	1408		880.567
9	2	50.2	6	1562		892.733


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	63.4	11	1268	1448	32.205
2	3	99.6	11	1564	1873	340.663
3	2	70.8	11	1347		403.917
4	3	87.6	11	1723	1932	634
5	3	83.3	11	1158	1180	480.783
6	3	90.6	11	1288	1886	607.347
7	3	60.4	11	1164	1593	570.69
8	3	90.4	11	1715	1122	247.033
9	3	51.9	11	1679	1195	139.457
10	3	68.7	11	1863	1829	39.88
11	2	84.8	11	1238		226.793
12	3	93.5	11	1851	1327	133.777
13	2	96.9	11	1651		380.78
14	2	81.4	11	1413		86.683
15	2	88.5	11	1585		502.577
16	2	98.7	11	1632		27.2
17	3	52.3	11	1758	1857	152.833
18	3	79.7	11	1050	1913	211.167




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (μ sec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (μ sec)	Pulse 2-to-3 PRI (μ sec)	Start Location Within Interval (msec)
1	3	50.5	13	1865	1766	524.741
2	1	78.4	13			571.023
3	3	90.5	13	1869	1972	201.046
4	2	90.1	13	1944		542.609
5	1	67.6	13			801.192
6	1	80	13			783.565
7	1	77.9	13			811.298
8	3	83.5	13	1962	1162	426.872
9	1	97.9	13			370.545
10	1	81.2	13			364.458
11	3	60.8	13	1765	1569	625.061
12	2	89.5	13	1510		835.554
13	3	60.4	13	1571	1906	191.077




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	91.3	9	1536		610.538
2	3	84	9	1837	1029	677.967
3	3	88.4	9	1070	1779	766.353
4	3	90.8	9	1450	1507	513.82
5	2	71.4	9	1868		783.937
6	1	58.6	9			905.033
7	1	68	9			346.31
8	2	63.1	9	1439		237.367
9	2	96.1	9	1716		609.333




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	82.4	16			278.786
2	2	76.8	16	1787		790.677
3	2	67.9	16	1907		649.054
4	2	70	16	1557		405.721
5	2	69.9	16	1129		252.229
6	1	62.9	16			449.886
7	2	87.7	16	1301		7.863
8	2	95.7	16	1422		41.22
9	2	85.4	16	1267		675.977
10	1	62.7	16			229.094
11	3	72	16	1410	1824	473.251
12	2	80.1	16	1161		767.929
13	1	78.7	16			126.986
14	2	81.6	16	1711		227.143




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	95.9	19	1558		205.494
2	3	73.6	19	1274	1134	329.598
3	1	94.9	19			255.485
4	3	67.5	19	1864	1238	188.673
5	2	67.9	19	1270		171.301
6	3	74.4	19	1032	1616	348.098
7	1	56.5	19			130.936
8	1	52.1	19			320.204
9	2	75.8	19	1383		176.061
10	3	98.6	19	1194	1328	368.909
11	3	62.2	19	1513	1627	619.796
12	1	66.5	19			286.454
13	3	83.9	19	1974	1246	129.382
14	2	87.2	19	1963		580.829
15	1	84.7	19			212.347
16	3	92.8	19	1468	1671	22.465
17	1	67.7	19			658.982




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	98.8	19			200.919
2	1	81.2	19			219.73
3	1	98.9	19			551.812
4	1	99.1	19			198.533
5	1	75.3	19			180.004
6	2	94.9	19	1548		543.385
7	2	51.9	19	1700		606.706
8	3	92.9	19	1881	1540	28.047
9	1	79.6	19			505.158
10	1	89.9	19			448.859
11	2	61.8	19	1294		395.981
12	2	77.3	19	1937		180.112
13	1	78.1	19			266.733
14	2	59.7	19	1608		7.064
15	3	65.6	19	1636	1256	303.055
16	1	95.6	19			13.546
17	2	59.9	19	1738		390.237
18	2	69.1	19	1702		533.158
19	2	58.6	19	1946		621.979




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	67.7	19			732.135
2	1	75.1	19			664.42
3	3	97.6	19	1987	1260	308.05
4	2	74.7	19	1237		628.19
5	3	75.4	19	1742	1288	469.49
6	2	54.6	19	1609		453.76
7	2	69.1	19	1084		526.21
8	3	75.7	19	1488	1623	734.55
9	2	82.8	19	1376		675.31
10	2	56.1	19	1188		37.82
11	1	52.7	19			97.11
12	2	71.8	19	1017		163.82
13	1	99	19			354.12
14	2	52.6	19	1598		742.6
15	2	97.1	19	1080		733.8
16	1	89.9	19			517.1




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	67.1	12	1524		558.863
2	2	89.8	12	1425		514.433
3	1	76.9	12			647.406
4	3	96.2	12	1767	1722	152.789
5	2	62.6	12	1250		276.292
6	3	75	12	1193	1103	154.545
7	1	78.6	12			515.678
8	2	62.7	12	1580		748.102
9	2	51.7	12	1175		621.585
10	3	91.7	12	1975	1024	734.488
11	2	82.7	12	1776		294.831
12	2	76.5	12	1939		601.254
13	2	87.7	12	1210		407.277




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	82.7	7	1718	1232	596.672
2	3	99.8	7	1563	1945	417.99
3	2	70.3	7	1116		518.57
4	2	55.1	7	1249		443.24
5	2	95.1	7	1737		365.64
6	2	95.4	7	1707		183.98
7	2	73.7	7	1455		583.46
8	1	70.1	7			657.29
9	2	75.7	7	1183		348.05
10	3	50.8	7	1912	1724	214.71
11	1	96.2	7			508.11
12	3	98.4	7	1725	1996	555.21
13	3	55.3	7	1625	1155	364.17
14	3	85.2	7	1812	1527	164.06
15	2	94.5	7	1335		558.4
16	1	85.2	7			433.9




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	98.2	8	1674		186.276
2	1	68	8			696.798
3	3	93.7	8	1960	1726	532.755
4	2	57.8	8	1603		73.973
5	2	87	8	1316		226.061
6	3	70.6	8	1696	1787	201.848
7	2	61.7	8	1738		133.576
8	1	77.8	8			96.064
9	1	55.8	8			26.521
10	2	56.2	8	1765		277.719
11	3	61.9	8	1171	1868	463.826
12	2	81	8	1712		82.474
13	1	50.8	8			615.072
14	1	69.5	8			190.809
15	2	53.8	8	1140		568.447
16	2	82.6	8	1397		617.465
17	3	77	8	1141	1576	111.382



Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ac-80BW)-Master

Center Freq: 5530MHz			Low Edge: 5492MHz	High Edge: 5567MHz	
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	6	2.4	5530	Statistical Check RandParm For Radar Type 5 1 trail	1
2	15	6	5530	Statistical Check RandParm For Radar Type 5 2 trail	1
3	17	6.8	5530	Statistical Check RandParm For Radar Type 5 3 trail	1
4	9	3.6	5530	Statistical Check RandParm For Radar Type 5 4 trail	1
5	8	3.2	5530	Statistical Check RandParm For Radar Type 5 5 trail	1
6	13	5.2	5530	Statistical Check RandParm For Radar Type 5 6 trail	1
7	11	4.4	5530	Statistical Check RandParm For Radar Type 5 7 trail	1
8	13	5.2	5530	Statistical Check RandParm For Radar Type 5 8 trail	1
9	6	2.4	5530	Statistical Check RandParm For Radar Type 5 9 trail	1
10	16	6.4	5530	Statistical Check RandParm For Radar Type 5 10 trail	1
11	16	6.4	5497.4	Statistical Check RandParm For Radar Type 5 11 trail	1
12	9	3.6	5494.6	Statistical Check RandParm For Radar Type 5 12 trail	0
13	6	2.4	5493.4	Statistical Check RandParm For Radar Type 5 13 trail	1
14	18	7.2	5498.2	Statistical Check RandParm For Radar Type 5 14 trail	0
15	19	7.6	5498.6	Statistical Check RandParm For Radar Type 5 15 trail	1
16	9	3.6	5494.6	Statistical Check RandParm For Radar Type 5 16 trail	0
17	16	6.4	5497.4	Statistical Check RandParm For Radar Type 5 17 trail	0
18	18	7.2	5498.2	Statistical Check RandParm For Radar Type 5 18 trail	1
19	9	3.6	5494.6	Statistical Check RandParm For Radar Type 5 19 trail	0
20	8	3.2	5494.2	Statistical Check RandParm For Radar Type 5 20 trail	1
21	14	5.6	5563.4	Statistical Check RandParm For Radar Type 5 21 trail	1
22	13	5.2	5563.8	Statistical Check RandParm For Radar Type 5 22 trail	1
23	17	6.8	5562.2	Statistical Check RandParm For Radar Type 5 23 trail	1
24	14	5.6	5563.4	Statistical Check RandParm For Radar Type 5 24 trail	1
25	19	7.6	5561.4	Statistical Check RandParm For Radar Type 5 25 trail	1
26	11	4.4	5564.6	Statistical Check RandParm For Radar Type 5 26 trail	1
27	11	4.4	5564.6	Statistical Check RandParm For Radar Type 5 27 trail	1
28	6	2.4	5566.6	Statistical Check RandParm For Radar Type 5 28 trail	1
29	11	4.4	5564.6	Statistical Check RandParm For Radar Type 5 29 trail	1
30	19	7.6	5561.4	Statistical Check RandParm For Radar Type 5 30 trail	1
Detection Percentage (%)					83.33
Limit					≥ 80


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (μsec)	Pulse 2-to-3 PRI (μsec)	Start Location Within Interval (msec)
1	2	95.2	6	1141		1096.95
2	1	69.1	6			776.02
3	3	69.2	6	1358	1975	349.54
4	2	52.3	6	1028		1156.91
5	2	62.7	6	1878		948.65
6	3	81.7	6	1712	1329	136.26
7	3	55.5	6	1873	1683	687.11
8	2	93.4	6	1027		792.54
9	1	66.7	6			713.6
10	2	58.6	6	1797		332.3




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	91.6	15	1716		608.184
2	2	99.8	15	1530		225.067
3	2	72.9	15	1004		225.594
4	2	90.8	15	1686		225.721
5	3	50.4	15	1383	1448	759.199
6	2	69.4	15	1788		612.256
7	3	53.2	15	1697	1124	297.083
8	2	58.9	15	1374		462.57
9	1	90.8	15			677.697
10	2	89.8	15	1583		817.154
11	1	88	15			366.181
12	2	57.4	15	1287		115.479
13	2	86	15	1364		157.786
14	2	92.6	15	1049		371.343




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	88.1	17	1614	1991	845.865
2	3	54.8	17	1524	1646	278.763
3	2	77.3	17	1728		911.886
4	2	67	17	1305		518.679
5	3	86.3	17	1008	1422	266.032
6	1	56.6	17			813.005
7	2	93	17	1202		477.748
8	2	89	17	1570		122.392
9	1	81.4	17			278.595
10	2	86.9	17	1283		345.278
11	2	80.2	17	1160		252.231
12	3	52.8	17	1936	1271	768.954
13	3	94.2	17	1644	1085	767.777




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	89.4	9			672.385
2	1	51.6	9			678.26
3	2	89.4	9	1948		234.43
4	2	96.2	9	1280		418.99
5	3	64.6	9	1080	1099	555.87
6	2	81.6	9	1727		48.27
7	2	74.8	9	1598		587.5
8	3	56.3	9	1182	1642	136.83
9	1	79.9	9			353.56
10	3	99.5	9	1341	1524	255.79
11	2	63.5	9	1544		233.35
12	2	88.5	9	1489		514.29
13	3	90.3	9	1226	1102	195.83
14	2	93.2	9	1216		19.7
15	3	72.8	9	1452	1841	380.9




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	81.8	13	1758		557.158
2	2	56.2	13	1617		321.393
3	2	59.9	13	1713		565.717
4	3	79.4	13	1087	1104	157
5	2	54	13	1818		308.613
6	3	70	13	1535	1184	53.997
7	2	60.9	13	1393		96.96
8	2	57.5	13	1194		571.733
9	3	62.4	13	1116	1251	425.787
10	2	58.7	13	1666		187.55
11	2	68.1	13	1067		72.473
12	2	55.1	13	1926		297.247
13	2	92	13	1384		622.6
14	3	93.5	13	1308	1373	252.243
15	3	77.4	13	1663	1728	282.277
16	1	58.1	13			188.8
17	2	96.3	13	1191		138.133
18	3	68.8	13	1206	1908	389.467




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	60.6	11	1252		471.471
2	1	90.8	11			707.201
3	1	81.9	11			306.712
4	1	59.9	11			1007.793
5	2	99.7	11	1492		9.554
6	2	57.2	11	1113		635.865
7	2	89.2	11	1140		48.175
8	2	95	11	1607		1067.456
9	3	55.5	11	1034	1390	964.827
10	2	54	11	1611		562.418
11	1	59.3	11			5.409




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 PRI (μsec)	Start Location Within Interval (msec)
1	2	86.3	13	1051		203.414
2	1	61.3	13			45.393
3	3	96.8	13	1298	1749	32.81
4	3	77.9	13	1960	1389	692.53
5	2	76.7	13	1480		59.43
6	2	81.5	13	1417		216.18
7	1	82.7	13			650.59
8	3	94.5	13	1034	1679	228.51
9	2	90.1	13	1997		232.13
10	2	50.2	13	1899		181.44
11	1	94.4	13			346.73
12	1	89.5	13			581.16
13	1	69.3	13			283.98
14	2	61.2	13	1931		694.2
15	3	65.1	13	1560	1072	546.1
16	3	64.5	13	1988	1284	500.6




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	92.5	6	1302	1326	286.295
2	2	79.9	6	1119		36.321
3	1	63.7	6			164.93
4	3	56.8	6	1750	1945	36.81
5	2	50.6	6	1034		97.5
6	3	73.7	6	1282	1611	522.33
7	3	78	6	1568	1601	518.96
8	2	67.6	6	1612		131.18
9	1	63.7	6			5.62
10	1	62.9	6			443.74
11	1	58.9	6			106.16
12	3	75.1	6	1060	1446	76.92
13	3	84.8	6	1983	1662	585.8
14	2	90.7	6	1800		589.6
15	1	71.8	6			128.7




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	92.5	16	1580		315.724
2	3	73.9	16	1197	1306	170.42
3	2	50	16	1188		555.812
4	3	90.8	16	1027	1240	52.883
5	2	94.1	16	1390		147.764
6	3	98.3	16	1468	1254	399.655
7	2	85.1	16	1795		404.436
8	2	68.5	16	1053		311.367
9	2	92.7	16	1753		364.898
10	2	74.9	16	1756		208.249
11	1	64.1	16			231.871
12	2	81.3	16	1244		262.122
13	2	87.8	16	1972		44.543
14	2	58.3	16	1495		260.434
15	2	61.1	16	1692		246.355
16	2	73.9	16	1750		81.086
17	2	77.4	16	1051		427.537
18	2	76.7	16	1423		139.758
19	3	83.7	16	1773	1271	93.379




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	68.5	16	1682		242.752
2	2	50.1	16	1624		562.16
3	2	96.9	16	1266		698.69
4	2	86.3	16	1997		776.75
5	1	60.1	16			241.83
6	1	97.5	16			564.42
7	1	56.1	16			164.86
8	3	76.5	16	1836	1129	4.95
9	3	57	16	1812	1011	476.3
10	1	77.6	16			173.43
11	2	61.4	16	1501		277.78
12	3	97.3	16	1655	1095	413.66
13	3	74.5	16	1518	1698	745.6
14	3	75.2	16	1155	1461	378.6
15	2	74.4	16	1013		475.2




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	82.8	9	1898	1722	61.592
2	3	88.2	9	1832	1085	780.337
3	2	60.2	9	1494		323.384
4	2	72.1	9	1126		668.181
5	3	83.7	9	1344	1153	807.599
6	2	83.6	9	1752		560.656
7	2	58.8	9	1931		813.073
8	2	64.2	9	1575		619.47
9	3	72.7	9	1992	1276	778.237
10	2	66.9	9	1022		796.154
11	1	61	9			402.141
12	2	60.4	9	1732		841.129
13	2	70.4	9	1688		656.886
14	2	88.7	9	1733		47.443




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	51.7	6	1108	1193	240.544
2	2	67.5	6	1385		852.963
3	2	83.8	6	1602		783.876
4	2	96.4	6	1368		565.629
5	1	76	6			561.322
6	1	92.2	6			91.765
7	2	75.4	6	1663		639.558
8	2	61.5	6	1233		30.282
9	2	56.9	6	1785		294.685
10	2	71.7	6	1059		249.328
11	1	90	6			135.951
12	2	91.5	6	1348		760.854
13	3	77.9	6	1915	1370	659.177




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	89.6	18	1375		644.902
2	2	66.6	18	1065		362.083
3	1	80.6	18			549.226
4	1	61.6	18			413.079
5	1	81.7	18			568.542
6	2	98.1	18	1007		547.935
7	3	86.8	18	1849	1602	445.718
8	2	81.1	18	1733		329.932
9	3	56	18	1924	1441	412.645
10	3	60.8	18	1784	1942	567.798
11	2	66.9	18	1438		735.601
12	3	68.7	18	1794	1075	454.054
13	2	64.7	18	1523		464.777




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	58.5	19	1271		70.347
2	1	58.2	19			298.654
3	3	83.9	19	1634	1699	416.017
4	3	62.9	19	1397	1193	266.99
5	2	83.5	19	1305		460.883
6	2	79.4	19	1067		185.137
7	3	65.6	19	1266	1668	217.77
8	3	52.4	19	1848	1684	352.663
9	1	75.6	19			439.437
10	2	86.7	19	1212		394.19
11	1	63.4	19			50.013
12	2	52.2	19	1830		258.827
13	2	51.9	19	1973		146.74
14	3	91.9	19	1049	1594	246.063
15	1	89.4	19			442.467
16	2	95.6	19	1504		200.2
17	2	96.2	19	1893		65.133
18	2	68.8	19	1075		409.467




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	53	9			171.415
2	3	56.9	9	1904	1087	391.231
3	1	56.4	9			381.922
4	1	63.3	9			172.283
5	2	88.9	9	1834		160.184
6	1	62.7	9			194.725
7	3	56.6	9	1061	1913	159.776
8	2	72.5	9	1206		85.187
9	3	61.3	9	1948	1216	483.928
10	2	57.3	9	1781		142.019
11	2	97.7	9	1429		295.591
12	1	74.6	9			1.232
13	1	76.6	9			535.143
14	2	61.9	9	1232		5.164
15	1	62.2	9			288.215
16	1	84.2	9			26.426
17	2	93.1	9	1560		602.637
18	2	93.2	9	1008		416.158
19	2	92.8	9	1029		133.479




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	55.5	16	1441		420.245
2	3	70.5	16	1962	1358	124.019
3	3	55	16	1782	1891	64.48
4	3	83.9	16	1291	1200	545.5
5	3	83.6	16	1754	1375	435.72
6	2	68.5	16	1638		469.68
7	2	87.9	16	1666		470.68
8	1	86.8	16			254.87
9	2	90	16	1018		165.77
10	3	57.1	16	1816	1129	293.56
11	2	78.9	16	1559		341.27
12	2	94.6	16	1175		82.11
13	2	68.3	16	1421		12.1
14	2	66	16	1319		181.56
15	3	67.4	16	1117	1486	460.89
16	1	52.7	16			572.72
17	2	55.9	16	1415		562
18	2	87.9	16	1364		317.5
19	1	62.4	16			457.5
20	1	61.1	16			350.8




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	64.4	18			33.688
2	2	50.9	18	1648		836.911
3	2	87.5	18	1774		465.542
4	1	63.1	18			573.693
5	3	75	18	1550	1555	273.024
6	2	56.9	18	1039		689.175
7	2	88.1	18	1975		6.855
8	2	51.2	18	1020		421.496
9	2	89.8	18	1126		860.007
10	2	78.4	18	1162		632.418
11	3	84.7	18	1285	1946	100.009




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	64.5	9	1230		609.848
2	2	74.2	9	1002		972.471
3	1	54.6	9			210.462
4	3	55.1	9	1812	1737	727.263
5	3	85.6	9	1464	1874	113.204
6	3	58.7	9	1147	1539	164.625
7	2	70.5	9	1660		41.735
8	1	88.6	9			776.526
9	1	75.8	9			687.537
10	2	87.7	9	1325		719.018
11	2	50.2	9	1401		588.209




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	56.9	8			303.545
2	2	71.4	8	1932		79.426
3	1	92.3	8			557.42
4	3	70.4	8	1953	1078	567.22
5	1	90.4	8			581.71
6	2	87.6	8	1099		86.97
7	2	52.6	8	1790		156.89
8	1	97.4	8			3.08
9	1	86.5	8			406.04
10	3	94.3	8	1052	1243	290.62
11	3	89	8	1566	1328	248.19
12	1	98.6	8			493.05
13	1	97	8			518.46
14	2	88	8	1203		574.44
15	2	53.2	8	1482		213.02
16	2	60.4	8	1353		27.01
17	2	60.2	8	1281		349.79
18	2	91.9	8	1462		315.9
19	2	61.1	8	1888		388.4
20	3	62.4	8	1893	1210	338.4




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	84.4	14	1996		527.856
2	3	79.3	14	1706	1903	410.661
3	3	84.7	14	1739	1089	608.482
4	3	55.8	14	1764	1785	541.003
5	2	62.3	14	1179		619.034
6	3	77.4	14	1521	1737	329.335
7	2	86.9	14	1023		445.506
8	3	95.3	14	1164	1740	428.997
9	1	75	14			539.338
10	2	81.6	14	1387		487.689
11	3	80.2	14	1741	1252	108.991
12	2	62.4	14	1182		329.132
13	1	68	14			210.373
14	2	83.3	14	1964		148.914
15	2	98.6	14	1575		372.095
16	3	53.2	14	1346	1912	313.106
17	2	93.6	14	1778		488.437
18	3	91.5	14	1894	1423	161.458
19	2	67.5	14	1133		163.579




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	97.6	13	1890	1003	459.817
2	2	78.3	13	1844		381.938
3	1	90.8	13			665.705
4	3	77.3	13	1783	1303	605.593
5	2	63.9	13	1622		190.171
6	3	82.1	13	1639	1639	423.718
7	2	64.1	13	1511		379.136
8	1	78	13			649.384
9	2	85.1	13	1757		157.031
10	1	60.9	13			412.789
11	1	82.4	13			25.456
12	3	92.8	13	1647	1859	228.654
13	2	50.5	13	1615		648.282
14	3	58.9	13	1417	1955	300.749
15	1	80.9	13			157.947
16	2	52.2	13	1593		380.565
17	2	79	13	1824		653.782




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	79.2	17	1140		348.388
2	2	84.6	17	1997		582.088
3	2	68.1	17	1465		640.545
4	3	95.1	17	1405	1353	367.163
5	3	53	17	1199	1604	99.431
6	2	65.9	17	1813		609.028
7	3	75	17	1660	1895	469.456
8	2	68.8	17	1231		537.364
9	1	71.8	17			77.551
10	2	75.7	17	1201		95.629
11	1	73.9	17			462.406
12	2	78	17	1360		136.484
13	1	54.2	17			680.232
14	1	78	17			108.329
15	2	59.9	17	1703		21.807
16	2	81	17	1364		497.465
17	2	92.5	17	1312		268.182




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	61.3	14	1511	1649	486.024
2	1	75.2	14			764.36
3	1	56.4	14			422.93
4	1	64.3	14			765.43
5	2	69.8	14	1558		321.29
6	2	64.7	14	1258		116.58
7	3	63.4	14	1635	1051	478.01
8	3	59.9	14	1591	1012	388.25
9	3	53.6	14	1851	1434	302.52
10	2	60	14	1581		75.64
11	2	98.5	14	1546		560.5
12	1	53.9	14			317.3




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	65.8	19	1168		131.103
2	3	92.6	19	1834	1183	437.37
3	3	50.5	19	1731	1875	288.84
4	1	97.8	19			119.42
5	2	95.6	19	1467		215.8
6	3	78.9	19	1239	1195	222.09
7	2	52.7	19	1277		370.14
8	2	87.3	19	1111		176.67
9	1	77.2	19			365.11
10	1	83.1	19			137.12
11	3	51	19	1007	1474	438.33
12	2	82.7	19	1847		407.4
13	2	50.2	19	1851		498.46
14	2	83.9	19	1939		445.01
15	2	52.8	19	1525		317
16	2	61.5	19	1719		62.65
17	3	67.4	19	1442	1918	1
18	1	64.1	19			501.4
19	1	67.3	19			552.7
20	3	80.2	19	1143	1971	126.5




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	68.2	11	1508	1507	626.93
2	3	90.2	11	1908	1940	654.78
3	3	83.1	11	1176	1440	421.57
4	3	52.4	11	1493	1594	258.35
5	3	69.5	11	1845	1603	543.68
6	1	67.5	11			399.9
7	3	93.8	11	1910	1317	701.82
8	3	56.9	11	1082	1933	348.05
9	2	96.4	11	1367		11.69
10	2	53.2	11	1207		147.68
11	2	95.3	11	1479		498.25
12	1	62.4	11			488.17
13	3	58.5	11	1793	1673	608.7
14	1	98	11			548.7
15	2	93.4	11	1868		41.5
16	2	80.7	11	1318		127.1




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	52.1	11			562.064
2	2	98.1	11	1734		488.927
3	2	68	11	1538		419.334
4	2	91	11	1218		664.481
5	2	98.4	11	1452		688.809
6	1	54.4	11			201.136
7	2	95.4	11	1649		339.103
8	2	71.5	11	1567		377.34
9	1	55	11			51.117
10	2	53.6	11	1863		423.024
11	2	88.6	11	1398		588.181
12	3	71.9	11	1008	1820	370.299
13	3	90	11	1071	1005	272.086
14	2	63.9	11	1344		20.043




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	57.1	6	1830	1334	561.129
2	2	72.4	6	1057		372.64
3	3	85.7	6	1240	1367	531.51
4	3	85.9	6	1655	1058	130.95
5	1	58	6			566.37
6	1	89.4	6			239.33
7	2	76.6	6	1939		526.27
8	2	88.9	6	1881		727.32
9	3	61.5	6	1201	1581	693.83
10	2	52.9	6	1309		449.85
11	2	87.3	6	1022		449.47
12	3	82.7	6	1936	1621	37.03
13	1	65.2	6			95.31
14	2	88.4	6	1073		155.68
15	2	52	6	1956		473.4
16	2	65.8	6	1617		519.8




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	96	11	1587	1066	998.253
2	2	83.9	11	1282		792.38
3	2	51.4	11	1669		299.97
4	2	55.3	11	1646		95.49
5	1	94	11			775.99
6	2	58.3	11	1173		974.02
7	3	50.8	11	1151	1335	1192.13
8	3	99.3	11	1504	1846	46.74
9	2	64.4	11	1613		941.3
10	2	85.6	11	1442		227.8



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	73.3	19	1498		296.36
2	1	52.8	19			1168.767
3	2	88.9	19	1084		796.573
4	1	57.1	19			1027.45
5	2	55.4	19	1310		62.007
6	1	80	19			457.403
7	3	96	19	1863	1612	671.57
8	1	69.5	19			1025.267
9	1	54.5	19			973.933



Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11n-20BW)-Master

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	0
4	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	1
23	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	1
26	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			96.67
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.462	20	
2	5.5	5.647	20	
3	5.5	5.297	20	
4	5.5	5.405	20	
5	5.5	5.392	20	
6	5.5	5.579	20	
7	5.5	5.478	20	
8	5.5	5.559	20	
9	5.5	5.638	20	
10	5.5	5.47	20	
11	5.5	5.713	20	
12	5.5	5.472	20	
13	5.5	5.289	20	
14	5.5	5.374	20	
15	5.5	5.337	20	
16	5.5	5.294	20	
17	5.5	5.466	20	
18	5.5	5.255	20	
19	5.5	5.629	20	
20	5.5	5.557	20	
21	5.5	5.55	20	
22	5.5	5.324	20	
23	5.5	5.549	20	
24	5.5	5.72	20	
25	5.5	5.302	20	
26	5.5	5.504	20	*
27	5.5	5.295	20	
28	5.5	5.451	20	
29	5.5	5.513	20	
30	5.5	5.492	20	*
31	5.5	5.259	20	
32	5.5	5.66	20	
33	5.5	5.449	20	
34	5.5	5.402	20	
35	5.5	5.359	20	
36	5.5	5.689	20	
37	5.5	5.296	20	
38	5.5	5.534	20	
39	5.5	5.31	20	
40	5.5	5.383	20	
41	5.5	5.416	20	
42	5.5	5.685	20	
43	5.5	5.409	20	
44	5.5	5.661	20	
45	5.5	5.671	20	
46	5.5	5.3	20	
47	5.5	5.617	20	
48	5.5	5.486	20	
49	5.5	5.569	20	

50	5.5	5.391	20	
51	5.5	5.351	20	
52	5.5	5.545	20	
53	5.5	5.658	20	
54	5.5	5.53	20	
55	5.5	5.654	20	
56	5.5	5.692	20	
57	5.5	5.716	20	
58	5.5	5.263	20	
59	5.5	5.319	20	
60	5.5	5.697	20	
61	5.5	5.268	20	
62	5.5	5.524	20	
63	5.5	5.399	20	
64	5.5	5.509	20	*
65	5.5	5.505	20	*
66	5.5	5.364	20	
67	5.5	5.339	20	
68	5.5	5.468	20	
69	5.5	5.503	20	*
70	5.5	5.599	20	
71	5.5	5.493	20	*
72	5.5	5.387	20	
73	5.5	5.532	20	
74	5.5	5.543	20	
75	5.5	5.363	20	
76	5.5	5.277	20	
77	5.5	5.303	20	
78	5.5	5.698	20	
79	5.5	5.488	20	
80	5.5	5.62	20	
81	5.5	5.329	20	
82	5.5	5.367	20	
83	5.5	5.448	20	
84	5.5	5.591	20	
85	5.5	5.352	20	
86	5.5	5.354	20	
87	5.5	5.413	20	
88	5.5	5.619	20	
89	5.5	5.368	20	
90	5.5	5.388	20	
91	5.5	5.412	20	
92	5.5	5.526	20	
93	5.5	5.491	20	*
94	5.5	5.678	20	
95	5.5	5.714	20	
96	5.5	5.348	20	
97	5.5	5.288	20	
98	5.5	5.652	20	
99	5.5	5.252	20	
100	5.5	5.435	20	

TYPE 6 PARAMETER SHEET

Trial Number : 2

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.442	20	
2	5.5	5.253	20	
3	5.5	5.36	20	
4	5.5	5.294	20	
5	5.5	5.555	20	
6	5.5	5.426	20	
7	5.5	5.383	20	
8	5.5	5.264	20	
9	5.5	5.301	20	
10	5.5	5.359	20	
11	5.5	5.401	20	
12	5.5	5.653	20	
13	5.5	5.548	20	
14	5.5	5.342	20	
15	5.5	5.448	20	
16	5.5	5.332	20	
17	5.5	5.714	20	
18	5.5	5.654	20	
19	5.5	5.312	20	
20	5.5	5.688	20	
21	5.5	5.575	20	
22	5.5	5.457	20	
23	5.5	5.724	20	

TYPE 6 PARAMETER SHEET

Trial Number : 3

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.397	20	
2	5.5	5.704	20	
3	5.5	5.302	20	
4	5.5	5.48	20	
5	5.5	5.505	20	*
6	5.5	5.28	20	
7	5.5	5.669	20	
8	5.5	5.603	20	
9	5.5	5.656	20	
10	5.5	5.453	20	
11	5.5	5.627	20	
12	5.5	5.489	20	
13	5.5	5.712	20	
14	5.5	5.346	20	
15	5.5	5.55	20	
16	5.5	5.461	20	
17	5.5	5.523	20	
18	5.5	5.479	20	
19	5.5	5.345	20	
20	5.5	5.686	20	
21	5.5	5.688	20	
22	5.5	5.311	20	
23	5.5	5.468	20	

TYPE 6 PARAMETER SHEET

Trial Number : 4

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.355	20	
2	5.5	5.589	20	
3	5.5	5.253	20	
4	5.5	5.571	20	
5	5.5	5.582	20	
6	5.5	5.722	20	
7	5.5	5.654	20	
8	5.5	5.396	20	
9	5.5	5.323	20	
10	5.5	5.585	20	
11	5.5	5.352	20	
12	5.5	5.639	20	
13	5.5	5.673	20	
14	5.5	5.498	20	*
15	5.5	5.681	20	
16	5.5	5.454	20	
17	5.5	5.623	20	
18	5.5	5.621	20	
19	5.5	5.473	20	
20	5.5	5.69	20	
21	5.5	5.466	20	
22	5.5	5.422	20	
23	5.5	5.406	20	

TYPE 6 PARAMETER SHEET

Trial Number : 5

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.366	20	
2	5.5	5.489	20	
3	5.5	5.463	20	
4	5.5	5.72	20	
5	5.5	5.353	20	
6	5.5	5.25	20	
7	5.5	5.469	20	
8	5.5	5.419	20	
9	5.5	5.559	20	
10	5.5	5.27	20	
11	5.5	5.661	20	
12	5.5	5.324	20	
13	5.5	5.269	20	
14	5.5	5.682	20	
15	5.5	5.614	20	
16	5.5	5.705	20	
17	5.5	5.316	20	
18	5.5	5.596	20	
19	5.5	5.538	20	
20	5.5	5.348	20	
21	5.5	5.699	20	
22	5.5	5.586	20	
23	5.5	5.349	20	

TYPE 6 PARAMETER SHEET

Trial Number : 6

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.263	20	
2	5.5	5.47	20	
3	5.5	5.714	20	
4	5.5	5.485	20	
5	5.5	5.355	20	
6	5.5	5.557	20	
7	5.5	5.5	20	*
8	5.5	5.552	20	
9	5.5	5.395	20	
10	5.5	5.384	20	
11	5.5	5.562	20	
12	5.5	5.401	20	
13	5.5	5.462	20	
14	5.5	5.297	20	
15	5.5	5.326	20	
16	5.5	5.278	20	
17	5.5	5.353	20	
18	5.5	5.298	20	
19	5.5	5.594	20	
20	5.5	5.56	20	
21	5.5	5.488	20	
22	5.5	5.661	20	
23	5.5	5.367	20	

TYPE 6 PARAMETER SHEET

Trial Number : 7

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.481	20	
2	5.5	5.416	20	
3	5.5	5.693	20	
4	5.5	5.301	20	
5	5.5	5.412	20	
6	5.5	5.329	20	
7	5.5	5.389	20	
8	5.5	5.701	20	
9	5.5	5.331	20	
10	5.5	5.712	20	
11	5.5	5.279	20	
12	5.5	5.645	20	
13	5.5	5.697	20	
14	5.5	5.581	20	
15	5.5	5.6	20	
16	5.5	5.449	20	
17	5.5	5.307	20	
18	5.5	5.355	20	
19	5.5	5.395	20	
20	5.5	5.53	20	
21	5.5	5.579	20	
22	5.5	5.469	20	
23	5.5	5.577	20	

TYPE 6 PARAMETER SHEET

Trial Number : 8

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.307	20	
2	5.5	5.674	20	
3	5.5	5.272	20	
4	5.5	5.506	20	*
5	5.5	5.6	20	
6	5.5	5.618	20	
7	5.5	5.371	20	
8	5.5	5.384	20	
9	5.5	5.578	20	
10	5.5	5.359	20	
11	5.5	5.687	20	
12	5.5	5.497	20	*
13	5.5	5.419	20	
14	5.5	5.29	20	
15	5.5	5.404	20	
16	5.5	5.321	20	
17	5.5	5.7	20	
18	5.5	5.591	20	
19	5.5	5.27	20	
20	5.5	5.38	20	
21	5.5	5.563	20	
22	5.5	5.409	20	
23	5.5	5.305	20	

TYPE 6 PARAMETER SHEET

Trial Number : 9

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.514	20	
2	5.5	5.483	20	
3	5.5	5.672	20	
4	5.5	5.72	20	
5	5.5	5.397	20	
6	5.5	5.642	20	
7	5.5	5.611	20	
8	5.5	5.409	20	
9	5.5	5.475	20	
10	5.5	5.322	20	
11	5.5	5.644	20	
12	5.5	5.628	20	
13	5.5	5.534	20	
14	5.5	5.591	20	
15	5.5	5.596	20	
16	5.5	5.283	20	
17	5.5	5.424	20	
18	5.5	5.716	20	
19	5.5	5.706	20	
20	5.5	5.263	20	
21	5.5	5.548	20	
22	5.5	5.552	20	
23	5.5	5.36	20	

TYPE 6 PARAMETER SHEET

Trial Number : 10

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.461	20	
2	5.5	5.604	20	
3	5.5	5.645	20	
4	5.5	5.482	20	
5	5.5	5.262	20	
6	5.5	5.644	20	
7	5.5	5.256	20	
8	5.5	5.362	20	
9	5.5	5.521	20	
10	5.5	5.494	20	*
11	5.5	5.412	20	
12	5.5	5.375	20	
13	5.5	5.447	20	
14	5.5	5.632	20	
15	5.5	5.684	20	
16	5.5	5.373	20	
17	5.5	5.607	20	
18	5.5	5.333	20	
19	5.5	5.563	20	
20	5.5	5.688	20	
21	5.5	5.442	20	
22	5.5	5.255	20	
23	5.5	5.426	20	

TYPE 6 PARAMETER SHEET

Trial Number : 11

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.539	20	
2	5.5	5.676	20	
3	5.5	5.603	20	
4	5.5	5.457	20	
5	5.5	5.335	20	
6	5.5	5.695	20	
7	5.5	5.45	20	
8	5.5	5.29	20	
9	5.5	5.67	20	
10	5.5	5.315	20	
11	5.5	5.533	20	
12	5.5	5.607	20	
13	5.5	5.281	20	
14	5.5	5.403	20	
15	5.5	5.718	20	
16	5.5	5.72	20	
17	5.5	5.627	20	
18	5.5	5.549	20	
19	5.5	5.432	20	
20	5.5	5.252	20	
21	5.5	5.529	20	
22	5.5	5.428	20	
23	5.5	5.617	20	

TYPE 6 PARAMETER SHEET

Trial Number : 12

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.677	20	
2	5.5	5.308	20	
3	5.5	5.301	20	
4	5.5	5.42	20	
5	5.5	5.263	20	
6	5.5	5.259	20	
7	5.5	5.427	20	
8	5.5	5.575	20	
9	5.5	5.359	20	
10	5.5	5.502	20	*
11	5.5	5.697	20	
12	5.5	5.439	20	
13	5.5	5.678	20	
14	5.5	5.65	20	
15	5.5	5.585	20	
16	5.5	5.348	20	
17	5.5	5.41	20	
18	5.5	5.511	20	
19	5.5	5.374	20	
20	5.5	5.551	20	
21	5.5	5.506	20	*
22	5.5	5.668	20	
23	5.5	5.695	20	

TYPE 6 PARAMETER SHEET

Trial Number : 13

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.252	20	
2	5.5	5.285	20	
3	5.5	5.561	20	
4	5.5	5.311	20	
5	5.5	5.396	20	
6	5.5	5.424	20	
7	5.5	5.616	20	
8	5.5	5.666	20	
9	5.5	5.617	20	
10	5.5	5.529	20	
11	5.5	5.286	20	
12	5.5	5.494	20	*
13	5.5	5.317	20	
14	5.5	5.502	20	*
15	5.5	5.717	20	
16	5.5	5.418	20	
17	5.5	5.704	20	
18	5.5	5.415	20	
19	5.5	5.684	20	
20	5.5	5.702	20	
21	5.5	5.457	20	
22	5.5	5.549	20	
23	5.5	5.576	20	

TYPE 6 PARAMETER SHEET

Trial Number : 14

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.614	20	
2	5.5	5.719	20	
3	5.5	5.269	20	
4	5.5	5.558	20	
5	5.5	5.38	20	
6	5.5	5.445	20	
7	5.5	5.386	20	
8	5.5	5.56	20	
9	5.5	5.698	20	
10	5.5	5.584	20	
11	5.5	5.5	20	*
12	5.5	5.356	20	
13	5.5	5.661	20	
14	5.5	5.645	20	
15	5.5	5.551	20	
16	5.5	5.64	20	
17	5.5	5.403	20	
18	5.5	5.368	20	
19	5.5	5.52	20	
20	5.5	5.437	20	
21	5.5	5.434	20	
22	5.5	5.545	20	
23	5.5	5.372	20	

TYPE 6 PARAMETER SHEET

Trial Number : 15

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.356	20	
2	5.5	5.418	20	
3	5.5	5.688	20	
4	5.5	5.433	20	
5	5.5	5.671	20	
6	5.5	5.295	20	
7	5.5	5.57	20	
8	5.5	5.41	20	
9	5.5	5.608	20	
10	5.5	5.476	20	
11	5.5	5.428	20	
12	5.5	5.392	20	
13	5.5	5.254	20	
14	5.5	5.338	20	
15	5.5	5.35	20	
16	5.5	5.307	20	
17	5.5	5.469	20	
18	5.5	5.461	20	
19	5.5	5.3	20	
20	5.5	5.618	20	
21	5.5	5.508	20	*
22	5.5	5.533	20	
23	5.5	5.292	20	

TYPE 6 PARAMETER SHEET

Trial Number : 16

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.408	20	
2	5.5	5.446	20	
3	5.5	5.562	20	
4	5.5	5.397	20	
5	5.5	5.315	20	
6	5.5	5.425	20	
7	5.5	5.484	20	
8	5.5	5.349	20	
9	5.5	5.444	20	
10	5.5	5.477	20	
11	5.5	5.716	20	
12	5.5	5.572	20	
13	5.5	5.284	20	
14	5.5	5.288	20	
15	5.5	5.642	20	
16	5.5	5.28	20	
17	5.5	5.504	20	*
18	5.5	5.626	20	
19	5.5	5.494	20	*
20	5.5	5.586	20	
21	5.5	5.319	20	
22	5.5	5.389	20	
23	5.5	5.533	20	

TYPE 6 PARAMETER SHEET

Trial Number : 17

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.568	20	
2	5.5	5.346	20	
3	5.5	5.465	20	
4	5.5	5.419	20	
5	5.5	5.584	20	
6	5.5	5.516	20	
7	5.5	5.716	20	
8	5.5	5.64	20	
9	5.5	5.324	20	
10	5.5	5.354	20	
11	5.5	5.555	20	
12	5.5	5.629	20	
13	5.5	5.435	20	
14	5.5	5.325	20	
15	5.5	5.265	20	
16	5.5	5.577	20	
17	5.5	5.511	20	
18	5.5	5.306	20	
19	5.5	5.569	20	
20	5.5	5.688	20	
21	5.5	5.668	20	
22	5.5	5.588	20	
23	5.5	5.485	20	

TYPE 6 PARAMETER SHEET

Trial Number : 18

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.57	20	
2	5.5	5.724	20	
3	5.5	5.294	20	
4	5.5	5.45	20	
5	5.5	5.305	20	
6	5.5	5.574	20	
7	5.5	5.633	20	
8	5.5	5.273	20	
9	5.5	5.604	20	
10	5.5	5.36	20	
11	5.5	5.606	20	
12	5.5	5.557	20	
13	5.5	5.535	20	
14	5.5	5.493	20	*
15	5.5	5.35	20	
16	5.5	5.602	20	
17	5.5	5.523	20	
18	5.5	5.363	20	
19	5.5	5.699	20	
20	5.5	5.41	20	
21	5.5	5.647	20	
22	5.5	5.257	20	
23	5.5	5.488	20	

TYPE 6 PARAMETER SHEET

Trial Number : 19

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.55	20	
2	5.5	5.267	20	
3	5.5	5.645	20	
4	5.5	5.514	20	
5	5.5	5.584	20	
6	5.5	5.468	20	
7	5.5	5.325	20	
8	5.5	5.448	20	
9	5.5	5.648	20	
10	5.5	5.362	20	
11	5.5	5.622	20	
12	5.5	5.283	20	
13	5.5	5.679	20	
14	5.5	5.3	20	
15	5.5	5.585	20	
16	5.5	5.507	20	*
17	5.5	5.506	20	*
18	5.5	5.312	20	
19	5.5	5.356	20	
20	5.5	5.597	20	
21	5.5	5.718	20	
22	5.5	5.63	20	
23	5.5	5.709	20	

TYPE 6 PARAMETER SHEET

Trial Number : 20

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.465	20	
2	5.5	5.369	20	
3	5.5	5.552	20	
4	5.5	5.646	20	
5	5.5	5.314	20	
6	5.5	5.661	20	
7	5.5	5.566	20	
8	5.5	5.449	20	
9	5.5	5.308	20	
10	5.5	5.721	20	
11	5.5	5.682	20	
12	5.5	5.541	20	
13	5.5	5.387	20	
14	5.5	5.411	20	
15	5.5	5.709	20	
16	5.5	5.657	20	
17	5.5	5.598	20	
18	5.5	5.457	20	
19	5.5	5.401	20	
20	5.5	5.576	20	
21	5.5	5.307	20	
22	5.5	5.723	20	
23	5.5	5.51	20	*

TYPE 6 PARAMETER SHEET

Trial Number : 21

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.542	20	
2	5.5	5.644	20	
3	5.5	5.372	20	
4	5.5	5.531	20	
5	5.5	5.493	20	*
6	5.5	5.413	20	
7	5.5	5.639	20	
8	5.5	5.392	20	
9	5.5	5.39	20	
10	5.5	5.432	20	
11	5.5	5.473	20	
12	5.5	5.469	20	
13	5.5	5.607	20	
14	5.5	5.46	20	
15	5.5	5.702	20	
16	5.5	5.29	20	
17	5.5	5.604	20	
18	5.5	5.547	20	
19	5.5	5.645	20	
20	5.5	5.572	20	
21	5.5	5.376	20	
22	5.5	5.286	20	
23	5.5	5.434	20	

TYPE 6 PARAMETER SHEET

Trial Number : 22

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.497	20	*
2	5.5	5.381	20	
3	5.5	5.689	20	
4	5.5	5.484	20	
5	5.5	5.528	20	
6	5.5	5.623	20	
7	5.5	5.546	20	
8	5.5	5.644	20	
9	5.5	5.263	20	
10	5.5	5.447	20	
11	5.5	5.288	20	
12	5.5	5.361	20	
13	5.5	5.359	20	
14	5.5	5.34	20	
15	5.5	5.704	20	
16	5.5	5.658	20	
17	5.5	5.717	20	
18	5.5	5.501	20	*
19	5.5	5.538	20	
20	5.5	5.568	20	
21	5.5	5.496	20	*
22	5.5	5.632	20	
23	5.5	5.301	20	

TYPE 6 PARAMETER SHEET

Trial Number : 23

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.558	20	
2	5.5	5.562	20	
3	5.5	5.361	20	
4	5.5	5.411	20	
5	5.5	5.454	20	
6	5.5	5.378	20	
7	5.5	5.307	20	
8	5.5	5.255	20	
9	5.5	5.373	20	
10	5.5	5.291	20	
11	5.5	5.329	20	
12	5.5	5.366	20	
13	5.5	5.532	20	
14	5.5	5.56	20	
15	5.5	5.387	20	
16	5.5	5.61	20	
17	5.5	5.583	20	
18	5.5	5.288	20	
19	5.5	5.473	20	
20	5.5	5.36	20	
21	5.5	5.66	20	
22	5.5	5.688	20	
23	5.5	5.277	20	

TYPE 6 PARAMETER SHEET

Trial Number : 24

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.634	20	
2	5.5	5.495	20	*
3	5.5	5.558	20	
4	5.5	5.638	20	
5	5.5	5.621	20	
6	5.5	5.717	20	
7	5.5	5.628	20	
8	5.5	5.695	20	
9	5.5	5.29	20	
10	5.5	5.289	20	
11	5.5	5.472	20	
12	5.5	5.278	20	
13	5.5	5.618	20	
14	5.5	5.69	20	
15	5.5	5.577	20	
16	5.5	5.693	20	
17	5.5	5.607	20	
18	5.5	5.679	20	
19	5.5	5.622	20	
20	5.5	5.37	20	
21	5.5	5.318	20	
22	5.5	5.598	20	
23	5.5	5.483	20	

TYPE 6 PARAMETER SHEET

Trial Number : 25

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.387	20	
2	5.5	5.455	20	
3	5.5	5.652	20	
4	5.5	5.5	20	*
5	5.5	5.675	20	
6	5.5	5.561	20	
7	5.5	5.496	20	*
8	5.5	5.424	20	
9	5.5	5.414	20	
10	5.5	5.706	20	
11	5.5	5.606	20	
12	5.5	5.59	20	
13	5.5	5.721	20	
14	5.5	5.321	20	
15	5.5	5.719	20	
16	5.5	5.613	20	
17	5.5	5.273	20	
18	5.5	5.405	20	
19	5.5	5.453	20	
20	5.5	5.479	20	
21	5.5	5.264	20	
22	5.5	5.441	20	
23	5.5	5.64	20	

TYPE 6 PARAMETER SHEET

Trial Number : 26

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.461	20	
2	5.5	5.531	20	
3	5.5	5.394	20	
4	5.5	5.641	20	
5	5.5	5.42	20	
6	5.5	5.559	20	
7	5.5	5.339	20	
8	5.5	5.292	20	
9	5.5	5.486	20	
10	5.5	5.374	20	
11	5.5	5.609	20	
12	5.5	5.7	20	
13	5.5	5.634	20	
14	5.5	5.436	20	
15	5.5	5.724	20	
16	5.5	5.517	20	
17	5.5	5.64	20	
18	5.5	5.366	20	
19	5.5	5.252	20	
20	5.5	5.572	20	
21	5.5	5.56	20	
22	5.5	5.305	20	
23	5.5	5.71	20	

TYPE 6 PARAMETER SHEET

Trial Number : 27

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.277	20	
2	5.5	5.63	20	
3	5.5	5.401	20	
4	5.5	5.558	20	
5	5.5	5.433	20	
6	5.5	5.475	20	
7	5.5	5.557	20	
8	5.5	5.666	20	
9	5.5	5.595	20	
10	5.5	5.339	20	
11	5.5	5.431	20	
12	5.5	5.673	20	
13	5.5	5.652	20	
14	5.5	5.46	20	
15	5.5	5.62	20	
16	5.5	5.564	20	
17	5.5	5.295	20	
18	5.5	5.376	20	
19	5.5	5.555	20	
20	5.5	5.508	20	*
21	5.5	5.317	20	
22	5.5	5.637	20	
23	5.5	5.408	20	

TYPE 6 PARAMETER SHEET

Trial Number : 28

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.551	20	
2	5.5	5.405	20	
3	5.5	5.604	20	
4	5.5	5.461	20	
5	5.5	5.612	20	
6	5.5	5.255	20	
7	5.5	5.684	20	
8	5.5	5.656	20	
9	5.5	5.365	20	
10	5.5	5.283	20	
11	5.5	5.306	20	
12	5.5	5.611	20	
13	5.5	5.543	20	
14	5.5	5.443	20	
15	5.5	5.374	20	
16	5.5	5.35	20	
17	5.5	5.476	20	
18	5.5	5.683	20	
19	5.5	5.425	20	
20	5.5	5.372	20	
21	5.5	5.385	20	
22	5.5	5.599	20	
23	5.5	5.481	20	

TYPE 6 PARAMETER SHEET

Trial Number : 29

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.347	20	
2	5.5	5.542	20	
3	5.5	5.318	20	
4	5.5	5.625	20	
5	5.5	5.447	20	
6	5.5	5.575	20	
7	5.5	5.374	20	
8	5.5	5.323	20	
9	5.5	5.536	20	
10	5.5	5.259	20	
11	5.5	5.544	20	
12	5.5	5.349	20	
13	5.5	5.723	20	
14	5.5	5.577	20	
15	5.5	5.614	20	
16	5.5	5.282	20	
17	5.5	5.297	20	
18	5.5	5.306	20	
19	5.5	5.508	20	*
20	5.5	5.588	20	
21	5.5	5.314	20	
22	5.5	5.724	20	
23	5.5	5.481	20	

TYPE 6 PARAMETER SHEET

Trial Number : 30

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.455	20	
2	5.5	5.397	20	
3	5.5	5.604	20	
4	5.5	5.325	20	
5	5.5	5.639	20	
6	5.5	5.672	20	
7	5.5	5.527	20	
8	5.5	5.702	20	
9	5.5	5.62	20	
10	5.5	5.692	20	
11	5.5	5.706	20	
12	5.5	5.288	20	
13	5.5	5.402	20	
14	5.5	5.568	20	
15	5.5	5.671	20	
16	5.5	5.31	20	
17	5.5	5.384	20	
18	5.5	5.72	20	
19	5.5	5.268	20	
20	5.5	5.403	20	
21	5.5	5.497	20	*
22	5.5	5.53	20	
23	5.5	5.55	20	

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11n-40BW)-Master

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	0
13	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	0
21	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	1
23	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	1
26	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			93.33
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.662	40	
2	5.51	5.36	40	
3	5.51	5.704	40	
4	5.51	5.494	40	*
5	5.51	5.543	40	
6	5.51	5.52	40	*
7	5.51	5.397	40	
8	5.51	5.335	40	
9	5.51	5.436	40	
10	5.51	5.556	40	
11	5.51	5.708	40	
12	5.51	5.48	40	
13	5.51	5.518	40	*
14	5.51	5.558	40	
15	5.51	5.498	40	*
16	5.51	5.605	40	
17	5.51	5.29	40	
18	5.51	5.706	40	
19	5.51	5.672	40	
20	5.51	5.523	40	*
21	5.51	5.668	40	
22	5.51	5.601	40	
23	5.51	5.386	40	
24	5.51	5.339	40	
25	5.51	5.407	40	
26	5.51	5.497	40	*
27	5.51	5.485	40	
28	5.51	5.512	40	*
29	5.51	5.54	40	
30	5.51	5.427	40	
31	5.51	5.35	40	
32	5.51	5.482	40	
33	5.51	5.488	40	
34	5.51	5.496	40	*
35	5.51	5.317	40	
36	5.51	5.426	40	
37	5.51	5.295	40	
38	5.51	5.6	40	
39	5.51	5.326	40	
40	5.51	5.378	40	
41	5.51	5.532	40	
42	5.51	5.652	40	
43	5.51	5.299	40	
44	5.51	5.332	40	
45	5.51	5.294	40	
46	5.51	5.46	40	
47	5.51	5.26	40	
48	5.51	5.293	40	
49	5.51	5.507	40	*

50	5.51	5.262	40	
51	5.51	5.329	40	
52	5.51	5.366	40	
53	5.51	5.557	40	
54	5.51	5.447	40	
55	5.51	5.588	40	
56	5.51	5.551	40	
57	5.51	5.659	40	
58	5.51	5.314	40	
59	5.51	5.445	40	
60	5.51	5.287	40	
61	5.51	5.698	40	
62	5.51	5.425	40	
63	5.51	5.538	40	
64	5.51	5.449	40	
65	5.51	5.462	40	
66	5.51	5.307	40	
67	5.51	5.493	40	*
68	5.51	5.398	40	
69	5.51	5.32	40	
70	5.51	5.473	40	
71	5.51	5.437	40	
72	5.51	5.618	40	
73	5.51	5.724	40	
74	5.51	5.642	40	
75	5.51	5.629	40	
76	5.51	5.409	40	
77	5.51	5.653	40	
78	5.51	5.692	40	
79	5.51	5.564	40	
80	5.51	5.3	40	
81	5.51	5.45	40	
82	5.51	5.423	40	
83	5.51	5.468	40	
84	5.51	5.673	40	
85	5.51	5.626	40	
86	5.51	5.615	40	
87	5.51	5.395	40	
88	5.51	5.658	40	
89	5.51	5.432	40	
90	5.51	5.624	40	
91	5.51	5.688	40	
92	5.51	5.484	40	
93	5.51	5.346	40	
94	5.51	5.274	40	
95	5.51	5.529	40	*
96	5.51	5.34	40	
97	5.51	5.648	40	
98	5.51	5.311	40	
99	5.51	5.711	40	
100	5.51	5.481	40	

TYPE 6 PARAMETER SHEET

Trial Number : 2

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.722	40	
2	5.51	5.569	40	
3	5.51	5.428	40	
4	5.51	5.382	40	
5	5.51	5.58	40	
6	5.51	5.718	40	
7	5.51	5.302	40	
8	5.51	5.326	40	
9	5.51	5.666	40	
10	5.51	5.711	40	
11	5.51	5.375	40	
12	5.51	5.412	40	
13	5.51	5.721	40	
14	5.51	5.337	40	
15	5.51	5.4	40	
16	5.51	5.346	40	
17	5.51	5.571	40	
18	5.51	5.611	40	
19	5.51	5.287	40	
20	5.51	5.673	40	
21	5.51	5.527	40	*
22	5.51	5.286	40	
23	5.51	5.402	40	

TYPE 6 PARAMETER SHEET

Trial Number : 3

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.713	40	
2	5.51	5.262	40	
3	5.51	5.287	40	
4	5.51	5.312	40	
5	5.51	5.558	40	
6	5.51	5.684	40	
7	5.51	5.471	40	
8	5.51	5.628	40	
9	5.51	5.339	40	
10	5.51	5.637	40	
11	5.51	5.643	40	
12	5.51	5.511	40	*
13	5.51	5.282	40	
14	5.51	5.47	40	
15	5.51	5.542	40	
16	5.51	5.387	40	
17	5.51	5.582	40	
18	5.51	5.352	40	
19	5.51	5.606	40	
20	5.51	5.695	40	
21	5.51	5.447	40	
22	5.51	5.265	40	
23	5.51	5.326	40	

TYPE 6 PARAMETER SHEET

Trial Number : 4

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.395	40	
2	5.51	5.388	40	
3	5.51	5.477	40	
4	5.51	5.376	40	
5	5.51	5.304	40	
6	5.51	5.563	40	
7	5.51	5.488	40	
8	5.51	5.531	40	
9	5.51	5.567	40	
10	5.51	5.307	40	
11	5.51	5.354	40	
12	5.51	5.594	40	
13	5.51	5.4	40	
14	5.51	5.374	40	
15	5.51	5.546	40	
16	5.51	5.28	40	
17	5.51	5.387	40	
18	5.51	5.428	40	
19	5.51	5.268	40	
20	5.51	5.645	40	
21	5.51	5.613	40	
22	5.51	5.322	40	
23	5.51	5.444	40	

TYPE 6 PARAMETER SHEET

Trial Number : 5

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.257	40	
2	5.51	5.267	40	
3	5.51	5.566	40	
4	5.51	5.68	40	
5	5.51	5.307	40	
6	5.51	5.3	40	
7	5.51	5.685	40	
8	5.51	5.446	40	
9	5.51	5.591	40	
10	5.51	5.594	40	
11	5.51	5.697	40	
12	5.51	5.431	40	
13	5.51	5.295	40	
14	5.51	5.556	40	
15	5.51	5.485	40	
16	5.51	5.587	40	
17	5.51	5.498	40	*
18	5.51	5.314	40	
19	5.51	5.558	40	
20	5.51	5.364	40	
21	5.51	5.545	40	
22	5.51	5.59	40	
23	5.51	5.621	40	

TYPE 6 PARAMETER SHEET

Trial Number : 6

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.453	40	
2	5.51	5.4	40	
3	5.51	5.481	40	
4	5.51	5.435	40	
5	5.51	5.43	40	
6	5.51	5.445	40	
7	5.51	5.702	40	
8	5.51	5.312	40	
9	5.51	5.636	40	
10	5.51	5.472	40	
11	5.51	5.496	40	*
12	5.51	5.597	40	
13	5.51	5.379	40	
14	5.51	5.345	40	
15	5.51	5.348	40	
16	5.51	5.29	40	
17	5.51	5.538	40	
18	5.51	5.266	40	
19	5.51	5.54	40	
20	5.51	5.665	40	
21	5.51	5.659	40	
22	5.51	5.313	40	
23	5.51	5.706	40	

TYPE 6 PARAMETER SHEET

Trial Number : 7

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.519	40	*
2	5.51	5.447	40	
3	5.51	5.395	40	
4	5.51	5.681	40	
5	5.51	5.396	40	
6	5.51	5.494	40	*
7	5.51	5.386	40	
8	5.51	5.665	40	
9	5.51	5.329	40	
10	5.51	5.63	40	
11	5.51	5.327	40	
12	5.51	5.677	40	
13	5.51	5.318	40	
14	5.51	5.547	40	
15	5.51	5.526	40	*
16	5.51	5.54	40	
17	5.51	5.251	40	
18	5.51	5.659	40	
19	5.51	5.662	40	
20	5.51	5.428	40	
21	5.51	5.365	40	
22	5.51	5.461	40	
23	5.51	5.442	40	

TYPE 6 PARAMETER SHEET

Trial Number : 8

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.355	40	
2	5.51	5.367	40	
3	5.51	5.474	40	
4	5.51	5.314	40	
5	5.51	5.708	40	
6	5.51	5.393	40	
7	5.51	5.394	40	
8	5.51	5.534	40	
9	5.51	5.301	40	
10	5.51	5.607	40	
11	5.51	5.612	40	
12	5.51	5.722	40	
13	5.51	5.515	40	*
14	5.51	5.632	40	
15	5.51	5.468	40	
16	5.51	5.561	40	
17	5.51	5.611	40	
18	5.51	5.396	40	
19	5.51	5.529	40	*
20	5.51	5.512	40	*
21	5.51	5.431	40	
22	5.51	5.326	40	
23	5.51	5.255	40	

TYPE 6 PARAMETER SHEET

Trial Number : 9

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.598	40	
2	5.51	5.333	40	
3	5.51	5.692	40	
4	5.51	5.61	40	
5	5.51	5.717	40	
6	5.51	5.317	40	
7	5.51	5.349	40	
8	5.51	5.497	40	*
9	5.51	5.716	40	
10	5.51	5.271	40	
11	5.51	5.25	40	
12	5.51	5.255	40	
13	5.51	5.302	40	
14	5.51	5.58	40	
15	5.51	5.503	40	*
16	5.51	5.531	40	
17	5.51	5.644	40	
18	5.51	5.307	40	
19	5.51	5.684	40	
20	5.51	5.689	40	
21	5.51	5.566	40	
22	5.51	5.42	40	
23	5.51	5.701	40	

TYPE 6 PARAMETER SHEET

Trial Number : 10

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.636	40	
2	5.51	5.674	40	
3	5.51	5.365	40	
4	5.51	5.549	40	
5	5.51	5.294	40	
6	5.51	5.487	40	
7	5.51	5.553	40	
8	5.51	5.353	40	
9	5.51	5.415	40	
10	5.51	5.603	40	
11	5.51	5.477	40	
12	5.51	5.575	40	
13	5.51	5.317	40	
14	5.51	5.61	40	
15	5.51	5.534	40	
16	5.51	5.532	40	
17	5.51	5.528	40	*
18	5.51	5.59	40	
19	5.51	5.277	40	
20	5.51	5.69	40	
21	5.51	5.373	40	
22	5.51	5.388	40	
23	5.51	5.369	40	

TYPE 6 PARAMETER SHEET

Trial Number : 11

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.684	40	
2	5.51	5.384	40	
3	5.51	5.603	40	
4	5.51	5.452	40	
5	5.51	5.713	40	
6	5.51	5.284	40	
7	5.51	5.672	40	
8	5.51	5.583	40	
9	5.51	5.37	40	
10	5.51	5.441	40	
11	5.51	5.444	40	
12	5.51	5.49	40	*
13	5.51	5.55	40	
14	5.51	5.435	40	
15	5.51	5.348	40	
16	5.51	5.294	40	
17	5.51	5.534	40	
18	5.51	5.322	40	
19	5.51	5.625	40	
20	5.51	5.266	40	
21	5.51	5.578	40	
22	5.51	5.381	40	
23	5.51	5.551	40	

TYPE 6 PARAMETER SHEET

Trial Number : 12

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.41	40	
2	5.51	5.432	40	
3	5.51	5.427	40	
4	5.51	5.634	40	
5	5.51	5.542	40	
6	5.51	5.313	40	
7	5.51	5.397	40	
8	5.51	5.391	40	
9	5.51	5.274	40	
10	5.51	5.454	40	
11	5.51	5.451	40	
12	5.51	5.495	40	*
13	5.51	5.429	40	
14	5.51	5.354	40	
15	5.51	5.633	40	
16	5.51	5.538	40	
17	5.51	5.639	40	
18	5.51	5.395	40	
19	5.51	5.501	40	*
20	5.51	5.681	40	
21	5.51	5.304	40	
22	5.51	5.494	40	*
23	5.51	5.355	40	

TYPE 6 PARAMETER SHEET

Trial Number : 13

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.355	40	
2	5.51	5.536	40	
3	5.51	5.304	40	
4	5.51	5.286	40	
5	5.51	5.658	40	
6	5.51	5.398	40	
7	5.51	5.702	40	
8	5.51	5.438	40	
9	5.51	5.397	40	
10	5.51	5.416	40	
11	5.51	5.294	40	
12	5.51	5.452	40	
13	5.51	5.257	40	
14	5.51	5.293	40	
15	5.51	5.579	40	
16	5.51	5.505	40	*
17	5.51	5.281	40	
18	5.51	5.559	40	
19	5.51	5.312	40	
20	5.51	5.465	40	
21	5.51	5.457	40	
22	5.51	5.37	40	
23	5.51	5.534	40	

TYPE 6 PARAMETER SHEET

Trial Number : 14

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.393	40	
2	5.51	5.371	40	
3	5.51	5.456	40	
4	5.51	5.415	40	
5	5.51	5.491	40	*
6	5.51	5.446	40	
7	5.51	5.721	40	
8	5.51	5.534	40	
9	5.51	5.676	40	
10	5.51	5.407	40	
11	5.51	5.7	40	
12	5.51	5.349	40	
13	5.51	5.44	40	
14	5.51	5.376	40	
15	5.51	5.435	40	
16	5.51	5.574	40	
17	5.51	5.543	40	
18	5.51	5.482	40	
19	5.51	5.612	40	
20	5.51	5.692	40	
21	5.51	5.306	40	
22	5.51	5.617	40	
23	5.51	5.636	40	

TYPE 6 PARAMETER SHEET

Trial Number : 15

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.718	40	
2	5.51	5.318	40	
3	5.51	5.423	40	
4	5.51	5.34	40	
5	5.51	5.655	40	
6	5.51	5.566	40	
7	5.51	5.42	40	
8	5.51	5.378	40	
9	5.51	5.588	40	
10	5.51	5.375	40	
11	5.51	5.682	40	
12	5.51	5.389	40	
13	5.51	5.694	40	
14	5.51	5.671	40	
15	5.51	5.351	40	
16	5.51	5.319	40	
17	5.51	5.46	40	
18	5.51	5.346	40	
19	5.51	5.599	40	
20	5.51	5.612	40	
21	5.51	5.475	40	
22	5.51	5.295	40	
23	5.51	5.531	40	

TYPE 6 PARAMETER SHEET

Trial Number : 16

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.699	40	
2	5.51	5.418	40	
3	5.51	5.476	40	
4	5.51	5.679	40	
5	5.51	5.452	40	
6	5.51	5.663	40	
7	5.51	5.693	40	
8	5.51	5.267	40	
9	5.51	5.393	40	
10	5.51	5.594	40	
11	5.51	5.323	40	
12	5.51	5.531	40	
13	5.51	5.584	40	
14	5.51	5.375	40	
15	5.51	5.561	40	
16	5.51	5.414	40	
17	5.51	5.543	40	
18	5.51	5.294	40	
19	5.51	5.605	40	
20	5.51	5.617	40	
21	5.51	5.309	40	
22	5.51	5.298	40	
23	5.51	5.57	40	

TYPE 6 PARAMETER SHEET

Trial Number : 17

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.502	40	*
2	5.51	5.54	40	
3	5.51	5.468	40	
4	5.51	5.251	40	
5	5.51	5.55	40	
6	5.51	5.431	40	
7	5.51	5.311	40	
8	5.51	5.724	40	
9	5.51	5.635	40	
10	5.51	5.704	40	
11	5.51	5.552	40	
12	5.51	5.601	40	
13	5.51	5.306	40	
14	5.51	5.694	40	
15	5.51	5.679	40	
16	5.51	5.301	40	
17	5.51	5.302	40	
18	5.51	5.303	40	
19	5.51	5.626	40	
20	5.51	5.285	40	
21	5.51	5.578	40	
22	5.51	5.565	40	
23	5.51	5.308	40	

TYPE 6 PARAMETER SHEET

Trial Number : 18

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.264	40	
2	5.51	5.65	40	
3	5.51	5.49	40	*
4	5.51	5.519	40	*
5	5.51	5.585	40	
6	5.51	5.259	40	
7	5.51	5.365	40	
8	5.51	5.46	40	
9	5.51	5.331	40	
10	5.51	5.562	40	
11	5.51	5.428	40	
12	5.51	5.427	40	
13	5.51	5.404	40	
14	5.51	5.532	40	
15	5.51	5.568	40	
16	5.51	5.398	40	
17	5.51	5.314	40	
18	5.51	5.269	40	
19	5.51	5.309	40	
20	5.51	5.494	40	*
21	5.51	5.66	40	
22	5.51	5.595	40	
23	5.51	5.546	40	

TYPE 6 PARAMETER SHEET

Trial Number : 19

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.357	40	
2	5.51	5.636	40	
3	5.51	5.363	40	
4	5.51	5.485	40	
5	5.51	5.498	40	*
6	5.51	5.311	40	
7	5.51	5.568	40	
8	5.51	5.38	40	
9	5.51	5.62	40	
10	5.51	5.251	40	
11	5.51	5.455	40	
12	5.51	5.25	40	
13	5.51	5.706	40	
14	5.51	5.317	40	
15	5.51	5.409	40	
16	5.51	5.375	40	
17	5.51	5.601	40	
18	5.51	5.672	40	
19	5.51	5.262	40	
20	5.51	5.563	40	
21	5.51	5.454	40	
22	5.51	5.315	40	
23	5.51	5.715	40	

TYPE 6 PARAMETER SHEET

Trial Number : 20

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.472	40	
2	5.51	5.58	40	
3	5.51	5.513	40	*
4	5.51	5.71	40	
5	5.51	5.455	40	
6	5.51	5.303	40	
7	5.51	5.562	40	
8	5.51	5.396	40	
9	5.51	5.279	40	
10	5.51	5.721	40	
11	5.51	5.453	40	
12	5.51	5.678	40	
13	5.51	5.694	40	
14	5.51	5.509	40	*
15	5.51	5.297	40	
16	5.51	5.258	40	
17	5.51	5.415	40	
18	5.51	5.345	40	
19	5.51	5.313	40	
20	5.51	5.277	40	
21	5.51	5.621	40	
22	5.51	5.558	40	
23	5.51	5.391	40	

TYPE 6 PARAMETER SHEET

Trial Number : 21

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.628	40	
2	5.51	5.342	40	
3	5.51	5.362	40	
4	5.51	5.665	40	
5	5.51	5.476	40	
6	5.51	5.305	40	
7	5.51	5.388	40	
8	5.51	5.623	40	
9	5.51	5.378	40	
10	5.51	5.686	40	
11	5.51	5.676	40	
12	5.51	5.708	40	
13	5.51	5.34	40	
14	5.51	5.566	40	
15	5.51	5.636	40	
16	5.51	5.41	40	
17	5.51	5.701	40	
18	5.51	5.685	40	
19	5.51	5.627	40	
20	5.51	5.506	40	*
21	5.51	5.327	40	
22	5.51	5.309	40	
23	5.51	5.257	40	

TYPE 6 PARAMETER SHEET

Trial Number : 22

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.679	40	
2	5.51	5.454	40	
3	5.51	5.559	40	
4	5.51	5.377	40	
5	5.51	5.72	40	
6	5.51	5.695	40	
7	5.51	5.622	40	
8	5.51	5.357	40	
9	5.51	5.462	40	
10	5.51	5.697	40	
11	5.51	5.531	40	
12	5.51	5.521	40	*
13	5.51	5.394	40	
14	5.51	5.655	40	
15	5.51	5.372	40	
16	5.51	5.686	40	
17	5.51	5.706	40	
18	5.51	5.413	40	
19	5.51	5.501	40	*
20	5.51	5.487	40	
21	5.51	5.48	40	
22	5.51	5.676	40	
23	5.51	5.643	40	

TYPE 6 PARAMETER SHEET

Trial Number : 23

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.51	40	*
2	5.51	5.469	40	
3	5.51	5.438	40	
4	5.51	5.578	40	
5	5.51	5.518	40	*
6	5.51	5.344	40	
7	5.51	5.352	40	
8	5.51	5.353	40	
9	5.51	5.335	40	
10	5.51	5.442	40	
11	5.51	5.695	40	
12	5.51	5.588	40	
13	5.51	5.394	40	
14	5.51	5.533	40	
15	5.51	5.408	40	
16	5.51	5.582	40	
17	5.51	5.505	40	*
18	5.51	5.528	40	*
19	5.51	5.407	40	
20	5.51	5.642	40	
21	5.51	5.473	40	
22	5.51	5.715	40	
23	5.51	5.523	40	*

TYPE 6 PARAMETER SHEET

Trial Number : 24

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.353	40	
2	5.51	5.274	40	
3	5.51	5.592	40	
4	5.51	5.307	40	
5	5.51	5.4	40	
6	5.51	5.319	40	
7	5.51	5.695	40	
8	5.51	5.549	40	
9	5.51	5.467	40	
10	5.51	5.639	40	
11	5.51	5.612	40	
12	5.51	5.304	40	
13	5.51	5.408	40	
14	5.51	5.633	40	
15	5.51	5.708	40	
16	5.51	5.588	40	
17	5.51	5.335	40	
18	5.51	5.366	40	
19	5.51	5.483	40	
20	5.51	5.7	40	
21	5.51	5.422	40	
22	5.51	5.591	40	
23	5.51	5.264	40	

TYPE 6 PARAMETER SHEET

Trial Number : 25

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.651	40	
2	5.51	5.285	40	
3	5.51	5.444	40	
4	5.51	5.272	40	
5	5.51	5.303	40	
6	5.51	5.381	40	
7	5.51	5.263	40	
8	5.51	5.575	40	
9	5.51	5.45	40	
10	5.51	5.339	40	
11	5.51	5.554	40	
12	5.51	5.445	40	
13	5.51	5.581	40	
14	5.51	5.499	40	*
15	5.51	5.404	40	
16	5.51	5.516	40	*
17	5.51	5.348	40	
18	5.51	5.298	40	
19	5.51	5.621	40	
20	5.51	5.455	40	
21	5.51	5.347	40	
22	5.51	5.657	40	
23	5.51	5.719	40	

TYPE 6 PARAMETER SHEET

Trial Number : 26

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.254	40	
2	5.51	5.278	40	
3	5.51	5.456	40	
4	5.51	5.711	40	
5	5.51	5.365	40	
6	5.51	5.723	40	
7	5.51	5.68	40	
8	5.51	5.589	40	
9	5.51	5.71	40	
10	5.51	5.528	40	*
11	5.51	5.304	40	
12	5.51	5.463	40	
13	5.51	5.252	40	
14	5.51	5.428	40	
15	5.51	5.471	40	
16	5.51	5.693	40	
17	5.51	5.403	40	
18	5.51	5.673	40	
19	5.51	5.289	40	
20	5.51	5.389	40	
21	5.51	5.598	40	
22	5.51	5.492	40	*
23	5.51	5.672	40	

TYPE 6 PARAMETER SHEET

Trial Number : 27

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.708	40	
2	5.51	5.612	40	
3	5.51	5.615	40	
4	5.51	5.718	40	
5	5.51	5.568	40	
6	5.51	5.712	40	
7	5.51	5.551	40	
8	5.51	5.433	40	
9	5.51	5.326	40	
10	5.51	5.682	40	
11	5.51	5.586	40	
12	5.51	5.695	40	
13	5.51	5.599	40	
14	5.51	5.705	40	
15	5.51	5.295	40	
16	5.51	5.361	40	
17	5.51	5.709	40	
18	5.51	5.526	40	*
19	5.51	5.57	40	
20	5.51	5.285	40	
21	5.51	5.439	40	
22	5.51	5.296	40	
23	5.51	5.485	40	

TYPE 6 PARAMETER SHEET

Trial Number : 28

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.352	40	
2	5.51	5.477	40	
3	5.51	5.415	40	
4	5.51	5.562	40	
5	5.51	5.578	40	
6	5.51	5.505	40	*
7	5.51	5.647	40	
8	5.51	5.366	40	
9	5.51	5.312	40	
10	5.51	5.66	40	
11	5.51	5.72	40	
12	5.51	5.359	40	
13	5.51	5.326	40	
14	5.51	5.708	40	
15	5.51	5.672	40	
16	5.51	5.441	40	
17	5.51	5.345	40	
18	5.51	5.338	40	
19	5.51	5.662	40	
20	5.51	5.489	40	
21	5.51	5.626	40	
22	5.51	5.577	40	
23	5.51	5.298	40	

TYPE 6 PARAMETER SHEET

Trial Number : 29

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.466	40	
2	5.51	5.487	40	
3	5.51	5.515	40	*
4	5.51	5.344	40	
5	5.51	5.425	40	
6	5.51	5.673	40	
7	5.51	5.393	40	
8	5.51	5.523	40	*
9	5.51	5.722	40	
10	5.51	5.322	40	
11	5.51	5.644	40	
12	5.51	5.423	40	
13	5.51	5.409	40	
14	5.51	5.646	40	
15	5.51	5.604	40	
16	5.51	5.608	40	
17	5.51	5.594	40	
18	5.51	5.669	40	
19	5.51	5.342	40	
20	5.51	5.354	40	
21	5.51	5.718	40	
22	5.51	5.419	40	
23	5.51	5.371	40	

TYPE 6 PARAMETER SHEET

Trial Number : 30

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.523	40	*
2	5.51	5.587	40	
3	5.51	5.661	40	
4	5.51	5.707	40	
5	5.51	5.278	40	
6	5.51	5.372	40	
7	5.51	5.453	40	
8	5.51	5.642	40	
9	5.51	5.563	40	
10	5.51	5.39	40	
11	5.51	5.26	40	
12	5.51	5.571	40	
13	5.51	5.307	40	
14	5.51	5.706	40	
15	5.51	5.573	40	
16	5.51	5.591	40	
17	5.51	5.414	40	
18	5.51	5.355	40	
19	5.51	5.418	40	
20	5.51	5.538	40	
21	5.51	5.294	40	
22	5.51	5.377	40	
23	5.51	5.27	40	

Product : Wireless module
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ac-80BW)-Master

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	0
9	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	0
22	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	1
23	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	1
26	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			93.33
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.548	80	*
2	5.53	5.412	80	
3	5.53	5.695	80	
4	5.53	5.604	80	
5	5.53	5.661	80	
6	5.53	5.386	80	
7	5.53	5.62	80	
8	5.53	5.506	80	*
9	5.53	5.457	80	
10	5.53	5.388	80	
11	5.53	5.721	80	
12	5.53	5.606	80	
13	5.53	5.253	80	
14	5.53	5.348	80	
15	5.53	5.26	80	
16	5.53	5.442	80	
17	5.53	5.568	80	*
18	5.53	5.322	80	
19	5.53	5.335	80	
20	5.53	5.459	80	
21	5.53	5.282	80	
22	5.53	5.54	80	*
23	5.53	5.309	80	
24	5.53	5.551	80	*
25	5.53	5.497	80	*
26	5.53	5.33	80	
27	5.53	5.456	80	
28	5.53	5.361	80	
29	5.53	5.298	80	
30	5.53	5.595	80	
31	5.53	5.352	80	
32	5.53	5.467	80	
33	5.53	5.624	80	
34	5.53	5.665	80	
35	5.53	5.586	80	
36	5.53	5.409	80	
37	5.53	5.331	80	
38	5.53	5.615	80	
39	5.53	5.432	80	
40	5.53	5.269	80	
41	5.53	5.314	80	
42	5.53	5.692	80	
43	5.53	5.425	80	
44	5.53	5.585	80	
45	5.53	5.267	80	
46	5.53	5.46	80	
47	5.53	5.48	80	
48	5.53	5.423	80	
49	5.53	5.304	80	

50	5.53	5.265	80	
51	5.53	5.419	80	
52	5.53	5.542	80	*
53	5.53	5.638	80	
54	5.53	5.668	80	
55	5.53	5.641	80	
56	5.53	5.544	80	*
57	5.53	5.452	80	
58	5.53	5.561	80	*
59	5.53	5.699	80	
60	5.53	5.667	80	
61	5.53	5.676	80	
62	5.53	5.415	80	
63	5.53	5.554	80	*
64	5.53	5.652	80	
65	5.53	5.473	80	
66	5.53	5.35	80	
67	5.53	5.579	80	
68	5.53	5.293	80	
69	5.53	5.297	80	
70	5.53	5.529	80	*
71	5.53	5.711	80	
72	5.53	5.307	80	
73	5.53	5.515	80	*
74	5.53	5.636	80	
75	5.53	5.522	80	*
76	5.53	5.649	80	
77	5.53	5.683	80	
78	5.53	5.402	80	
79	5.53	5.38	80	
80	5.53	5.469	80	
81	5.53	5.599	80	
82	5.53	5.566	80	*
83	5.53	5.487	80	
84	5.53	5.313	80	
85	5.53	5.489	80	
86	5.53	5.28	80	
87	5.53	5.439	80	
88	5.53	5.463	80	
89	5.53	5.333	80	
90	5.53	5.612	80	
91	5.53	5.29	80	
92	5.53	5.476	80	
93	5.53	5.702	80	
94	5.53	5.53	80	*
95	5.53	5.355	80	
96	5.53	5.461	80	
97	5.53	5.644	80	
98	5.53	5.279	80	
99	5.53	5.541	80	*
100	5.53	5.482	80	

TYPE 6 PARAMETER SHEET

Trial Number : 2

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.472	80	
2	5.53	5.399	80	
3	5.53	5.46	80	
4	5.53	5.531	80	*
5	5.53	5.299	80	
6	5.53	5.468	80	
7	5.53	5.628	80	
8	5.53	5.597	80	
9	5.53	5.315	80	
10	5.53	5.446	80	
11	5.53	5.302	80	
12	5.53	5.495	80	*
13	5.53	5.713	80	
14	5.53	5.48	80	
15	5.53	5.541	80	*
16	5.53	5.47	80	
17	5.53	5.469	80	
18	5.53	5.57	80	*
19	5.53	5.477	80	
20	5.53	5.27	80	
21	5.53	5.451	80	
22	5.53	5.462	80	
23	5.53	5.434	80	

TYPE 6 PARAMETER SHEET

Trial Number : 3

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.673	80	
2	5.53	5.381	80	
3	5.53	5.343	80	
4	5.53	5.617	80	
5	5.53	5.404	80	
6	5.53	5.395	80	
7	5.53	5.276	80	
8	5.53	5.403	80	
9	5.53	5.593	80	
10	5.53	5.548	80	*
11	5.53	5.512	80	*
12	5.53	5.662	80	
13	5.53	5.565	80	*
14	5.53	5.686	80	
15	5.53	5.481	80	
16	5.53	5.496	80	*
17	5.53	5.599	80	
18	5.53	5.413	80	
19	5.53	5.672	80	
20	5.53	5.561	80	*
21	5.53	5.724	80	
22	5.53	5.605	80	
23	5.53	5.507	80	*

TYPE 6 PARAMETER SHEET

Trial Number : 4

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.325	80	
2	5.53	5.267	80	
3	5.53	5.719	80	
4	5.53	5.293	80	
5	5.53	5.259	80	
6	5.53	5.642	80	
7	5.53	5.291	80	
8	5.53	5.275	80	
9	5.53	5.318	80	
10	5.53	5.3	80	
11	5.53	5.515	80	*
12	5.53	5.55	80	*
13	5.53	5.708	80	
14	5.53	5.657	80	
15	5.53	5.422	80	
16	5.53	5.284	80	
17	5.53	5.381	80	
18	5.53	5.675	80	
19	5.53	5.39	80	
20	5.53	5.327	80	
21	5.53	5.392	80	
22	5.53	5.482	80	
23	5.53	5.41	80	

TYPE 6 PARAMETER SHEET

Trial Number : 5

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.501	80	*
2	5.53	5.565	80	*
3	5.53	5.374	80	
4	5.53	5.302	80	
5	5.53	5.288	80	
6	5.53	5.324	80	
7	5.53	5.426	80	
8	5.53	5.547	80	*
9	5.53	5.61	80	
10	5.53	5.432	80	
11	5.53	5.513	80	*
12	5.53	5.307	80	
13	5.53	5.296	80	
14	5.53	5.672	80	
15	5.53	5.517	80	*
16	5.53	5.66	80	
17	5.53	5.723	80	
18	5.53	5.367	80	
19	5.53	5.635	80	
20	5.53	5.522	80	*
21	5.53	5.556	80	*
22	5.53	5.451	80	
23	5.53	5.616	80	

TYPE 6 PARAMETER SHEET

Trial Number : 6

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.285	80	
2	5.53	5.447	80	
3	5.53	5.459	80	
4	5.53	5.27	80	
5	5.53	5.564	80	*
6	5.53	5.389	80	
7	5.53	5.506	80	*
8	5.53	5.711	80	
9	5.53	5.482	80	
10	5.53	5.49	80	*
11	5.53	5.367	80	
12	5.53	5.354	80	
13	5.53	5.531	80	*
14	5.53	5.596	80	
15	5.53	5.35	80	
16	5.53	5.372	80	
17	5.53	5.57	80	*
18	5.53	5.661	80	
19	5.53	5.62	80	
20	5.53	5.499	80	*
21	5.53	5.639	80	
22	5.53	5.269	80	
23	5.53	5.614	80	

TYPE 6 PARAMETER SHEET

Trial Number : 7

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.524	80	*
2	5.53	5.313	80	
3	5.53	5.59	80	
4	5.53	5.36	80	
5	5.53	5.331	80	
6	5.53	5.288	80	
7	5.53	5.361	80	
8	5.53	5.601	80	
9	5.53	5.357	80	
10	5.53	5.721	80	
11	5.53	5.484	80	
12	5.53	5.483	80	
13	5.53	5.271	80	
14	5.53	5.408	80	
15	5.53	5.608	80	
16	5.53	5.474	80	
17	5.53	5.317	80	
18	5.53	5.31	80	
19	5.53	5.545	80	*
20	5.53	5.671	80	
21	5.53	5.254	80	
22	5.53	5.686	80	
23	5.53	5.633	80	

TYPE 6 PARAMETER SHEET

Trial Number : 8

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.655	80	
2	5.53	5.289	80	
3	5.53	5.299	80	
4	5.53	5.701	80	
5	5.53	5.456	80	
6	5.53	5.69	80	
7	5.53	5.488	80	
8	5.53	5.632	80	
9	5.53	5.517	80	*
10	5.53	5.38	80	
11	5.53	5.437	80	
12	5.53	5.28	80	
13	5.53	5.388	80	
14	5.53	5.571	80	
15	5.53	5.374	80	
16	5.53	5.381	80	
17	5.53	5.696	80	
18	5.53	5.265	80	
19	5.53	5.611	80	
20	5.53	5.606	80	
21	5.53	5.551	80	*
22	5.53	5.724	80	
23	5.53	5.275	80	

TYPE 6 PARAMETER SHEET

Trial Number : 9

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.547	80	*
2	5.53	5.389	80	
3	5.53	5.561	80	*
4	5.53	5.596	80	
5	5.53	5.663	80	
6	5.53	5.467	80	
7	5.53	5.584	80	
8	5.53	5.276	80	
9	5.53	5.684	80	
10	5.53	5.271	80	
11	5.53	5.704	80	
12	5.53	5.473	80	
13	5.53	5.455	80	
14	5.53	5.609	80	
15	5.53	5.489	80	
16	5.53	5.623	80	
17	5.53	5.545	80	*
18	5.53	5.557	80	*
19	5.53	5.471	80	
20	5.53	5.386	80	
21	5.53	5.66	80	
22	5.53	5.527	80	*
23	5.53	5.373	80	

TYPE 6 PARAMETER SHEET

Trial Number : 10

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.703	80	
2	5.53	5.632	80	
3	5.53	5.398	80	
4	5.53	5.526	80	*
5	5.53	5.621	80	
6	5.53	5.469	80	
7	5.53	5.503	80	*
8	5.53	5.64	80	
9	5.53	5.328	80	
10	5.53	5.704	80	
11	5.53	5.286	80	
12	5.53	5.375	80	
13	5.53	5.427	80	
14	5.53	5.302	80	
15	5.53	5.494	80	*
16	5.53	5.267	80	
17	5.53	5.578	80	
18	5.53	5.366	80	
19	5.53	5.547	80	*
20	5.53	5.697	80	
21	5.53	5.72	80	
22	5.53	5.63	80	
23	5.53	5.584	80	

TYPE 6 PARAMETER SHEET

Trial Number : 11

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.274	80	
2	5.53	5.569	80	*
3	5.53	5.367	80	
4	5.53	5.28	80	
5	5.53	5.4	80	
6	5.53	5.448	80	
7	5.53	5.618	80	
8	5.53	5.562	80	*
9	5.53	5.452	80	
10	5.53	5.316	80	
11	5.53	5.55	80	*
12	5.53	5.574	80	
13	5.53	5.711	80	
14	5.53	5.456	80	
15	5.53	5.258	80	
16	5.53	5.394	80	
17	5.53	5.581	80	
18	5.53	5.501	80	*
19	5.53	5.473	80	
20	5.53	5.49	80	*
21	5.53	5.351	80	
22	5.53	5.638	80	
23	5.53	5.654	80	

TYPE 6 PARAMETER SHEET

Trial Number : 12

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.307	80	
2	5.53	5.26	80	
3	5.53	5.526	80	*
4	5.53	5.558	80	*
5	5.53	5.54	80	*
6	5.53	5.671	80	
7	5.53	5.708	80	
8	5.53	5.497	80	*
9	5.53	5.592	80	
10	5.53	5.628	80	
11	5.53	5.313	80	
12	5.53	5.688	80	
13	5.53	5.717	80	
14	5.53	5.636	80	
15	5.53	5.327	80	
16	5.53	5.615	80	
17	5.53	5.456	80	
18	5.53	5.251	80	
19	5.53	5.625	80	
20	5.53	5.383	80	
21	5.53	5.69	80	
22	5.53	5.322	80	
23	5.53	5.697	80	

TYPE 6 PARAMETER SHEET

Trial Number : 13

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.674	80	
2	5.53	5.422	80	
3	5.53	5.352	80	
4	5.53	5.618	80	
5	5.53	5.671	80	
6	5.53	5.694	80	
7	5.53	5.415	80	
8	5.53	5.413	80	
9	5.53	5.515	80	*
10	5.53	5.632	80	
11	5.53	5.524	80	*
12	5.53	5.562	80	*
13	5.53	5.615	80	
14	5.53	5.537	80	*
15	5.53	5.294	80	
16	5.53	5.538	80	*
17	5.53	5.344	80	
18	5.53	5.663	80	
19	5.53	5.433	80	
20	5.53	5.55	80	*
21	5.53	5.607	80	
22	5.53	5.371	80	
23	5.53	5.665	80	

TYPE 6 PARAMETER SHEET

Trial Number : 14

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.477	80	
2	5.53	5.586	80	
3	5.53	5.595	80	
4	5.53	5.584	80	
5	5.53	5.341	80	
6	5.53	5.529	80	*
7	5.53	5.326	80	
8	5.53	5.71	80	
9	5.53	5.296	80	
10	5.53	5.677	80	
11	5.53	5.711	80	
12	5.53	5.545	80	*
13	5.53	5.633	80	
14	5.53	5.35	80	
15	5.53	5.372	80	
16	5.53	5.552	80	*
17	5.53	5.347	80	
18	5.53	5.286	80	
19	5.53	5.577	80	
20	5.53	5.258	80	
21	5.53	5.506	80	*
22	5.53	5.359	80	
23	5.53	5.304	80	

TYPE 6 PARAMETER SHEET

Trial Number : 15

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.67	80	
2	5.53	5.6	80	
3	5.53	5.631	80	
4	5.53	5.596	80	
5	5.53	5.658	80	
6	5.53	5.266	80	
7	5.53	5.405	80	
8	5.53	5.68	80	
9	5.53	5.479	80	
10	5.53	5.554	80	*
11	5.53	5.568	80	*
12	5.53	5.491	80	*
13	5.53	5.643	80	
14	5.53	5.627	80	
15	5.53	5.72	80	
16	5.53	5.392	80	
17	5.53	5.503	80	*
18	5.53	5.369	80	
19	5.53	5.301	80	
20	5.53	5.671	80	
21	5.53	5.675	80	
22	5.53	5.517	80	*
23	5.53	5.7	80	

TYPE 6 PARAMETER SHEET

Trial Number : 16

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.296	80	
2	5.53	5.571	80	
3	5.53	5.524	80	*
4	5.53	5.542	80	*
5	5.53	5.665	80	
6	5.53	5.299	80	
7	5.53	5.284	80	
8	5.53	5.613	80	
9	5.53	5.326	80	
10	5.53	5.668	80	
11	5.53	5.302	80	
12	5.53	5.36	80	
13	5.53	5.346	80	
14	5.53	5.303	80	
15	5.53	5.565	80	*
16	5.53	5.47	80	
17	5.53	5.693	80	
18	5.53	5.72	80	
19	5.53	5.473	80	
20	5.53	5.443	80	
21	5.53	5.715	80	
22	5.53	5.654	80	
23	5.53	5.656	80	

TYPE 6 PARAMETER SHEET

Trial Number : 17

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.337	80	
2	5.53	5.595	80	
3	5.53	5.593	80	
4	5.53	5.523	80	*
5	5.53	5.3	80	
6	5.53	5.482	80	
7	5.53	5.538	80	*
8	5.53	5.655	80	
9	5.53	5.716	80	
10	5.53	5.513	80	*
11	5.53	5.72	80	
12	5.53	5.348	80	
13	5.53	5.546	80	*
14	5.53	5.577	80	
15	5.53	5.636	80	
16	5.53	5.558	80	*
17	5.53	5.496	80	*
18	5.53	5.458	80	
19	5.53	5.414	80	
20	5.53	5.518	80	*
21	5.53	5.404	80	
22	5.53	5.601	80	
23	5.53	5.509	80	*

TYPE 6 PARAMETER SHEET

Trial Number : 18

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.388	80	
2	5.53	5.683	80	
3	5.53	5.475	80	
4	5.53	5.437	80	
5	5.53	5.684	80	
6	5.53	5.319	80	
7	5.53	5.675	80	
8	5.53	5.603	80	
9	5.53	5.659	80	
10	5.53	5.503	80	*
11	5.53	5.531	80	*
12	5.53	5.538	80	*
13	5.53	5.584	80	
14	5.53	5.363	80	
15	5.53	5.57	80	*
16	5.53	5.316	80	
17	5.53	5.288	80	
18	5.53	5.32	80	
19	5.53	5.406	80	
20	5.53	5.611	80	
21	5.53	5.617	80	
22	5.53	5.517	80	*
23	5.53	5.588	80	

TYPE 6 PARAMETER SHEET

Trial Number : 19

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.327	80	
2	5.53	5.714	80	
3	5.53	5.487	80	
4	5.53	5.257	80	
5	5.53	5.581	80	
6	5.53	5.425	80	
7	5.53	5.335	80	
8	5.53	5.288	80	
9	5.53	5.607	80	
10	5.53	5.545	80	*
11	5.53	5.268	80	
12	5.53	5.507	80	*
13	5.53	5.473	80	
14	5.53	5.602	80	
15	5.53	5.681	80	
16	5.53	5.395	80	
17	5.53	5.459	80	
18	5.53	5.557	80	*
19	5.53	5.456	80	
20	5.53	5.476	80	
21	5.53	5.326	80	
22	5.53	5.373	80	
23	5.53	5.566	80	*

TYPE 6 PARAMETER SHEET

Trial Number : 20

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.355	80	
2	5.53	5.528	80	*
3	5.53	5.635	80	
4	5.53	5.48	80	
5	5.53	5.468	80	
6	5.53	5.701	80	
7	5.53	5.694	80	
8	5.53	5.695	80	
9	5.53	5.72	80	
10	5.53	5.497	80	*
11	5.53	5.268	80	
12	5.53	5.5	80	*
13	5.53	5.271	80	
14	5.53	5.65	80	
15	5.53	5.367	80	
16	5.53	5.519	80	*
17	5.53	5.71	80	
18	5.53	5.518	80	*
19	5.53	5.661	80	
20	5.53	5.401	80	
21	5.53	5.716	80	
22	5.53	5.622	80	
23	5.53	5.263	80	

TYPE 6 PARAMETER SHEET

Trial Number : 21

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.679	80	
2	5.53	5.504	80	*
3	5.53	5.388	80	
4	5.53	5.409	80	
5	5.53	5.704	80	
6	5.53	5.282	80	
7	5.53	5.512	80	*
8	5.53	5.418	80	
9	5.53	5.713	80	
10	5.53	5.654	80	
11	5.53	5.536	80	*
12	5.53	5.478	80	
13	5.53	5.639	80	
14	5.53	5.497	80	*
15	5.53	5.665	80	
16	5.53	5.7	80	
17	5.53	5.262	80	
18	5.53	5.449	80	
19	5.53	5.573	80	
20	5.53	5.687	80	
21	5.53	5.427	80	
22	5.53	5.374	80	
23	5.53	5.251	80	

TYPE 6 PARAMETER SHEET

Trial Number : 22

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.589	80	
2	5.53	5.418	80	
3	5.53	5.689	80	
4	5.53	5.286	80	
5	5.53	5.458	80	
6	5.53	5.525	80	*
7	5.53	5.263	80	
8	5.53	5.619	80	
9	5.53	5.289	80	
10	5.53	5.668	80	
11	5.53	5.592	80	
12	5.53	5.577	80	
13	5.53	5.501	80	*
14	5.53	5.721	80	
15	5.53	5.502	80	*
16	5.53	5.401	80	
17	5.53	5.33	80	
18	5.53	5.442	80	
19	5.53	5.404	80	
20	5.53	5.624	80	
21	5.53	5.359	80	
22	5.53	5.419	80	
23	5.53	5.433	80	

TYPE 6 PARAMETER SHEET

Trial Number : 23

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.621	80	
2	5.53	5.478	80	
3	5.53	5.706	80	
4	5.53	5.303	80	
5	5.53	5.586	80	
6	5.53	5.408	80	
7	5.53	5.361	80	
8	5.53	5.694	80	
9	5.53	5.609	80	
10	5.53	5.339	80	
11	5.53	5.255	80	
12	5.53	5.588	80	
13	5.53	5.307	80	
14	5.53	5.367	80	
15	5.53	5.28	80	
16	5.53	5.515	80	*
17	5.53	5.575	80	
18	5.53	5.518	80	*
19	5.53	5.593	80	
20	5.53	5.499	80	*
21	5.53	5.488	80	
22	5.53	5.288	80	
23	5.53	5.378	80	

TYPE 6 PARAMETER SHEET

Trial Number : 24

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.279	80	
2	5.53	5.673	80	
3	5.53	5.708	80	
4	5.53	5.586	80	
5	5.53	5.251	80	
6	5.53	5.397	80	
7	5.53	5.264	80	
8	5.53	5.349	80	
9	5.53	5.32	80	
10	5.53	5.289	80	
11	5.53	5.425	80	
12	5.53	5.439	80	
13	5.53	5.567	80	*
14	5.53	5.387	80	
15	5.53	5.611	80	
16	5.53	5.48	80	
17	5.53	5.26	80	
18	5.53	5.335	80	
19	5.53	5.522	80	*
20	5.53	5.453	80	
21	5.53	5.365	80	
22	5.53	5.407	80	
23	5.53	5.378	80	

TYPE 6 PARAMETER SHEET

Trial Number : 25

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.634	80	
2	5.53	5.401	80	
3	5.53	5.382	80	
4	5.53	5.275	80	
5	5.53	5.379	80	
6	5.53	5.403	80	
7	5.53	5.459	80	
8	5.53	5.724	80	
9	5.53	5.26	80	
10	5.53	5.543	80	*
11	5.53	5.371	80	
12	5.53	5.669	80	
13	5.53	5.363	80	
14	5.53	5.307	80	
15	5.53	5.578	80	
16	5.53	5.502	80	*
17	5.53	5.5	80	*
18	5.53	5.294	80	
19	5.53	5.301	80	
20	5.53	5.544	80	*
21	5.53	5.537	80	*
22	5.53	5.451	80	
23	5.53	5.296	80	

TYPE 6 PARAMETER SHEET

Trial Number : 26

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.297	80	
2	5.53	5.623	80	
3	5.53	5.565	80	*
4	5.53	5.622	80	
5	5.53	5.438	80	
6	5.53	5.283	80	
7	5.53	5.668	80	
8	5.53	5.313	80	
9	5.53	5.724	80	
10	5.53	5.315	80	
11	5.53	5.479	80	
12	5.53	5.265	80	
13	5.53	5.685	80	
14	5.53	5.274	80	
15	5.53	5.284	80	
16	5.53	5.57	80	*
17	5.53	5.652	80	
18	5.53	5.524	80	*
19	5.53	5.696	80	
20	5.53	5.391	80	
21	5.53	5.602	80	
22	5.53	5.433	80	
23	5.53	5.359	80	

TYPE 6 PARAMETER SHEET

Trial Number : 27

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.491	80	*
2	5.53	5.633	80	
3	5.53	5.329	80	
4	5.53	5.719	80	
5	5.53	5.564	80	*
6	5.53	5.413	80	
7	5.53	5.666	80	
8	5.53	5.454	80	
9	5.53	5.369	80	
10	5.53	5.525	80	*
11	5.53	5.644	80	
12	5.53	5.338	80	
13	5.53	5.416	80	
14	5.53	5.451	80	
15	5.53	5.305	80	
16	5.53	5.256	80	
17	5.53	5.289	80	
18	5.53	5.419	80	
19	5.53	5.559	80	*
20	5.53	5.448	80	
21	5.53	5.625	80	
22	5.53	5.447	80	
23	5.53	5.397	80	

TYPE 6 PARAMETER SHEET

Trial Number : 28

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.702	80	
2	5.53	5.545	80	*
3	5.53	5.311	80	
4	5.53	5.367	80	
5	5.53	5.678	80	
6	5.53	5.351	80	
7	5.53	5.461	80	
8	5.53	5.554	80	*
9	5.53	5.663	80	
10	5.53	5.709	80	
11	5.53	5.46	80	
12	5.53	5.315	80	
13	5.53	5.666	80	
14	5.53	5.533	80	*
15	5.53	5.67	80	
16	5.53	5.712	80	
17	5.53	5.504	80	*
18	5.53	5.378	80	
19	5.53	5.407	80	
20	5.53	5.328	80	
21	5.53	5.475	80	
22	5.53	5.486	80	
23	5.53	5.426	80	

TYPE 6 PARAMETER SHEET

Trial Number : 29

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.408	80	
2	5.53	5.602	80	
3	5.53	5.68	80	
4	5.53	5.458	80	
5	5.53	5.549	80	*
6	5.53	5.714	80	
7	5.53	5.341	80	
8	5.53	5.564	80	*
9	5.53	5.616	80	
10	5.53	5.586	80	
11	5.53	5.387	80	
12	5.53	5.708	80	
13	5.53	5.49	80	*
14	5.53	5.62	80	
15	5.53	5.364	80	
16	5.53	5.506	80	*
17	5.53	5.696	80	
18	5.53	5.278	80	
19	5.53	5.547	80	*
20	5.53	5.257	80	
21	5.53	5.635	80	
22	5.53	5.422	80	
23	5.53	5.724	80	

TYPE 6 PARAMETER SHEET

Trial Number : 30

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.329	80	
2	5.53	5.399	80	
3	5.53	5.418	80	
4	5.53	5.647	80	
5	5.53	5.686	80	
6	5.53	5.275	80	
7	5.53	5.609	80	
8	5.53	5.457	80	
9	5.53	5.592	80	
10	5.53	5.324	80	
11	5.53	5.469	80	
12	5.53	5.277	80	
13	5.53	5.472	80	
14	5.53	5.357	80	
15	5.53	5.621	80	
16	5.53	5.257	80	
17	5.53	5.417	80	
18	5.53	5.69	80	
19	5.53	5.41	80	
20	5.53	5.438	80	
21	5.53	5.694	80	
22	5.53	5.716	80	
23	5.53	5.484	80	