



# **FCC TEST REPORT**

On Behalf of

Shenzhen Wanfengda Electronics Co., Ltd.

Bluetooth Speakers

Model No.: B210D

**FCC ID: SLF-B210D**

Prepared for : Shenzhen Wanfengda Electronics Co., Ltd.  
Address : 2F, Building 1, Hezhou Yuye Industrial Zone, Xixiang, Bao'an,  
Shenzhen.

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building B, East Area of Nanchang Second Industrial Zone,  
Gushu 2<sup>nd</sup> Road, Bao'an District, Shenzhen 518126, P.R. China

Report Number : T1870614 07  
Date of Receipt : April 17, 2017  
Date of Test : April 17, 2017– May 10, 2017  
Date of Report : May 10, 2017  
Version Number : REV0

## TABLE OF CONTENTS

Description	Page
<b>1. Summary of Standards And Results.....</b>	<b>5</b>
1.1. Description of Standards and Results .....	5
<b>2. General Information .....</b>	<b>6</b>
2.1. Description of Device (EUT).....	6
2.2. Tested Supporting System Details .....	7
2.3. Block Diagram of connection between EUT and simulators.....	7
2.4. Test Mode Description.....	7
2.5. Test Conditions .....	8
2.6. Test Facility .....	8
2.7. Measurement Uncertainty .....	8
2.8. Test Equipment List.....	9
<b>3. Power Line Conducted Emission Test.....</b>	<b>10</b>
3.1. Block Diagram of Test Setup.....	10
3.2. Test Limits .....	10
3.3. Configuration of EUT on Test .....	11
3.4. Operating Condition of EUT .....	11
3.5. Test Procedure .....	11
3.6. Test Results .....	12
<b>4. Radiated Emission Test.....</b>	<b>15</b>
4.1. Block Diagram of Test Setup.....	15
4.2. Test Limit.....	16
4.3. Configuration of EUT on Test .....	17
4.4. Operating Condition of EUT .....	17
4.5. Test Procedure .....	17
4.6. Test Results .....	18
<b>5. Band Edge Test.....</b>	<b>24</b>
5.1. Block Diagram of Test Setup.....	24
5.2. Test Limit.....	24
5.3. Configuration of EUT on Test .....	25
5.4. Operating Condition of EUT .....	25
5.5. Test Procedure .....	25
5.6. Test Results .....	27
<b>6. Occupied bandwidth Test .....</b>	<b>28</b>
6.1. Block Diagram of Test Setup.....	28
6.2. Test Limit.....	28
6.3. Test Procedure .....	28
6.4. Test Results .....	28
<b>7. Antenna Requirement.....</b>	<b>31</b>
7.1. Standard Requirement.....	31
7.2. Antenna Connected Construction .....	31

---

7.3. Results.....	31
<b>8. Photograph.....</b>	<b>32</b>
8.1. Photos of Radiated Emission Test (In Semi Anechoic Chamber) .....	32
<b>9. Photos of The EUT .....</b>	<b>34</b>

### TEST REPORT DECLARATION

Applicant : Shenzhen Wanfengda Electronics Co., Ltd.  
 Manufacturer : Shenzhen Wanfengda Electronics Co., Ltd.  
 EUT Description : Bluetooth Speakers

(A) Model No. : B210D  
 (B) Trademark : N/A  
 (C) Ratings : DC 3.7V, DC 5V  
 Supply :  
 (D) Test Voltage : DC 3.7V From battery, DC 5V From USB Port

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.249: 2016, ANSI C63.10:2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part15 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Reak Yang   
 Project Engineer .....

Approved by (name + signature).....: Simple Guan   
 Project Manager .....

Date of issue..... : May 10, 2017

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

<b>EMISSION</b>			
<b>Description of Test Item</b>	<b>Test Requirement</b>	<b>Standard Paragraph</b>	<b>Results</b>
Power Line Conducted Emission Test	FCC Part 15:2016	Section 15.207	<b>P</b>
Spurious Emission Test	FCC Part 15:2016	Section 15.249&15.209	<b>P</b>
Occupied bandwidth	FCC Part 15:2016	Section 15.215	<b>P</b>
Band edge Requirement	FCC Part 15:2016	Section 15.249	<b>P</b>
Antenna Requirement	FCC Part 15:2016	Section 15.203	<b>P</b>
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.			

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Description	: Bluetooth Speakers
Model Number	: B210D
Diff	: N/A
Test Voltage	: DC 3.7V From battery, DC 5V From USB Port
Operation frequency	: 5729MHz-5797MHz
Channel No.	: 16
Channel Separation	: N/A
Modulation type	: GFSK
Data Rate	: 1Mbps
Antenna Type	: PCB Antenna, max gain 0dBi.
Software version	: N/A
Hardware version	: V1.0
Trademark	: N/A
Applicant	: Shenzhen Wanfengda Electronics Co., Ltd.
Address	: 2F, Building 1, Hezhou Yuye Industrial Zone, Xixiang, Bao'an, Shenzhen.
Manufacturer	: Shenzhen Wanfengda Electronics Co., Ltd.
Address	: 2F, Building 1, Hezhou Yuye Industrial Zone, Xixiang, Bao'an, Shenzhen.
Sample Type	: Prototype production

## 2.2. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
1	Notebook PC	ACER	ZQT	N/A	DOC

## 2.3. Block Diagram of connection between EUT and simulators



## 2.4. Test Mode Description

Test mode:

Mode	Channel	Frequency (MHz)
GFSK	CH1	5729
	CH9	5767
	CH16	5797

Note:

1. The test was used to control EUT work in Continuous TX mode, and select test channel, wireless mode
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω , Cable Loss: 1.0 dB

Channel list:

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
CH1	5729	CH7	5756	CH13	5778
CH2	5731	CH8	5760	CH14	5789
CH3	5734	CH9	5767	CH15	5796
CH4	5738	CH10	5771	CH16	5797
CH5	5749	CH11	5773		
CH6	5753	CH12	5774		

## 2.5. Test Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

## 2.6. Test Facility

Shenzhen Alpha Product Testing Co., Ltd.

Building B, East Area of Nanchang Second, Industrial Zone, Gushu 2nd Road,  
Bao'an, Shenzhen, China

March 25, 2015 File on Federal Communication Commission

Registration Number: 203110

July 18, 2014 Certificated by IC

Registration Number: 12135A

## 2.7. Measurement Uncertainty

(95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.71dB
Uncertainty for Radiation Emission test (<1G)	3.90 dB (Distance: 3m Polarize: V)
	3.92 dB (Distance: 3m Polarize: H)
Uncertainty for Radiation Emission test (>1G)	4.26 dB (Distance: 3m Polarize: V)
	4.28 dB (Distance: 3m Polarize: H)
Uncertainty for conducted RF Power	0.16dB




## 2.8. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	CHENYU	N/A	N/A	2016.09.30	2Year
Spectrum analyzer	Agilent	E4407B	MY46185649	2016.09.29	1Year
Signal Analyzer	Agilent	N9020A	MY48030494	2016.09.29	1 Year
Receiver	R&S	ESCI	101165	2016.09.29	1Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2016.09.29	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2016.09.29	1 Year
L.I.S.N.#2	ROHDE&SC HWARZ	ENV216	101043	2016.09.29	1 Year
Bilog Antenna	SCHWARZB ECK	VULB 9168	VULB9168-438	2016.09.30	2Year
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	BBHA 9120 D(1201)	2016.09.30	2Year
Horn Antenna	SCHWARZB ECK	BBHA 9170	BBHA 9170 D(1432)	2016.09.30	2Year
Cable (9KHz-1GHz)	SCHWARZB ECK	N/A	No.2	2016.09.29	1Year
Cable(1GHz- 26.5GHz)	SCHWARZB ECK	N/A	No.3	2016.09.29	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2016.09.29	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2016.09.29	1Year

### 3. POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Block Diagram of Test Setup

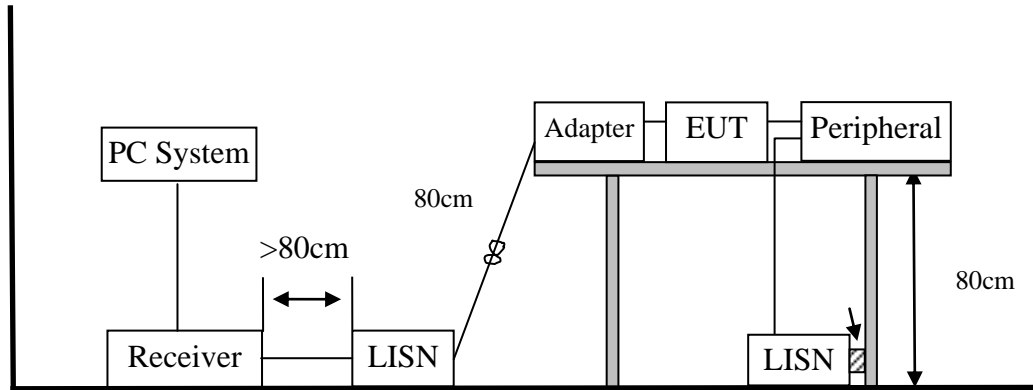

#### 3.2. Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes:
1. Emission level=Read level + LISN factor-Preamp factor + Cable loss
  2. \* Decreasing linearly with logarithm of frequency.
  3. The lower limit shall apply at the transition frequencies.

### 3.3. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

### 3.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 3.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode taking the test.

### 3.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on conducted Emission test.
- (2) The frequency range from 150kHz to 30MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESCI) is set at 9kHz.
- (3) The test results are reported on Section 3.6.

### 3.6. Test Results

EUT	: Bluetooth Speakers	Test Date	: 2017.4.24
M/N	: B210D	Temperature	: 23.6°C
Test Engineer	: Reak Yang	Humidity	: 54%
Test Mode	: Tx 5729MHz		
Test Results	: N/A		
Note: 1. All modes have been tested, and only worse case mode is reported only. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.			


Site: LAB  
 Limit: FCC Part 15 CLASS B QP  
 EUT:  
 M/N:  
 Mode:  
 Note:

Phase: N  
 Power: AC 120V/60Hz

Temperature: 23.6  
 Humidity: 54 %

**Conducted Emission Measurement**

File :2017      Data :#9      Date: 2017-4-24      Time: 16:39:13

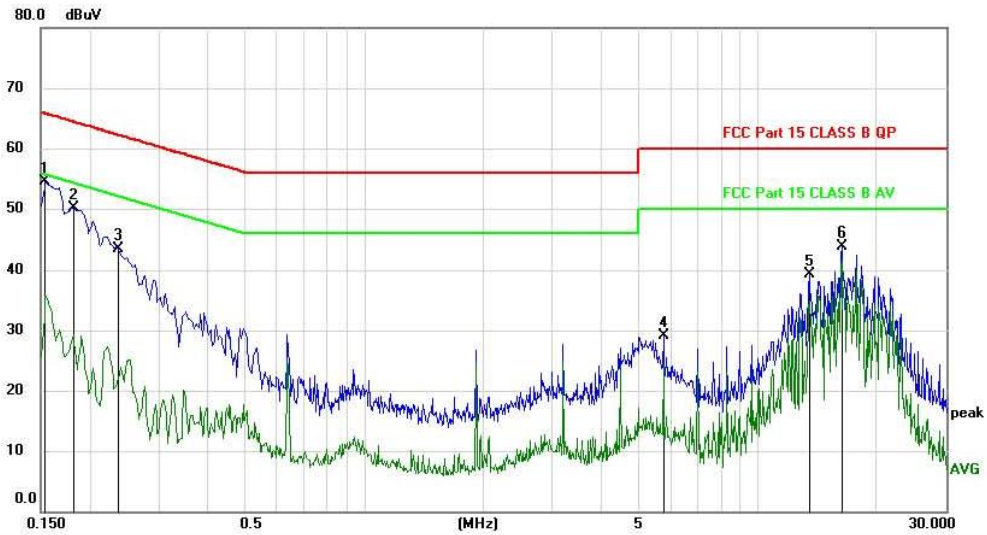

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1545	54.37	0.13	54.50	65.75	-11.25	peak	
2		0.1825	50.03	0.13	50.16	64.37	-14.21	peak	
3		0.2366	43.46	0.13	43.59	62.21	-18.62	peak	
4		5.7525	28.85	0.25	29.10	60.00	-30.90	peak	
5		13.4205	38.82	0.47	39.29	60.00	-20.71	peak	
6		16.2285	43.42	0.53	43.95	60.00	-16.05	peak	

\*:Maximum data    x:Over limit    !:over margin      (Reference Only)  
 Note: Measurement=Reading Level+Correc Factor.    Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable


Site LAB  
 Limit: FCC Part 15 CLASS B QP  
 EUT:  
 M/N:  
 Mode:  
 Note:

Phase: **L1**  
 Power: AC 120V/60Hz

Temperature: 23.6  
 Humidity: 54 %

**Conducted Emission Measurement**

File :2017      Data :#10      Date: 2017-4-24      Time: 16:43:42

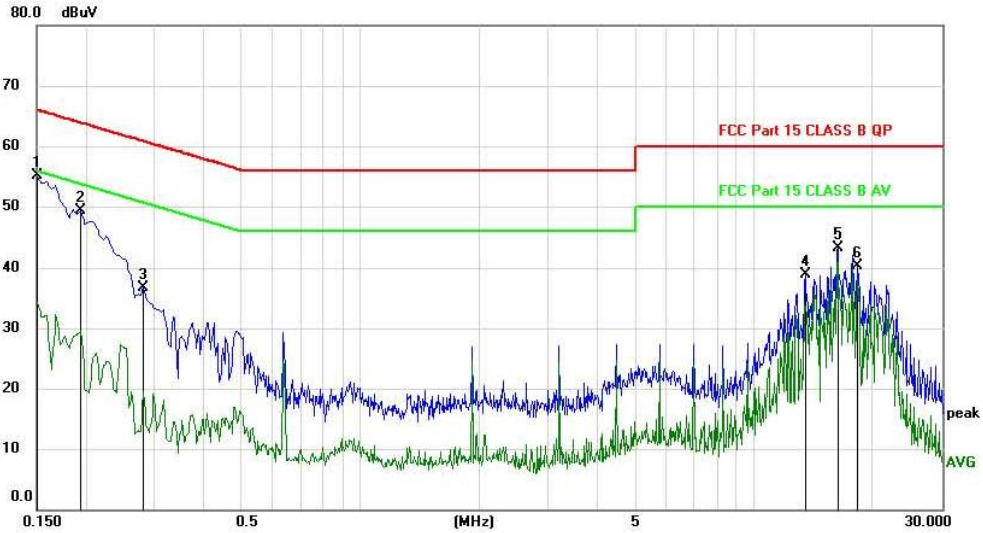


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	55.04	0.13	55.17	66.00	-10.83	peak	
2		0.1949	49.14	0.13	49.27	63.83	-14.56	peak	
3		0.2805	36.55	0.13	36.68	60.80	-24.12	peak	
4		13.4205	38.41	0.47	38.88	60.00	-21.12	peak	
5		16.2285	42.79	0.53	43.32	60.00	-16.68	peak	
6		18.2445	39.64	0.61	40.25	60.00	-19.75	peak	

\*:Maximum data    x:Over limit    !:over margin      (Reference Only)  
 Note: Measurement=Reading Level+Correc Factor,    Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable


## 4. RADIATED EMISSION TEST

### 4.1. Block Diagram of Test Setup


In Semi Anechoic Chamber (3m) Test Setup Diagram for 9KHz~30MHz

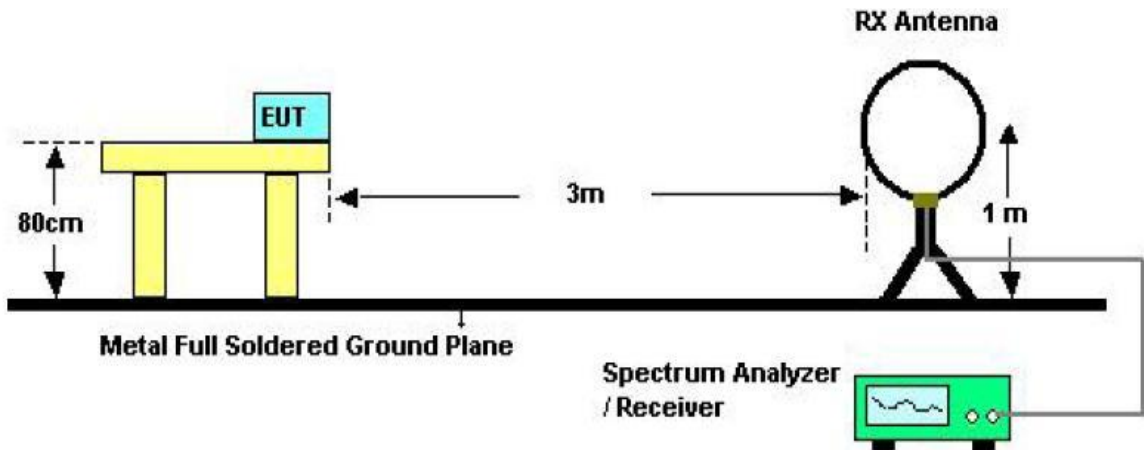

In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

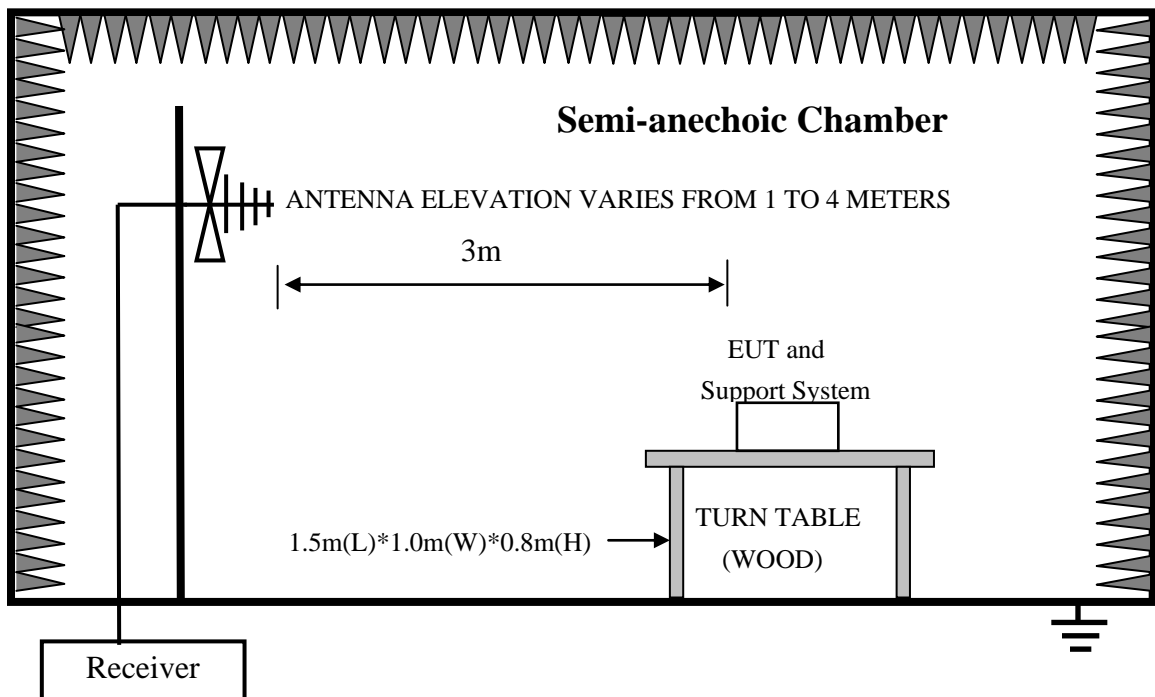

## In Semi Anechoic Chamber (3m) Test Setup Diagram for Above 1GHz

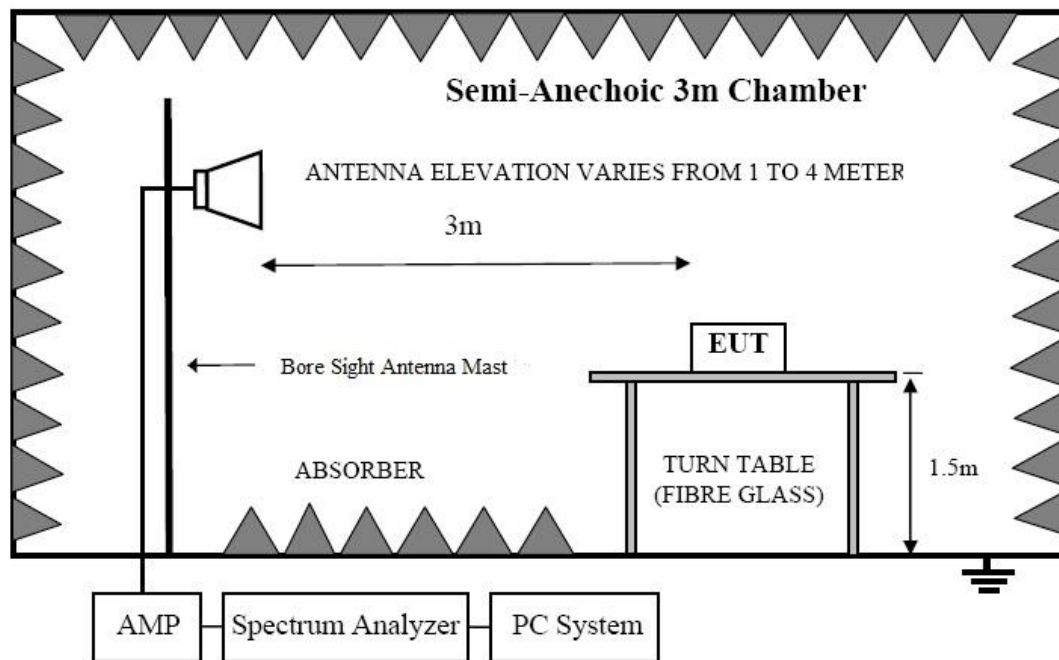

## 4.2. Test Limit

Frequency MHz	Distance (Meters)	Field Strengths Limits	
		uV/m	dB uV/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	----
1.705 ~ 30	30	30	29.5
30 ~ 88	3	100(3nW)	40
88 ~ 216	3	150(6.8nW)	43.5
216 ~ 960	3	200(12nW)	46
Above 960	3	500(75nW)	54
Carrier frequency	3	50000(avg)	113.97(peak) 93.97(avg)

- Notes:
1. Emission level = Read level + Antenna Factor - Preamp Factor + Cable Loss
  2. The smaller limit shall apply at the cross point between two frequency bands.
  3. Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
  4. For frequencies above 1000 MHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



### 4.3. Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

### 4.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 4.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode taking the test.

### 4.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1GHz and 150 cm above the ground plane inside a semi-anechoic chamber for above 1GHz. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10: 2013 on Radiated Emission test.
- (2) For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- (3) Test antenna was located 4m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
  - (a) Change work frequency or channel of device if practicable.
  - (b) Change modulation type of device if practicable.
  - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP

- (5) The frequency range from 9KHz to 150KHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESCI) is set at 200Hz.  
The frequency range from 150KHz to 30MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESCI) is set at 9KHz.  
The frequency range from 30MHz to 1000MHz is checked, the bandwidth of test receiver (R&S TEST RECEIVER ESCI) is set at 120kHz.  
The frequency range from above 1GHz is checked, the bandwidth of Signal Analyzer (Signal Analyzer N9020A) is set at 1MHz.
- (6) The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values, the frequency range from 1GHz to 6GHz was pre-scanned with a peak detector and all final readings of measurement from Spectrum Analyzer are peak and average values checked, all measurement distance is 3m in 3m semi anechoic chamber.
- (7) Test for all x, y, z axes is performed and only the worst case of X axes was recorded in the test report.
- (8) The test results are reported on Section 4.6.

#### 4.6. Test Results

Frequency Range : <b>9KHz~30MHz</b>	
EUT : Bluetooth Speakers	Test Date : 2017.04.28
M/N : B210D	Temperature : 24°C
Test Engineer : Reak Yang	Humidity : 56%
Test Mode : TX CH1	
Test Results : <b>PASS</b>	
Note: 1. Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.	

Frequency Range : <b>30MHz~1000MHz</b>	
EUT : Bluetooth Speakers	Test Date : 2017.04.28
M/N : B210D	Temperature : 24°C
Test Engineer : Reak Yang	Humidity : 56%
Test Mode : TX CH1	
Test Results : <b>PASS</b>	
Note: 1. The test results are listed in next pages. 2. All modes have been tested, and only worst data of GFSK mode, Channel 5729MHz was listed in this report. 3. This mode is worst case mode, and this report only reflected the worst mode. 4. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.	

Site: LAB 966-2 Chamber  
 Limit: FCC Class B Radiation  
 EUT:  
 M/N:  
 Mode:  
 Note:

Polarization: **Horizontal**  
 Power: AC 120V/60Hz  
 Distance:


Temperature: 24.9  
 Humidity: 49 %

Engineer Signature:

**Radiated Emission Measurement**

Data :#6

Time: 16:21:47

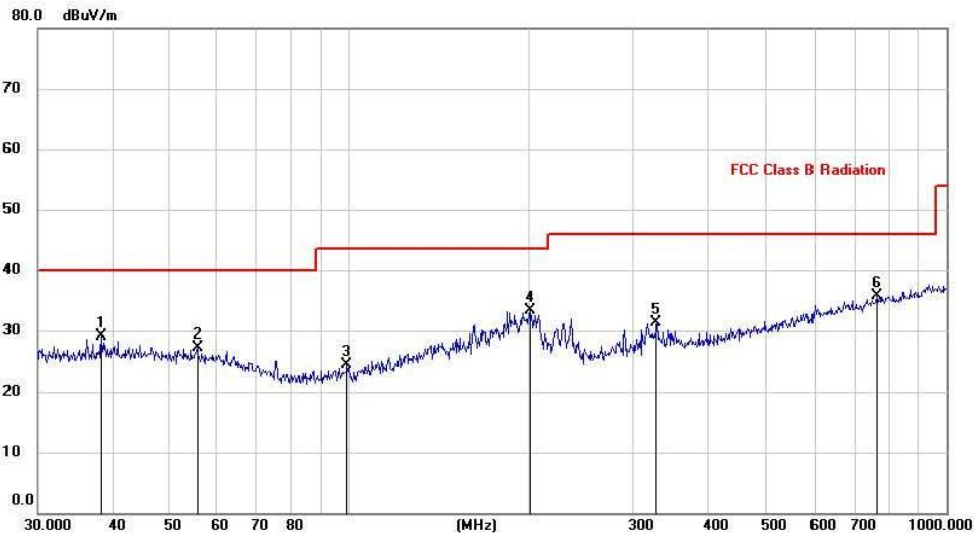

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		38.3462	15.10	13.95	29.05	40.00	-10.95	peak		
2		55.6094	14.05	13.24	27.29	40.00	-12.71	peak		
3		99.1797	13.88	10.54	24.42	43.50	-19.08	peak		
4	*	200.6880	22.98	10.35	33.33	43.50	-10.17	peak		
5		327.8872	17.08	14.19	31.27	46.00	-14.73	peak		
6		763.3757	13.82	21.81	35.63	46.00	-10.37	peak		

Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Site: LAB 966-2 Chamber  
 Limit: FCC Class B Radiation  
 EUT:  
 MN:  
 Mode:  
 Note:

Polarization: **Vertical**  
 Power: AC 120V/60Hz  
 Distance:


Temperature: 24.9  
 Humidity: 49 %

Engineer Signature:

**Radiated Emission Measurement**

Data :#5

Time: 16:20:30

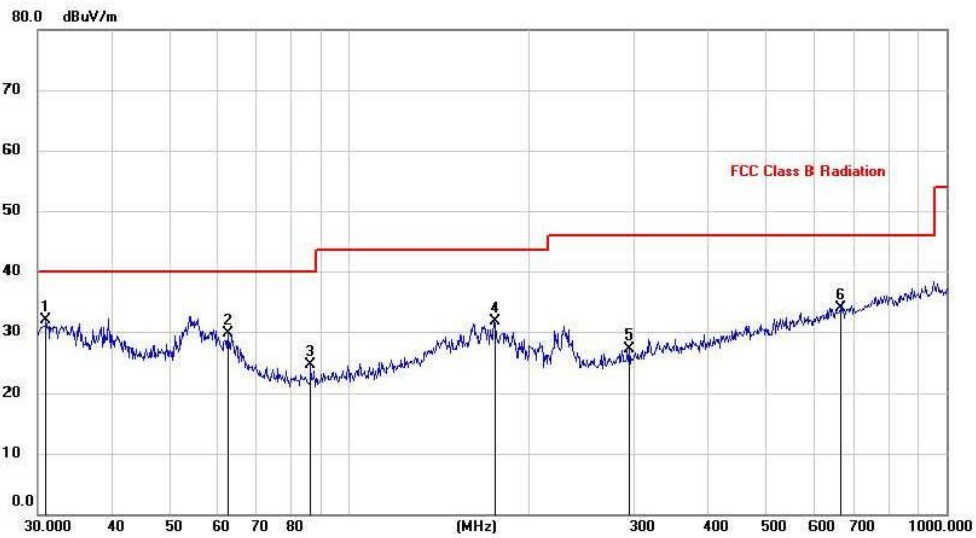

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	30.9618	18.57	13.35	31.92	40.00	-8.08			peak	
2		62.8707	17.51	12.24	29.75	40.00	-10.25			peak	
3		86.5027	14.91	9.72	24.63	40.00	-15.37			peak	
4		175.0367	18.80	12.95	31.75	43.50	-11.75			peak	
5		294.1137	14.04	13.27	27.31	46.00	-18.69			peak	
6		665.8034	13.58	20.36	33.94	46.00	-12.06			peak	

Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Frequency Range : <b>1GHz~25GHz</b>								
EUT : Bluetooth Speakers						Test Date : 2017.04.28		
M/N : B210D						Temperature : 24°C		
Test Engineer : Reak Yang						Humidity : 56%		
Test Mode : TX 5729MHz								
Test Results : <b>PASS</b>								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	5729	H	99.62	6.38	106.00	113.97	-7.97	Peak
2	5729	H	81.58	6.38	87.96	93.97	-6.01	Avg
3	11458	H	44.21	13.23	57.44	74	-16.56	Peak
4	11458	H	25.83	13.23	39.06	54	-14.94	Avg
5	17187	H	40.73	20.57	61.30	74	-12.70	Peak
6	17187	H	21.36	20.57	41.93	54	-12.07	Avg
1	5729	V	102.62	6.38	109.00	113.97	-4.97	Peak
2	5729	V	83.58	6.38	89.96	93.97	-4.01	Avg
3	11458	V	43.57	13.23	56.80	74	-17.20	Peak
4	11458	V	25.25	13.23	38.48	54	-15.52	Avg
5	17187	V	40.46	20.57	61.03	74	-12.97	Peak
6	17187	V	21.05	20.57	41.62	54	-12.38	Avg
Note:	<p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.</p> <p>3. Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK.</p> <p>4. Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: Avg.</p> <p>5. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p> <p>6. For fundamental frequency, RBW=4MHz, VBW =4MHz Sweep time=Auto, Detector: Avg for AV value , Detector :PK for PK value</p>							

Frequency Range : <b>1GHz~25GHz</b>								
EUT : Bluetooth Speakers						Test Date : 2017.04.28		
M/N : B210D						Temperature : 24°C		
Test Engineer : Reak Yang						Humidity : 56%		
Test Mode : TX 5767MHz								
Test Results : <b>PASS</b>								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	5767	H	96.37	6.38	102.75	113.97	-11.22	Peak
2	5767	H	77.33	6.38	83.71	93.97	-10.26	Avg
3	11534	H	45.17	13.23	58.40	74	-15.60	Peak
4	11534	H	27.33	13.23	40.56	54	-13.44	Avg
5	17301	H	40.96	20.57	61.53	74	-12.47	Peak
6	17301	H	21.68	20.57	42.25	54	-11.75	Avg
1	5767	V	99.71	6.38	106.09	113.97	-7.88	Peak
2	5767	V	80.57	6.38	86.95	93.97	-7.02	Avg
3	11534	V	42.82	13.23	56.05	74	-17.95	Peak
4	11534	V	23.67	13.23	36.90	54	-17.10	Avg
5	17301	V	40.34	20.57	60.91	74	-13.09	Peak
6	17301	V	21.51	20.57	42.08	54	-11.92	Avg
Note:	<p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.</p> <p>3. Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK.</p> <p>4. Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: Avg.</p> <p>5. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p> <p>6. For fundamental frequency, RBW=4MHz, VBW =4MHz Sweep time=Auto, Detector: Avg for AV value , Detector :PK for PK value</p>							

Frequency Range : <b>1GHz~25GHz</b>								
EUT : Bluetooth Speakers					Test Date : 2017.04.28			
M/N : B210D					Temperature : 24°C			
Test Engineer : Reak Yang					Humidity : 56%			
Test Mode : TX 5797MHz								
Test Results : <b>PASS</b>								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	5797	H	94.25	6.38	100.63	113.97	-13.34	Peak
2	5797	H	75.63	6.38	82.01	93.97	-11.96	Avg
3	11594	H	44.72	13.23	57.95	74	-16.05	Peak
4	11594	H	25.21	13.23	38.44	54	-15.56	Avg
5	17391	H	41.35	20.57	61.92	74	-12.08	Peak
6	17391	H	22.03	20.57	42.60	54	-11.40	Avg
1	5767	V	97.46	6.38	103.84	113.97	-10.13	Peak
2	5767	V	77.72	6.38	84.10	93.97	-9.87	Avg
3	11534	V	42.75	13.23	55.98	74	-18.02	Peak
4	11534	V	23.31	13.23	36.54	54	-17.46	Avg
5	17301	V	40.58	20.57	61.15	74	-12.85	Peak
6	17301	V	21.12	20.57	41.69	54	-12.31	Avg
Note:	<p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.</p> <p>3. Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK.</p> <p>4. Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz,Sweep time=Auto, Detector: Avg.</p> <p>5. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p> <p>6. For fundamental frequency, RBW=4MHz, VBW =4MHz Sweep time=Auto, Detector: Avg for AV value , Detector :PK for PK value</p>							

## 5. BAND EDGE TEST

### 5.1. Block Diagram of Test Setup

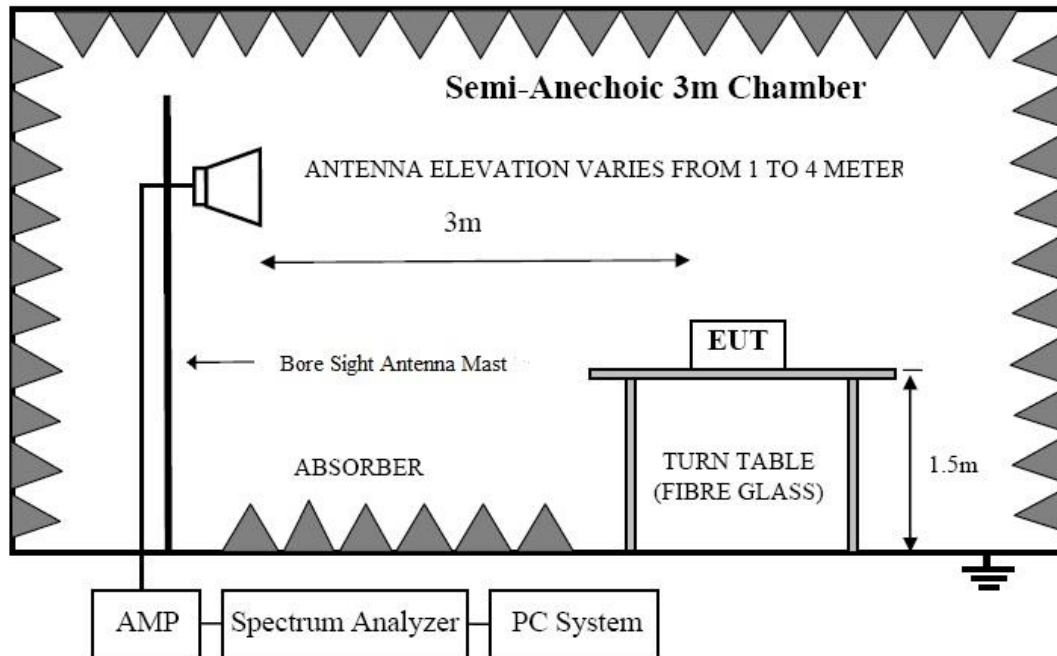

### 5.2. Test Limit

Please refer section 15.249 and section 15.205.

249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lesser attenuation.

249(e) As shown in section 15.35(b), for frequencies above 1000MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.



### 5.3. Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

### 5.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 5.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode taking the test.

### 5.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 150 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10: 2013 on Radiated Emission test.
- (2) For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- (3) Test antenna was located 4m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
  - (a) Change work frequency or channel of device if practicable.
  - (b) Change modulation type of device if practicable.
  - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions


- (5) The frequency range from above 1GHz is checked, the bandwidth of Signal Analyzer (Signal Analyzer N9020A) is set at 1MHz.
- (6) The frequency range from 1GHz to 6GHz was pre-scanned with a peak detector and all final readings of measurement from Spectrum Analyzer are peak and average values checked, all measurement distance is 3m in 3m semi anechoic chamber.
- (7) Test for all x, y, z axes is performed and only the worst case of X axes was recorded in the test report.
- (8) The test results are reported on Section 5.6.

## 5.6. Test Results

EUT : Bluetooth Speakers					Test Date : 2017.04.28			
M/N : B210D					Temperature : 24°C			
Test Engineer : Reak Yang					Humidity : 56%			
Test Mode : TX 5729MHz								
Test Results : <b>PASS</b>								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	5725	H	40.18	6.38	46.56	74	-27.44	Peak
2	5725	H	--	6.38	--	54	--	Avg
3	--	--	--	--	--	--	--	--
4	--	--	--	--	--	--	--	--
1	5725	V	40.73	6.38	47.11	74	-26.89	Peak
2	5725	V	--	6.38	--	54	--	Avg
3	--	--	--	--	--	--	--	--
4	--	--	--	--	--	--	--	--
Test Mode : TX 5797MHz								
Test Results : <b>PASS</b>								
1	5875	H	45.72	7.02	52.74	74	-21.26	Peak
2	5875	H	--	7.02	--	54	--	Avg
1	5875	V	45.69	7.02	52.71	74	-21.29	Peak
2	5875	V	--	7.02	--	54	--	Avg
Note:	<p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit.</p> <p>3. Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK.</p> <p>4. Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: Avg.</p> <p>5. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p>							

## 6. OCCUPIED BANDWIDTH TEST

### 6.1. Block Diagram of Test Setup



### 6.2. Test Limit

Please refer section 15.249 and section 15.205.


### 6.3. Test Procedure

- (1) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- (2) The test receiver RBW set 30KHz, VBW set 100KHz, Sweep time set auto.


### 6.4. Test Results

EUT	: Bluetooth Speakers	Test Date	: 2017.04.28	
M/N	: B210D	Temperature	: 24°C	
Test Engineer	: Reak Yang	Humidity	: 56%	
Test Mode	: TX			
Test Results	: <b>PASS</b>			
Mode	Frequency (MHz)	20dB Bandwidth (KHz)	99% Bandwidth (KHz)	Limit (kHz)
GFSK	5729	3423	3193.1	/
	5767	3395	3236.5	/
	5797	3427	3271.4	/
Note: 1. The test results are listed in next pages.				


Frequency: 5729MHz

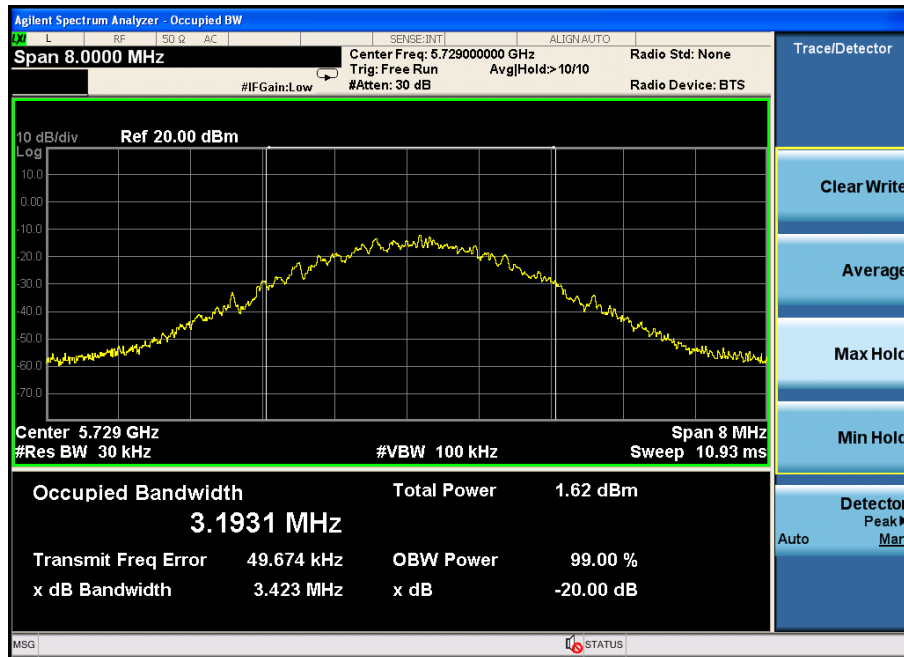

Frequency: 5767MHz

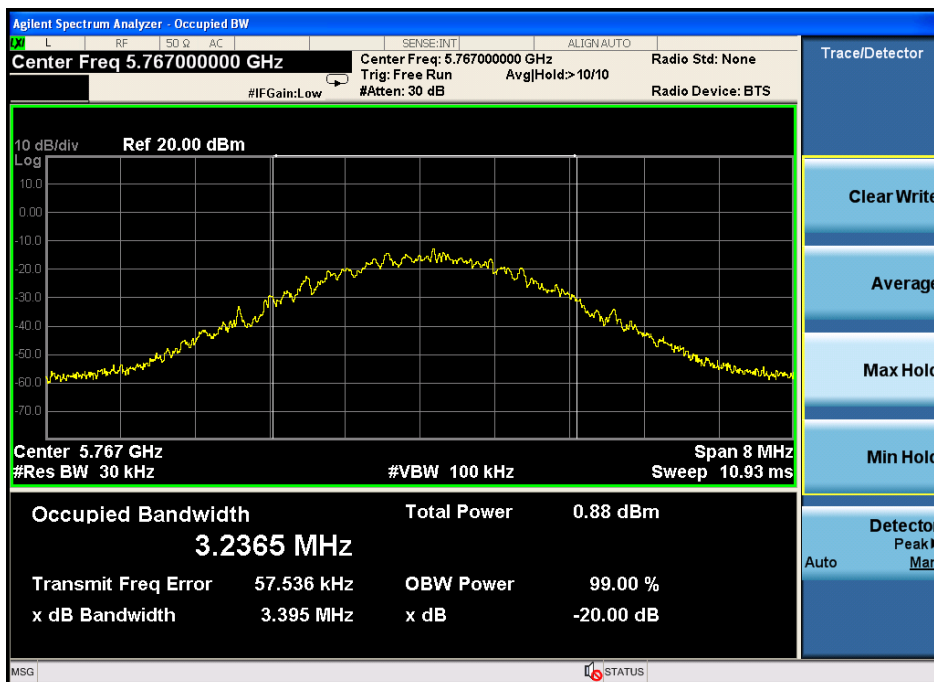

Frequency: 5797MHz

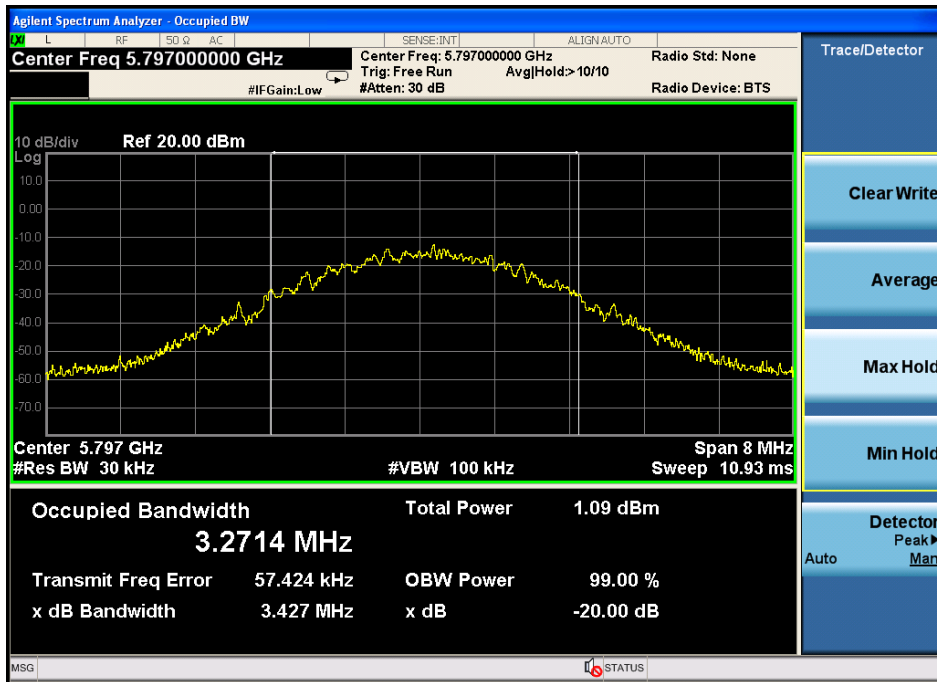

## **7. ANTENNA REQUIREMENT**

### **7.1. Standard Requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **7.2. Antenna Connected Construction**



The directional gains of antenna used for transmitting is 0 dBi, and the antenna is PCB antenna no consideration of replacement. Please see EUT photo for details.

### **7.3. Results**

The EUT antenna is PCB Antenna. It comply with the standard requirement.

## 8. PHOTOGRAPH

### 8.1.Photos of Radiated Emission Test (In Semi Anechoic Chamber)

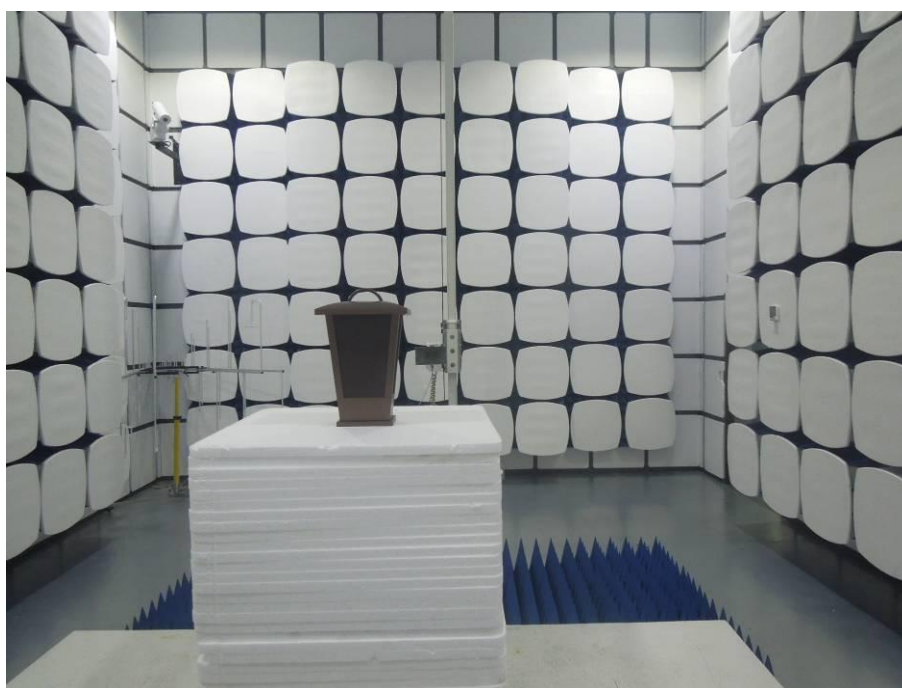
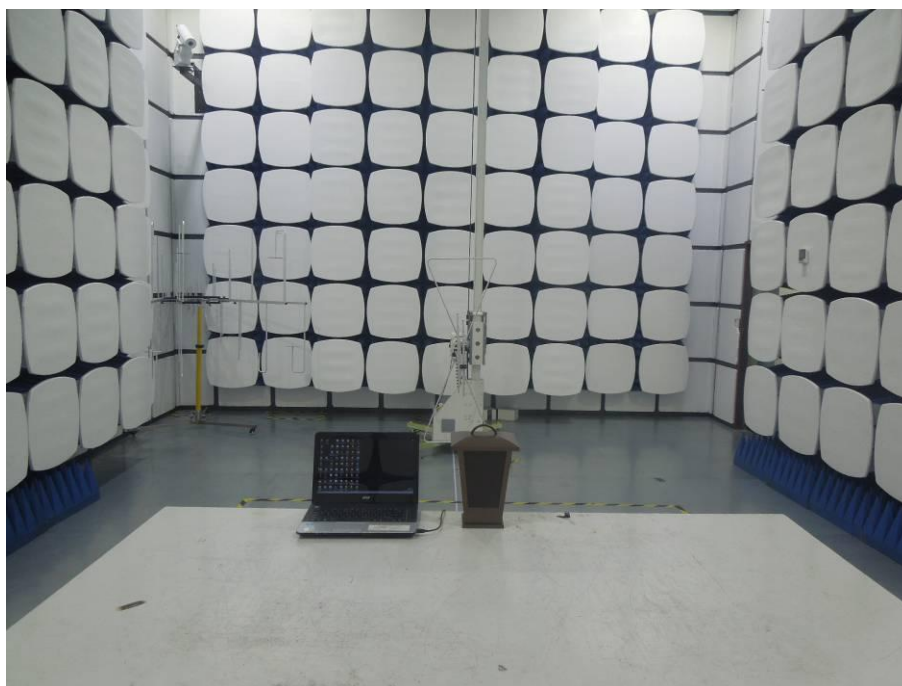







8.2.Photos of Conducted Emission test





## 9. PHOTOS OF THE EUT

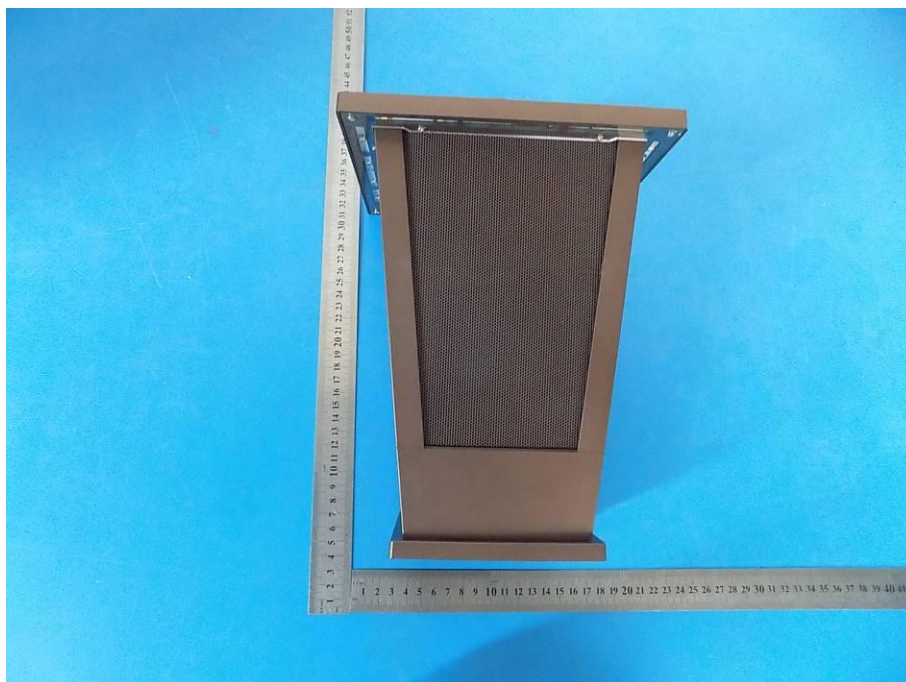
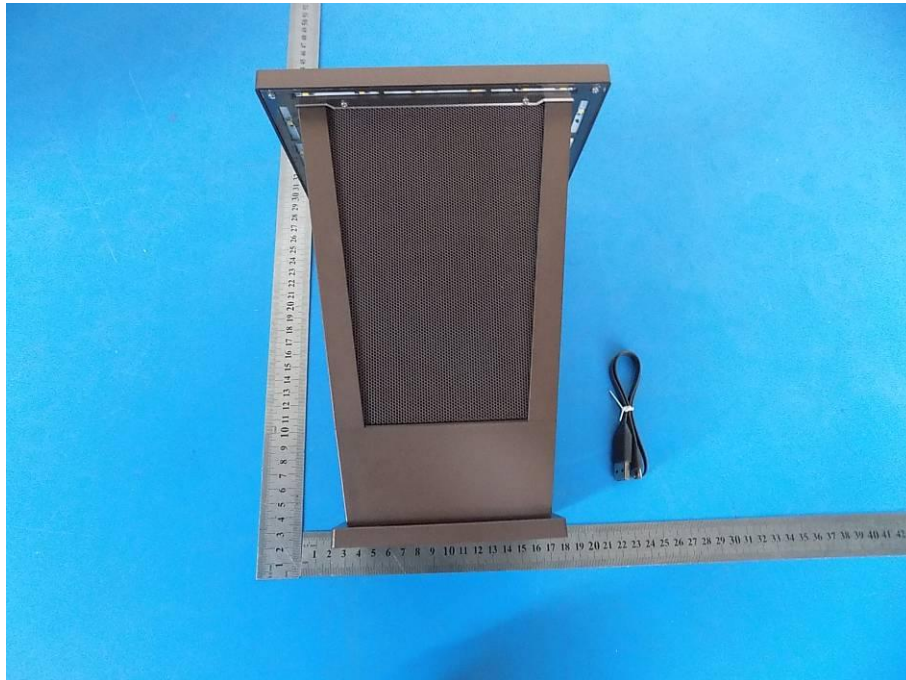



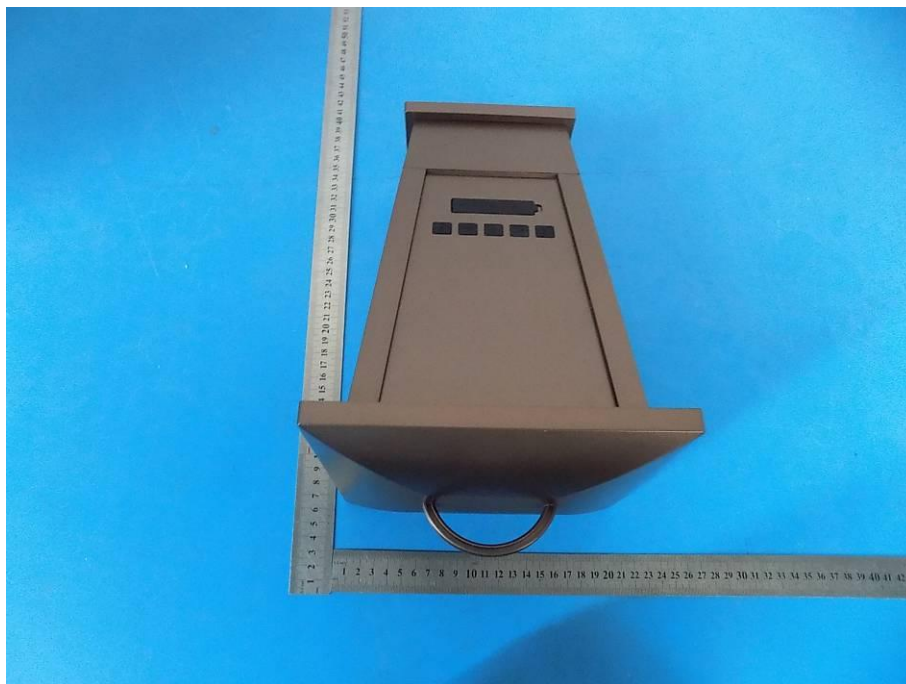


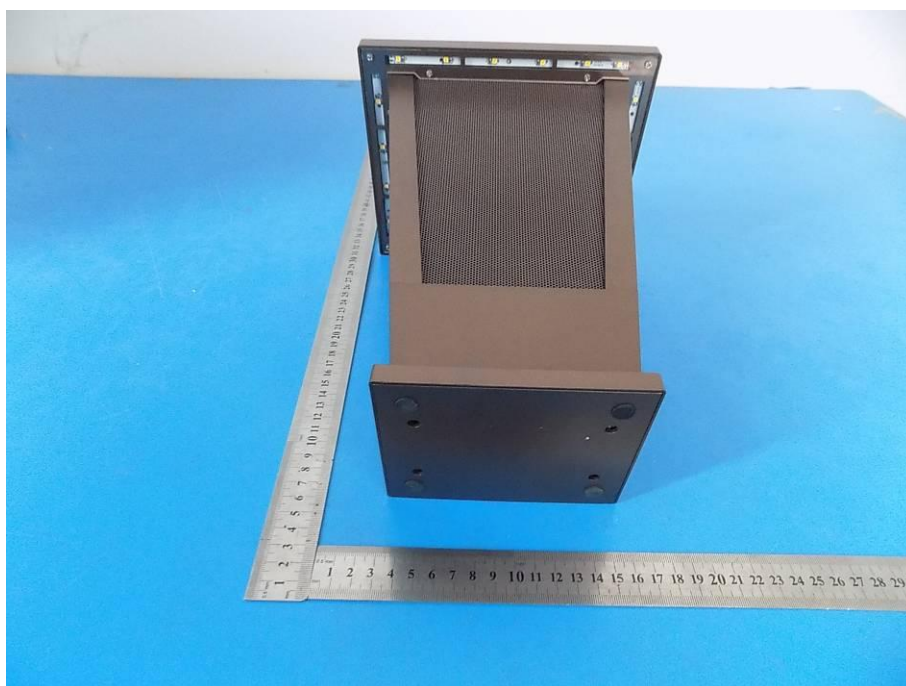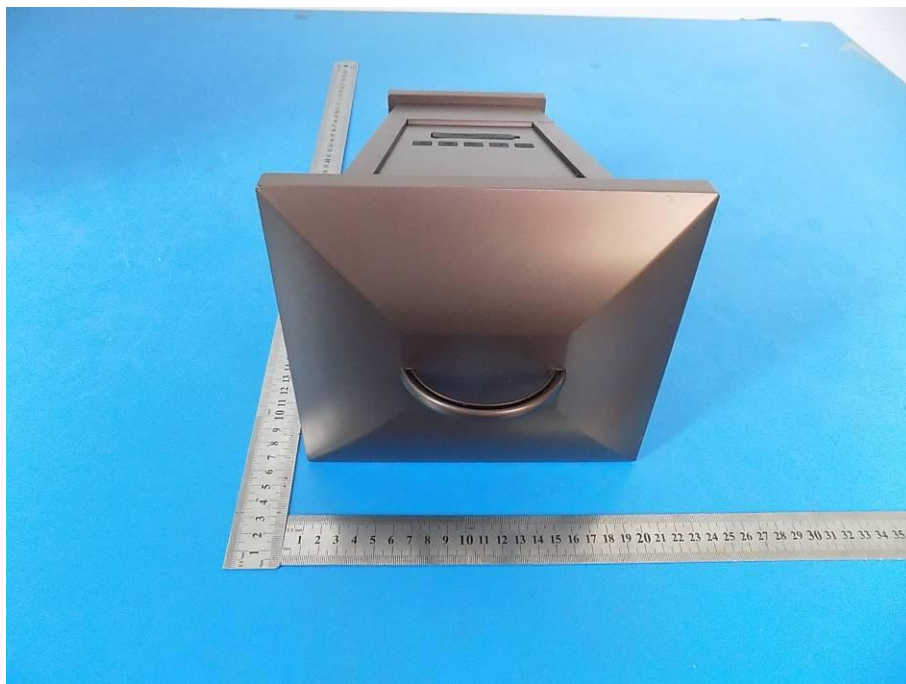





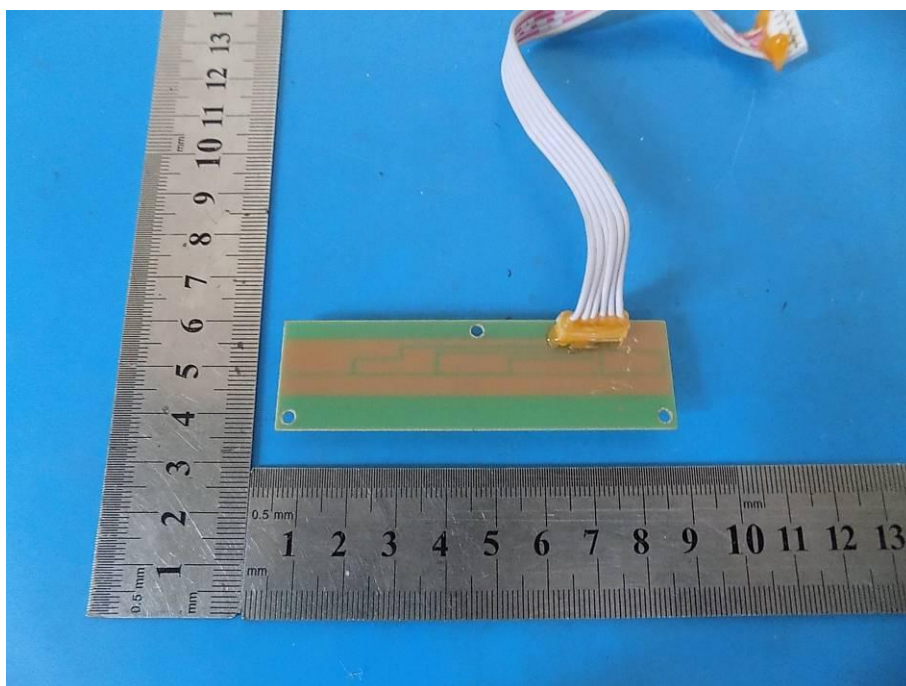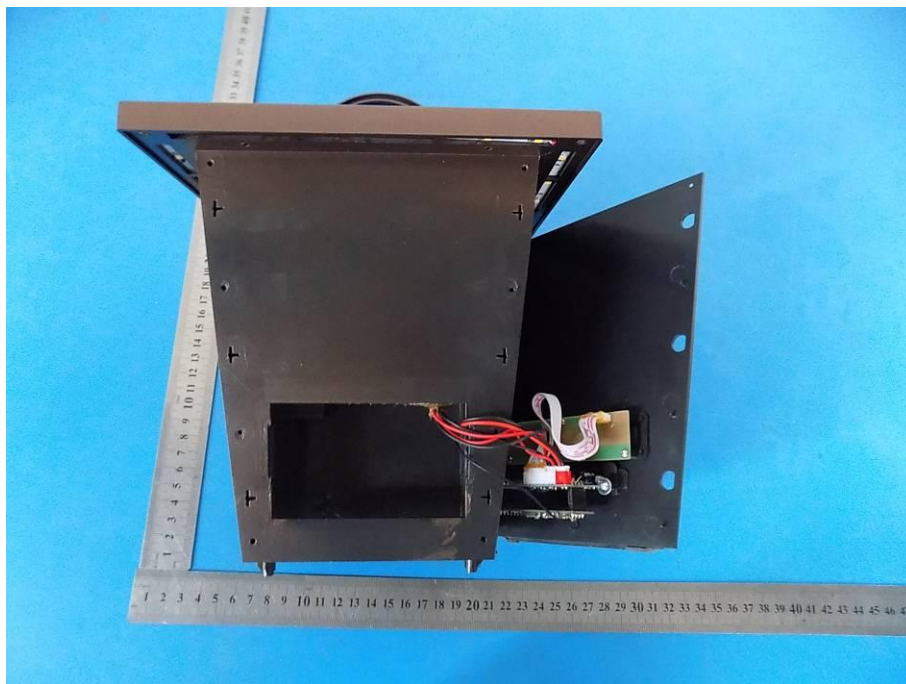


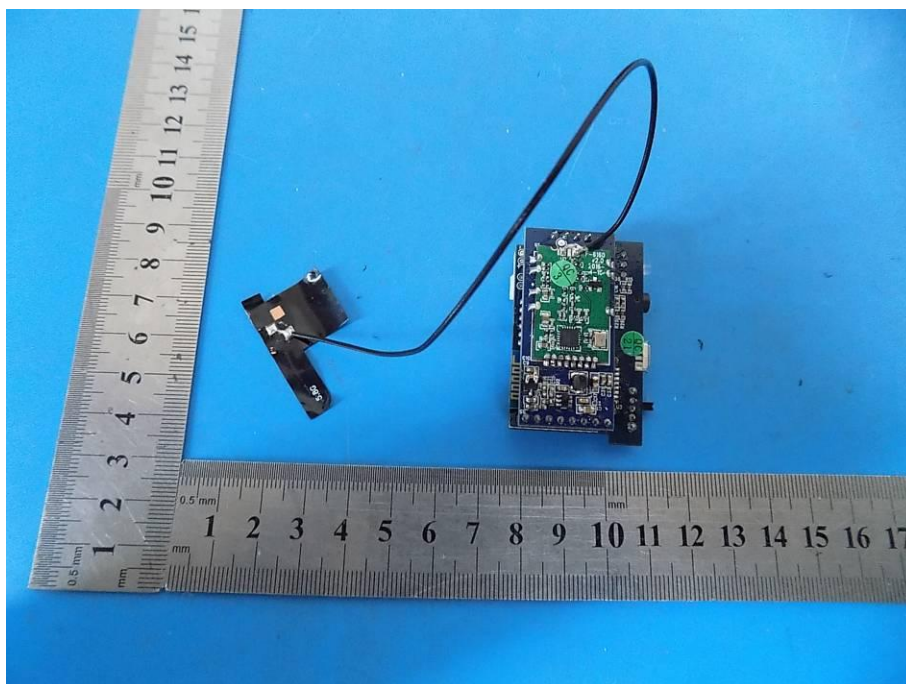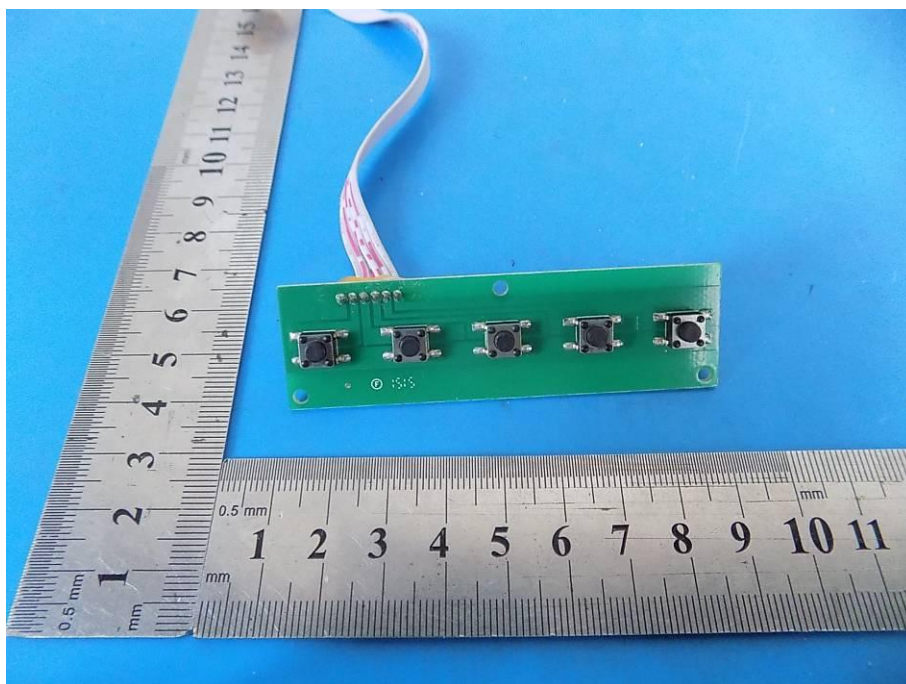

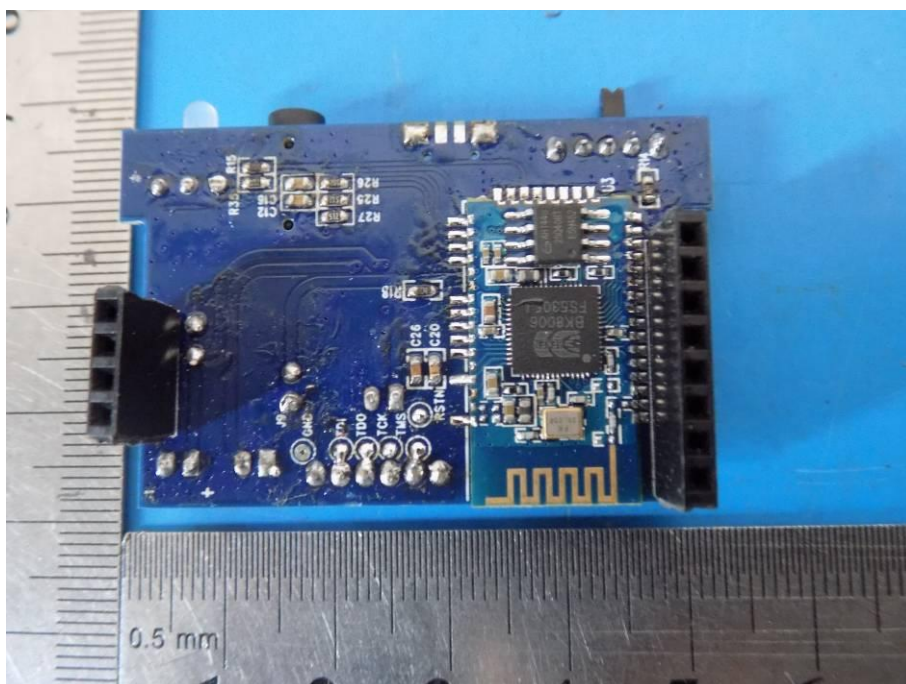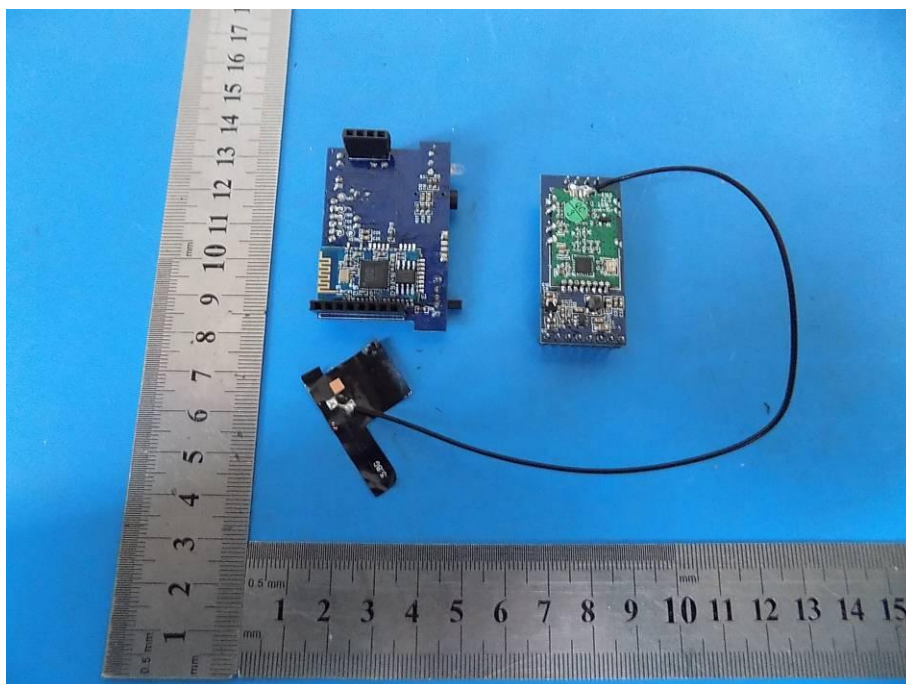



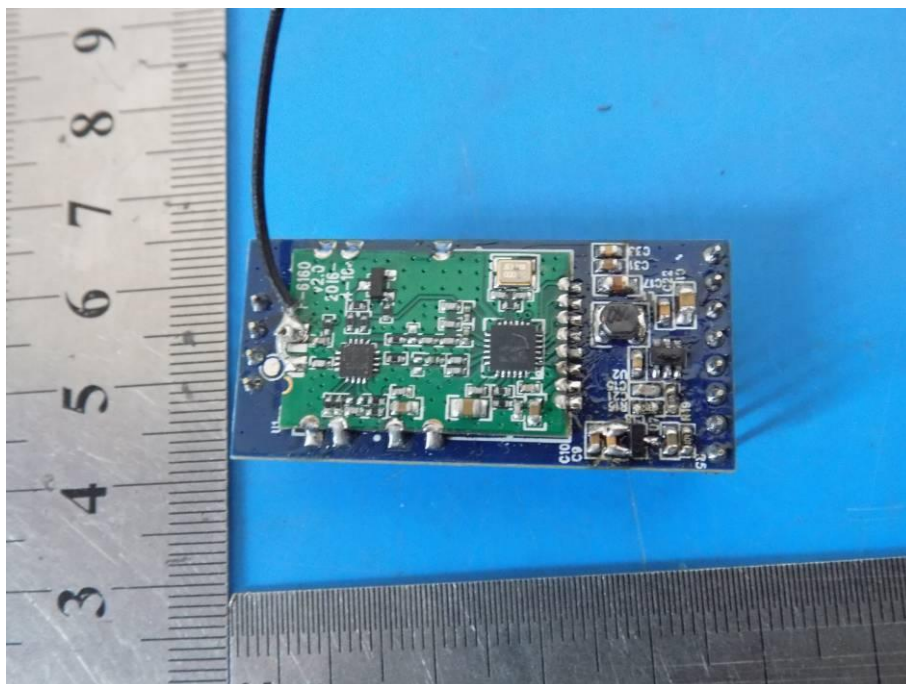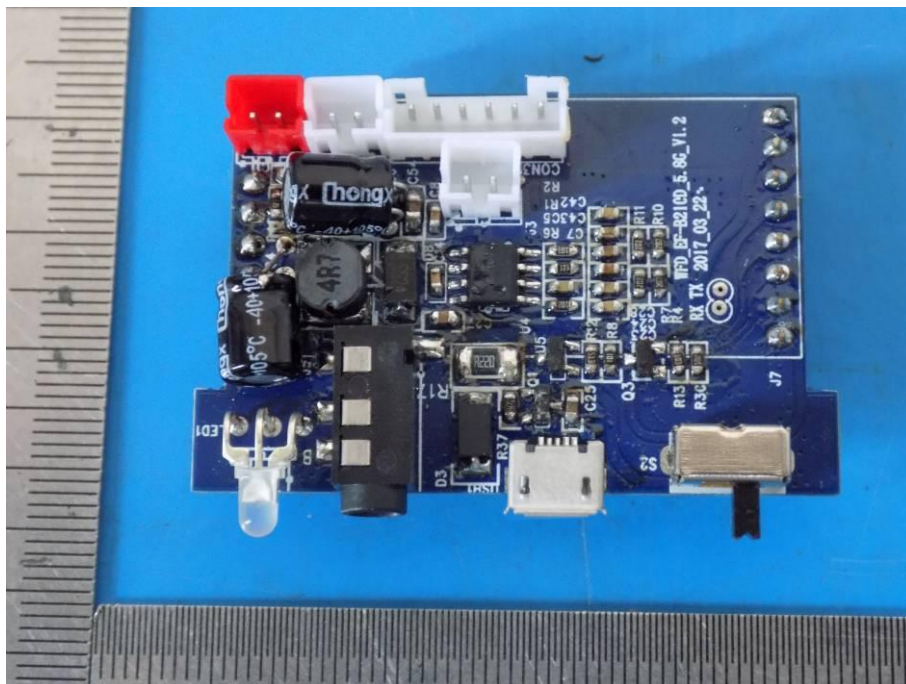

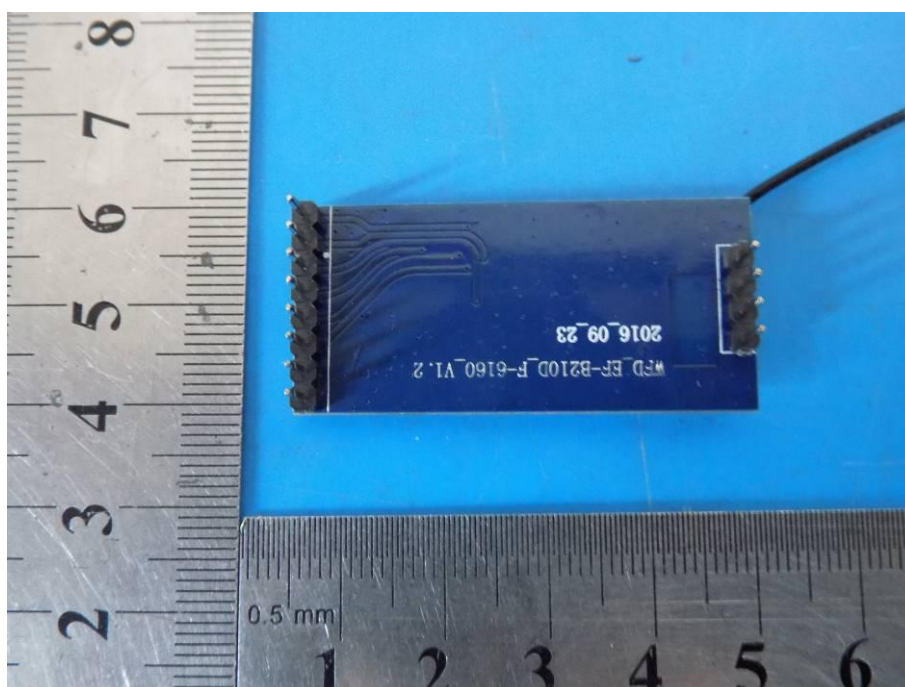

---END OF REPORT---