

FCC TEST REPORT

CATEGORY: Portable End Product
PRODUCT NAME: Bluetooth Class 2 USB Dongle
FCC ID.: **SLH-BT-1002**
FILING TYPE: Certification
MODEL NAME: BT-1002
APPLICANT: **HL-Tech Corporation**
2F, No. 13, Lane 120, Sec. 1 Nei Hu Rd. Taipei, Taiwan 114,
R.O.C.
MANUFACTURER: The same as Applicant.
ISSUED BY: **SPORTON INTERNATIONAL INC.**
6F, No. 106, Sec. 1, Hsin Tai Wu Rd., His Chih, Taipei Hsien,
Taiwan, R.O.C.

Statements:

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by CNLA, NVLAP or any agency of U.S. government.

The test equipment used to perform the test are calibrated and traceable to NML/ROC or NIST/USA.



Dr. Alan Lane
Vice General Manager
Sporton International Inc.



Lab Code: 200079-0



Table of Contents

History of this test report.....	ii
1. General Description of Equipment under Test.....	1
1.1 Applicant.....	1
1.2 Manufacturer	1
1.3 Basic Description of Equipment under Test	1
1.4 Technical Features.....	1
1.5 Table for Carrier Frequencies	2
2. Test Configuration of the Equipment under Test.....	3
2.1 Description of the Test	3
2.2 Frequency Range Investigated	3
2.3 Details of the Supporting Units.....	3
2.4 Connection Diagram of Test System	5
2.5 Test Software	6
3. Test Location and Standards	7
3.1. Test Location.....	7
3.2. Test Conditions	7
3.3. Test Standards.....	7
3.4. DoC Statement.....	7
4. Test Result and Details	8
4.1. Summary of the Test Results	8
5. Test Result	9
5.1. Test of Hopping Channel Bandwidth.....	9
5.2. Test of Number of Hopping Frequency	12
5.3. Test of Hopping Channel Separation	14
5.4. Test of Dwell Time of Each Frequency	17
5.5. Test of Maximum Peak Output Power	20
5.6. Test of Band Edges of the Operation Frequency.....	21
5.7. Test of AC Power Line Conducted Emission	24
5.8. Test of Spurious Radiated Emission	29
5.9. Antenna Requirements	41
6. List of Measuring Equipments Used	42
Appendix A. Photographs of EUT.....	A1 ~ A9



History of this test report

- No additional attachment.
- Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

1. General Description of Equipment under Test

1.1 Applicant

HL-Tech Corporation

2F, No. 13, Lane 120, Sec. 1 Nei Hu Rd. Taipei, Taiwan 114, R.O.C.

1.2 Manufacturer

The same as Applicant.

1.3 Basic Description of Equipment under Test

This product is a Bluetooth USB Dongle. The technical data has been listed on section below. This product can be connected with the USB port. The data signal can be transmitted wirelessly to the receiver through the Bluetooth technology.

1.4 Technical Features

ITEMS	DESCRIPTION
Type of Modulation	GFSK
Number of Channels	79
Frequency Band	2400MHz ~ 2483.5MHz
Carrier Frequency	Please reference table below.
Channel Bandwidth	1MHz
Output Power	-0.70dBm (peak)
Antenna Type / Gain	Ant. 1: Printed Antenna / 1dBi Ant. 2: Chip Antenna / 1dBi
Function Type	Transceiver
Power Rating (DC/AC, Voltage)	5 VDC from USB port
Temperature Range (Operating)	0 ~ 55 °C
Humidity	10 ~ 90 %



1.5 Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	27	2429 MHz	54	2456 MHz
01	2403 MHz	28	2430 MHz	55	2457 MHz
02	2404 MHz	29	2431 MHz	56	2458 MHz
03	2405 MHz	30	2432 MHz	57	2459 MHz
04	2406 MHz	31	2433 MHz	58	2460 MHz
05	2407 MHz	32	2434 MHz	59	2461 MHz
06	2408 MHz	33	2435 MHz	60	2462 MHz
07	2409 MHz	34	2436 MHz	61	2463 MHz
08	2410 MHz	35	2437 MHz	62	2464 MHz
09	2411 MHz	36	2438 MHz	63	2465 MHz
10	2412 MHz	37	2439 MHz	64	2466 MHz
11	2413 MHz	38	2440 MHz	65	2467 MHz
12	2414 MHz	39	2441 MHz	66	2468 MHz
13	2415 MHz	40	2442 MHz	67	2469 MHz
14	2416 MHz	41	2443 MHz	68	2470 MHz
15	2417 MHz	42	2444 MHz	69	2471 MHz
16	2418 MHz	43	2445 MHz	70	2472 MHz
17	2419 MHz	44	2446 MHz	71	2473 MHz
18	2420 MHz	45	2447 MHz	72	2474 MHz
19	2421 MHz	46	2448 MHz	73	2475 MHz
20	2422 MHz	47	2449 MHz	74	2476 MHz
21	2423 MHz	48	2450 MHz	75	2477 MHz
22	2424 MHz	49	2451 MHz	76	2478 MHz
23	2425 MHz	50	2452 MHz	77	2479 MHz
24	2426 MHz	51	2453 MHz	78	2480 MHz
25	2427 MHz	52	2454 MHz		
26	2428 MHz	53	2455 MHz		



2. Test Configuration of the Equipment under Test

2.1 Description of the Test

- a) The used peripherals as well as the configuration fulfill the requirements of ANSI C63.4:2003. The configuration is operated in a manner which tends to maximize its emission characteristics in a typical application.
- b) The following modes were tested:
 - CH 00 (2402 MHz)
 - CH 39 (2441 MHz)
 - CH 78 (2480 MHz)
- c) 3 meters measurement distance of OATS was used in this test.
- d) Spurious emission below 1GHz is independent of channel selection, so only channel 78 was tested in this report.
- e) There are 2 modes for spurious emission:
 - Mode 1: antenna 1
 - Mode 2: antenna 2

2.2 Frequency Range Investigated

- a) Conducted power line test: from 150 kHz to 30 MHz
- b) Radiated emission test: from 30 MHz to 25000 MHz

2.3 Details of the Supporting Units

Support Unit 1. – Notebook (DELL)

FCC ID	: N/A
Model No.	: PP01L
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0030
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.




Support Unit 2. -- Printer (EPSON)

FCC ID : N/A
Model No. : STYLUS COLOR 680
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0048
Data Cable : Shielded, 1.35m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. -- Modem (ACEEX) – for local workstation

FCC ID : IFAXDM141
Model No. : DM141
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0049
Data Cable : Shielded, 1.15m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

2.4 Connection Diagram of Test System

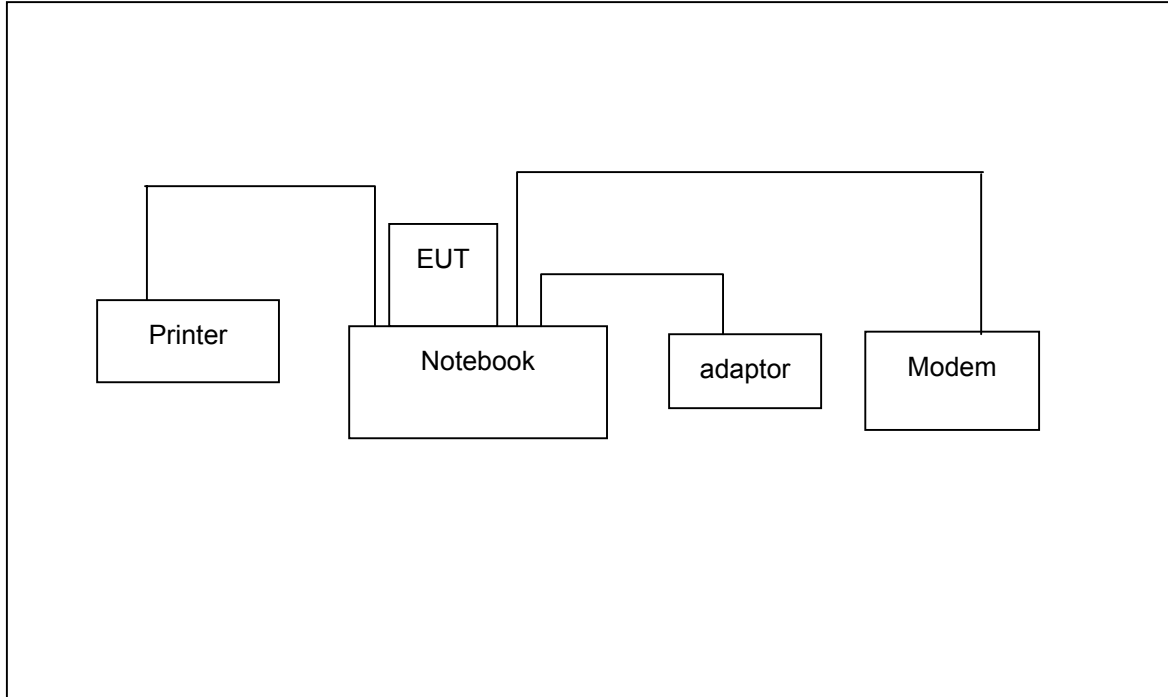



2.5 Test Software

There are 2 software may be used in the testing.

- A) Channel & Power Controlling Software: This was provided by the manufacturer and is able to let the test engineer select the operating channel as well as the RF output power. The parameters for channel selection is trying to offer the test engineer the ability to fix the operating channel for testing, both normal data and continuously transmitting modes are allowed, and that for RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.
- B) "H" Pattern Generator: Except Access Point, the supporting equipment such as monitor or printer is always available. Under testing, these supporting equipment has to also under working condition. "H" Pattern Generator is able to continuously transmitting "H" character to those supporting equipments.



3. Test Location and Standards

3.1. Test Location

Test Location : Sporton Hwa Ya Testing Building

Address : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Tel: +886 3 327 3456 Fax: +886 3 318 0055

Test Site No. : CO04-HY , 03CH03-HY

3.2. Test Conditions

(note: this device is powered by host PC, the voltage condition is the condition of host PC)

Normal Voltage : 110V/60Hz

Extreme Voltages : 138V and 102V

Normal Temperature : 20 °C

Extreme Temperatures : 0 °C and 55°C

3.3. Test Standards

Here is the list of the standards followed in this test report.

ANSI C63.4-2003
47 CFR Part 15 Subpart C (Section 15.247)

3.4. DoC Statement

This EUT is also classified as a device of computer peripheral Class B which DoC has to be followed. It has been verified according to the rule of 47 CFR part 15 Subpart B, and found that all the requirements has been fulfilled.



4. Test Result and Details

4.1. Summary of the Test Results

Applied Standard: 47 CFR Part 15 and Part 2			
Paragraph	FCC Rule	Description of Test	Result
5.1	15.247(a)(1)	Hopping Channel Bandwidth	Pass
5.2	15.247(a)(iii)	Number of Hopping Frequency Used	Pass
5.3	15.247(a)(1)	Hopping Channel Separation	Pass
5.4	15.247(a)(iii)	Dwell Time of Each Frequency	Pass
5.5	15.247 (b)(1)	Maximum Peak Output Power	Pass
5.6	15.247(c)	Band Edges of the Operation Frequency	Pass
5.7	15.247(d)	Power Spectral Density	NA
5.8	15.107/15.207	AC Power Line Conducted Emission	Pass
5.9	15.209/15.247(c)	Spurious Radiated Emission	Pass
5.10	15.203	Antenna Requirement	Pass

5. Test Result

5.1. Test of Hopping Channel Bandwidth


5.1.1 Measuring Instruments

Item 17 of the table on section 6.

5.1.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 30KHz and VBW to 100KHz.
3. The Hopping Channel bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.1.3 Test Setup Layout

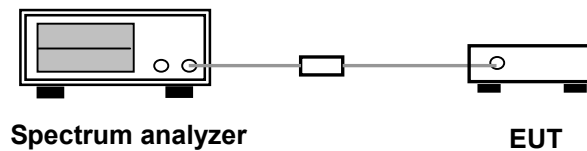


5.1.4 Test Result : See spectrum analyzer plots below

- Operating Mode: Continuously Transmitting
- Temperature: 26°C
- Relative Humidity: 57 %
- Duty Cycle of the Equipment During the Test: 30%
- Test Engineer: Sam Lee

Channel	Frequency (MHz)	Hopping Channel Bandwidth (KHz)
00	2402	816.000
39	2441	828.000
78	2480	840.000




(Channel 00) :

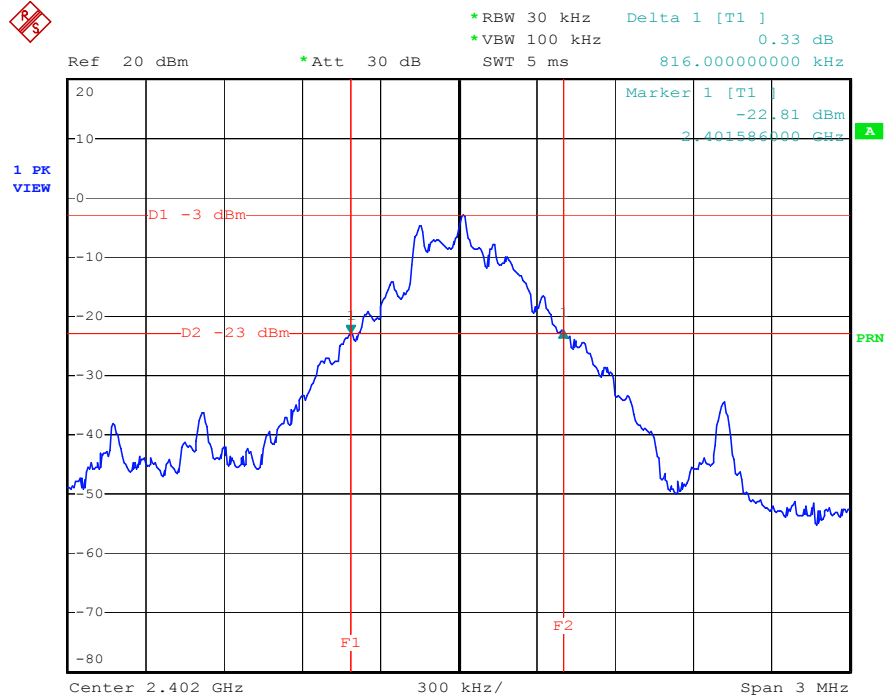

Date: 9.SEP.2004 18:04:51


(Channel 39) :

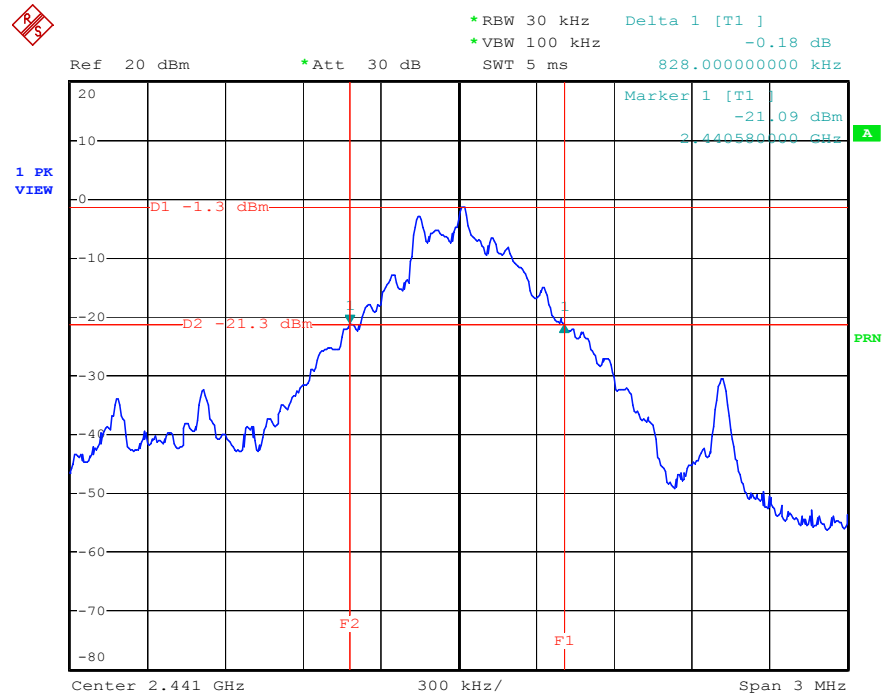

Date: 9.SEP.2004 18:23:47



(Channel 78) :

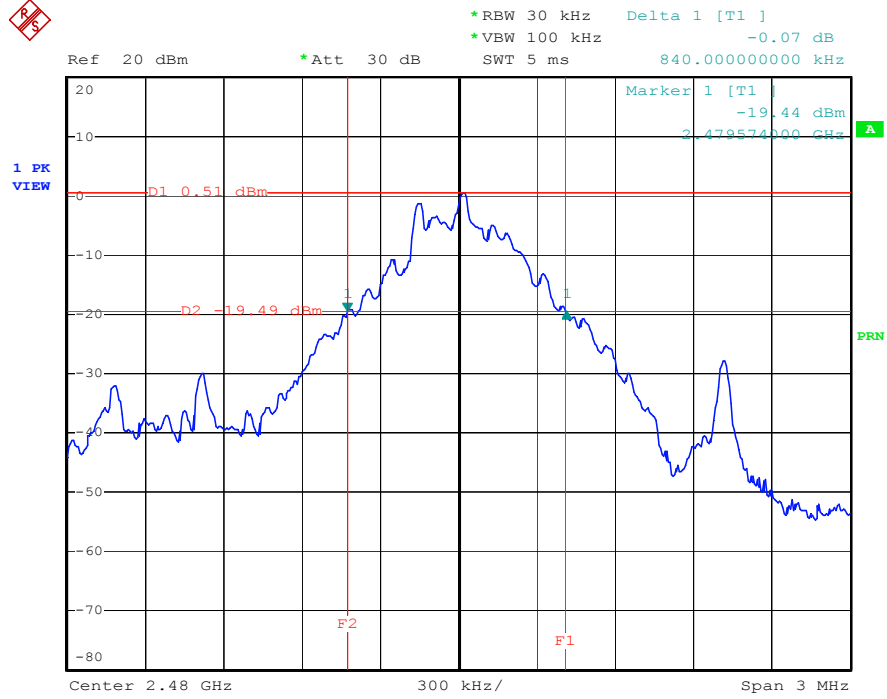

Date: 9.SEP.2004 18:08:32

5.2. Test of Number of Hopping Frequency


5.2.1 Measuring Instruments

Item 9 of the table on section 6.

5.2.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The number of hopping frequency used is defined total number of the channels available on the spectrum.


5.2.3 Test Setup Layout

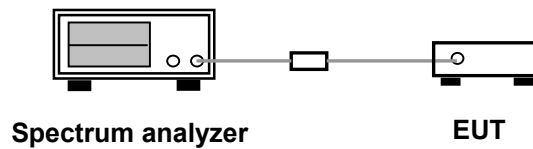

5.2.4 Test Result : See spectrum analyzer plots below

- Operating Mode: Normal Hopping
- Temperature: 26°C
- Relative Humidity: 57 %
- Duty Cycle of the Equipment During the Test: 30%
- Test Engineer: Sam Lee

Number of Hopping Frequency	Limit
79	75

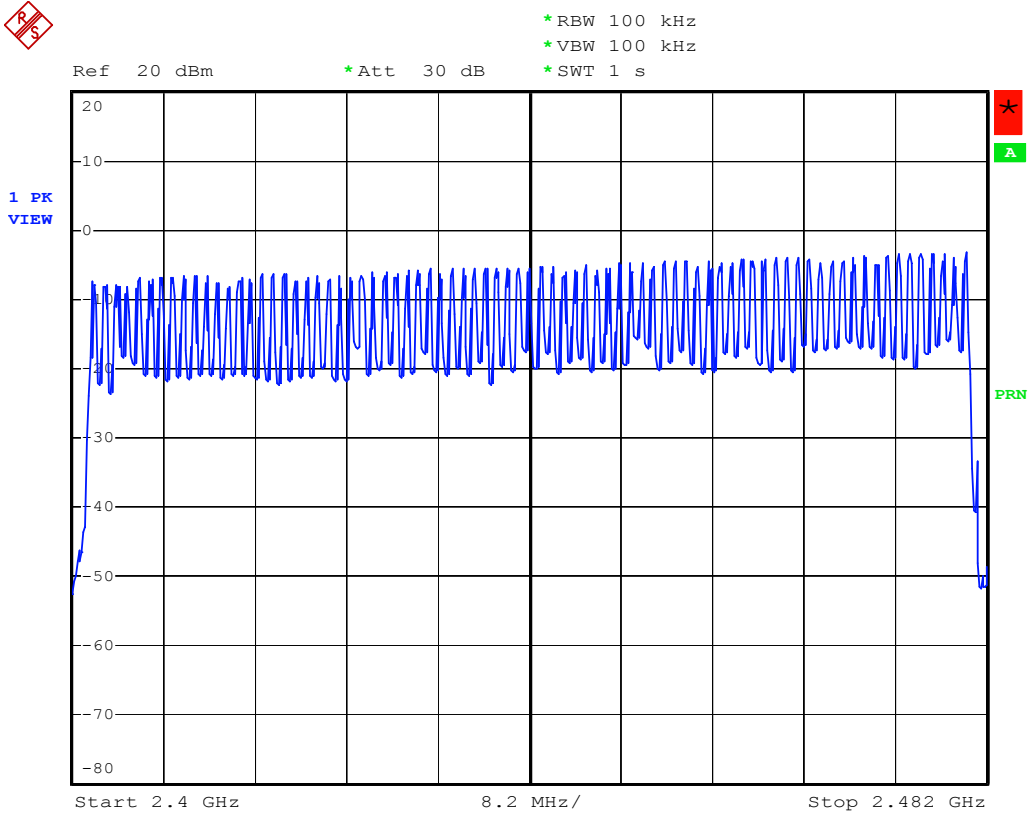

Date: 9.SEP.2004 18:52:54

5.3. Test of Hopping Channel Separation


5.3.1 Measuring Instruments

Item 17 of the table on section 6.

5.3.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 300KHz.
3. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.

5.3.3 Test Setup Layout



5.3.4 Test Result : The spectrum analyzer plots are attached as below


- Operating Mode: Normal Hopping
- Temperature: 26°C
- Relative Humidity: 57 %
- Duty Cycle of the Equipment During the Test: 30%
- Test Engineer: Sam Lee

Channel	Frequency (MHz)	Hopping Channel Separation (KHz)	Limits (KHz)
00	2402	1000.0000	816.00
39	2441	1000.0000	828.00
78	2480	1000.0000	840.00

Note: The limit is 25KHz or 20dB bandwidth , which is greater.




(Channel 00) :

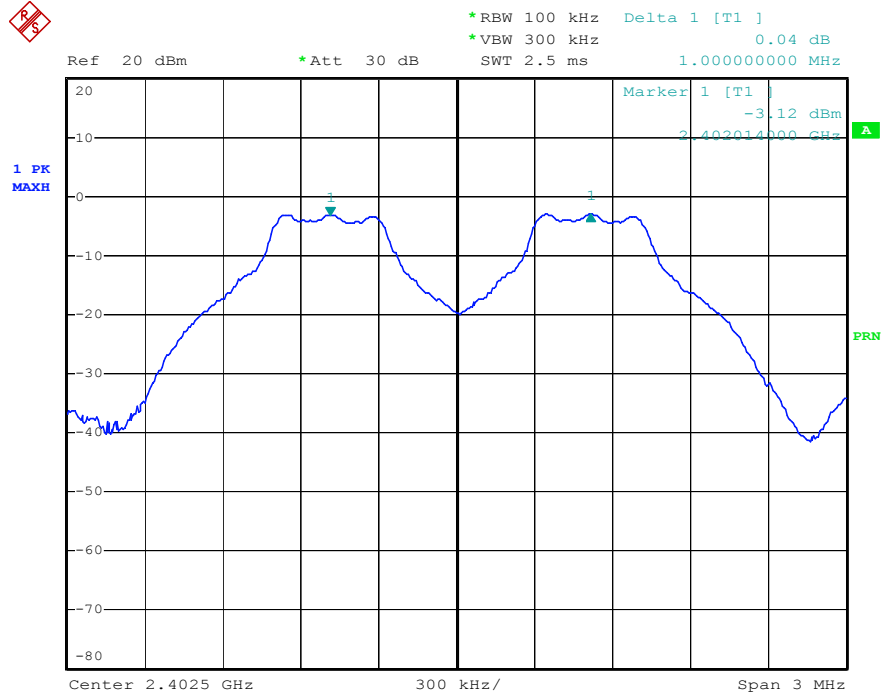

Date: 9.SEP.2004 18:33:06


(Channel 39) :

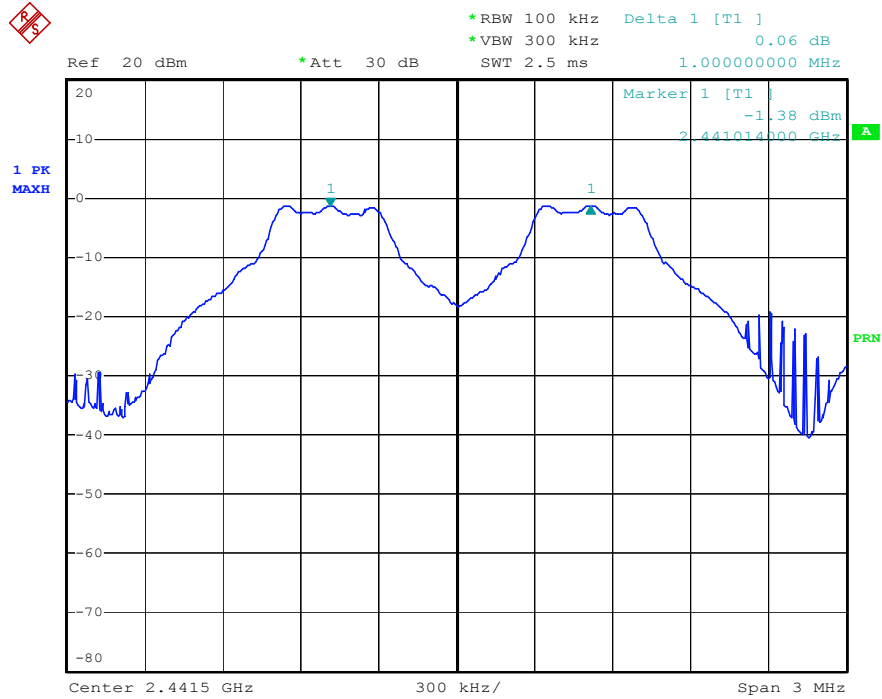

Date: 9.SEP.2004 18:34:48



(Channel 78) :

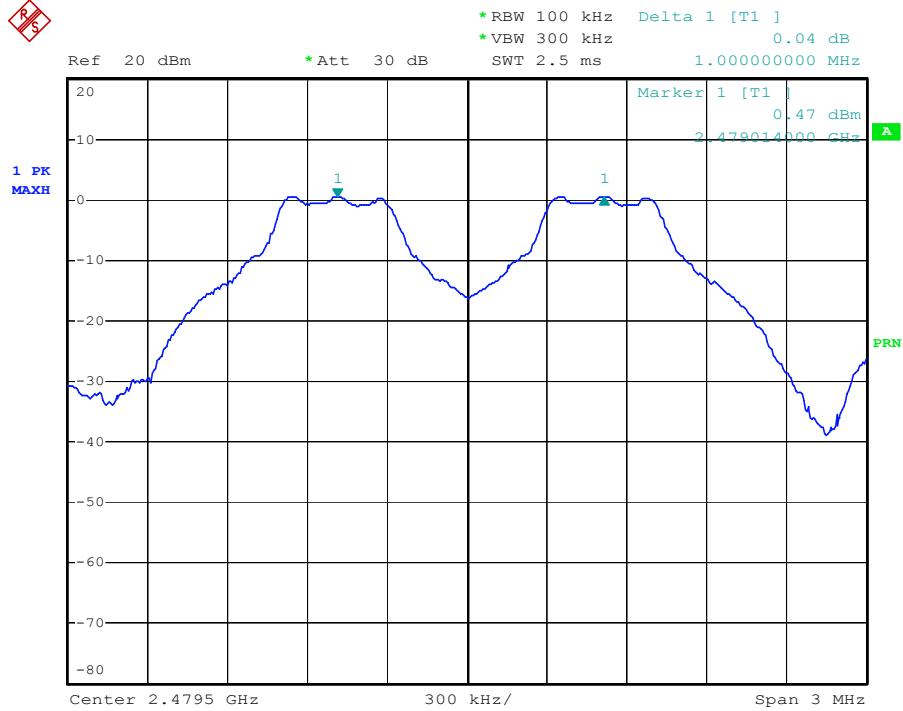

Date: 9.SEP.2004 18:36:23

5.4. Test of Dwell Time of Each Frequency


5.4.1 Measuring Instruments

Item 9 of the table on section 6.

5.4.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
3. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
4. Set the EUT for DH5 packet transmitting.
5. Measure the maximum time duration, t , of one single pulse.
6. DH5 Packet permit maximum 320 hops per second in 79 channels. So, the dwell time is the time duration of the pulse times 128 within 31.6 seconds.

5.4.3 Test Setup Layout




5.4.4 Test Result : See spectrum analyzer plots below

- Operating Mode: Normal Hopping
- Temperature: 26°C
- Relative Humidity: 57 %
- Duty Cycle of the Equipment During the Test : 30%
- Test Engineer: Sam Lee

Channel	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
00	2402	3.1	0.3968	0.4
39	2441	3.1	0.3968	0.4
78	2480	3.1	0.3968	0.4




(Channel 00) :

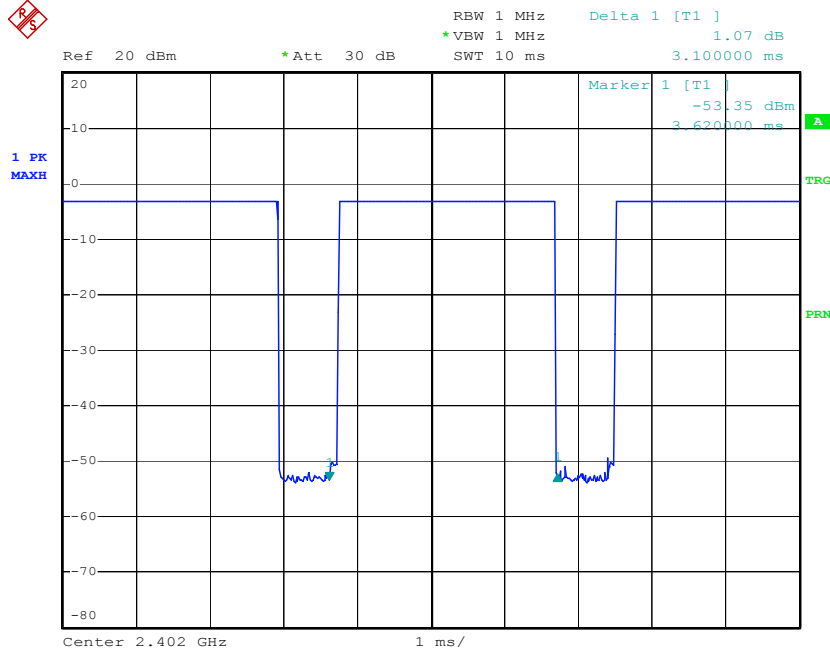

Date: 9.SEP.2004 18:39:02


(Channel 39) :

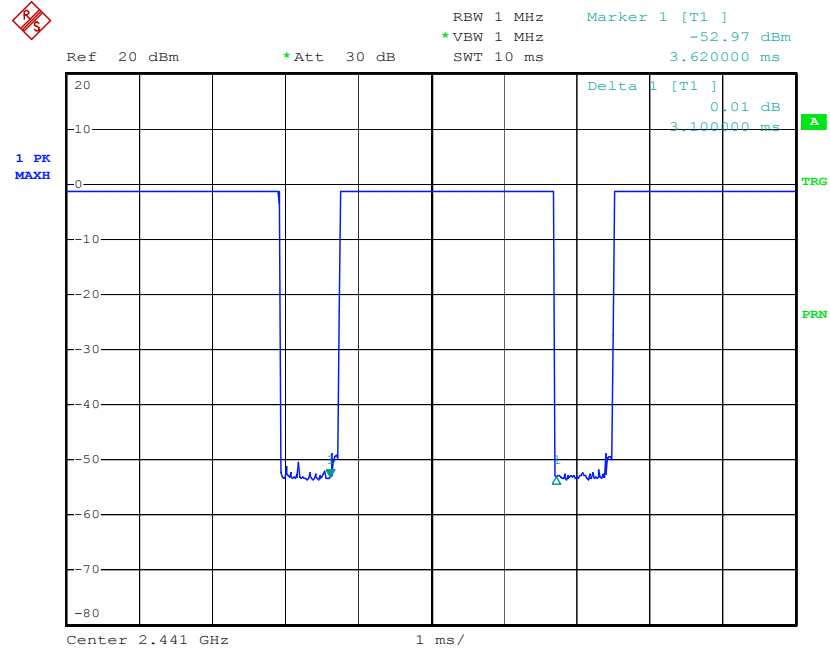

Date: 9.SEP.2004 18:40:01



(Channel 78) :

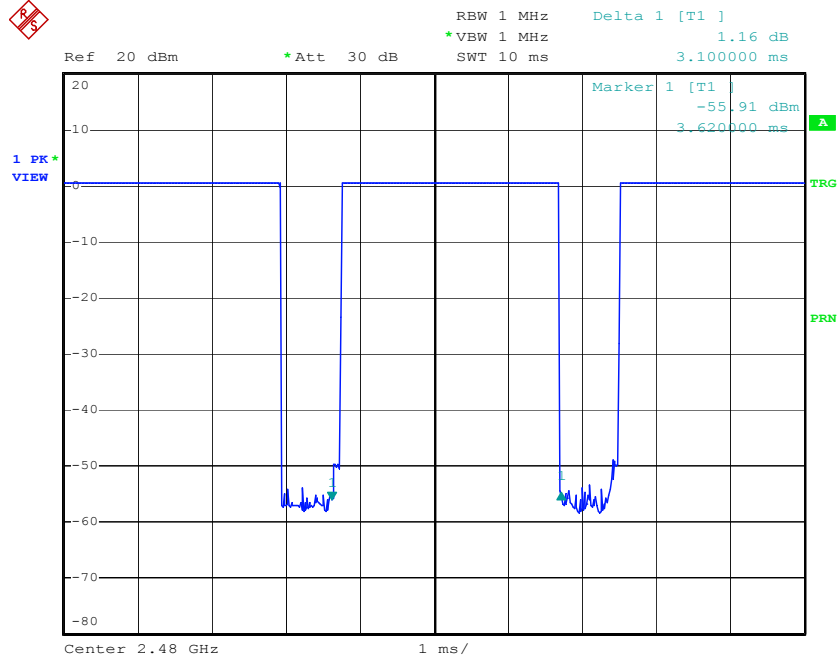

Date: 9.SEP.2004 18:41:07

5.5. Test of Maximum Peak Output Power


5.5.1 Measuring Instruments

Item 17 of the table on section 6.

5.5.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The center frequency of the spectrum analyzer was set to the fundamental frequency
3. Adjust RBW to 3MHz and VBW to 3MHz.

5.5.3 Test Setup Layout



5.5.4 Test Result

- Operating Mode: single channel continuous transmitting
- Temperature: 26°C
- Relative Humidity: 57 %
- Duty Cycle of the Equipment During the Test : 30%
- Test Engineer: Sam Lee

Channel	Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (mWatt)	Limit (Watt/dBm)
00	2402	-2.72	0.534564659	1W/30 dBm
39	2441	-1.14	0.76913044	1W/30 dBm
78	2480	0.70	1.174897555	1W/30 dBm



5.6. Test of Band Edges of the Operation Frequency

5.6.1 Measuring Instruments

Item 9 of the table on section 6.

5.6.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both of spectrum analyzer to 1MHz and VBW to 300Hz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges emission was measured and recorded.

5.6.3 Note on Band edge Emission

(A) Left Edge

The band edge emission plot shows 45.48dB delta between carrier maximum power and local maximum emission in the restricted band.

CH 00 Carrier power strength (dBuV/m)	Delta (dB)	The maximum field strength in restrict band (dBuV/m)	Limit (dBuV/m)	Margin (dB)
73.31	45.48	27.83	54.00	-26.17

(B) Right Edge


The band edge emission plot shows 27.37dB delta between carrier maximum power and local maximum emission in the restricted band.

CH 78 Carrier power strength (dBuV/m)	Delta (dB)	The maximum field strength in restrict band (dBuV/m)	Limit (dBuV/m)	Margin (dB)
73.07	27.37	45.70	54.00	-8.3

* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.




(Channel 00) :

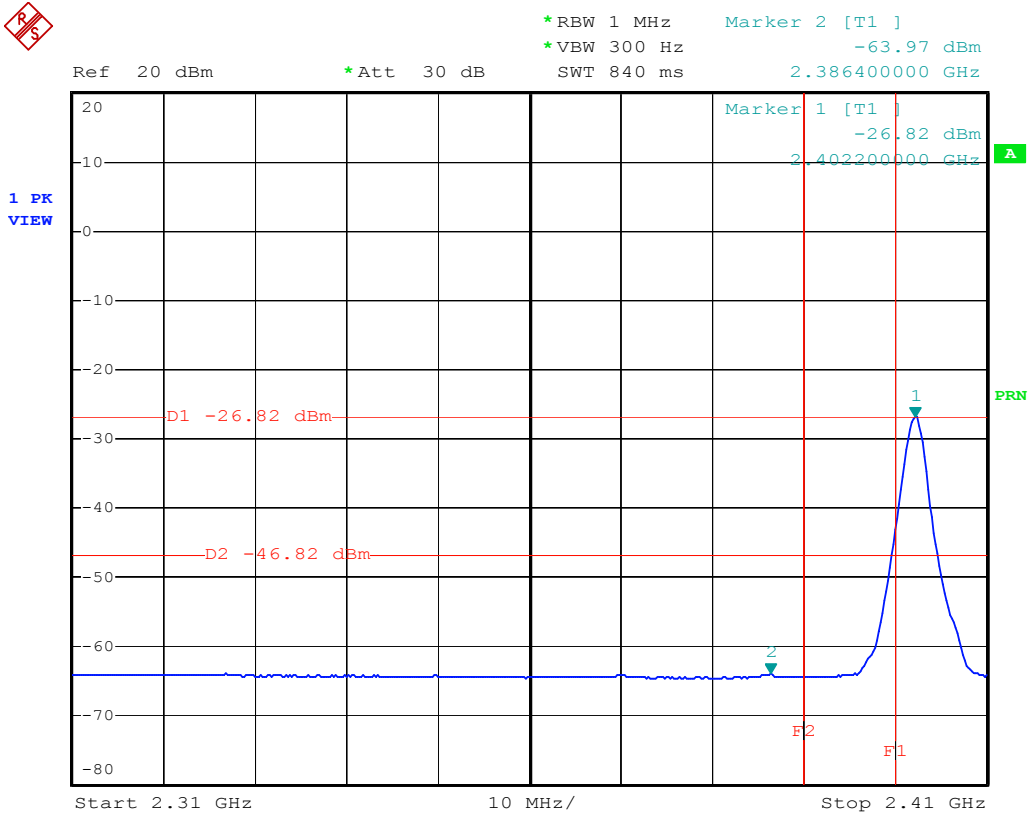

Date: 9.SEP.2004 18:28:38



(Channel 78) :

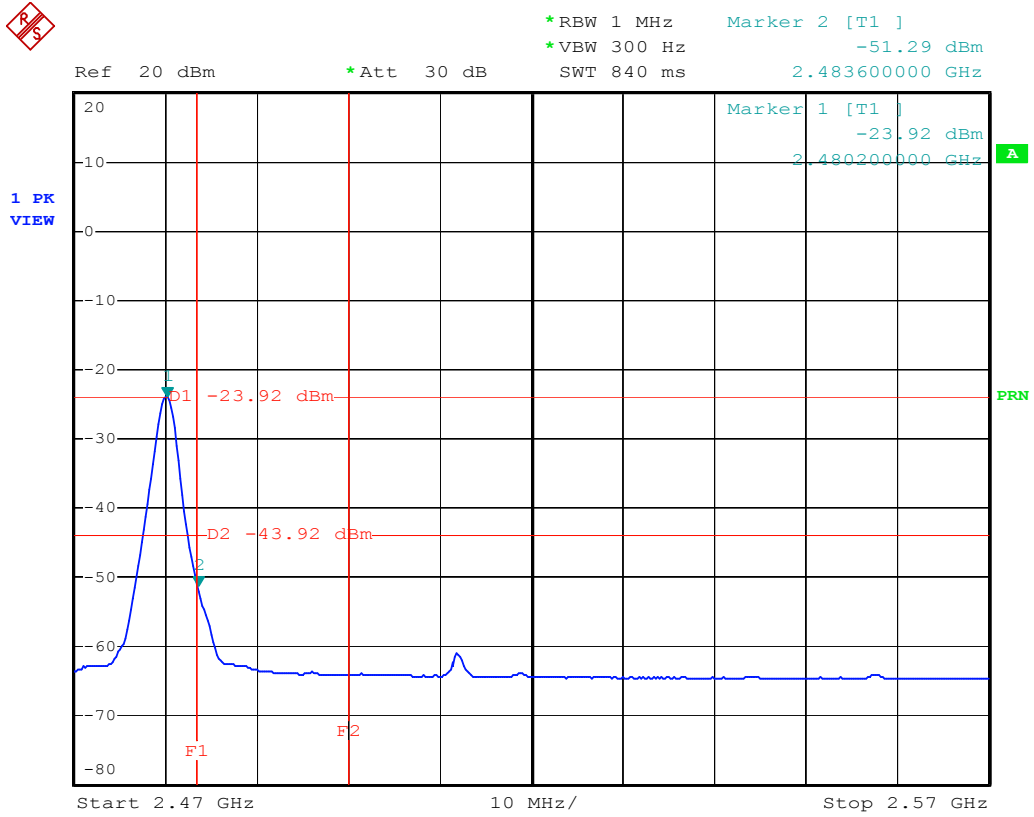

Date: 9.SEP.2004 18:14:51

Observation : All emissions in the 100kHz band edge are all lower than carrier by more than 20dB.



5.7. Test of AC Power Line Conducted Emission

5.7.1 Measuring Instruments

Please reference item 1~7 in chapter 6 for the instruments used for testing.

5.7.2 Test Procedures


1. Configure the EUT according to ANSI C63.4.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provides 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Use the Channel & Power Controlling software to make the EUT working on selected channel and expected output power, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
7. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
8. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.



5.7.3 Test Result of Conducted Emission

Test Mode	RF LINK	Tested By	Brian Lin
Temperature / Humidity	28deg. C / 43%		


Line to Ground

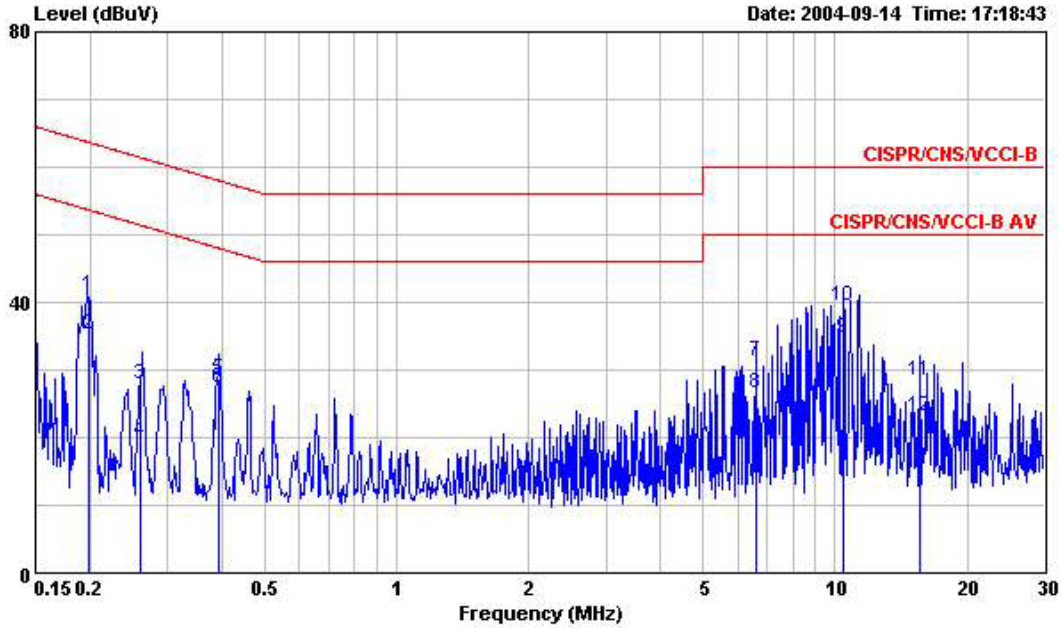


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1983310	41.12	-22.56	63.68	41.01	0.10	0.01	QP
2	0.1983310	35.19	-18.49	53.68	35.08	0.10	0.01	Average
3	0.2612770	27.77	-33.62	61.39	27.66	0.10	0.01	QP
4	0.2612770	19.52	-31.87	51.39	19.41	0.10	0.01	Average
5	0.3934400	28.59	-29.40	57.99	28.47	0.10	0.02	QP
6	0.3934400	27.26	-20.73	47.99	27.14	0.10	0.02	Average
7	6.627	31.39	-28.61	60.00	31.10	0.20	0.09	QP
8	6.627	26.53	-23.47	50.00	26.24	0.20	0.09	Average
9	10.446	34.68	-15.32	50.00	34.36	0.20	0.12	Average
10	10.446	39.36	-20.64	60.00	39.04	0.20	0.12	QP
11	15.622	28.33	-31.67	60.00	27.95	0.21	0.17	QP
12	15.622	23.09	-26.91	50.00	22.71	0.21	0.17	Average



Neutral to Ground

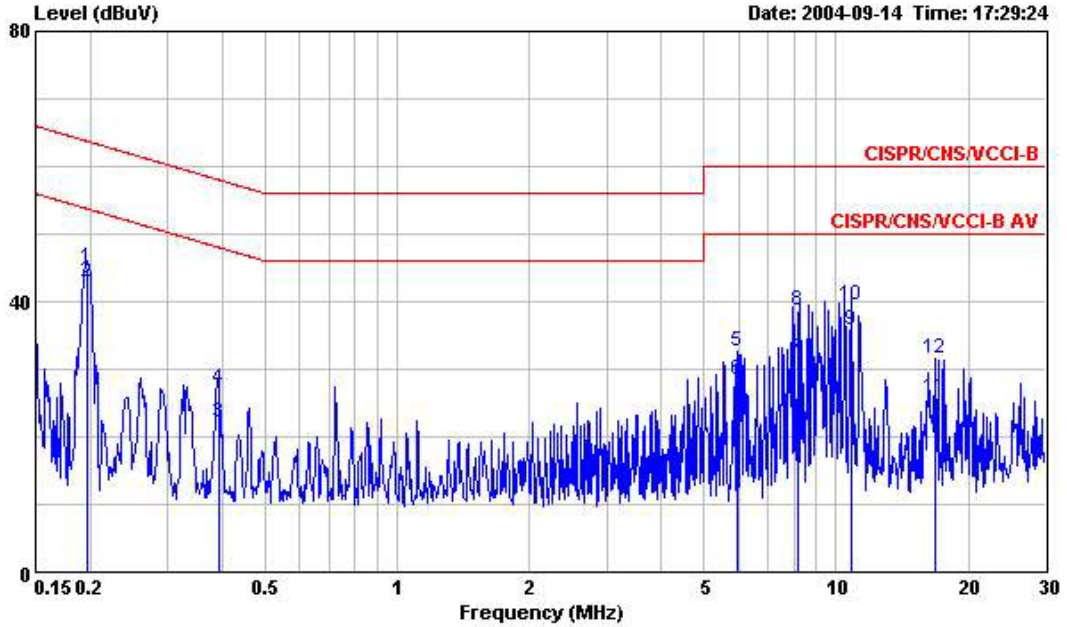

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.1965370	44.91	-18.85	63.76	44.80	0.10	0.01	QP
2	@0.1965370	42.94	-10.82	53.76	42.83	0.10	0.01	Average
3	0.3913610	21.98	-26.05	48.03	21.86	0.10	0.02	Average
4	0.3913610	27.04	-30.99	58.03	26.92	0.10	0.02	QP
5	5.948	32.60	-27.40	60.00	32.37	0.14	0.09	QP
6	5.948	28.48	-21.52	50.00	28.25	0.14	0.09	Average
7	8.221	31.68	-18.32	50.00	31.40	0.18	0.10	Average
8	8.221	38.74	-21.26	60.00	38.46	0.18	0.10	QP
9	@ 10.786	35.88	-14.12	50.00	35.56	0.20	0.12	Average
10	10.786	39.52	-20.48	60.00	39.20	0.20	0.12	QP
11	16.734	25.90	-24.10	50.00	25.49	0.24	0.17	Average
12	16.734	31.49	-28.51	60.00	31.08	0.24	0.17	QP

Test Engineer : 
 Brian Lin

5.7.4 Photographs of Conducted Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW



SIDE VIEW





5.8. Test of Spurious Radiated Emission


5.8.1 Measuring Instruments

Please reference item 8~19 in chapter 6 for the instruments used for testing.

5.8.2 Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT was placed on the top of the turn table 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turn table.
4. Power on the EUT and all the supporting units.
5. The turn table was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW & RBW for peak reading and 1MHz RBW & 300Hz VBW for average reading in spectrum analyzer.
10. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
11. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported. (For peak measurement, RB=VB=1MHz, for average measurement, RB=1MHz, VB=10Hz)

5.8.3 Test Setup Layout

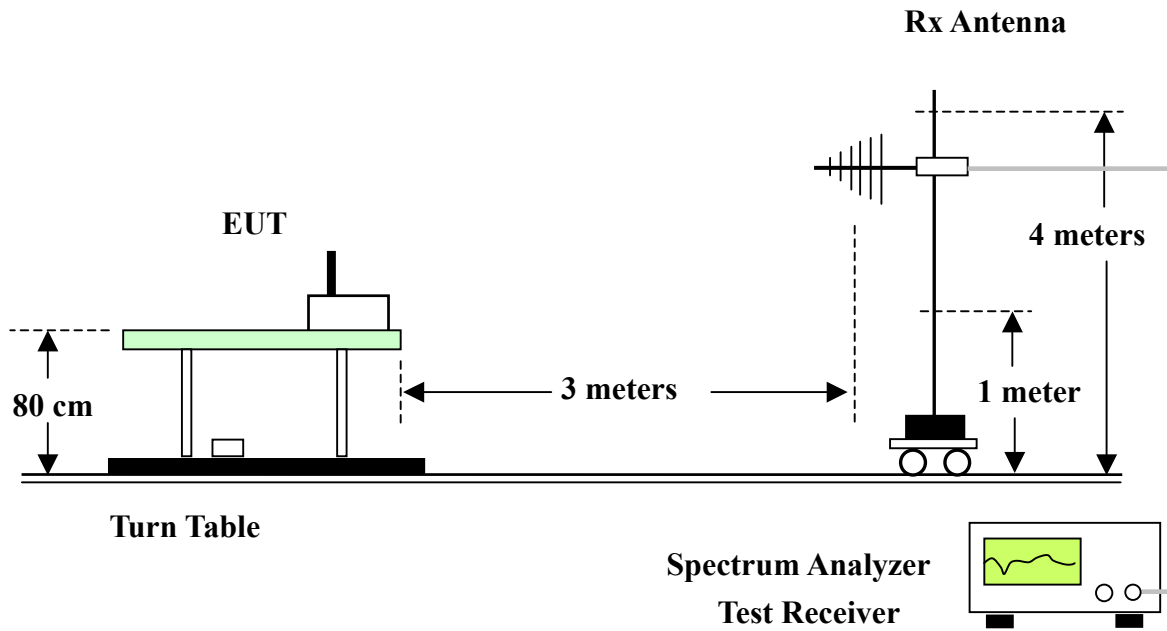



5.8.4 Test Results and Limit

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

Test Mode	Mode 1CH 78	Temperature	22 deg. C	Tested By	Wayne Hsu
Freq. Range	30MHz~1GHz	Humidity	50%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	66.380	24.18	-15.82	40.00	41.79	10.06	0.30	27.97	Peak	---	---
2	160.220	26.38	-17.12	43.50	40.85	12.64	0.67	27.78	Peak	---	---
3	176.030	25.58	-17.92	43.50	38.45	14.20	0.68	27.75	Peak	---	---
1	218.400	25.83	-20.17	46.00	37.93	14.73	0.80	27.63	Peak	---	---
2	467.200	24.72	-21.28	46.00	35.49	16.26	1.37	28.40	Peak	---	---
3	912.800	38.74	-7.26	46.00	43.23	21.99	1.81	28.29	Peak	133	79

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	400.000	24.11	-21.89	46.00	33.93	16.80	1.18	27.80	Peak	---	---
2	903.200	27.44	-18.56	46.00	32.09	21.77	1.88	28.30	Peak	---	---
3	957.600	26.85	-19.15	46.00	30.54	22.96	1.59	28.24	Peak	---	---
1	65.870	29.28	-10.72	40.00	46.89	10.08	0.28	27.97	Peak	---	---
2	179.260	31.87	-11.63	43.50	44.64	14.20	0.77	27.74	Peak	---	---
3	187.760	27.92	-15.58	43.50	40.02	14.82	0.80	27.72	Peak	---	---



Test Mode	Mode 1 CH00	Temperature	22 deg. C	Tested By	Wayne Hsu
Freq. Range	1GHz~25GHz	Humidity	50%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1102.000	33.99	-20.01	54.00	51.09	24.11	1.23	42.44	Average	---	---
2	1198.000	34.22	-19.78	54.00	51.10	24.38	1.22	42.48	Average	---	---
3	2564.000	36.76	-17.24	54.00	48.84	28.67	1.89	42.64	Average	154	111

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1100.000	34.84	-19.16	54.00	51.94	24.11	1.23	42.44	Average	---	---
2	1198.000	34.36	-19.64	54.00	51.24	24.38	1.22	42.48	Average	---	---
3	1302.000	33.11	-20.89	54.00	49.59	24.68	1.36	42.52	Average	---	---



Test Mode	Mode 1 CH39	Temperature	22 deg. C	Tested By	Wayne Hsu
Freq. Range	1GHz~25GHz	Humidity	50%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1116.000	32.73	-21.27	54.00	49.80	24.15	1.23	42.45	Average	---	---
2	1220.000	34.79	-19.21	54.00	51.59	24.45	1.24	42.49	Average	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1100.000	41.54	-12.46	54.00	58.64	24.11	1.23	42.44	Average	163	148
2	1220.000	34.12	-19.88	54.00	50.92	24.45	1.24	42.49	Average	---	---
1	3702.000	39.13	-14.87	54.00	48.92	31.90	1.76	43.45	Average	---	---
2	3806.000	39.79	-14.21	54.00	49.20	32.19	1.98	43.58	Average	---	---
3	4356.000	39.29	-14.71	54.00	48.37	32.55	2.39	44.02	Average	---	---



Test Mode	Mode 1 CH78	Temperature	22 deg. C	Tested By	Wayne Hsu
Freq. Range	1GHz~25GHz	Humidity	50%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1302.000	34.59	-19.41	54.00	51.07	24.68	1.36	42.52	Average	---	---
2	2172.000	38.08	-15.92	54.00	51.48	27.57	1.69	42.66	Average	---	---
3	2246.000	37.61	-16.39	54.00	50.78	27.76	1.72	42.65	Average	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1100.000	42.22	-11.78	54.00	59.32	24.11	1.23	42.44	Average	---	---
2	1238.000	33.78	-20.22	54.00	50.47	24.50	1.31	42.50	Average	---	---
1	4964.000	41.95	-12.05	54.00	50.42	33.55	2.46	44.48	Average	119	155



Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

Test Mode	Mode 2 CH 78	Temperature	22 deg. C	Tested By	Wayne Hsu
Freq. Range	30MHz~1GHz	Humidity	50%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	141.860	29.24	-14.26	43.50	42.52	12.46	2.08	27.82	Peak	---	---
2	176.710	26.72	-16.78	43.50	37.87	14.20	2.40	27.75	Peak	---	---
3	187.590	28.31	-15.19	43.50	38.77	14.80	2.46	27.72	Peak	---	---
1	467.200	29.93	-16.07	46.00	38.27	16.26	3.80	28.40	Peak	---	---
2	666.400	33.26	-12.74	46.00	36.74	20.60	4.65	28.73	Peak	---	---
3	832.800	33.51	-12.49	46.00	35.08	21.83	5.23	28.63	Peak	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	31.870	28.70	-11.30	40.00	43.15	12.61	0.98	28.04	Peak	---	---
2	126.220	29.03	-14.47	43.50	42.63	12.23	2.02	27.85	Peak	---	---
3	129.790	28.83	-14.67	43.50	42.23	12.33	2.11	27.84	Peak	---	---
1	531.200	30.24	-15.76	46.00	37.53	17.37	4.07	28.73	Peak	---	---
2	663.200	36.53	-9.47	46.00	40.02	20.59	4.66	28.74	Peak	152	179
3	832.800	32.45	-13.55	46.00	34.02	21.83	5.23	28.63	Peak	---	---



Test Mode	Mode 2 CH00	Temperature	22 deg. C	Tested By	Wayne Hsu
Freq. Range	1GHz~25GHz	Humidity	50%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1000.000	41.82	-12.18	54.00	55.75	24.20	1.11	39.24	Average	---	---
2	1158.000	40.46	-13.54	54.00	53.96	24.50	1.22	39.22	Average	---	---
3	1660.000	40.43	-13.57	54.00	52.34	25.89	1.54	39.34	Average	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1668.000	42.06	-11.94	54.00	53.93	25.92	1.55	39.34	Average	---	---
2	1998.000	46.81	-7.19	54.00	57.54	27.40	1.52	39.65	Average	105	165
3	2332.000	42.91	-11.09	54.00	52.66	28.15	1.71	39.61	Average	---	---



Test Mode	Mode 2 CH39	Temperature	22 deg. C	Tested By	Wayne Hsu
Freq. Range	1GHz~25GHz	Humidity	50%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1000.000	48.34	-5.66	54.00	62.27	24.20	1.11	39.24	Average	104	176
2	1332.000	42.07	-11.93	54.00	55.10	24.82	1.35	39.20	Average	---	---
3	1668.000	41.05	-12.95	54.00	52.92	25.92	1.55	39.34	Average	---	---
1	4918.000	45.03	-8.97	54.00	49.53	33.17	2.48	40.15	Average	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1662.000	42.97	-11.03	54.00	54.87	25.90	1.54	39.34	Average	---	---
2	1998.000	46.94	-7.06	54.00	57.67	27.40	1.52	39.65	Average	---	---
3	2996.000	44.05	-9.95	54.00	51.08	30.09	2.28	39.40	Average	---	---
1	4884.000	45.03	-8.97	54.00	49.55	33.11	2.51	40.14	Average	---	---



Test Mode	Mode 2 CH78	Temperature	22 deg. C	Tested By	Wayne Hsu
Freq. Range	1GHz~25GHz	Humidity	50%		

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1000.000	49.26	-4.74	54.00	63.19	24.20	1.11	39.24	Average	105	189
2	1166.000	43.94	-10.06	54.00	57.42	24.52	1.22	39.22	Average	---	---
3	1326.000	42.24	-11.76	54.00	55.28	24.81	1.35	39.20	Average	---	---

(B) Polarization: Vertical


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1000.000	42.66	-11.34	54.00	56.59	24.20	1.11	39.24	Average	---	---
2	1662.000	43.86	-10.14	54.00	55.76	25.90	1.54	39.34	Average	---	---
3	2004.000	47.11	-6.89	54.00	57.80	27.42	1.54	39.65	Average	---	---
1	4958.000	47.75	-6.25	54.00	52.21	33.25	2.44	40.15	Average	---	---

5.8.5 Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

Mode 1

FRONT VIEW

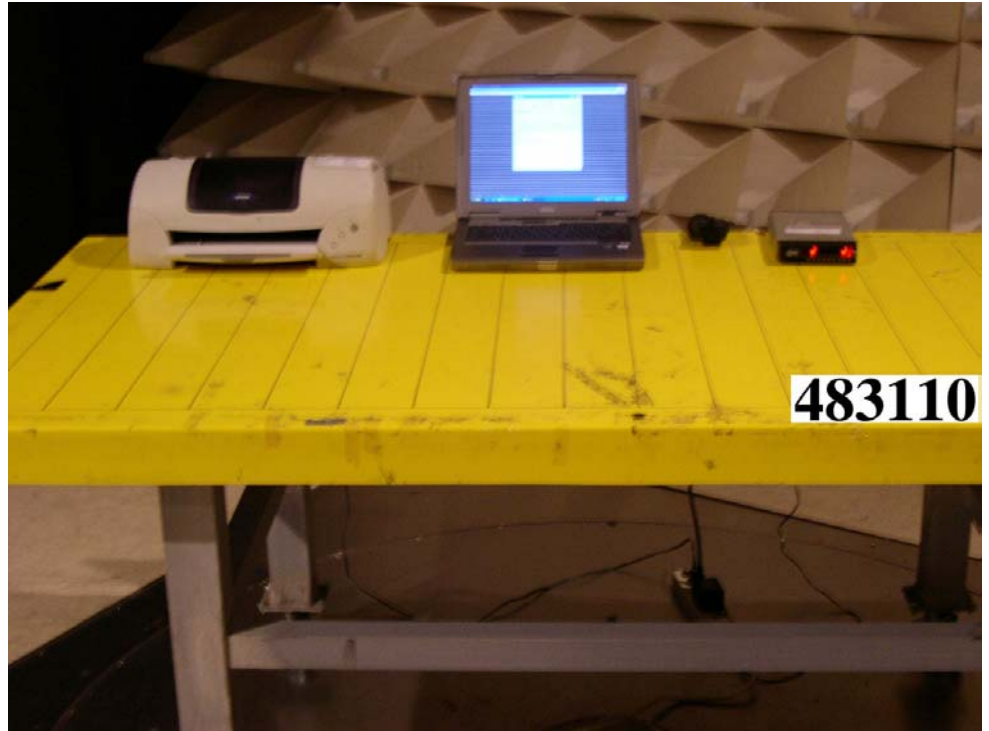


REAR VIEW




Mode 2

FRONT VIEW

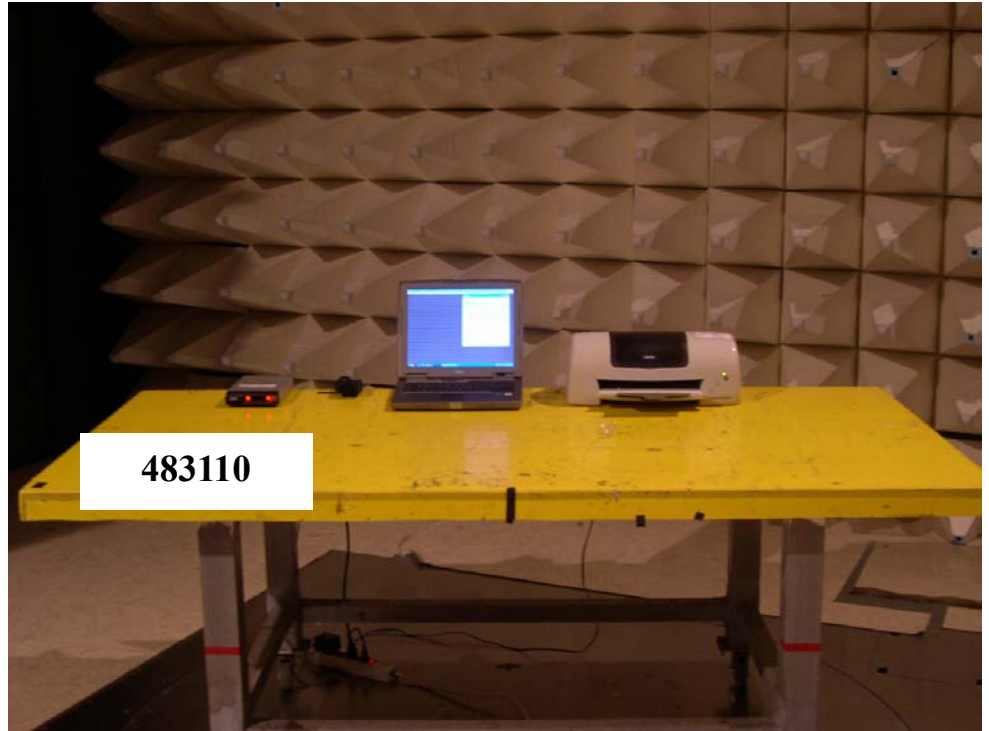

REAR VIEW

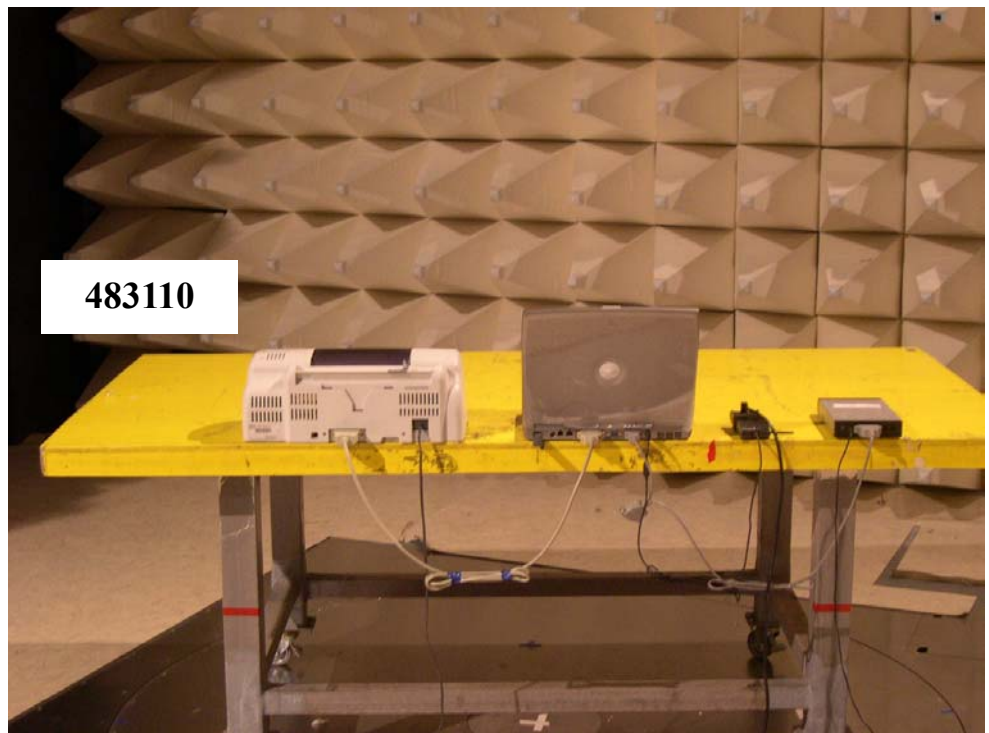



5.9. Antenna Requirements

5.9.1 Standard Applicable

47 CFR Part15 Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

47 CFR Part15 Section 15.247 (b):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.9.2 Antenna Connector Used in this Product

The maximum Gain antenna used in this product is printed antenna and chip antenna without antenna connector.



6. List of Measuring Equipments Used

	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
1	EMC Receiver	R&S	ESCS 30	100174	9 KHz – 2.75 GHz	Feb. 16, 2004	Conduction (CO04-HY)
2	LISN	MessTec	NNB-2/16Z	2001/004	9 KHz – 30 MHz	Jun. 09, 2004	Conduction (CO04-HY)
3	LISN (Support Unit)	MessTec	NNB-2/16Z	99041	9 KHz – 30 MHz	Apr. 27, 2004	Conduction (CO04-HY)
4	EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
5	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2004	Radiation (03CH03-HY)
6	Spectrum analyzer	R&S	FSP40	100004	9KHZ~40GHz	Aug. 22, 2004	Radiation (03CH03-HY)
7	Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Nov. 05, 2003	Radiation (03CH03-HY)
8	Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz –200MHz	Jul. 28, 2004	Radiation (03CH03-HY)
9	Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz -1GHz	Jul. 28, 2004	Radiation (03CH03-HY)
10	RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Dec. 03, 2003	Radiation (03CH03-HY)
11	Amplifier	MITEQ	AFS44	849984	100MHz~26.5GHz	Mar. 26, 2004	Radiation (03CH03-HY)
12	Horn Antenna	EMCO	3115	6821	1GHz – 18GHz	Sep. 12, 2003	Radiation (03CH03-HY)
13	Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
14	Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
15	Horn Antenna	Schwarzbeck	BBHA9170	154	15GHz~40GHz	Jun. 09, 2004	Radiation (03CH03-HY)
16	RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Dec. 05, 2003	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year.



	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
17	Spectrum analyzer	R&S	FSP7	838858/014	9KHZ~7GHZ	Sep. 03, 2003	Conducted (TH01-HY)
18	Power meter	R&S	NRVS	100967	DC~40GHz	Mar. 02, 2004	Conducted (TH01-HY)
19	Power sensor	R&S	NRV-Z51	100666	DC~40GHz	Mar 18, 2004	Conducted (TH01-HY)
20	Power Sensor	R&S	NRV-Z32	836953/060	30MHz-6GHz	Mar. 11, 2004	Conducted (TH01-HY)
21	AC power source	G.W.	GPC-6030D	C671845	DC 1V~60V	Nov. 06, 2003	Conducted (TH01-HY)
22	Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2003	Conducted (TH01-HY)
23	RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz~7GHz	Jan. 01, 2004	Conducted (TH01-HY)
24	RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz~1GHz	Jan. 01, 2004	Conducted (TH01-HY)

※ Calibration Interval of instruments listed above is one year.

APPENDIX A. Photographs of EUT






483109





483109

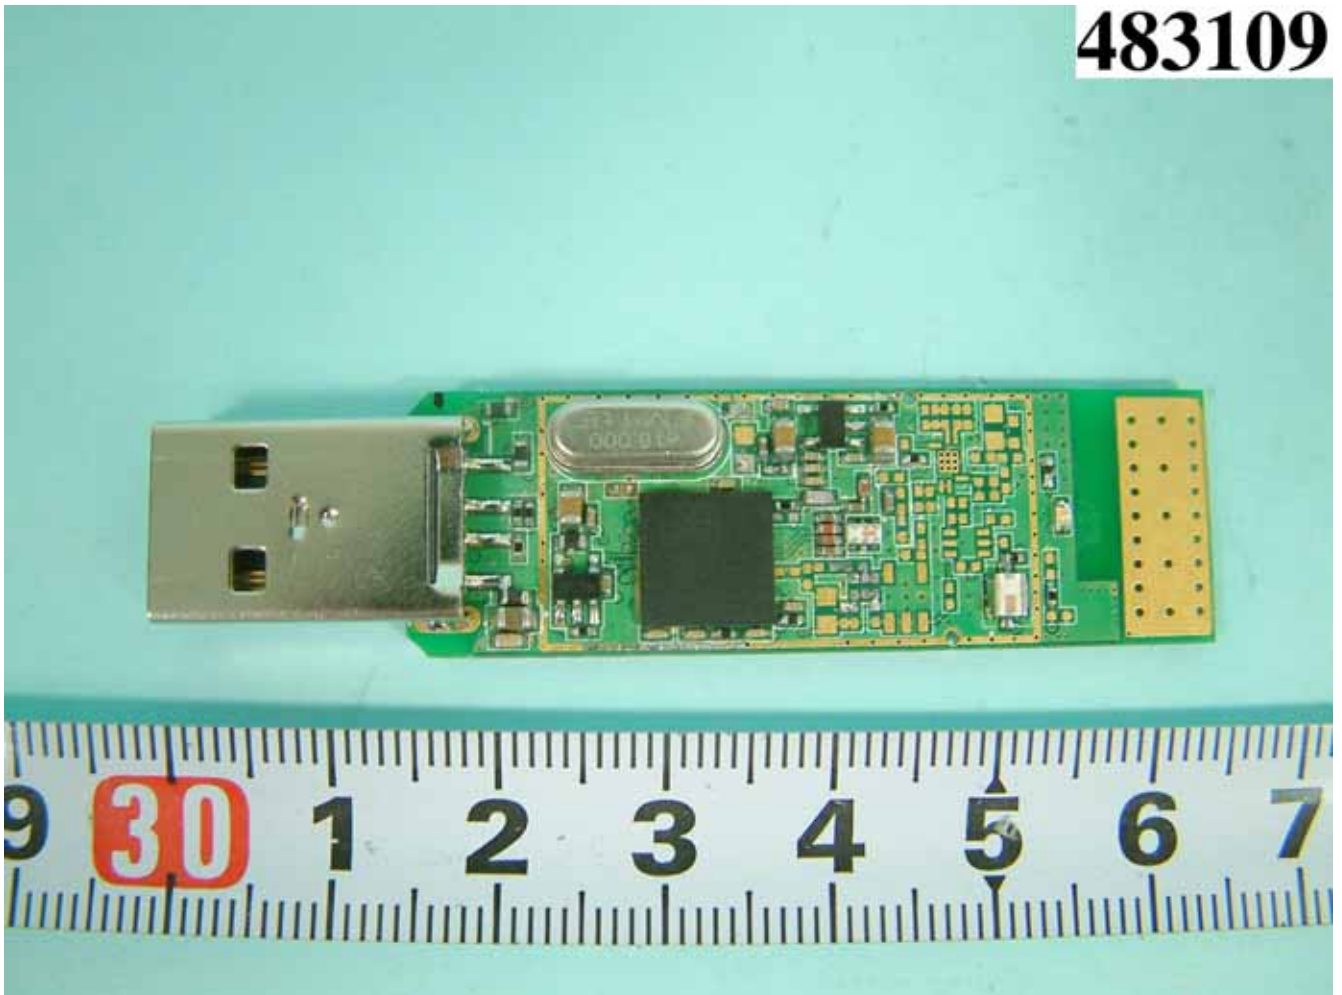

APPENDIX A. Photographs of EUT



