



**SGS-CSTC Standards Technical Services
(Shanghai) Co., Ltd.**

588 West Jindu Road, Songjiang District, Shanghai, China
 Telephone: +86 (0) 21 6191 5666
 Fax: +86 (0) 21 6191 5678
 ee.shanghai@sgs.com

Report No.: SHEM140800197403
 Page: 1 of 7

1 Cover Page

FCC MPE REPORT

Application No.:	SHEM1408001974RF
Applicant:	iHealth Lab Inc.
FCC ID:	SLRAM3S
IC ID:	10913A-AM3S
Equipment Under Test (EUT):	
NOTE: The following sample(s) submitted was/were identified on behalf of the client as	
Product Name:	Wireless Activity and Sleep Tracker
Model No.(EUT):	AM3S
Standards:	FCC Rules 47 CFR §2.1093 KDB447498 D01 General RF Exposure Guidance
Date of Receipt:	August 06, 2014
Date of Test:	August 28, 2014 to August 29, 2014
Date of Issue:	September 13, 2014
Test Result:	Pass*

* In the configuration tested, the EUT complied with the standards specified above.



Tony Wu
E&E Section Manager

SGS-CSTC (Shanghai) Co., Ltd.




The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00	/	September 13, 2014	/	Original

Authorized for issue by:			
Engineer		Eddy Zong _____ Print Name	 _____
Clerk		Susie Liu _____ Print Name	 _____
Reviewer		Keny Xu _____ Print Name	 _____

3 Contents

	Page
1 COVER PAGE	1
2 VERSION.....	2
3 CONTENTS.....	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION	4
4.2 GENERAL DESCRIPTION OF E.U.T.	4
4.3 DETAILS OF E.U.T.	4
4.4 TEST LOCATION.....	5
4.5 TEST FACILITY	5
5 TEST STANDARDS AND LIMITS	6
6 MEASUREMENT AND CALCULATION	7
6.1 MAXIMUM TRANSMIT POWER	7
6.2 MPE CALCULATION	7
7 EUT CONSTRUCTIONAL DETAILS.....	7

4 General Information

4.1 Client Information

Applicant: iHealth Lab Inc.
Address of Applicant: 719 N.Shoreline Blvd, Mountain View, CA94043, USA
Manufacturer: iHealth Lab Inc.
Address of Manufacturer: 719 N.Shoreline Blvd, Mountain View, CA94043, USA
Factory: Andon Health Co. Ltd
Address of Factory: No.3 JinPing Street YaAn Road Nankai District Tianjin, China

4.2 General Description of E.U.T.

Product Description: Portable product
Rechargeable Batteries: DC 3.7V Li-on Rechargeable Battery
Remark: Supply the EUT with fully charged battery during the testing.

4.3 Details of E.U.T.

Operation Frequency: 2402MHz-2480MHz
Bluetooth Version: 4.0 single mode
Modulation Type: GFSK
Number of Channel: 40
Antenna Type: Chip
Antenna Gain: 5dBi

4.4 Test Location

All tests were performed at SGS E&E EMC lab

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

No.588 West Jindu Road, Songjiang District, Shanghai, China. 201612.

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2017-07-14.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2015-02-22.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1. Expiry Date: 2017-06-18.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868 and C-4336 respectively. Date of Registration: 2012-05-29. Date of Expiry: 2015-05-28.

5 Test Standards and Limits

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table. The equation and threshold in KDB447498 D01 section 4.3.1 must be applied to determine SAR test exclusion.


MHz	5	10	15	20	25	30	35	40	45	50	mm
150	39	77	116	155	194	232	271	310	349	387	(mW)
300	27	55	82	110	137	164	192	219	246	274	
450	22	45	67	89	112	134	157	179	201	224	
835	16	33	49	66	82	98	115	131	148	164	
900	16	32	47	63	79	95	111	126	142	158	
1500	12	24	37	49	61	73	86	98	110	122	
1900	11	22	33	44	54	65	76	87	98	109	
2450	10	19	29	38	48	57	67	77	86	96	
3600	8	16	24	32	40	47	55	63	71	79	
5200	7	13	20	26	33	39	46	53	59	66	
5400	6	13	19	26	32	39	45	52	58	65	
5800	6	12	19	25	31	37	44	50	56	62	

6 Measurement and Calculation

6.1 Maximum transmit power

EUT Operation: Test in fixing frequency operating mode at lowest, middle and highest frequency.

Test Configuration:

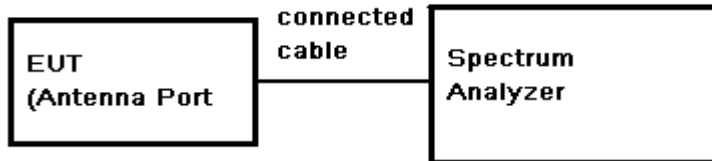

Test Data:

Test mode	Channel	Reading Peak Power (dBm)	Cable Loss (dB)	Output Peak Power (dBm)	Output Peak Power (mW)	Peak Power Limit (dBm)	Result
GFSK	Low	-5.63	0.5	-5.13	0.31	30	PASS
	Mid	-7.62	0.5	-7.12	0.19	30	PASS
	High	-9.29	0.5	-8.79	0.13	30	PASS

6.2 MPE Calculation

The Max Conducted Peak Output Power is 0.31mW in High channel. The best case gain of the antenna is 5dBi. 5dBi logarithmic terms convert to numeric result is nearly 3.16

According to the formula. calculate the EIRP test result:

$$\text{EIRP} = P \times G = 0.31 \text{ mW} \times 3.16 = 0.98\text{mW} < 10\text{mW}$$

So the SAR report is not required.

7 EUT Constructional Details

Refer to the < AM3S _External Photos > & < AM3S _Internal Photos>.

--End of the Report--