
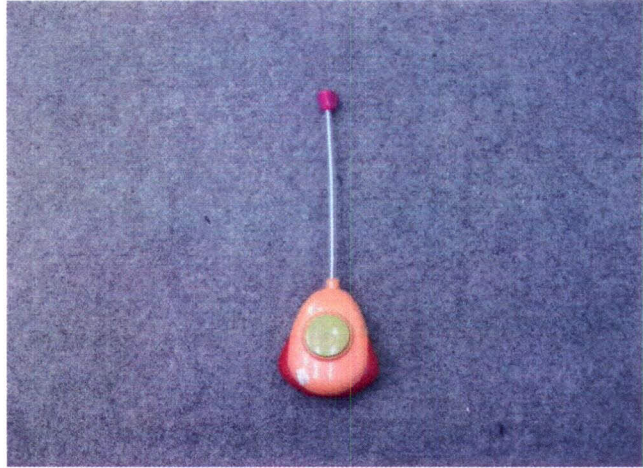



TEST REPORT No.: (5213)198-0647

## TEST REPORT

To:	<b>MAISON JOSEPH BATTAT LTD.</b>	To:	-
Attn:	Joseph Battat	Attn:	-
Address:	8440 Darnley Road, Montreal Quebec, H4T 1M4	Address:	-
Fax:	514-738-8560	Fax:	-
E-mail:	<a href="mailto:joe.batta@battatco.com">joe.batta@battatco.com</a>	E-mail:	-
Folder No.:			--
Factory Name:			--
Location:			--
Product:	Wheeee-Mote Control Assortment -- UFWhoa! Model No.: BX1236		
	Sample No:	(5213)198-0647	
	Test Date(s):	July 24, 2013	
	Test Requested:	FCC Part 15 – 2011	
	Test Method:	ANSI C63.4 – 2009	
	FCC ID:	SLURF27BX1236	
<p>The results given in this report are related to the tested specimen of the described electrical apparatus.</p> <p><b>CONCLUSION:</b> The submitted sample was found to <u>COMPLY</u> with requirement of FCC Part 15 Subpart C.</p> <p>Authorized Signature:</p>			
			
Reviewed by: Keith Yeung		Approved by: Steven Tsang	
Date: July 31, 2013		Date: July 31, 2013	



**TEST REPORT No.: (5213)198-0647**

## Test Result Summary

EMISSION TEST			
Test requirement: FCC Part 15 - 2011			
Test Condition	Test Method	Test Result	
		Pass	Failed
Radiated Emission Test, 9kHz to 1GHz	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### Report Revision & Sample Re-submit History:

--



**TEST REPORT No.: (5213)198-0647**

## **Test Laboratory & Test Instruments List**

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. An Open Area Test Site and Full Anechoic Chamber (FCC Listed Site, Registration No. 642151) are set up for investigation and located at:

### **BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE**

No. 2106-2107, 21/F., Westin Centre,  
26 Hung To Road,  
Kwun Tong, Kowloon,  
Hong Kong

## **Test Instrument List**

### **Radiated Emission**

<b>EQUIPMENT</b>	<b>MANUFACTURER</b>	<b>MODEL NO.</b>	<b>SERIAL NO.</b>	<b>CALIBRATION DUE</b>
EMI TEST RECEIVER	R&S	ESCI	100379	28-JAN-2014
LOOP ANTENNA	ETS-LINDGREN	6502	00102266	14-AUG-2013
BILOG ANTENNA	SCHAFFNER	CBL6112D	25229	12-SEP-2013
OPEN AREA TEST SITE	BVCPS	N/A	N/A	08-JUL-2014
ANECHOIC CHAMBER	ALBATROSS	M-CDC	80374004499B	05-FEB-2014
COAXIAL CABLE	SUHNER	RG214	N/A	24-SEP-2013

#### **Remarks: -**

N/A: Not Applicable or Not Available

The measurement instrumentation uncertainty would be taking into consideration on each of the test result

TEST REPORT No.: (5213)198-0647

## Equipment Under Test [EUT]

### Description of Sample:

Product: Wheeee-Mote Control Assortment – UFWhoa!  
Model No.: BX1236  
Additional Model: --  
Additional Model Information: --  
Power Supply: 9Vd.c. ("6F22" size battery x 1)

### Description of EUT Operation:

The Equipment Under Test (EUT) is a MAISON JOSEPH BATTAT LTD. of Radio Control toy. The transmitter is 1 button transmitter and operating at 27.159MHz. The EUT continues to transmit while button being pressed, Modulation by IC, and type is pulse modulation. The transmitter has different control:

1. button – control sound, light and motor

### Antenna Requirement (Section 15.203)

The EUT is use of a permanently antenna. The antenna consists of 17cm long metal spring covered with rubber. The antenna is not replaceable or user serviceable. The requirements of S15.203 are met. There are no deviations or exceptions to the specifications.

#### Photo of Antenna



**TEST REPORT No.: (5213)198-0647**

**Test Results**

**Radiated Emissions (Fundamental)**

Test Requirement: FCC Part 15 Section 15.227  
 Test Method: ANSI C63.4  
 Test Date(s): 2013-07-24  
 Temperature: 28.0 °C  
 Humidity: 87.0 %  
 Atmospheric Pressure: 100.1 kPa  
 Mode of Operation: Transmission mode  
 Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

**Test Method:**


Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Location: The Roof, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

**Test Setup: Open Area Test Site**

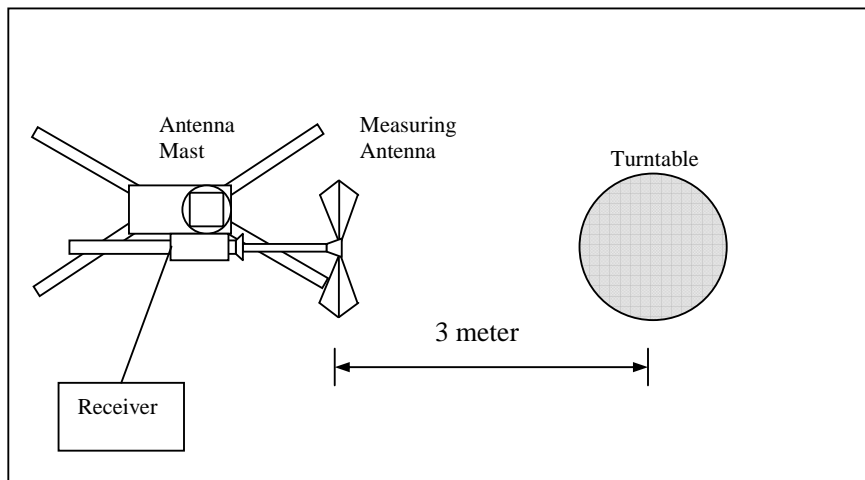



**TEST REPORT No.: (5213)198-0647**

**Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:**

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [ $\mu\text{V}/\text{m}$ ]	Field Strength of Fundamental Emission [Average] [ $\mu\text{V}/\text{m}$ ]
26.96 – 27.28	100,000 (100 dB $\mu\text{V}/\text{m}$ )	10,000 (80 dB $\mu\text{V}/\text{m}$ )

**Measurement Data**

**Test Result of (Transmission mode): PASS**

**Detection mode: Peak**

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu\text{V}/\text{m}$ )	Limit at 3m (dB $\mu\text{V}/\text{m}$ )	Margin (dB)
27.159	V/0°	11.0	44.7	100	-55.3

**Detection mode: # Average**

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu\text{V}/\text{m}$ )	Limit at 3m (dB $\mu\text{V}/\text{m}$ )	Margin (dB)
27.159	V/0°	11.0	**38.4	80	-41.6

**# For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.**

**\*\* Duty Cycle Correction =  $20\text{Log}(0.484) = -6.3\text{dB}$**

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 100KHz  
VBW = 300KHz





## TEST REPORT No.: (5213)198-0647

### Radiated Emissions (9kHz – 1GHz)

Test Requirement: FCC Part 15 Section 15.209  
Test Method: ANSI C63.4  
Test Date(s): 2013-07-24  
Temperature: 28.0 °C  
Humidity: 87.0 %  
Atmospheric Pressure: 100.1 kPa  
Mode of Operation: Transmission mode  
Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

### Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu$ V/m]
1.705-30	300
30-88	100
88-216	150
216-960	200
Above960	500



**TEST REPORT No.: (5213)198-0647**

**Measurement Data**

**Test Result of (Transmission mode): PASS**

**Detection mode: Quasi-Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
54.318	H	8.2	28.5	40.0	-11.5
81.477	H	7.1	24.7	40.0	-15.3
108.636	H	12.6	22.3	43.5	-21.2
135.795	H	12.2	21.0	43.5	-22.5
162.954	H	9.6	21.0	43.5	-22.5
190.113	H	9.6	19.9	43.5	-23.6
217.272	H	10.3	21.2	46.0	-24.8
244.431	H	12.3	22.0	46.0	-24.0
271.590	H	13.2	22.9	46.0	-23.1
298.749	H	13.6	24.2	46.0	-21.8

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
54.318	V	8.2	28.8	40.0	-11.2
81.477	V	7.1	24.6	40.0	-15.4
108.636	V	12.6	22.5	43.5	-21.0
135.795	V	12.2	20.9	43.5	-22.6
162.954	V	9.6	21.3	43.5	-22.2
190.113	V	9.6	19.6	43.5	-23.9
217.272	V	10.3	21.0	46.0	-25.0
244.431	V	12.3	22.3	46.0	-23.7
271.590	V	13.2	22.8	46.0	-23.2
298.749	V	13.6	24.5	46.0	-21.5

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz  
VBW = 120KHz





**TEST REPORT No.: (5213)198-0647**

**26dB Bandwidth of Fundamental Emission**

Test Requirement: FCC 47 CFR 15.227  
 Test Method: ANSI C63.4  
 Test Date(s): 2013-07-24  
 Temperature: 28.0 °C  
 Humidity: 87.0 %  
 Atmospheric Pressure: 100.1 kPa  
 Mode of Operation: Transmission mode  
 Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

**Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

**Limits for 26dB Bandwidth of Fundamental Emission:**

Frequency [MHz]	26dB Bandwidth [KHz]	Limits [MHz]
27.159	23.68	within 26.96 – 27.28




BUREAU VERITAS

TEST REPORT No.: (5213)198-0647

Measurement Data

Test Result of 26dB Bandwidth of Fundamental Emission: PASS

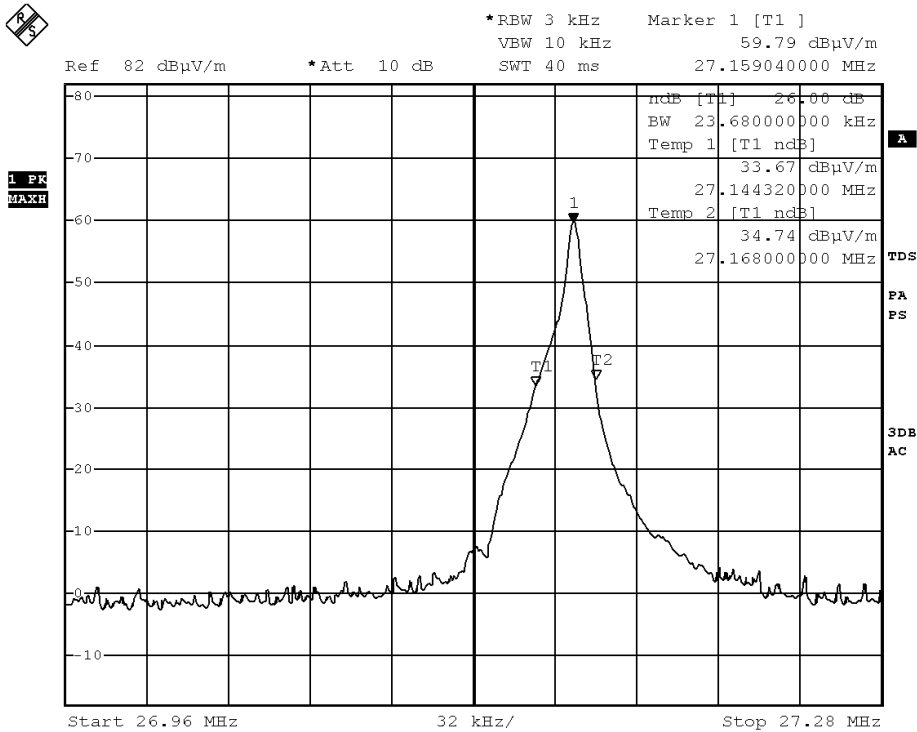

Date: 24.JUL.2013 10:02:06



**TEST REPORT No.: (5213)198-0647**

### **Duty Cycle Correction During 100msec:**

Each function key sends a different series of characters, but each packet period (99.2msec) never exceeds a series of 60 (0.8msec) pulses. Assuming any combination of short and long pulses maybe obtained due to encoding the worst case transmit duty cycle would be considered (0.8msec x 60) per 99.2msec = 48.4% duty cycle. Figure A through B shows the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction =  $20\text{Log}(0.484) = -6.3\text{dB}$


The following figures [Figure A to Figure B] show the characteristics of the pulse train for one of these functions.



BUREAU VERITAS


TEST REPORT No.: (5213)198-0647

Figure A [Pulse Train]

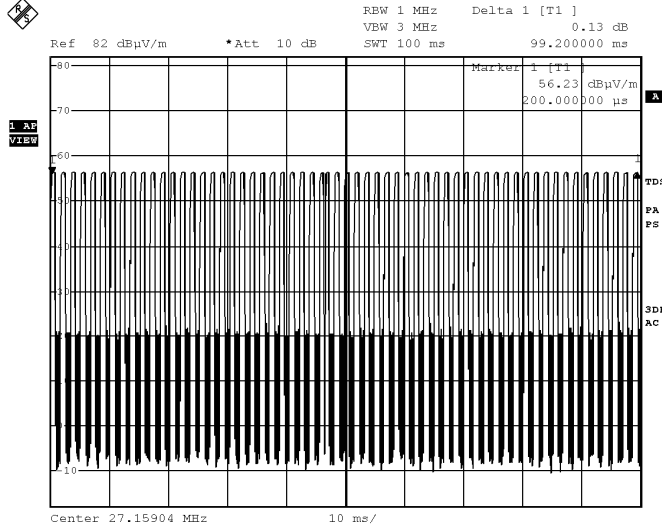

Date: 24.JUL.2013 10:03:39

Figure B [Pulse Train]

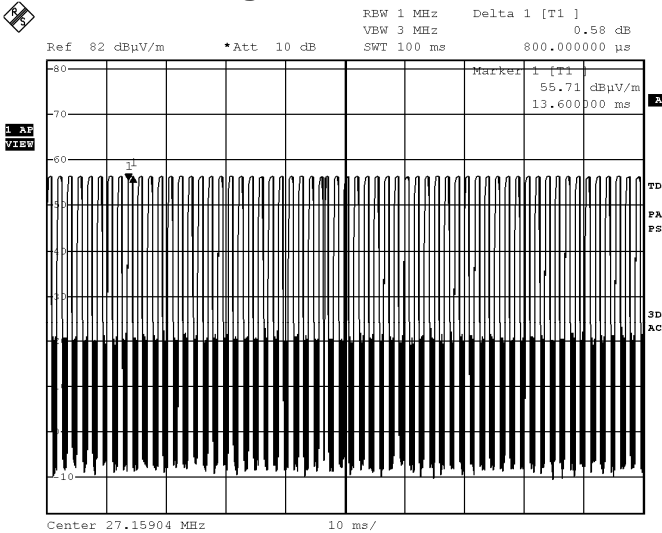

Date: 24.JUL.2013 10:04:07

**TEST REPORT No.: (5213)198-0647**

**Photographs of EUT**

**Front View of the product**



**Rear View of the product**



**Battery compartment**



**Battery Cover**







**TEST REPORT No.: (5213)198-0647**

**Measurement of Radiated Emission Test Set Up**



**\*\*\*\*\* End of Report \*\*\*\*\***