

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Intrasonic Technology, Inc.

RETRO-MyDoor

Model Number: MyDoor-B

Additional Model: MyDoor-RB, MyDoor-SB, MyDoor-WB, R-MyDoor-B,

R-MyDoor-RB, R-MyDoor-SB, R-MyDoor-WB

FCC ID: SLV-MYDOOR

Prepared for:	Intrasonic Technology, Inc.
	9525 FOREST VIEW STREET, DALLAS, TEXAS 75243, USA
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808


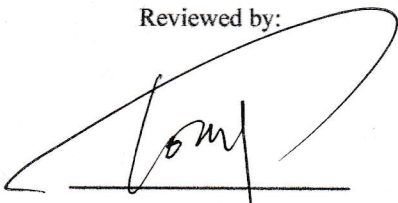

Report Number:	ESTE-R1905029
Date of Test:	Apr. 09~May 07, 2019
Date of Report:	May 10, 2019

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
2. SUMMARY OF TEST.....	6
2.1. Summary of test result.....	6
2.2. Test Facilities.....	7
2.3. Measurement uncertainty.....	8
2.4. Assistant equipment used for test.....	8
2.5. Block Diagram.....	8
2.6. Test Mode.....	9
2.7. Duty Cycle.....	10
2.8. Channel List.....	13
2.9. Test Equipment List.....	14
3. 6DB BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	15
3.1. Limit.....	15
3.2. Test Setup.....	15
3.3. Spectrum Analyzer Setting.....	15
3.4. Test Procedure.....	15
3.5. Test Result.....	16
4. MAXIMUM AVERAGE OUTPUT POWER.....	33
4.1. Limit.....	33
4.2. Test Setup.....	33
4.3. Spectrum Analyzer Setting.....	33
4.4. Test Procedure.....	33
4.5. Test Result.....	34
5. POWER SPECTRAL DENSITY.....	43
5.1. Limit.....	43
5.2. Test Setup.....	43
5.3. Spectrum Analyzer Setting.....	43
5.4. Test Procedure.....	43
5.5. Test Result.....	44
6. CONDUCTED BAND EDGE.....	53
6.1. Limit.....	53
6.2. Test Setup.....	53
6.3. Spectrum Analyzer Setting.....	53
6.4. Test Procedure.....	53
6.5. Test Result.....	54
7. CONDUCTED SPURIOUS EMISSIONS.....	55
7.1. Limit.....	55
7.2. Test Setup.....	55
7.3. Spectrum Analyzer Setting.....	55
7.4. Test Procedure.....	55
7.5. Test Result.....	56

- 8. RADIATED SPURIOUS EMISSIONS AND BAND EDGE 58
 - 8.1. Limit 58
 - 8.2. Test Setup 59
 - 8.3. Spectrum Analyzer Setting 60
 - 8.4. Test Procedure 61
 - 8.5. Test Result 62
- 9. AC POWER LINE CONDUCTED EMISSIONS 74
 - 9.1. Limit 74
 - 9.2. Test Setup 74
 - 9.3. Spectrum Analyzer Setting 74
 - 9.4. Test Procedure 74
 - 9.5. Test Result 75
- 10. ANTENNA REQUIREMENTS 79
 - 10.1. Limit 79
 - 10.2. Test Result 79
- 11. TEST SETUP PHOTO 80
- 12. PHOTOS OF EUT 82

EST Technology Co., Ltd.

Applicant:	Intrasonic Technology, Inc.		
Address:	9525 FOREST VIEW STREET, DALLAS, TEXAS 75243, USA		
Manufacturer:	Intrasonic Technology, Inc.		
Address:	9525 FOREST VIEW STREET, DALLAS, TEXAS 75243, USA		
E.U.T:	RETRO-MyDoor		
Model Number:	MyDoor-B		
Additional Model:	MyDoor-RB, MyDoor-SB, MyDoor-WB, R-MyDoor-B, R-MyDoor-RB, R-MyDoor-SB, R-MyDoor-WB Note: Color of face plates on both product name, MyDoor is an standalone unit and RETRO-MyDoor is connected to existing system RETRO-M		
Power Supply:	DC 15V From Adapter Input AC 120V/60Hz DC 15V From Adapter Input AC 240V/60Hz		
Trade Name:	-----	Serial No.:	-----
Date of Receipt:	Apr. 09, 2019	Date of Test:	Apr. 09~May 07, 2019
Test Specification:	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
Test Result:	<p>The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p style="text-align: center;">This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p>		
		Date:	May 10, 2019
Prepared by:	Reviewed by:	Approved by:	
 _____ Ring / Assistant	 _____ Tony / Engineer	 _____ Ice-man Hu / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	RETRO-MyDoor
Model Number	:	MyDoor-B
Software Version	:	N/A
Hardware Version	:	N/A
Operation frequency	:	2412MHz~2462MHz 2422MHz~2452MHz
Number of channel	:	802.11b: 11 Channels 802.11g: 11 Channels 802.11n HT20: 11 Channels 802.11n HT40: 7 Channels
Max Output Power (AVG)	:	802.11b: 19.78dBm 802.11g: 19.10 dBm 802.11n HT20: 20.09 dBm 802.11n HT40: 19.51 dBm
Modulation Type	:	802.11b mode: DSSS(CCK,QPSK, BPSK) 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) 802.11n mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Sample Type	:	Prototype production

Note:

1. The antenna information for EUT.

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	2.5

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	6dB Bandwidth&99% Occupied Bandwidth	15.247(a)(2)	PASS
4	Maximum Average Output Power	15.247(b)(3)	PASS
5	Power Spectral Density	15.247(e)	PASS
6	Conducted Band Edge	15.247(d)	PASS
7	Conducted Spurious Emissions	15.247(d)	PASS
8	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
9	AC Power Line Conducted Emissions	15.207	PASS
10	Antenna requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

- EMC Lab : Certificated by CNAS, CHINA
Registration No.: L5288
Date of registration: November 13, 2017
- Certificated by FCC, USA
Designation Number: CN1215
Test Firm Registration Number: 722932
Date of registration: November 21, 2017
- Certificated by A2LA, USA
Registration No.: 4366.01
Date of registration: November 07, 2017
- Certificated by Industry Canada
CAB identifier No.: CN0035
Date of registration: January 04, 2019
- Certificated by VCCI, Japan
Registration No.: R-13663; C-14103
Date of registration: July 25, 2017
This Certificate is valid until: July 24, 2020
- Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018
- Certificated by TUV/PS, Shenzhen
Registration No.: SCN1017
Date of registration: January 27, 2011
- Certificated by Intertek ETL SEMKO
Registration No.: 2011-RTL-L2-64
Date of registration: April 28, 2011
- Certificated by Nemko, Hong Kong
Registration No.: 175193
Date of registration: May 4, 2011
- Name of Firm : EST Technology Co., Ltd.
- Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	±3.48dB
Uncertainty for spurious emissions test (30MHz-1GHz)	±4.60 dB(Polarize: H)
	±4.68 dB(Polarize: V)
Uncertainty for spurious emissions test (1GHz to 18GHz)	±4.96dB
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
1	Adapter	LG	LGSPS150150UL	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.8m	DC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into Bluetooth test mode by software before test.



(EUT: RETRO-MyDoor)

2.6. Test Mode

The test mode was selected for the final test as listed below.

Test Item	Mode	Date Rate	Test Channel
6dB Bandwidth&99% Occupied Bandwidth	IEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Maximum Average Output Power	IEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Power Spectral Density	IEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/ High
Conducted Band Edge	IEE 802.11b	1Mbps	Low/ High
	IEEE 802.11g	6Mbps	Low/ High
	IEEE 802.11n HT20	MCS0	Low/ High
	IEEE 802.11n HT40	MCS0	Low/ High
Conducted Spurious Emissions	IEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Spurious Emissions(Below 1GHz)	IEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Spurious Emissions(Above 1GHz)	IEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Band Edge	IEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
AC Power Line Conducted Emissions	IEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High

Note:

1. In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.


2.7. Duty Cycle

Temperature	25℃	Relative Humidity	55%	Test Voltage	120V/60Hz
Mode	Fre(MHz)	On time(ms)	Total Time(ms)	Duty Cycle	Duty Factor
802.11b	2437	0.98550	1.14200	86.30%	0.64
802.11g	2437	0.19565	0.37681	51.92%	2.85
802.11n HT20	2437	0.16667	0.35507	46.94%	3.28
802.11n HT40	2437	0.09565	0.29275	32.67%	4.86


Note:

1. If duty cycle $< 98\%$, the conducted average output power and average power spectral density should be add duty factor.
2. If duty cycle $\geq 98\%$, the EUT is consider to be transmitting continuously, the conducted average output power and average power spectral density no need to add duty factor(consider to be zero).
3. The conducted peak output power and peak power spectral density no need to consider duty factor.
4. The on-time time is transmission duration(T).


802.11b 2437MHz

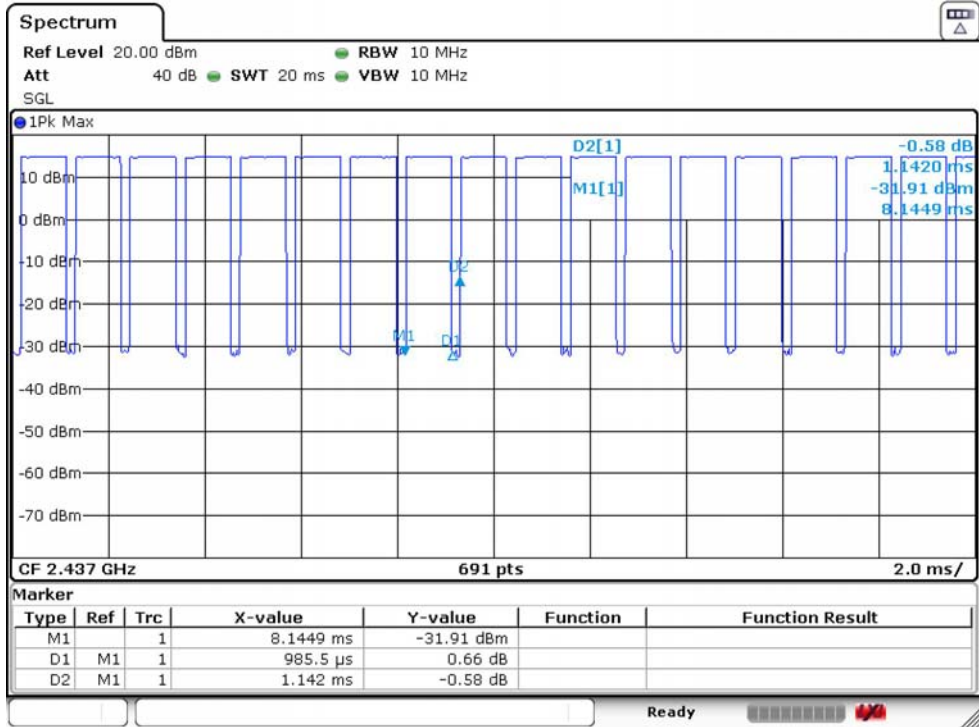


802.11g 2437MHz

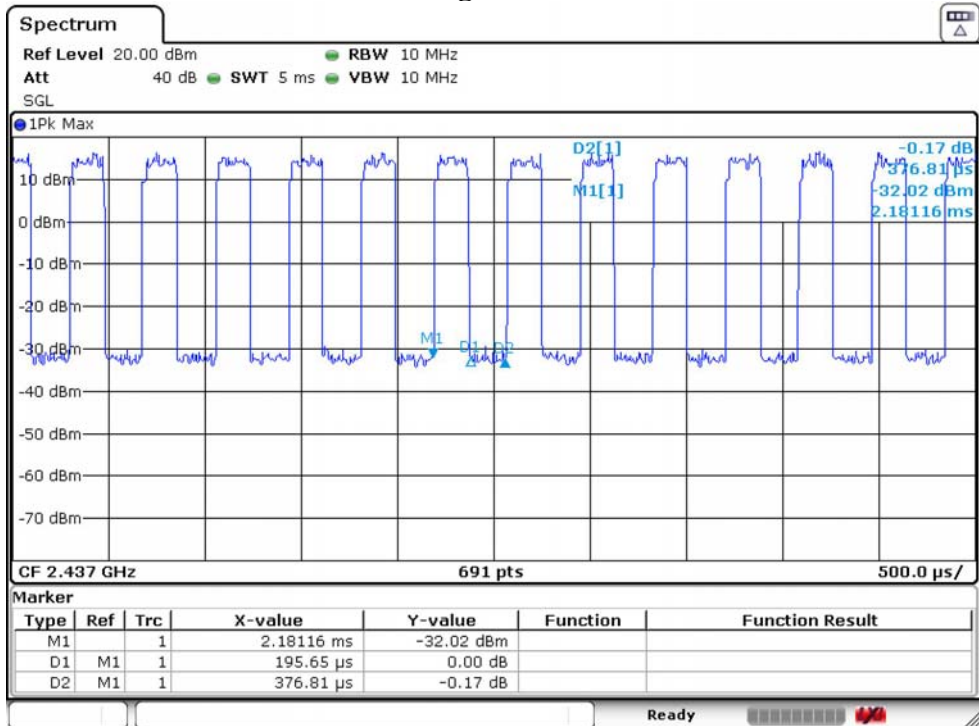

802.11n HT20 2437MHz

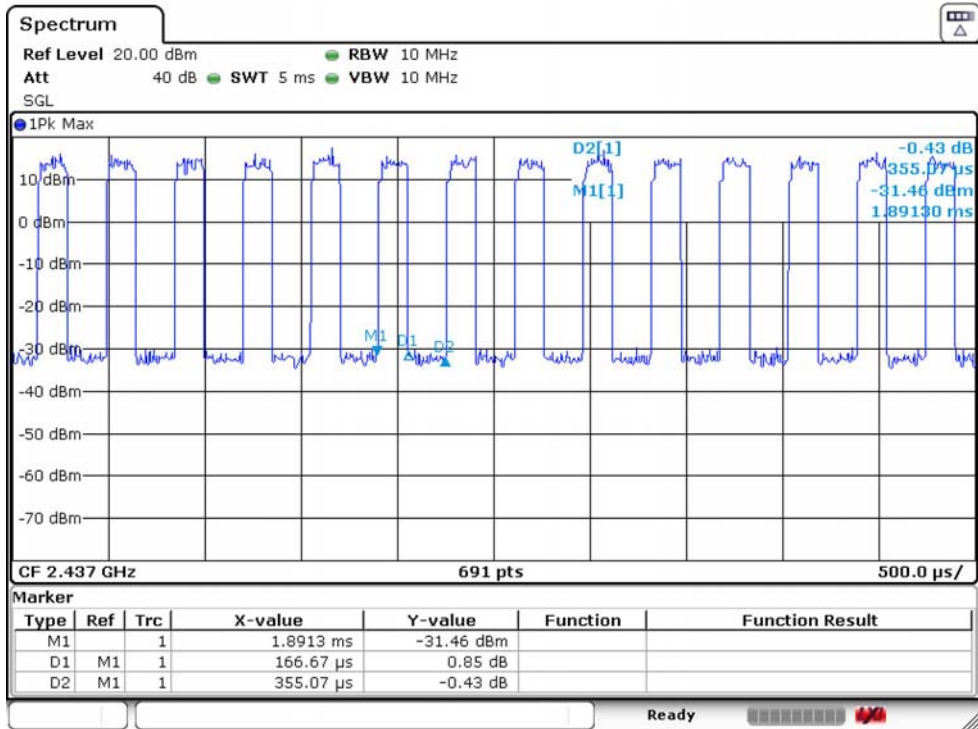

802.11n HT40 2437MHz

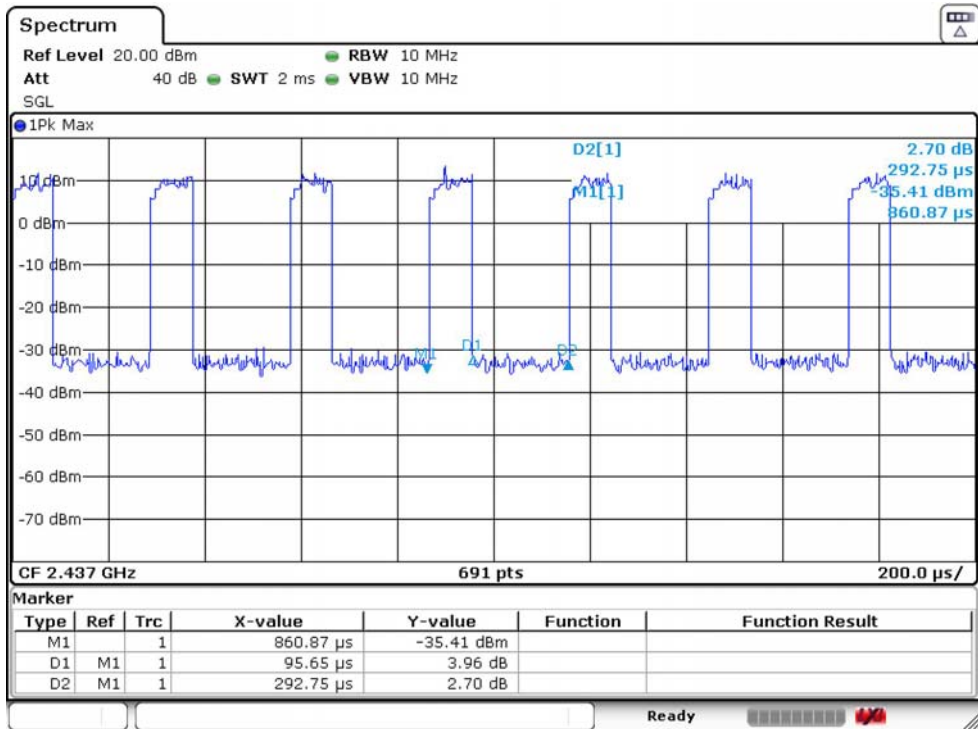

2.8. Channel List

802.11b/802.11g/802.11n HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		
802.11n HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442		
5	2432	8	2447		

2.9. Test Equipment List

2.9.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	CEPREI	June 15,18	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	101260	CEPREI	June 15,18	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.9.2. For radiated emission test(9 kHz-30MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	101780	CEPREI	June 15,18	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	1519B-088	N/A	Aug. 01,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.9.3. For radiated emissions test (30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	101780	CEPREI	June 15,18	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.9.4. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA9120D	BBHA9120 D1002	CEPREI	June 18,18	1 Year
Horn Antenna	SCHWARZB ECK	BBHA9170	BBHA9170 242	CEPREI	June 18,18	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	9718-212	CEPREI	June 15,18	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV	103173	CEPREI	June 15,18	1 Year
PSA Series Spertrum Analyzer	Agilent	E4447A	MY501800 31	CEPREI	June 15,18	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

2.9.5. For connect EUT antenna terminal test


Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde & Schwarz	FSV	103173	CEPREI	June 15,18	1 Year

3. 6dB BANDWIDTH & 99% OCCUPIED BANDWIDTH

3.1. Limit

Systems using digital modulation techniques operate in the 2400-2483.5 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2. Test Setup

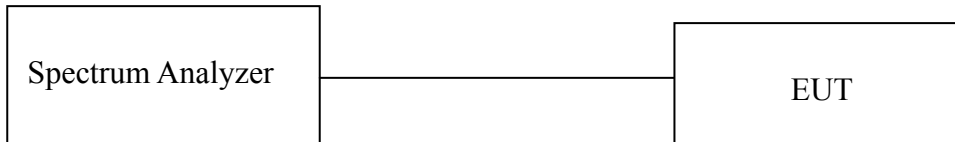

3.3. Spectrum Analyzer Setting

6dB Bandwidth

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth

Spectrum Parameters	Setting
RBW	300KHz(20MHz Bandwidth mode)/1MHz(40MHz Bandwidth mode)
VBW	1MHz(20MHz Bandwidth mode)/3MHz(40MHz Bandwidth mode)
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

3.4. Test Procedure

For 6dB Bandwidth Measurement :

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 3.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.

For 99% Occupied Bandwidth Measurement :


- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 3.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the 99% power bandwidth function to measure bandwidth.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.

3.5. Test Result


Temperature	25°C	Relative Humidity	55%	Test Voltage	120V/60Hz
Mode	Freq (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	6dB BW Limit (MHz)	Result
802.11b	2412	9.84	12.16	≥ 0.5	PASS
	2437	9.84	12.10	≥ 0.5	PASS
	2462	9.84	12.10	≥ 0.5	PASS
802.11g	2412	16.56	16.73	≥ 0.5	PASS
	2437	16.56	16.73	≥ 0.5	PASS
	2462	16.56	16.79	≥ 0.5	PASS
802.11n HT20	2412	17.37	17.71	≥ 0.5	PASS
	2437	17.37	17.77	≥ 0.5	PASS
	2462	17.37	17.71	≥ 0.5	PASS
802.11n HT40	2422	36.35	36.82	≥ 0.5	PASS
	2437	36.58	36.93	≥ 0.5	PASS
	2452	36.58	36.93	≥ 0.5	PASS

6dB Bandwidth


802.11b 2412MHz

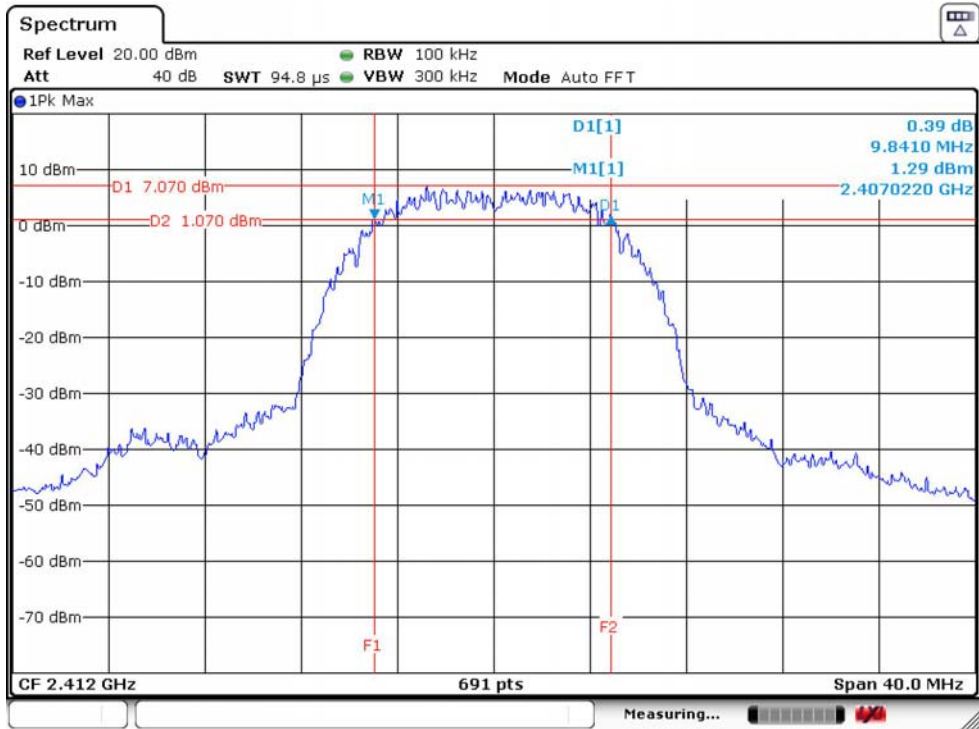


802.11b 2437MHz

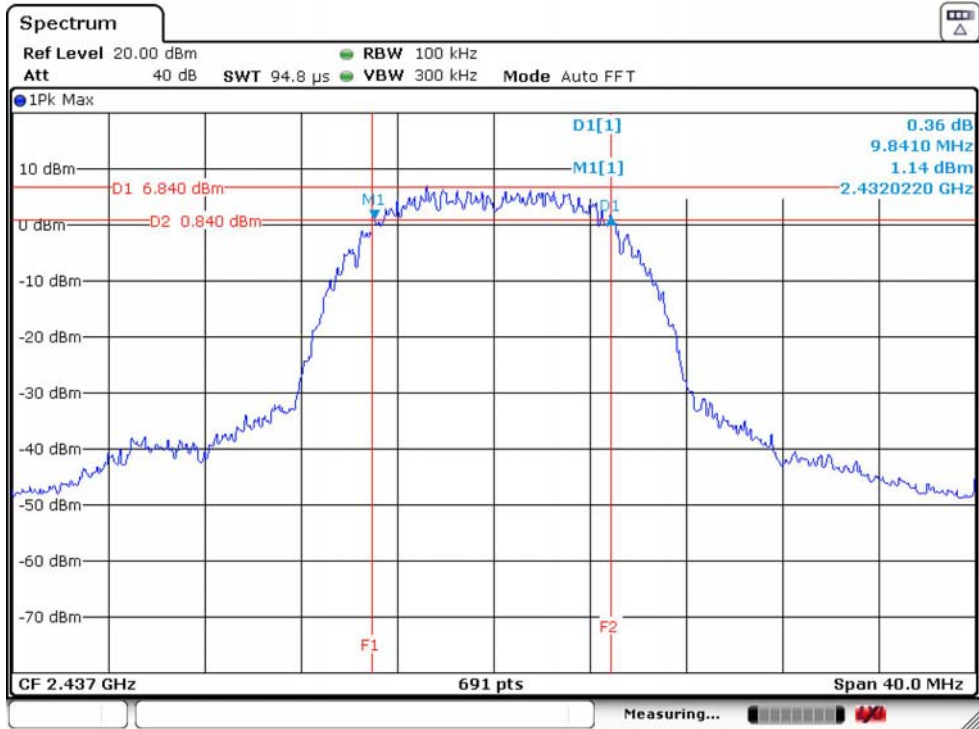


802.11b 2462MHz

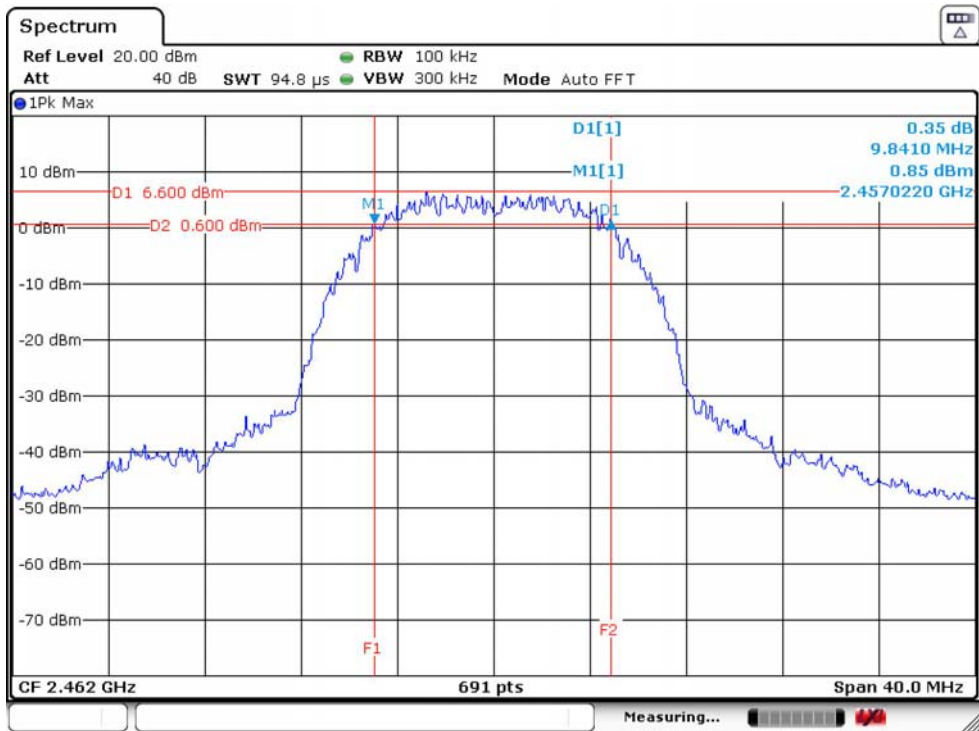


802.11g 2412MHz

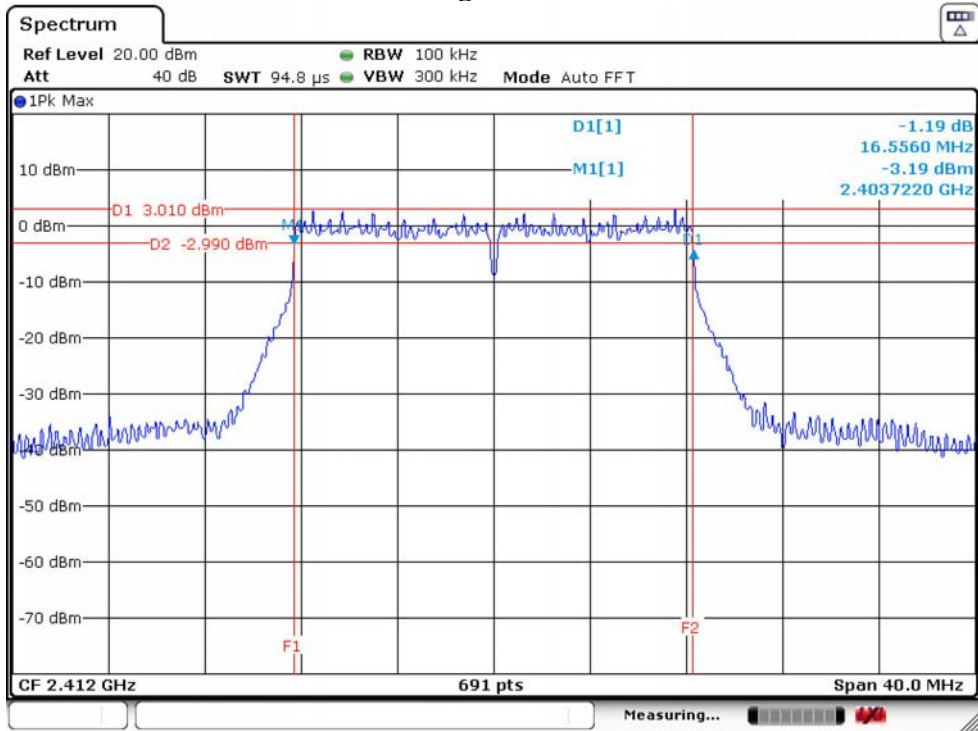


802.11g 2437MHz

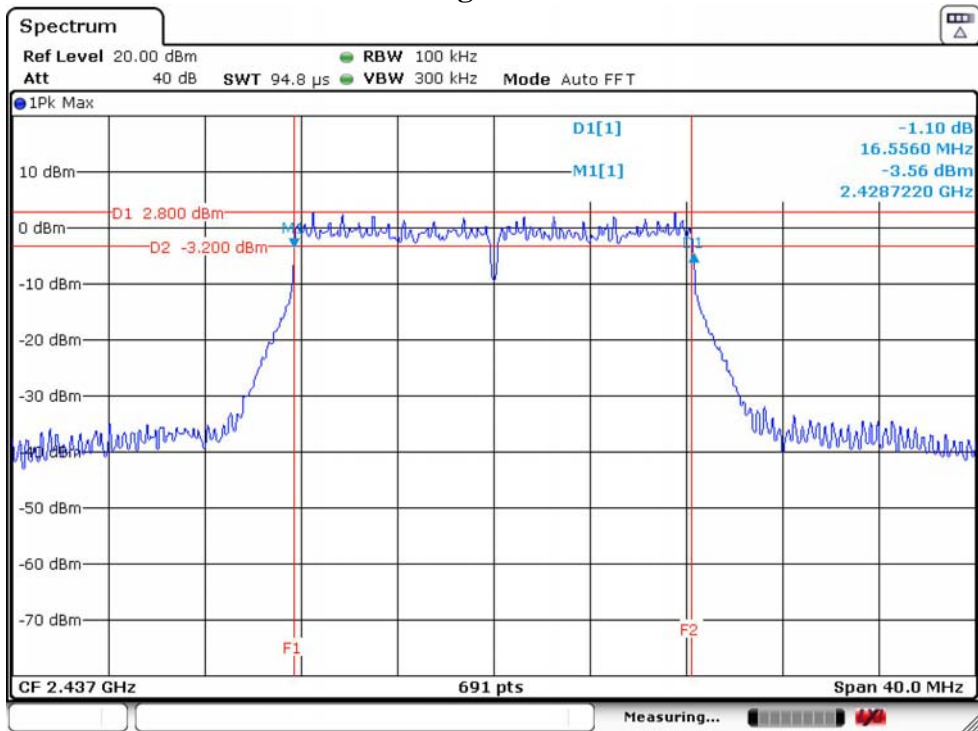


802.11g 2462MHz

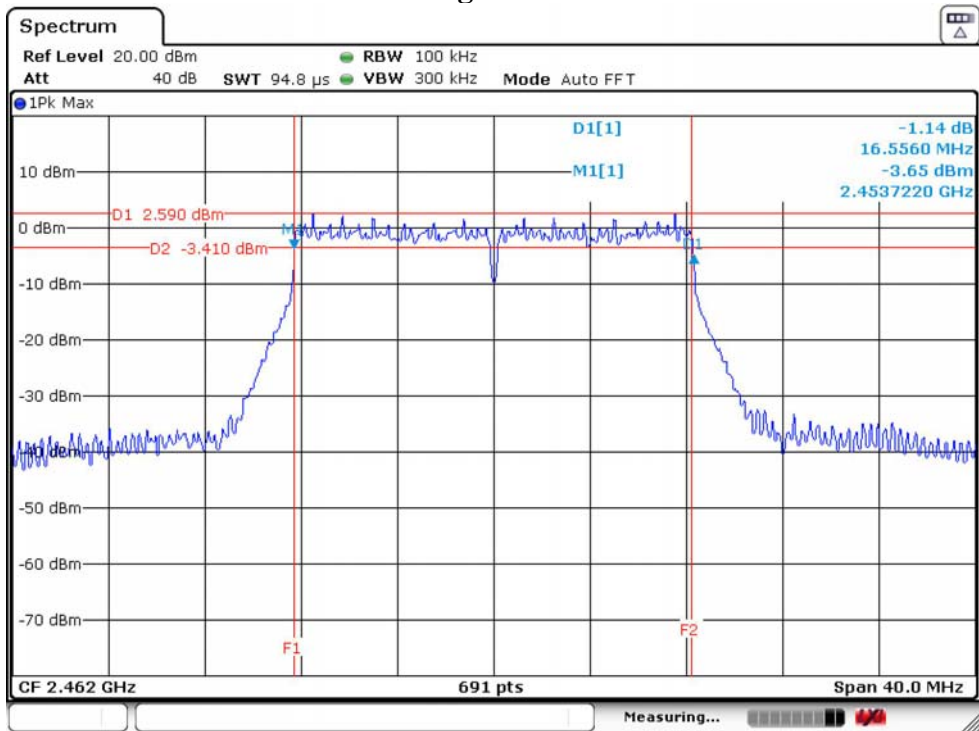


802.11n HT20 2412MHz

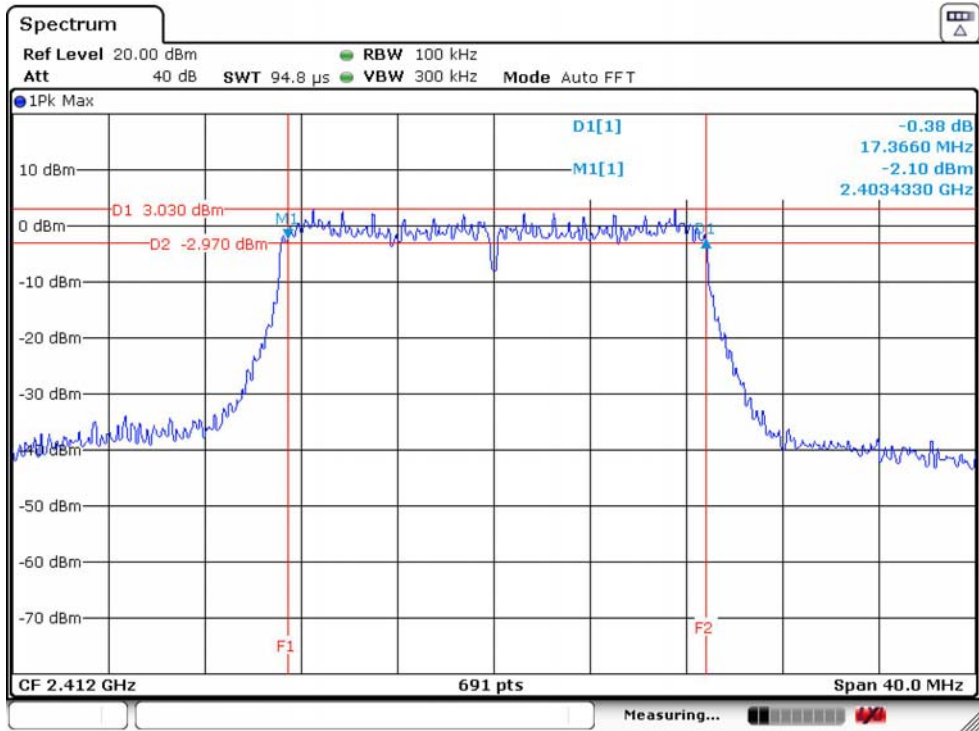


802.11n HT20 2437MHz

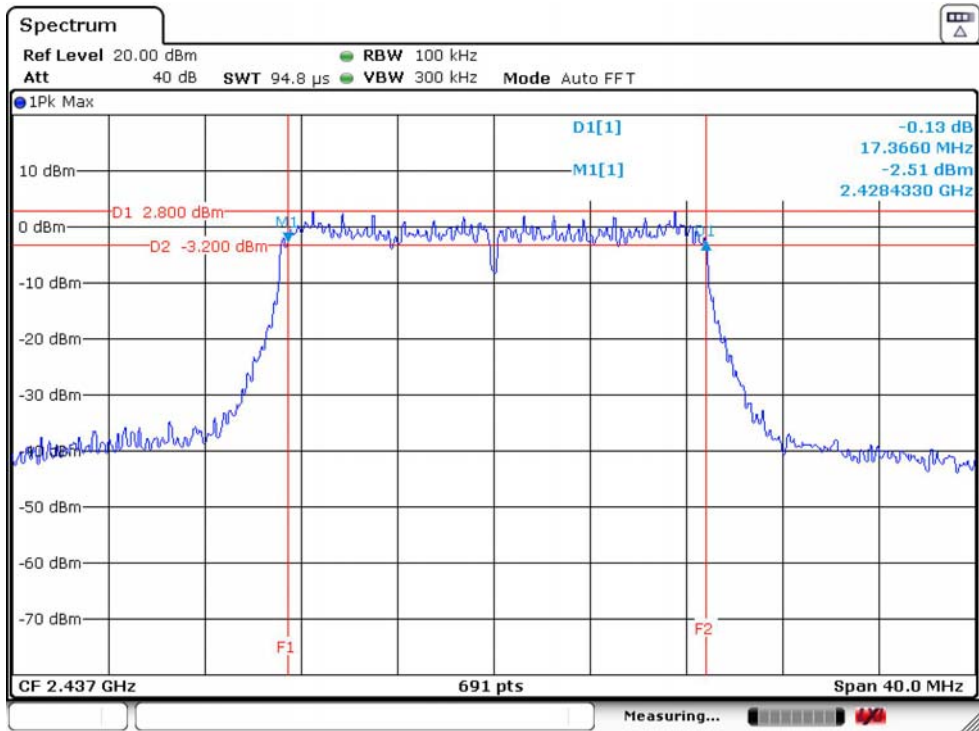


802.11n HT20 2462MHz

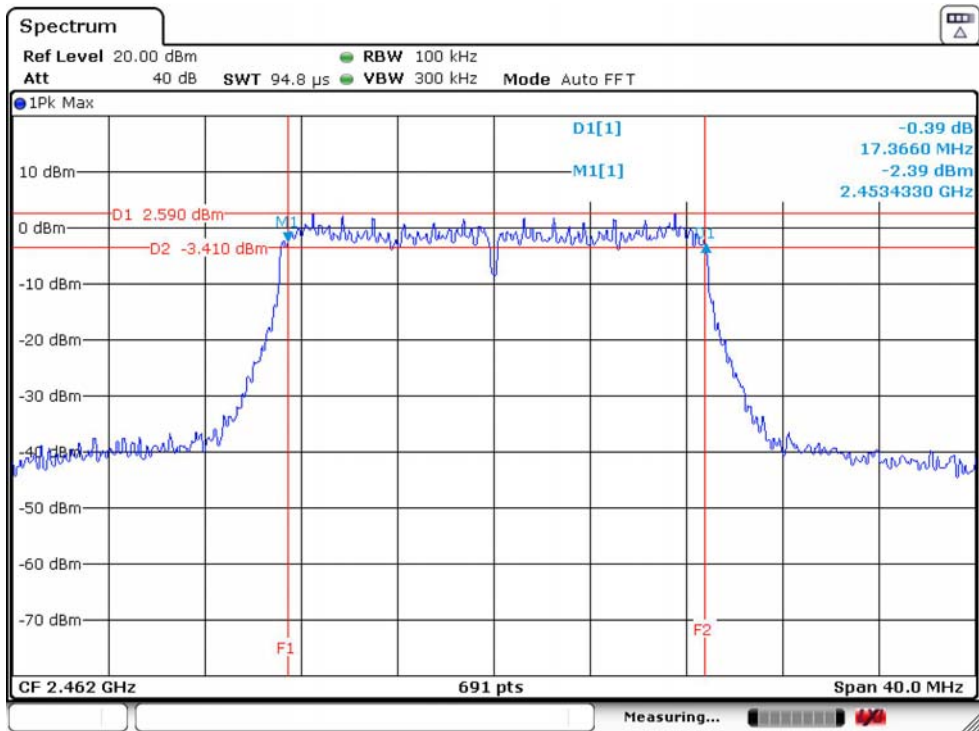


802.11n HT40 2422MHz

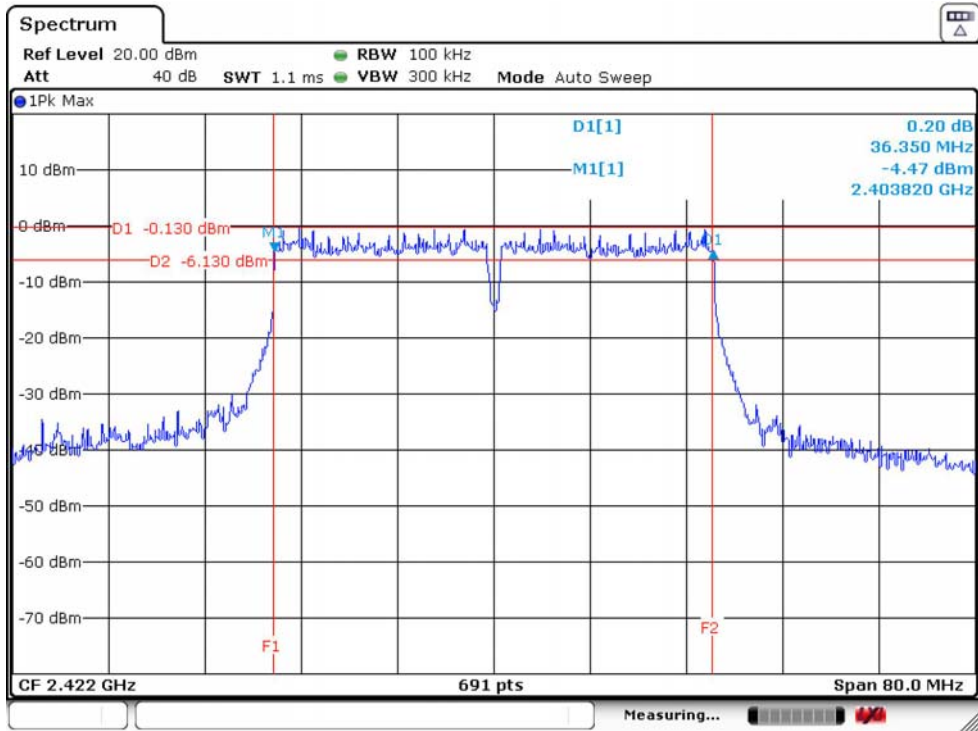

802.11n HT40 2437MHz

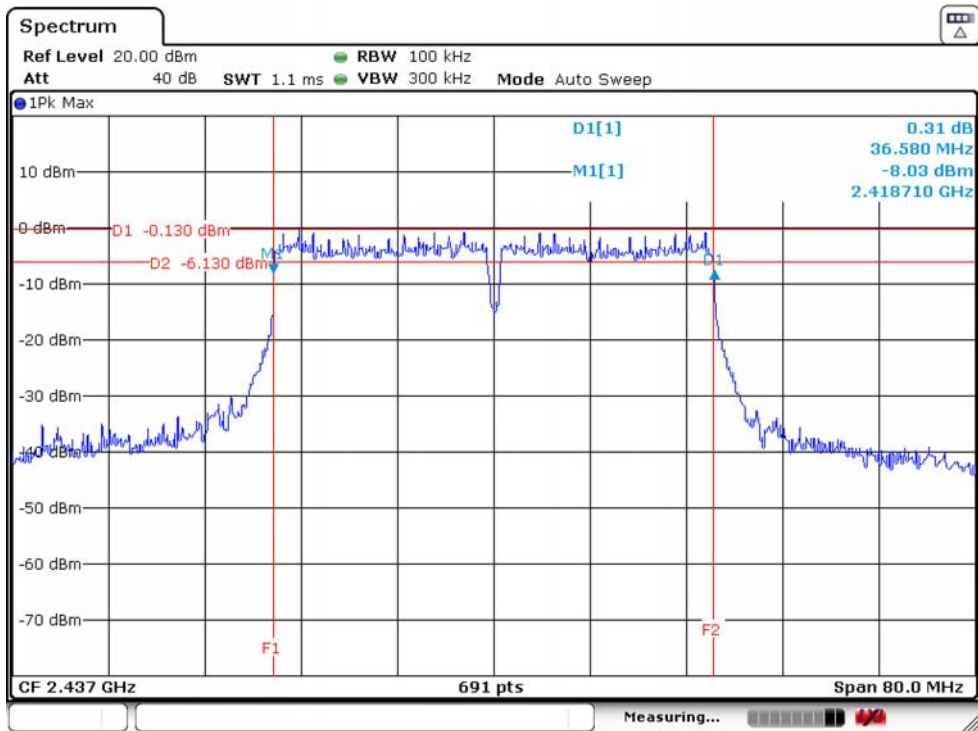


802.11n HT40 2452MHz

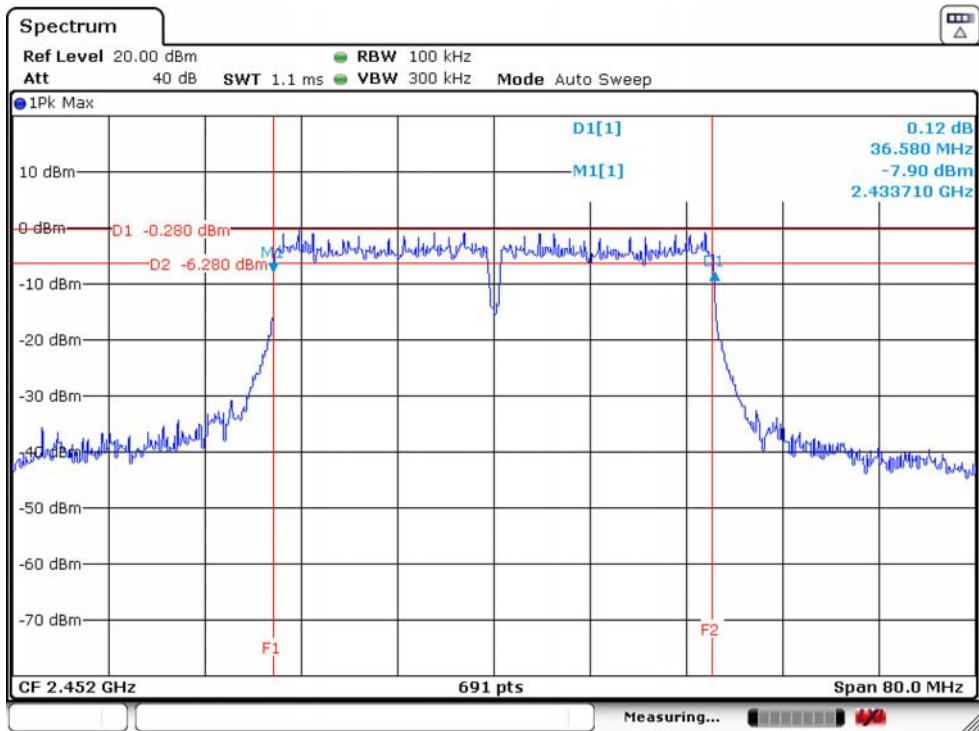


99% Occupied Bandwidth


802.11b 2412MHz

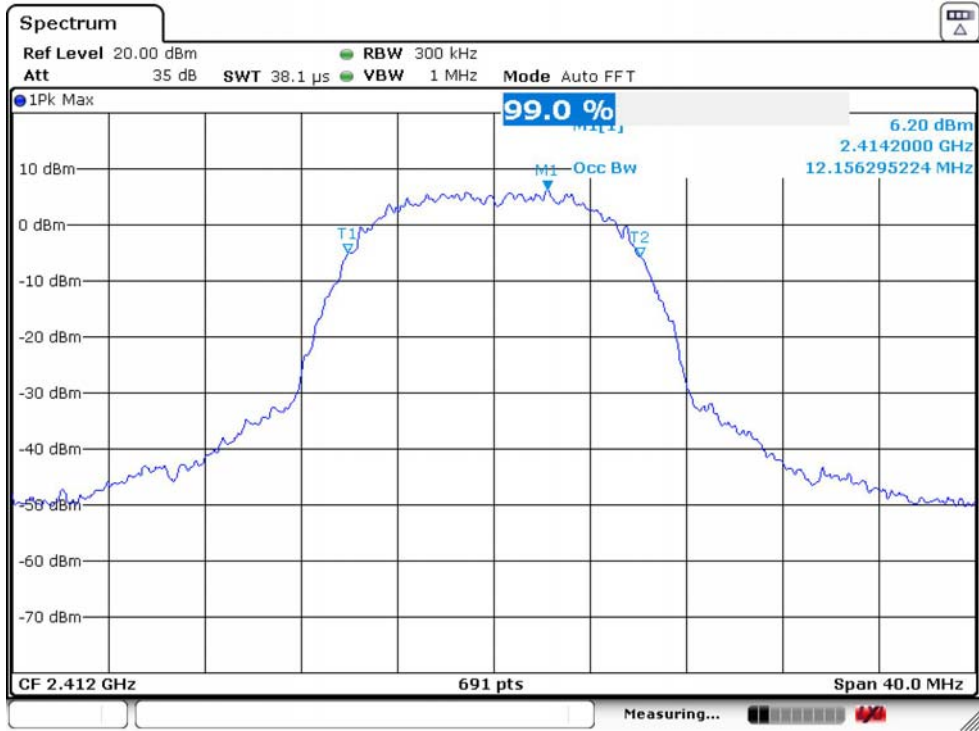


802.11b 2437MHz

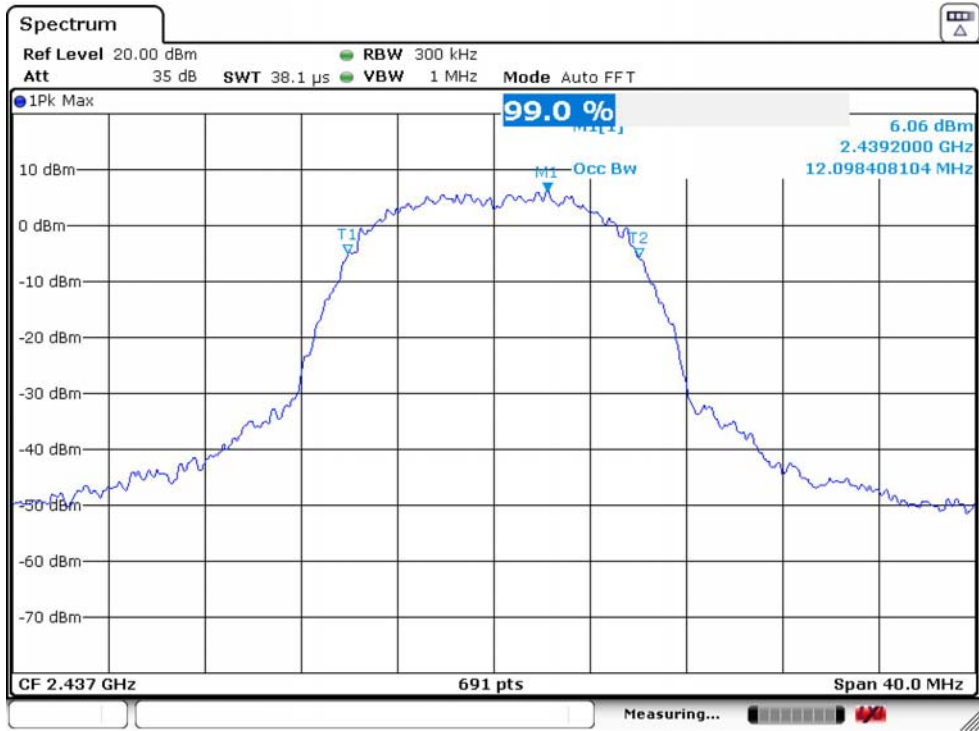


802.11b 2462MHz

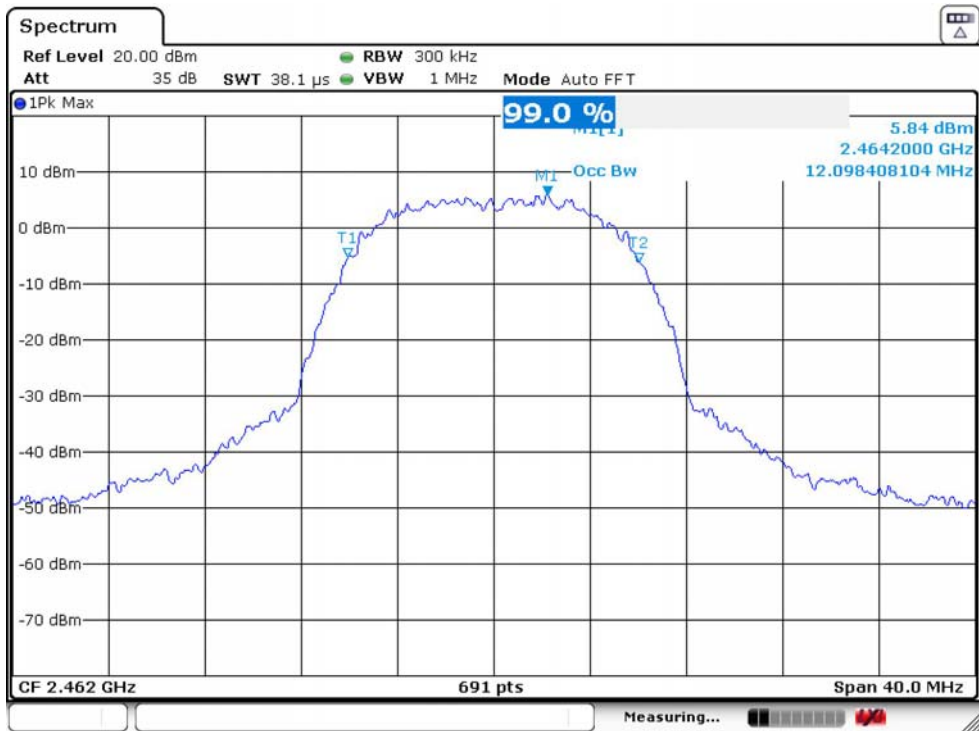


802.11g 2412MHz

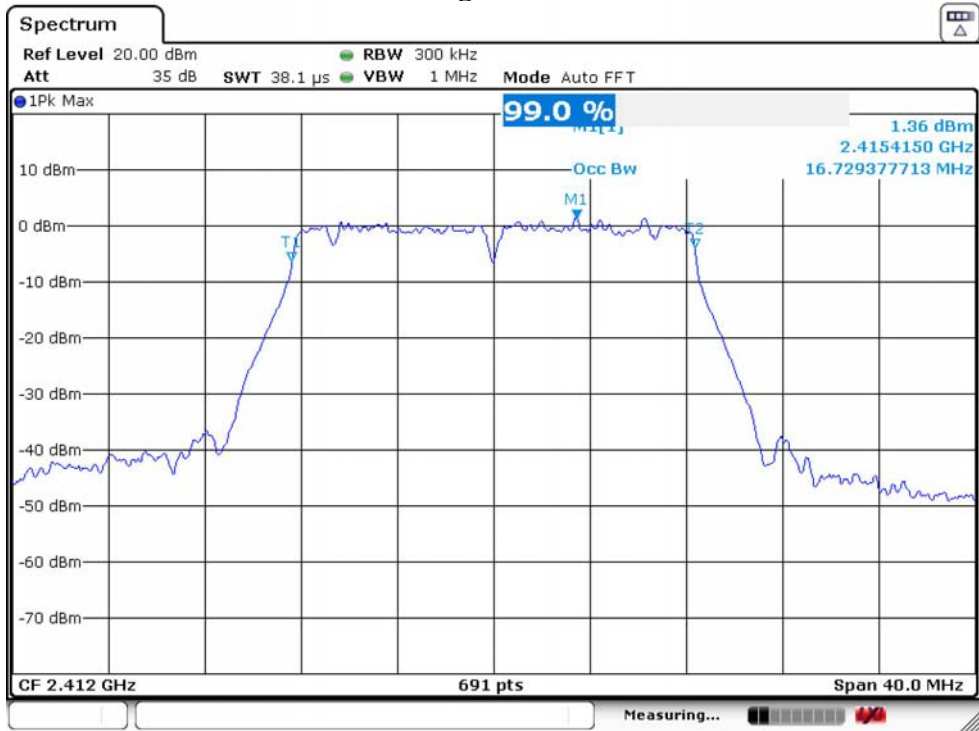


802.11g 2437MHz

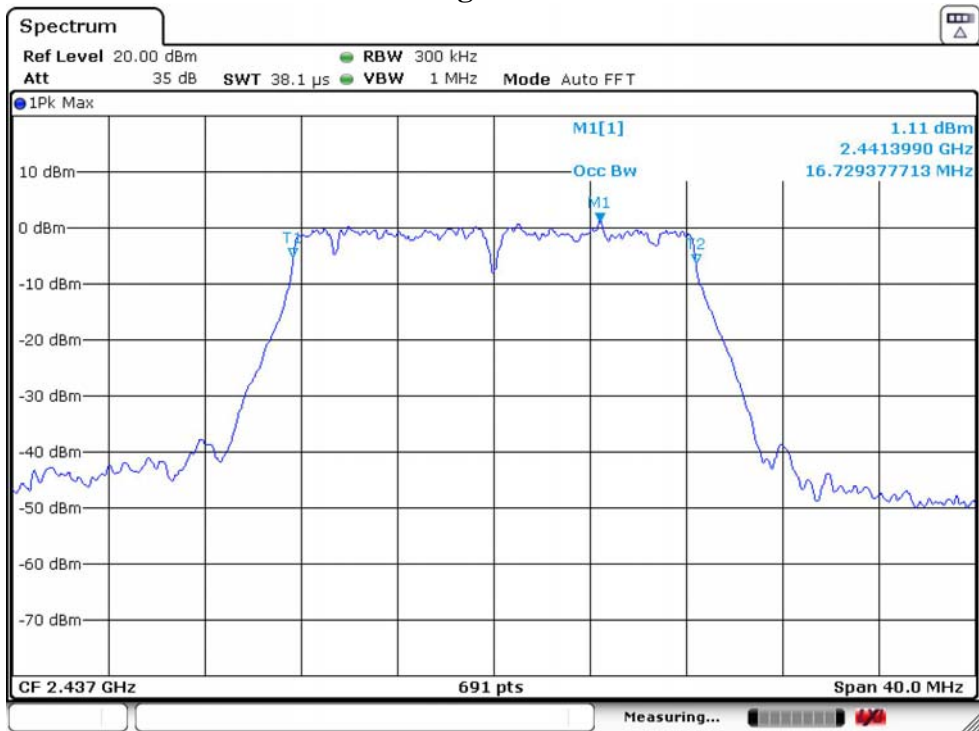


802.11g 2462MHz

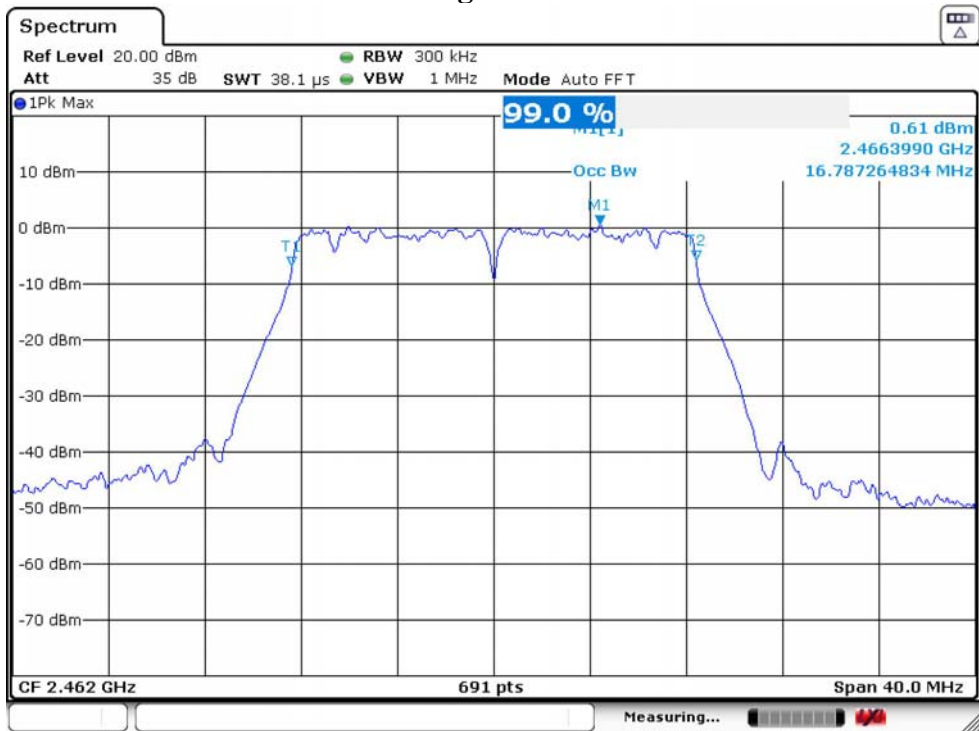


802.11n HT20 2412MHz

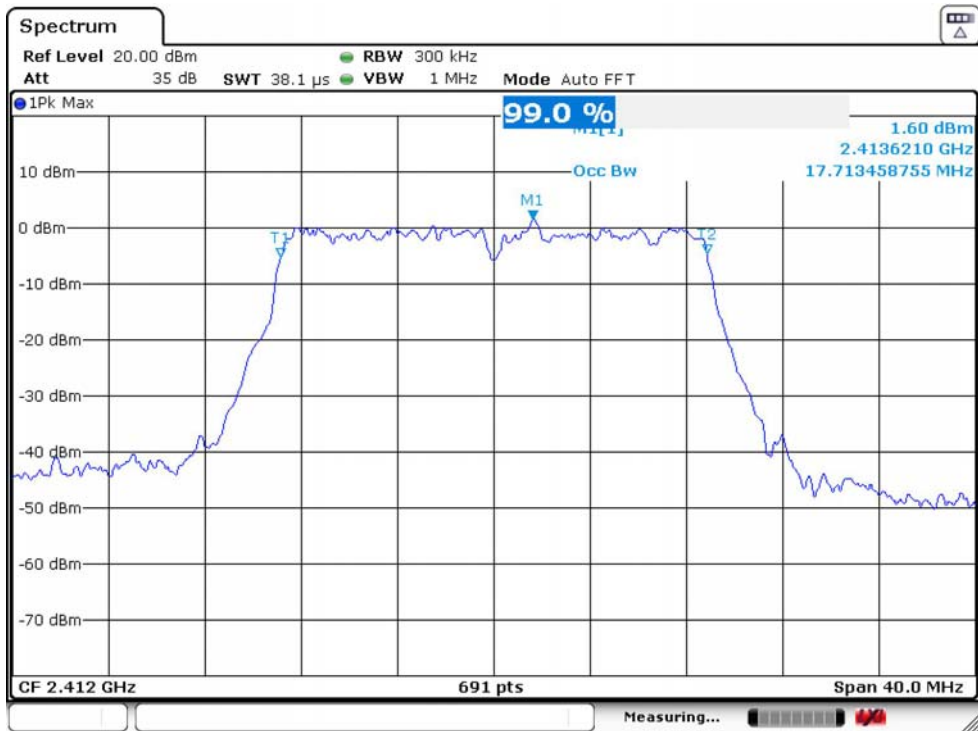


802.11n HT20 2437MHz

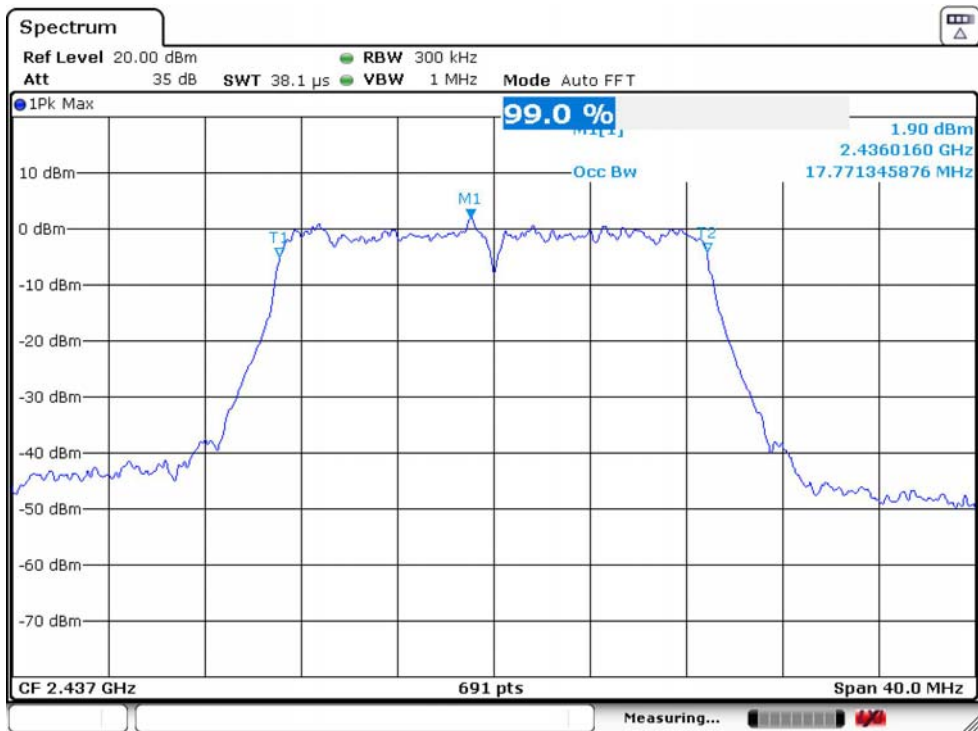


802.11n HT20 2462MHz

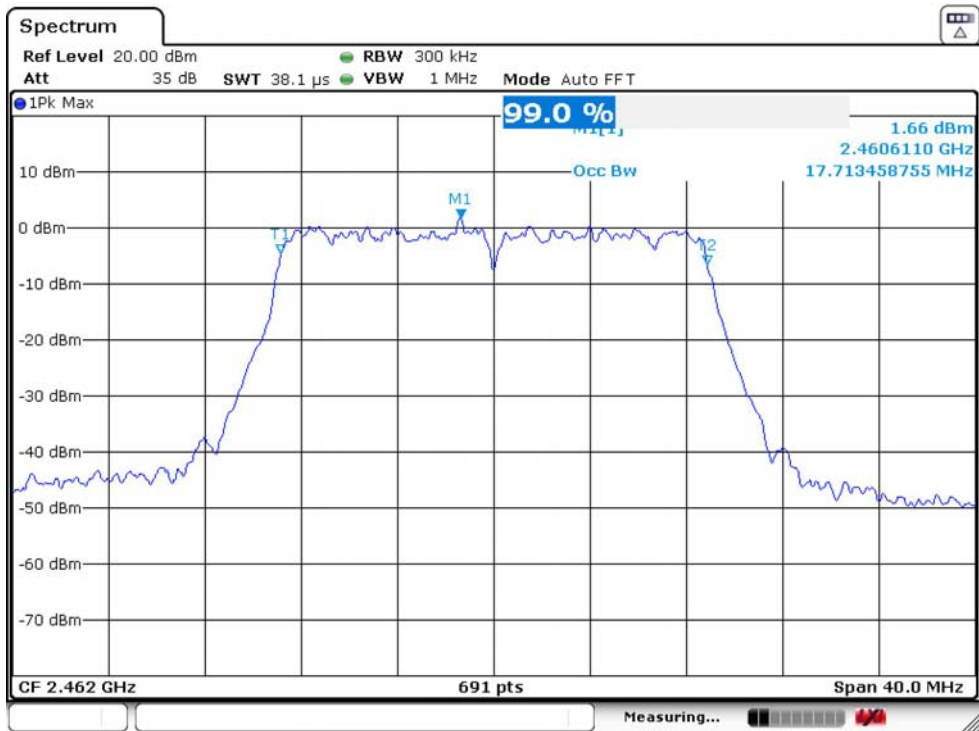


802.11n HT40 2422MHz

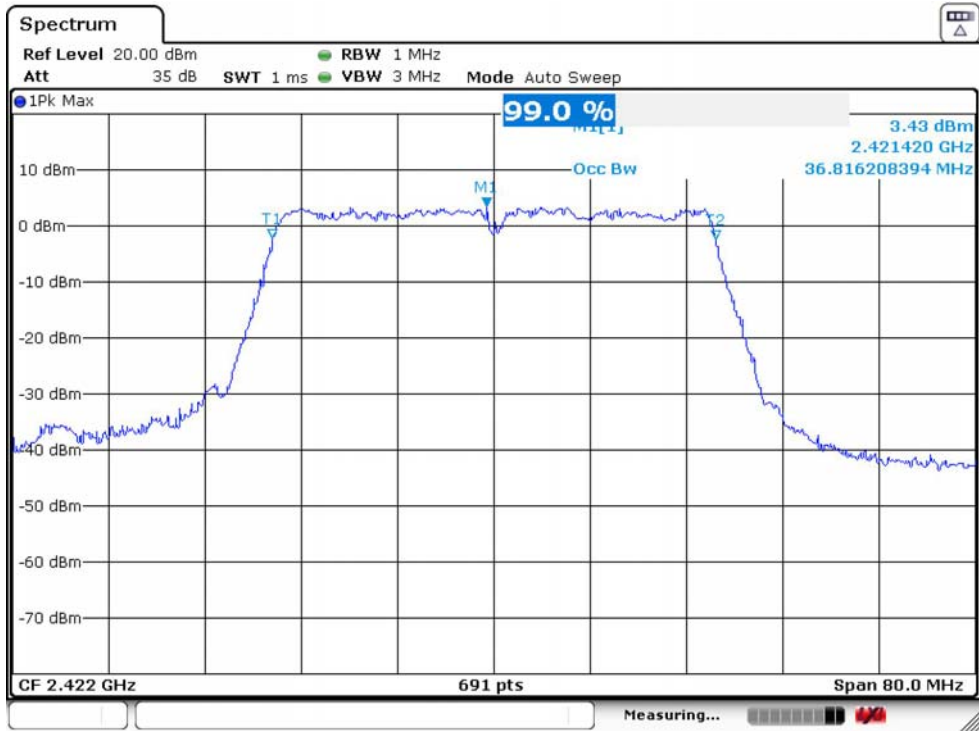

802.11n HT40 2437MHz

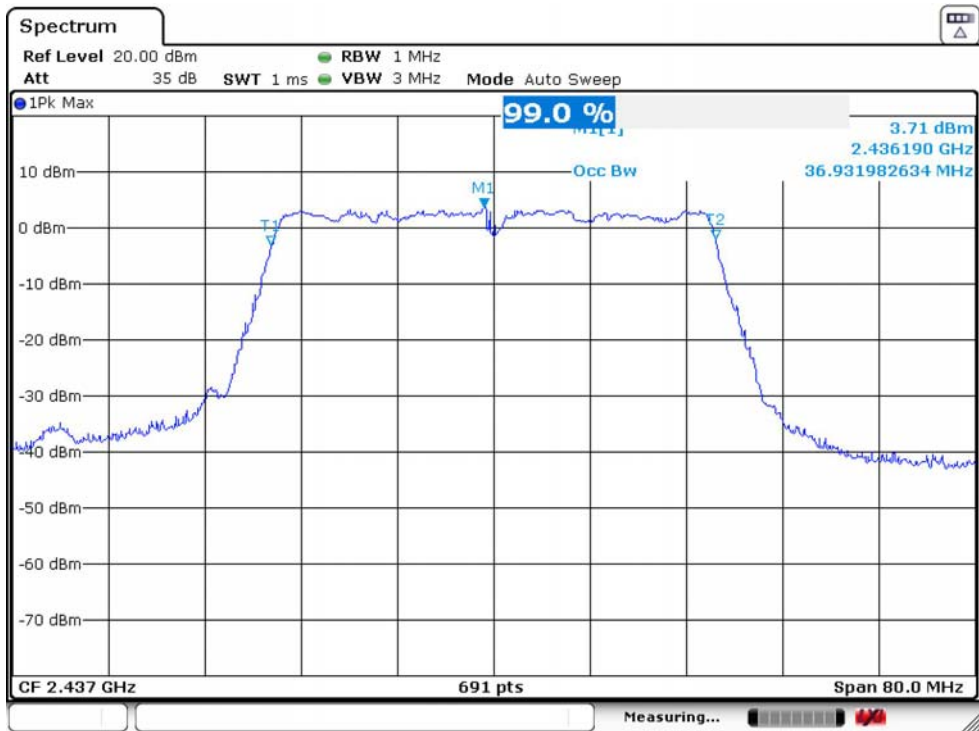

802.11n HT40 2452MHz

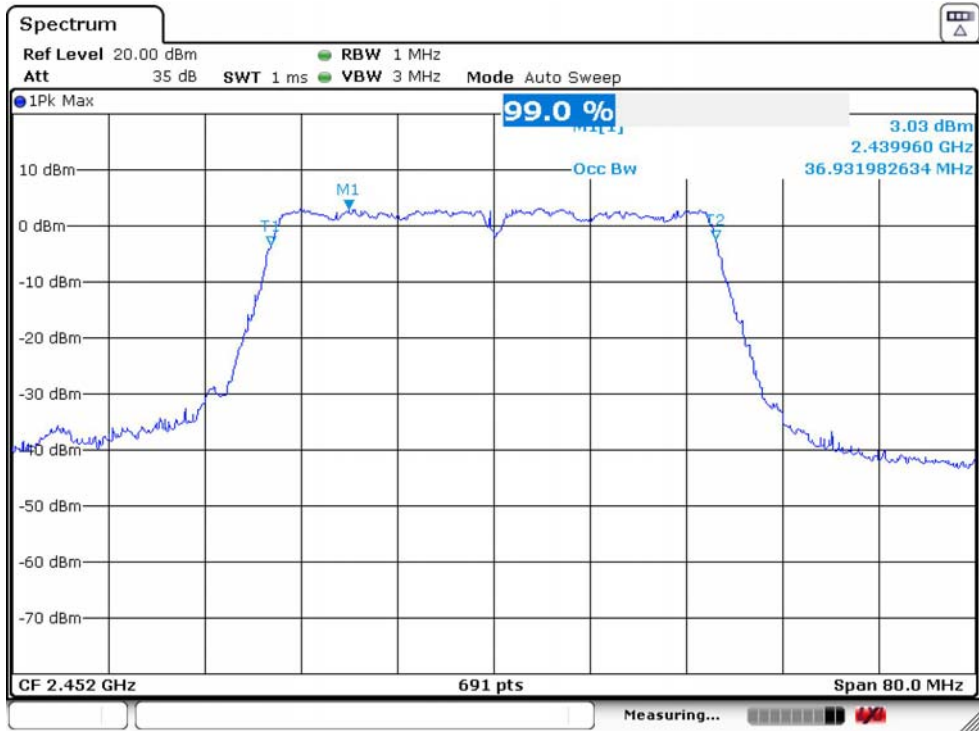


4. MAXIMUM AVERAGE OUTPUT POWER

4.1. Limit

For systems using digital modulation in 2400-2483.5MHz, the maximum average output power is 1 Watt(30dBm).

4.2. Test Setup

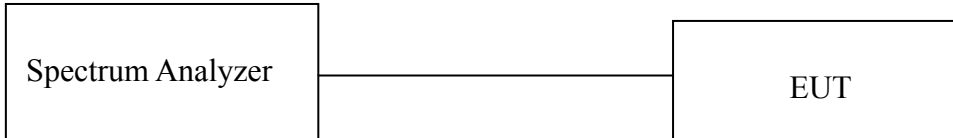

4.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	300KHz(20MHz Bandwidth mode)/1MHz(40MHz Bandwidth mode)
VBW	1MHz(20MHz Bandwidth mode)/3MHz(40MHz Bandwidth mode)
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	RMS
Trace Average	100 Times
Trace Mode	Max Hold


4.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 4.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Use the channel power function to measure maximum average output power, allow trace to stabilize, save test pictures.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


4.5. Test Result

Temperature		25°C	Relative Humidity		55%	Test Voltage		120V/60Hz
Mode	Freq (MHz)	Average Output Power (dBm)	Duty Factor	Total Average Output power (dBm)	Total Average Output power (W)	Limit		Result
						dBm	W	
802.11b	2412	19.14	0.64	19.78	0.0951	30.00	1.0000	PASS
	2437	18.99	0.64	19.63	0.0918	30.00	1.0000	PASS
	2462	18.73	0.64	19.37	0.0865	30.00	1.0000	PASS
802.11g	2412	16.25	2.85	19.10	0.0813	30.00	1.0000	PASS
	2437	16.25	2.85	19.10	0.0813	30.00	1.0000	PASS
	2462	16.15	2.85	19.00	0.0794	30.00	1.0000	PASS
802.11n HT20	2412	16.81	3.28	20.09	0.1021	30.00	1.0000	PASS
	2437	16.54	3.28	19.82	0.0959	30.00	1.0000	PASS
	2462	16.06	3.28	19.34	0.0859	30.00	1.0000	PASS
802.11n HT40	2422	14.65	4.86	19.51	0.0893	30.00	1.0000	PASS
	2437	14.5	4.86	19.36	0.0863	30.00	1.0000	PASS
	2452	14.42	4.86	19.28	0.0847	30.00	1.0000	PASS


802.11b 2412MHz

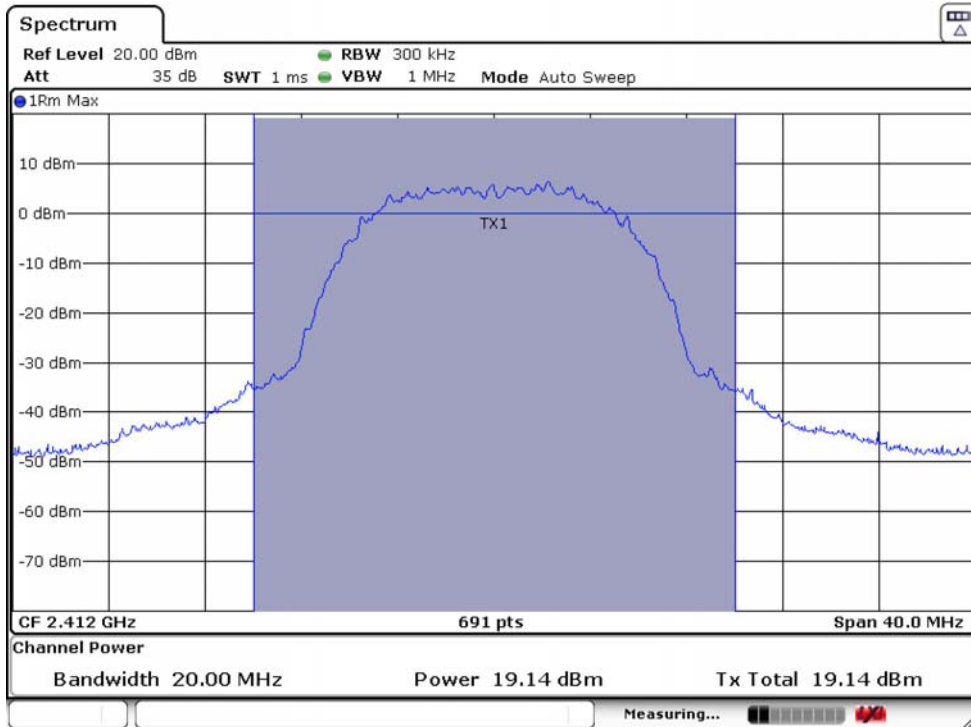


802.11b 2437MHz

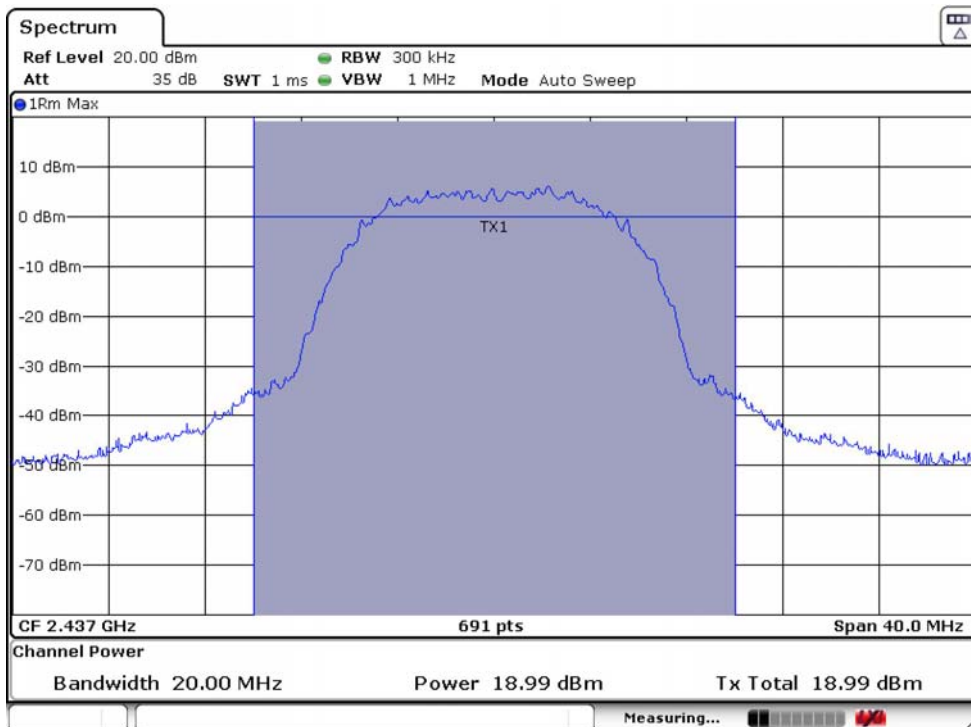


802.11b 2462MHz

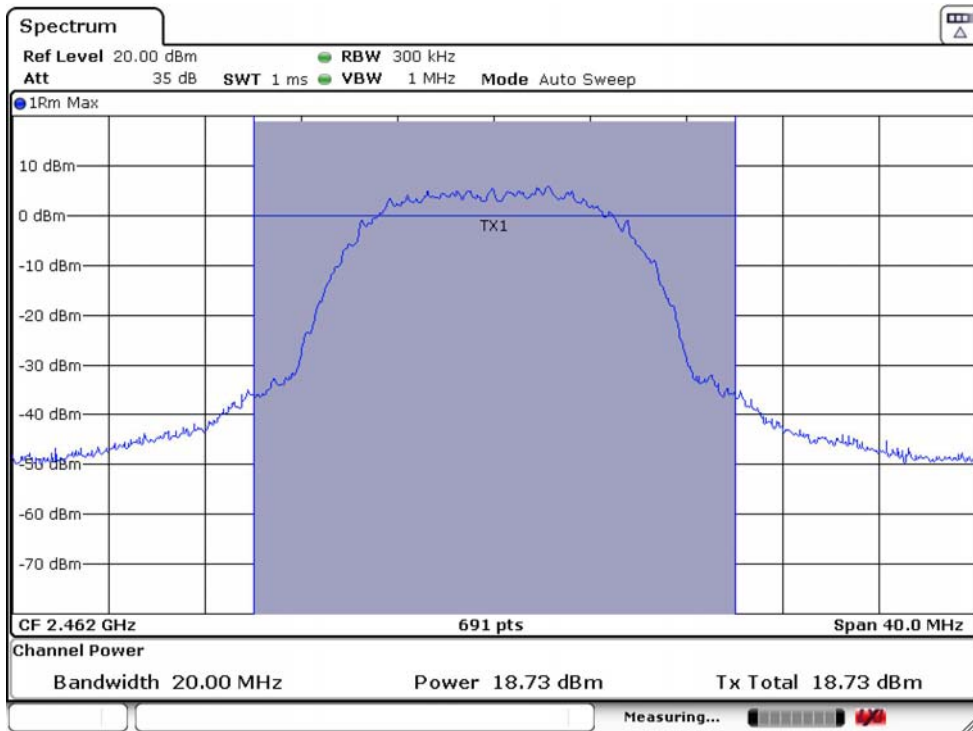


802.11g 2412MHz

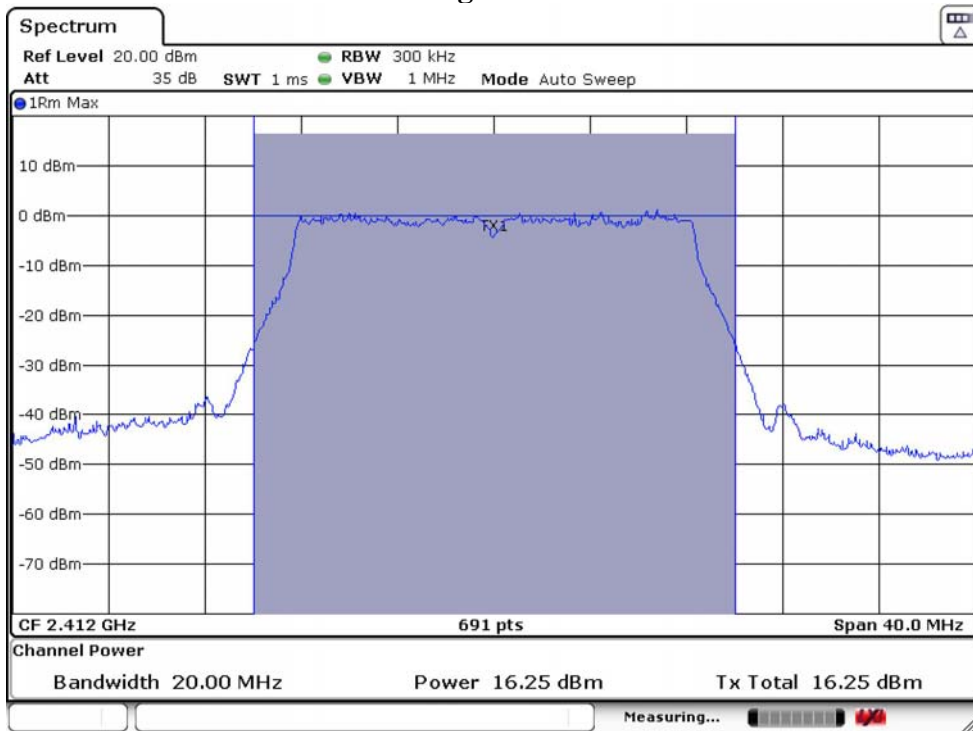


802.11g 2437MHz

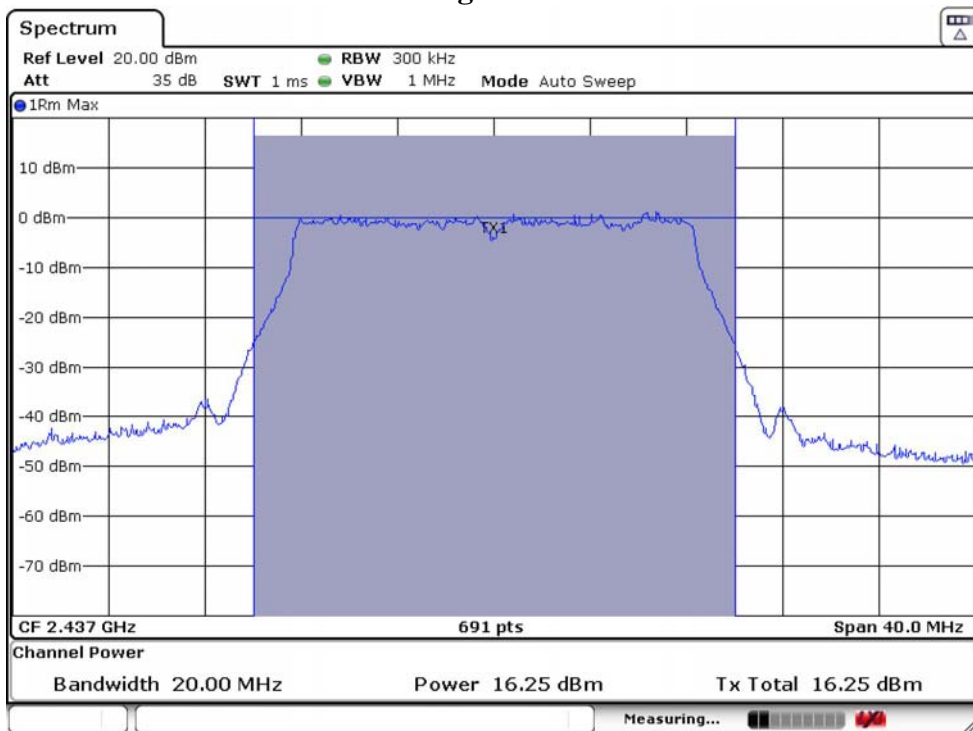


802.11g 2462MHz

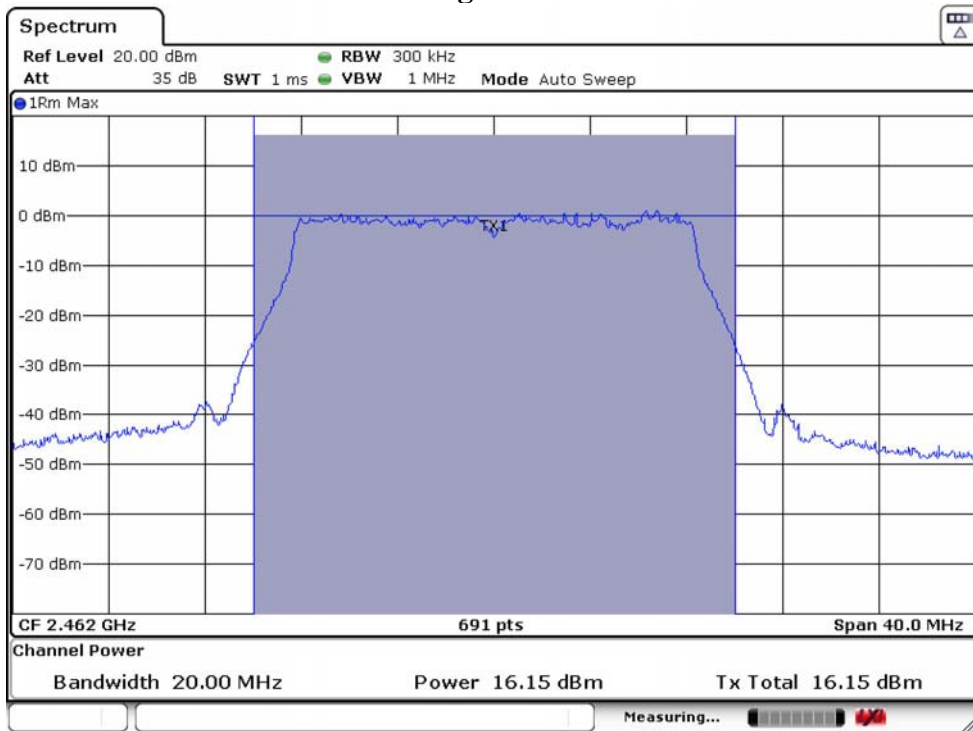


802.11n HT20 2412MHz

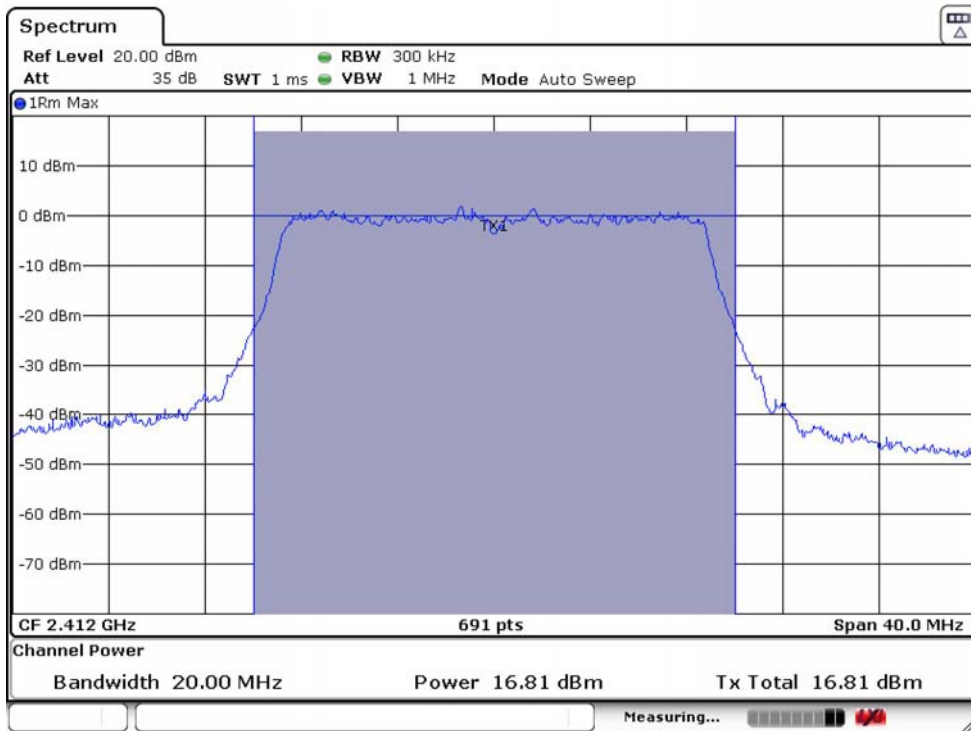


802.11n HT20 2437MHz

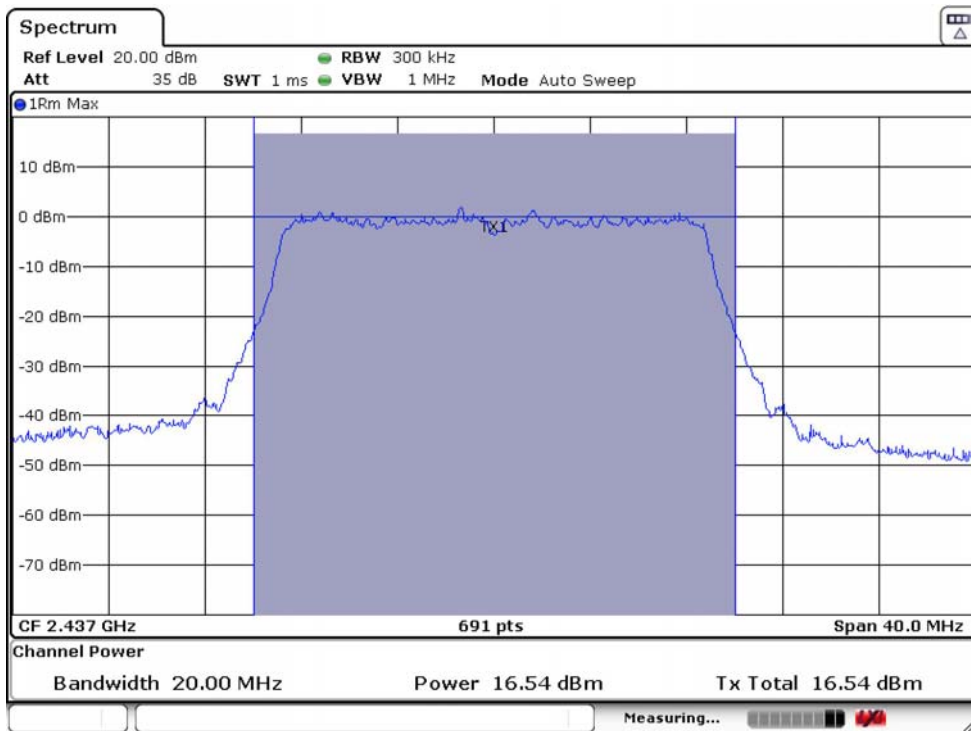


802.11n HT20 2462MHz

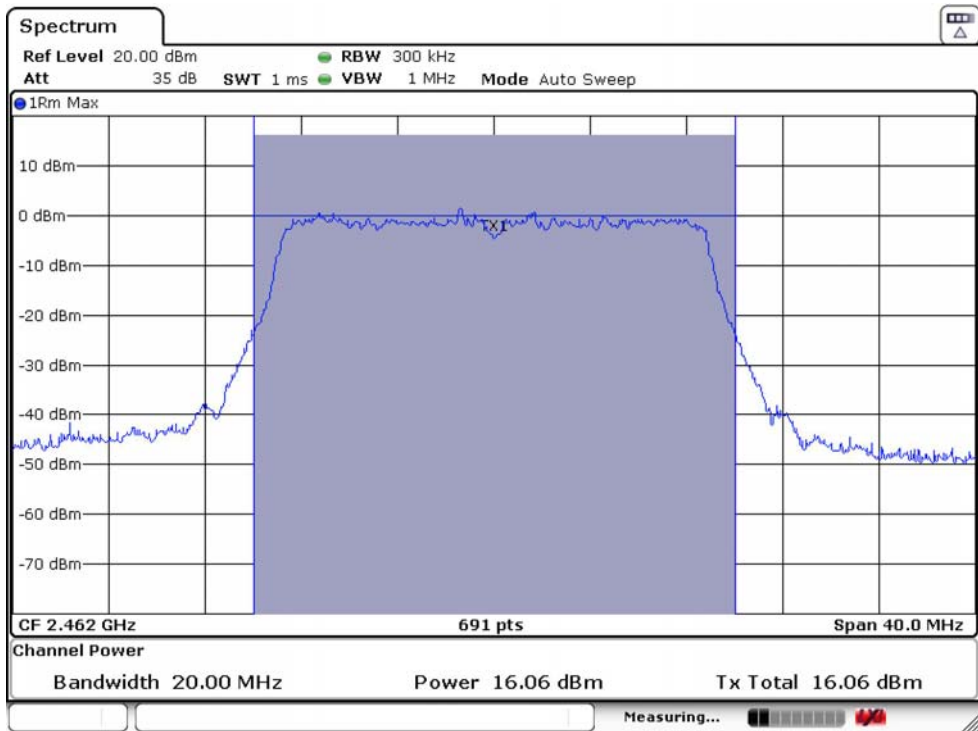


802.11n HT40 2422MHz

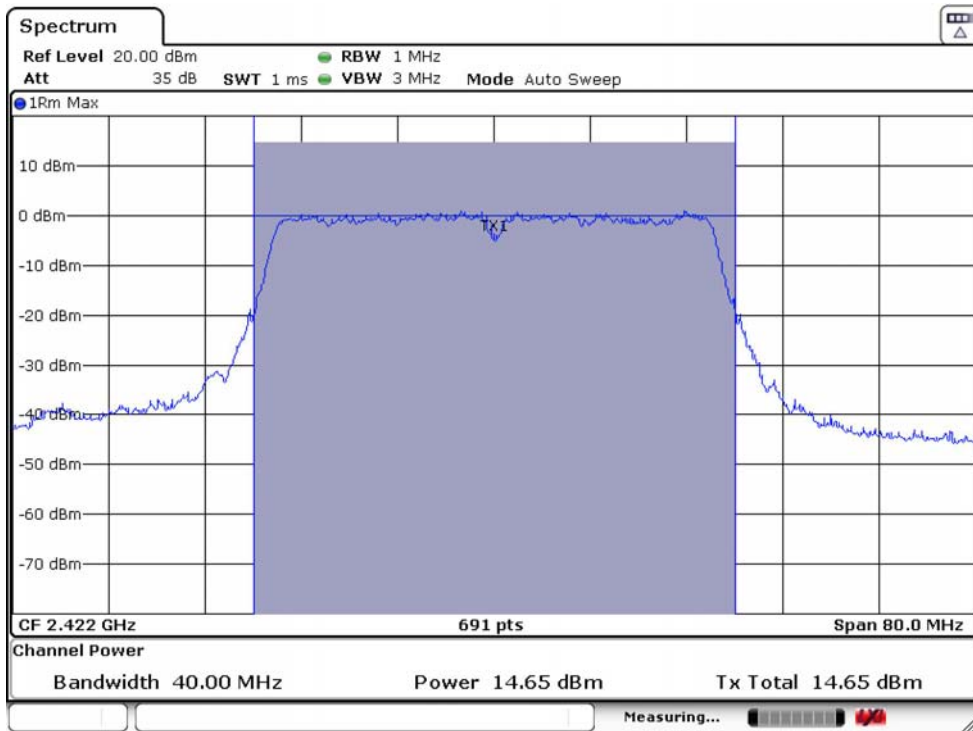

802.11n HT40 2437MHz

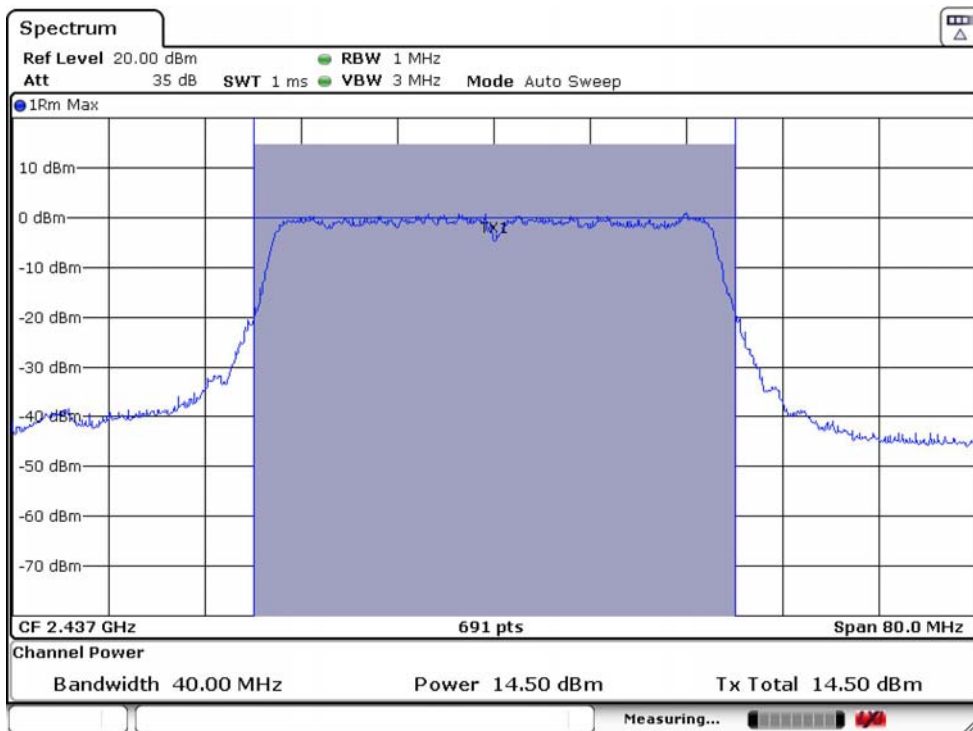

802.11n HT40 2452MHz

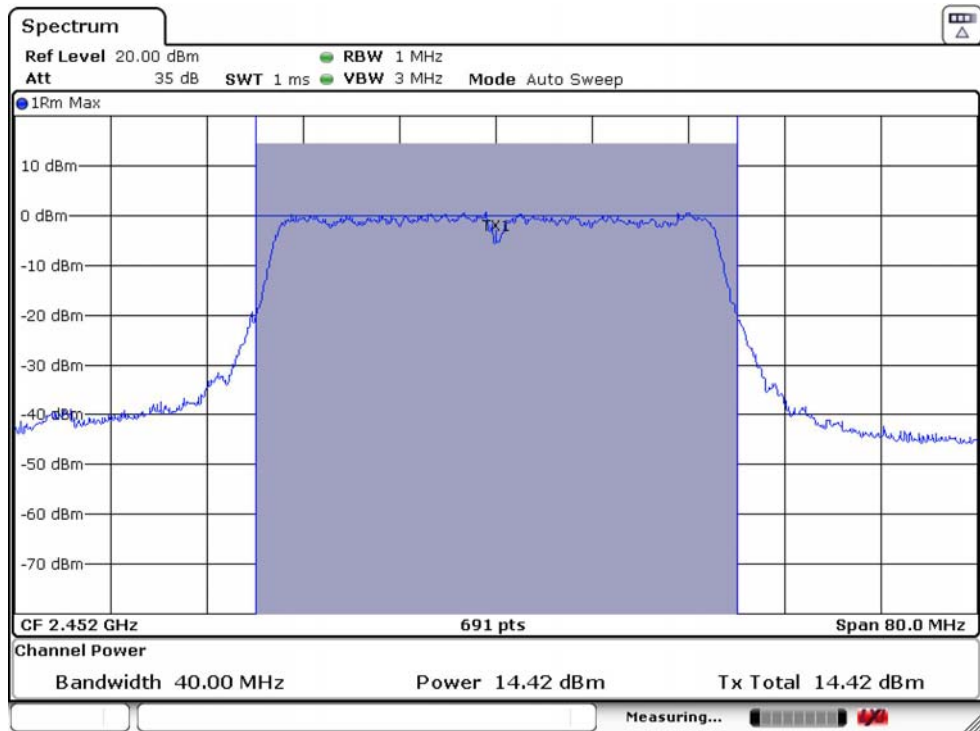


5. POWER SPECTRAL DENSITY

5.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2. Test Setup

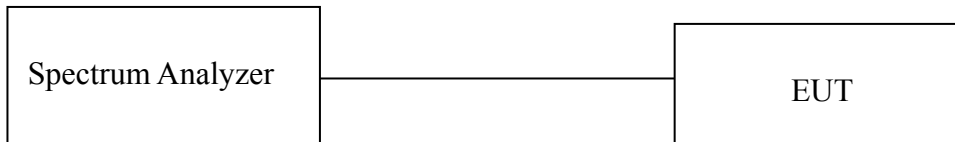

5.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	3KHz
VBW	10KHz
Span	30MHz(20MHz Bandwidth mode)/60MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Sweep Point	30001
Detector	RMS
Trace Average	100 Times
Trace Mode	Max Hold


5.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 5.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker-to-peak function to set the marker to the average of the emission.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


5.5. Test Result

Temperature		25°C	Relative Humidity	55%	Test Voltage	120V/60Hz
Mode	Freq (MHz)	Power Density (dBm/3KHz)	Duty Factor	Total Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	2412	-10.89	0.64	-10.25	8.00	PASS
	2437	-11.21	0.64	-10.57	8.00	PASS
	2462	-11.32	0.64	-10.68	8.00	PASS
802.11g	2412	-16.28	2.85	-13.43	8.00	PASS
	2437	-16.3	2.85	-13.45	8.00	PASS
	2462	-16.74	2.85	-13.89	8.00	PASS
802.11n HT20	2412	-17.74	3.28	-14.46	8.00	PASS
	2437	-17.63	3.28	-14.35	8.00	PASS
	2462	-18.06	3.28	-14.78	8.00	PASS
802.11n HT40	2422	-21.77	4.86	-16.91	8.00	PASS
	2437	-24.55	4.86	-19.69	8.00	PASS
	2452	-22.07	4.86	-17.21	8.00	PASS


802.11b 2412MHz

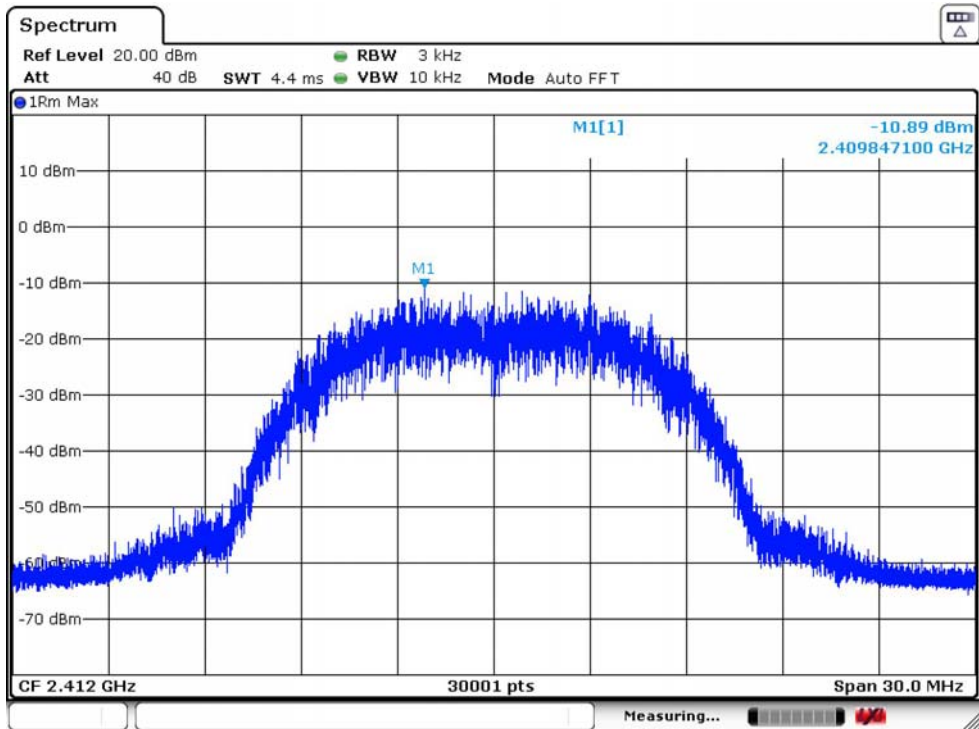


802.11b 2437MHz

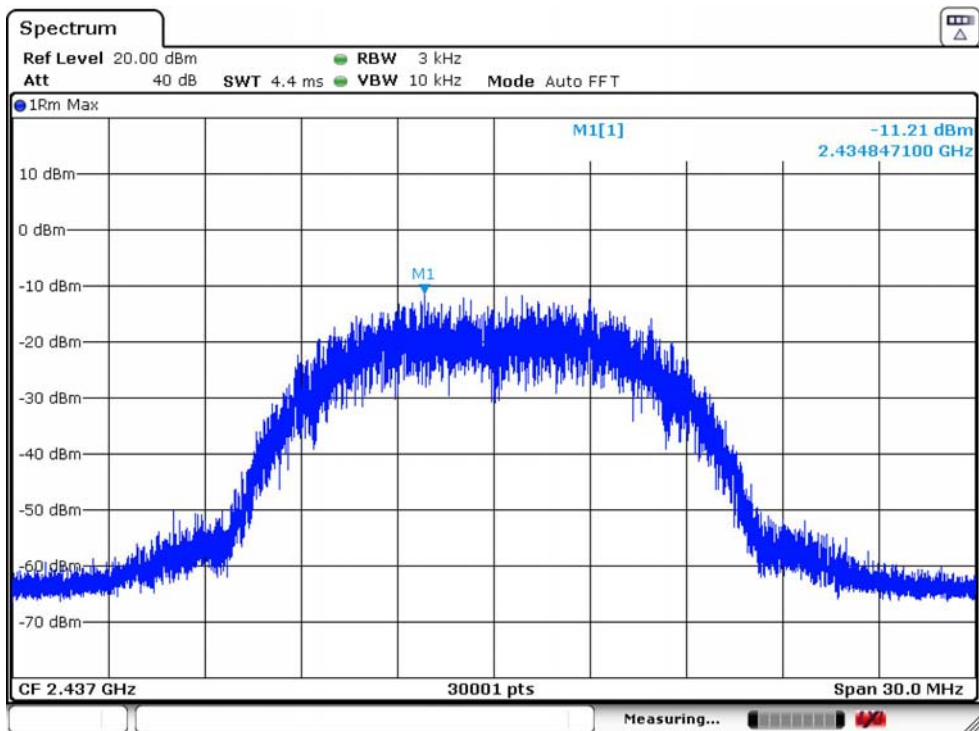


802.11b 2462MHz

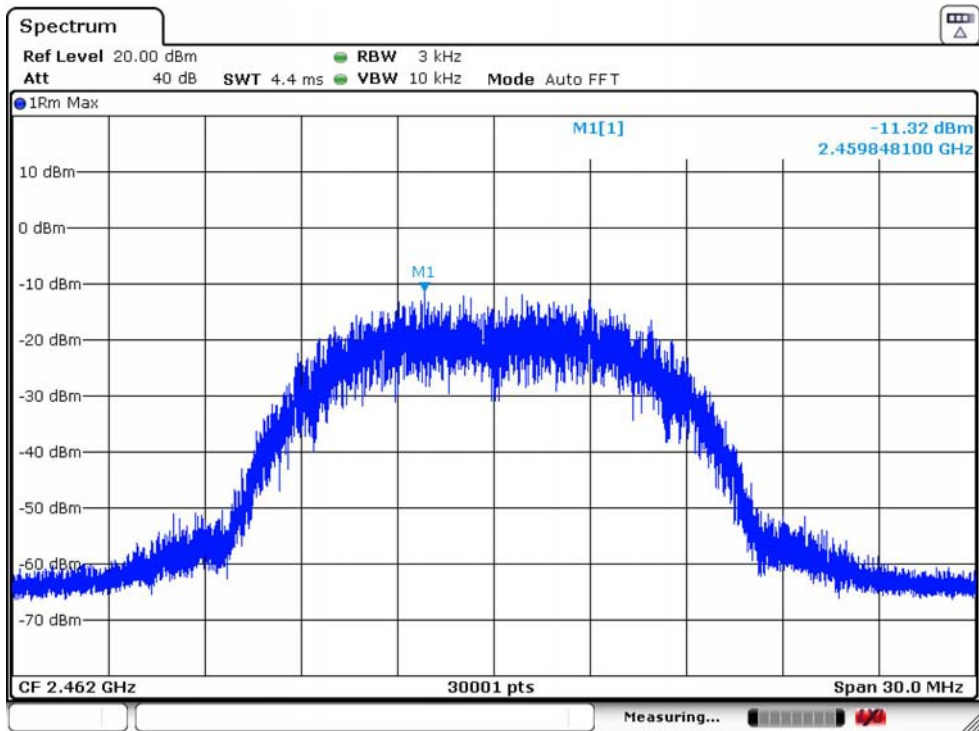


802.11g 2412MHz

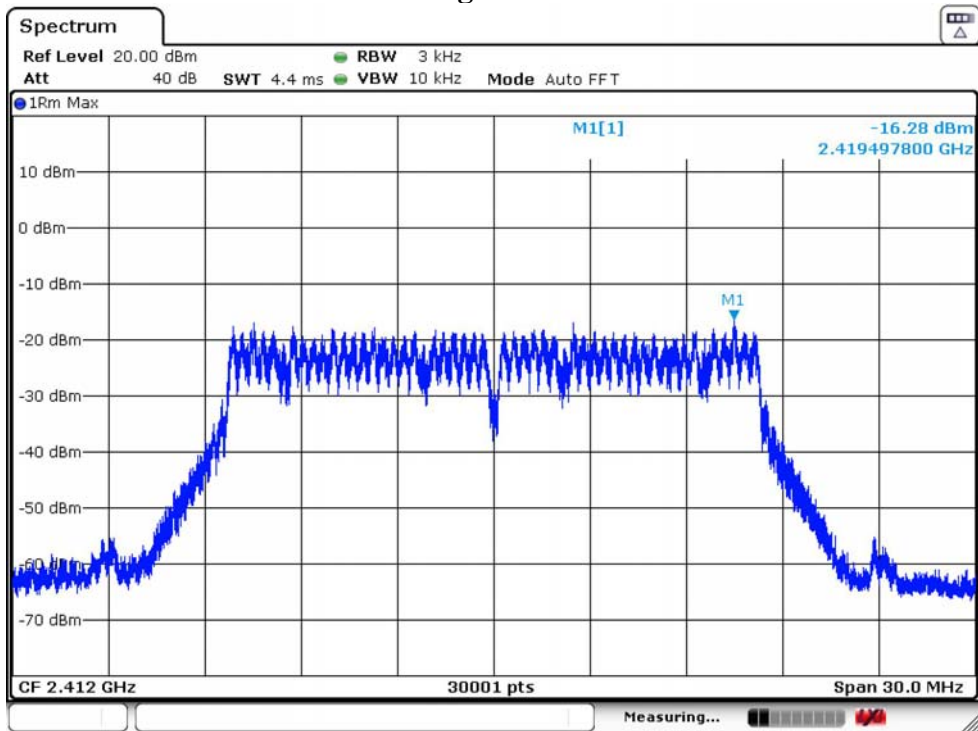


802.11g 2437MHz

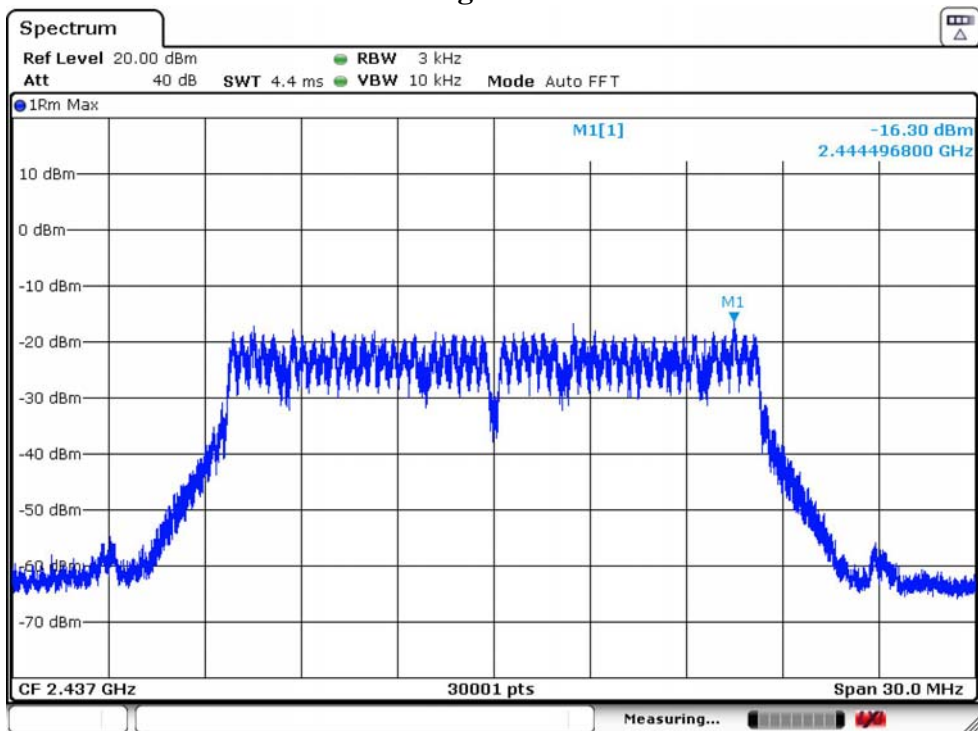


802.11g 2462MHz

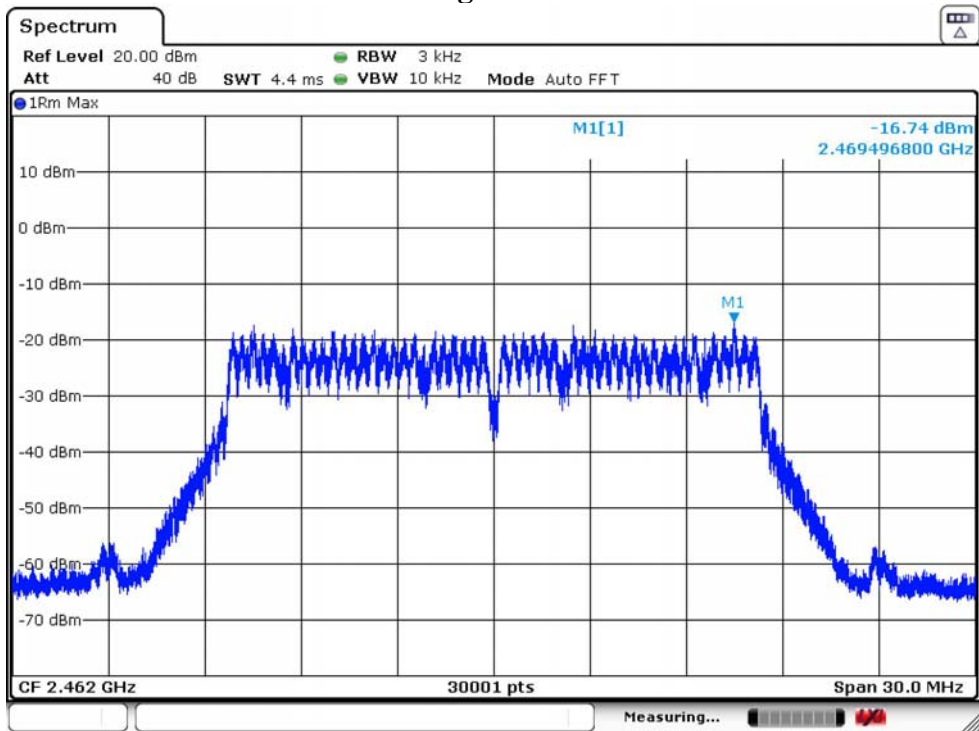


802.11n HT20 2412MHz

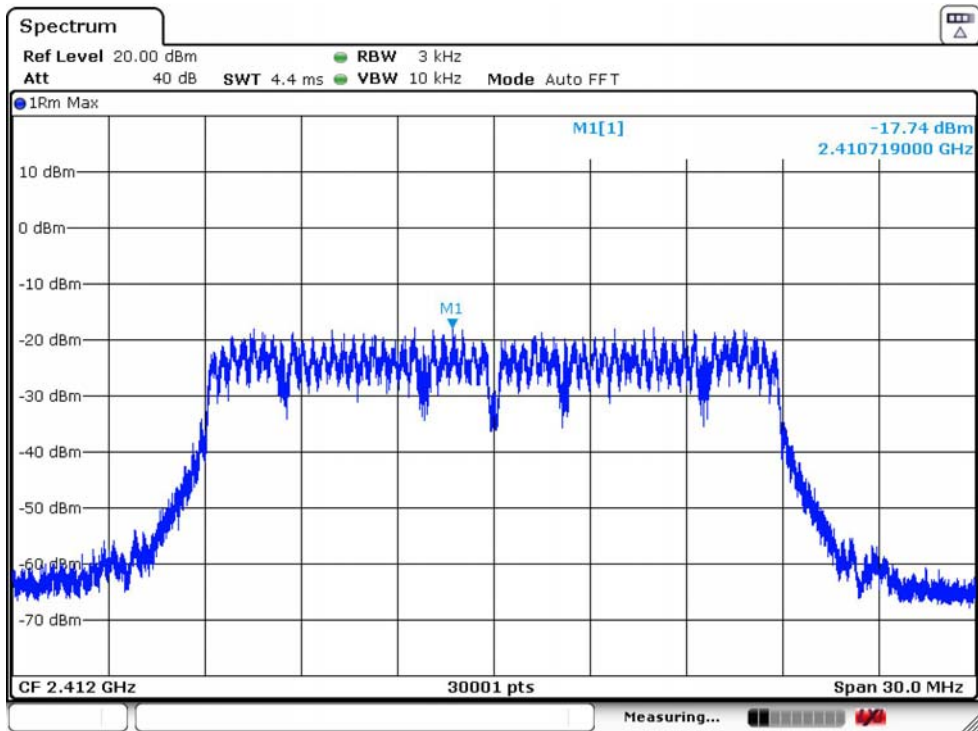


802.11n HT20 2437MHz

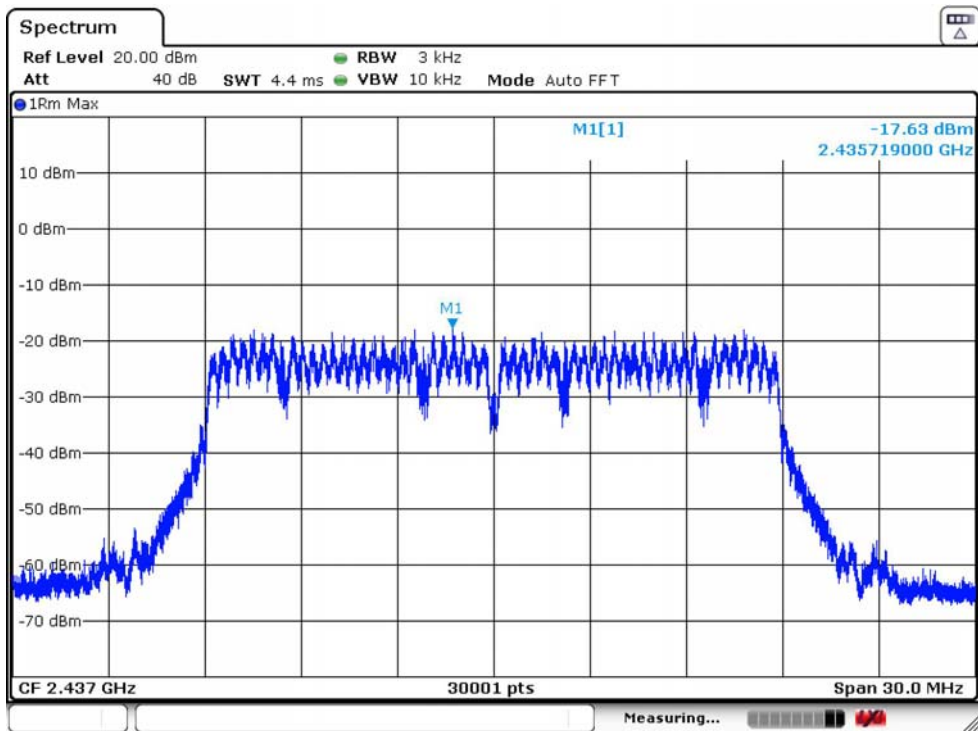


802.11n HT20 2462MHz

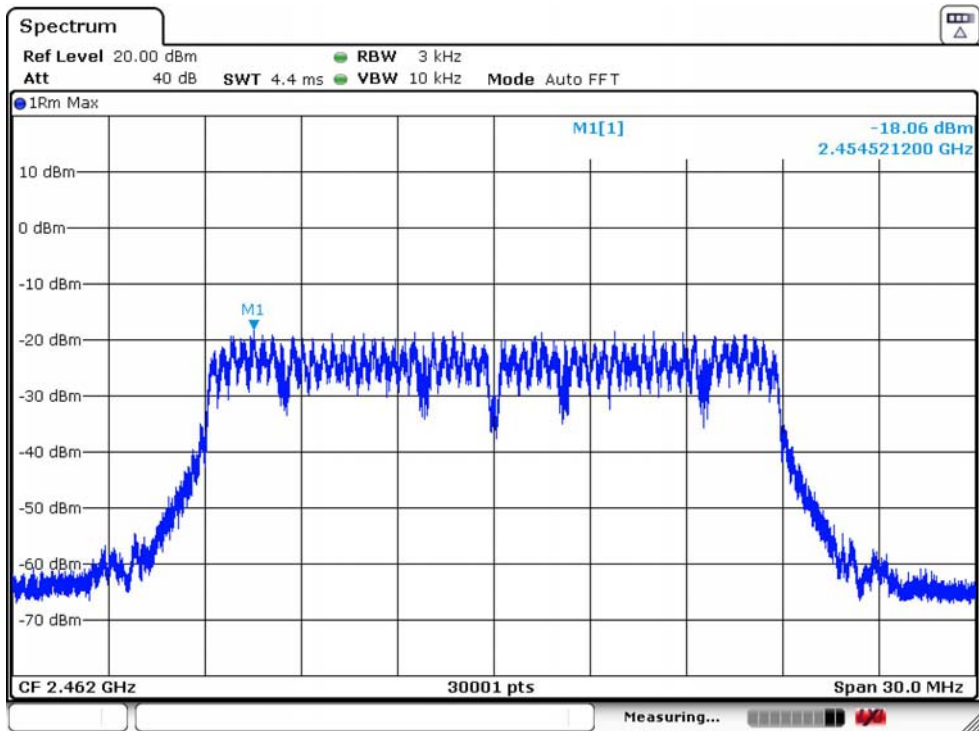


802.11n HT40 2422MHz

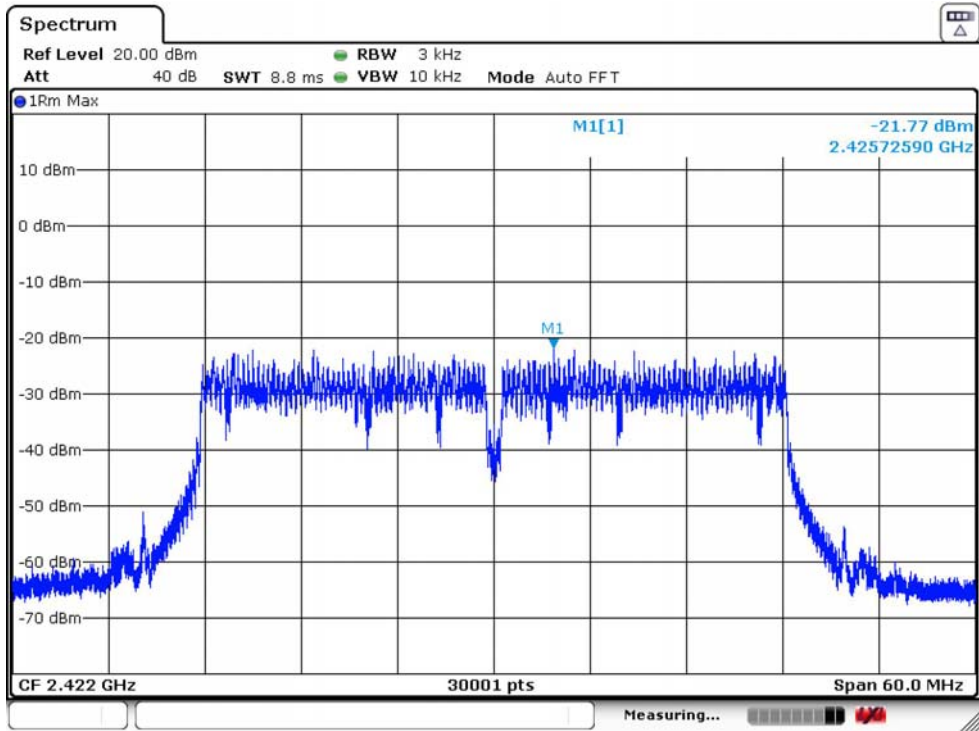

802.11n HT40 2437MHz

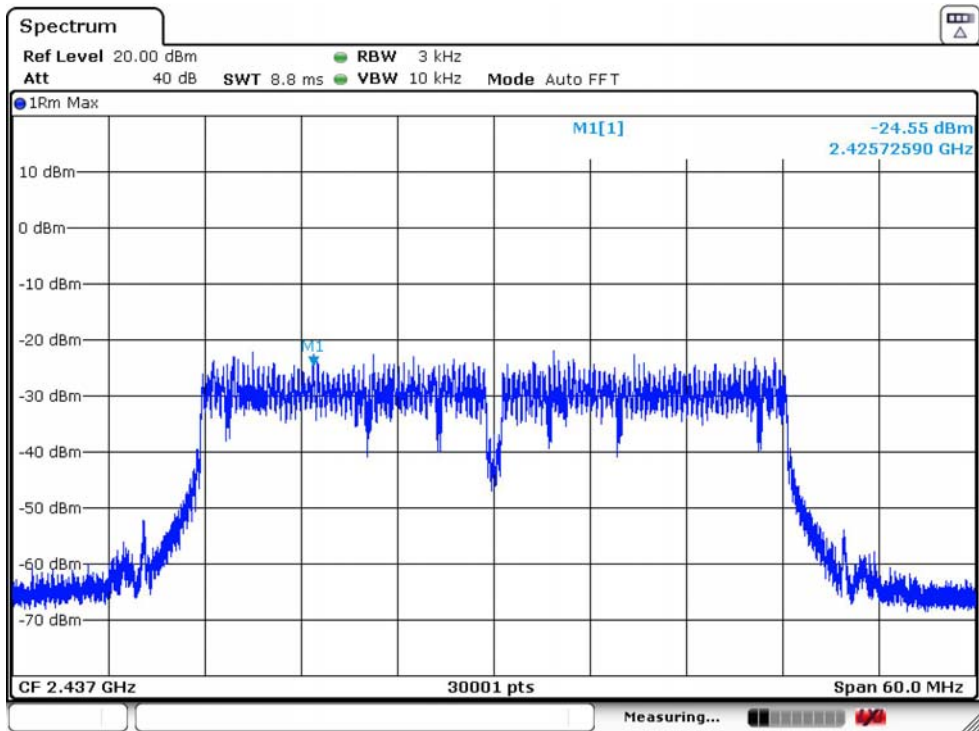

802.11n HT40 2452MHz

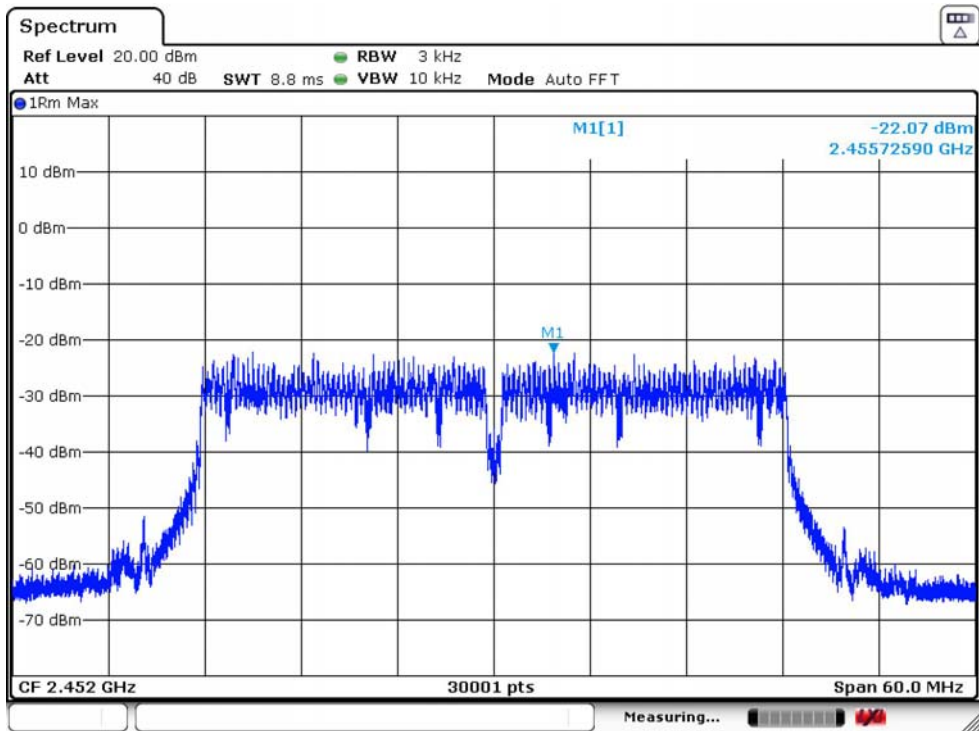

6. CONDUCTED BAND EDGE

6.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2. Test Setup



6.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	100MHz(20MHz Bandwidth mode)/200MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


6.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 6.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


6.5. Test Result

Temperature	25°C	Relative Humidity	55%	Test Voltage	120V/60Hz
Result	PASS				

802.11b 2412MHz

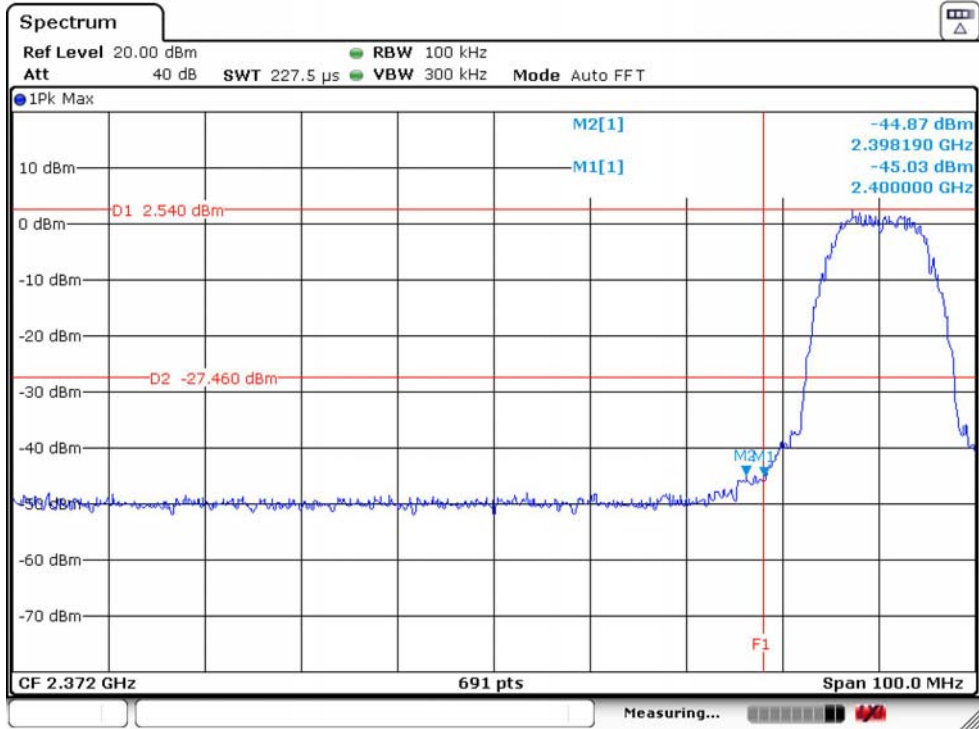

802.11b 2462MHz

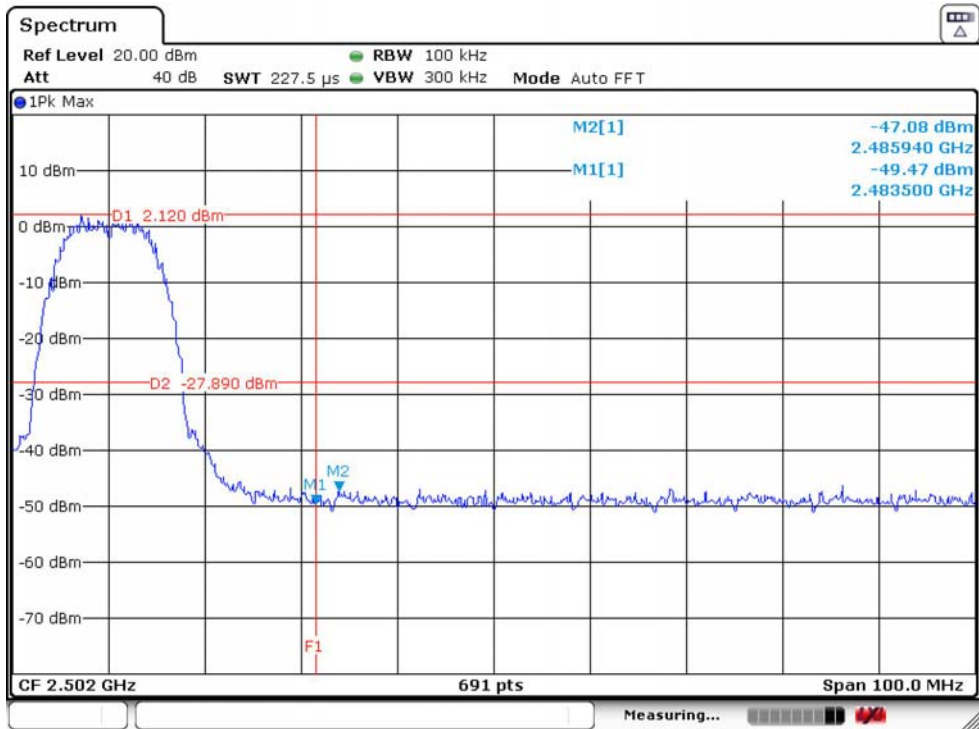


802.11b is worse case and only report worse case

7. CONDUCTED SPURIOUS EMISSIONS

7.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2. Test Setup

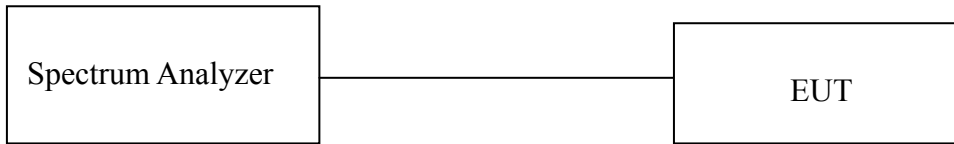

7.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	25GHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


7.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 7.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


7.5. Test Result

Temperature	25°C	Relative Humidity	55%	Test Voltage	120V/60Hz
Result	PASS				


802.11b 2412MHz

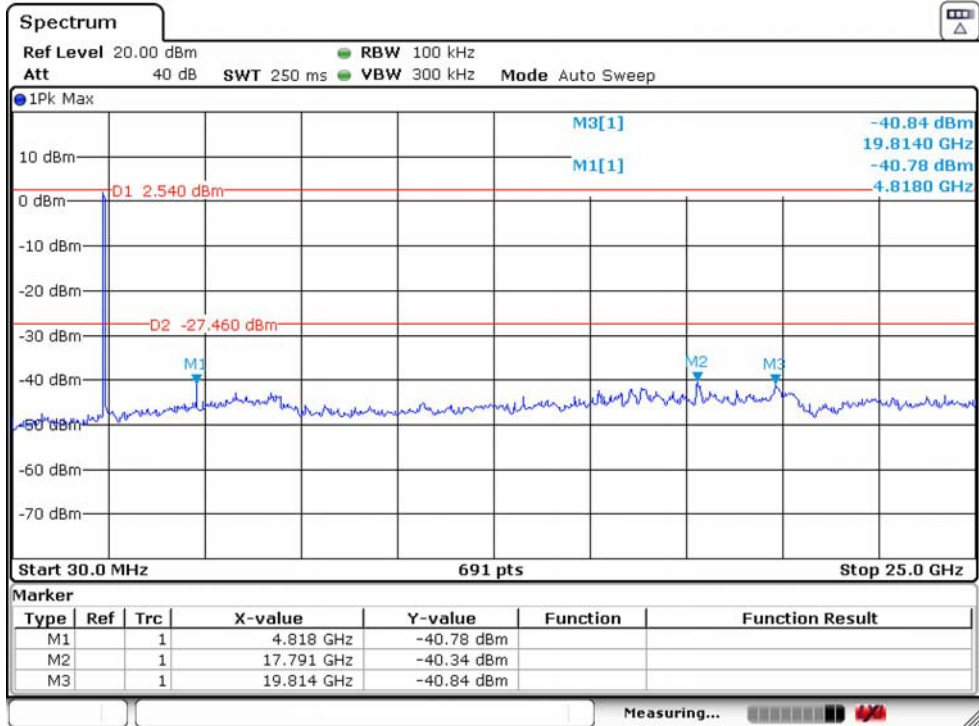

802.11b 2437MHz

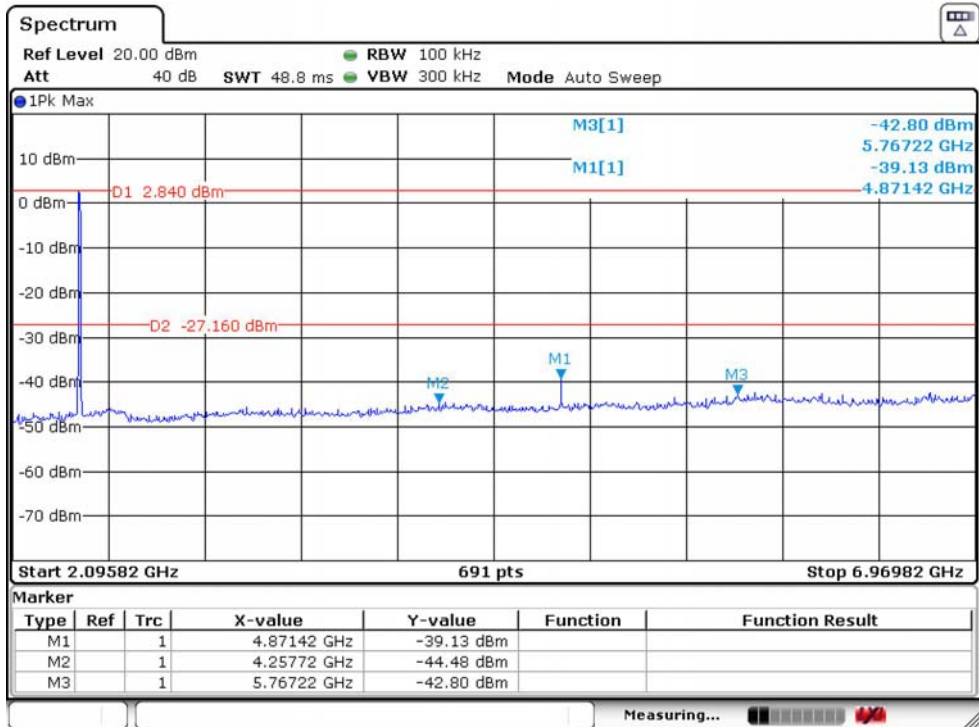

802.11b 2462MHz

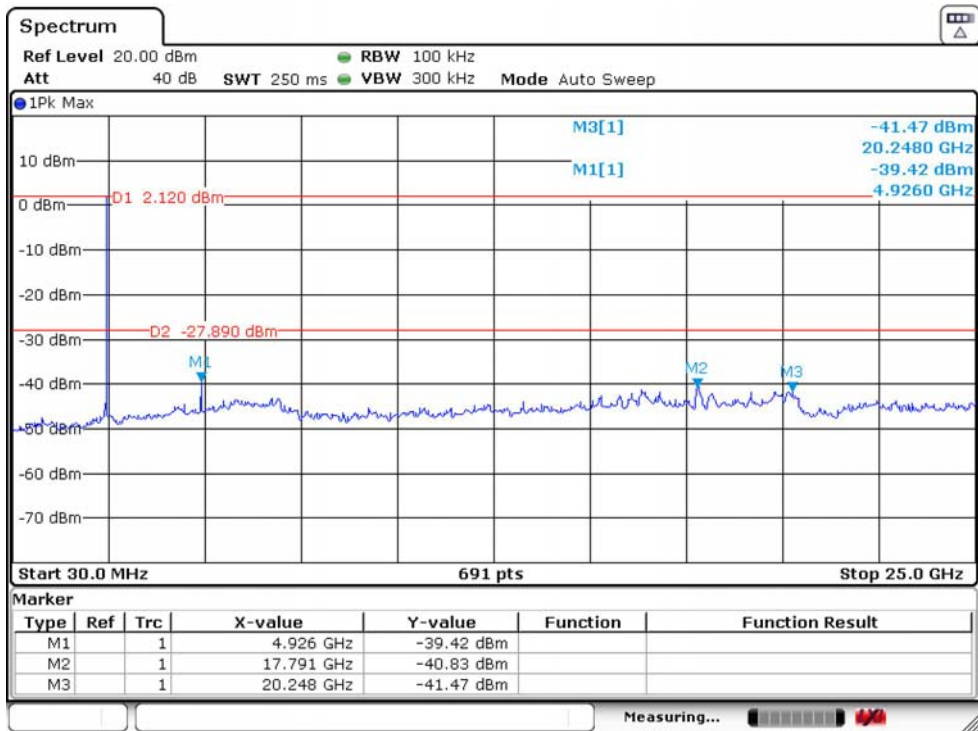

802.11b is worse case and only report worse case

8. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. Test Setup


9kHz~30MHz

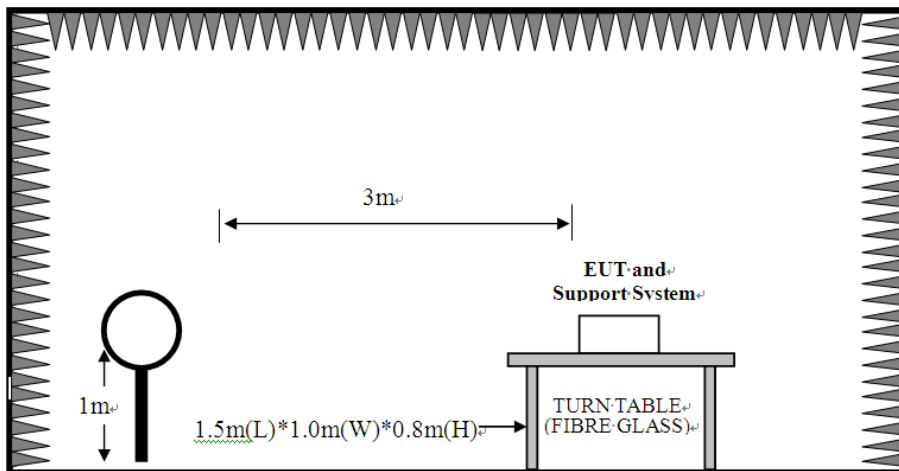

30~1000MHz

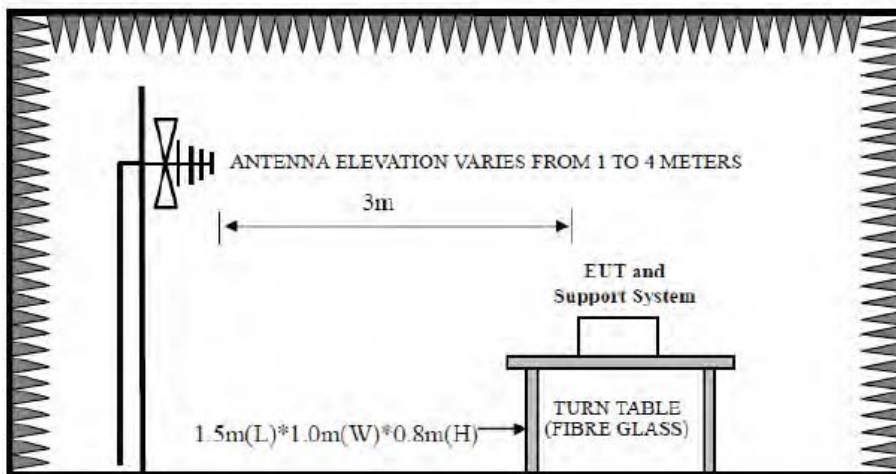

Above 1GHz

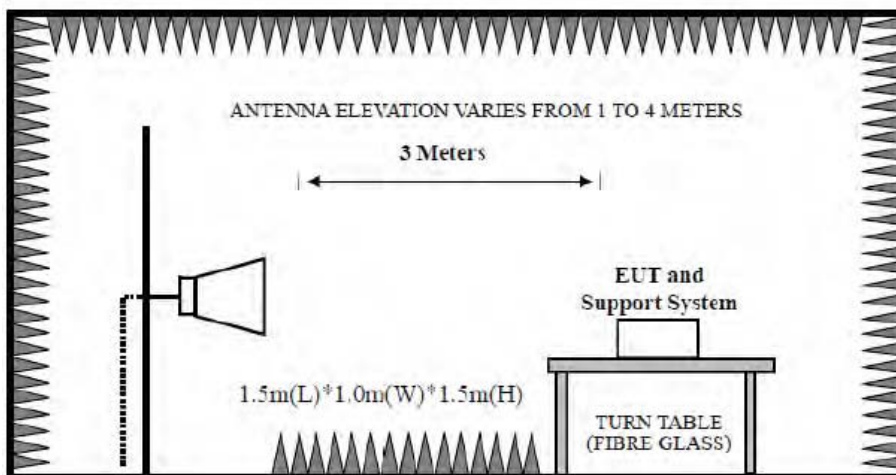

8.3. Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	200Hz
VBW	200Hz
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	200Hz
VBW	200Hz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz

Spectrum Parameters	Setting	
RBW	1MHz	
VBW	PEAK Measurement	RMS Measurement
	3MHz	3MHz
Start frequency	1GHz	
Stop frequency	25GHz	
Sweep Time	Auto	
Detector	PEAK	
Trace Mode	Max Hold	

Note :

1. T is the on-time time of the duty cycle,when EUT transmit continuously with maximum output power,unit is seconds. reference section 2.7 for the on-time time.
2. For RMS Measurement if Duty cycle < 98%, The final result= Emission Level + 10 log (1 / Duty cycle).