



FCC TEST REPORT (15.407)

REPORT NO.: RF131210C32-1
MODEL NO.: W7, W7R, W7C
FCC ID: SLY-W7XRC
RECEIVED: Dec. 10, 2013
TESTED: Feb. 21 ~ Mar. 18, 2014
ISSUED: Mar. 26, 2014

APPLICANT: Pakedge Device and Software Inc.

ADDRESS: 1163 Triton Drive, Foster City, California, United States, 94404

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES.....	9
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
3.3 DUTY CYCLE OF TEST SIGNAL.....	12
3.4 DESCRIPTION OF SUPPORT UNITS	16
3.4.1 CONFIGURATION OF SYSTEM UNDER TEST	17
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	19
4. TEST TYPES AND RESULTS	20
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	20
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	20
4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	20
4.1.3 TEST INSTRUMENTS.....	21
4.1.4 TEST PROCEDURES	22
4.1.5 DEVIATION FROM TEST STANDARD	22
4.1.6 TEST SETUP.....	23
4.1.7 EUT OPERATING CONDITION	24
4.1.8 TEST RESULTS (A1)	25
4.1.1 TEST RESULTS (A2)	26
4.1.2 TEST RESULTS (B1)	27
4.1.3 TEST RESULTS (B2)	36
4.1.4 TEST RESULTS (C1)	37
4.1.5 TEST RESULTS (C2)	46
4.2 CONDUCTED EMISSION MEASUREMENT	47
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	47
4.2.2 TEST INSTRUMENTS.....	47
4.2.3 TEST PROCEDURES	48
4.2.4 DEVIATION FROM TEST STANDARD	48
4.2.5 TEST SETUP.....	48
4.2.6 EUT OPERATING CONDITIONS	48
4.2.7 TEST RESULTS (A1)	49
4.2.8 TEST RESULTS (A2)	51
4.2.9 TEST RESULTS (B1)	53
4.2.10 TEST RESULTS (B2)	55
4.2.11 TEST RESULTS (C1)	57
4.2.12 TEST RESULTS (C2)	59
4.3 PEAK TRANSMIT POWER MEASUREMENT	61
4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	61
4.3.2 TEST SETUP.....	61
4.3.3 TEST INSTRUMENTS.....	61
4.3.4 TEST PROCEDURE.....	62
4.3.5 DEVIATION FROM TEST STANDARD	62



A D T

4.3.6	EUT OPERATING CONDITIONS	62
4.3.7	TEST RESULTS	63
4.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT	67
4.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	67
4.4.2	TEST SETUP	67
4.4.3	TEST INSTRUMENTS	67
4.4.4	TEST PROCEDURES	67
4.4.5	DEVIATION FROM TEST STANDARD	67
4.4.6	EUT OPERATING CONDITIONS	67
4.4.7	TEST RESULTS	68
4.5	PEAK POWER EXCURSION MEASUREMENT	70
4.5.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	70
4.5.2	TEST SETUP	70
4.5.3	TEST INSTRUMENTS	70
4.5.4	TEST PROCEDURE	70
4.5.5	DEVIATION FROM TEST STANDARD	71
4.5.6	EUT OPERATING CONDITIONS	71
4.5.7	TEST RESULTS	72
4.6	FREQUENCY STABILITY	73
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	73
4.6.2	TEST SETUP	73
4.6.3	TEST INSTRUMENTS	73
4.6.4	TEST PROCEDURE	74
4.6.5	DEVIATION FROM TEST STANDARD	74
4.6.6	EUT OPERATING CONDITION	74
4.6.7	TEST RESULTS	75
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	76
6.	INFORMATION ON THE TESTING LABORATORIES	77
7.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	78



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF131210C32-1	Original release	Mar. 26, 2014



1. CERTIFICATION

PRODUCT: 802.11 abgn device

MODEL: W7, W7R, W7C

BRAND: Pakedge

APPLICANT: Pakedge Device and Software Inc.

TESTED: Feb. 21 ~ Mar. 18, 2014

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10-2009

The above equipment (model: W7, W7R, W7C) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY: Ivy Lin, **DATE:** Mar. 26, 2014
Ivy Lin / Specialist

APPROVED BY: Ken Liu, **DATE:** Mar. 26, 2014
Ken Liu / Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -5.00dB at 27.52782MHz.
15.407(b/1/2/3)(b)(6)	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -2.3dB at 5150.00MHz.
15.407(a/1/2)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Dipole antenna: Antenna connector is RSMA not a standard connector. PIFA antenna: Antenna connector is I-PEX not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	802.11 abgn device
MODEL NO.	W7, W7R, W7C
POWER SUPPLY	12Vdc (Adapter) 55Vdc (POE)
MODULATION TYPE	64QAM, 16QAM, QPSK, BPSK
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps
OPERATING FREQUENCY	5180 ~ 5240MHz
NUMBER OF CHANNEL	4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
OUTPUT POWER	49.541mW
ANTENNA TYPE	Refer to NOTE
ANTENNA CONNECTOR	Refer to NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Adapter

NOTE:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	2TX
802.11a	2TX
802.11n (20MHz)	2TX
802.11n (40MHz)	2TX

2. The models as below are electrically identical, different models are for antenna type and shape difference.

BRAND	MODEL	DIFFERENCE
Pakedge	W7	Antenna type: Dipole
	W7R	Antenna type: Dipole
	W7C	Antenna type: PIFA

3. The EUT uses the following antennas:

Model: W7, W7R				
Antenna Type	Gain (dBi)			Antenna Connector
	2.4GHz	5.18 ~ 5.25 GHz	5.745 ~ 5.825GHz	
Dipole	3.58	4.0	4.83	RSMA

Model: W7C					
CHAIN	Antenna Type	Gain (dBi)			Antenna Connector
		2.4GHz	5.18 ~ 5.25 GHz	5.745 ~ 5.825GHz	
Chain 0	PIFA	4.4	-	-	I-PEX
Chain 1	PIFA	4.5	-	-	
Chain 0	PIFA	-	3.6	3.8	
Chain 1	PIFA	-	3.3	3.9	

4. The EUT consumes power from the following adapter and POE.

ADAPTER	
BRAND	Powertron Electronics Corp.
MODEL	PA1024-2HUB / PA1024-120HUB200
INPUT POWER	100-240Vac, 50-60Hz, 0.6A
OUTPUT POWER	12Vdc, 2.0A, 24W Max
POWER LINE	1.5m cable with 1 core attached on adapter

POE (Support unit only)	
BRAND	PowerDsine
MODEL	PD-9001GR/AC
INPUT POWER	100-240Vac, 50/60Hz, 0.8A
OUTPUT POWER	55Vdc, 0.62A

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190MHz	46	5230MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
A1	-	√	√	-	Model: W7 + adapter
A2	-	√	√	-	Model: W7 + POE
B1	√	√	√	√	Model: W7R + adapter
B2	-	√	√	-	Model: W7R + POE
C1	√	√	√	-	Model: W7C + adapter
C2	-	√	√	-	Model: W7C + POE

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE $<$ 1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.
2. "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B1, C1	802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6.0
B1, C1	802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	7.2
B1, C1	802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A1, A2, B1, B2, C1, C2	802.11n (20MHz)	36 to 48	40	OFDM	BPSK	7.2

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A1, A2, B1, B2, C1, C2	802.11n (20MHz)	36 to 48	40	OFDM	BPSK	7.2

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B1	802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6.0
B1	802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	7.2
B1	802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	15.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Ted Chang, Cedric Wu, Sun Lin
RE<1G	25deg. C, 68%RH	120Vac, 60Hz, 55Vdc (SYSTEM)	Sun Lin
PLC	25deg. C, 68%RH	120Vac, 60Hz, 55Vdc (SYSTEM)	Chris Lin
APCM	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui

3.3 DUTY CYCLE OF TEST SIGNAL


MODULATION TYPE: BPSK

Duty cycle of test signal is < 98 %, duty factor is required

802.11a: Duty cycle = $1.35750/1.4050 = 0.966$, Duty factor = $10 * \log(1/0.966) = 0.15$

802.11n (20MHz): Duty cycle = $1.2700/1.31750 = 0.964$, Duty factor = $10 * \log(1/0.964) = 0.16$

802.11n (40MHz): Duty cycle = $632.5/667.5 = 0.948$, Duty factor = $10 * \log(1/0.948) = 0.23$

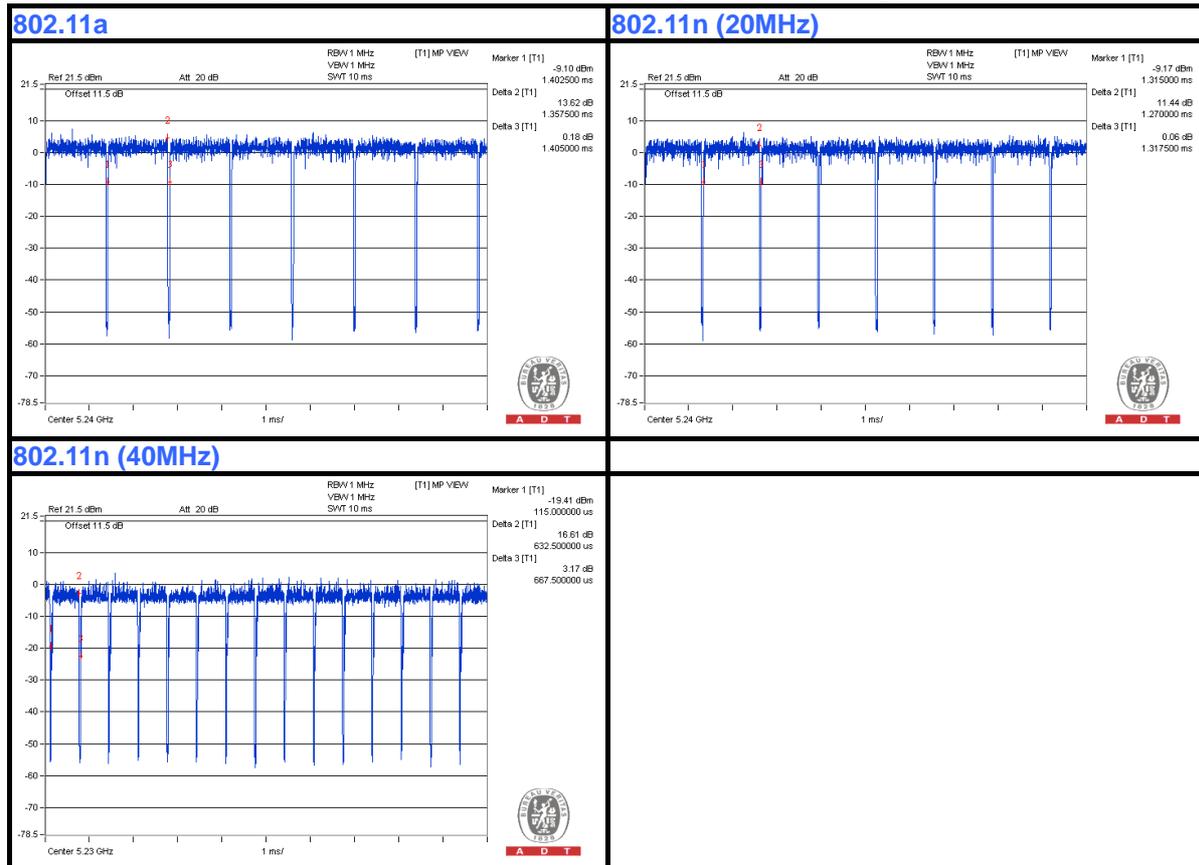


MODULATION TYPE: QPSK

Duty cycle of test signal is < 98 %, duty factor is required

802.11a: Duty cycle = $690.0/745.0 = 0.926$, Duty factor = $10 * \log(1/0.926) = 0.33$

802.11n (20MHz): Duty cycle = $1.2675/1.3300 = 0.953$, Duty factor = $10 * \log(1/0.953) = 0.21$

802.11n (40MHz): Duty cycle = $325.0/367.5 = 0.884$, Duty factor = $10 * \log(1/0.884) = 0.54$

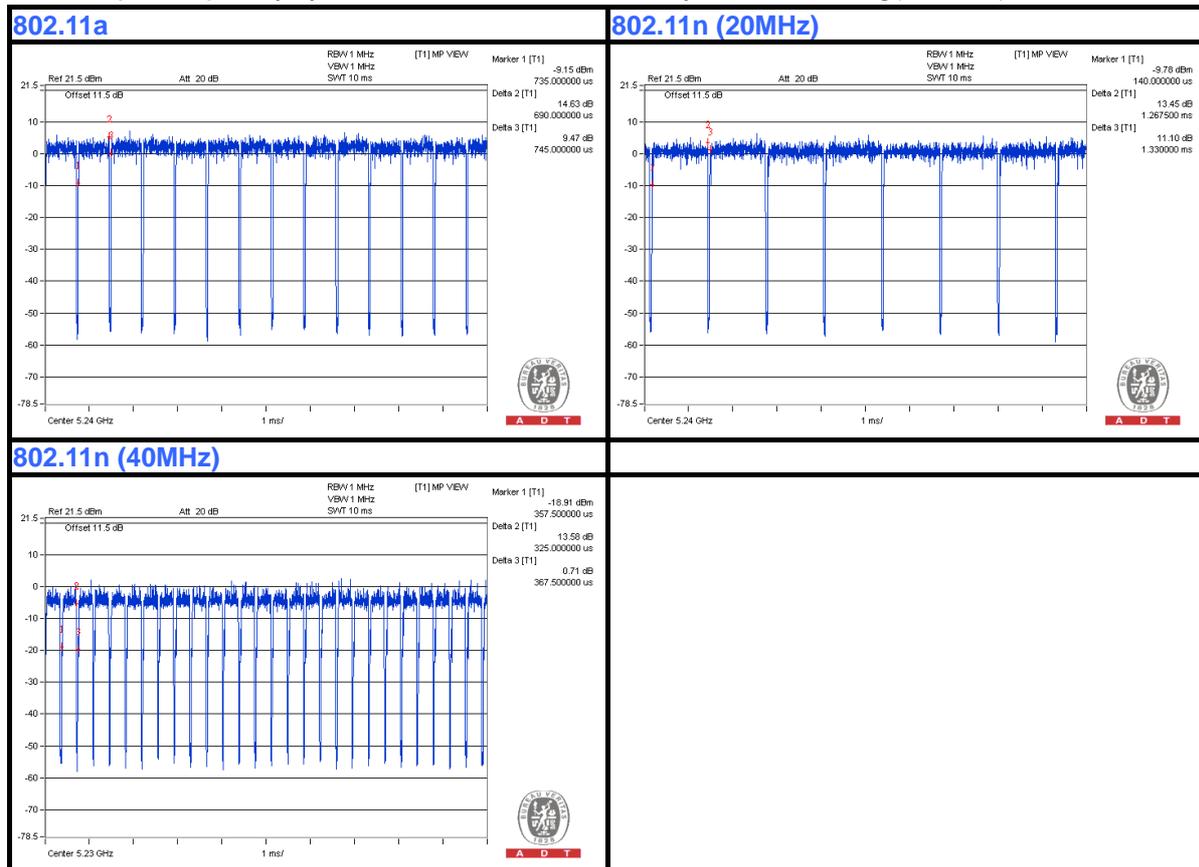


MODULATION TYPE: 16QAM

Duty cycle of test signal is < 98 %, duty factor is required

802.11a: Duty cycle = $350.0/400.0 = 0.875$, Duty factor = $10 * \log(1/0.875) = 0.58$

802.11n (20MHz): Duty cycle = $342.5/392.5 = 0.873$, Duty factor = $10 * \log(1/0.873) = 0.59$

802.11n (40MHz): Duty cycle = $180.0/220.0 = 0.818$, Duty factor = $10 * \log(1/0.818) = 0.87$

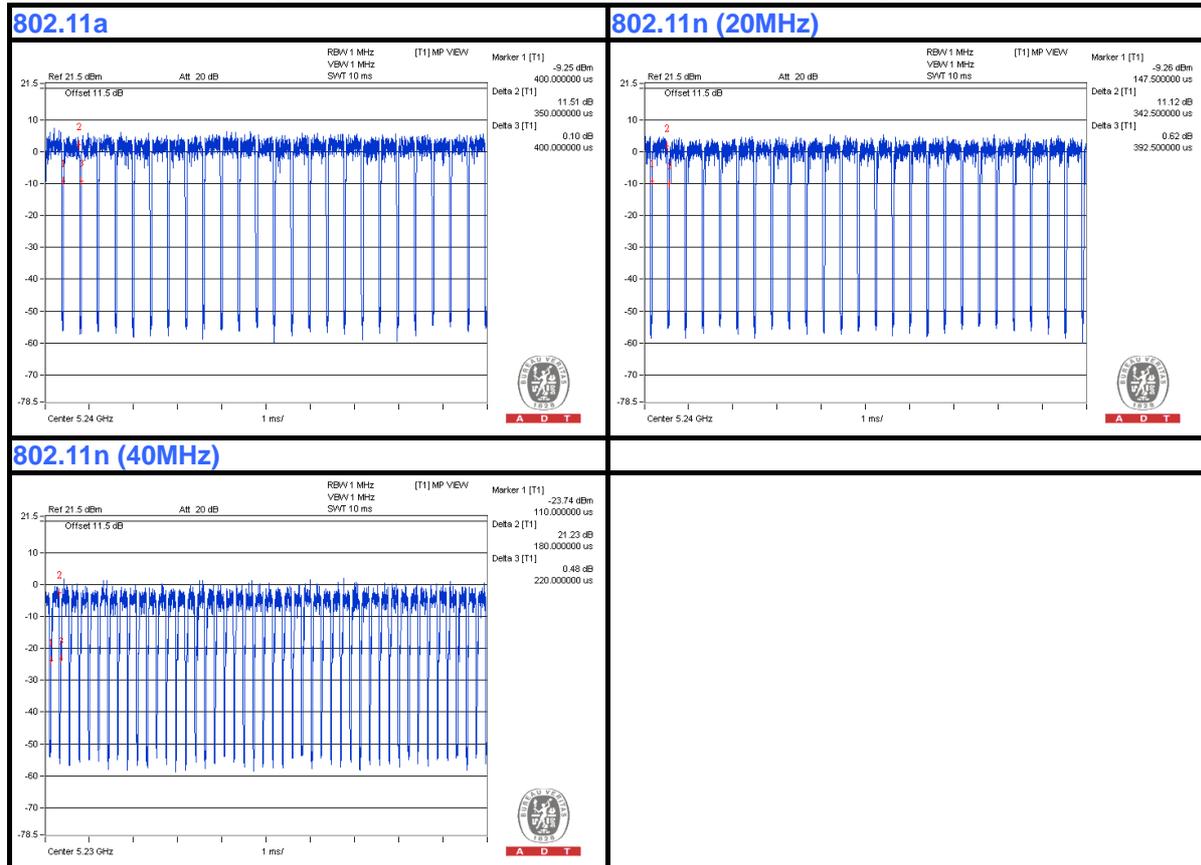



A D T


MODULATION TYPE: 64QAM

Duty cycle of test signal is < 98 %, duty factor is required

802.11a: Duty cycle = $185.0/222.5 = 0.831$, Duty factor = $10 * \log(1/0.831) = 0.80$

802.11n (20MHz): Duty cycle = $190.0/237.5 = 0.800$, Duty factor = $10 * \log(1/0.800) = 0.97$

802.11n (40MHz): Duty cycle = $105.0/147.5 = 0.712$, Duty factor = $10 * \log(1/0.712) = 1.48$

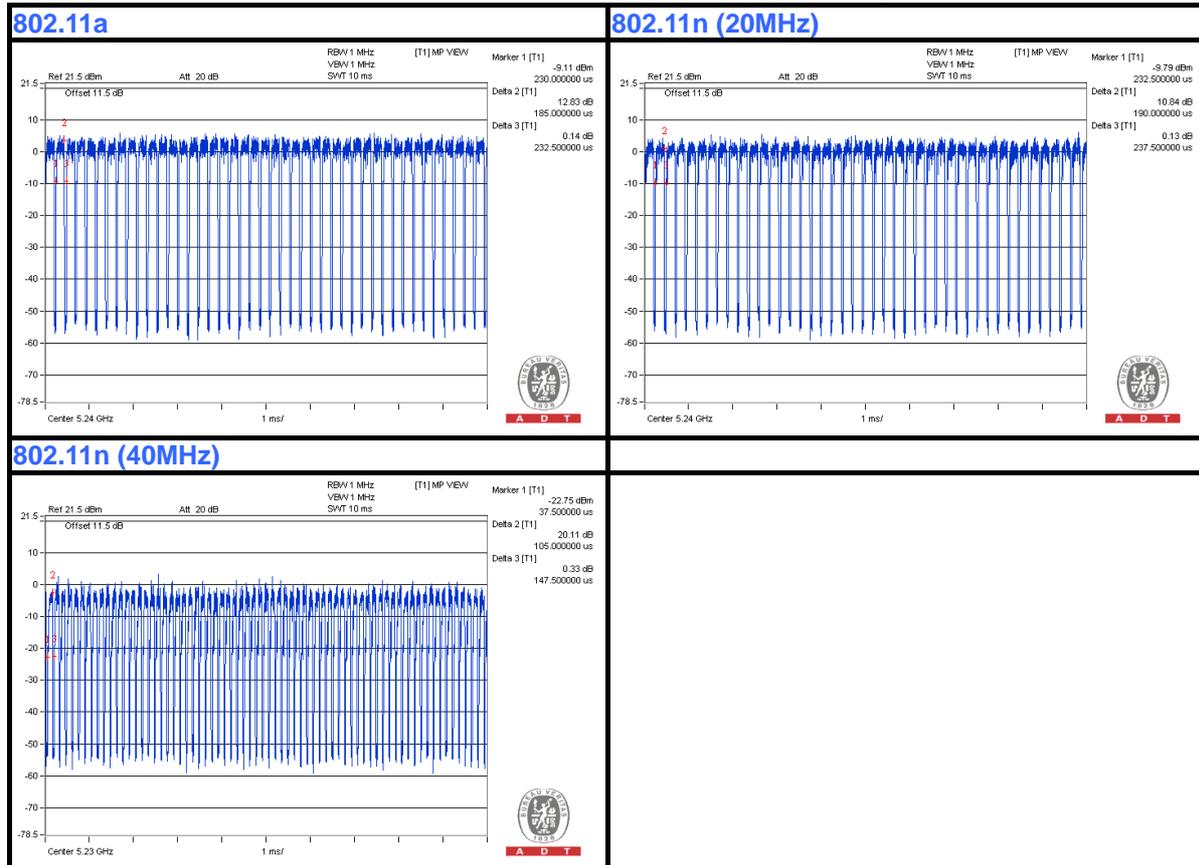

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	D531	CN-0XM006-48643-8 1U-2610	QDS-BRCM1020


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m RJ45 UTP cable, 1.8m RJ45 UTP cable

NOTE:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item 1 acted as a communication partner to transfer data.


3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

Adapter Mode

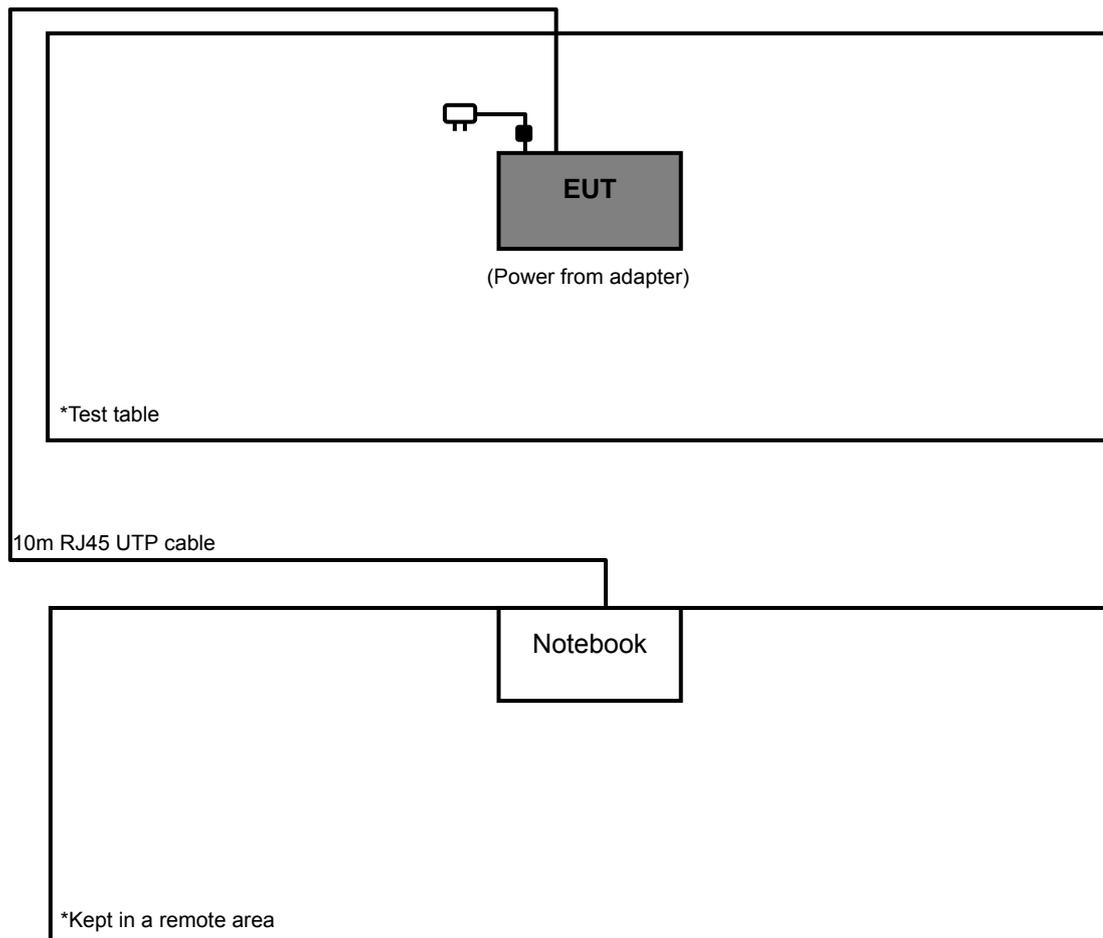



POE Mode

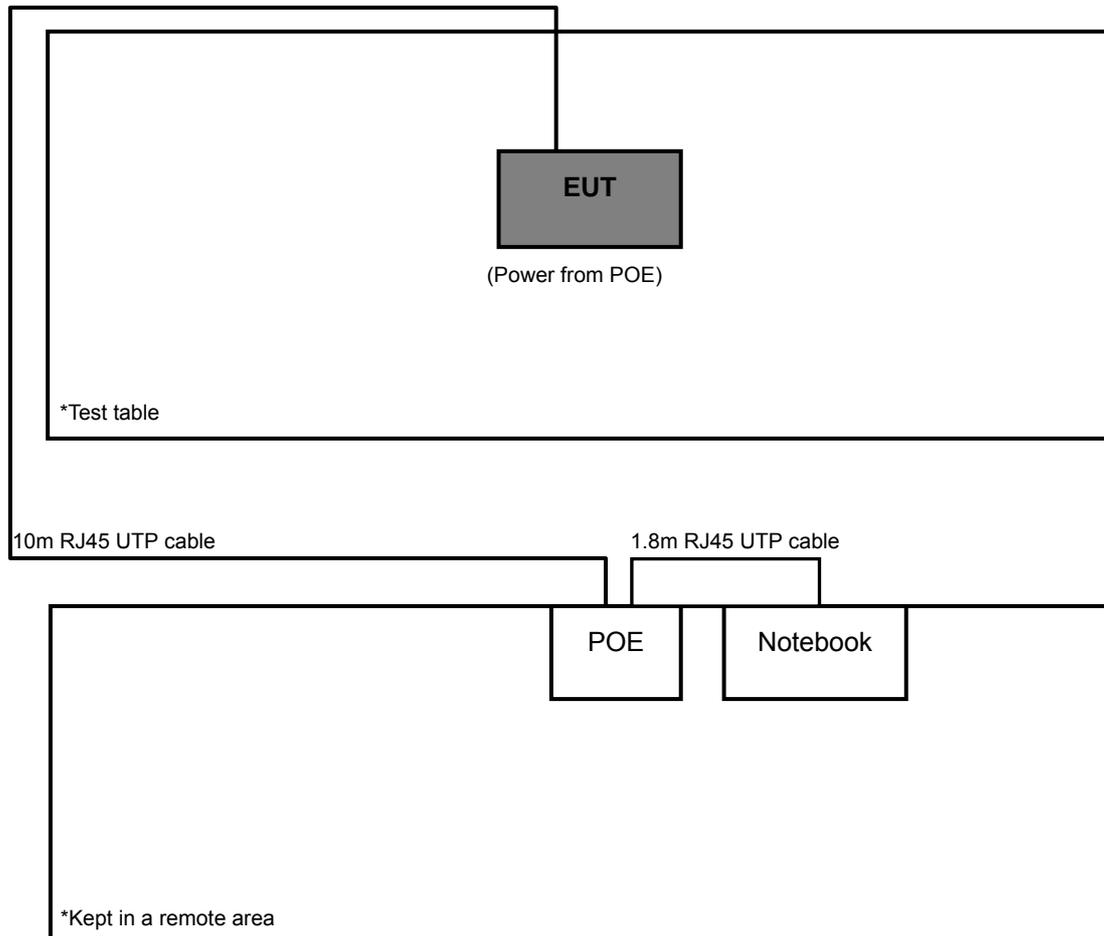

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D01 General UNII Test Procedures v01 r03

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
√	FIELD STRENGTH AT 3m (dBμV/m)	
	PK	AV
	74	54
	EIRP LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dBμV/m)
	PK	PK
	-27	68.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$



4.1.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 29, 2013	Nov. 28, 2014
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Feb. 11, 2014	Feb. 10, 2015
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Mar. 25, 2013	Mar. 24, 2014
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-209	Sep. 12, 2013	Sep. 11, 2014
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 15, 2013	Jul. 14, 2014
Preamplifier Agilent	8449B	3008A01911	Aug. 22, 2013	Aug. 21, 2014
Preamplifier Agilent	8447D	2944A10638	Oct. 18, 2013	Oct. 17, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	248780/4 309222/4 274092/4	Aug. 26, 2013	Aug. 25, 2014
RF signal cable Worken	5D-FB	Cable-HYCH9-01	Aug. 11, 2013	Aug. 10, 2014
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 18, 2013	Oct. 17, 2014
High Speed Power Meter	ML2495A	0824011	Jul. 29, 2013	Jul. 28, 2014
Power Sensor	MA2411B	0738171	Aug. 01, 2013	Jul. 31, 2014
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 10, 2013	Jun. 09, 2014

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 215374.
5. The IC Site Registration No. is IC 7450F-9.

4.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.5 DEVIATION FROM TEST STANDARD


No deviation.

4.1.6 TEST SETUP

Frequency range 30MHz~1GHz

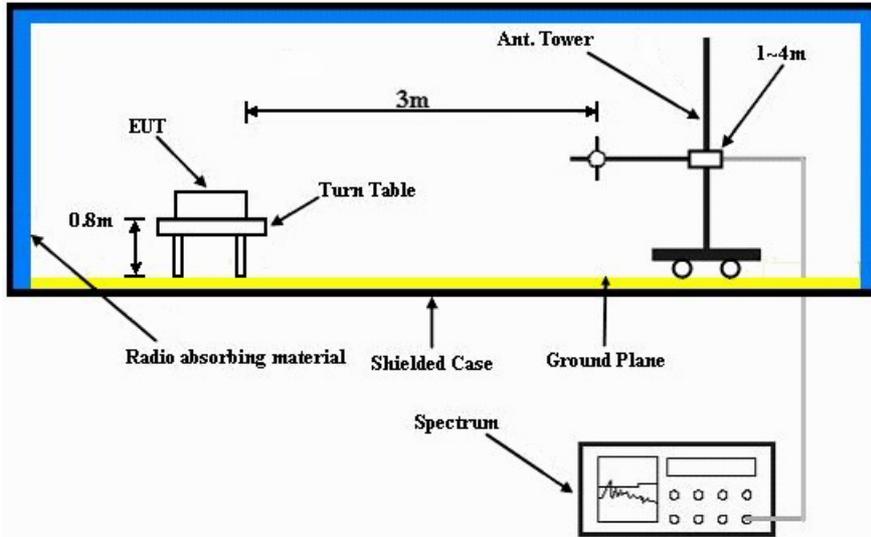

Frequency range above 1GHz

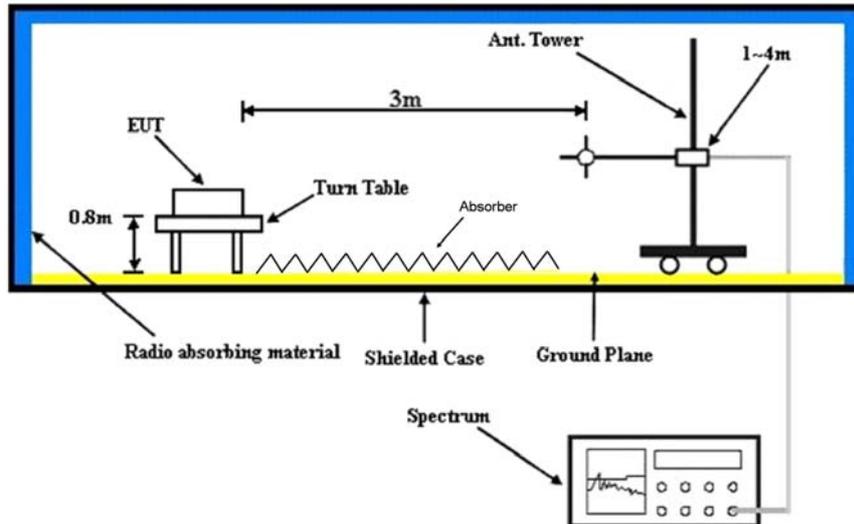

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.7 EUT OPERATING CONDITION

- a. Placed the EUT on the testing table.
- b. Prepared notebook to act as communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via a RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".
- e. The necessary accessories enabled the system in full functions.

4.1.8 TEST RESULTS (A1)

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.08	35.1 QP	40.0	-4.9	1.89 H	241	50.90	-15.80
2	99.95	31.1 QP	43.5	-12.4	1.99 H	193	49.70	-18.60
3	224.31	30.8 QP	46.0	-15.2	1.24 H	87	47.20	-16.40
4	272.50	32.7 QP	46.0	-13.3	1.00 H	93	45.80	-13.10
5	375.10	27.9 QP	46.0	-18.1	1.00 H	133	38.50	-10.60
6	625.37	30.6 QP	46.0	-15.4	1.24 H	123	36.20	-5.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.18	36.2 QP	40.0	-3.8	1.08 V	228	52.00	-15.80
2	57.98	30.9 QP	40.0	-9.1	1.00 V	11	45.30	-14.40
3	140.37	30.0 QP	43.5	-13.5	1.24 V	85	44.30	-14.30
4	294.26	34.7 QP	46.0	-11.3	1.24 V	16	47.00	-12.30
5	375.10	32.6 QP	46.0	-13.4	1.24 V	16	43.20	-10.60
6	625.37	31.3 QP	46.0	-14.7	1.24 V	174	36.90	-5.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.1.1 TEST RESULTS (A2)

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	34.8 QP	40.0	-5.2	1.50 H	243	50.60	-15.80
2	98.40	34.9 QP	43.5	-8.6	1.25 H	253	53.80	-18.90
3	208.77	31.6 QP	43.5	-11.9	2.00 H	110	47.80	-16.20
4	275.61	32.4 QP	46.0	-13.6	1.50 H	115	45.40	-13.00
5	375.10	32.1 QP	46.0	-13.9	1.00 H	128	42.70	-10.60
6	625.37	34.1 QP	46.0	-11.9	1.00 H	120	39.70	-5.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.12	36.2 QP	40.0	-3.8	1.02 V	248	52.00	-15.80
2	98.40	32.4 QP	43.5	-11.1	1.25 V	230	51.30	-18.90
3	204.10	34.6 QP	43.5	-8.9	1.50 V	11	51.10	-16.50
4	275.61	35.6 QP	46.0	-10.4	2.00 V	148	48.60	-13.00
5	375.10	32.2 QP	46.0	-13.8	1.50 V	195	42.80	-10.60
6	625.37	36.1 QP	46.0	-9.9	1.25 V	170	41.70	-5.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.1.2 TEST RESULTS (B1)

ABOVE 1GHz DATA :

802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.0 PK	74.0	-18.0	1.05 H	62	53.60	2.40
2	5150.00	44.0 AV	54.0	-10.0	1.05 H	62	41.60	2.40
3	*5180.00	95.4 PK			1.01 H	163	56.00	39.40
4	*5180.00	84.8 AV			1.01 H	163	45.40	39.40
5	#5840.00	57.1 PK	74.0	-16.9	1.57 H	117	53.70	3.40
6	#5840.00	46.0 AV	54.0	-8.0	1.57 H	117	42.60	3.40
7	#10360.00	58.4 PK	74.0	-15.6	1.10 H	338	44.50	13.90
8	#10360.00	45.2 AV	54.0	-8.8	1.10 H	338	31.30	13.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.9 PK	74.0	-17.1	1.11 V	17	54.50	2.40
2	5150.00	44.6 AV	54.0	-9.4	1.11 V	17	42.20	2.40
3	*5180.00	109.6 PK			1.27 V	340	70.20	39.40
4	*5180.00	99.0 AV			1.27 V	340	59.60	39.40
5	#5840.00	59.6 PK	74.0	-14.4	1.01 V	352	56.20	3.40
6	#5840.00	49.4 AV	54.0	-4.6	1.01 V	352	46.00	3.40
7	#10360.00	61.4 PK	74.0	-12.6	1.05 V	6	47.50	13.90
8	#10360.00	47.5 AV	54.0	-6.5	1.05 V	6	33.60	13.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. “#“:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	96.0 PK			1.02 H	333	56.50	39.50
2	*5200.00	86.3 AV			1.02 H	333	46.80	39.50
3	#10400.00	59.4 PK	74.0	-14.6	1.54 H	119	45.30	14.10
4	#10400.00	45.7 AV	54.0	-8.3	1.54 H	119	31.60	14.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	109.5 PK			1.04 V	226	70.00	39.50
2	*5200.00	99.7 AV			1.04 V	226	60.20	39.50
3	#10400.00	59.1 PK	74.0	-14.9	1.00 V	90	45.00	14.10
4	#10400.00	46.0 AV	54.0	-8.0	1.00 V	90	31.90	14.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	97.6 PK			1.16 H	36	58.00	39.60
2	*5240.00	87.0 AV			1.16 H	36	47.40	39.60
3	5350.00	57.3 PK	74.0	-16.7	1.05 H	17	54.70	2.60
4	5350.00	44.8 AV	54.0	-9.2	1.05 H	17	42.20	2.60
5	#10480.00	59.6 PK	74.0	-14.4	1.00 H	210	44.30	15.30
6	#10480.00	47.0 AV	54.0	-7.0	1.00 H	210	31.70	15.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.8 PK			1.13 V	343	70.20	39.60
2	*5240.00	99.3 AV			1.13 V	343	59.70	39.60
3	5350.00	60.1 PK	74.0	-13.9	1.02 V	51	57.50	2.60
4	5350.00	48.2 AV	54.0	-5.8	1.02 V	51	45.60	2.60
5	#10480.00	61.9 PK	74.0	-12.1	1.96 V	347	46.60	15.30
6	#10480.00	48.9 AV	54.0	-5.1	1.96 V	347	33.60	15.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. "#":The radiated frequency is out the restricted band.

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.6 PK	74.0	-18.4	1.06 H	334	53.20	2.40
2	5150.00	43.6 AV	54.0	-10.4	1.06 H	334	41.20	2.40
3	*5180.00	95.4 PK			1.01 H	162	56.00	39.40
4	*5180.00	84.6 AV			1.01 H	162	45.20	39.40
5	#10360.00	58.1 PK	74.0	-15.9	1.33 H	199	44.20	13.90
6	#10360.00	45.1 AV	54.0	-8.9	1.33 H	199	31.20	13.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.6 PK	74.0	-17.4	1.05 V	360	54.20	2.40
2	5150.00	44.0 AV	54.0	-10.0	1.05 V	360	41.60	2.40
3	*5180.00	109.6 PK			1.27 V	340	70.20	39.40
4	*5180.00	99.0 AV			1.27 V	340	59.60	39.40
5	#10360.00	59.1 PK	74.0	-14.9	1.42 V	175	45.20	13.90
6	#10360.00	47.5 AV	54.0	-6.5	1.42 V	175	33.60	13.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	95.8 PK			1.01 H	333	56.30	39.50
2	*5200.00	86.3 AV			1.01 H	333	46.80	39.50
3	#10400.00	57.8 PK	74.0	-16.2	1.36 H	225	43.70	14.10
4	#10400.00	45.3 AV	54.0	-8.7	1.36 H	225	31.20	14.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	109.4 PK			1.04 V	225	69.90	39.50
2	*5200.00	99.6 AV			1.04 V	225	60.10	39.50
3	#10400.00	59.5 PK	74.0	-14.5	1.08 V	67	45.40	14.10
4	#10400.00	47.5 AV	54.0	-6.5	1.08 V	67	33.40	14.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	97.4 PK			1.16 H	35	57.80	39.60
2	*5240.00	86.8 AV			1.16 H	35	47.20	39.60
3	5350.00	57.1 PK	74.0	-16.9	1.05 H	18	54.50	2.60
4	5350.00	44.4 AV	54.0	-9.6	1.05 H	18	41.80	2.60
5	#10480.00	59.2 PK	74.0	-14.8	1.34 H	226	43.90	15.30
6	#10480.00	46.5 AV	54.0	-7.5	1.34 H	226	31.20	15.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.9 PK			1.13 V	343	70.30	39.60
2	*5240.00	99.4 AV			1.13 V	343	59.80	39.60
3	5350.00	59.8 PK	74.0	-14.2	1.03 V	52	57.20	2.60
4	5350.00	47.9 AV	54.0	-6.1	1.03 V	52	45.30	2.60
5	#10480.00	60.5 PK	74.0	-13.5	1.20 V	308	45.20	15.30
6	#10480.00	48.6 AV	54.0	-5.4	1.20 V	308	33.30	15.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 38	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Cedric Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.2 PK	74.0	-16.8	1.05 H	92	54.80	2.40
2	5150.00	44.0 AV	54.0	-10.0	1.05 H	92	41.60	2.40
3	*5190.00	92.3 PK			1.00 H	336	52.80	39.50
4	*5190.00	81.7 AV			1.00 H	336	42.20	39.50
5	#10380.00	57.7 PK	74.0	-16.3	1.93 H	264	43.60	14.10
6	#10380.00	45.3 AV	54.0	-8.7	1.93 H	264	31.20	14.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.3 PK	74.0	-8.7	1.15 V	344	62.90	2.40
2	5150.00	51.7 AV	54.0	-2.3	1.15 V	344	49.30	2.40
3	*5190.00	104.5 PK			1.00 V	303	65.00	39.50
4	*5190.00	94.7 AV			1.00 V	303	55.20	39.50
5	#10380.00	58.8 PK	74.0	-15.2	1.00 V	102	44.70	14.10
6	#10380.00	46.0 AV	54.0	-8.0	1.00 V	102	31.90	14.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Cedric Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	93.4 PK			1.00 H	218	53.80	39.60
2	*5230.00	82.9 AV			1.00 H	218	43.30	39.60
3	5350.00	56.8 PK	74.0	-17.2	1.62 H	67	54.20	2.60
4	5350.00	44.9 AV	54.0	-9.1	1.62 H	67	42.30	2.60
5	#10460.00	58.5 PK	74.0	-15.5	1.05 H	54	43.70	14.80
6	#10460.00	46.0 AV	54.0	-8.0	1.05 H	54	31.20	14.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	105.4 PK			1.18 V	286	65.80	39.60
2	*5230.00	95.4 AV			1.18 V	286	55.80	39.60
3	5350.00	58.0 PK	74.0	-16.0	1.05 V	309	55.40	2.60
4	5350.00	46.7 AV	54.0	-7.3	1.05 V	309	44.10	2.60
5	#10460.00	59.5 PK	74.0	-14.5	1.00 V	99	44.70	14.80
6	#10460.00	46.4 AV	54.0	-7.6	1.00 V	99	31.60	14.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	34.9 QP	40.0	-5.1	1.25 H	268	50.70	-15.80
2	101.51	32.6 QP	43.5	-10.9	2.00 H	109	50.80	-18.20
3	224.31	30.2 QP	46.0	-15.8	1.50 H	131	46.60	-16.40
4	249.18	32.1 QP	46.0	-13.9	1.00 H	122	46.30	-14.20
5	375.10	31.6 QP	46.0	-14.4	1.25 H	153	42.20	-10.60
6	675.11	34.6 QP	46.0	-11.4	1.00 H	221	39.80	-5.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.52	35.9 QP	40.0	-4.1	1.04 V	106	51.70	-15.80
2	57.98	34.0 QP	40.0	-6.0	1.25 V	16	48.40	-14.40
3	99.95	31.0 QP	43.5	-12.5	1.50 V	254	49.60	-18.60
4	140.37	31.0 QP	43.5	-12.5	2.00 V	201	45.30	-14.30
5	297.37	29.2 QP	46.0	-16.8	1.50 V	55	41.50	-12.30
6	499.46	32.9 QP	46.0	-13.1	1.25 V	270	41.30	-8.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.1.3 TEST RESULTS (B2)

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.05	35.8 QP	40.0	-4.2	1.08 H	100	51.60	-15.80
2	98.40	29.9 QP	43.5	-13.6	2.00 H	282	48.80	-18.90
3	140.37	29.2 QP	43.5	-14.3	1.50 H	334	43.50	-14.30
4	216.54	31.8 QP	46.0	-14.2	1.01 H	263	48.00	-16.20
5	275.61	32.6 QP	46.0	-13.4	1.01 H	144	45.60	-13.00
6	625.37	31.8 QP	46.0	-14.2	1.25 H	219	37.40	-5.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.45	36.4 QP	40.0	-3.6	1.48 V	12	52.20	-15.80
2	99.95	28.4 QP	43.5	-15.1	1.24 V	200	47.00	-18.60
3	199.44	31.1 QP	43.5	-12.4	1.00 V	31	47.50	-16.40
4	280.27	35.0 QP	46.0	-11.0	1.49 V	170	47.70	-12.70
5	499.46	32.7 QP	46.0	-13.3	1.49 V	192	41.10	-8.40
6	625.37	33.5 QP	46.0	-12.5	1.24 V	205	39.10	-5.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.1.4 TEST RESULTS (C1)

ABOVE 1GHz DATA :

802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.9 PK	74.0	-17.1	1.09 H	224	54.20	2.70
2	5150.00	43.5 AV	54.0	-10.5	1.09 H	224	40.80	2.70
3	*5180.00	100.1 PK			1.09 H	221	60.40	39.70
4	*5180.00	90.0 AV			1.09 H	221	50.30	39.70
5	#10360.00	56.3 PK	74.0	-17.7	1.48 H	296	42.50	13.80
6	#10360.00	46.4 AV	54.0	-7.6	1.48 H	296	32.60	13.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.1 PK	74.0	-16.9	1.02 V	224	54.40	2.70
2	5150.00	43.8 AV	54.0	-10.2	1.02 V	224	41.10	2.70
3	*5180.00	104.6 PK			1.00 V	212	64.90	39.70
4	*5180.00	94.0 AV			1.00 V	212	54.30	39.70
5	#10360.00	59.0 PK	74.0	-15.0	1.28 V	104	45.20	13.80
6	#10360.00	48.8 AV	54.0	-5.2	1.28 V	104	35.00	13.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. “#“:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	99.9 PK			1.04 H	228	60.40	39.50
2	*5200.00	88.9 AV			1.04 H	228	49.40	39.50
3	#10400.00	56.9 PK	74.0	-17.1	1.52 H	277	42.80	14.10
4	#10400.00	46.9 AV	54.0	-7.1	1.52 H	277	32.80	14.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	104.0 PK			1.08 V	218	64.50	39.50
2	*5200.00	94.0 AV			1.08 V	218	54.50	39.50
3	#10400.00	59.6 PK	74.0	-14.4	1.24 V	118	45.50	14.10
4	#10400.00	48.5 AV	54.0	-5.5	1.24 V	118	34.40	14.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	100.6 PK			1.12 H	228	61.00	39.60
2	*5240.00	89.5 AV			1.12 H	228	49.90	39.60
3	5350.00	47.8 PK	74.0	-26.2	1.18 H	217	45.20	2.60
4	5350.00	40.8 AV	54.0	-13.2	1.18 H	217	38.20	2.60
5	#10480.00	58.5 PK	74.0	-15.5	1.42 H	304	43.20	15.30
6	#10480.00	48.4 AV	54.0	-5.6	1.42 H	304	33.10	15.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	105.4 PK			1.06 V	221	65.80	39.60
2	*5240.00	94.9 AV			1.06 V	221	55.30	39.60
3	5350.00	58.0 PK	74.0	-16.0	1.04 V	208	55.40	2.60
4	5350.00	45.6 AV	54.0	-8.4	1.04 V	208	43.00	2.60
5	#10480.00	60.2 PK	74.0	-13.8	1.22 V	121	44.90	15.30
6	#10480.00	50.4 AV	54.0	-3.6	1.22 V	121	35.10	15.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.0 PK	74.0	-18.0	1.14 H	227	53.60	2.40
2	5150.00	42.6 AV	54.0	-11.4	1.14 H	227	40.20	2.40
3	*5180.00	99.0 PK			1.18 H	229	59.60	39.40
4	*5180.00	88.9 AV			1.18 H	229	49.50	39.40
5	#10360.00	56.8 PK	74.0	-17.2	1.42 H	304	42.90	13.90
6	#10360.00	46.3 AV	54.0	-7.7	1.42 H	304	32.40	13.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.1 PK	74.0	-15.9	1.12 V	224	55.70	2.40
2	5150.00	45.1 AV	54.0	-8.9	1.12 V	224	42.70	2.40
3	*5180.00	103.2 PK			1.14 V	245	63.80	39.40
4	*5180.00	92.9 AV			1.14 V	245	53.50	39.40
5	#10360.00	59.8 PK	74.0	-14.2	1.21 V	118	45.90	13.90
6	#10360.00	48.6 AV	54.0	-5.4	1.21 V	118	34.70	13.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	98.9 PK			1.16 H	241	59.40	39.50
2	*5200.00	87.9 AV			1.16 H	241	48.40	39.50
3	#10400.00	57.0 PK	74.0	-17.0	1.52 H	301	42.90	14.10
4	#10400.00	46.9 AV	54.0	-7.1	1.52 H	301	32.80	14.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	103.6 PK			1.04 V	222	64.10	39.50
2	*5200.00	92.5 AV			1.04 V	222	53.00	39.50
3	#10400.00	59.9 PK	74.0	-14.1	1.29 V	91	45.80	14.10
4	#10400.00	49.0 AV	54.0	-5.0	1.29 V	91	34.90	14.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	100.4 PK			1.15 H	216	60.80	39.60
2	*5240.00	89.1 AV			1.15 H	216	49.50	39.60
3	5350.00	57.1 PK	74.0	-16.9	1.14 H	214	54.50	2.60
4	5350.00	43.2 AV	54.0	-10.8	1.14 H	214	40.60	2.60
5	#10480.00	57.8 PK	74.0	-16.2	1.42 H	298	42.50	15.30
6	#10480.00	48.1 AV	54.0	-5.9	1.42 H	298	32.80	15.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	104.7 PK			1.00 V	221	65.10	39.60
2	*5240.00	94.1 AV			1.00 V	221	54.50	39.60
3	5350.00	57.5 PK	74.0	-16.5	1.02 V	229	54.90	2.60
4	5350.00	44.9 AV	54.0	-9.1	1.02 V	229	42.30	2.60
5	#10480.00	61.1 PK	74.0	-12.9	1.22 V	121	45.80	15.30
6	#10480.00	50.3 AV	54.0	-3.7	1.22 V	121	35.00	15.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 38	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.2 PK	74.0	-16.8	1.18 H	224	54.80	2.40
2	5150.00	43.3 AV	54.0	-10.7	1.18 H	224	40.90	2.40
3	*5190.00	96.5 PK			1.12 H	218	57.00	39.50
4	*5190.00	88.2 AV			1.12 H	218	48.70	39.50
5	#10380.00	56.6 PK	74.0	-17.4	1.49 H	318	42.50	14.10
6	#10380.00	46.8 AV	54.0	-7.2	1.49 H	318	32.70	14.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.3 PK	74.0	-11.7	1.14 V	249	59.90	2.40
2	5150.00	47.6 AV	54.0	-6.4	1.14 V	249	45.20	2.40
3	*5190.00	100.0 PK			1.14 V	246	60.50	39.50
4	*5190.00	90.7 AV			1.14 V	246	51.20	39.50
5	#10380.00	58.9 PK	74.0	-15.1	1.22 V	114	44.80	14.10
6	#10380.00	48.5 AV	54.0	-5.5	1.22 V	114	34.40	14.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	96.8 PK			1.22 H	222	57.20	39.60
2	*5230.00	88.4 AV			1.22 H	222	48.80	39.60
3	5350.00	56.8 PK	74.0	-17.2	1.28 H	229	54.20	2.60
4	5350.00	42.8 AV	54.0	-11.2	1.28 H	229	40.20	2.60
5	#10460.00	57.9 PK	74.0	-16.1	1.52 H	324	43.10	14.80
6	#10460.00	47.6 AV	54.0	-6.4	1.52 H	324	32.80	14.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	100.5 PK			1.18 V	228	60.90	39.60
2	*5230.00	90.7 AV			1.18 V	228	51.10	39.60
3	5350.00	61.1 PK	74.0	-12.9	1.16 V	224	58.50	2.60
4	5350.00	47.5 AV	54.0	-6.5	1.16 V	224	44.90	2.60
5	#10460.00	60.0 PK	74.0	-14.0	1.29 V	112	45.20	14.80
6	#10460.00	49.6 AV	54.0	-4.4	1.29 V	112	34.80	14.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	36.2 QP	40.0	-3.8	1.25 H	274	52.00	-15.80
2	224.31	34.6 QP	46.0	-11.4	2.00 H	8	51.00	-16.40
3	280.27	35.3 QP	46.0	-10.7	1.25 H	278	48.00	-12.70
4	375.10	35.6 QP	46.0	-10.4	1.50 H	244	46.20	-10.60
5	625.37	34.8 QP	46.0	-11.2	1.00 H	218	40.40	-5.60
6	675.11	33.8 QP	46.0	-12.2	1.25 H	325	39.00	-5.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.47	35.8 QP	40.0	-4.2	1.08 V	298	51.60	-15.80
2	57.98	35.6 QP	40.0	-4.4	1.00 V	4	50.00	-14.40
3	99.95	32.0 QP	43.5	-11.5	1.25 V	295	50.60	-18.60
4	283.38	31.9 QP	46.0	-14.1	1.00 V	215	44.50	-12.60
5	375.10	31.9 QP	46.0	-14.1	1.25 V	191	42.50	-10.60
6	675.11	32.6 QP	46.0	-13.4	1.50 V	220	37.80	-5.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.1.5 TEST RESULTS (C2)

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.17	35.6 QP	40.0	-4.4	1.28 H	28	51.40	-15.80
2	278.72	33.3 QP	46.0	-12.7	1.00 H	270	46.10	-12.80
3	375.10	32.8 QP	46.0	-13.2	1.00 H	143	43.40	-10.60
4	449.71	31.0 QP	46.0	-15.0	1.49 H	347	39.90	-8.90
5	625.37	36.4 QP	46.0	-9.6	1.24 H	222	42.00	-5.60
6	675.11	36.8 QP	46.0	-9.2	1.00 H	333	42.00	-5.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.58	36.4 QP	40.0	-3.6	1.47 V	228	52.20	-15.80
2	104.62	31.5 QP	43.5	-12.0	1.00 V	4	49.30	-17.80
3	148.14	28.7 QP	43.5	-14.8	1.00 V	275	42.60	-13.90
4	260.06	33.1 QP	46.0	-12.9	1.24 V	195	46.80	-13.70
5	375.10	30.8 QP	46.0	-15.2	1.49 V	239	41.40	-10.60
6	675.11	32.3 QP	46.0	-13.7	1.00 V	244	37.50	-5.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 29, 2013	Nov. 28, 2014
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 27, 2013	Dec. 26, 2014
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 13, 2014	Feb. 12, 2015
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 17, 2013	Jul. 16, 2014
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

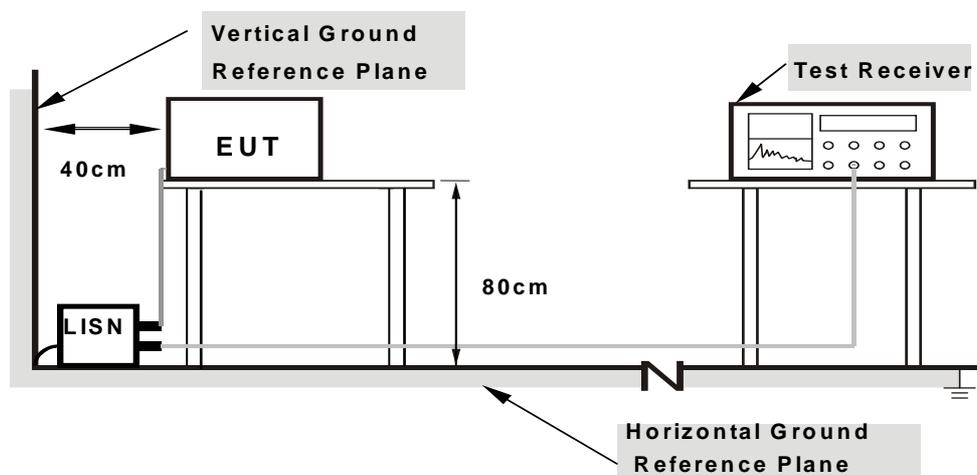

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.


4.2.7 TEST RESULTS (A1)

CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16569	0.11	47.76	31.20	47.87	31.31	65.17	55.17	-17.30	-23.86
2	0.50000	0.12	42.20	36.43	42.32	36.55	56.00	46.00	-13.68	-9.45
3	0.87603	0.14	35.25	28.99	35.39	29.13	56.00	46.00	-20.61	-16.87
4	1.29172	0.15	35.53	29.41	35.68	29.56	56.00	46.00	-20.32	-16.44
5	1.76092	0.16	34.55	28.92	34.71	29.08	56.00	46.00	-21.29	-16.92
6	3.33274	0.21	32.43	27.97	32.64	28.18	56.00	46.00	-23.36	-17.82

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

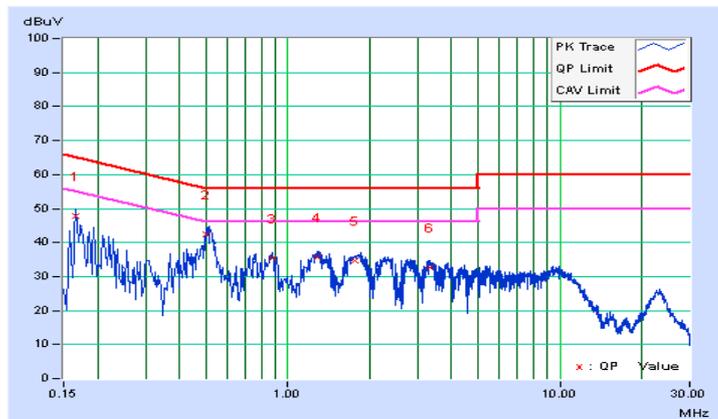




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.08	49.14	32.09	49.22	32.17	66.00	56.00	-16.78	-23.83
2	0.21647	0.08	42.94	29.81	43.02	29.89	62.95	52.95	-19.93	-23.06
3	0.51448	0.09	43.62	36.44	43.71	36.53	56.00	46.00	-12.29	-9.47
4	1.27608	0.11	36.68	30.66	36.79	30.77	56.00	46.00	-19.21	-15.23
5	9.83507	0.34	35.96	30.95	36.30	31.29	60.00	50.00	-23.70	-18.71
6	22.51129	0.61	28.74	23.31	29.35	23.92	60.00	50.00	-30.65	-26.08

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

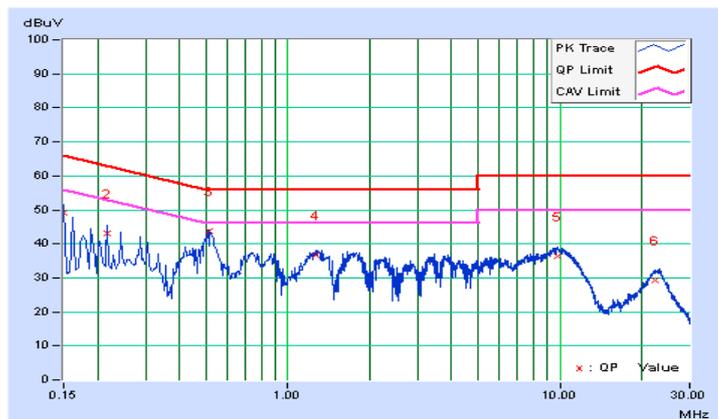


4.2.8 TEST RESULTS (A2)

CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16181	0.11	46.83	37.33	46.94	37.44	65.37	55.37	-18.43	-17.93
2	0.22851	0.12	37.21	28.64	37.33	28.76	62.50	52.50	-25.17	-23.74
3	0.49715	0.12	24.05	19.19	24.17	19.31	56.05	46.05	-31.87	-26.73
4	2.93392	0.19	34.81	32.94	35.00	33.13	56.00	46.00	-21.00	-12.87
5	3.66900	0.22	33.15	29.78	33.37	30.00	56.00	46.00	-22.63	-16.00
6	20.61103	1.04	43.04	37.16	44.08	38.20	60.00	50.00	-15.92	-11.80


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

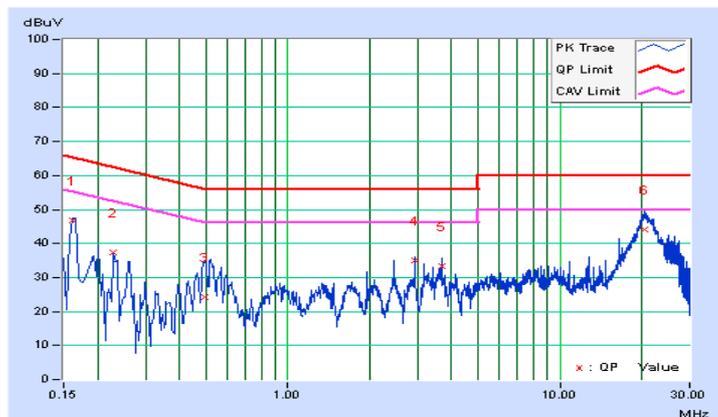

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16564	0.08	42.76	32.41	42.84	32.49	65.18	55.18	-22.34	-22.69
2	0.19301	0.08	42.05	32.46	42.13	32.54	63.91	53.91	-21.78	-21.37
3	0.51754	0.09	34.51	33.16	34.60	33.25	56.00	46.00	-21.40	-12.75
4	2.93392	0.15	34.10	32.68	34.25	32.83	56.00	46.00	-21.75	-13.17
5	9.58874	0.33	32.15	20.13	32.48	20.46	60.00	50.00	-27.52	-29.54
6	20.21221	0.59	41.48	35.60	42.07	36.19	60.00	50.00	-17.93	-13.81

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

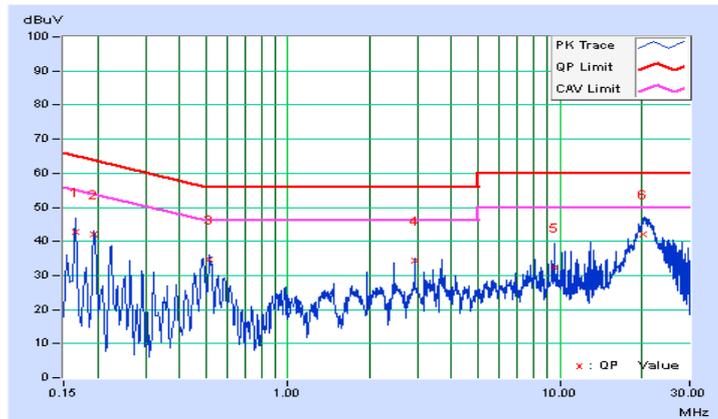


4.2.9 TEST RESULTS (B1)

CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15802	0.11	49.64	33.47	49.75	33.58	65.57	55.57	-15.82	-21.99
2	0.17346	0.11	47.37	30.57	47.48	30.68	64.79	54.79	-17.31	-24.11
3	0.50000	0.12	41.04	35.37	41.16	35.49	56.00	46.00	-14.84	-10.51
4	1.13532	0.14	29.74	23.56	29.88	23.70	56.00	46.00	-26.12	-22.30
5	2.08545	0.16	29.04	20.54	29.20	20.70	56.00	46.00	-26.80	-25.30
6	10.28472	0.52	28.57	22.38	29.09	22.90	60.00	50.00	-30.91	-27.10

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

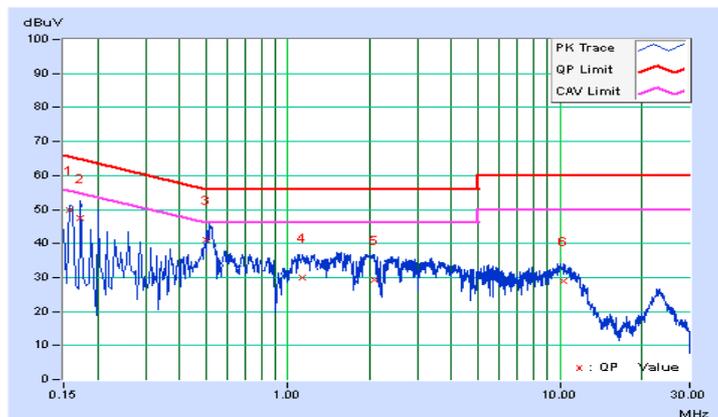




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16173	0.08	49.14	33.51	49.22	33.59	65.37	55.37	-16.15	-21.78
2	0.52145	0.09	43.19	36.96	43.28	37.05	56.00	46.00	-12.72	-8.95
3	1.28390	0.11	36.78	30.83	36.89	30.94	56.00	46.00	-19.11	-15.06
4	1.76483	0.12	35.74	30.13	35.86	30.25	56.00	46.00	-20.14	-15.75
5	3.53215	0.16	33.39	25.69	33.55	25.85	56.00	46.00	-22.45	-20.15
6	9.72168	0.33	35.67	30.17	36.00	30.50	60.00	50.00	-24.00	-19.50

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

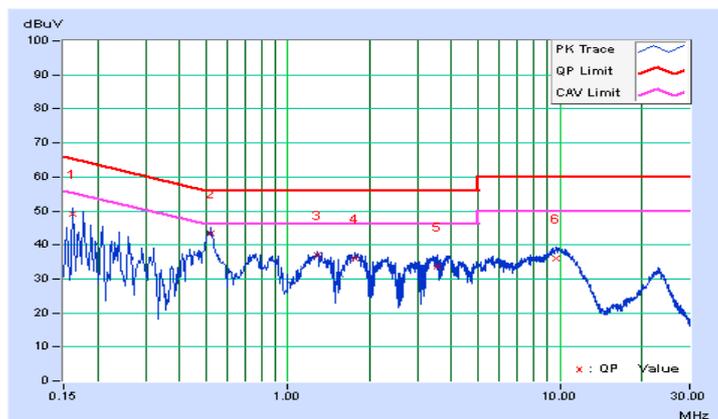


4.2.10 TEST RESULTS (B2)

CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16139	0.11	45.00	35.87	45.11	35.98	65.39	55.39	-20.28	-19.41
2	0.19692	0.12	37.79	29.14	37.91	29.26	63.74	53.74	-25.83	-24.48
3	0.48678	0.12	34.34	31.60	34.46	31.72	56.22	46.22	-21.76	-14.50
4	2.42562	0.17	34.56	33.91	34.73	34.08	56.00	46.00	-21.27	-11.92
5	13.00608	0.66	36.08	19.23	36.74	19.89	60.00	50.00	-23.26	-30.11
6	20.32169	1.04	42.25	36.29	43.29	37.33	60.00	50.00	-16.71	-12.67

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

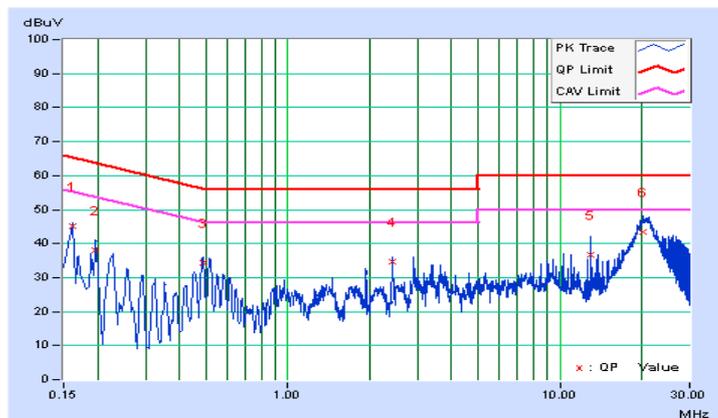




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16096	0.08	44.89	35.22	44.97	35.30	65.41	55.41	-20.44	-20.11
2	0.19305	0.08	40.42	31.24	40.50	31.32	63.90	53.90	-23.40	-22.58
3	0.51719	0.09	34.11	32.68	34.20	32.77	56.00	46.00	-21.80	-13.23
4	2.91046	0.15	34.88	33.89	35.03	34.04	56.00	46.00	-20.97	-11.96
5	11.54374	0.38	33.81	19.01	34.19	19.39	60.00	50.00	-25.81	-30.61
6	20.93556	0.60	41.03	35.03	41.63	35.63	60.00	50.00	-18.37	-14.37

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

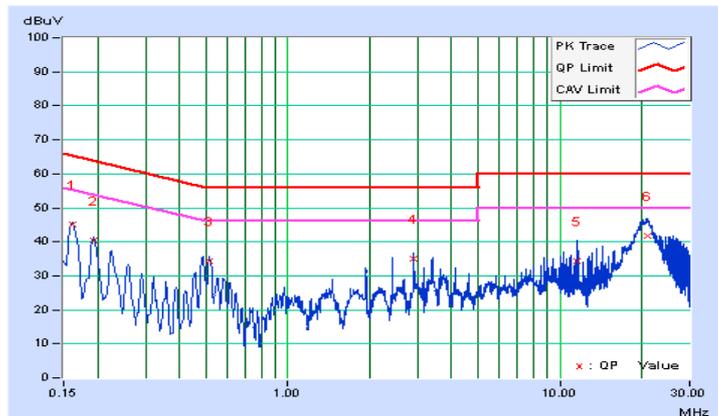


4.2.11 TEST RESULTS (C1)

CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15782	0.11	49.20	33.74	49.31	33.85	65.58	55.58	-16.27	-21.73
2	0.51856	0.12	43.54	36.83	43.66	36.95	56.00	46.00	-12.34	-9.05
3	1.31909	0.15	36.30	29.97	36.45	30.12	56.00	46.00	-19.55	-15.88
4	2.31617	0.17	34.07	28.40	34.24	28.57	56.00	46.00	-21.76	-17.43
5	9.76860	0.49	35.23	29.87	35.72	30.36	60.00	50.00	-24.28	-19.64
6	22.53084	1.08	28.14	22.81	29.22	23.89	60.00	50.00	-30.78	-26.11

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

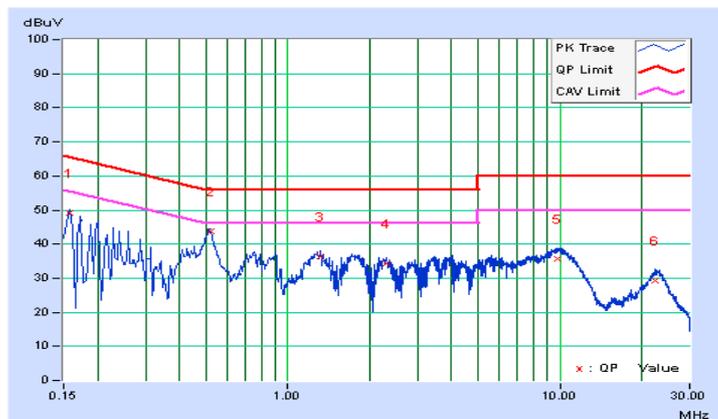




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16569	0.08	48.00	31.49	48.08	31.57	65.17	55.17	-17.09	-23.60
2	0.50000	0.09	41.60	35.87	41.69	35.96	56.00	46.00	-14.31	-10.04
3	0.77169	0.10	35.60	28.85	35.70	28.95	56.00	46.00	-20.30	-17.05
4	1.30410	0.11	35.71	29.71	35.82	29.82	56.00	46.00	-20.18	-16.18
5	1.78436	0.12	34.80	29.13	34.92	29.25	56.00	46.00	-21.08	-16.75
6	9.85853	0.34	27.57	21.16	27.91	21.50	60.00	50.00	-32.09	-28.50

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

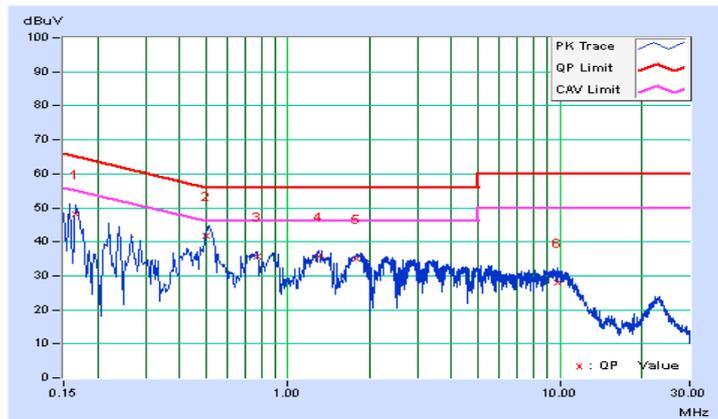


4.2.12 TEST RESULTS (C2)

CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18122	0.12	23.86	17.63	23.98	17.75	64.43	54.43	-40.45	-36.68
2	0.51363	0.12	34.27	32.04	34.39	32.16	56.00	46.00	-21.61	-13.84
3	2.92219	0.19	36.12	34.70	36.31	34.89	56.00	46.00	-19.69	-11.11
4	10.87122	0.55	33.94	22.52	34.49	23.07	60.00	50.00	-25.51	-26.93
5	13.00999	0.66	33.75	19.38	34.41	20.04	60.00	50.00	-25.59	-29.96
6	27.52782	1.17	43.84	43.83	45.01	45.00	60.00	50.00	-14.99	-5.00

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

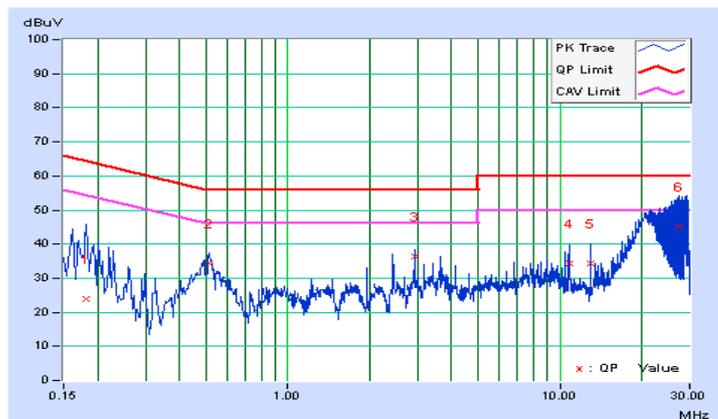




PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16569	0.08	39.16	28.76	39.24	28.84	65.17	55.17	-25.93	-26.33
2	0.51583	0.09	34.07	32.20	34.16	32.29	56.00	46.00	-21.84	-13.71
3	2.92610	0.15	33.90	32.68	34.05	32.83	56.00	46.00	-21.95	-13.17
4	10.44112	0.35	32.68	17.33	33.03	17.68	60.00	50.00	-26.97	-32.32
5	13.55739	0.43	27.27	21.89	27.70	22.32	60.00	50.00	-32.30	-27.68
6	20.95120	0.60	42.53	36.62	43.13	37.22	60.00	50.00	-16.87	-12.78

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

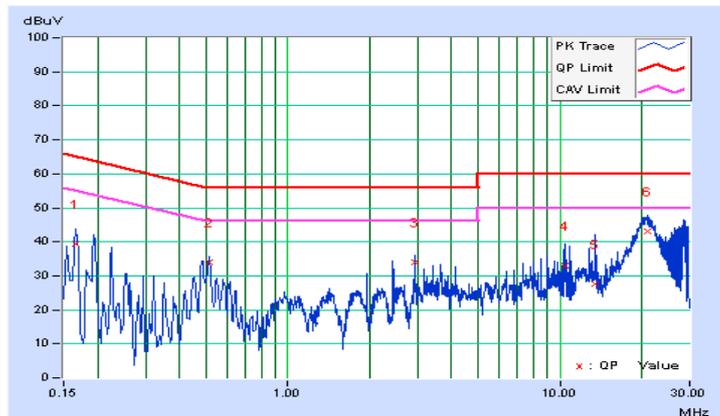

4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

Per KDB 662911 D01 Multiple Transmitter Output v02r01 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT \leq 4;


Array Gain = 0 dB (i.e., no array gain) for channel widths \geq 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT \geq 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

4.3.2 TEST SETUP

FOR POWER OUTPUT MEASUREMENT

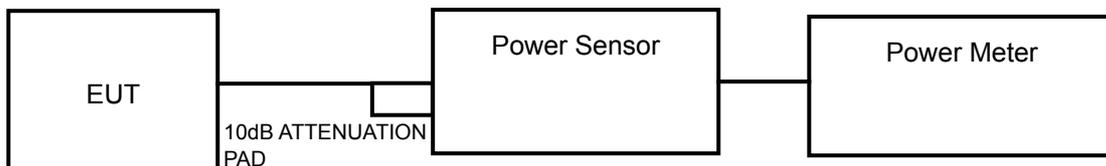

FOR 26dB BANDWIDTH



4.3.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.3.4 TEST PROCEDURE

FOR AVERAGE POWER MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 TEST RESULTS

POWER OUTPUT:

802.11a

CHAN.	FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	11.42	10.84	26.002	14.15	16.93	PASS
40	5200	11.58	11.20	27.571	14.40	17.00	PASS
48	5240	11.63	11.19	27.707	14.43	16.90	PASS

NOTE:

CHAIN 0

1. $4\text{dBm} + 10\log(20.91) = 17.20 \text{ dBm} > 17\text{dBm}$
2. $4\text{dBm} + 10\log(20.60) = 17.14 \text{ dBm} > 17\text{dBm}$
3. $4\text{dBm} + 10\log(20.51) = 17.12 \text{ dBm} > 17\text{dBm}$

CHAIN 1

1. $4\text{dBm} + 10\log(19.64) = 16.93 \text{ dBm} < 17\text{dBm}$
2. $4\text{dBm} + 10\log(20.34) = 17.08 \text{ dBm} > 17\text{dBm}$
3. $4\text{dBm} + 10\log(19.53) = 16.90 \text{ dBm} < 17\text{dBm}$

802.11n (20MHz)

CHAN.	FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	11.39	10.78	25.739	14.11	17	PASS
40	5200	11.53	11.72	29.082	14.64	17	PASS
48	5240	11.61	11.15	27.520	14.40	17	PASS

NOTE:

CHAIN 0

1. $4\text{dBm} + 10\log(21.15) = 17.25 \text{ dBm} > 17\text{dBm}$
2. $4\text{dBm} + 10\log(21.21) = 17.27 \text{ dBm} > 17\text{dBm}$
3. $4\text{dBm} + 10\log(21.66) = 17.36 \text{ dBm} > 17\text{dBm}$

CHAIN 1

1. $4\text{dBm} + 10\log(21.00) = 17.22 \text{ dBm} > 17\text{dBm}$
2. $4\text{dBm} + 10\log(20.75) = 17.17 \text{ dBm} > 17\text{dBm}$
3. $4\text{dBm} + 10\log(21.05) = 17.23 \text{ dBm} > 17\text{dBm}$



802.11n (40MHz)

CHAN.	FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	13.50	13.50	44.774	16.51	17	PASS
46	5230	13.74	14.13	49.541	16.95	17	PASS

NOTE:

CHAIN 0

- 1. $4\text{dBm} + 10\log(50.06) = 20.99 \text{ dBm} > 17\text{dBm}$
- 2. $4\text{dBm} + 10\log(50.32) = 21.02 \text{ dBm} > 17\text{dBm}$

CHAIN 1

- 1. $4\text{dBm} + 10\log(47.22) = 20.74 \text{ dBm} > 17\text{dBm}$
- 2. $4\text{dBm} + 10\log(48.23) = 20.83 \text{ dBm} > 17\text{dBm}$



26dB BANDWIDTH:

802.11a

CHANNEL	FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
36	5180	20.91	19.64	PASS
40	5200	20.60	20.34	PASS
48	5240	20.51	19.53	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
36	5180	21.15	21.00	PASS
40	5200	21.21	20.75	PASS
48	5240	21.66	21.05	PASS

802.11n (40MHz)


CHANNEL	FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
38	5190	50.06	47.22	PASS
46	5230	50.32	48.23	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11a

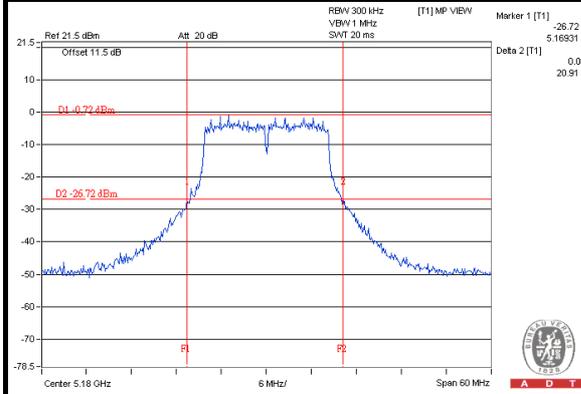

802.11n (20MHz)

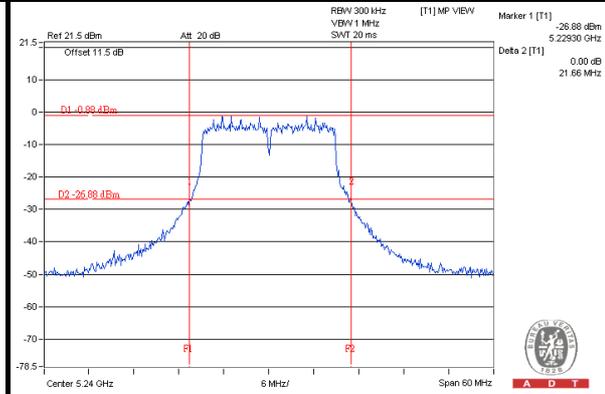

802.11n (40MHz)

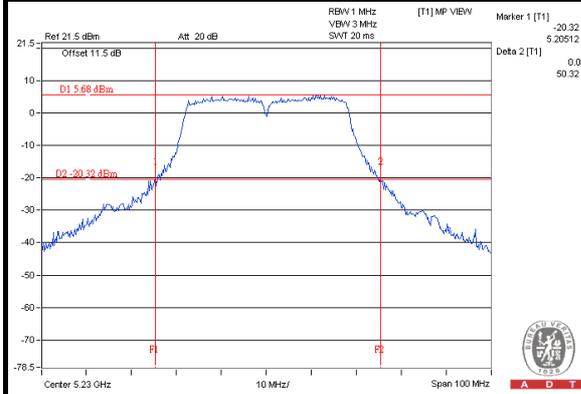

4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

FREQUENCY BAND	LIMIT
5.15 ~ 5.25GHz	4dBm

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.4.4 TEST PROCEDURES

Using method SA-2 alternative

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 30 KHz, Set VBW \geq 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = 30ms. (802.11 a, 802.11n (20MHz)),
Sweep time = 60ms. (802.11n (40MHz))
- 5) Perform a single sweep.
- 6) Record the max value and add 10 log (1/duty cycle)

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6.

4.4.7 TEST RESULTS

802.11a

CHAN.	FREQ. (MHz)	PSD (dBm)		TOTAL PSD W/O DUTY FACTOR (dBm)	DUTY FACTOR	TOTAL PSD WITH DUTY FACTOR (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1					
36	5180	-1.22	-1.47	1.67	0.15	1.82	2.99	PASS
40	5200	-1.17	-1.52	1.67	0.15	1.82	2.99	PASS
48	5240	-1.52	-1.49	1.51	0.15	1.66	2.99	PASS

NOTE:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $4.0\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4-(7.01-6) = 2.99\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (20MHz)

CHAN.	FREQ. (MHz)	PSD (dBm)		TOTAL PSD W/O DUTY FACTOR (dBm)	DUTY FACTOR	TOTAL PSD WITH DUTY FACTOR (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1					
36	5180	-1.77	-1.51	1.37	0.16	1.53	2.99	PASS
40	5200	-1.65	-1.72	1.33	0.16	1.49	2.99	PASS
48	5240	-1.84	-1.70	1.24	0.16	1.40	2.99	PASS

NOTE:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $4.0\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4-(7.01-6) = 2.99\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.




A D T

802.11n (40MHz)

CHAN.	FREQ. (MHz)	PSD (dBm)		TOTAL PSD W/O DUTY FACTOR (dBm)	DUTY FACTOR	TOTAL PSD WITH DUTY FACTOR (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1					
38	5190	-3.63	-3.46	-0.53	0.23	-0.30	2.99	PASS
46	5230	-2.49	-3.00	0.27	0.23	0.50	2.99	PASS

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $4.0\text{dBi} + 10\log(2) = 7.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4 - (7.01 - 6) = 2.99\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

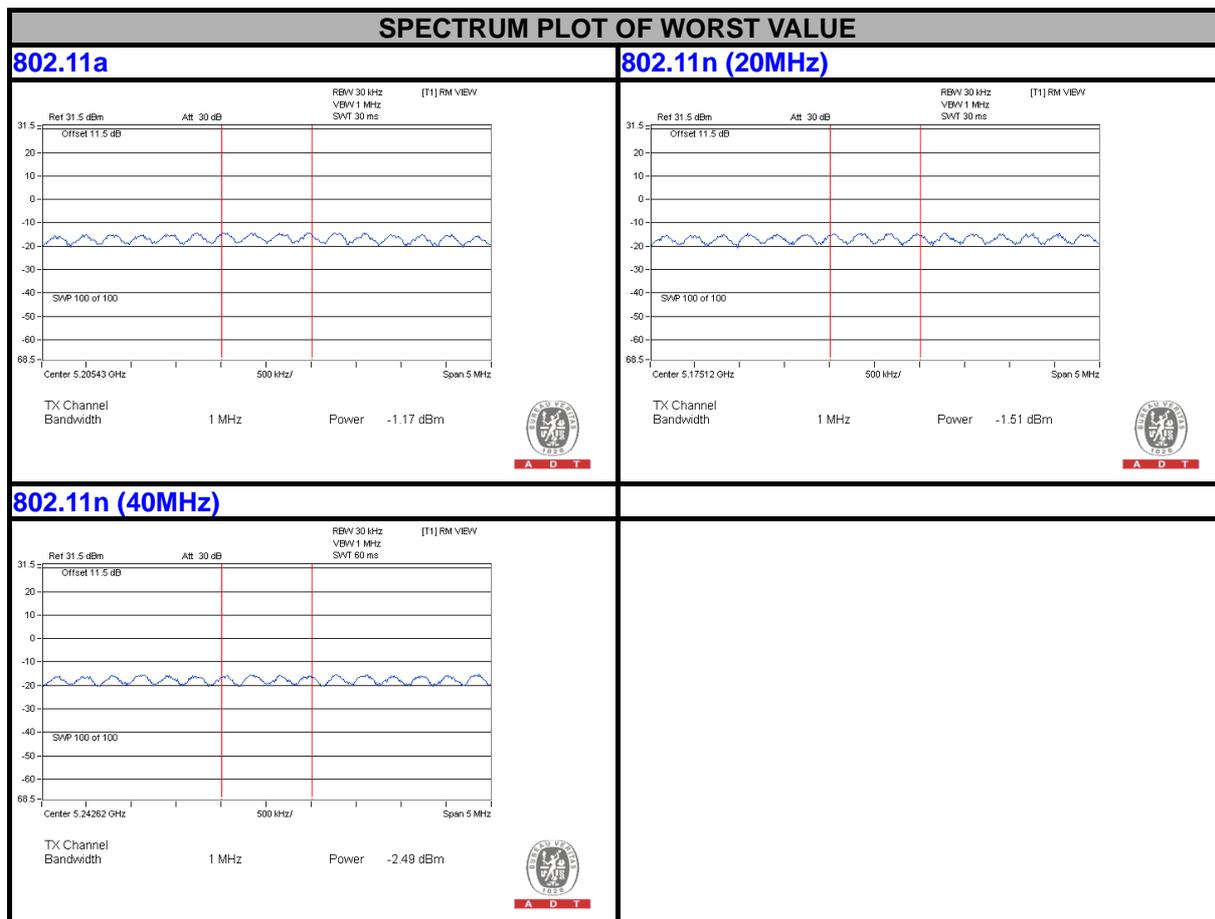


4.5 PEAK POWER EXCURSION MEASUREMENT

4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.5.4 TEST PROCEDURE

- 1) Set RBW = 1 MHz, VBW \geq 3 MHz, Detector = peak.
- 2) Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
- 3) Use the peak search function to find the peak of the spectrum.
- 4) Measure the PPSD.
- 5) Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD. Find the worst channel and modulation mode as above test procedure, and follow KDB 789033 D01 General UNII Test Procedures v01r03 and repeat step 1 to 5 for final testing of each modulation mode on a single channel (all modulation types) in a single operating band to compliance with the peak excursion requirement.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITIONS


Same as 4.2.6



A D T

4.5.7 TEST RESULTS

MODULATION MODE	MODULATION TYPE	FREQ. (MHz)	PEAK VALUE (dBm)	PPSD WITHOUT DUTY FACTOR (dBm)	PPSD WITH DUTY FACTOR (dBm)	PEAK EXCURSION (dB)	LIMIT (dB)	PASS /FAIL
802.11a	BPSK	5240	7.11	-1.52	-1.37	8.48	13	PASS
	QPSK		8.23	-1.37	-1.04	9.27	13	PASS
	16QAM		8.04	-1.96	-1.38	9.42	13	PASS
	64QAM		7.66	-2.54	-1.74	9.40	13	PASS
802.11n (20MHz)	BPSK	5240	6.70	-1.84	-1.68	8.38	13	PASS
	QPSK		6.42	-1.68	-1.47	7.89	13	PASS
	16QAM		7.58	-2.73	-2.14	9.72	13	PASS
	64QAM		6.98	-3.44	-2.47	9.45	13	PASS
802.11n (40MHz)	BPSK	5230	5.88	-2.49	-2.26	8.14	13	PASS
	QPSK		6.27	-3.52	-2.98	9.25	13	PASS
	16QAM		7.20	-3.92	-3.05	10.25	13	PASS
	64QAM		6.15	-4.33	-2.85	9.00	13	PASS

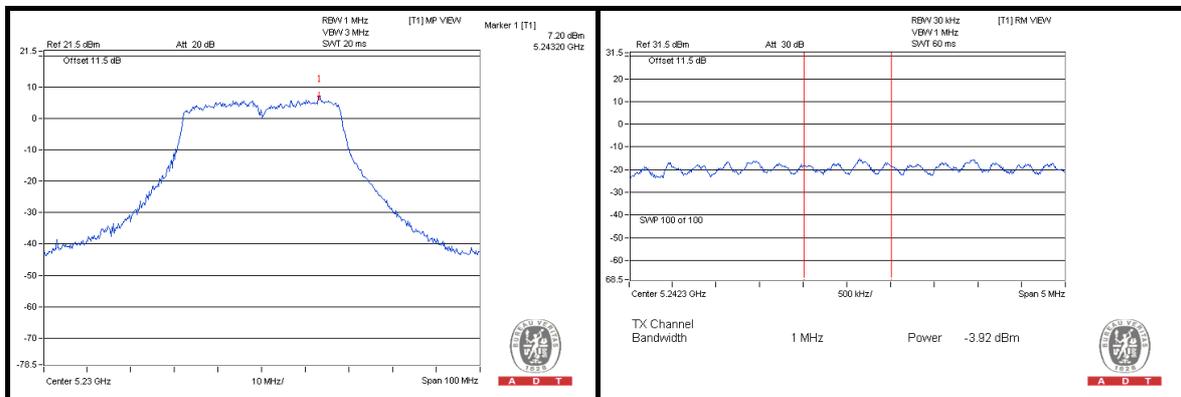


4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 TEST SETUP

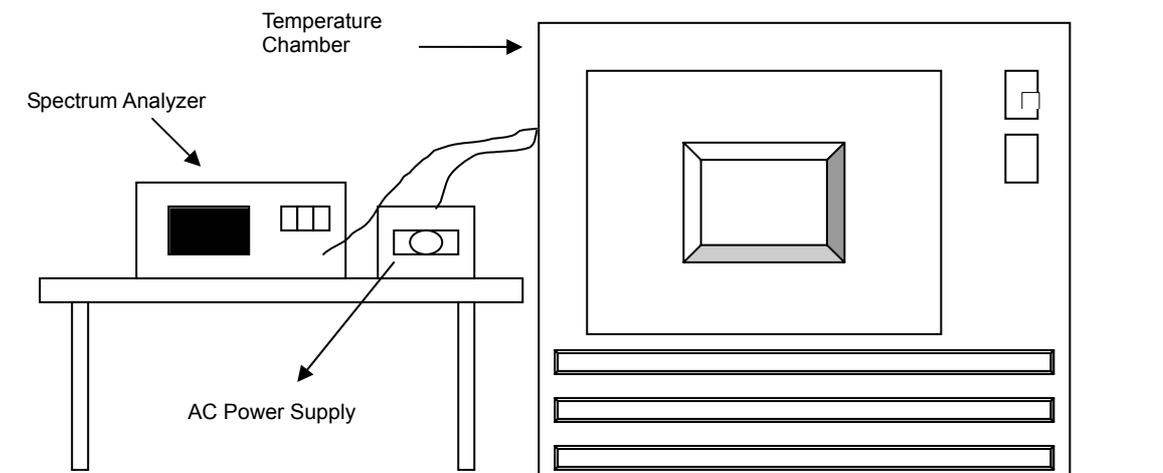

4.6.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.6.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5240MHz									
TEMP. ()	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5239.9793	-0.00040	5239.9862	-0.00026	5239.9822	-0.00034	5239.9858	-0.00027
40	120	5240.0197	0.00038	5240.0101	0.00019	5240.0168	0.00032	5240.0183	0.00035
30	120	5240.0192	0.00037	5240.0224	0.00043	5240.0251	0.00048	5240.0261	0.00050
20	120	5239.9973	-0.00005	5240.0042	0.00008	5240.0041	0.00008	5240.0058	0.00011
10	120	5240.0105	0.00020	5240.0111	0.00021	5240.0110	0.00021	5240.0117	0.00022
0	120	5240.0259	0.00049	5240.0238	0.00045	5240.0268	0.00051	5240.0243	0.00046
-10	120	5240.0030	0.00006	5240.0066	0.00013	5240.0081	0.00015	5240.0083	0.00016
-20	120	5239.9879	-0.00023	5239.9931	-0.00013	5239.9896	-0.00020	5239.9978	-0.00004
-30	120	5240.0036	0.00007	5240.0074	0.00014	5240.0011	0.00002	5240.0014	0.00003

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5240MHz									
TEMP. ()	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5239.9976	-0.00005	5240.0041	0.00008	5240.0032	0.00006	5240.0066	0.00013
	120	5239.9973	-0.00005	5240.0042	0.00008	5240.0041	0.00008	5240.0058	0.00011
	102	5239.9978	-0.00004	5240.0037	0.00007	5240.0039	0.00007	5240.0066	0.00013

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---